

virGo


Manual Instruction



The picture is only for reference , please refer to the final product.

Pleasant Sound Surrounding You Forever

Button Description:

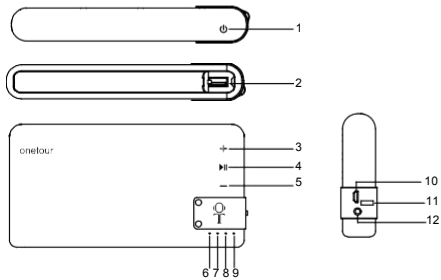

1	BUTTON : POWER ON/OFF AND WORK MODE SWITCH
2	USB : POWER BANK OUTPUT 5V-1.2A
3	BUTTON : VoL+/PRE
4	BUTTON : PLAY/PAUSE/RADIO SEARCH/CALL
5	BUTTON : VoL-/NEXT
6	BLUETOOTH LED :BLUE
7	BATTERY CAPACITY LED (67-100%) : GREEN
8	BATTERY CAPACITY LED (34-66%) : RED
9	BATTERY CAPACITY LED (0-33%) : WHITE
10	MICRO USB : DC IN 5V-1.2A
11	HOOK HOLE
12	3.5mm AUX HOLE : AUDIO-IN /FM ANTENNA

WARNING : Never use this speaker's power bank to charge other devices when playing music.

English

1.Important

Warning

- Never remove the case from this speaker.
 - Never place this speaker on any other electrical equipments.
 - Keep this speaker away from direct sunshine, naked flames, heat or water.
- Never use this speaker's power bank to charge other devices when playing music.**

- Only use attachments or accessories specified by the manufacturer.
- The battery shall not be exposed to excessive heat such as sunshine, fire ,light and water.
- Do not place any sources of danger on the speaker (e.g. lighted candles) .
- The operation temperature of the speaker is from -10°C to 40°C.
- For safety, never charge the speaker or use this speaker's power bank to charge other devices if the ambient temperature is below 0°C or above 40°C..
- If your speaker gets wet, clean it with a soft dry cloth and then let it dry completely in a well-ventilated environment before using next time.
- When it occurs that the paired device disconnects constantly, please move the device closer to this speaker or remove obstacles between them.

Note : Product information is subject to change without prior notice.

POWER ON/OFF

- Long press 2 seconds '⏻' button to turn on/ turn off the speaker.

WORK MODE SWITCH

- Short press "⏻" button to switch FM Radio mode ,AUX IN mode , Bluetooth mode.

BLUETOOTH WORK MODE

- VoL TURN UP : Long press "+" button
- VoL TURN DOWN : Long press "-" button
- PREV : Short press "⏮" button
- NEXT : Short press "⏭" button
- PLAY/PAUSE : Short press "⏸" button
- ANSWER CALL : Short press "☎" button
- HANG UP CALL : Long press "⏸" button

TWS BLUETOOTH PLAY MODE (NEED 2 virGo SPEAKERS)

Once link 2 virGo speakers together by TWS Bluetooth mode, they can play the same song at the same time by one mobile phone, then you can enjoy better experience of surround sound.

Step 1 : When you power on the two virGo speakers at the first time, short press the "⏸" key 2 times of one speaker and they start to pairing together, once paired, speakers will say "di di di" or say "TWS connect";

Step 2 : Open your mobile phone's bluetooth to search for the speakers bluetooth name "virGo" to connect.(First time using TWS play mode, we must first let these two speakers connect together, then open the mobile phone's bluetooth to search for speaker bluetooth pair name to pairing).

Protecting environment

Disposal of your old product

This speaker is designed and manufactured with high quality materials and components, which can be recycled and reused.

Do not throw away the product like the normal household waste at the end of its life, but hand it in at an official collection point or recycling point. By doing this, you make a contribution to protecting environment.

Caution

- Removal of the built-in battery invalidates the warranty and may destroy the product.

Remember that please bring your product to a professional to remove the built-in battery.

Environmental information

All unnecessary packaging has been. We have tried to make the packaging easy to separate into three materials: cardboard (box), polystyrene foam (buffer) and polyethylene (bags, protective foam sheet.).

This system consists of materials which can be recycled and reused if disassembled by a specialized company. Please observe the local regulations to the disposal of packaging materials, exhausted bad batteries and old equipments.

AUX IN WORK MODE

- VoL TURN UP : Long press "+" button
- VoL TURN DOWN : Long press "-" button
- PLAY/PAUSE : Short press "⏸" button

FM RADIO WORK MODE

- VoL TURN UP : Long press "+" button
- VoL TURN DOWN : Long press "-" button
- PREV : Short press "⏮" button
- NEXT : Short press "⏭" button
- SEARCH RADIO / PAUSE SEARCH : Short press "⏸" button

Automatic Search Radio step

First step : Short touch "⏸" button to start automatic search signal
Second step : Short touch "-" or "+" button to turn channel when automatic search had stop;

NOTE : When Radio signal is poor, please insert audio-in cable into 3.5mm AUX hole, then short press "⏻" button to switch FM Radio and Short press "⏸" button to search FM signal again (the audio-in cable can be used as an antenna to improve FM Quality) .

LED INDICATOR INSTRUCTIONS

- Blue indicator light
 - blink in pairing mode ;
 - light on when connected.
- Short press "⏻" button to know battery capacity

White led light : battery capacity 0-33% ;

White ,Red led light: battery capacity 34-66% ;

White ,Red ,Green led all light: battery capacity 67-100% ;

2.Specifications

- Rated output power (Amplifier) : 2*6W RMS (THD≤2%)
- Acoustic frequency response : 85-20000 Hz
- Speaker driver : 2 x 1.8" full range, 4 Ω
- Bass enhancement : 1 x 2.36" passive radiator
- Bluetooth version : V4.2
- Bluetooth supported profiles : HFP V 1.6, A2DP V 1.2, AVRCP V1.4
- AUX input level : 500mV±100mV
- Built-in battery : Li-battery(3.7 V, 5000 mAh)
- Micro-USB charge input : 5V-1.2A/ Micro-USB socket
- Power Bank USB Output : 5V-1.2A
- Play time in battery mode : Approx. 38- 40 hours
- Charge fully time : About 3-4 hours / 5V-1.2A
- Dimensions (W x H x D) : 166 x 87x 23 mm (Main unit)
- Unit Weight : 0.293 kg (Main unit)

3 . FUNCTION SPECIFICATION

Long press 2 seconds' ⏻' to turn on the speaker , it says "bluetooth mode" and the blue LED light blinks quickly. Search for speaker's bluetooth name "virGo" for connection or enter PIN code "0000" to connect with your tablet, computer, mobile phone. Once connected, blue LED light is on.

ANSWER CALL

When Bluetooth is connected with a mobile phone and a call is coming, please short press "☎" button to answer call and hen short press again to hang up the call , or Long press "⏸" button to hang up the call.

CHARGING SPEAKER

- White, Red or Green LED indicator lights blink when charge the speaker; the white, red, green LEDs are all lights on once the battery be charged fully.
- Then speaker says "low battery " or blue light fast blinks when playing music. Please charge for the speaker as soon as possible.

POWER BANK SPEAKER TO CHARGE OTHER DEVICE(E.G. : MOBLE PHONE)

First step : Short press "⏻" button to turn on power bank output;
Second step : Connect mobile phone with speaker's power bank output by USB cable.

IN THE BOX

- Power Bank Speaker: 1PCS
- User manual : 1PCS
- 3.5mm Audio cable : 1PCS
- USB charge cable : 1PCS
- Cowhide hand belt : 1PCS

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.