

yooBee Wrist Tracker R



Blooloc NV

1. Description

yooBee Wrist Tracker R is a portable tag with **3-axis accelerometer sensor^①**. It can advertise **iBeacon, Eddystone and Sensor** datas.

The yooBee Wrist Tracker R has a ** wearable bracelet shape, IP68 waterproof construction, precise hardware, powerful firmware and buttons**.

All the parameters of yooBee Wrist Tracker R can be modified and all the sensor datas can be checked.

^① 3-axis accelerometer Sensor: STMicroelectronics® LIS3DH

2. Features

Firmware and chipset

- Programmed Blooloc NV standard MkBeaconX firmware;
- Ultra-low power consumption chipset NORDIC® nRF52 series with 32 bit ARM® Cortex-M4 CPU.

Compatibility

- Compatible with **Apple iBeacon** and **Google Eddystone**;
- Compatible with standard Eddystone Configuration GATT Service;
- Compatible with all Bluetooth® Low Energy devices.

High quality Battery and long lifetime

- High quality rechargeable lithium battery (180mAH 3.7V);
- Easily get real-time battery notifications.

Configurable SLOTS and parameters

- Up to 6 configurable SLOTS;
- Each SLOT can be set to iBeacon, UID, URL, TLM, Device Info and 3-axis Sensor data;
- Device Name, Password, Connection Mode, Advertising Interval, Tx Power and 3-axis Sensor Parameters all are configurable;

Flexible sensor function

- 3-axis accelerometer has dynamically user-selectable full scales of $\pm 2g/\pm 4g/\pm 8g/\pm 16g$ and the parameter is configurable ;
- 3-axis accelerometer is capable of measuring accelerations with output data rates from 1 Hz to 100 Hz and the parameter is configurable;
- User can get the raw data of the 3-axis sensor sampling data from the device in real time;

Trigger function

- Support button trigger and motion trigger;
- Control the device to start advertising all the time, stop advertising, or advertise for a while.

Transmission Power Levels

- 9 adjustable grades;
- Transmission power range: -40dBm to +4dBm.

Long Range

- The max. Range 120 meters in the open space (0.55dBm TX power) ;
- The range depends on the environment where the W5 series Beacon is placed.

Security

- Configurable password (1-16 characters);
- With or without password (Lock/Unlock parameters);
- AES-128-ECB. encrypt.

Connection Mode

- Advertising mode, non-connectable;
- Configuration mode, connectable.

Custom made mounting

- Color customizable;
- Easy to print a customization logo/branding on the case.
- Provided with your own configuration;
- Customizable software, hardware and structure.

OTA and DFU

- Supported upgrade via Over-The-Air;
- Nordic[®] official Device Firmware Upgrade(DFU);
- Reserved J-Link port on the board for programming.

3. Physical Characteristics

Item	Value	Remarks
Case Color	Black	Other colors can be customized
Main Material	TPU+PC	-
Battery Model	Lithium polymer battery	Lithium battery, 180mAH 3.7V
Battery Lifetime	About 5 months	At default settings ^② and without selfdischarge factor
Operation Voltage	3.3V	DC
Waterproof Level	IP68	-
Static Current	14.7 uA	Device is power off
Average Current	50 uA	At default settings ^③
Transmission Range	>120m	0.55dBm TX power, in the open space
Antenna	50ohm	Ceramic Antenna
Size	Body size: 47.8x35.7x11.7mm Wearable range: 13cm~25cm	Refer to mechanical draws for details
Net Weight	32g	With battery
Operating Temperature	-20 ~ +60°C	-
Storage Temperature	20 ~ +30°C	-


②③ Default setting: 1 Active SLOT(Device Info), 0dBm TX power and 1000ms Advertising Interval.

4. Configurable Parameters

Item	Value	Default Setting	Range and Remarks
iBeacon	UUID	-	16bytes
	Major	-	0~65535
	Minor	-	0~65535
UID	Namespace	-	10bytes
	Instance ID	-	6bytes
URL	Encoded Scheme Prefix	-	4types: http://www. https://www. http:// https://
	Encoded URL	-	2-17 bytes
TLM	-	-	TLM shows only one in the broadcast.
Device Name	-	BeaconX Pro	Up to 20 characters
Advertising Interval	-	1000ms	100~10000ms, Unit:100ms
Tx Power	-	0dBm	-40dBm to 4dBm, 9 adjustable grades
Password	-	Moko4321	1-16 characters or NO password
Connection Mode	-	Connectable	Connectable/Unconnectable
Trigger	1.Button double tap	-	Always advertise
			Start advertising for a while (1~65535s)
			Stop advertising for a while (1~65535s)
	2.Button triple tap	-	Always advertise
			Start advertising for a while (1~65535s)
			Stop advertising for a while (1~65535s)
	3.Device moves	-	Always advertise
			Start advertising after a static period time (1~65535s)
			Stop advertising after a static period time (1~65535s)
3-axis accelerometer Sensor	Full Scales	±2g	±2g, ±4g, ±8g, ±16g
	Output data rate	10 Hz	1 Hz, 10 Hz, 25 Hz, 50 Hz, 100 Hz
	Sensitivity	7	7 to 255

5. Mechanical Draws

All dimensions is mm.

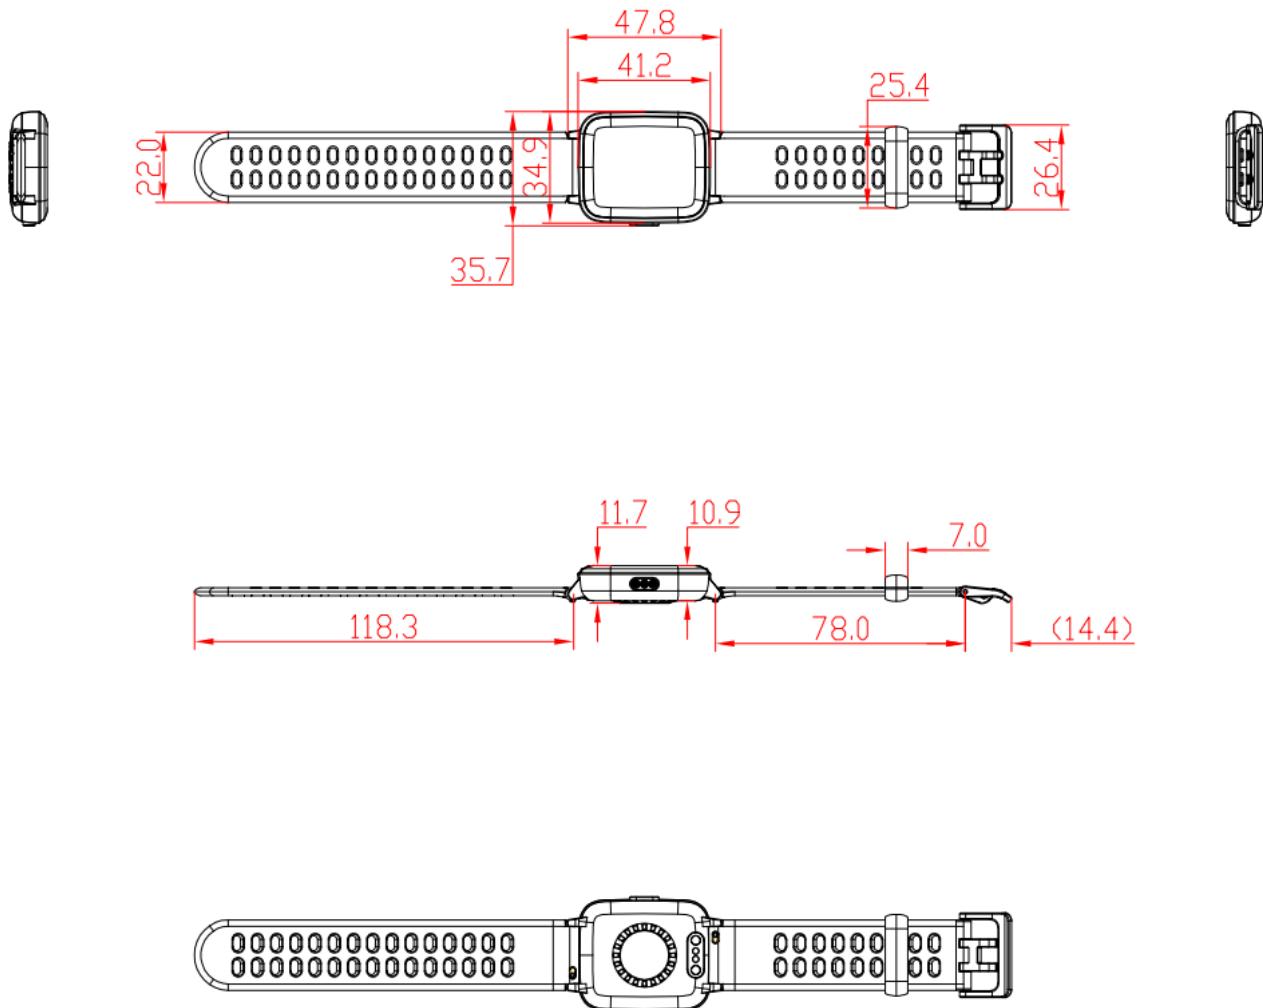

6. FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 5mm between the radiator & your body

9. Contact Information

Revision History

Revision	Description	Approved	Date
V1.0	Initial Release	Ovey	2020.06.16