



FCC RF Test Report

Product Name: Smart Phone

Model Number: NEN-LX3

Report No.: SYBH(Z-RF)20201128017001-2006

FCC ID: 2ATEYNEN-LX3

Authorized	Name	Date
Prepared by: (Test Engineer)	<i>Qin Jiamei</i>	2021-03-02
Reviewed by: (Test Engineer)	<i>Wen Hongyun</i>	2021-03-02
Approved by: (Lab Manager)	<i>He Hao</i>	2021-03-02

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

Telephone: +86 769 23830808

Fax: +86 769 23837628

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
9. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

MODIFICATION RECORD

No.	Report No	Modification Description
1	SYBH(Z-RF)20201128017001-2006	First release.

DECLARATION

Type	Description
Multiple Models Applications	<input checked="" type="checkbox"/> The present report applies to single model. <input type="checkbox"/> The present report applies to several models. The practical measurements are performed with the model The present report only presents the worst test case of all modes, see relevant test results for detailed.

CONTENT

1	General Information	5
1.1	Test standard/s	5
1.2	Test Environment	5
1.3	Test Laboratories	5
1.4	Applicant and Manufacturer	5
1.5	Application details	6
2	Description of the Equipment under Test (EUT)	7
2.1	General Description	7
2.2	EUT Identity	7
3	General Test Conditions / Configurations	8
3.1	Mode of Operation:	8
4	U-NII DFS RULE REQUIREMENTS	10
4.1	WORKING MODES ANF REQUIRED TEST ITEMS	10
4.2	Requirements	10
4.3	DFS Detection Thresholds	11
4.4	Response Requirements	11
4.5	Parameters of DFS Test Signals	13
4.6	Procedure	15
5	Test Equipment	16
6	TEST RESULTS	17
6.1	SUMMARY OF TEST RESULT	17
7	Measurement Uncertainty	30

1 General Information

1.1 Test standard/s

Applied Rules :	47 CFR FCC Part 2, Subpart J 47 CFR FCC Part 15, Subpart C
Test Method :	FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices

1.2 Test Environment

Temperature :	TN	15 to 30	°C during room temperature tests
Ambient Relative Humidity:	25 to 75 %		
Atmospheric Pressure:	Not applicable		
Power supply :	VN	3.87	V DC by Battery

NOTE 1: 1) VN= nominal voltage, VL= low extreme test voltage, VH= High extreme test voltage;

TN= normal temperature, TL= low extreme test temperature, TH= High extreme test temperature.

1.3 Test Laboratories

Test Location 1 :	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Address of Test Location 1 :	No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C
Temperature:	25°C
Relative humidity :	55 %

1.4 Applicant and Manufacturer

Company Name :	Huawei Device Co., Ltd.
Address :	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

1.5 Application details

1.5.1 Current Test Project/Report

Date of Receipt Sample:	2021-01-18
Start of test:	2021-01-19
End of test:	2021-03-02

2 Description of the Equipment under Test (EUT)

2.1 General Description

NEN-LX3 is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency bands include GSM850, GSM900, DCS1800 and PCS1900. The UMTS frequency band includes band I, band II, band IV, band V and band VIII. The LTE frequency bands include band 1,band 2,band 3,band 4,band 5,band 7,band 8,band 12,band 17,band 26,band 28 and band 66. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS, Wi-Fi etc. Externally it provides earphone port (to provide voice service), and dual SIM/single SIM card interface. NEN-LX3 is dual/single SIM smart phone. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Note 1: Only 5G WIFI DFS test data included in this report.



2.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.2.1 Board

Board		
Description	Software Version	Hardware Version
Main Board	11.0.1.103(C900E48R1P2)	HL1NTNM

2.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-110600E02	Huawei Device Co., Ltd.	Input voltage: 100-240Vac, 50/60Hz,1.8A Output voltage: 5V2A/10V4A/11V6A max
Adapter	HW-110600B02	Huawei Device Co., Ltd.	Input voltage: 100-240Vac, 50/60Hz,1.8A Output voltage: 5V2A/10V4A/11V6A max
Adapter	HW-110600U02	Huawei Device Co., Ltd.	Input voltage: 100-240Vac, 50/60Hz,1.8A Output voltage: 5V2A/10V4A/11V6A max
Adapter	HW-110600A02	Huawei Device Co., Ltd.	Input voltage: 100-240Vac, 50/60Hz,1.8A Output voltage: 5V2A/10V4A/11V6A max
Battery	HB466589EFW	Huawei Device Co., Ltd.	Rated capacity: 4200mAh Nominal Voltage:  +3.87V Charging Voltage:  +4.45V

3 General Test Conditions / Configurations

3.1 Mode of Operation:

Characteristics	Description	
TX/RX Operating Band	5250 MHz to 5350 MHz, 5470 MHz to 5725 MHz	
Type of Equipment:	<input checked="" type="checkbox"/> Stand-alone, <input type="checkbox"/> Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment), <input type="checkbox"/> Plug-in radio device (Equipment intended for a variety of host systems), <input type="checkbox"/> Plug-in radio device (Equipment intended for a variety of host systems), <input type="checkbox"/> Other_____	
DFS Operational mode	<input type="checkbox"/> Master, <input checked="" type="checkbox"/> Slave without radar detection, <input type="checkbox"/> Slave withradar detection	
The equipment can operate in ad-hoc mode	<input checked="" type="checkbox"/> no ad-hoc operation, <input type="checkbox"/> ad-hoc operation in the frequency range 5 150 MHz to 5 250 MHz without DFS, <input type="checkbox"/> ad-hoc operation with DFS	
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 20 MHz,
	<input checked="" type="checkbox"/> 802.11n	<input checked="" type="checkbox"/> 20 MHz, <input checked="" type="checkbox"/> 40 MHz
	<input checked="" type="checkbox"/> 802.11ac	<input checked="" type="checkbox"/> 20 MHz, <input checked="" type="checkbox"/> 40 MHz, <input checked="" type="checkbox"/> 80 MHz, <input type="checkbox"/> 160MHz
Modulation Type	802.11a: BPSK/QPSK/16QAM/64QAM (OFDM).	
	802.11n: BPSK/QPSK/16QAM/64QAM (OFDM).	
	802.11ac: BPSK/QPSK/16QAM/64QAM/256QAM (OFDM).	
Antenna Ports(TX&RX)	Ant 1	
Smart Antenna Systems	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> SISO, <input type="checkbox"/> 2*2 CDD, <input type="checkbox"/> 3*3 CDD, <input type="checkbox"/> 4*4 CDD
	<input checked="" type="checkbox"/> 802.11n	<input checked="" type="checkbox"/> SISO, <input type="checkbox"/> 2*2 MIMO, <input type="checkbox"/> 3*3 MIMO, <input type="checkbox"/> 4*4 MIMO
	<input checked="" type="checkbox"/> 802.11ac	<input checked="" type="checkbox"/> SISO, <input type="checkbox"/> 2*2 MIMO, <input type="checkbox"/> 3*3 MIMO, <input type="checkbox"/> 4*4 MIMO
Antenna Gain (dBi)	Ant 1: -1.1 dBi (per antenna port, max.)	
	Remark: When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.	
Beamforming Gain	<input type="checkbox"/> Supported_____ dBi, <input checked="" type="checkbox"/> Not Supported	
Antenna Type	<input checked="" type="checkbox"/> Integral (permanent fixed antenna, which may be built-in, designed as an indispensable part of EUT) <input type="checkbox"/> Dedicated (removable antenna supplied with EUT, designed as an indispensable part of EUT)	
Power Supply	Type:	<input type="checkbox"/> External DC mains, <input checked="" type="checkbox"/> Battery,

Characteristics	Description	
		<input type="checkbox"/> AC/DC Adapter, <input type="checkbox"/> Powered over Ethernet (PoE). <input type="checkbox"/> USB <input type="checkbox"/> Other_____
	Input Rated Voltage	3.87V
	Operating Voltage Range	3.6V-4.45V

4 U-NII DFS RULE REQUIREMENTS

4.1 WORKING MODES ANF REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately.

Table 1. Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2. Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

4.2 Requirements

Per FCC KDB 905462 D02 the following are the requirements for Client Devices:

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is

associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.

- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

4.3 DFS Detection Thresholds

Table 3 below provides the *DFS Detection Thresholds* for *Master Devices* as well as *Client Devices* incorporating *In-Service Monitoring*.

Table3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1 and 2)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density <10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will Ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

4.4 Response Requirements

Table 4 provides the response requirements for *Master* and *Client Devices* incorporating DFS.

Table4. DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.

Parameter	Value
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth. See Note 3.
<p>Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

4.5 Parameters of DFS Test Signals

As the EUT is a Client Device with no Radar Detection only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time. Table 5 lists the parameters for the Short Pulse Radar Waveforms. A plot of the Radar Pulse Type 0 used for testing is included in this report.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	6 sec 1 360 Roundup 19 10 PRI	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6. Parameters for Long Pulse Radar Waveforms

Radar Type	Pulse Width (μ sec)	Chirp Width (MHz)	PRI (μ sec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 -100	5 -20	1000 -2000	1 -3	8 -20	80%	30

Table 7. Parameters for Frequency Hopping Radar Waveforms

Radar Type	Pulse Width (μ sec)	PRI (μ sec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4.6 Procedure

The FCC KDB 905462 D02 describes a radiated test setup and a conducted test setup. A conducted test setup was used for this testing. Figure 1 shows the typical test setup.

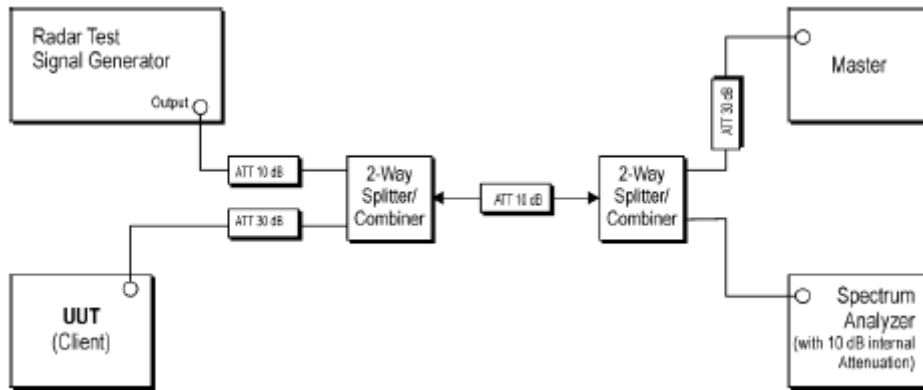


Figure 1. Test Setup for DFS

1. The radar pulse generator is setup to provide a pulse at the frequency that the Master and Client are operating. A Type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
 2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at a level of approximately -64dBm at the antenna of the Master device.
 3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the Traffic and the occurrence of the radar pulse.
 4. The Client Device (EUT) is set up per the diagram in Figure 1 and communications between the Master device and the Client is established.
 5. The data file specified by the FCC which the timing plots minimum channel loading of approximately 17% or greater is streamed from the "file computer" through the Master to the Slave Device.
 6. The real time spectrum analyzer is set to record a 13sec window to any transmissions occurring up to and after 10sec.
 7. The system is again setup and the monitoring time is shortened in order to capture the Channel Closing Transmission Time. This time is measured to insure that the Client ceases transmission within 200ms and the aggregate of emissions occurring after 200ms up to 10 sec do not exceed 60ms.
- (Note: the channel may be different since the Master and Client have changed channels due to the detection of the initial radar pulse.)

8. Monitor the UUT for more than 30 minutes following Channel Closing Transmission Time if radar detection occurs to verify that the UUT does not resume any transmissions on this Channel.

5 Test Equipment

Equipment	Model	Manufacturer	S/N	Cal Date	Cal- Due
Vector Signal Generator	R&S	SMW200A	103447	2020/11/10	2021/11/09
Spectrum Analyzer	Agilent	N9020A	MY52090652	2020/11/09	2021/11/08
JS1120-3 BT/WIFI test system	JS0806-2	JS Tonscend	188060102	2020/11/10	2021/11/09
Notebook Computer	Hewlett Packard	Elite Book 840	5CG53648N9	unshielded	unshielded
AP	ASUS	GT-AX11000 (FCC ID : MSQ-RTHR00)	KBICHR000002	unshielded	unshielded

6 TEST RESULTS

6.1 SUMMARY OF TEST RESULT

FCC Rule No.	Test Parameter	Remarks	Pass/Fail
15.407(h)	DFS Detection Threshold	Applicable	Pass
15.407(h)	Channel Availability Check time	No Applicable	N/A
15.407(h)	Channel Move time	Applicable	Pass
15.407(h)	Channel Closing Transmission Time	Applicable	Pass
15.407(h)	Non-Occupancy Period	Applicable	Pass
15.407(h)	Uniform Spreading	No Applicable	N/A
15.407(h)	U-NII Detection Bandwidth	No Applicable	N/A

6.1.1 TEST MODE: DEVICE OPERATING IN MASTER MODE

The EUT is slave equipment, it need a master device when testing.

Master with injection at the Master. (Radar Test Waveforms are injected into the Master)

6.1.2 DFS DETECTION THRESHOLD


The radar signal was the same as the transmitted channels, and injected into the antenna port of AP(master) for measuring the channel closing transmission time and channel move time.

For the EIRP of the master is more than 200 milliwatt, the detection threshold level at the input of the receiver of master is -64dBm, the test level is lower than required level for 1dB and master antenna gain is 2.3 dBi,. So required interference level is -60.7 dBm($= -64 + 1 + 2.3$). We used detection threshold is -62dBm for the test.


6.1.2.1 Test Result

Channel	Radar Type	Result	Limit[dbm]	Verdict
5320	Type0	-62.02	-62	PASS
5500	Type0	-62.48	-62	PASS
5640	Type0	-62.85	-62	PASS
5260	Type0	-62.42	-62	PASS
5570	Type0	-62.90	-62	PASS


6.1.2.2 Test Graphs

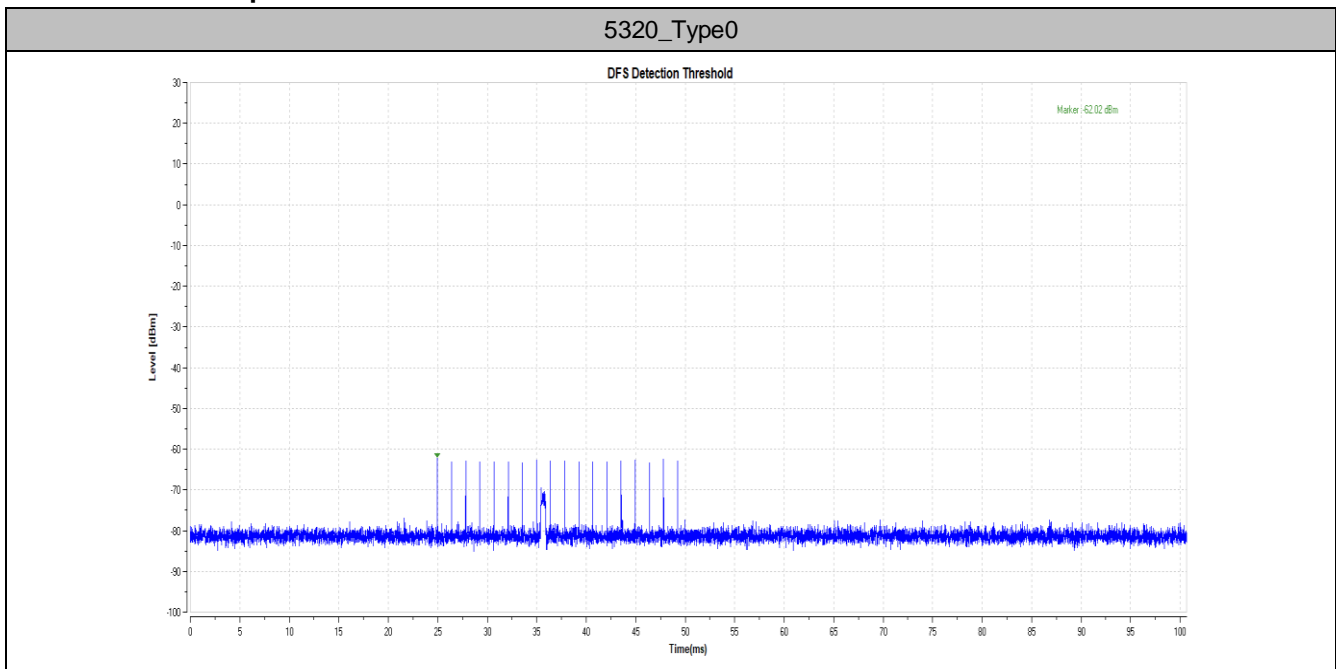


5500_Type0

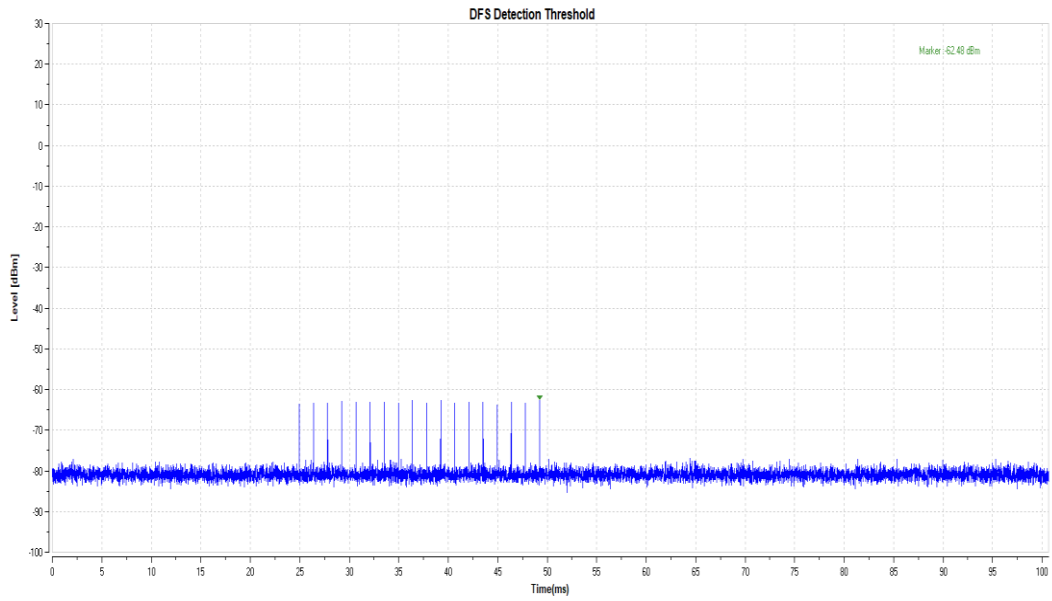


5640_Type0

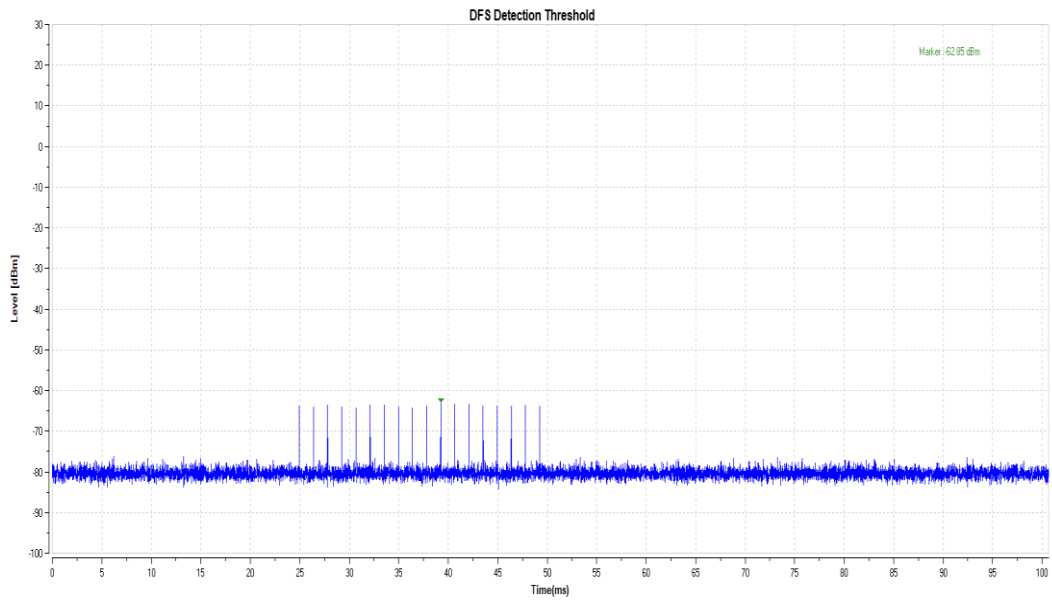

5290_Type0

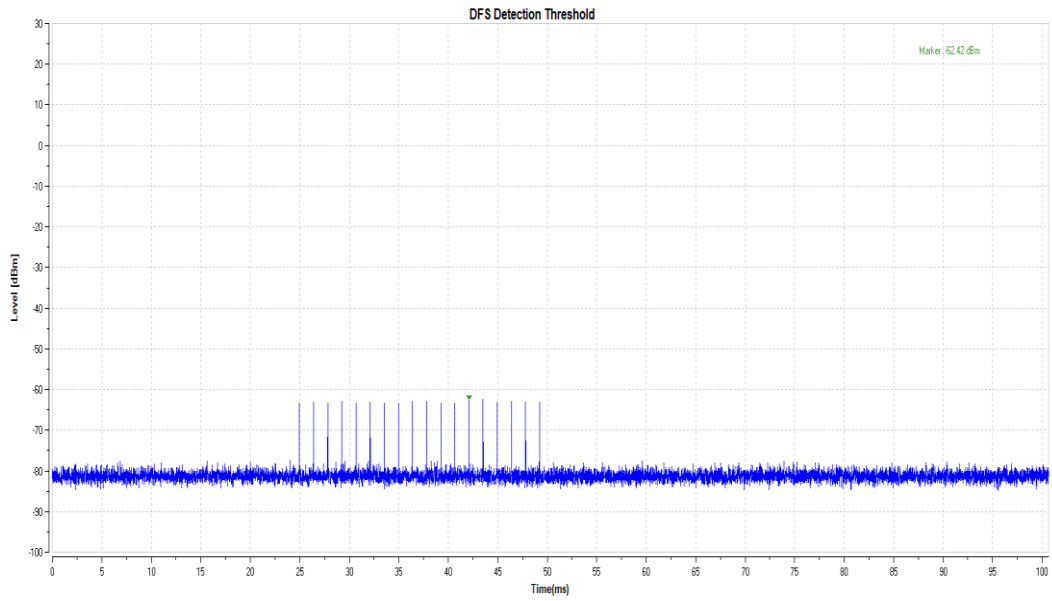

5530_Type0

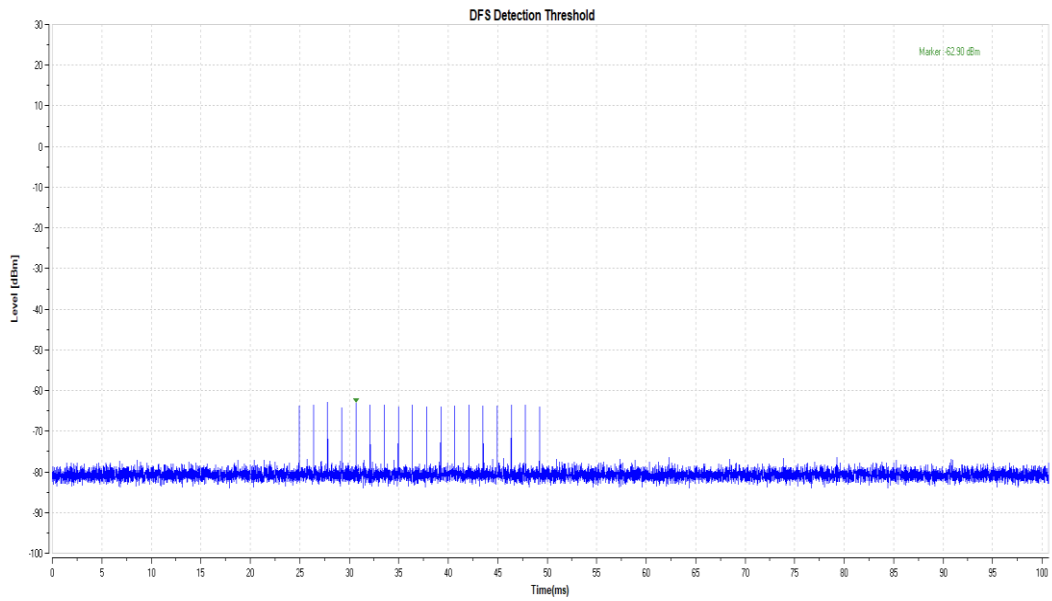



6.1.3 Channel Loading

6.1.3.1 Test Result


TestMode	Channel	Result	Limit [%]	Verdict
11AC20SISO	5320	26.48	17	PASS
	5500	32.52	17	PASS
	5640	28.65	17	PASS
11AC80SISO	5290	21.14	17	PASS
	5530	24.3	17	PASS

6.1.3.2 Test Graphs

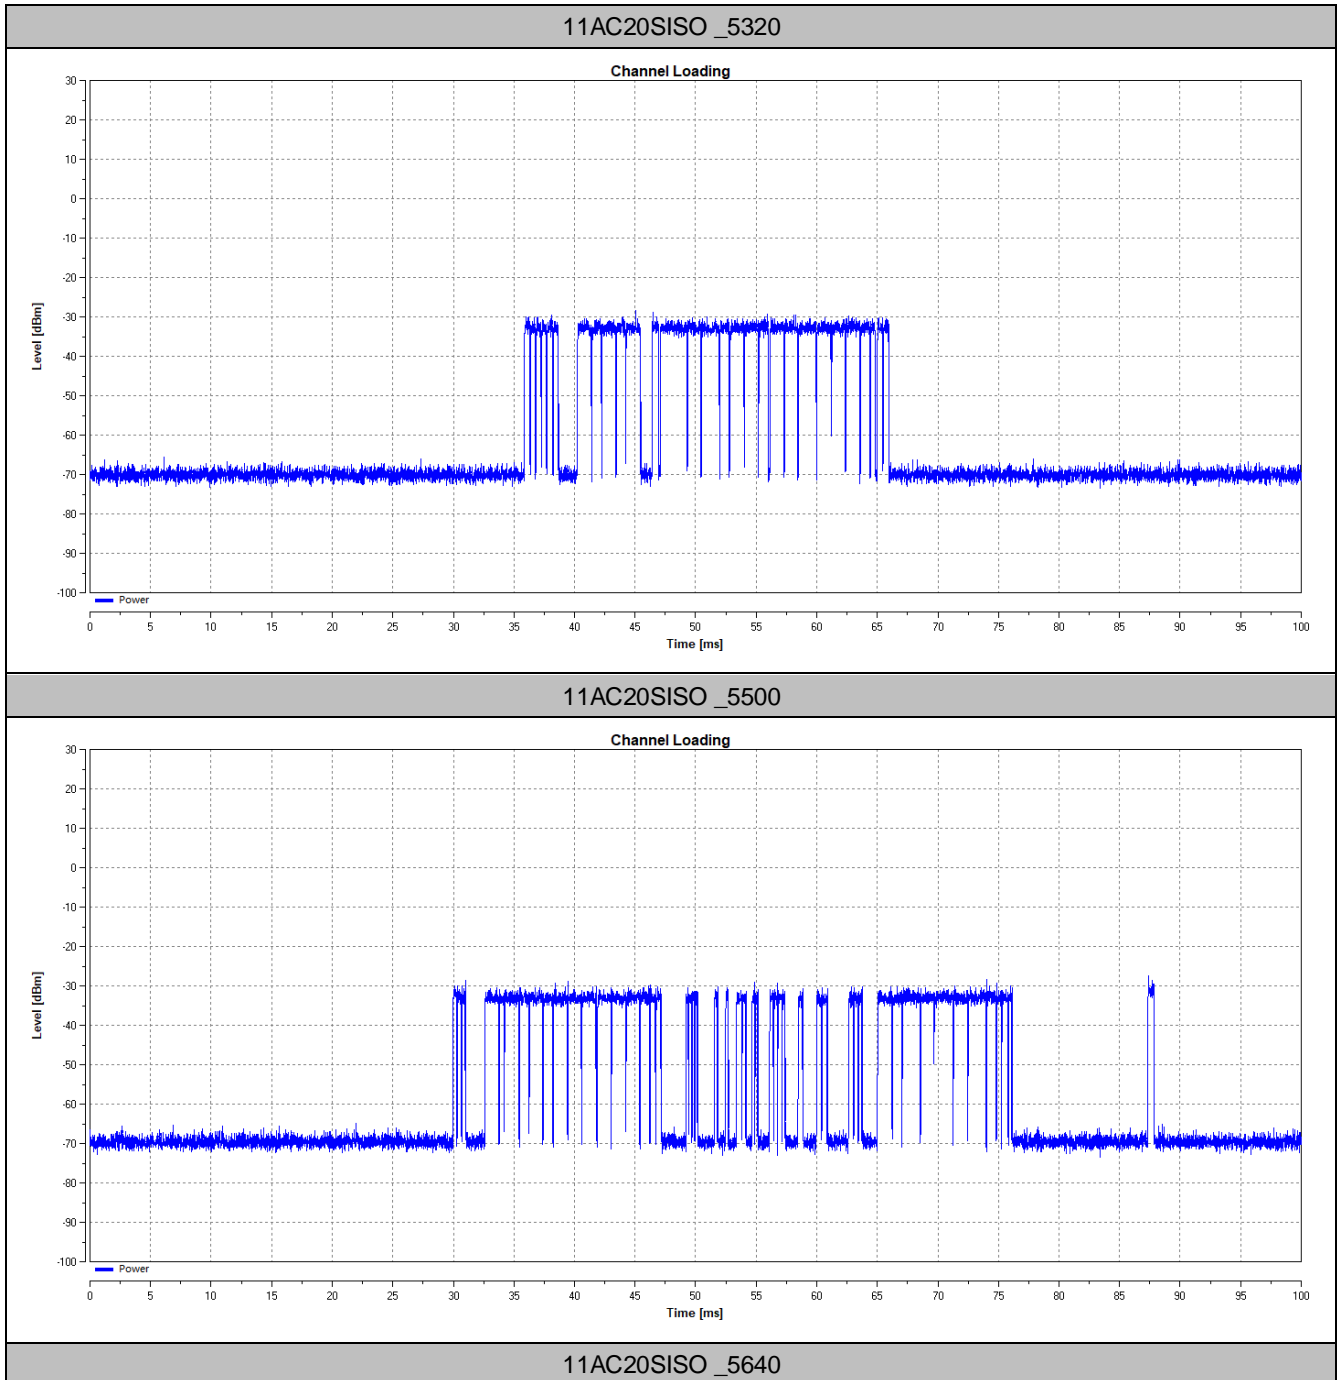


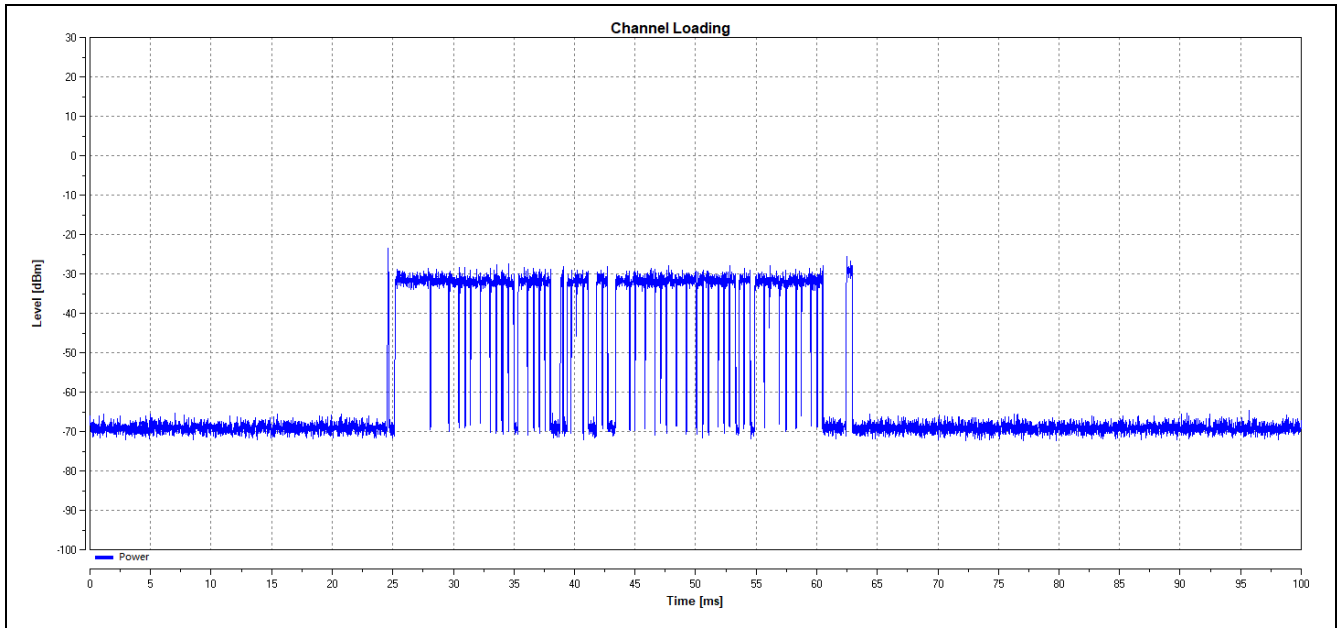

11AC80SISO_5290

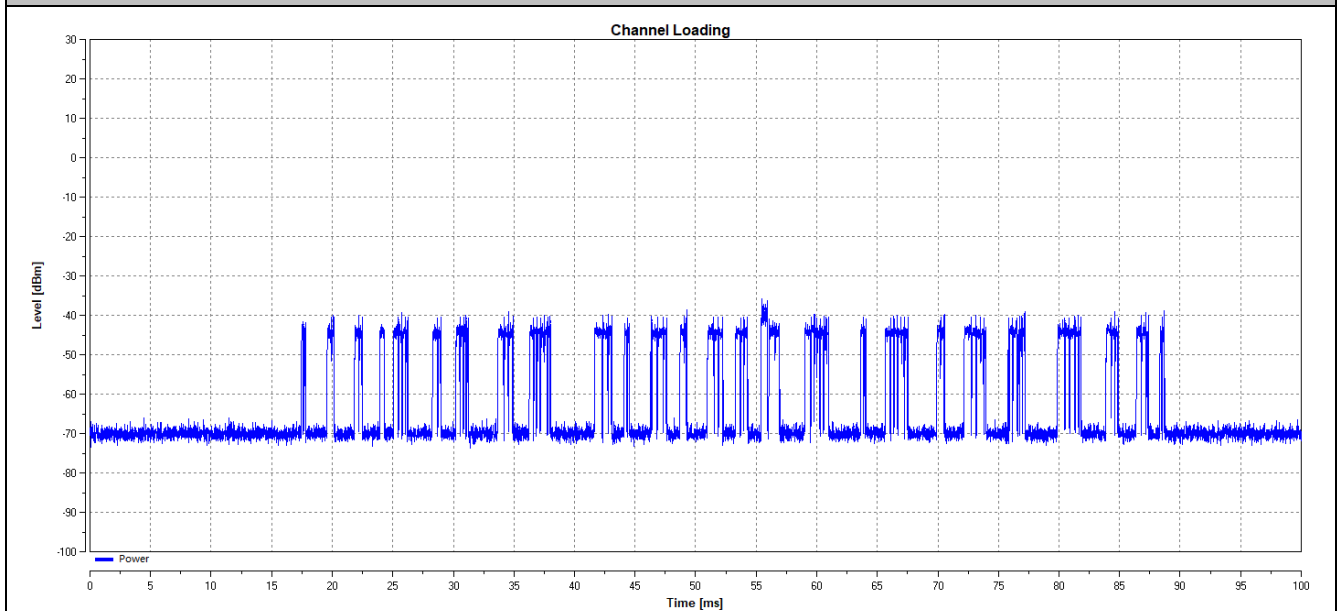

11AC80SISO_5530

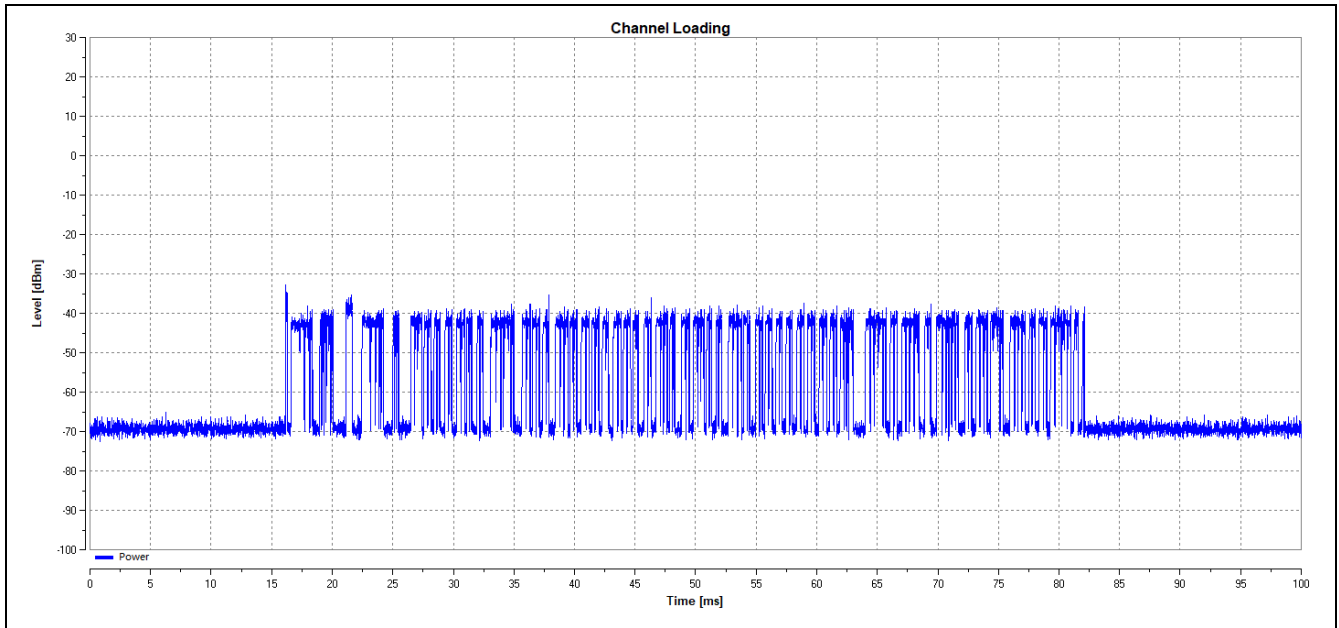


6.1.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC

6.1.4.1 Test Result


TestMode	Channel	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AC20SISO	5320	19.5	60	776.1	10000	PASS
	5500	49.4	60	864.5	10000	PASS
	5640	42.9	60	855.4	10000	PASS
11AC80SISO	5290	49.4	60	774.8	10000	PASS
	5530	23.4	60	816.4	10000	PASS

Note: The aggregate time in the 200 milliseconds starting at the beginning of the Channel Move Time is not calculated within the channel closing transmission time, so the limit is 60ms.


6.1.4.2 Test Graphs

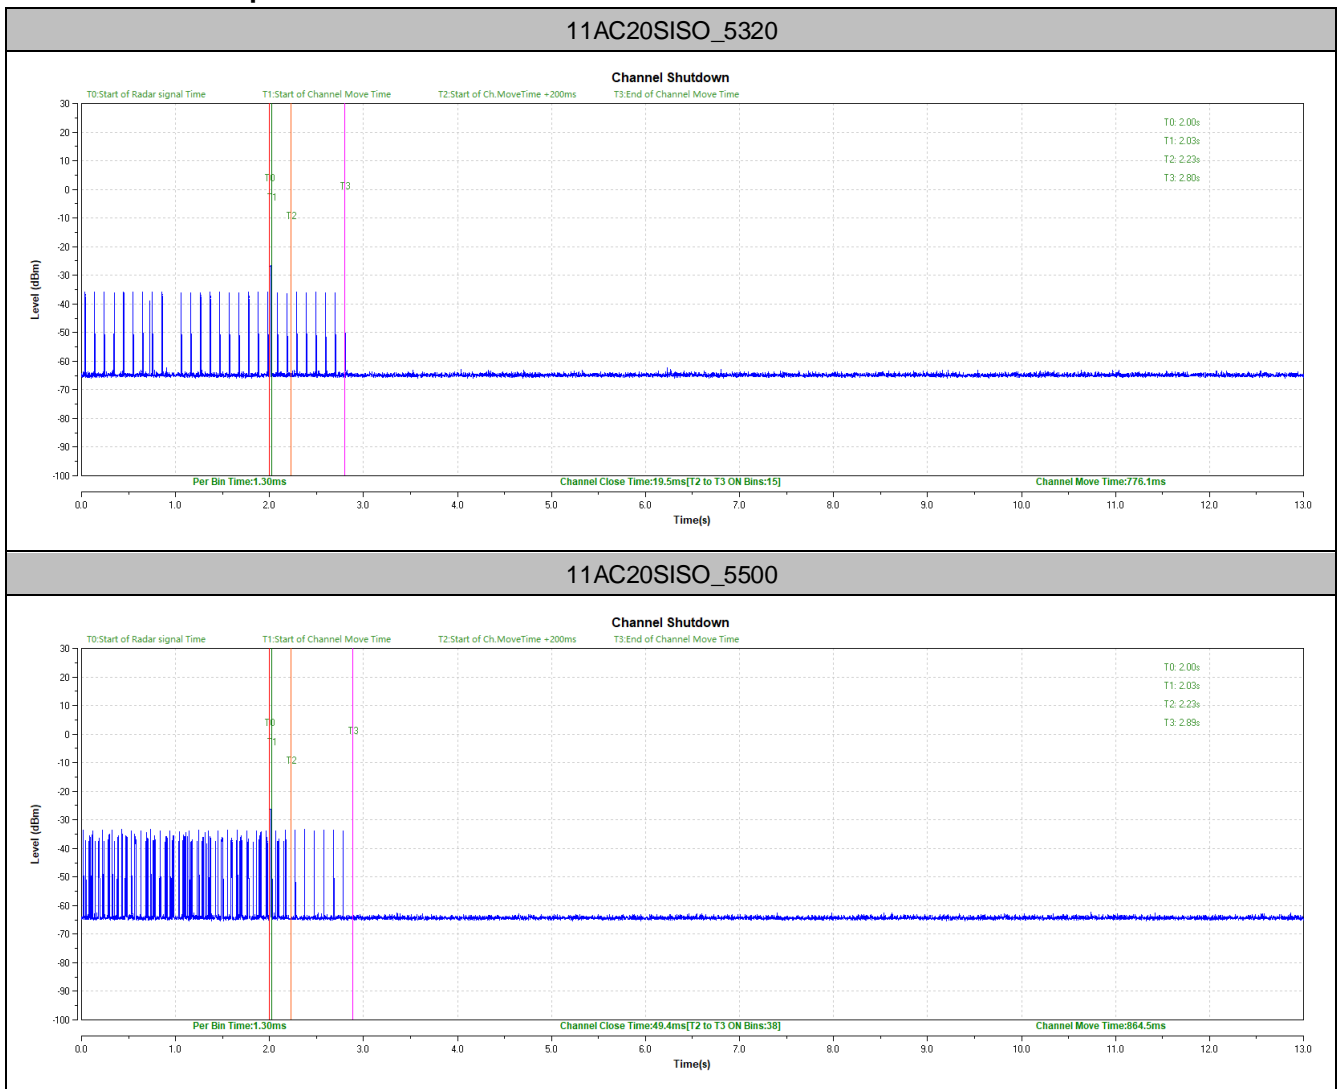


11AC20SISO_5640

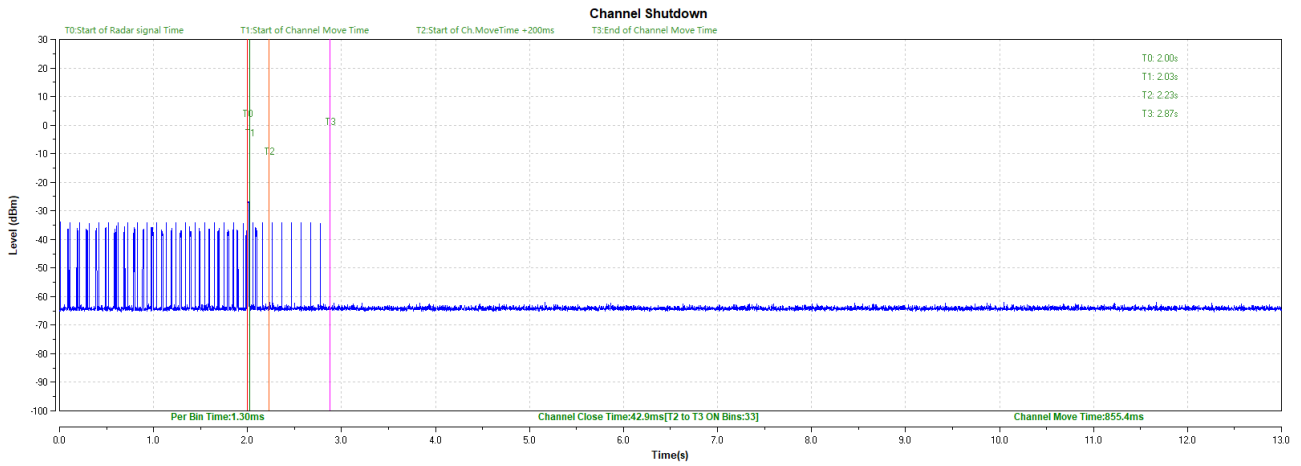

11AC80SISO_5290

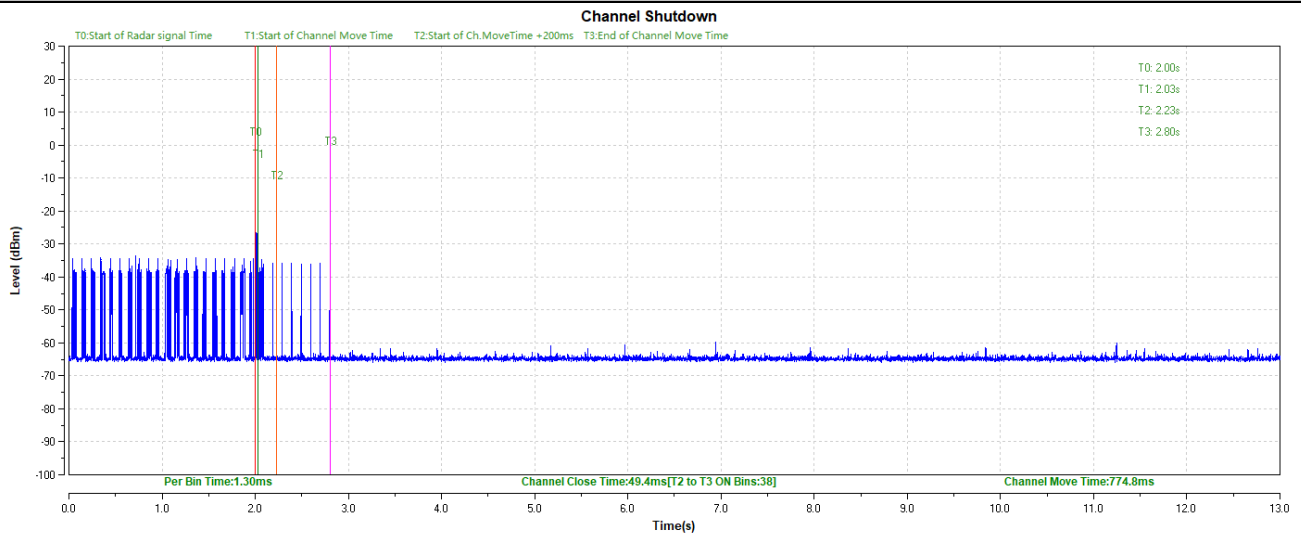

11AC80SISO_5530

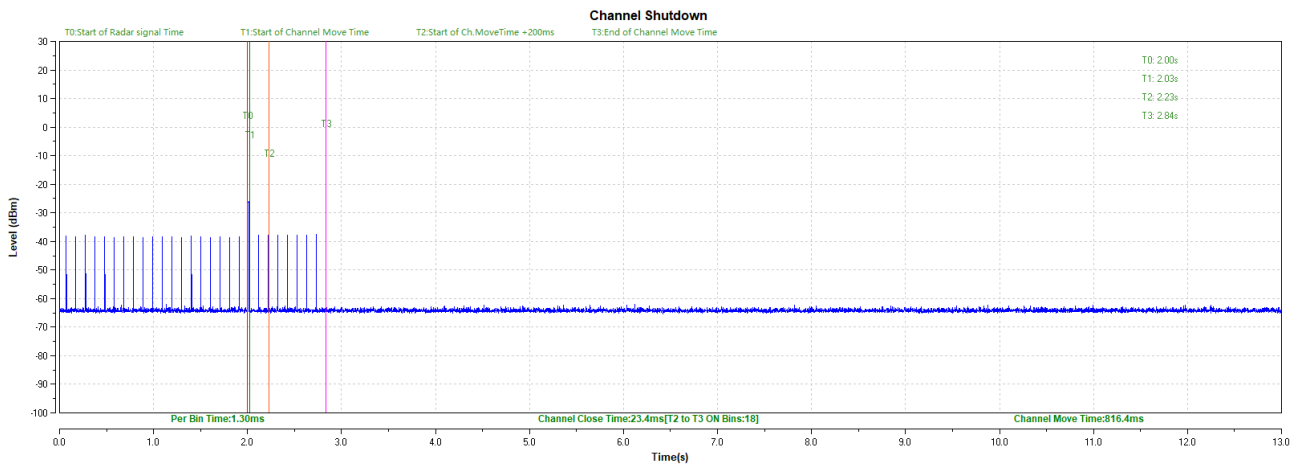


6.1.5 NON- OCCUPANCY PERIOD


6.1.5.1 Test Result


During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

TestMode	Channel	Result	Limit[s]	Verdict
11AC20SISO	5320	see test graph	≥ 1800	PASS
	5500	see test graph	≥ 1800	PASS
	5640	see test graph	≥ 1800	PASS
11AC80SISO	5290	see test graph	≥ 1800	PASS
	5530	see test graph	≥ 1800	PASS

6.1.5.2 Test Graphs

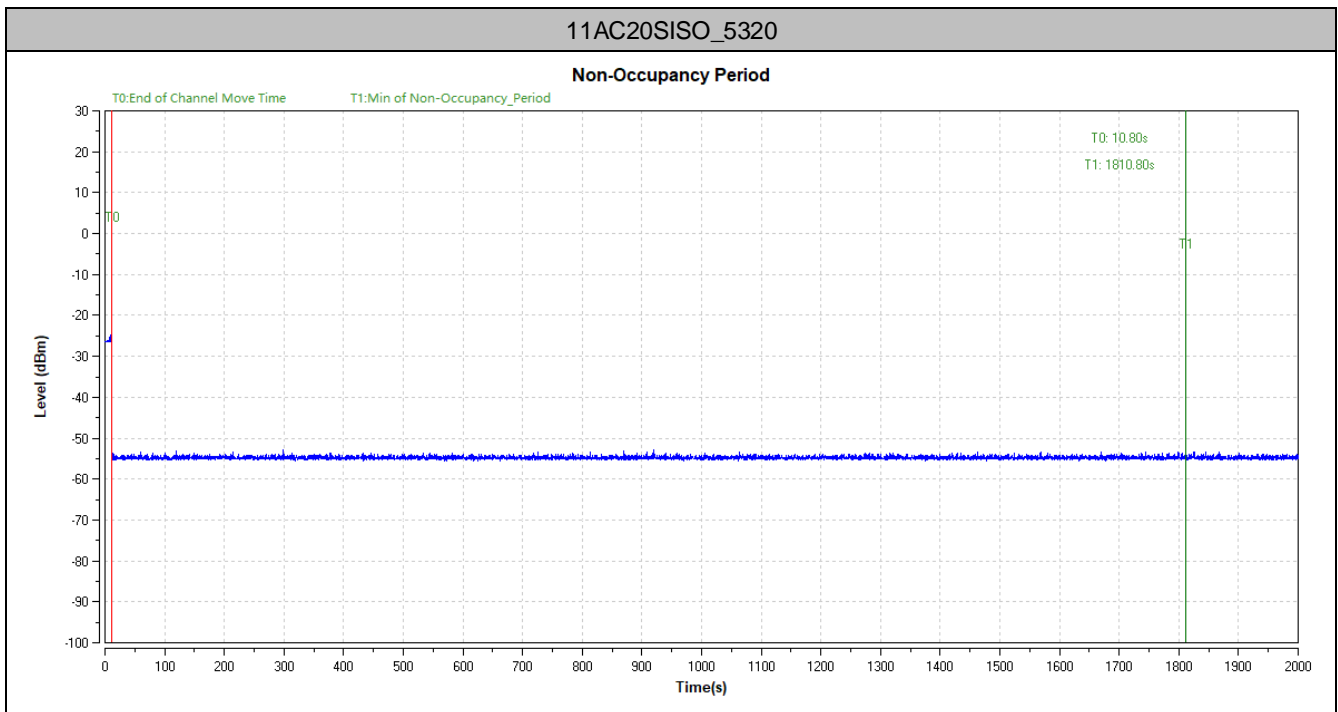

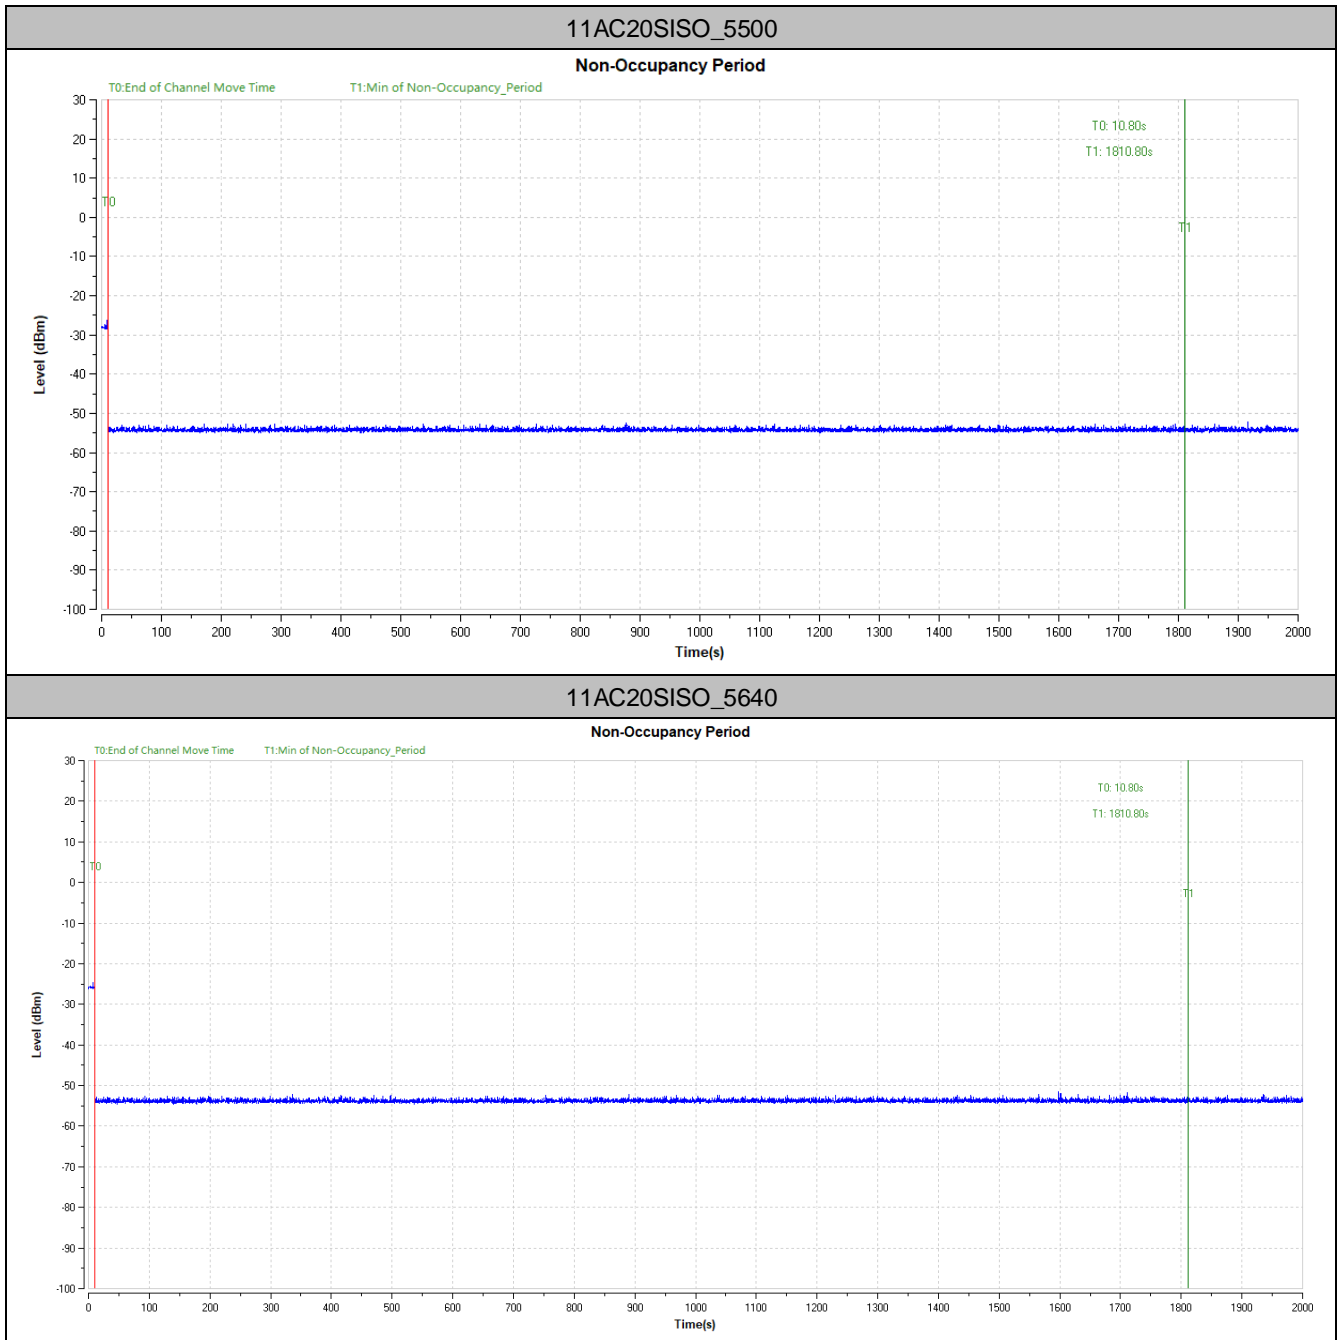

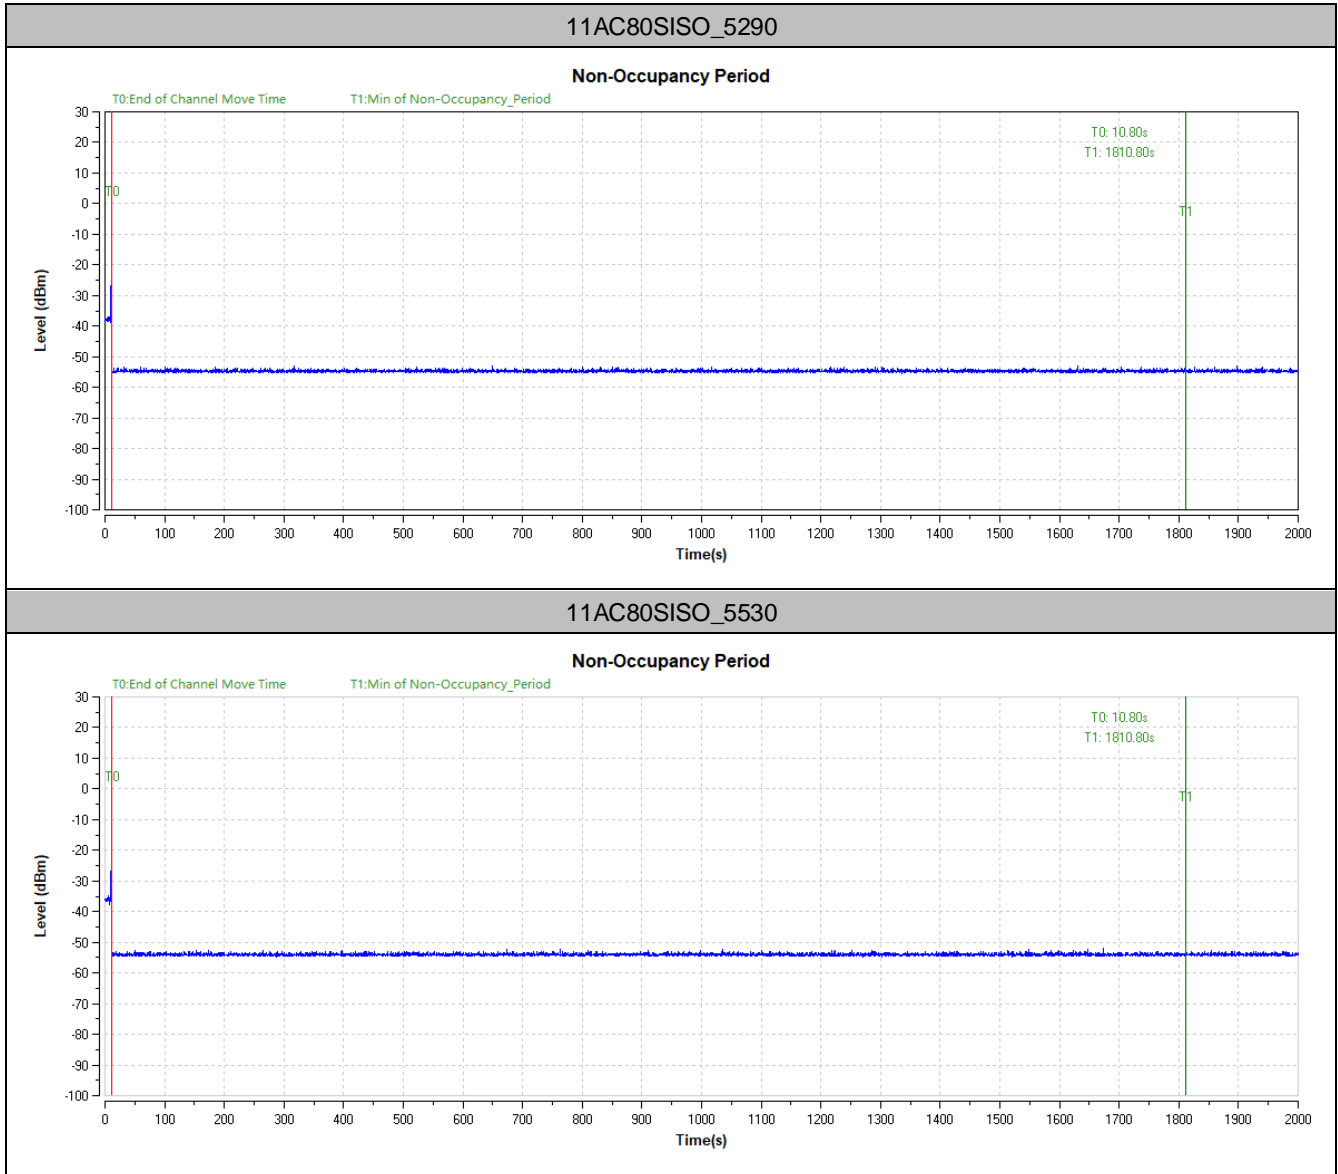

7 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Parameter	Measurement Uncertainty
DFS Threshold	0.96 dB

END