


Test Mode: TX N-40M Mode 2437 MHz

### Horizontal

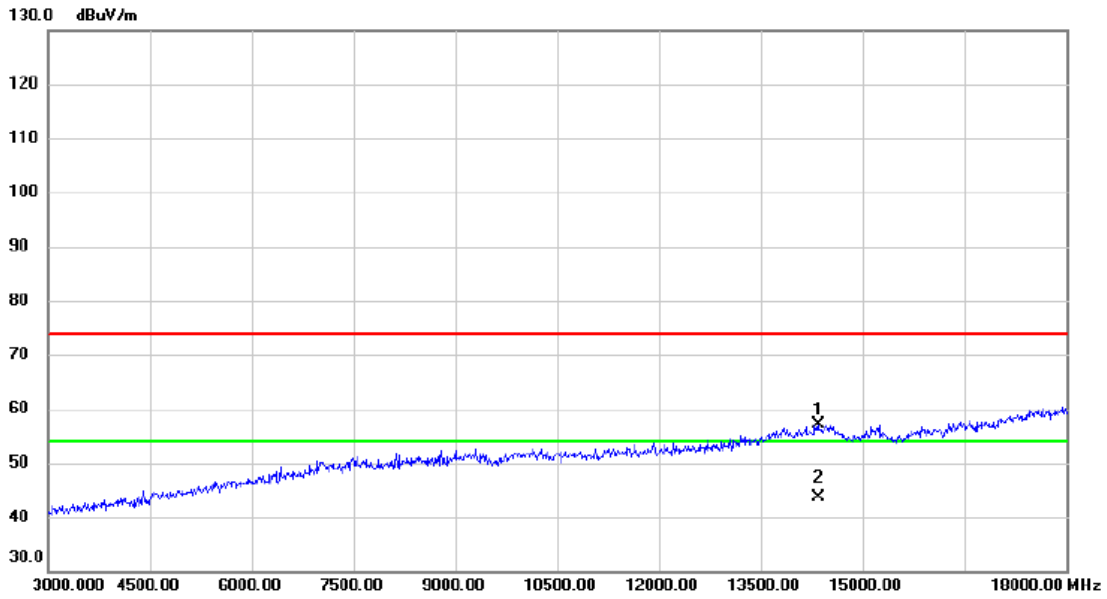


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14340.000	38.09	19.15	57.24	74.00	-16.76	peak	
2 *	14340.000	24.51	19.15	43.66	54.00	-10.34	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

### Horizontal

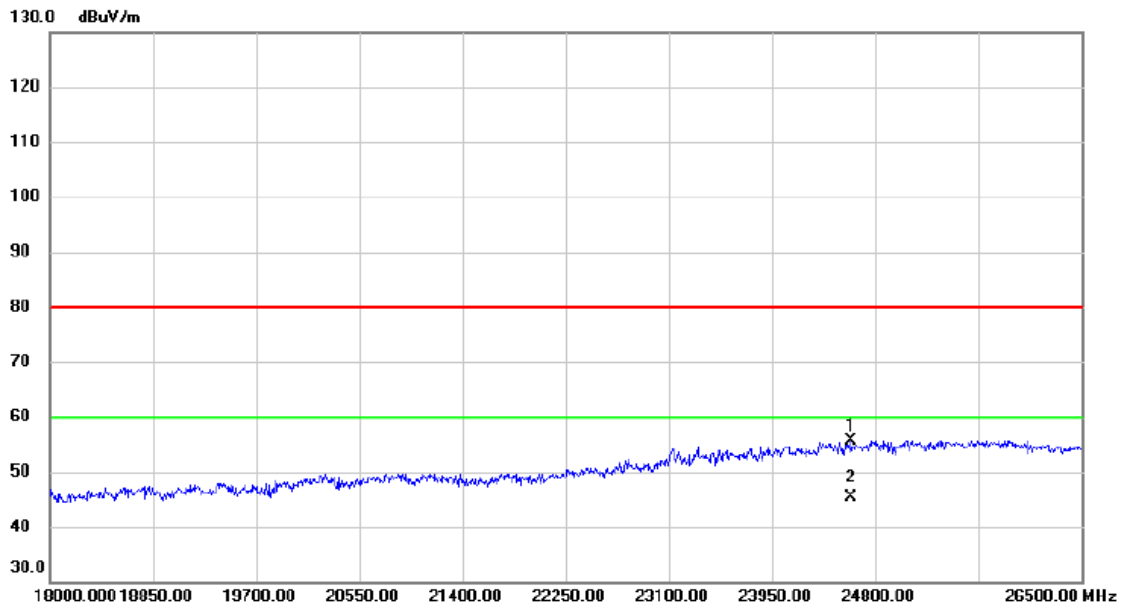


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	24604.500	25.76	29.99	55.75	80.00	-24.25	peak	
2 *	24604.500	15.42	29.99	45.41	60.00	-14.59	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

### Vertical

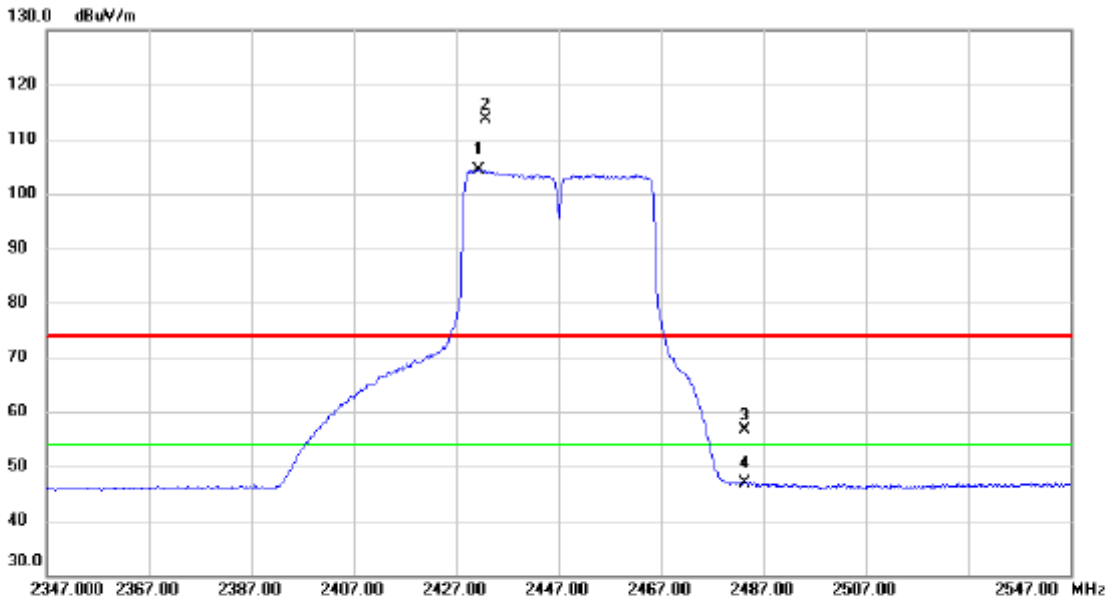


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2431.400	90.55	13.86	104.41	54.00	50.41	AVG	No Limit
2	X	2432.800	99.79	13.86	113.65	74.00	39.65	peak	No Limit
3		2483.500	42.68	13.93	56.61	74.00	-17.39	peak	
4		2483.500	32.87	13.93	46.80	54.00	-7.20	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

### Horizontal

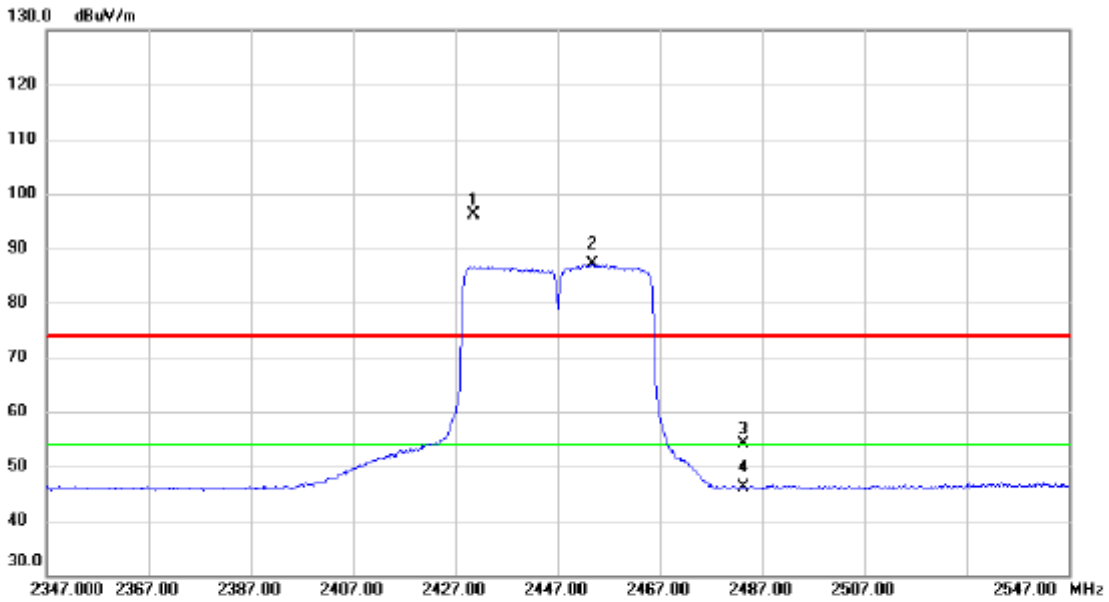


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2430.600	82.36	13.86	96.22	74.00	22.22	peak	No Limit
2	*	2453.800	73.13	13.88	87.01	54.00	33.01	AVG	No Limit
3		2483.500	40.11	13.93	54.04	74.00	-19.96	peak	
4		2483.500	32.32	13.93	46.25	54.00	-7.75	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

### Vertical

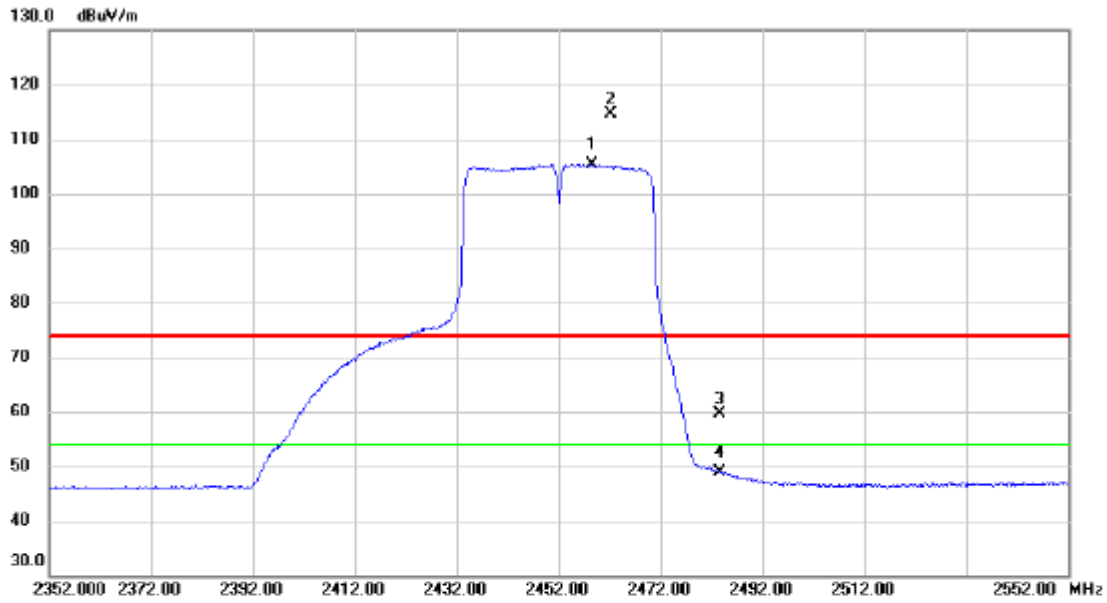


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2458.600	91.60	13.90	105.50	54.00	51.50	AVG	No Limit
2	X	2462.200	100.84	13.89	114.73	74.00	40.73	peak	No Limit
3		2483.500	45.59	13.93	59.52	74.00	-14.48	peak	
4		2483.500	35.05	13.93	48.98	54.00	-5.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

### Horizontal

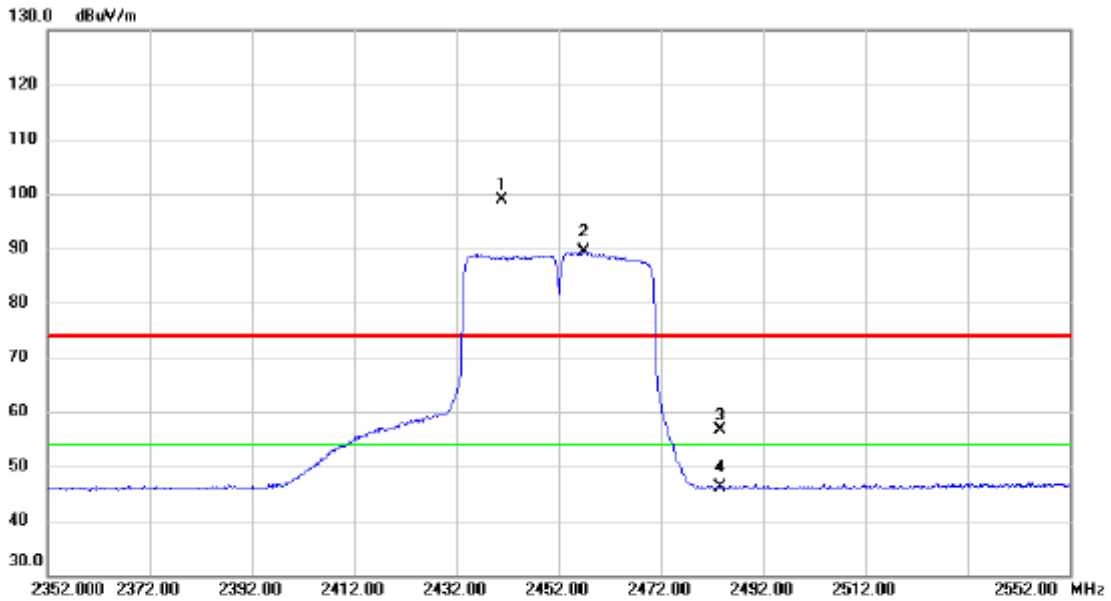


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2440.800	84.89	13.87	98.76	74.00	24.76	peak	No Limit
2	*	2457.000	75.46	13.90	89.36	54.00	35.36	AVG	No Limit
3		2483.500	42.66	13.93	56.59	74.00	-17.41	peak	
4		2483.500	32.30	13.93	46.23	54.00	-7.77	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz\_242 Tone

### Vertical

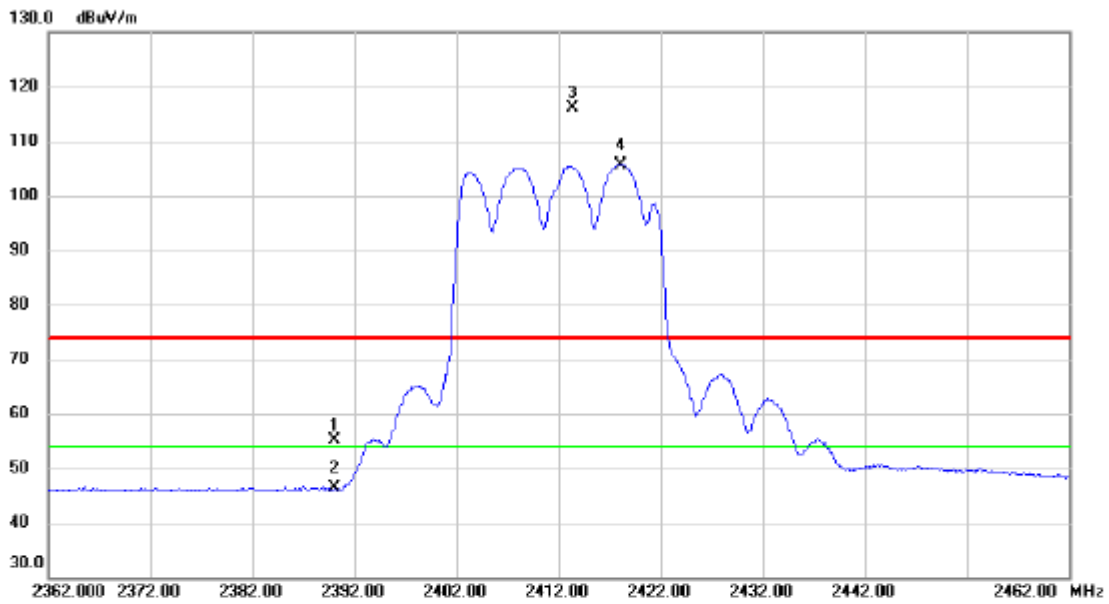


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.25	13.81	55.06	74.00	-18.94	peak	
2		2390.000	32.64	13.81	46.45	54.00	-7.55	AVG	
3	X	2413.400	102.35	13.84	116.19	74.00	42.19	peak	No Limit
4	*	2418.100	91.91	13.84	105.75	54.00	51.75	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz\_242 Tone

### Horizontal

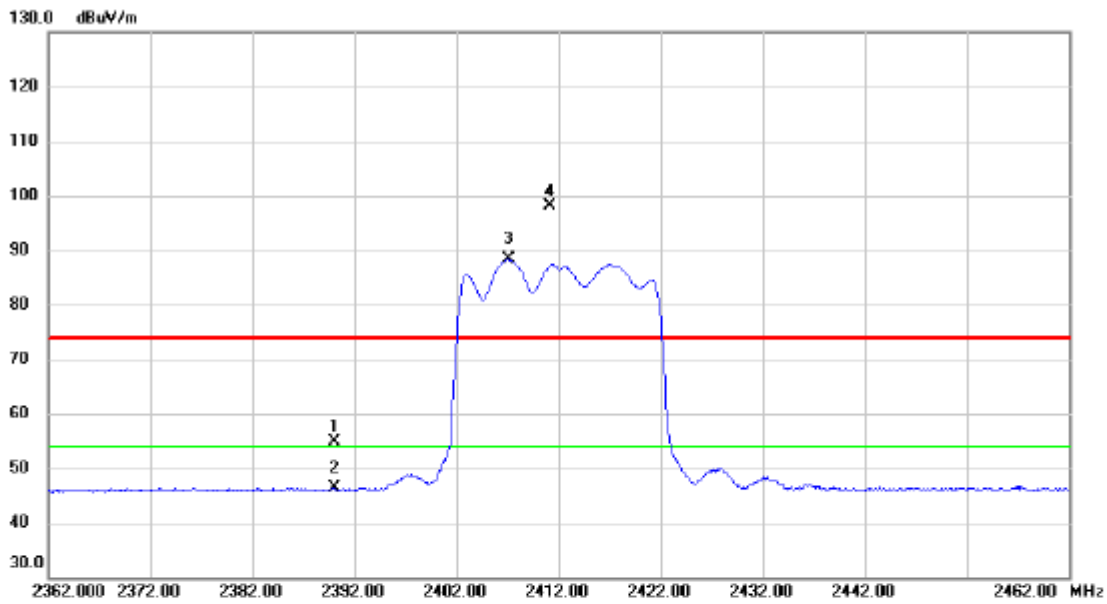

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.04	13.81	54.85	74.00	-19.15	peak	
2		2390.000	32.50	13.81	46.31	54.00	-7.69	AVG	
3	*	2407.100	74.67	13.83	88.50	54.00	34.50	AVG	No Limit
4	X	2411.100	84.35	13.82	98.17	74.00	24.17	peak	No Limit


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX AX-20M Mode 2417 MHz\_242 Tone

**Vertical**

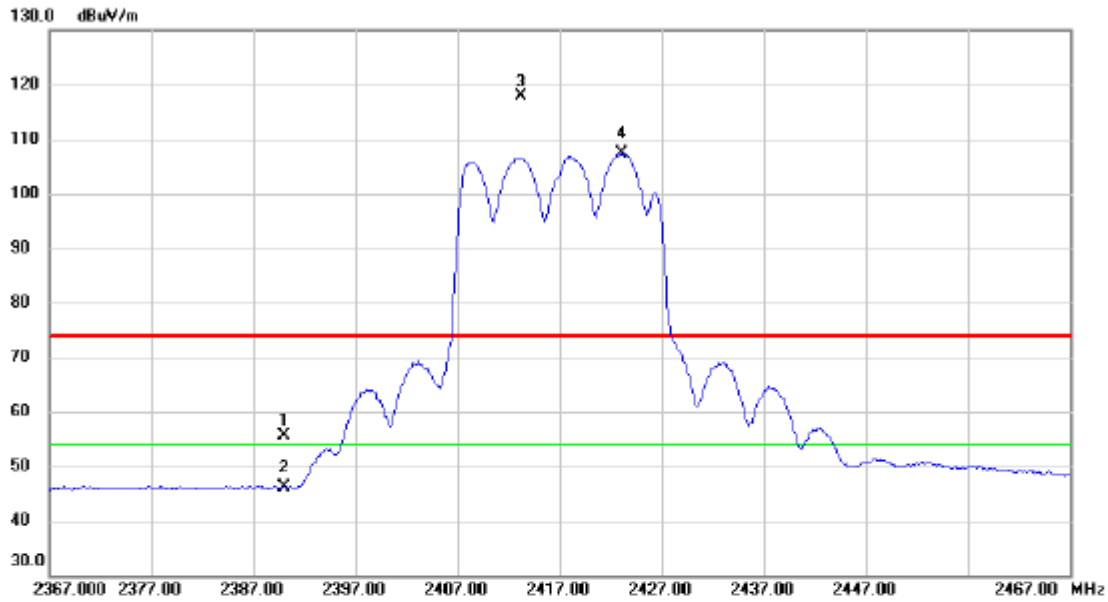


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.82	13.81	55.63	74.00	-18.37	peak	
2		2390.000	32.44	13.81	46.25	54.00	-7.75	AVG	
3	X	2413.200	104.12	13.84	117.96	74.00	43.96	peak	No Limit
4	*	2423.100	93.46	13.85	107.31	54.00	53.31	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz\_242 Tone

### Horizontal

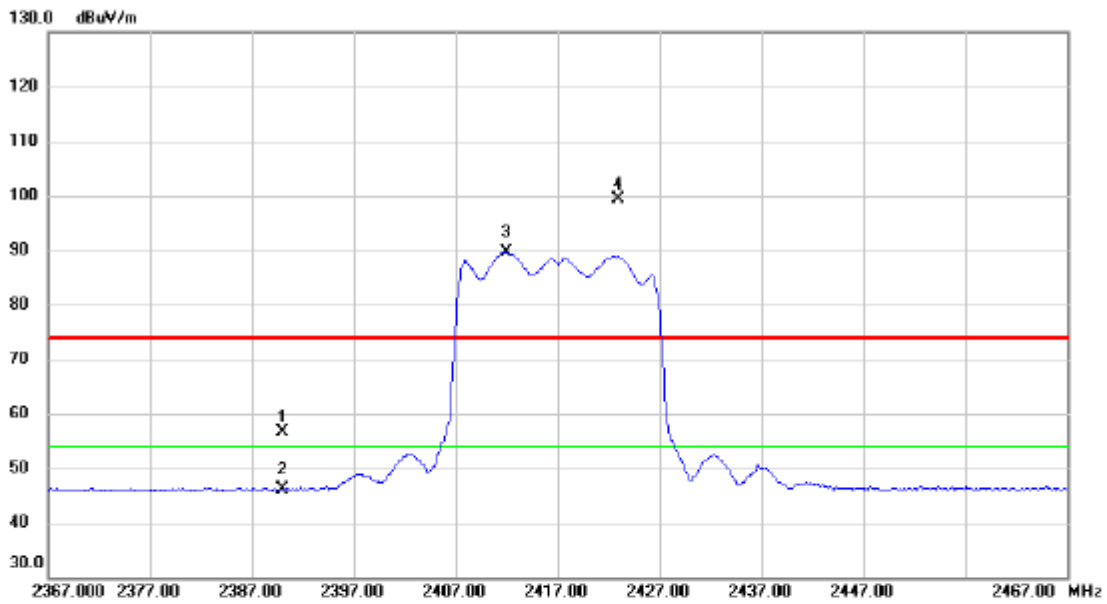


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.88	13.81	56.69	74.00	-17.31	peak	
2		2390.000	32.24	13.81	46.05	54.00	-7.95	AVG	
3	*	2412.000	75.91	13.83	89.74	54.00	35.74	AVG	No Limit
4	X	2422.900	85.44	13.85	99.29	74.00	25.29	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2422 MHz\_242 Tone

### Vertical

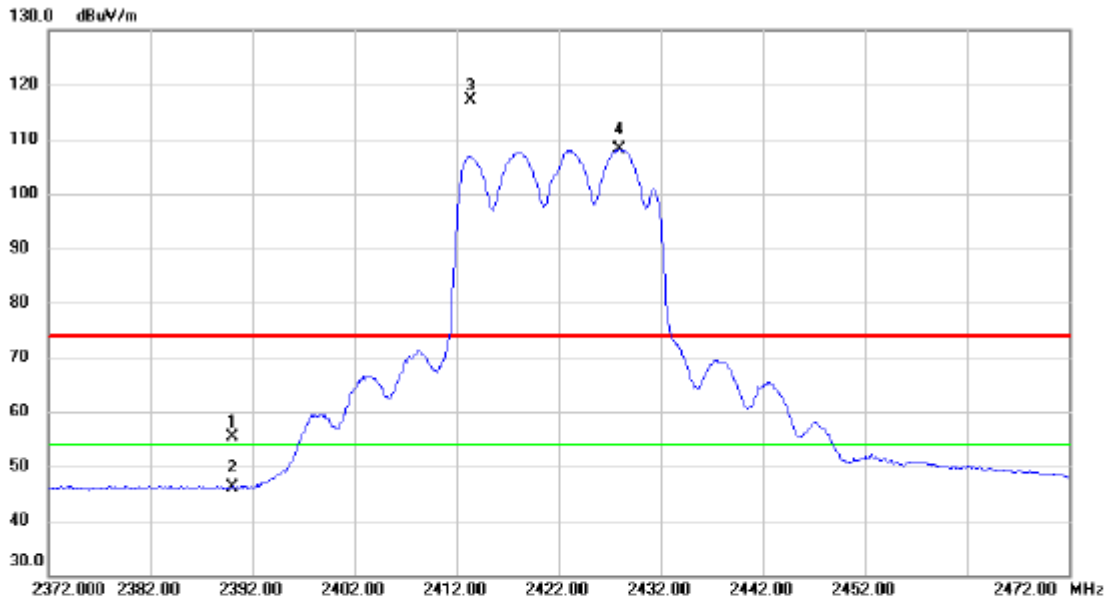


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.56	13.81	55.37	74.00	-18.63	peak	
2		2390.000	32.20	13.81	46.01	54.00	-7.99	AVG	
3	X	2413.400	103.20	13.84	117.04	74.00	43.04	peak	No Limit
4	*	2427.900	94.16	13.85	108.01	54.00	54.01	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2422 MHz\_242 Tone

### Horizontal

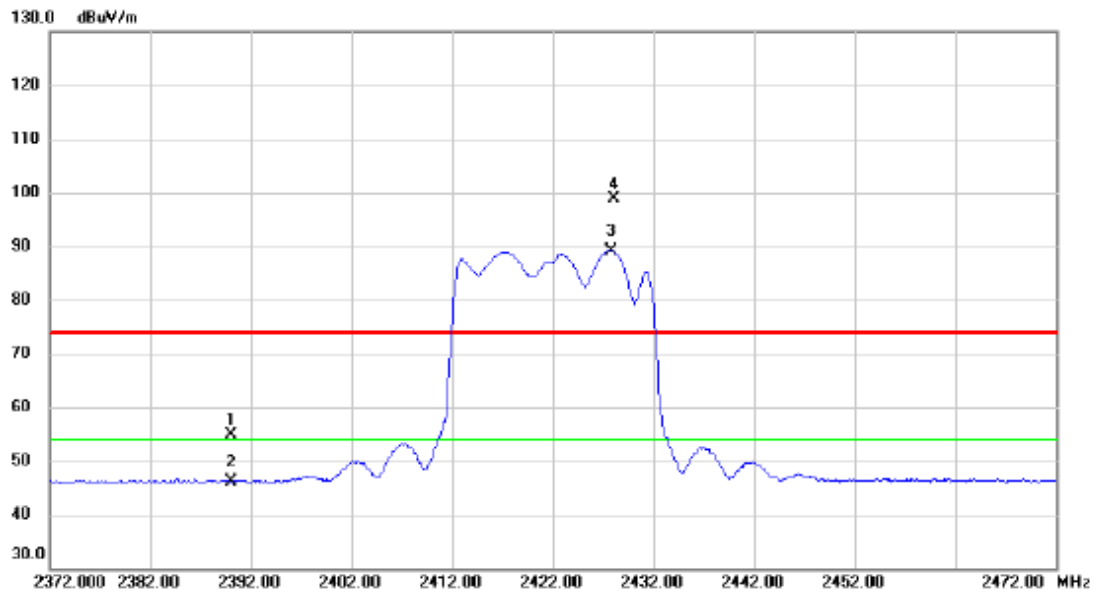


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	40.99	13.81	54.80	74.00	-19.20	peak	
2		2390.000	32.24	13.81	46.05	54.00	-7.95	AVG	
3	*	2427.800	75.27	13.85	89.12	54.00	35.12	AVG	No Limit
4	X	2428.000	84.98	13.85	98.83	74.00	24.83	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2427 MHz\_242 Tone

### Vertical

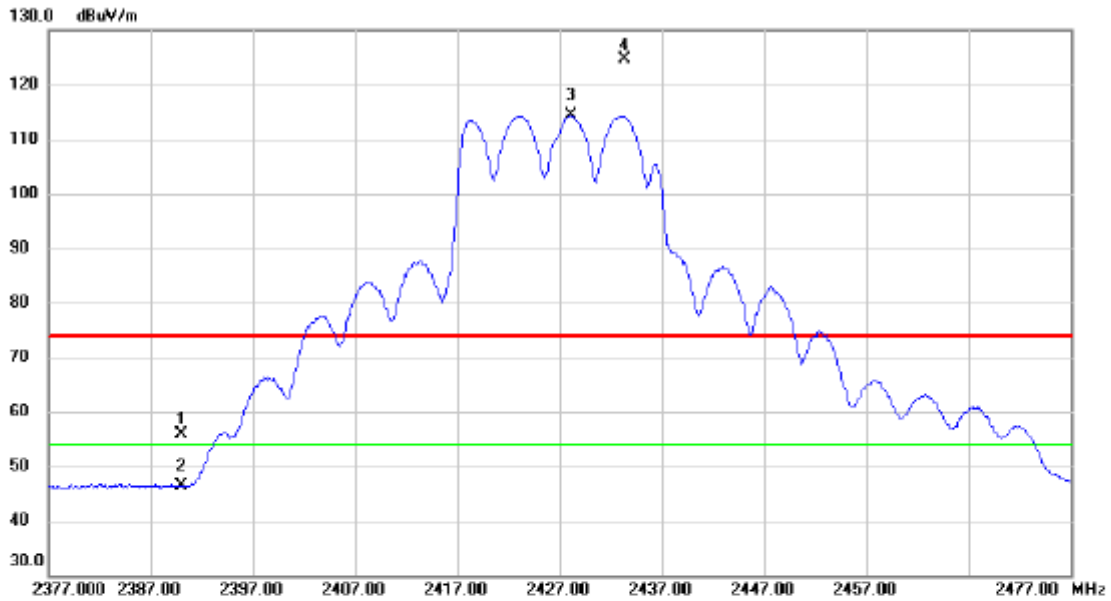


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.96	13.81	55.77	74.00	-18.23	peak	
2		2390.000	32.49	13.81	46.30	54.00	-7.70	AVG	
3	*	2428.100	100.48	13.85	114.33	54.00	60.33	AVG	No Limit
4	X	2433.300	110.68	13.86	124.54	74.00	50.54	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2427 MHz\_242 Tone

### Horizontal

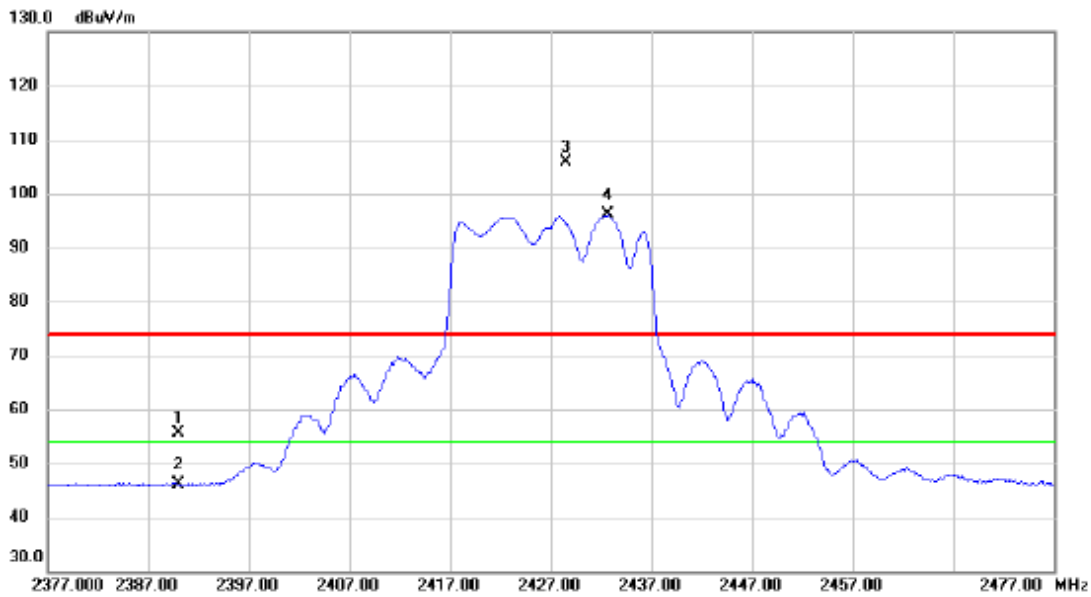


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.71	13.81	55.52	74.00	-18.48	peak	
2		2390.000	32.39	13.81	46.20	54.00	-7.80	AVG	
3	X	2428.500	92.05	13.85	105.90	74.00	31.90	peak	No Limit
4	*	2432.700	82.15	13.86	96.01	54.00	42.01	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz\_242 Tone

### Vertical

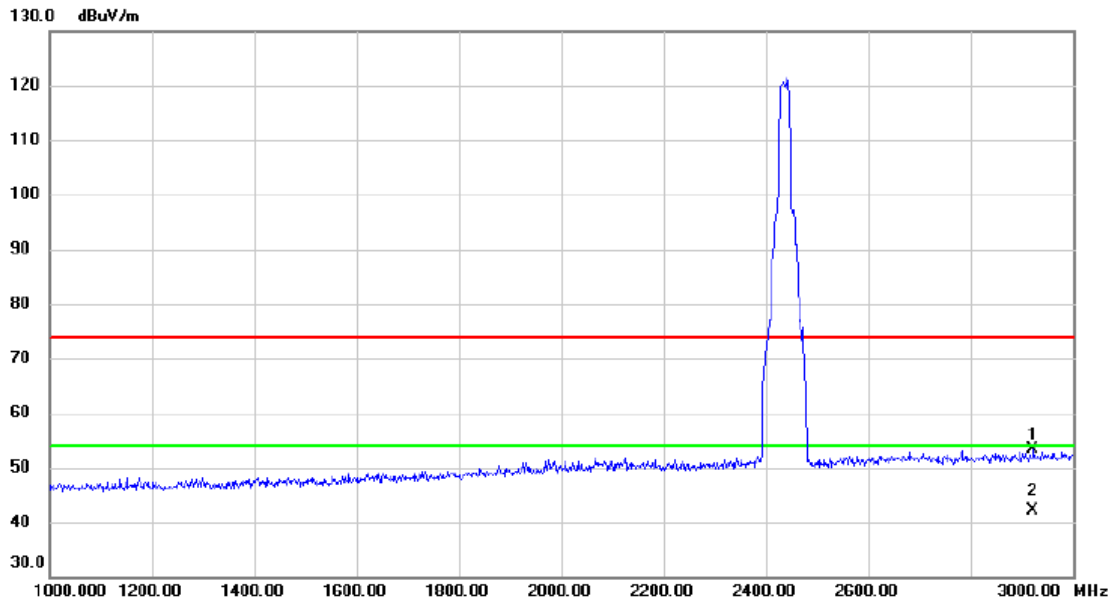


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2922.000	43.11	10.18	53.29	74.00	-20.71	peak	
2 *	2922.000	31.84	10.18	42.02	54.00	-11.98	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz\_242 Tone

### Vertical

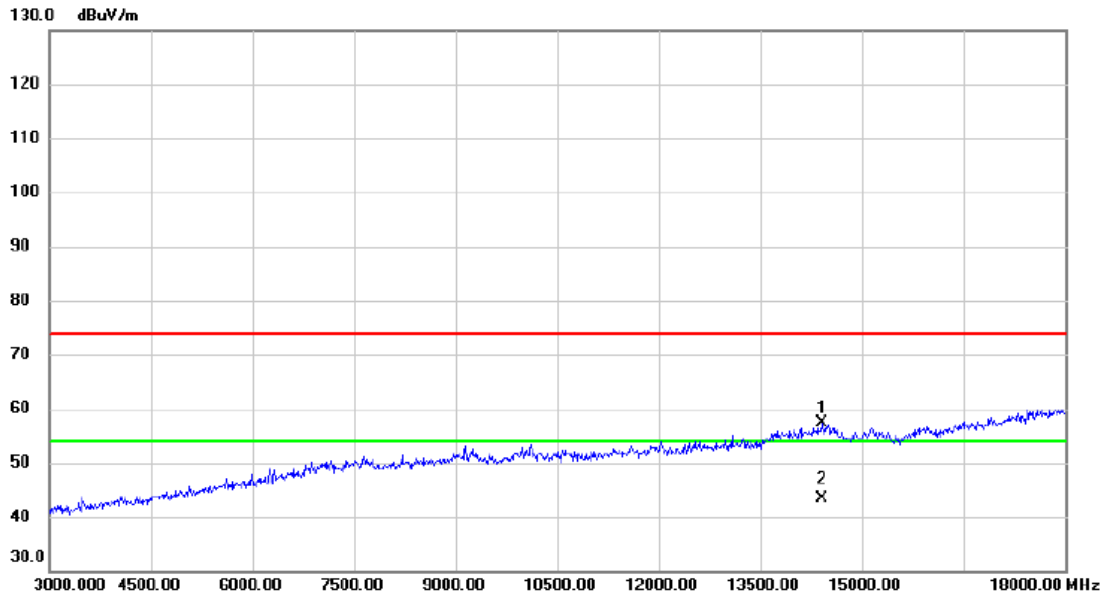

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14415.000	38.26	19.13	57.39	74.00	-16.61	peak	
2 *	14415.000	24.35	19.13	43.48	54.00	-10.52	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX AX-20M Mode 2437 MHz\_242 Tone

### Vertical

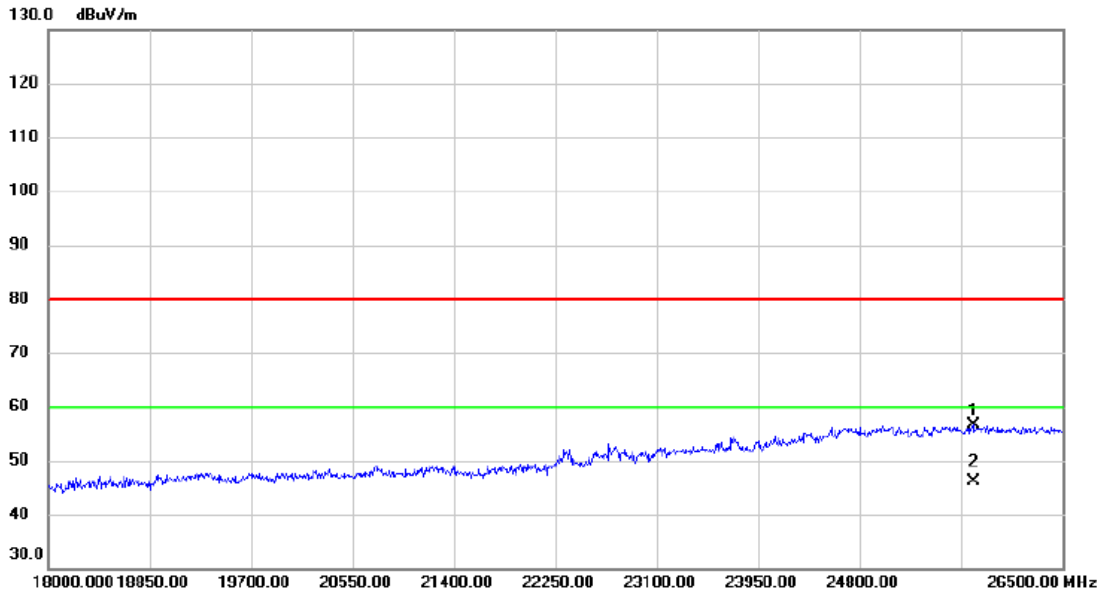


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25752.000	26.36	30.24	56.60	80.00	-23.40	peak	
2	*	25752.000	15.86	30.24	46.10	60.00	-13.90	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz\_242 Tone

### Horizontal

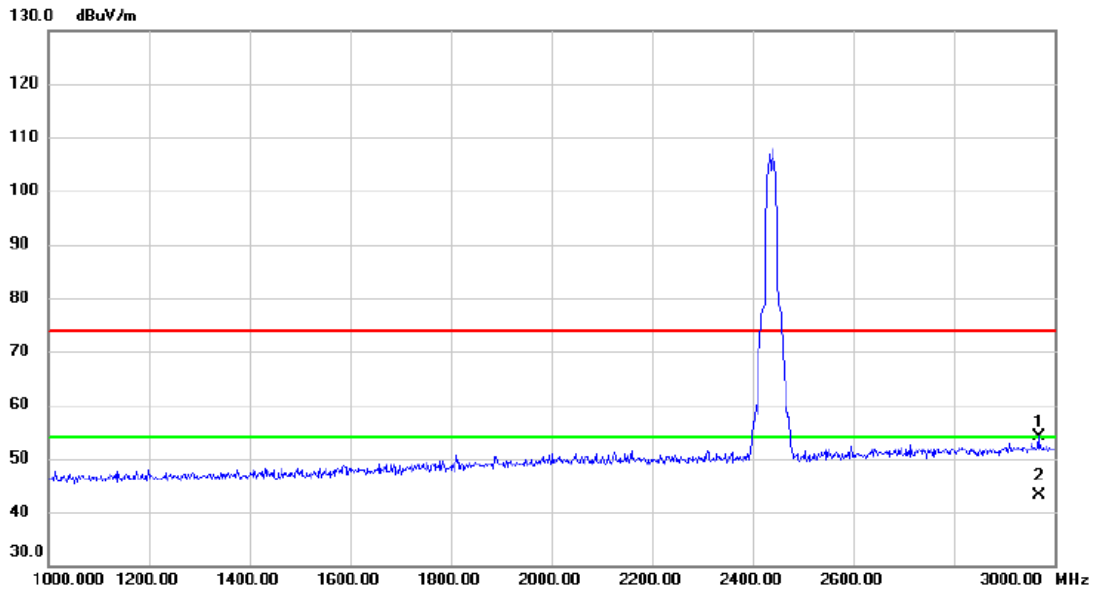


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2968.000	43.71	10.38	54.09	74.00	-19.91	peak	
2	*	2968.000	32.63	10.38	43.01	54.00	-10.99	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz\_242 Tone

### Horizontal

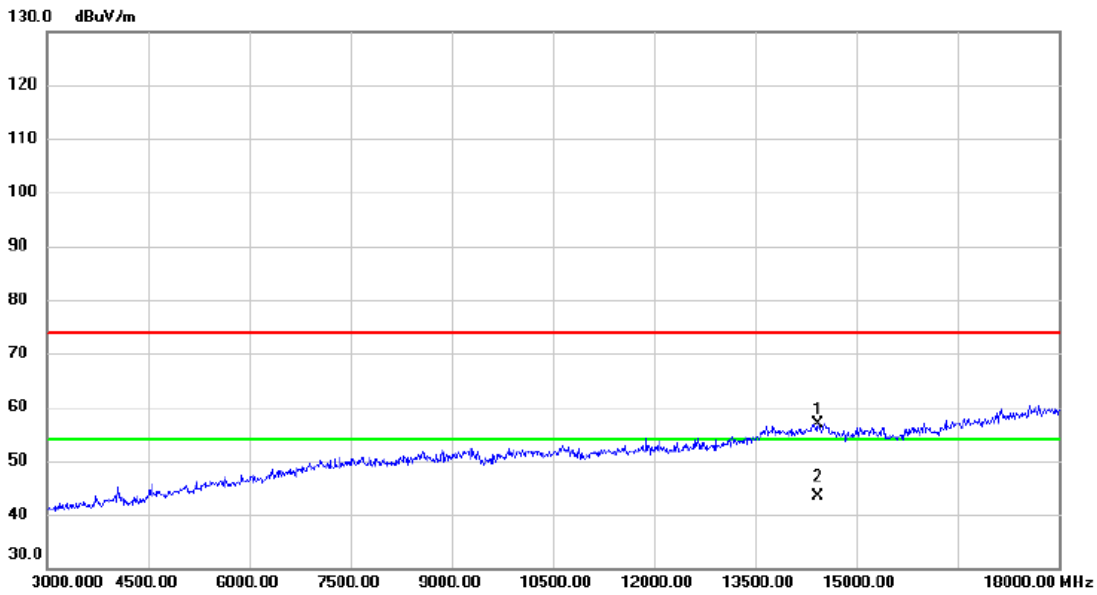


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14430.000	37.86	19.12	56.98	74.00	-17.02	peak	
2	*	14430.000	24.16	19.12	43.28	54.00	-10.72	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz\_242 Tone

### Horizontal

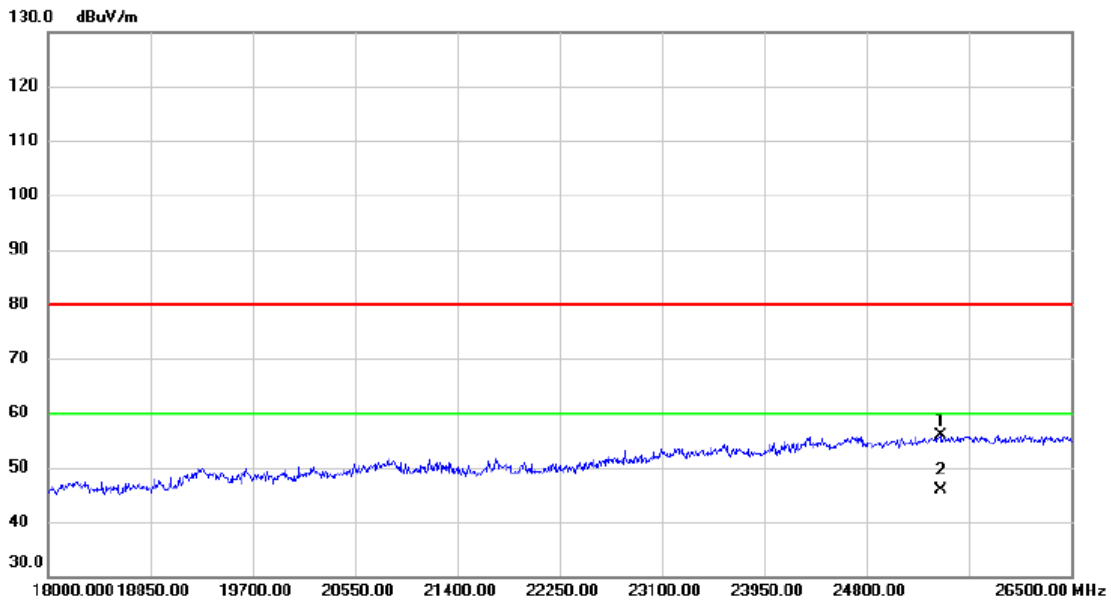


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25412.000	25.80	30.16	55.96	80.00	-24.04	peak	
2	*	25412.000	15.68	30.16	45.84	60.00	-14.16	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2452 MHz\_242 Tone

**Vertical**

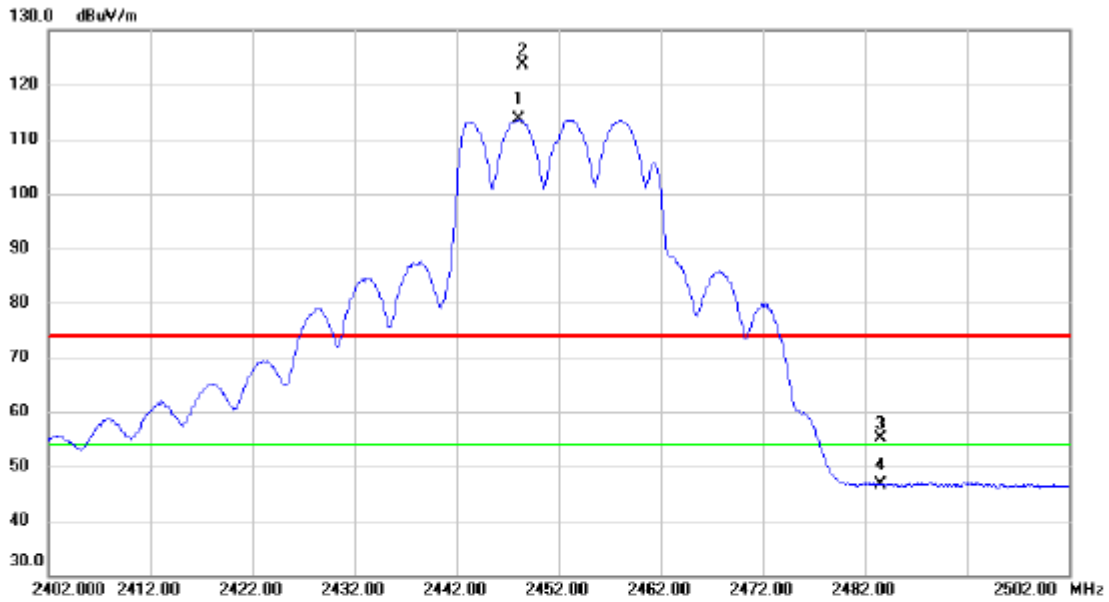


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2448.000	99.70	13.88	113.58	54.00	59.58	AVG	No Limit
2	X	2448.500	109.82	13.88	123.70	74.00	49.70	peak	No Limit
3		2483.500	41.26	13.93	55.19	74.00	-18.81	peak	
4		2483.500	32.63	13.93	46.56	54.00	-7.44	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2452 MHz\_242 Tone

### Horizontal

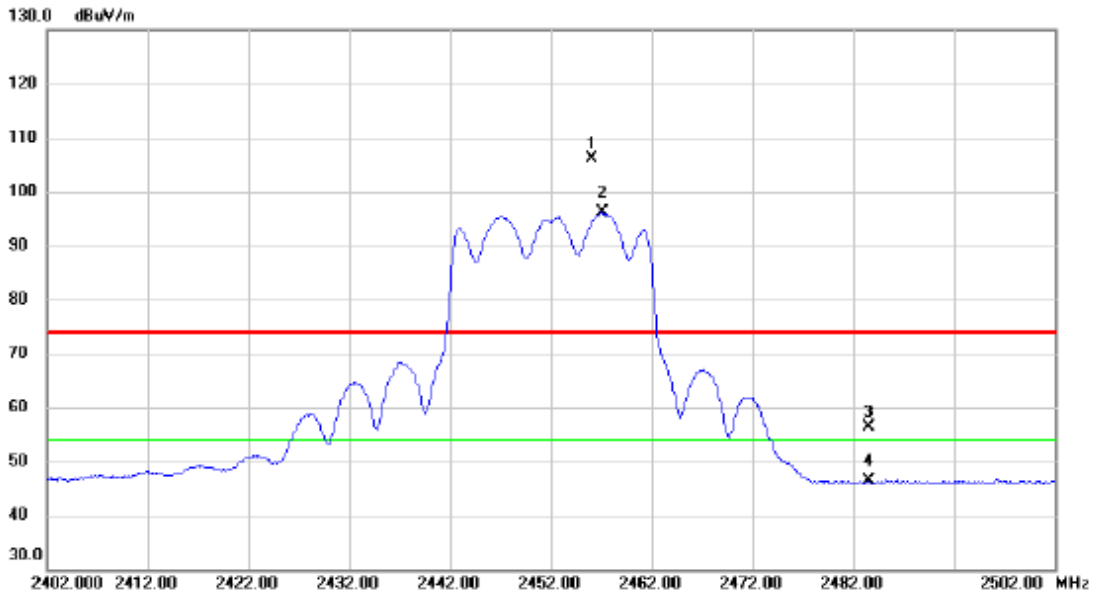


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.100	92.15	13.90	106.05	74.00	32.05	peak	No Limit
2	*	2457.100	82.27	13.90	96.17	54.00	42.17	AVG	No Limit
3		2483.500	42.42	13.93	56.35	74.00	-17.65	peak	
4		2483.500	32.41	13.93	46.34	54.00	-7.66	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz\_242 Tone

### Vertical

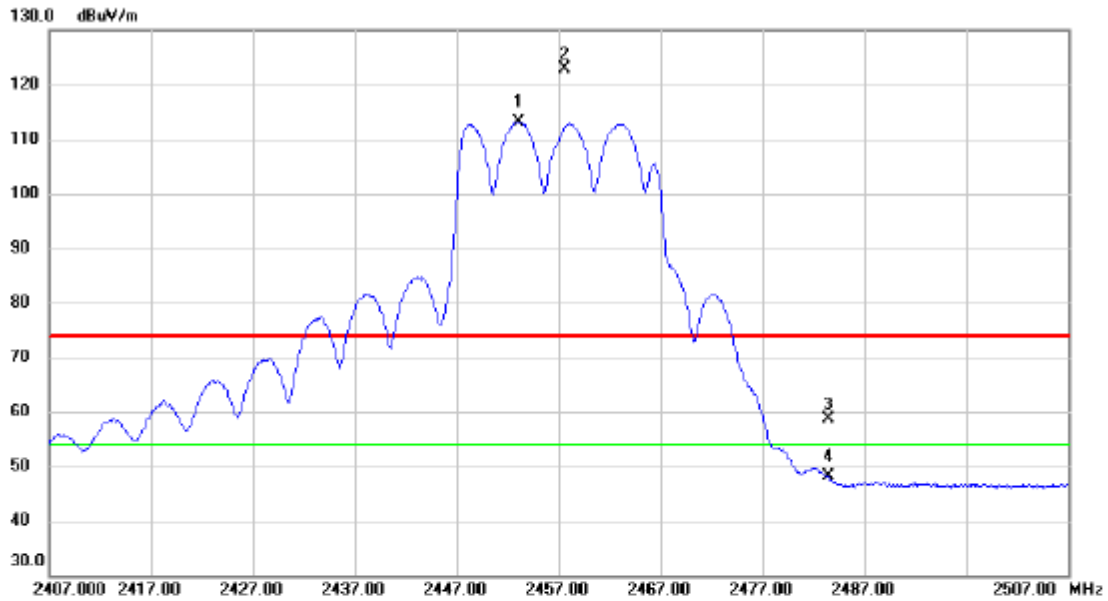


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2453.000	99.17	13.88	113.05	54.00	59.05	AVG	No Limit
2	X	2457.600	108.88	13.90	122.78	74.00	48.78	peak	No Limit
3		2483.500	44.65	13.93	58.58	74.00	-15.42	peak	
4		2483.500	34.16	13.93	48.09	54.00	-5.91	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz\_242 Tone

### Horizontal

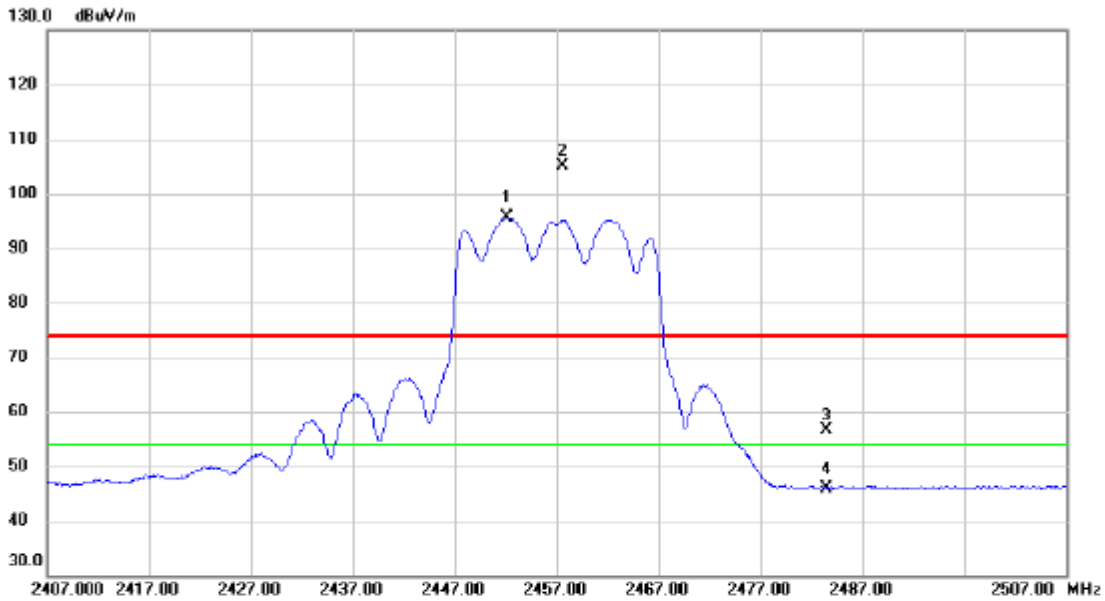

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2452.200	81.80	13.88	95.68	54.00	41.68	AVG	No Limit
2	X	2457.600	91.27	13.90	105.17	74.00	31.17	peak	No Limit
3		2483.500	42.74	13.93	56.67	74.00	-17.33	peak	
4		2483.500	32.04	13.93	45.97	54.00	-8.03	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX AX-20M Mode 2462 MHz\_242 Tone

### Vertical

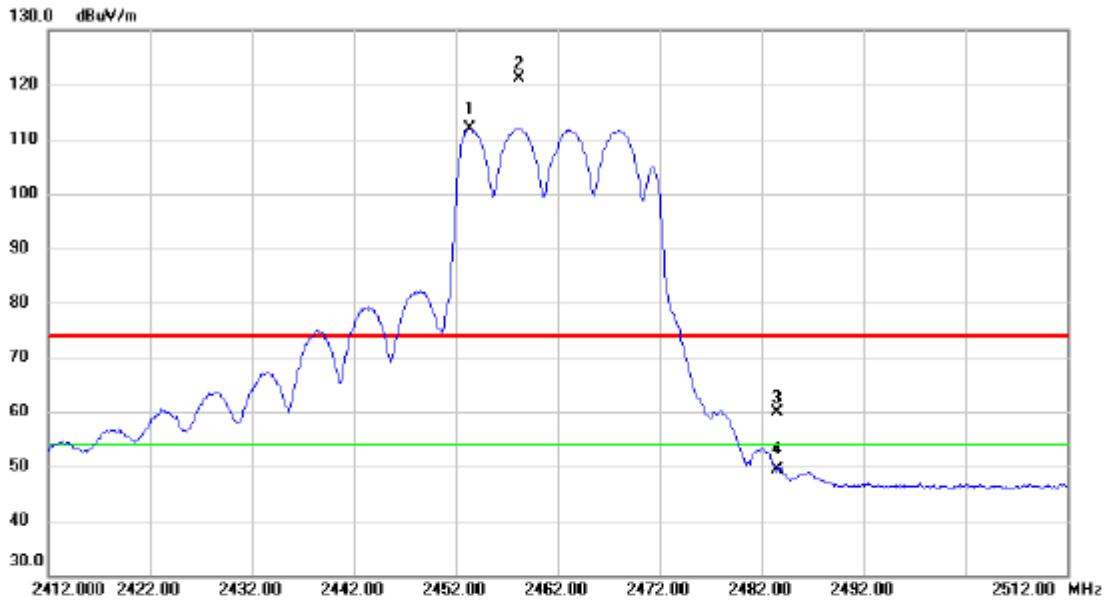

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.400	98.11	13.88	111.99	54.00	57.99	AVG	No Limit
2	X	2458.200	107.33	13.90	121.23	74.00	47.23	peak	No Limit
3		2483.500	45.95	13.93	59.88	74.00	-14.12	peak	
4		2483.500	35.45	13.93	49.38	54.00	-4.62	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz\_242 Tone

### Horizontal

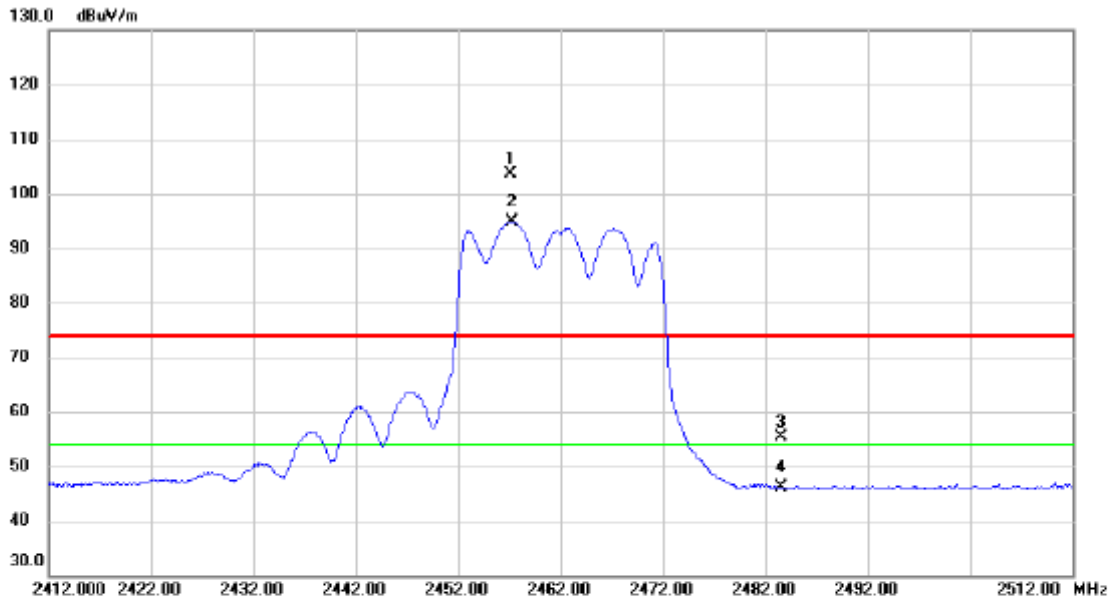


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2457.200	89.82	13.90	103.72	74.00	29.72	peak	No Limit
2	*	2457.300	81.00	13.90	94.90	54.00	40.90	AVG	No Limit
3		2483.500	41.33	13.93	55.26	74.00	-18.74	peak	
4		2483.500	32.10	13.93	46.03	54.00	-7.97	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz\_484 Tone

### Vertical

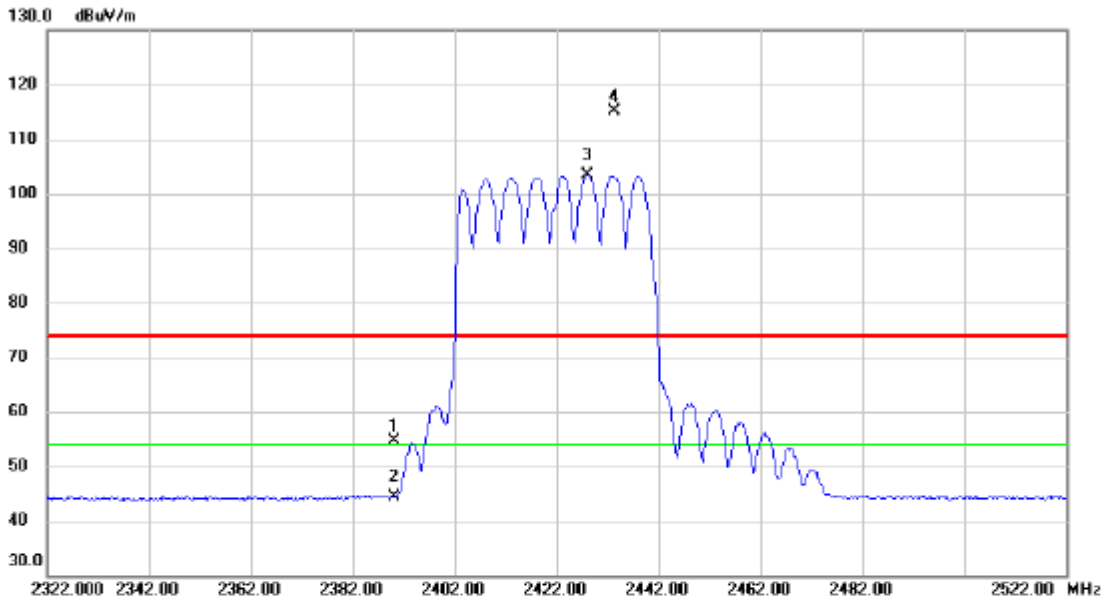


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.94	13.81	54.75	74.00	-19.25	peak	
2		2390.000	30.63	13.81	44.44	54.00	-9.56	AVG	
3	*	2428.000	89.48	13.85	103.33	54.00	49.33	AVG	No Limit
4	X	2433.400	101.38	13.87	115.25	74.00	41.25	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz\_484 Tone

### Horizontal

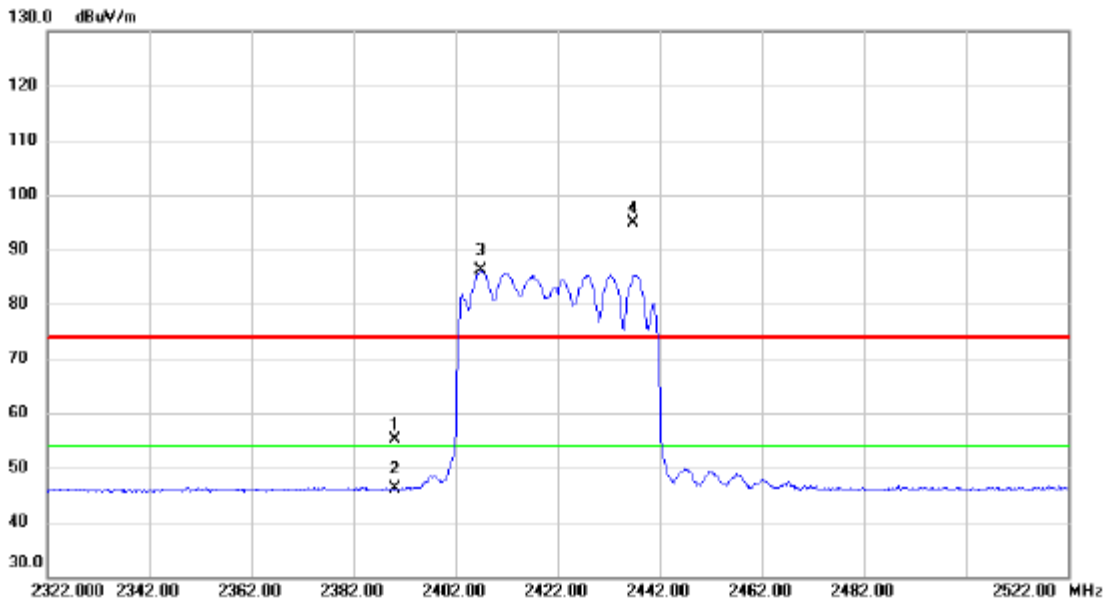


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.39	13.81	55.20	74.00	-18.80	peak	
2		2390.000	32.27	13.81	46.08	54.00	-7.92	AVG	
3	*	2406.800	72.19	13.83	86.02	54.00	32.02	AVG	No Limit
4	X	2436.800	81.14	13.86	95.00	74.00	21.00	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz\_484 Tone

### Vertical

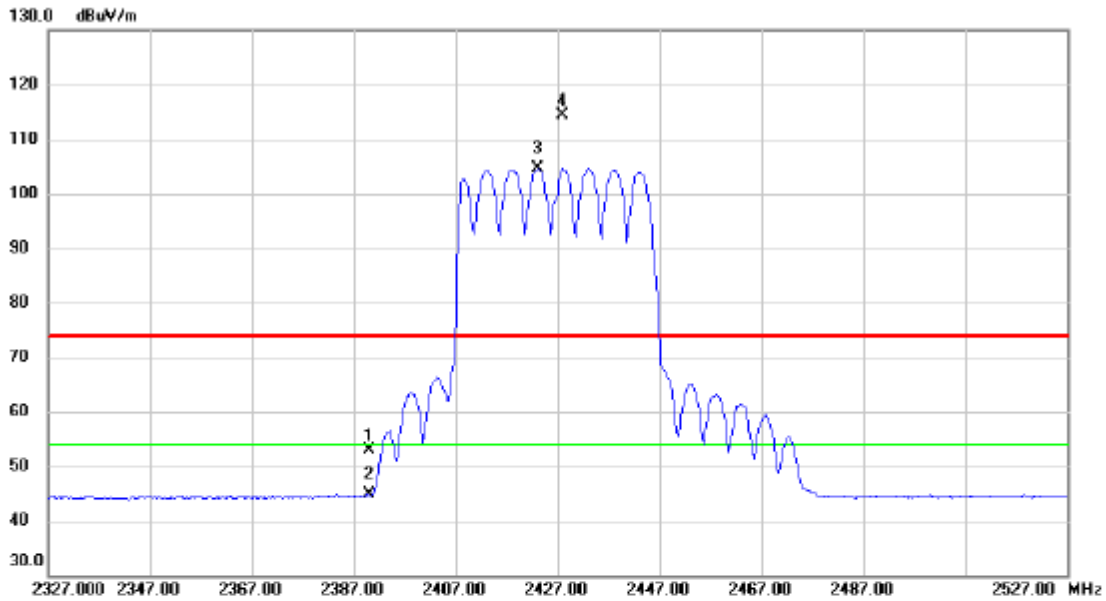


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.04	13.81	52.85	74.00	-21.15	peak	
2		2390.000	31.10	13.81	44.91	54.00	-9.09	AVG	
3	*	2423.000	90.79	13.85	104.64	54.00	50.64	AVG	No Limit
4	X	2427.800	100.48	13.85	114.33	74.00	40.33	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz\_484 Tone

### Horizontal

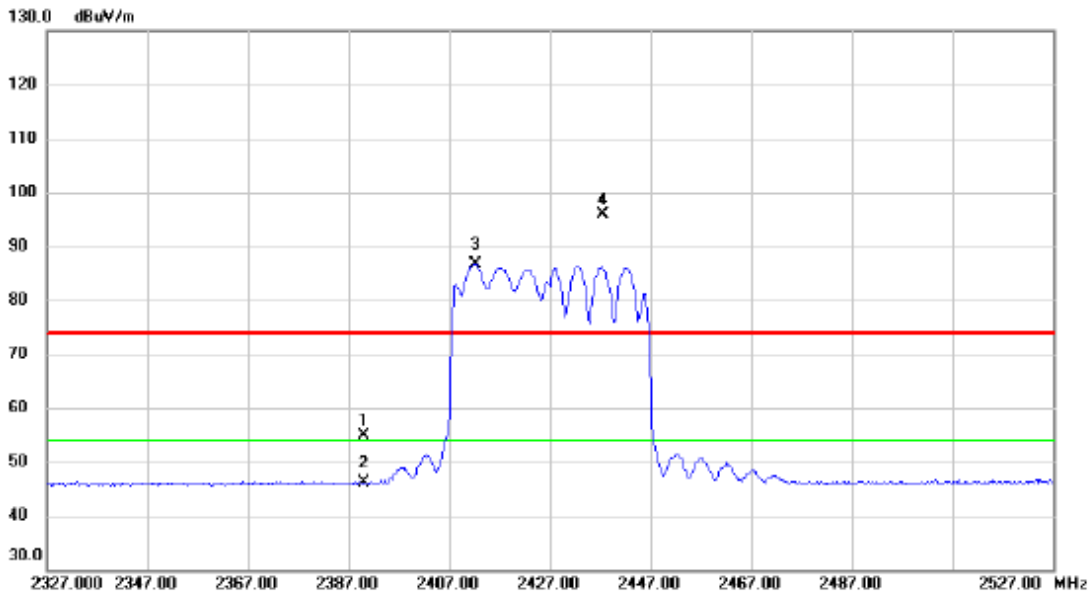


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.16	13.81	54.97	74.00	-19.03	peak	
2		2390.000	32.23	13.81	46.04	54.00	-7.96	AVG	
3	*	2412.200	72.85	13.83	86.68	54.00	32.68	AVG	No Limit
4	X	2437.400	81.98	13.86	95.84	74.00	21.84	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2432 MHz\_484 Tone

**Vertical**

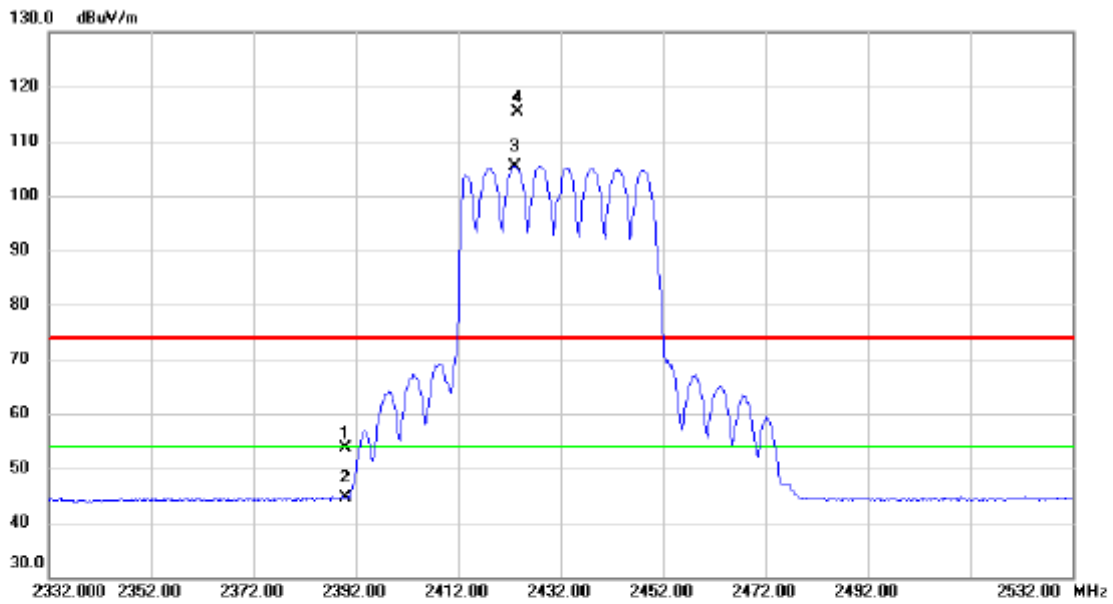


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.75	13.81	53.56	74.00	-20.44	peak	
2		2390.000	30.89	13.81	44.70	54.00	-9.30	AVG	
3	*	2423.000	91.55	13.85	105.40	54.00	51.40	AVG	No Limit
4	X	2423.600	101.41	13.85	115.26	74.00	41.26	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2432 MHz\_484 Tone

### Horizontal

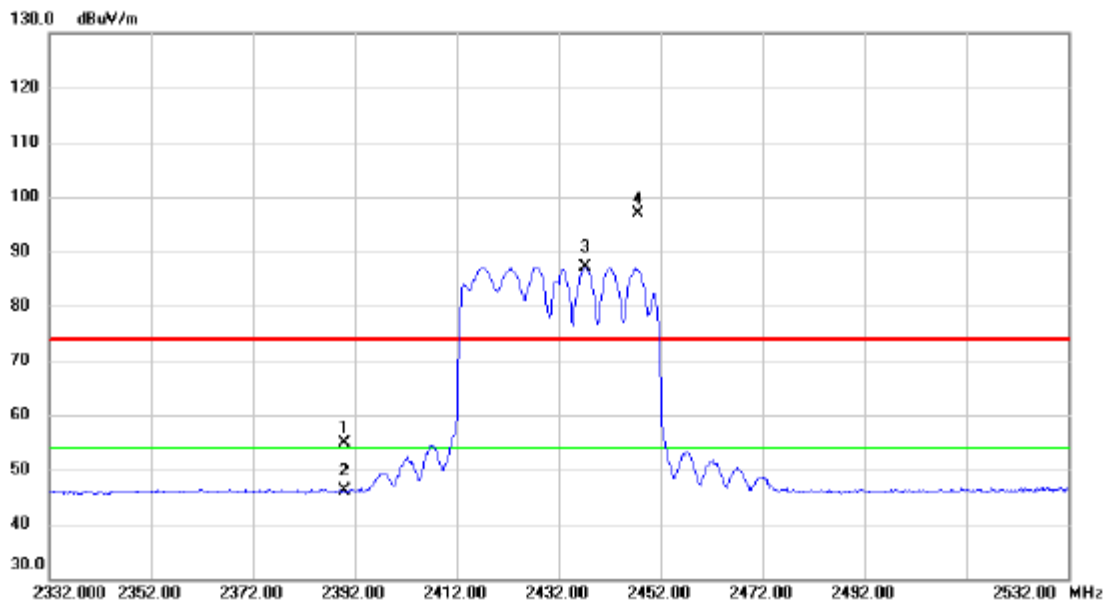

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.04	13.81	54.85	74.00	-19.15	peak	
2		2390.000	32.23	13.81	46.04	54.00	-7.96	AVG	
3	*	2437.200	73.18	13.86	87.04	54.00	33.04	AVG	No Limit
4	X	2447.600	83.09	13.88	96.97	74.00	22.97	peak	No Limit


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX AX-40M Mode 2437 MHz\_484 Tone

### Vertical

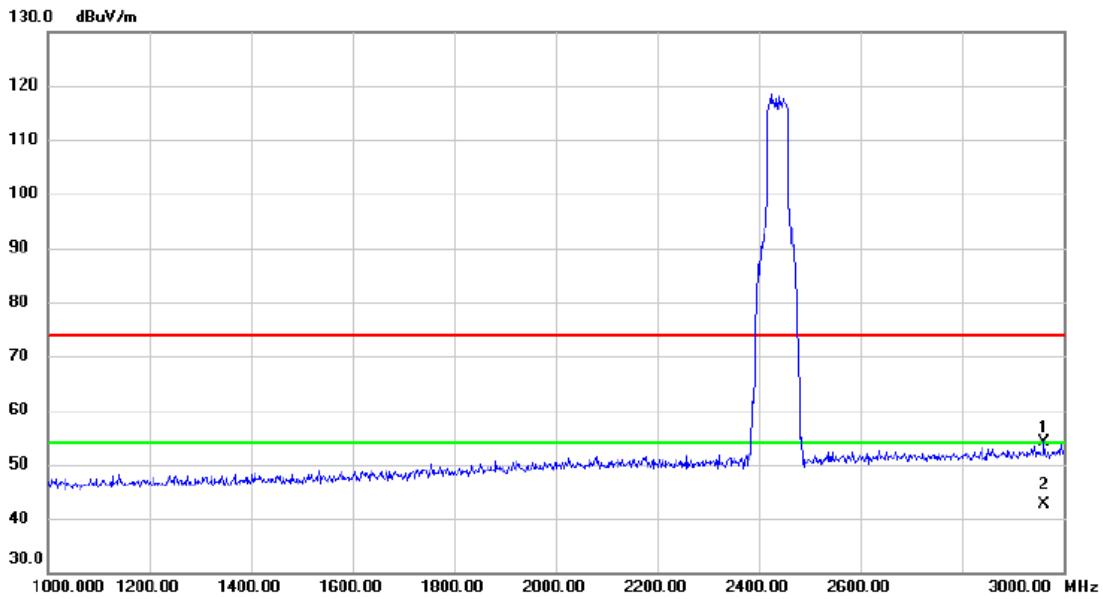


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2962.000	43.73	10.35	54.08	74.00	-19.92	peak	
2 *	2962.000	32.16	10.35	42.51	54.00	-11.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz\_484 Tone

### Vertical

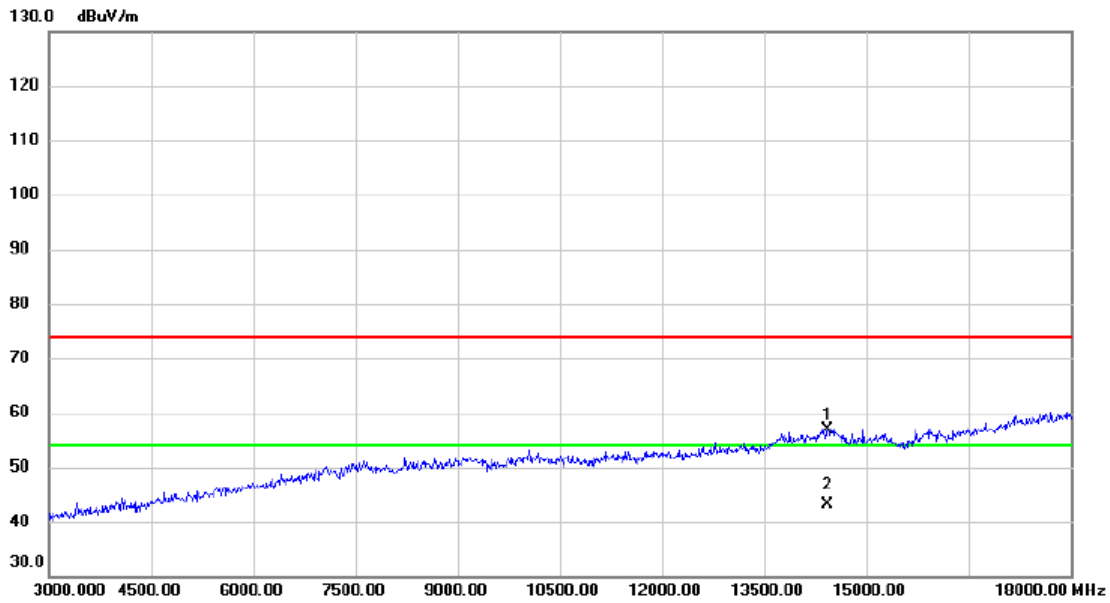


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14430.000	37.86	19.12	56.98	74.00	-17.02	peak	
2	*	14430.000	24.07	19.12	43.19	54.00	-10.81	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz\_484 Tone

### Vertical

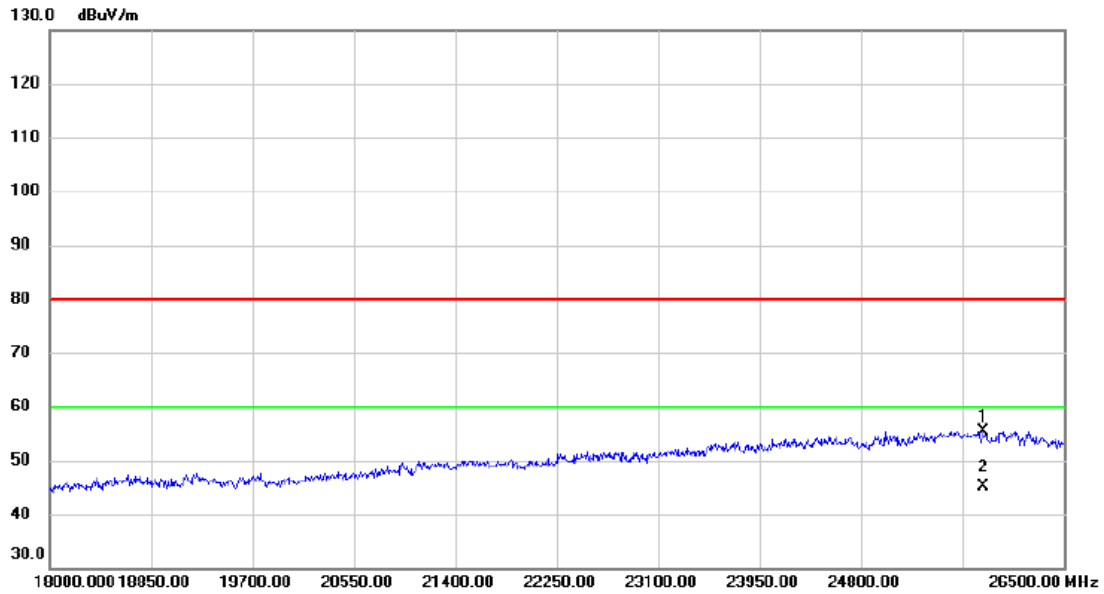

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25828.500	25.17	30.30	55.47	80.00	-24.53	peak	
2	*	25828.500	14.74	30.30	45.04	60.00	-14.96	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz\_484 Tone

### Horizontal

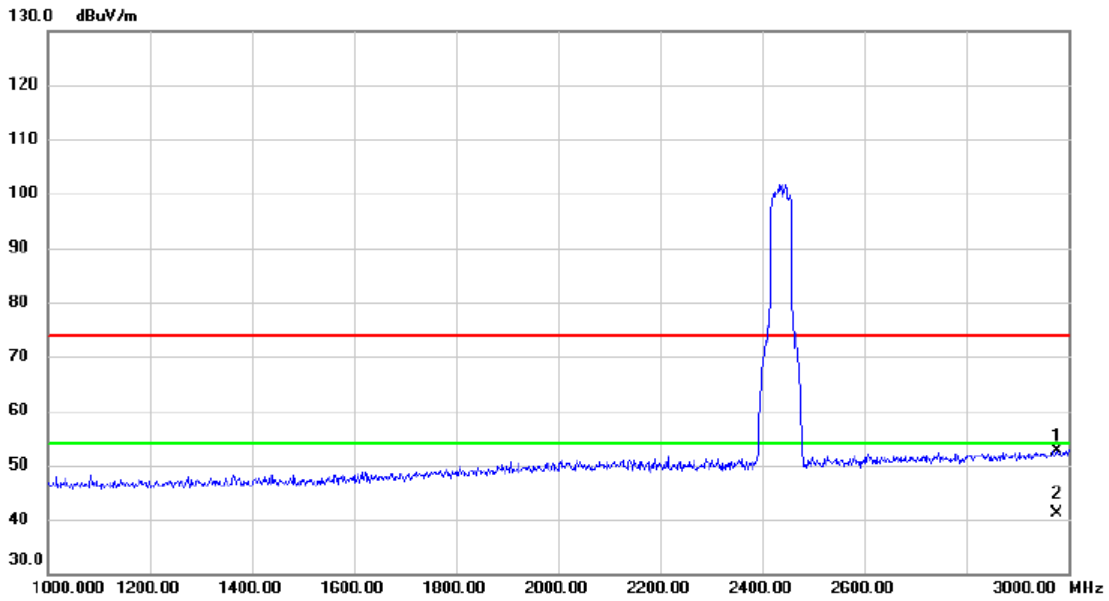


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2976.000	42.24	10.41	52.65	74.00	-21.35	peak	
2	*	2976.000	30.77	10.41	41.18	54.00	-12.82	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz\_484 Tone

### Horizontal

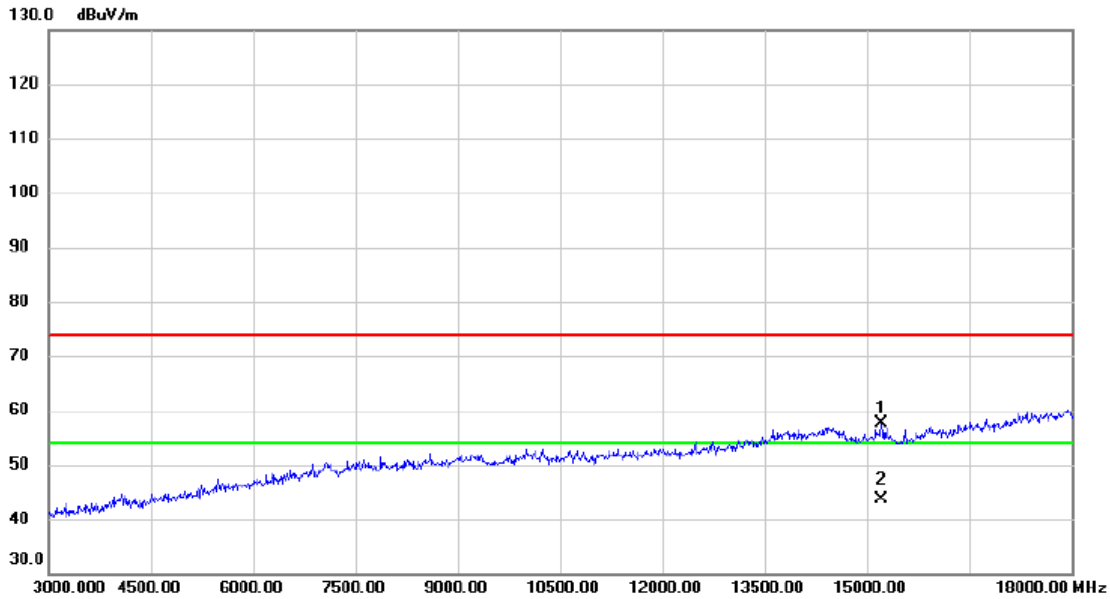


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		15210.000	40.30	17.37	57.67	74.00	-16.33	peak	
2	*	15210.000	26.14	17.37	43.51	54.00	-10.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz\_484 Tone

### Horizontal

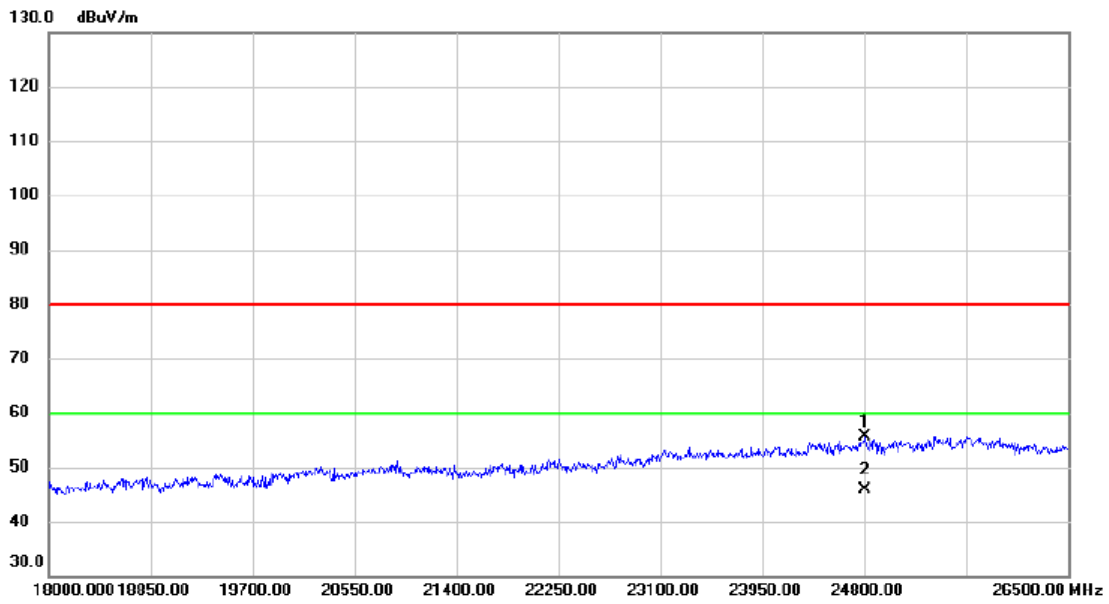


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	24808.500	25.47	30.27	55.74	80.00	-24.26	peak	
2 *	24808.500	15.71	30.27	45.98	60.00	-14.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz\_484 Tone

### Vertical

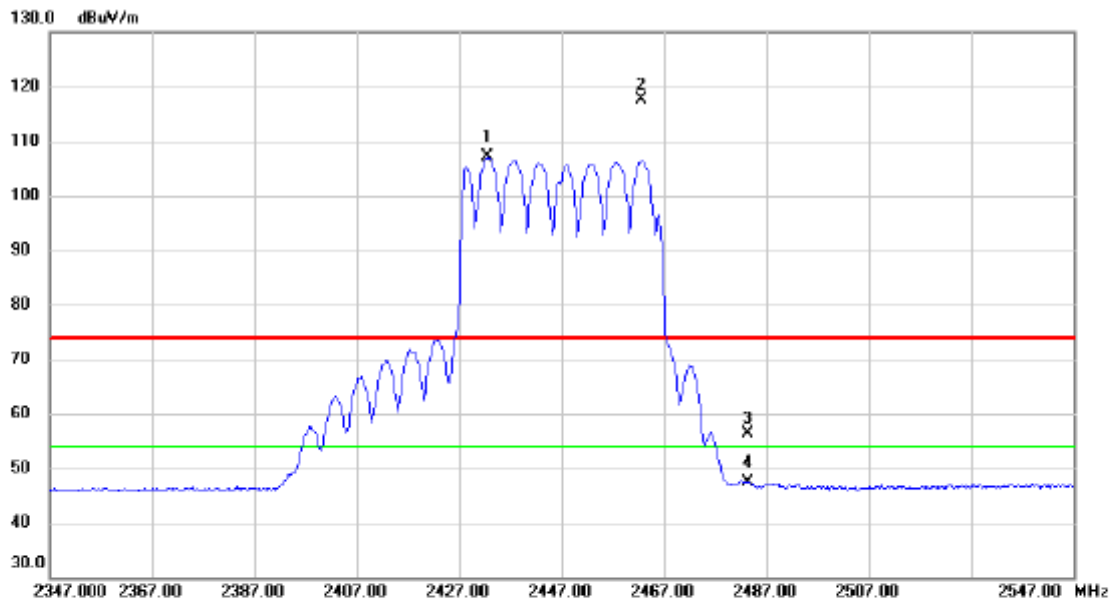


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2432.600	93.15	13.86	107.01	54.00	53.01	AVG	No Limit
2	X	2462.600	103.83	13.90	117.73	74.00	43.73	peak	No Limit
3		2483.500	42.36	13.93	56.29	74.00	-17.71	peak	
4		2483.500	33.38	13.93	47.31	54.00	-6.69	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz\_484 Tone

### Horizontal

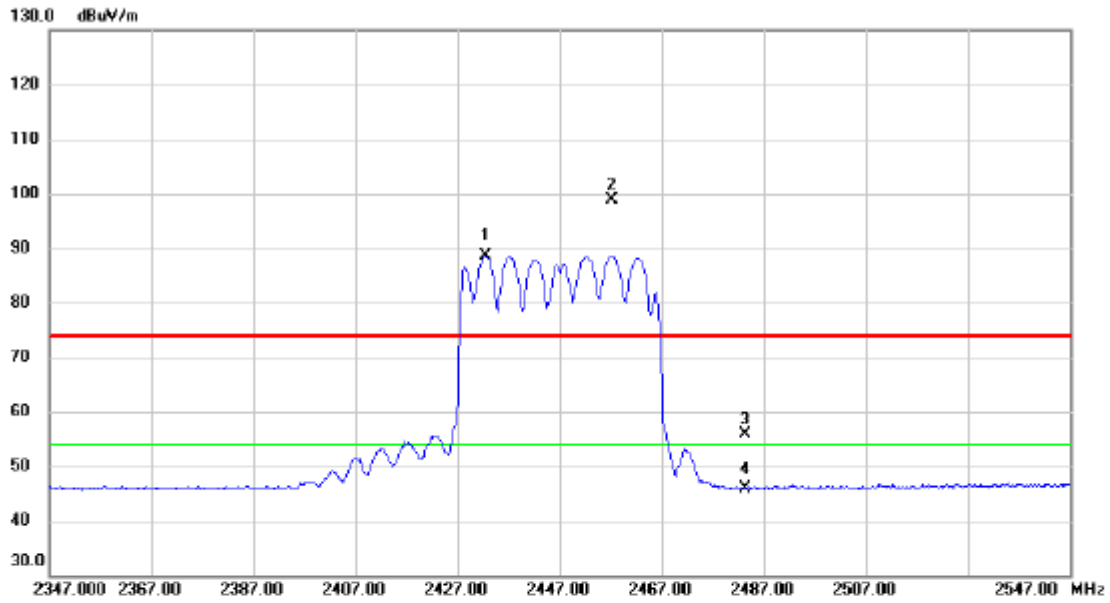

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2432.400	74.86	13.86	88.72	54.00	34.72	AVG	No Limit
2	X	2457.200	84.89	13.90	98.79	74.00	24.79	peak	No Limit
3		2483.500	41.87	13.93	55.80	74.00	-18.20	peak	
4		2483.500	32.04	13.93	45.97	54.00	-8.03	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX AX-40M Mode 2452 MHz\_484 Tone

### Vertical

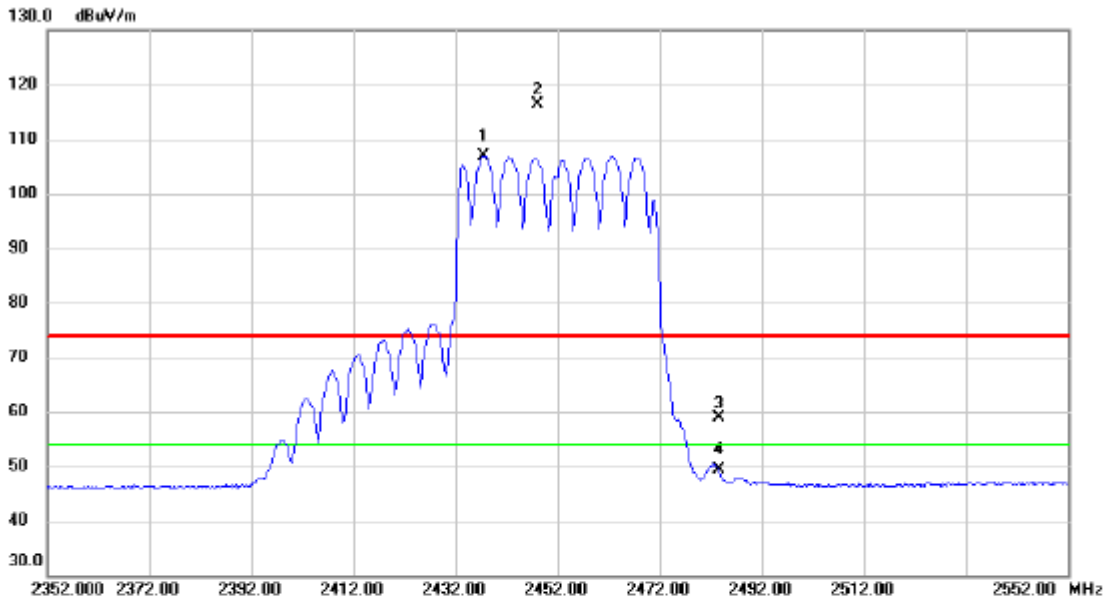


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2437.600	93.12	13.87	106.99	54.00	52.99	AVG	No Limit
2	X	2448.200	102.48	13.88	116.36	74.00	42.36	peak	No Limit
3		2483.500	45.02	13.93	58.95	74.00	-15.05	peak	
4		2483.500	35.35	13.93	49.28	54.00	-4.72	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz\_484 Tone

### Horizontal

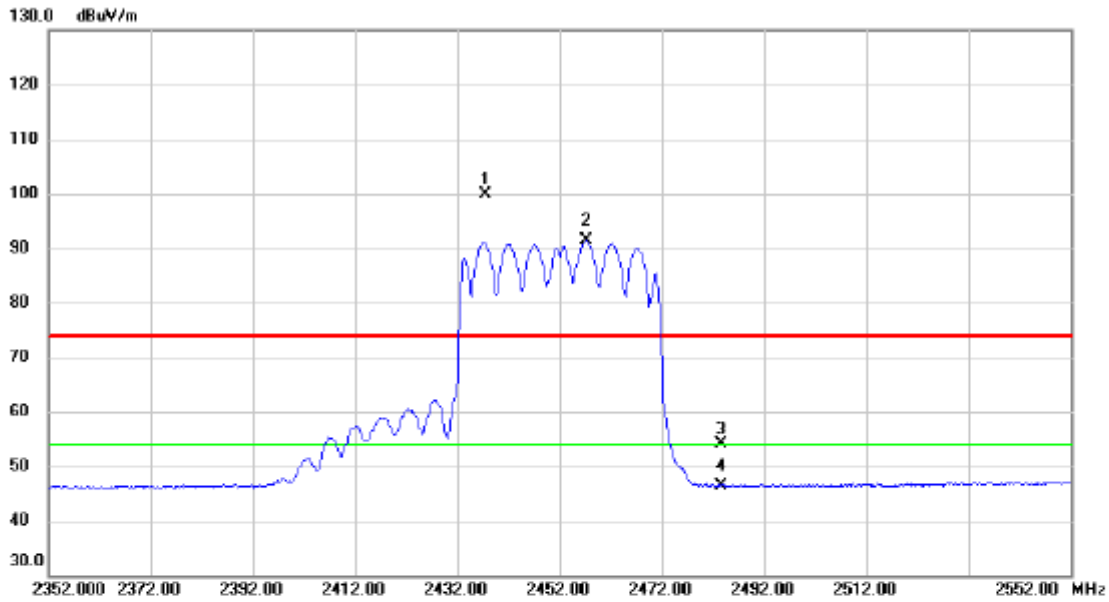

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.600	85.90	13.87	99.77	74.00	25.77	peak	No Limit
2	*	2457.200	77.36	13.90	91.26	54.00	37.26	AVG	No Limit
3		2483.500	40.19	13.93	54.12	74.00	-19.88	peak	
4		2483.500	32.53	13.93	46.46	54.00	-7.54	AVG	




**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.




## APPENDIX E - BANDWIDTH

Test Mode	TX B Mode_SISO 1
-----------	------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	9.11	500	Complies
06	2437	9.10	500	Complies
11	2462	9.08	500	Complies

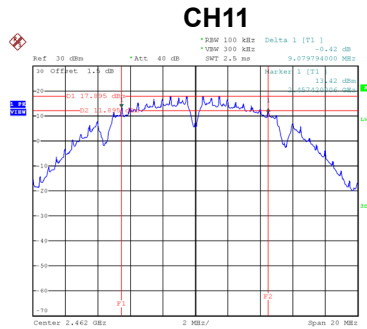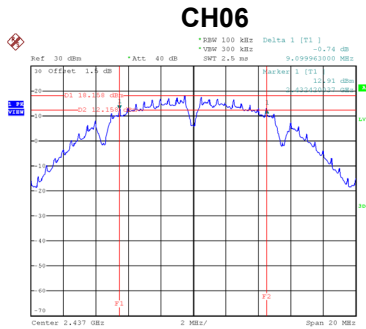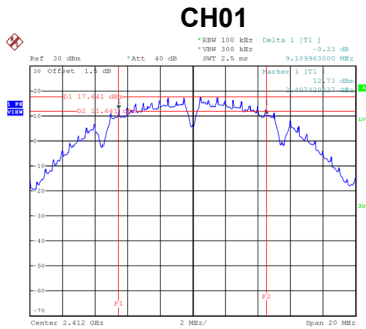


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	13.60	Complies
06	2437	13.68	Complies
11	2462	13.52	Complies

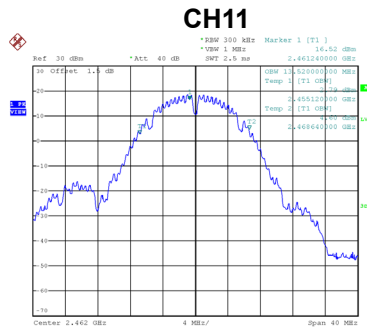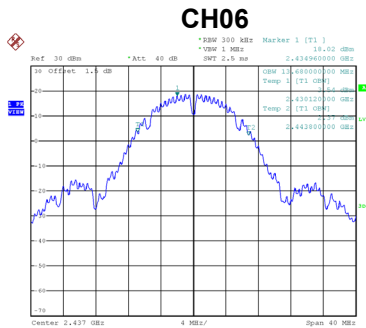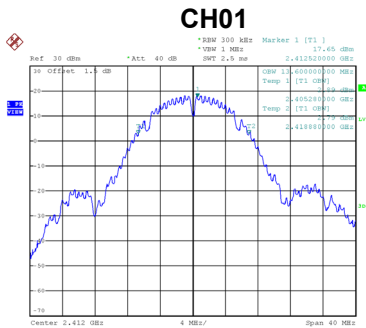


Test Mode	TX G Mode_SISO 1
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	16.14	500	Complies
06	2437	16.35	500	Complies
11	2462	15.80	500	Complies

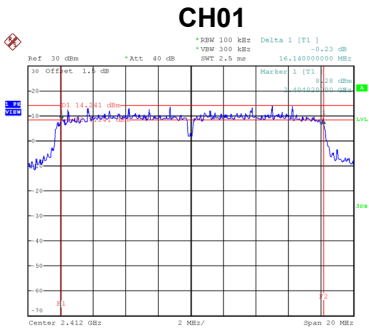

Date: 2.JUL.2020 10:51:37

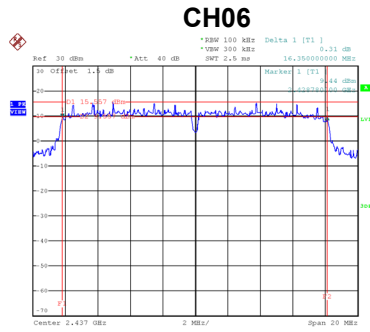


Date: 2.JUL.2020 10:54:26

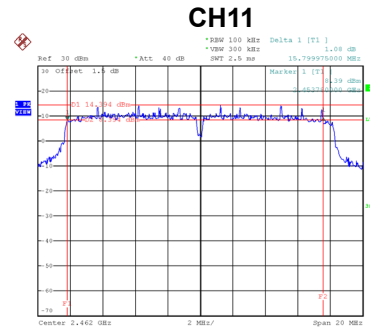


Date: 2.JUL.2020 10:56:06


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.84	Complies
06	2437	21.92	Complies
11	2462	17.44	Complies

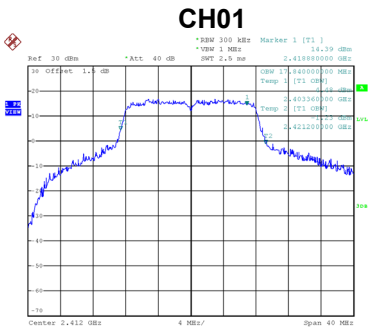

Date: 2.JUL.2020 10:51:44

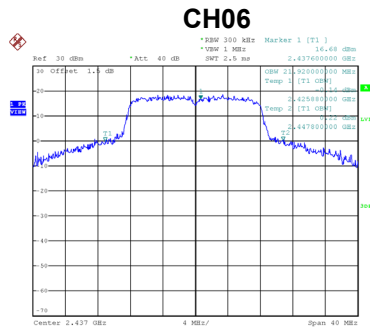


Date: 2.JUL.2020 10:54:33

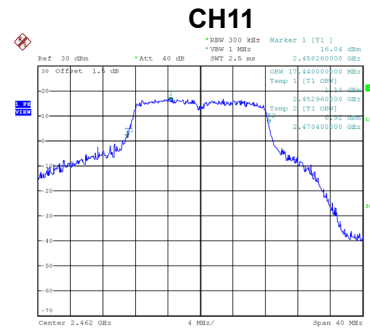


Date: 2.JUL.2020 10:56:12

Test Mode	TX N-20M Mode_SISO 1
-----------	----------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	16.83	500	Complies
06	2437	16.56	500	Complies
11	2462	16.76	500	Complies

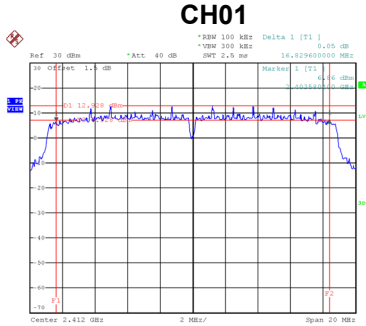

Date: 2.JUL.2020 10:57:37

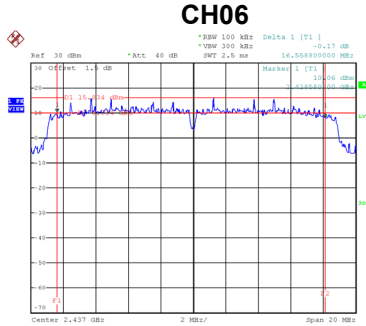


Date: 2.JUL.2020 11:01:50

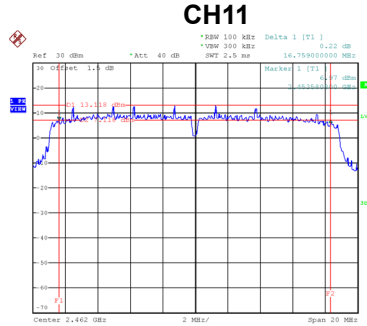


Date: 2.JUL.2020 11:03:01


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	18.16	Complies
06	2437	22.72	Complies
11	2462	18.00	Complies

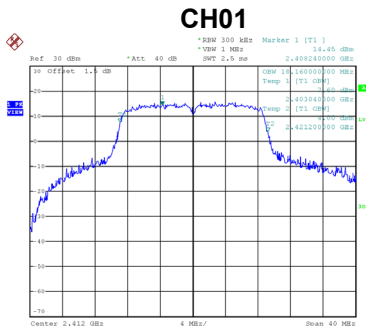

Date: 2.JUL.2020 10:57:43

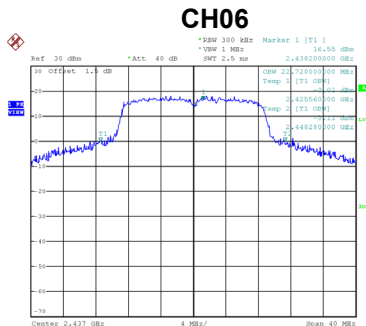


Date: 2.JUL.2020 11:01:56

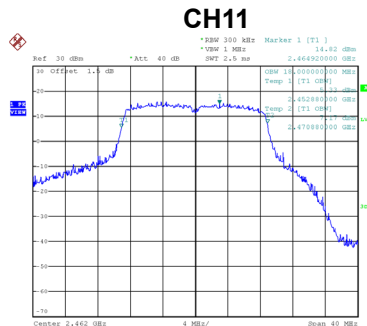


Date: 2.JUL.2020 11:03:07

Test Mode	TX N-40M Mode_SISO 1
-----------	----------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.24	500	Complies
06	2437	35.20	500	Complies
09	2452	35.16	500	Complies

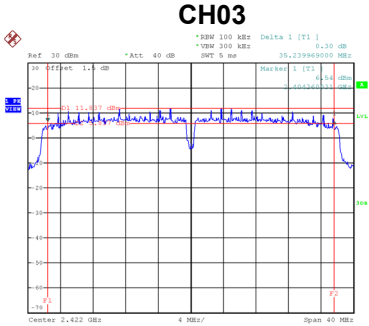

Date: 2.JUL.2020 11:04:27

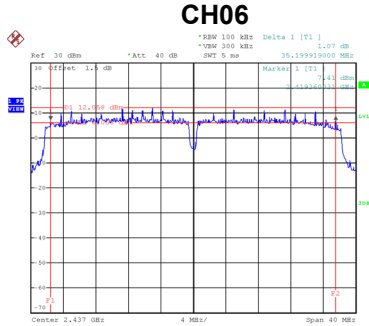


Date: 2.JUL.2020 11:05:27

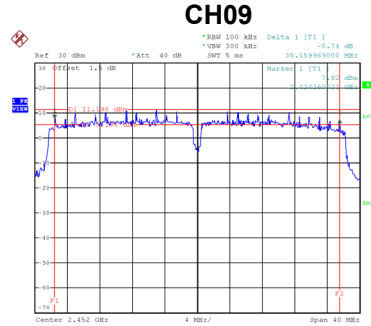


Date: 2.JUL.2020 11:07:27


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	37.76	Complies
06	2437	37.76	Complies
09	2452	36.80	Complies

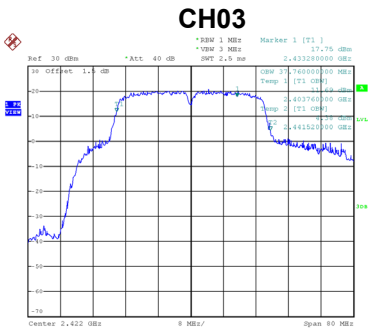

Date: 2.JUL.2020 11:04:34

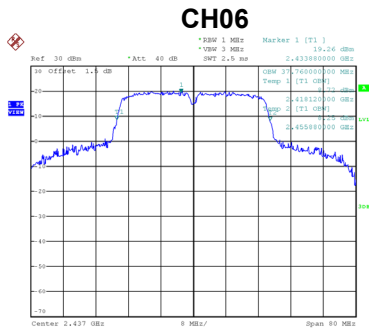


Date: 2.JUL.2020 11:05:33

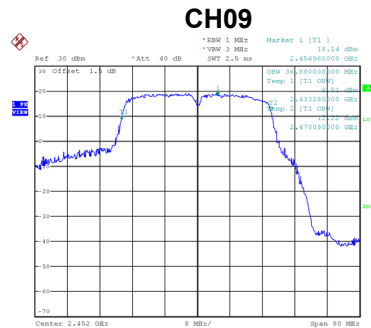


Date: 2.JUL.2020 11:07:34

Test Mode	TX AX-20M Mode_242 Tone_SISO 1
-----------	--------------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.71	500	Complies
06	2437	16.40	500	Complies
11	2462	16.79	500	Complies

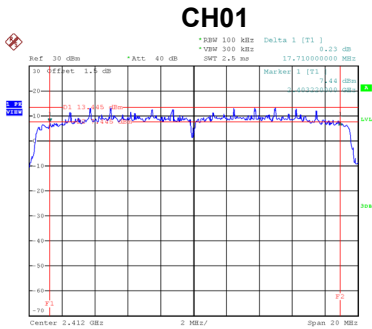

Date: 2.JUL.2020 11:08:43

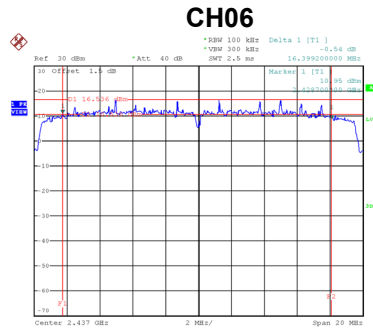


Date: 2.JUL.2020 11:10:13

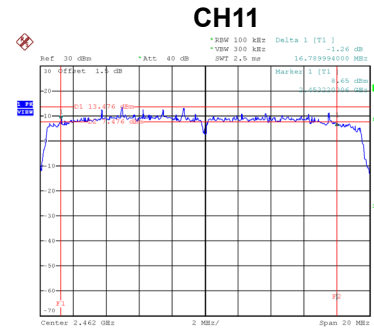


Date: 2.JUL.2020 11:11:24


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	19.12	Complies
06	2437	22.40	Complies
11	2462	19.04	Complies

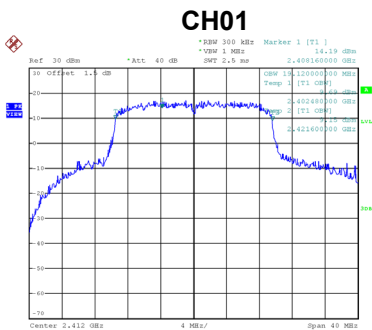

Date: 2.JUL.2020 11:08:50

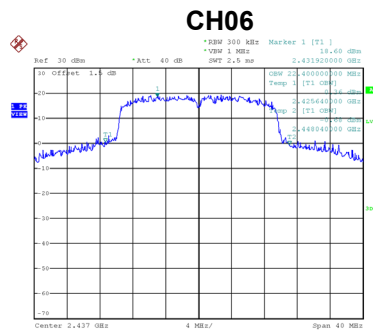

Date: 2.JUL.2020 11:10:20

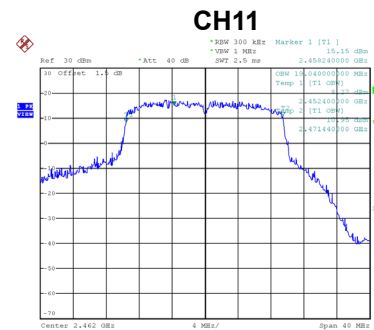


Date: 2.JUL.2020 11:11:51




Test Mode	TX AX-40M Mode_484 Tone_SISO 1
-----------	--------------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.04	500	Complies
06	2437	35.92	500	Complies
09	2452	35.88	500	Complies

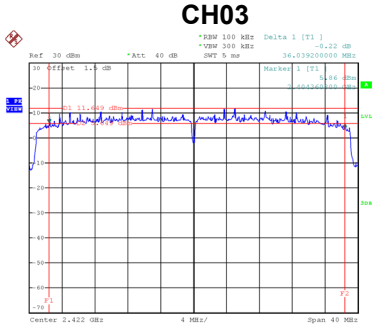

Date: 2.JUL.2020 11:17:55

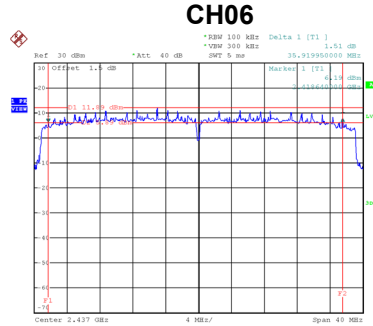


Date: 2.JUL.2020 11:18:54

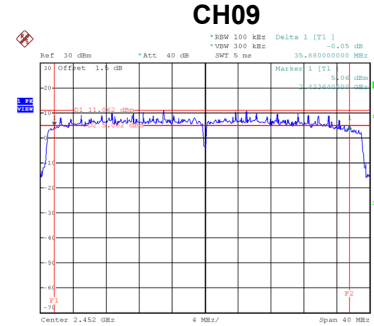


Date: 2.JUL.2020 11:19:50


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	38.72	Complies
06	2437	39.04	Complies
09	2452	38.08	Complies

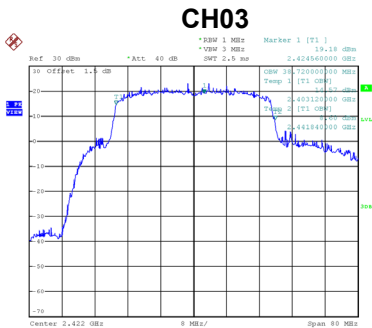

Date: 2.JUL.2020 11:18:02

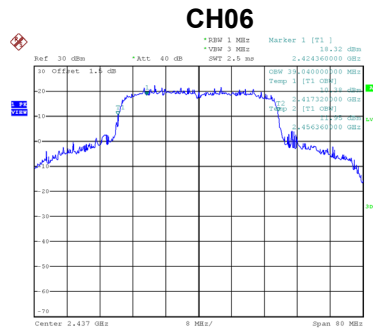

Date: 2.JUL.2020 11:19:00

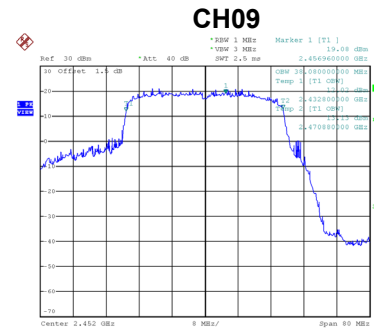

Date: 2.JUL.2020 11:19:57

## APPENDIX F - MAXIMUM OUTPUT POWER

**Non Beamforming**

Test Mode	TX B Mode_SISO 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.39	0.00	25.39	30.00	1.0000	Complies
06	2437	25.16	0.00	25.16	30.00	1.0000	Complies
11	2462	24.93	0.00	24.93	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.43	0.20	14.63	30.00	1.0000	Complies
02	2417	16.08	0.20	16.28	30.00	1.0000	Complies
03	2422	16.47	0.20	16.67	30.00	1.0000	Complies
04	2427	21.90	0.20	22.10	30.00	1.0000	Complies
06	2437	21.80	0.20	22.00	30.00	1.0000	Complies
09	2452	20.35	0.20	20.55	30.00	1.0000	Complies
10	2457	19.34	0.20	19.54	30.00	1.0000	Complies
11	2462	18.98	0.20	19.18	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.36	0.20	14.56	30.00	1.0000	Complies
02	2417	16.06	0.20	16.26	30.00	1.0000	Complies
03	2422	16.39	0.20	16.59	30.00	1.0000	Complies
04	2427	22.06	0.20	22.26	30.00	1.0000	Complies
06	2437	21.53	0.20	21.73	30.00	1.0000	Complies
09	2452	20.52	0.20	20.72	30.00	1.0000	Complies
10	2457	19.08	0.20	19.28	30.00	1.0000	Complies
11	2462	19.43	0.20	19.63	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.60	30.00	1.0000	Complies
02	2417	19.28	30.00	1.0000	Complies
03	2422	19.64	30.00	1.0000	Complies
04	2427	25.19	30.00	1.0000	Complies
06	2437	24.87	30.00	1.0000	Complies
09	2452	23.64	30.00	1.0000	Complies
10	2457	22.42	30.00	1.0000	Complies
11	2462	22.42	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.06	0.21	14.27	30.00	1.0000	Complies
02	2417	15.11	0.21	15.32	30.00	1.0000	Complies
03	2422	16.35	0.21	16.56	30.00	1.0000	Complies
04	2427	21.89	0.21	22.10	30.00	1.0000	Complies
06	2437	21.48	0.21	21.69	30.00	1.0000	Complies
09	2452	21.62	0.21	21.83	30.00	1.0000	Complies
10	2457	20.22	0.21	20.43	30.00	1.0000	Complies
11	2462	18.89	0.21	19.10	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.47	0.21	14.68	30.00	1.0000	Complies
02	2417	15.89	0.21	16.10	30.00	1.0000	Complies
03	2422	16.48	0.21	16.69	30.00	1.0000	Complies
04	2427	22.14	0.21	22.35	30.00	1.0000	Complies
06	2437	21.73	0.21	21.94	30.00	1.0000	Complies
09	2452	21.84	0.21	22.05	30.00	1.0000	Complies
10	2457	20.76	0.21	20.97	30.00	1.0000	Complies
11	2462	19.22	0.21	19.43	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.49	30.00	1.0000	Complies
02	2417	18.74	30.00	1.0000	Complies
03	2422	19.64	30.00	1.0000	Complies
04	2427	25.24	30.00	1.0000	Complies
06	2437	24.83	30.00	1.0000	Complies
09	2452	24.95	30.00	1.0000	Complies
10	2457	23.72	30.00	1.0000	Complies
11	2462	22.28	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.69	0.39	14.08	30.00	1.0000	Complies
04	2427	15.79	0.39	16.18	30.00	1.0000	Complies
05	2432	16.56	0.39	16.95	30.00	1.0000	Complies
06	2437	16.82	0.39	17.21	30.00	1.0000	Complies
08	2447	17.32	0.39	17.71	30.00	1.0000	Complies
09	2452	18.67	0.39	19.06	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.85	0.39	14.24	30.00	1.0000	Complies
04	2427	15.84	0.39	16.23	30.00	1.0000	Complies
05	2432	16.73	0.39	17.12	30.00	1.0000	Complies
06	2437	16.79	0.39	17.18	30.00	1.0000	Complies
08	2447	18.01	0.39	18.40	30.00	1.0000	Complies
09	2452	19.32	0.39	19.71	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.17	30.00	1.0000	Complies
04	2427	19.22	30.00	1.0000	Complies
05	2432	20.05	30.00	1.0000	Complies
06	2437	20.21	30.00	1.0000	Complies
08	2447	21.08	30.00	1.0000	Complies
09	2452	22.41	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 1	RU Configuration	26 Tone
-----------	-----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	11.22	0.24	11.46	30.00	1.0000	Complies
02	2417	12.21	0.24	12.45	30.00	1.0000	Complies
03	2422	13.12	0.24	13.36	30.00	1.0000	Complies
06	2437	17.78	0.24	18.02	30.00	1.0000	Complies
09	2452	17.54	0.24	17.78	30.00	1.0000	Complies
10	2457	16.59	0.24	16.83	30.00	1.0000	Complies
11	2462	15.39	0.24	15.63	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2	RU Configuration	26 Tone
-----------	-----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	11.74	0.24	11.98	30.00	1.0000	Complies
02	2417	12.81	0.24	13.05	30.00	1.0000	Complies
03	2422	13.43	0.24	13.67	30.00	1.0000	Complies
06	2437	18.48	0.24	18.72	30.00	1.0000	Complies
09	2452	18.29	0.24	18.53	30.00	1.0000	Complies
10	2457	17.45	0.24	17.69	30.00	1.0000	Complies
11	2462	16.14	0.24	16.38	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total	RU Configuration	26 Tone
-----------	----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.74	30.00	1.0000	Complies
02	2417	15.77	30.00	1.0000	Complies
03	2422	16.53	30.00	1.0000	Complies
06	2437	21.40	30.00	1.0000	Complies
09	2452	21.18	30.00	1.0000	Complies
10	2457	20.29	30.00	1.0000	Complies
11	2462	19.03	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 1	RU Configuration	52 Tone
-----------	-----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	12.79	0.24	13.03	30.00	1.0000	Complies
02	2417	13.95	0.24	14.19	30.00	1.0000	Complies
03	2422	15.04	0.24	15.28	30.00	1.0000	Complies
06	2437	19.58	0.24	19.82	30.00	1.0000	Complies
09	2452	19.94	0.24	20.18	30.00	1.0000	Complies
10	2457	18.83	0.24	19.07	30.00	1.0000	Complies
11	2462	17.43	0.24	17.67	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2	RU Configuration	52 Tone
-----------	-----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	12.88	0.24	13.12	30.00	1.0000	Complies
02	2417	13.94	0.24	14.18	30.00	1.0000	Complies
03	2422	15.13	0.24	15.37	30.00	1.0000	Complies
06	2437	19.87	0.24	20.11	30.00	1.0000	Complies
09	2452	19.86	0.24	20.1	30.00	1.0000	Complies
10	2457	18.94	0.24	19.18	30.00	1.0000	Complies
11	2462	17.84	0.24	18.08	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total	RU Configuration	52 Tone
-----------	----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.09	30.00	1.0000	Complies
02	2417	17.20	30.00	1.0000	Complies
03	2422	18.34	30.00	1.0000	Complies
06	2437	22.98	30.00	1.0000	Complies
09	2452	23.15	30.00	1.0000	Complies
10	2457	22.14	30.00	1.0000	Complies
11	2462	20.89	30.00	1.0000	Complies



Test Mode	TX AX-20M Mode_Ant. 1	RU Configuration	106 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	13.36	0.24	13.6	30.00	1.0000	Complies
02	2417	14.18	0.24	14.42	30.00	1.0000	Complies
03	2422	15.37	0.24	15.61	30.00	1.0000	Complies
06	2437	20.34	0.24	20.58	30.00	1.0000	Complies
09	2452	20.41	0.24	20.65	30.00	1.0000	Complies
10	2457	19.43	0.24	19.67	30.00	1.0000	Complies
11	2462	18.08	0.24	18.32	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2	RU Configuration	106 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	13.57	0.24	13.81	30.00	1.0000	Complies
02	2417	14.92	0.24	15.16	30.00	1.0000	Complies
03	2422	15.73	0.24	15.97	30.00	1.0000	Complies
06	2437	20.89	0.24	21.13	30.00	1.0000	Complies
09	2452	21.02	0.24	21.26	30.00	1.0000	Complies
10	2457	19.87	0.24	20.11	30.00	1.0000	Complies
11	2462	18.51	0.24	18.75	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total	RU Configuration	106 Tone
-----------	----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.72	30.00	1.0000	Complies
02	2417	17.82	30.00	1.0000	Complies
03	2422	18.81	30.00	1.0000	Complies
06	2437	23.88	30.00	1.0000	Complies
09	2452	23.98	30.00	1.0000	Complies
10	2457	22.91	30.00	1.0000	Complies
11	2462	21.55	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 1	RU Configuration	242 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.84	0.24	15.08	30.00	1.0000	Complies
02	2417	15.67	0.24	15.91	30.00	1.0000	Complies
03	2422	16.53	0.24	16.77	30.00	1.0000	Complies
04	2427	21.89	0.24	22.13	30.00	1.0000	Complies
06	2437	21.43	0.24	21.67	30.00	1.0000	Complies
09	2452	21.44	0.24	21.68	30.00	1.0000	Complies
10	2457	20.48	0.24	20.72	30.00	1.0000	Complies
11	2462	19.27	0.24	19.51	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2	RU Configuration	242 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.86	0.24	15.1	30.00	1.0000	Complies
02	2417	16.04	0.24	16.28	30.00	1.0000	Complies
03	2422	16.55	0.24	16.79	30.00	1.0000	Complies
04	2427	22.14	0.24	22.38	30.00	1.0000	Complies
06	2437	21.33	0.24	21.57	30.00	1.0000	Complies
09	2452	21.47	0.24	21.71	30.00	1.0000	Complies
10	2457	20.44	0.24	20.68	30.00	1.0000	Complies
11	2462	19.67	0.24	19.91	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total	RU Configuration	242 Tone
-----------	----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.10	30.00	1.0000	Complies
02	2417	19.11	30.00	1.0000	Complies
03	2422	19.79	30.00	1.0000	Complies
04	2427	25.27	30.00	1.0000	Complies
06	2437	24.63	30.00	1.0000	Complies
09	2452	24.71	30.00	1.0000	Complies
10	2457	23.71	30.00	1.0000	Complies
11	2462	22.73	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1	RU Configuration	52 Tone
-----------	-----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.09	0.43	11.52	30.00	1.0000	Complies
06	2437	14.08	0.43	14.51	30.00	1.0000	Complies
08	2447	14.02	0.43	14.45	30.00	1.0000	Complies
09	2452	15.53	0.43	15.96	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2	RU Configuration	52 Tone
-----------	-----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	10.84	0.43	11.27	30.00	1.0000	Complies
06	2437	13.82	0.43	14.25	30.00	1.0000	Complies
08	2447	13.64	0.43	14.07	30.00	1.0000	Complies
09	2452	15.89	0.43	16.32	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total	RU Configuration	52 Tone
-----------	----------------------	------------------	---------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	14.41	30.00	1.0000	Complies
06	2437	17.40	30.00	1.0000	Complies
08	2447	17.28	30.00	1.0000	Complies
09	2452	19.16	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1	RU Configuration	106 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.96	0.43	12.39	30.00	1.0000	Complies
06	2437	14.92	0.43	15.35	30.00	1.0000	Complies
08	2447	14.73	0.43	15.16	30.00	1.0000	Complies
09	2452	16.55	0.43	16.98	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2	RU Configuration	106 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.71	0.43	12.14	30.00	1.0000	Complies
06	2437	14.82	0.43	15.25	30.00	1.0000	Complies
08	2447	14.75	0.43	15.18	30.00	1.0000	Complies
09	2452	17.19	0.43	17.62	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total	RU Configuration	106 Tone
-----------	----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.28	30.00	1.0000	Complies
06	2437	18.31	30.00	1.0000	Complies
08	2447	18.18	30.00	1.0000	Complies
09	2452	20.33	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1	RU Configuration	242 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	12.83	0.43	13.26	30.00	1.0000	Complies
06	2437	15.12	0.43	15.55	30.00	1.0000	Complies
08	2447	14.85	0.43	15.28	30.00	1.0000	Complies
09	2452	16.72	0.43	17.15	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2	RU Configuration	242 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	12.43	0.43	12.86	30.00	1.0000	Complies
06	2437	15.07	0.43	15.5	30.00	1.0000	Complies
08	2447	14.92	0.43	15.35	30.00	1.0000	Complies
09	2452	17.31	0.43	17.74	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total	RU Configuration	242 Tone
-----------	----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.08	30.00	1.0000	Complies
06	2437	18.54	30.00	1.0000	Complies
08	2447	18.33	30.00	1.0000	Complies
09	2452	20.47	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1	RU Configuration	484 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.83	0.43	14.26	30.00	1.0000	Complies
04	2427	15.79	0.43	16.22	30.00	1.0000	Complies
05	2732	16.56	0.43	16.99	30.00	1.0000	Complies
06	2437	15.91	0.43	16.34	30.00	1.0000	Complies
08	2447	15.97	0.43	16.40	30.00	1.0000	Complies
09	2452	17.66	0.43	18.09	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2	RU Configuration	484 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.71	0.43	14.14	30.00	1.0000	Complies
04	2427	15.84	0.43	16.27	30.00	1.0000	Complies
05	2732	16.73	0.43	17.16	30.00	1.0000	Complies
06	2437	15.97	0.43	16.40	30.00	1.0000	Complies
08	2447	15.89	0.43	16.32	30.00	1.0000	Complies
09	2452	17.75	0.43	18.18	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total	RU Configuration	484 Tone
-----------	----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.21	30.00	1.0000	Complies
04	2427	19.26	30.00	1.0000	Complies
05	2732	20.09	30.00	1.0000	Complies
06	2437	19.38	30.00	1.0000	Complies
08	2447	19.37	30.00	1.0000	Complies
09	2452	21.15	30.00	1.0000	Complies

**Beamforming**

Test Mode	TX AX-20M Mode_Ant. 1	RU Configuration	242 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.82	0.24	15.06	30.00	1.0000	Complies
02	2417	15.77	0.24	16.01	30.00	1.0000	Complies
03	2422	16.44	0.24	16.68	30.00	1.0000	Complies
06	2437	21.75	0.24	21.99	30.00	1.0000	Complies
09	2452	21.39	0.24	21.63	30.00	1.0000	Complies
10	2457	20.46	0.24	20.7	30.00	1.0000	Complies
11	2462	19.17	0.24	19.41	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2	RU Configuration	242 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.73	0.24	14.97	30.00	1.0000	Complies
02	2417	15.86	0.24	16.1	30.00	1.0000	Complies
03	2422	16.53	0.24	16.77	30.00	1.0000	Complies
06	2437	21.72	0.24	21.96	30.00	1.0000	Complies
09	2452	21.58	0.24	21.82	30.00	1.0000	Complies
10	2457	20.45	0.24	20.69	30.00	1.0000	Complies
11	2462	19.33	0.24	19.57	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total	RU Configuration	242 Tone
-----------	----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.03	30.00	1.0000	Complies
02	2417	19.07	30.00	1.0000	Complies
03	2422	19.74	30.00	1.0000	Complies
06	2437	24.99	30.00	1.0000	Complies
09	2452	24.74	30.00	1.0000	Complies
10	2457	23.71	30.00	1.0000	Complies
11	2462	22.50	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1	RU Configuration	484 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.74	0.43	14.17	30.00	1.0000	Complies
06	2437	17.05	0.43	17.48	30.00	1.0000	Complies
08	2447	16.77	0.43	17.20	30.00	1.0000	Complies
09	2452	18.47	0.43	18.90	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2	RU Configuration	484 Tone
-----------	-----------------------	------------------	----------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	14.02	0.43	14.45	30.00	1.0000	Complies
06	2437	16.72	0.43	17.15	30.00	1.0000	Complies
08	2447	16.58	0.43	17.01	30.00	1.0000	Complies
09	2452	19.01	0.43	19.44	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total	RU Configuration	484 Tone
-----------	----------------------	------------------	----------


Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.33	30.00	1.0000	Complies
06	2437	20.33	30.00	1.0000	Complies
08	2447	20.12	30.00	1.0000	Complies
09	2452	22.19	30.00	1.0000	Complies



## **APPENDIX G - CONDUCTED SPURIOUS EMISSIONS**


Test Mode TX B Mode\_SISO 1

### Bandedge-CH01

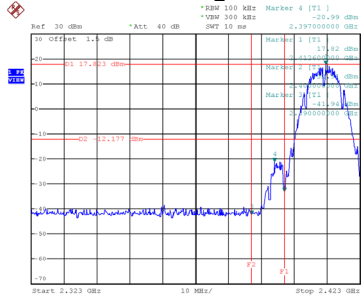


Date: 2.JUL.2020 10:47:54

### Bandedge-CH11

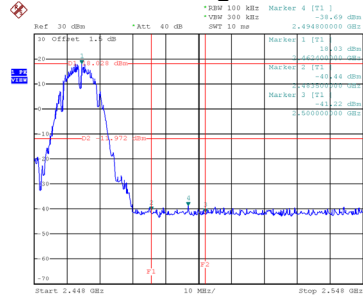


Date: 2.JUL.2020 10:50:44


### CH01 – 10th Harmonic of the fundamental frequency

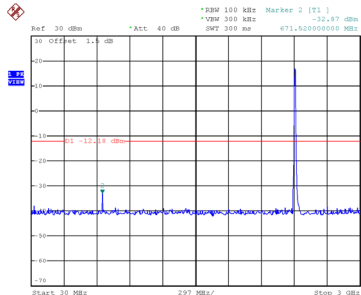

Date: 2.JUL.2020 10:48:07

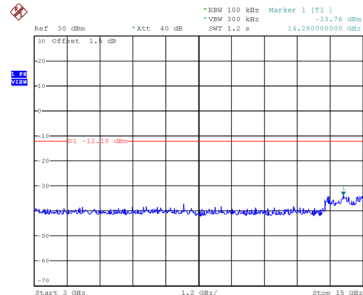


Date: 2.JUL.2020 10:48:14

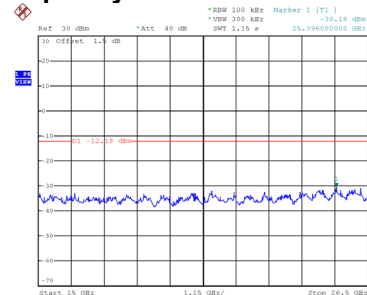


Date: 2.JUL.2020 10:48:21


### CH06 – 10th Harmonic of the fundamental frequency

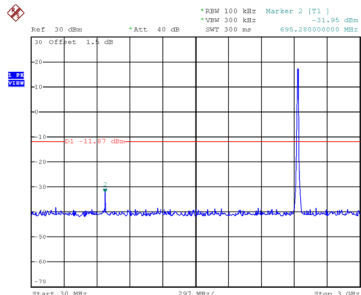

Date: 2.JUL.2020 10:49:29

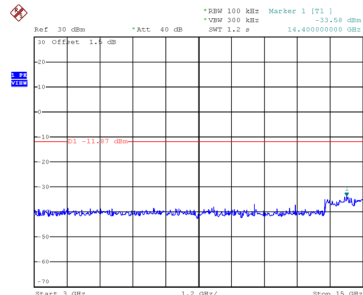


Date: 2.JUL.2020 10:49:36

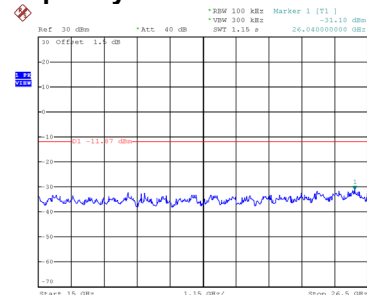


Date: 2.JUL.2020 10:49:42


### CH11 – 10th Harmonic of the fundamental frequency

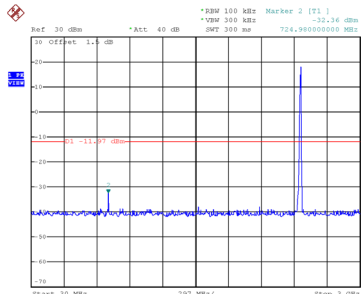

Date: 2.JUL.2020 10:50:56

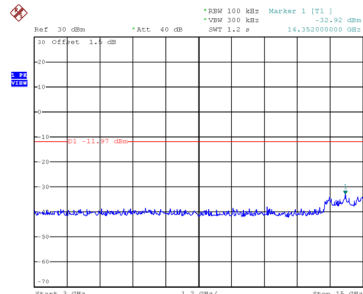


Date: 2.JUL.2020 10:51:03

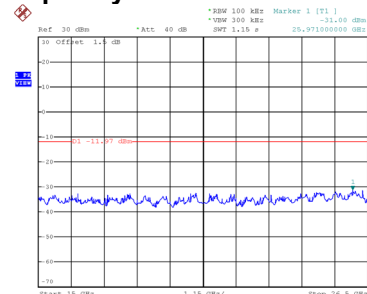

Date: 2.JUL.2020 10:51:10


Test Mode TX G Mode\_SISO 1

### Bandedge-CH01

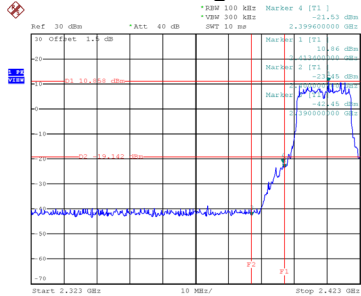


Date: 4.JUL.2020 17:19:25

### Bandedge-CH11

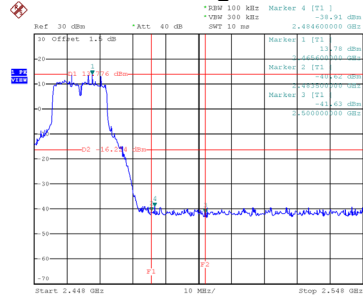


Date: 2.JUL.2020 10:56:19


### CH01 – 10th Harmonic of the fundamental frequency

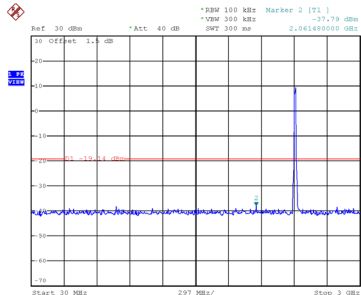

Date: 4.JUL.2020 17:19:54

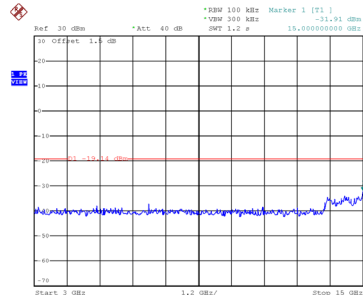


Date: 4.JUL.2020 17:20:02

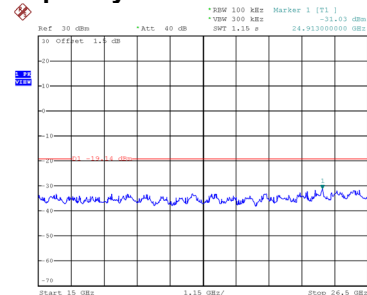


Date: 4.JUL.2020 17:20:09


### CH06 – 10th Harmonic of the fundamental frequency

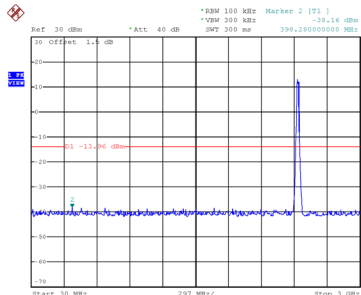

Date: 2.JUL.2020 10:54:52

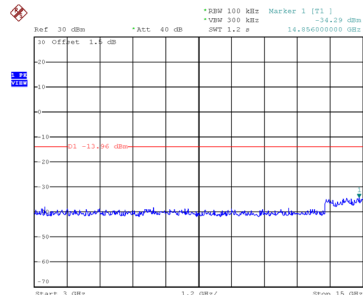


Date: 2.JUL.2020 10:54:59

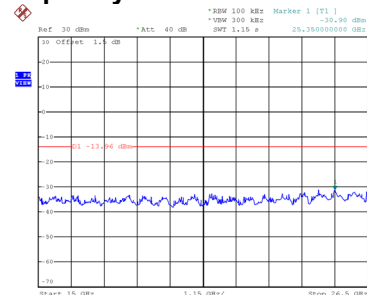


Date: 2.JUL.2020 10:55:06


### CH11 – 10th Harmonic of the fundamental frequency

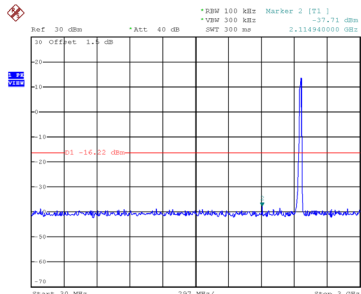

Date: 2.JUL.2020 10:56:32

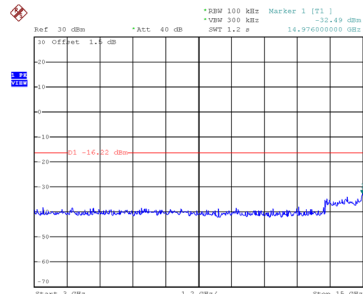


Date: 2.JUL.2020 10:56:39

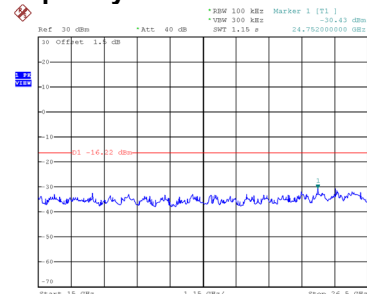

Date: 2.JUL.2020 10:56:46


Test Mode TX N-20M Mode\_SISO 1

### Bandedge-CH01

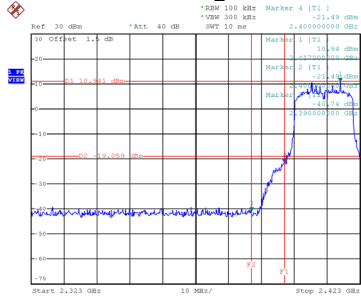


Date: 4.JUL.2020 15:49:54

### Bandedge-CH11

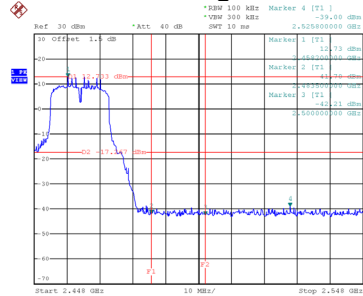


Date: 2.JUL.2020 11:03:15


### CH01 – 10th Harmonic of the fundamental frequency

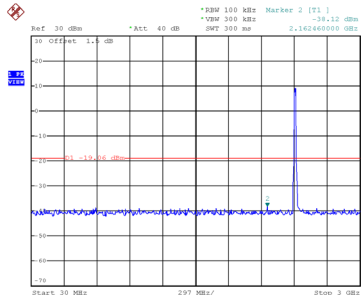

Date: 4.JUL.2020 15:50:07

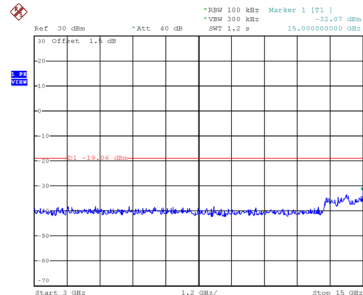


Date: 4.JUL.2020 15:50:15

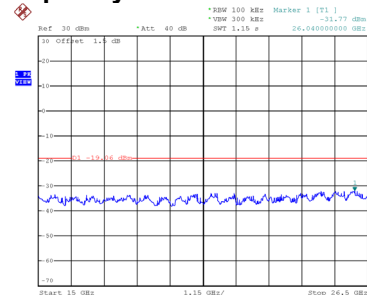


Date: 4.JUL.2020 15:50:23


### CH06 – 10th Harmonic of the fundamental frequency

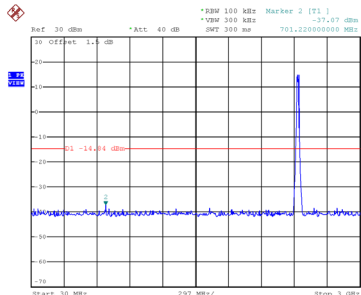

Date: 2.JUL.2020 11:02:16

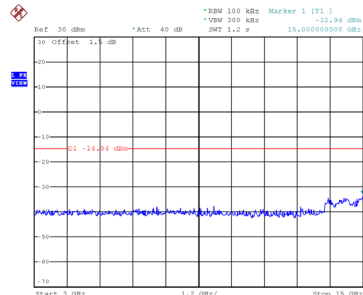


Date: 2.JUL.2020 11:02:23

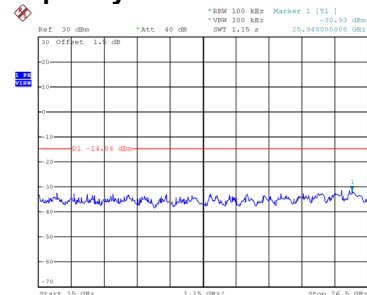


Date: 2.JUL.2020 11:02:30


### CH11 – 10th Harmonic of the fundamental frequency

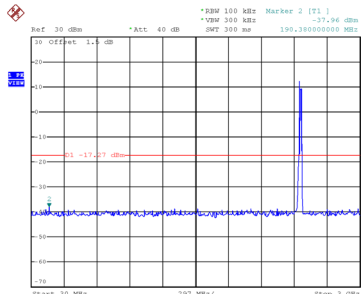

Date: 2.JUL.2020 11:03:27

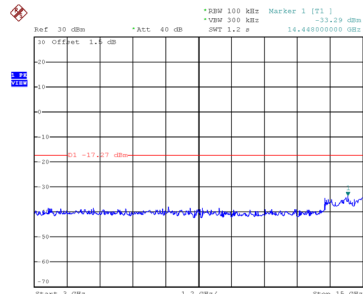


Date: 2.JUL.2020 11:03:34

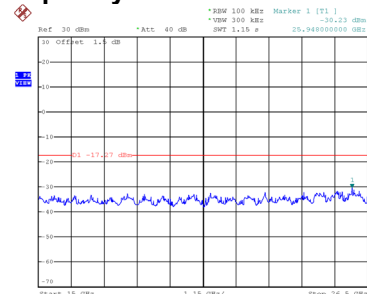

Date: 2.JUL.2020 11:03:41


Test Mode TX N-40M Mode\_SISO 1

### Bandedge-CH03

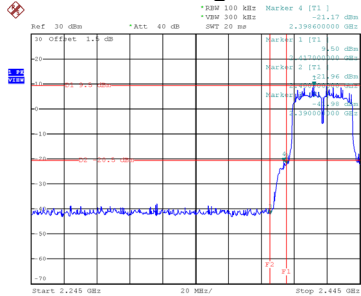


Date: 4.JUL.2020 15:50:56

### Bandedge-CH09

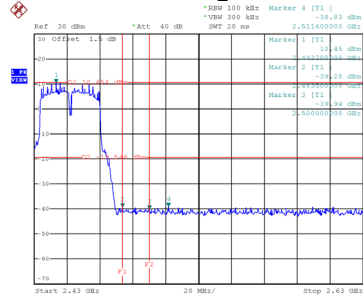


Date: 2.JUL.2020 11:07:41


### CH03 – 10th Harmonic of the fundamental frequency

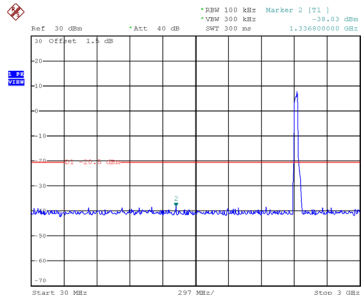

Date: 4.JUL.2020 15:51:10

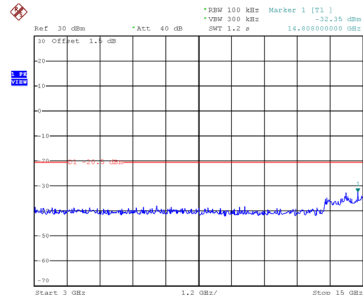


Date: 4.JUL.2020 15:51:18

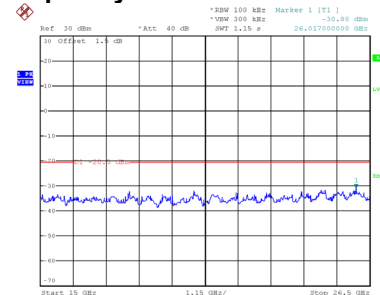


Date: 4.JUL.2020 15:51:25


### CH06 – 10th Harmonic of the fundamental frequency

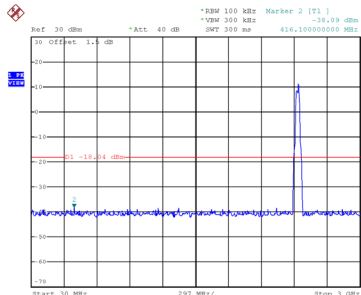

Date: 2.JUL.2020 11:05:53

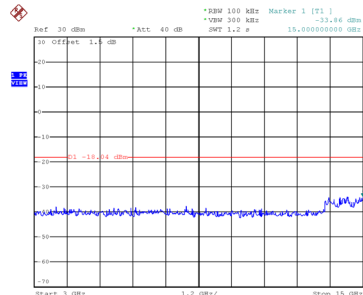


Date: 2.JUL.2020 11:06:00

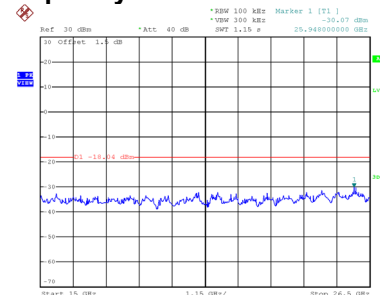


Date: 2.JUL.2020 11:06:07


### CH09 – 10th Harmonic of the fundamental frequency

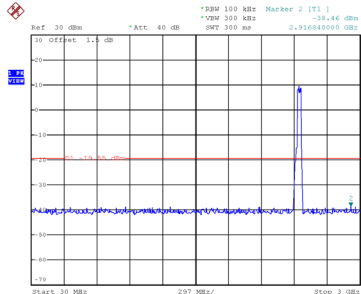

Date: 2.JUL.2020 11:07:54

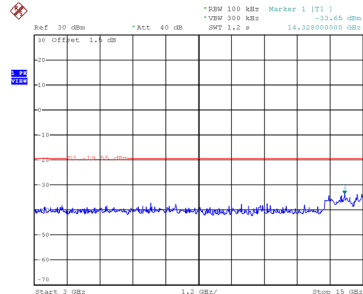


Date: 2.JUL.2020 11:08:01

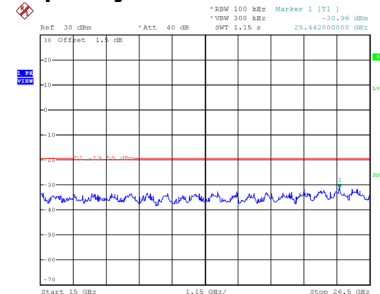

Date: 2.JUL.2020 11:08:08


Test Mode TX AX-20M Mode\_242 Tone\_SISO 1

### Bandedge-CH01

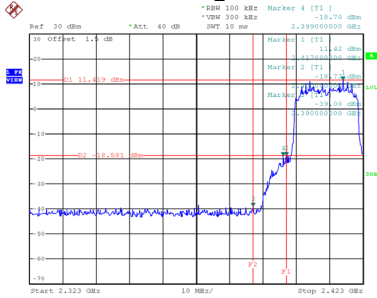


Date: 4.JUL.2020 15:51:38

### Bandedge-CH11

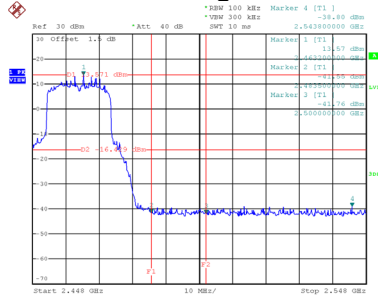


Date: 2.JUL.2020 11:11:38


### CH01 – 10th Harmonic of the fundamental frequency

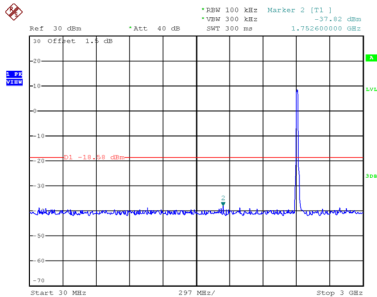

Date: 4.JUL.2020 15:51:52

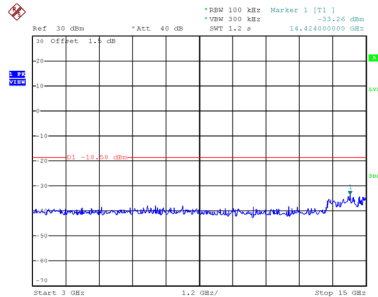


Date: 4.JUL.2020 15:52:00

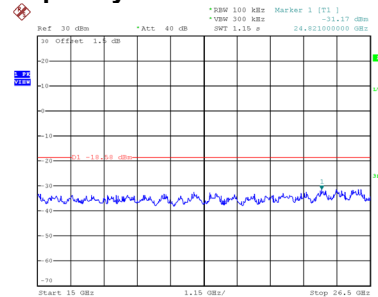


Date: 4.JUL.2020 15:52:08


### CH06 – 10th Harmonic of the fundamental frequency

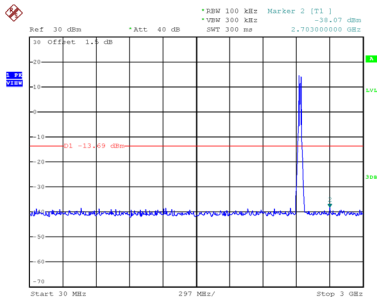

Date: 2.JUL.2020 11:10:40

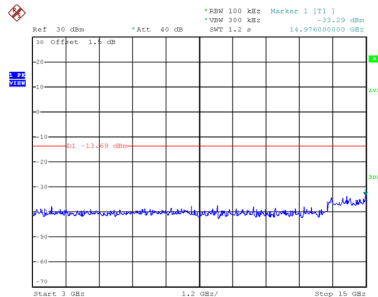


Date: 2.JUL.2020 11:10:47

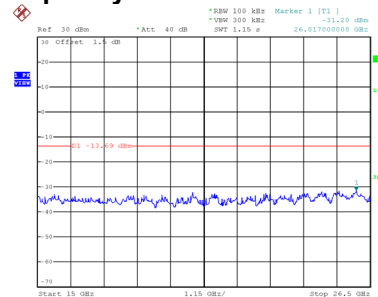


Date: 2.JUL.2020 11:10:54


### CH11 – 10th Harmonic of the fundamental frequency

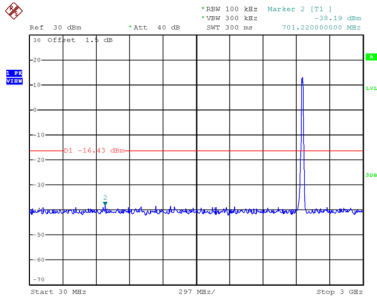

Date: 2.JUL.2020 11:11:51

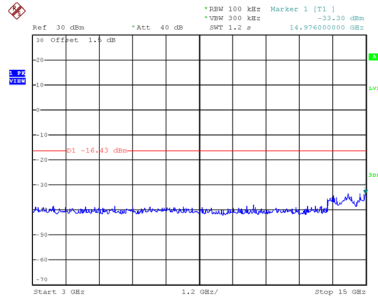


Date: 2.JUL.2020 11:11:58

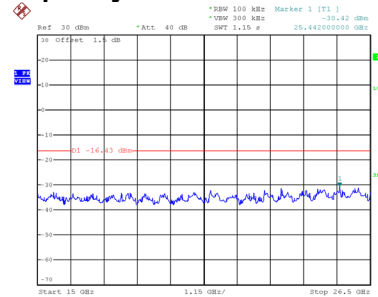

Date: 2.JUL.2020 11:12:05


Test Mode TX AX-40M Mode\_484 Tone\_SISO 1

### Bandedge-CH03

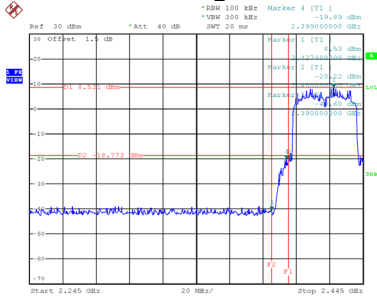


Date: 4.JUL.2020 15:56:36

### Bandedge-CH09

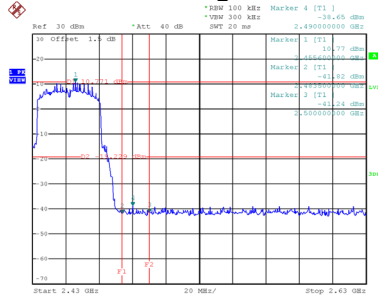


Date: 2.JUL.2020 11:20:04


### CH03 – 10th Harmonic of the fundamental frequency

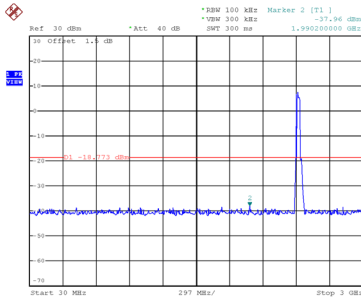

Date: 4.JUL.2020 15:57:06

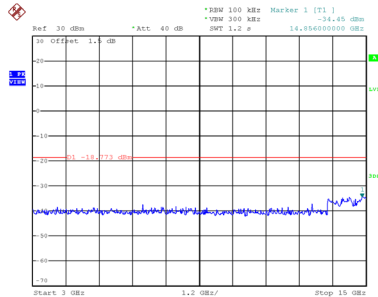


Date: 4.JUL.2020 15:57:44

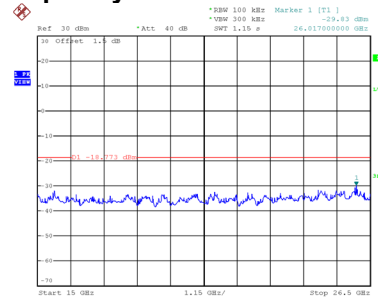


Date: 4.JUL.2020 15:58:16


### CH06 – 10th Harmonic of the fundamental frequency

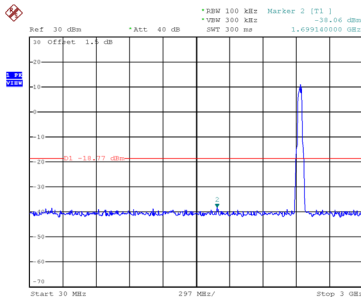

Date: 2.JUL.2020 11:19:20

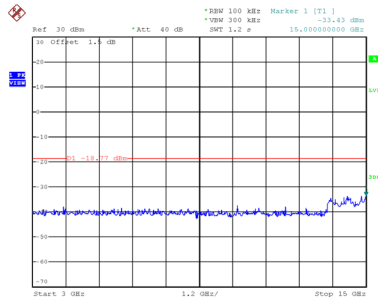


Date: 2.JUL.2020 11:19:27

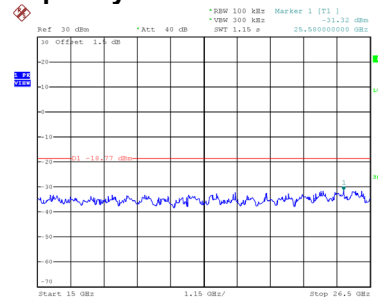


Date: 2.JUL.2020 11:19:34


### CH09 – 10th Harmonic of the fundamental frequency

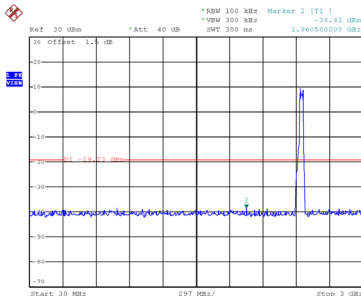

Date: 2.JUL.2020 11:20:16

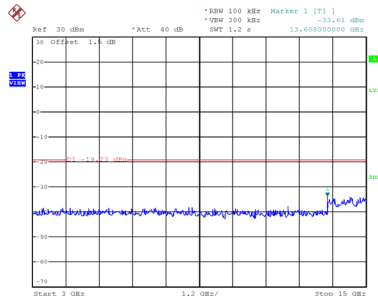

Date: 2.JUL.2020 11:20:23

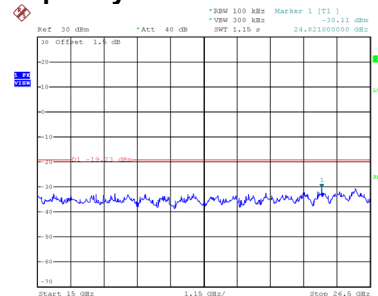




Date: 2.JUL.2020 11:20:30

## **APPENDIX H - POWER SPECTRAL DENSITY**




Test Mode	TX B Mode_SISO 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	3.46	8	Complies
06	2437	3.74	8	Complies
11	2462	2.61	8	Complies

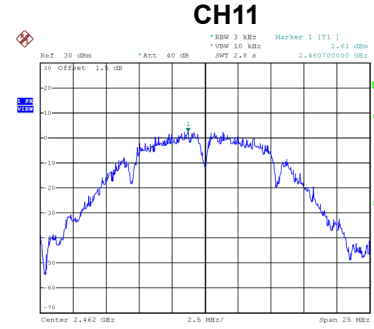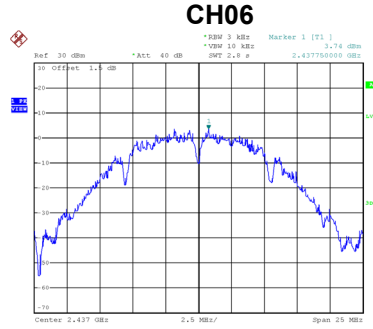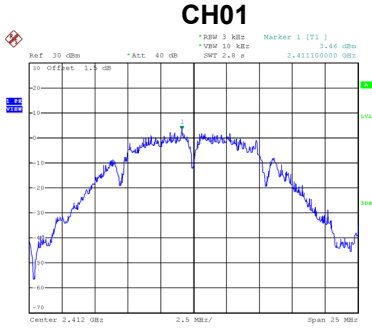


Test Mode	TX G Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-3.18	8	Complies
06	2437	-1.28	8	Complies
11	2462	-2.49	8	Complies

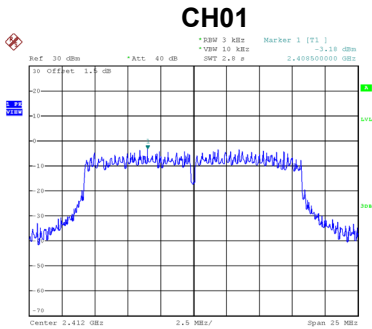

Date: 2.JUL.2020 11:30:27

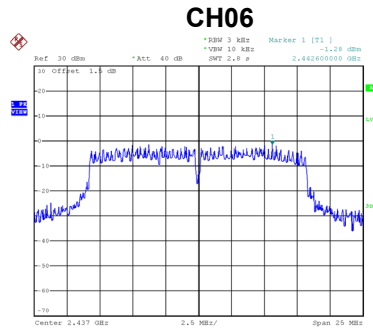


Date: 2.JUL.2020 11:30:47

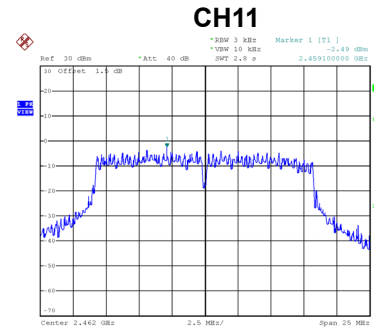


Date: 2.JUL.2020 11:31:00

Test Mode	TX G Mode_Ant. 2
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-3.65	8	Complies
06	2437	-2.59	8	Complies
11	2462	-4.10	8	Complies

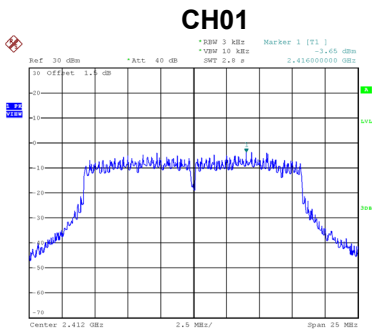

Date: 2.JUL.2020 13:38:46

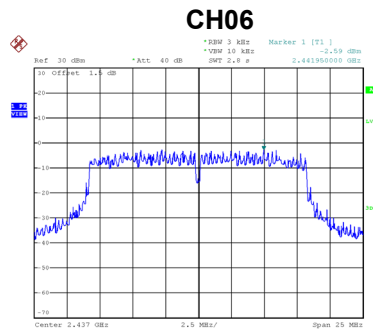

Date: 2.JUL.2020 13:39:19

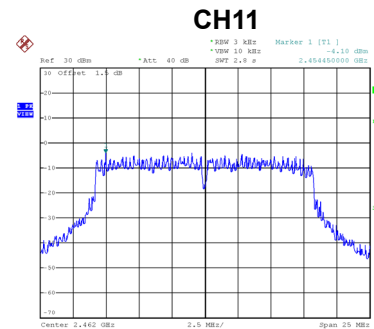

Date: 2.JUL.2020 13:39:34

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-0.40	8	Complies
06	2437	1.12	8	Complies
11	2462	-0.21	8	Complies