



RADIO TEST REPORT

FCC ID:2ATGH-100

Product Designation : HELM Sportsband HD Triple Driver
Trademark : HELM Audio
Model Name : HSB-100, HSB-100G, HSB-100B, HSB-100W
Applicant : Helm Audio LTD
Date of Issue : June. 22, 2020
Standard(s) : FCC Part 15.247
Report No : S20070300801001

Prepared for

Helm Audio LTD

35 Floor, Central Plaza, 18 Harbour Road, Wan Chai, Hong Kong

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

REPORT REVISE RECORD

Report No	Revise Time	Issued Date	Valid Version	Notes
S20070300801001	/	June 23, 2020	Invalid	Initial release

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	6
1.1. PRODUCT DESCRIPTION.....	6
1.2. TABLE OF CARRIER FREQUENCIES.....	6
1.3. RECEIVER INPUT BANDWIDTH.....	7
1.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE.....	7
1.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR.....	7
1.6. RELATED SUBMITTAL(S) / GRANT (S).....	8
1.7. TEST METHODOLOGY.....	8
1.8. SPECIAL ACCESSORIES.....	8
1.9. EQUIPMENT MODIFICATIONS.....	8
2. MEASUREMENT UNCERTAINTY.....	9
3. DESCRIPTION OF TEST MODES.....	10
4. SYSTEM TEST CONFIGURATION.....	11
4.1. CONFIGURATION OF EUT SYSTEM.....	11
4.2 EQUIPMENT USED IN TESTED SYSTEM.....	11
4.3. SUMMARY OF TEST RESULTS.....	11
5. TEST FACILITY.....	12
6. PEAK OUTPUT POWER.....	13
6.1. MEASUREMENT PROCEDURE.....	13
6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
6.3. LIMITS AND MEASUREMENT RESULT.....	14
7. 20DB BANDWIDTH.....	20
7.1. MEASUREMENT PROCEDURE.....	20
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
7.3. LIMITS AND MEASUREMENT RESULTS.....	20
8. CONDUCTED SPURIOUS EMISSION.....	27

8.1. MEASUREMENT PROCEDURE.....	27
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
8.3. MEASUREMENT EQUIPMENT USED.....	27
8.4. LIMITS AND MEASUREMENT RESULT.....	27
9. RADIATED EMISSION.....	37
9.1. MEASUREMENT PROCEDURE.....	37
9.2. TEST SETUP.....	39
9.3. LIMITS AND MEASUREMENT RESULT.....	40
9.4. TEST RESULT.....	40
10. NUMBER OF HOPPING FREQUENCY.....	50
10.1. MEASUREMENT PROCEDURE.....	50
10.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	50
10.3. MEASUREMENT EQUIPMENT USED.....	50
10.4. LIMITS AND MEASUREMENT RESULT.....	50
11. TIME OF OCCUPANCY (DWELL TIME).....	51
11.1. MEASUREMENT PROCEDURE.....	51
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	51
11.3. MEASUREMENT EQUIPMENT USED.....	51
11.4. LIMITS AND MEASUREMENT RESULT.....	51
12. FREQUENCY SEPARATION.....	55
12.1. MEASUREMENT PROCEDURE.....	55
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	55
12.3. MEASUREMENT EQUIPMENT USED.....	55
12.4. LIMITS AND MEASUREMENT RESULT.....	55
13. FCC LINE CONDUCTED EMISSION TEST.....	58
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST.....	58
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	58
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	59
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	59
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	60

APPENDIX A: PHOTOGRAPHS OF TEST SETUP.....	62
--	----

TEST RESULT CERTIFICATION

Applicant's name.....: Helm Audio LTD

Address.....: 35 Floor, Central Plaza, 18 Harbour Road, Wan Chai, Hong Kong

Manufacturer's Name.....: Helm Audio LTD

Address.....: 35 Floor, Central Plaza, 18 Harbour Road, Wan Chai, Hong Kong

Product description

Product name.....: HELM Sportsband HD Triple Driver

Trademark: HELM Audio

Model Name: HSB-100

Series Model.....: HSB-100G, HSB-100B, HSB-100W

Difference Description.....: The circuit principle and internal structure are the same, appearance color and the model name are different.

Rating(s).....: Input: DC 5V 1.0A by Micro USB; 3.7V by Battery

Standards.....: FCC PART 15.247

We hereby certify that:

The above equipment was tested by Shenzhen NTEK Testing Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Date of Test.....

Date (s) of performance of tests..... June. 13, 2020 to June.22, 2020

Date of Issue..... June.22, 2020

Test Result..... **Pass**

Testing Engineer : Allen Liu
(Allen Liu)

Technical Manager : Jason Chen
(Jason Chen)

Authorized Signatory : Sam. Chen

(Sam Chen)

1. GENERAL INFORMATION

1.1. PRODUCT DESCRIPTION

The EUT is designed as "Bluetooth Headset". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	5.403dBm(Max)
Bluetooth Version	V 5.0
Modulation	BR ☒ GFSK, EDR ☒ $\pi/4$ -DQPSK, ☒ 8DPSK BLE ☐ GFSK 1Mbps ☐ GFSK 2Mbps
Number of channels	79
Hardware Version	V1.0
Software Version	V4
Antenna Designation	Ceramic Antenna(Comply with requirements of the FCC part 15.203)
Antenna Gain	1.0dBi
Power Supply	Input: DC 5V 1.0A by Micro USB; 3.7V by Battery

1.2. TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2402~2480MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

1.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislotted packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

1.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06
01, 51, 03, 55, 05, 04

1.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day (23h30). In most cases it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With these input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmissions is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5us). The hopping sequence will always differ from the first one.

1.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ATGH-100** filing to comply with the FCC PART 15.247 requirements.

1.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.8. SPECIAL ACCESSORIES

Refer to section 5.2.

1.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, $U_c = \pm 3.2$ dB
- Uncertainty of Radiated Emission below 1GHz, $U_c = \pm 3.9$ dB
- Uncertainty of Radiated Emission above 1GHz, $U_c = \pm 4.8$ dB
- Uncertainty of total RF power, conducted, $U_c = \pm 0.8$ dB
- Uncertainty of spurious emissions, conducted, $U_c = \pm 2.7$ dB
- Uncertainty of Occupied Channel Bandwidth: $U_c = \pm 2$ %
- Uncertainty of Dwell Time: $U_c = \pm 2$ %
- Uncertainty of Frequency: $U_c = \pm 2$ %

3. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode $\pi/4$ -DQPSK
12	Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
4. The test software is the Blue Test3 which can set the EUT into the individual test modes.


4. SYSTEM TEST CONFIGURATION

4.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure :



Conducted Emission Configure :

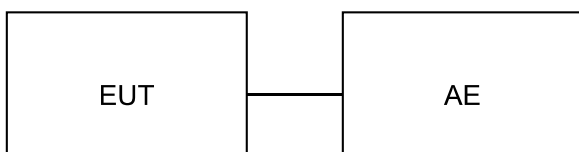

4.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	HELM Sportsband HD Triple Driver	HSB-100,HSB-100G,HSB-100B,HSB-100W	2ATGH-100	EUT
2	Adapter	DYS602-050200W	DC 5V/1A	AE
3	Charger line	/	0.7m	AE

4.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant

5. TEST FACILITY

Site Description	
CNAS-Lab.	The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L5516.
IC-Registration	The Certificate Registration Number is 9270A-1.
FCC- Accredited	Test Firm Registration Number: 463705. Designation Number: CN1184
A2LA-Lab.	The Certificate Registration Number is 4298.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
Name of Firm	Shenzhen NTEK Testing Technology Co., Ltd.
Site Location	1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 10, 2020	Jun. 09, 2021
LISN	R&S	ESH2-Z5	101313	Apr. 18, 2020	Apr. 17, 2021

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 10, 2020	Jun. 09, 2021
EXA Signal Analyzer	Aglient	N9020A	MY49100060	May. 11, 2020	May. 10, 2021
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Feb. 27, 2020	Feb. 26, 2021
Attenuator	ZHINAN	E-002	N/A	Aug. 26, 2019	Aug. 25, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2017	Sep. 20, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2020	Jun. 13, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2020	May. 25, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 25, 2019	Oct. 24, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2020	Sep. 27, 2022
Spectrum analyzer	R&S	FSU	HKE-048	Dec. 20, 2019	Dec. 19, 2020

6. PEAK OUTPUT POWER

6.1. MEASUREMENT PROCEDURE


For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
3. RBW > 20 dB bandwidth of the emission being measured.
4. VBW $\geq$ RBW.
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

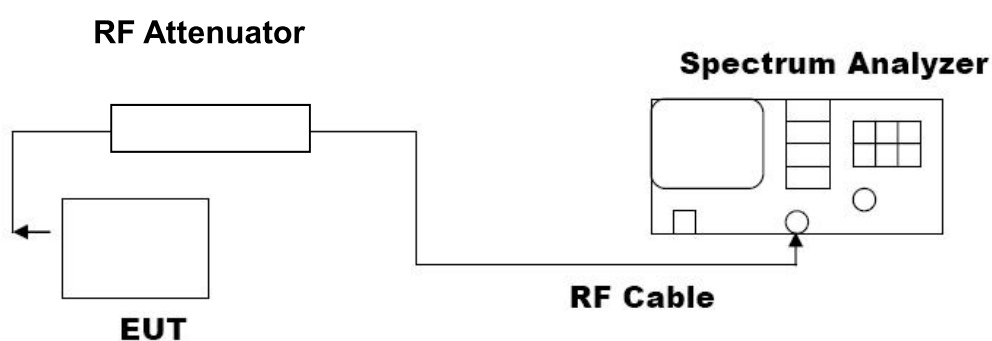

6.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	3.392	30	Pass
2.441	5.403	30	Pass
2.480	5.385	30	Pass

CH0



Keysight Spectrum Analyzer - Swept SA

L RF 50 Ω AC SENSE:INT ALIGN: AUTO

Marker 1 2.440870000000 GHz PNO: Fast IFGain:Low Trig: Free Run Avg Type: Log-Pwr Avg/Hold: >100/100

TRACE 1 2 3 4 5 TYPE M P N N N N N DET P N N N N N

10 dB/div Log Ref 20.00 dBm

Mkr1 2.440 870 GHz 5.403 dBm

Center 2.441000 GHz Span 5.000 MHz
#Res BW 1.5 MHz #VBW 5.0 MHz Sweep 1.000 ms (1001 pts)

MSG STATUS

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF

Mkr→Ref Lvl

More

1 of 2

Keysight Spectrum Analyzer - Swept SA

L RF 50 Ω AC SENSE:INT ALIGN: AUTO

Marker 1 2.479840000000 GHz PNO: Fast IFGain:Low Trig: Free Run Avg Type: Log-Pwr Avg/Hold: >100/100

TRACE 1 2 3 4 5 TYPE M P N N N N N DET

10 dB/div Ref 20.00 dBm

Log

Mkr1 2.479 840 GHz 5.385 dBm

1

Center 2.480000 GHz Span 5.000 MHz
#Res BW 1.5 MHz Sweep 1.000 ms (1001 pts)
#VBW 5.0 MHz

MSG STATUS

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr → CR

Mkr → Ref Lvl

More

1 of 2

The image shows a Keysight Spectrum Analyzer interface. The main display area shows a spectrum plot with a yellow trace. A peak is marked with a green diamond and labeled '1'. The peak's frequency is 2.479840000000 GHz and its power is 5.385 dBm. The plot has a vertical scale of 10 dB/div and a reference level of 20.00 dBm. The horizontal scale is 5.000 MHz. The center frequency is 2.480000 GHz, the resolution bandwidth (Res BW) is 1.5 MHz, and the video bandwidth (VBW) is 5.0 MHz. The sweep time is 1.000 ms with 1001 points. On the right side, there is a 'Peak Search' menu with options like 'Next Peak', 'Next Pk Right', 'Next Pk Left', 'Marker Delta', 'Mkr → CR', 'Mkr → Ref Lvl', and 'More'. The bottom status bar shows 'MSG' and 'STATUS'.

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Π /4-DQPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	1.120	30	Pass
2.441	3.466	30	Pass
2.480	3.352	30	Pass

CH0






PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	1.416	30	Pass
2.441	3.839	30	Pass
2.480	3.715	30	Pass

CH0



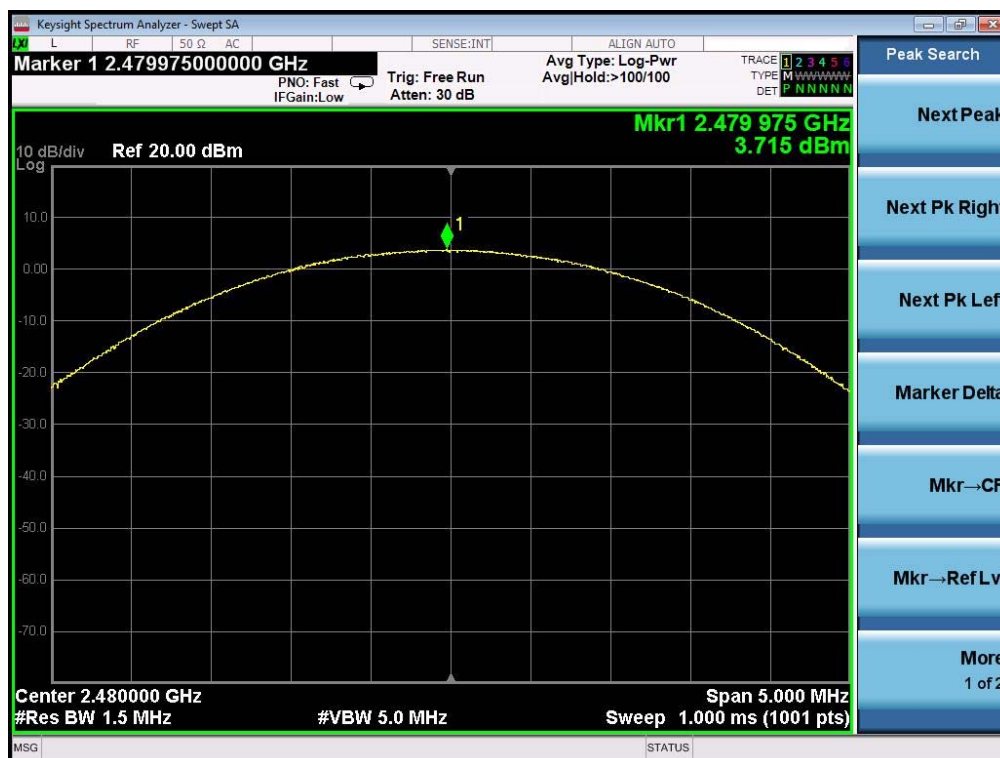


7. 20DB BANDWIDTH

7.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

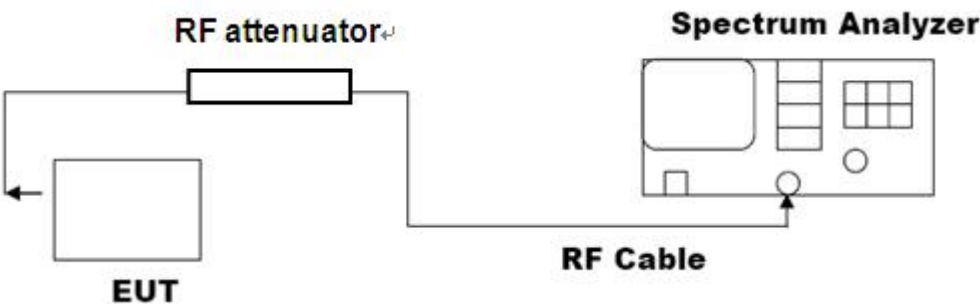


7.3. LIMITS AND MEASUREMENT RESULTS

MEASUREMENT RESULT FOR GFSK MOUDULATION			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.9509	PASS
	Middle Channel	0.9437	PASS
	High Channel	0.9437	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

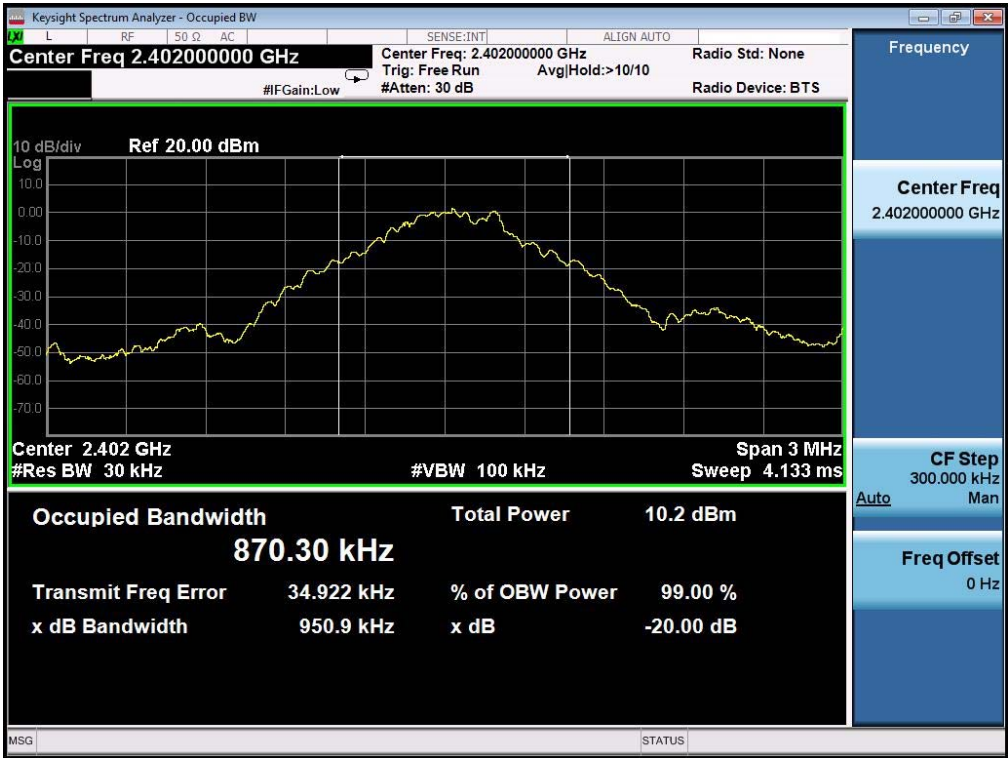

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

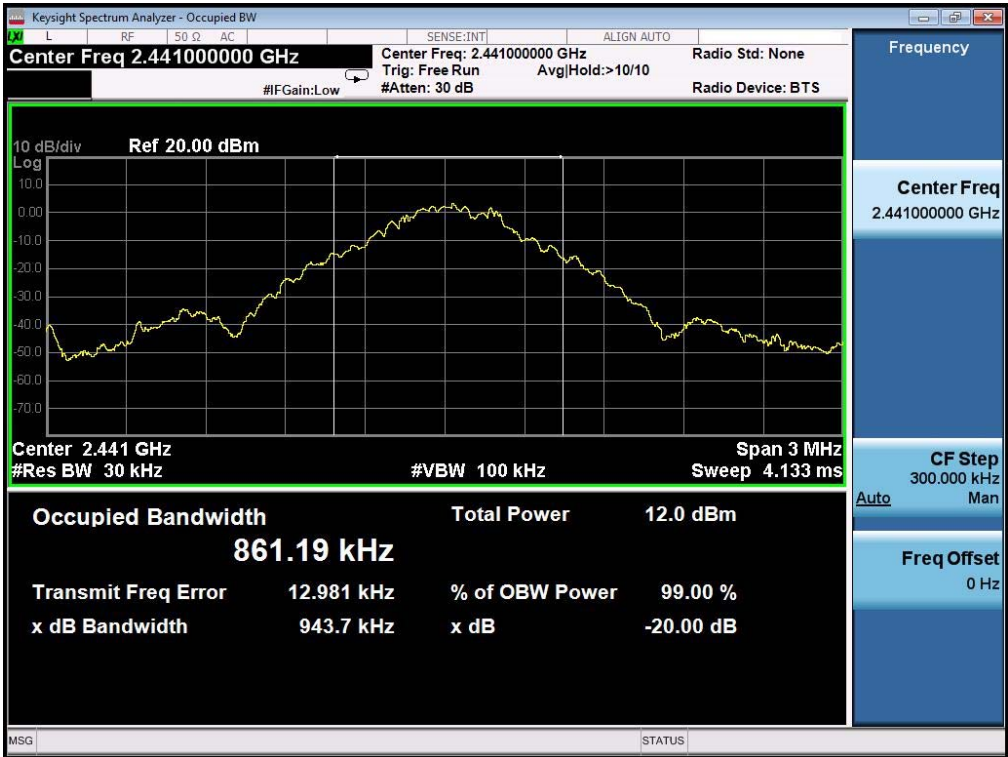


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

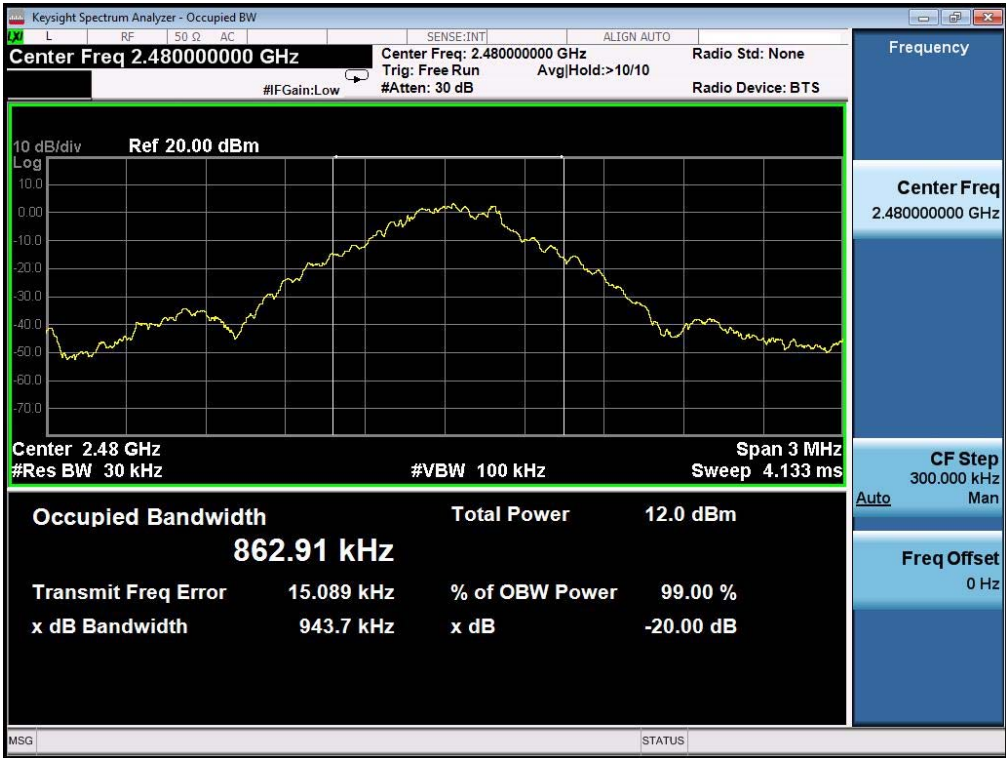


MEASUREMENT RESULT FORΠ /4-DQPSK MODULATION			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.256	PASS
	Middle Channel	1.228	PASS
	High Channel	1.228	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

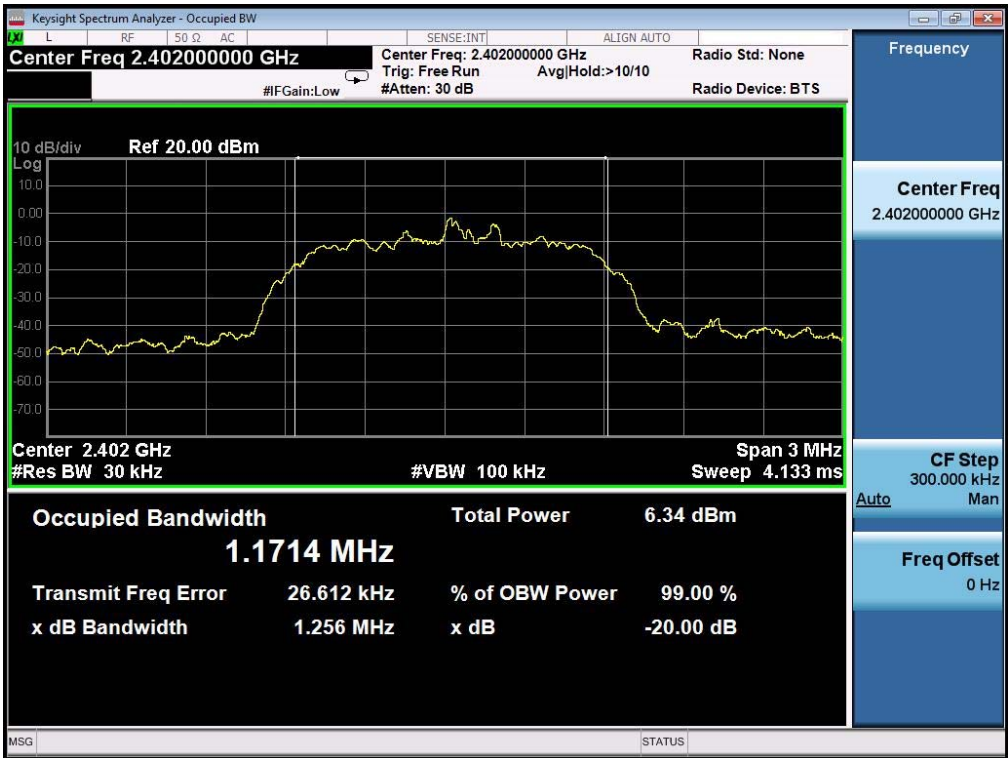

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

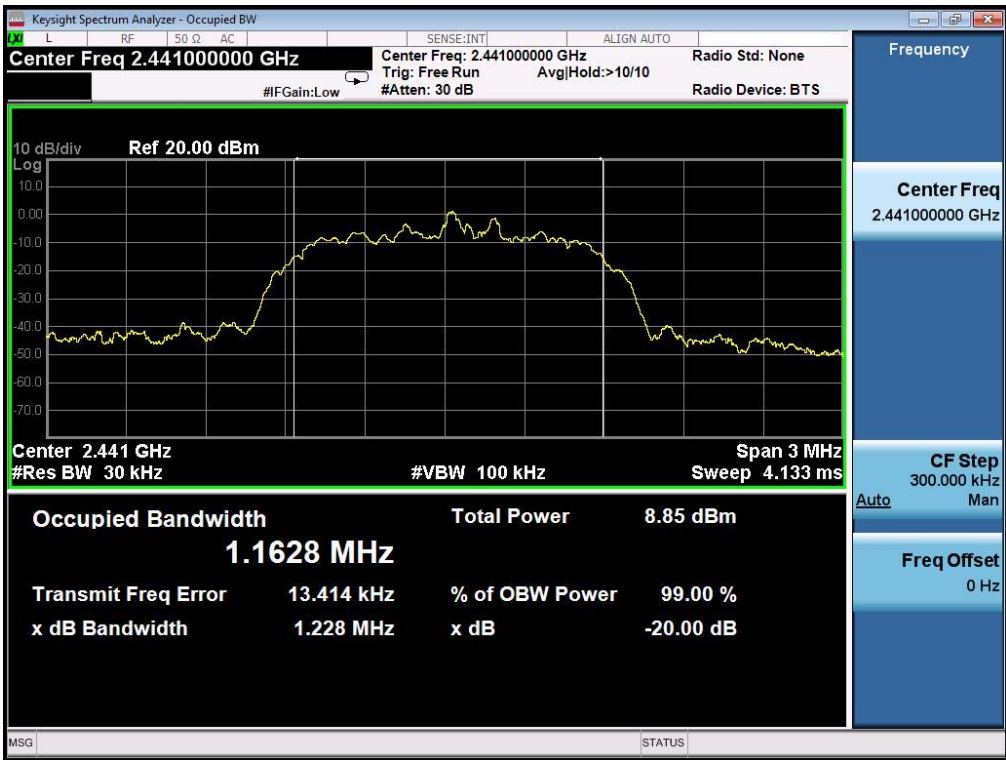


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

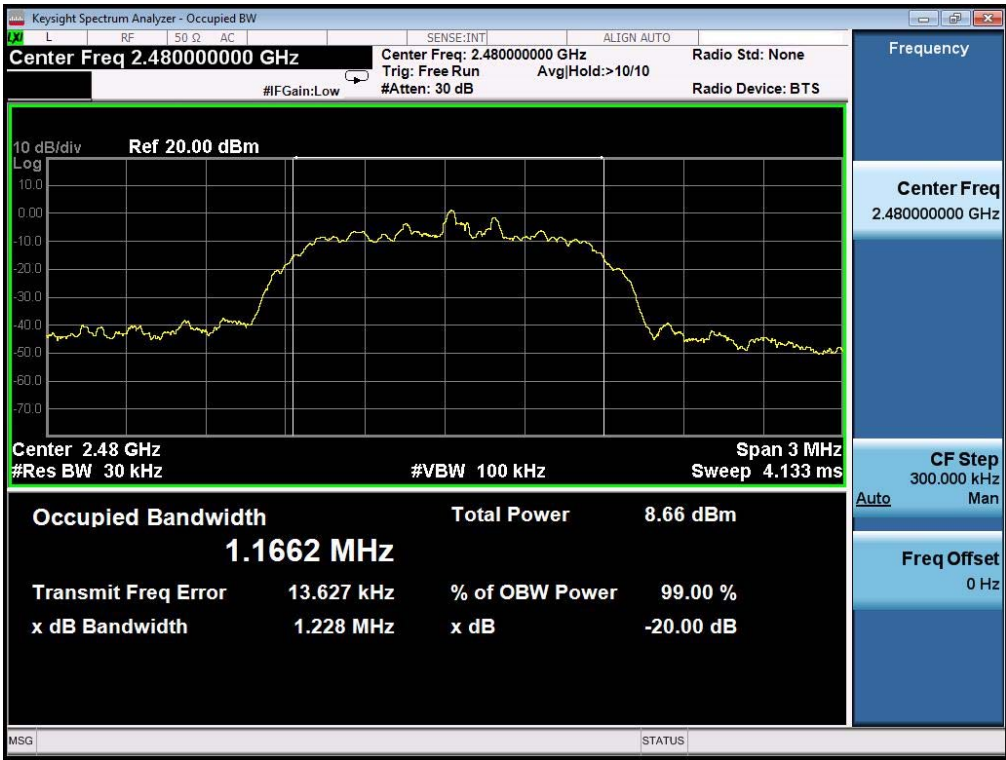


MEASUREMENT RESULT FOR 8-DPSK MODULATION			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.270	PASS
	Middle Channel	1.255	PASS
	High Channel	1.257	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

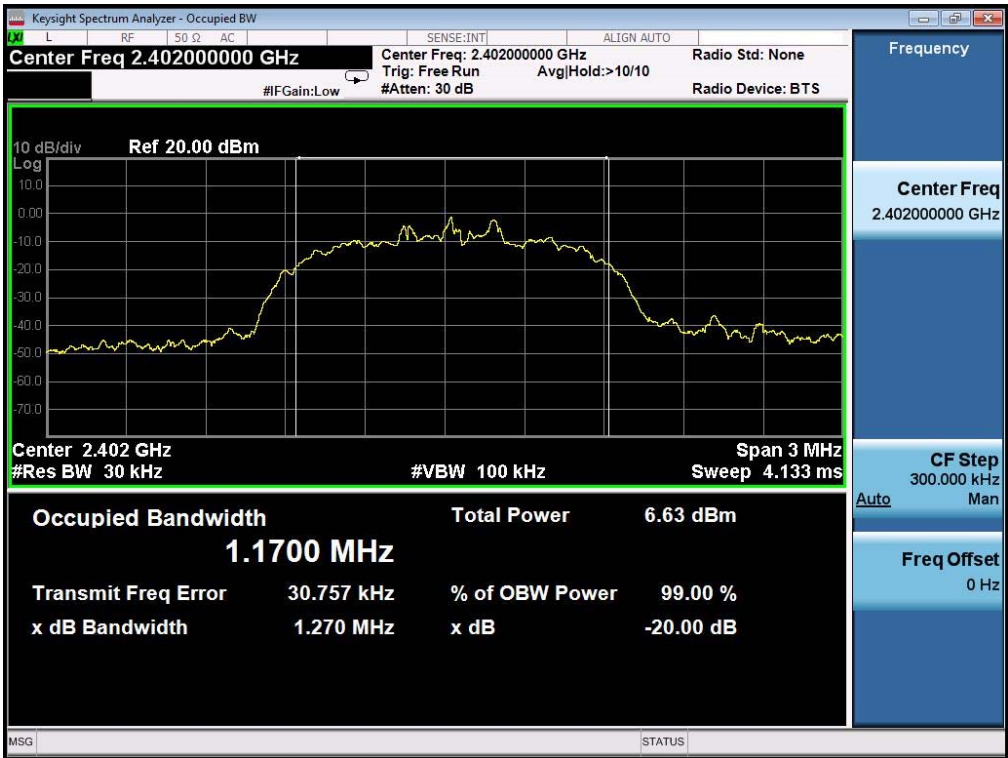

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

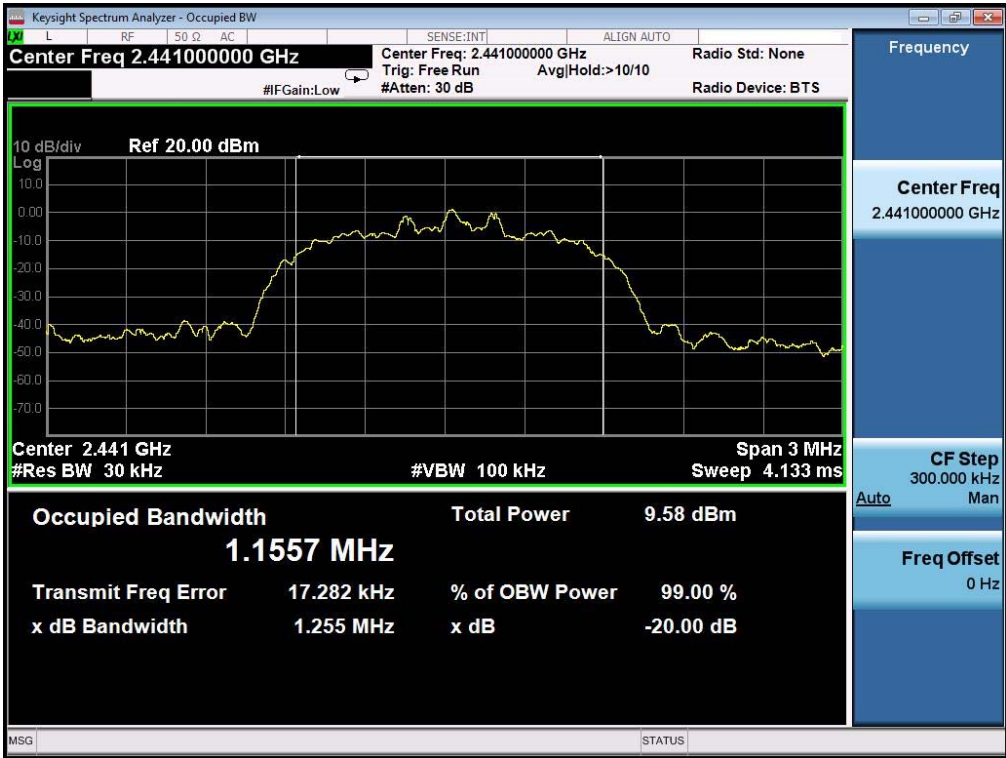

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

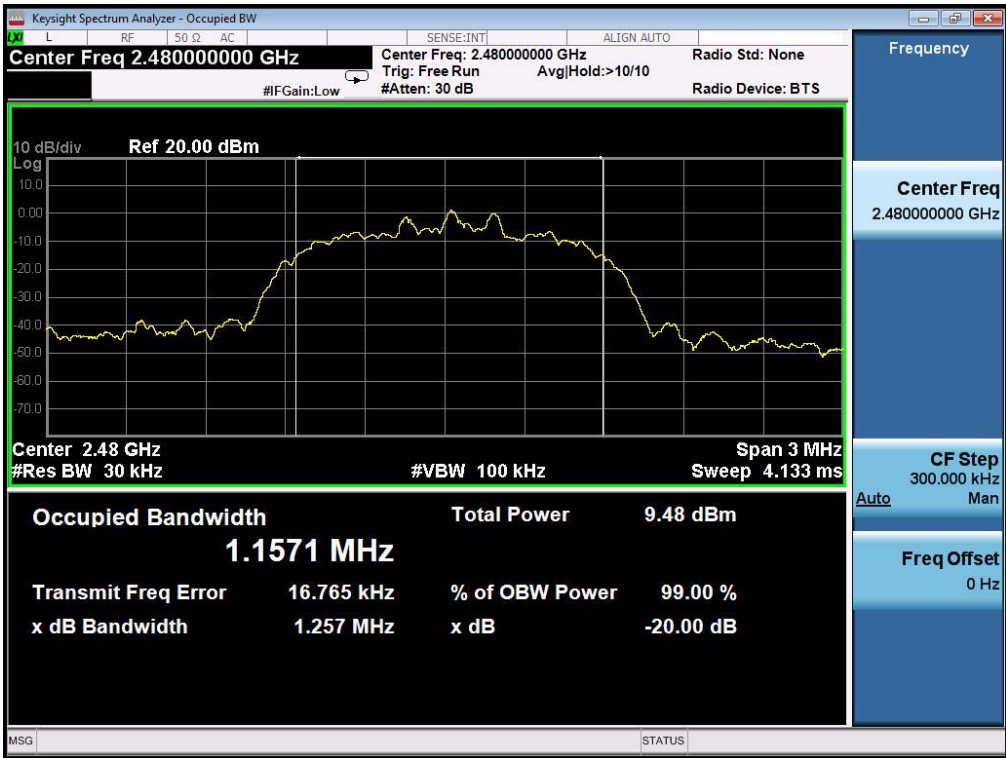

8. CONDUCTED SPURIOUS EMISSION

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2


8.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


8.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS

TEST RESULT FOR ENTIRE FREQUENCY RANGE
TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE
OF GFSK MODULATION IN LOW CHANNEL

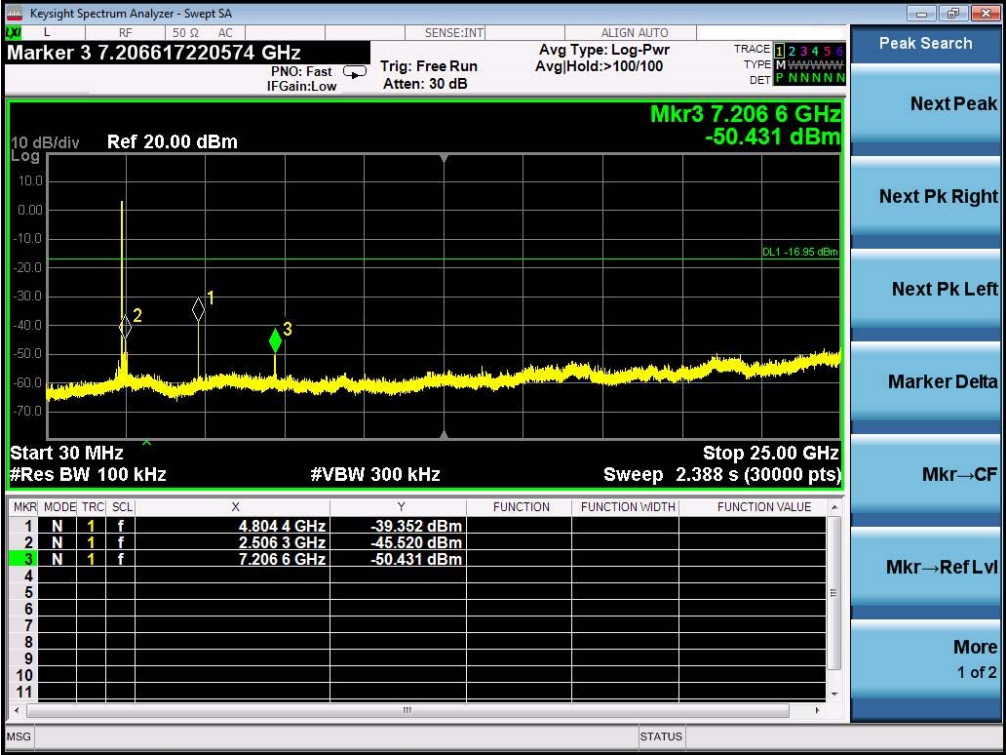

TEST PLOT OF OUT OF BAND EMISSIONS
OF GFSK MODULATION IN MIDDLE CHANNEL

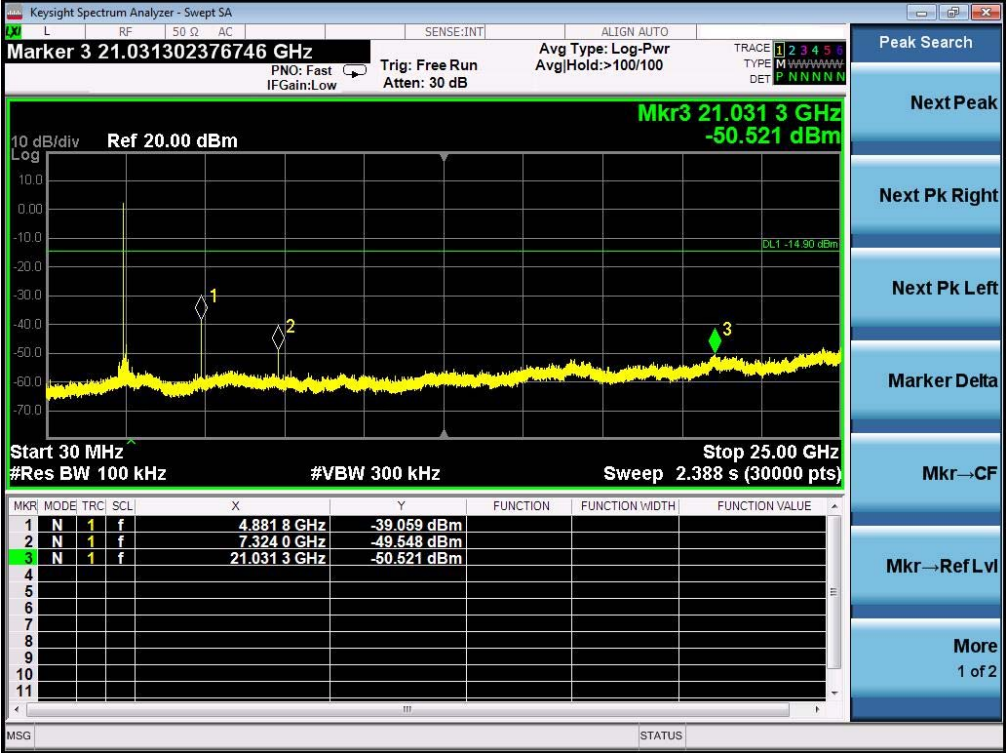


TEST PLOT OF OUT OF BAND EMISSIONS
OF GFSK MODULATION IN HIGH CHANNEL




Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit. The GFSK modulation is the worst case and only those data recorded in the report.

TEST RESULT FOR BAND EDGE
GFSK MODULATION IN LOW CHANNEL
Hopping off

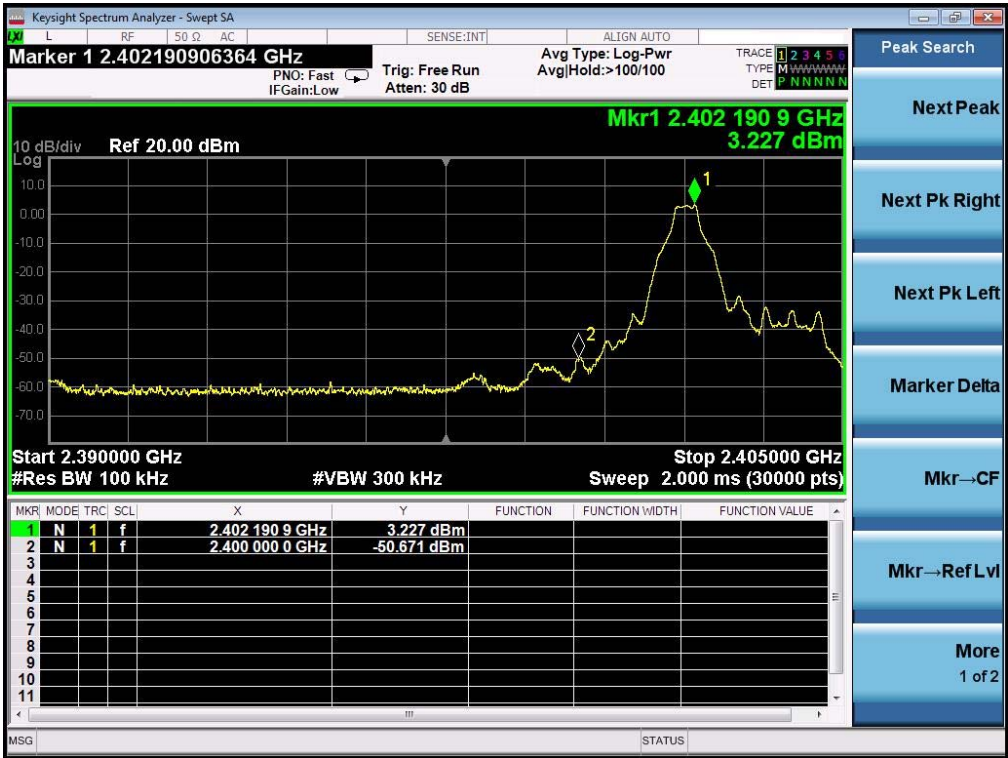


Hopping on

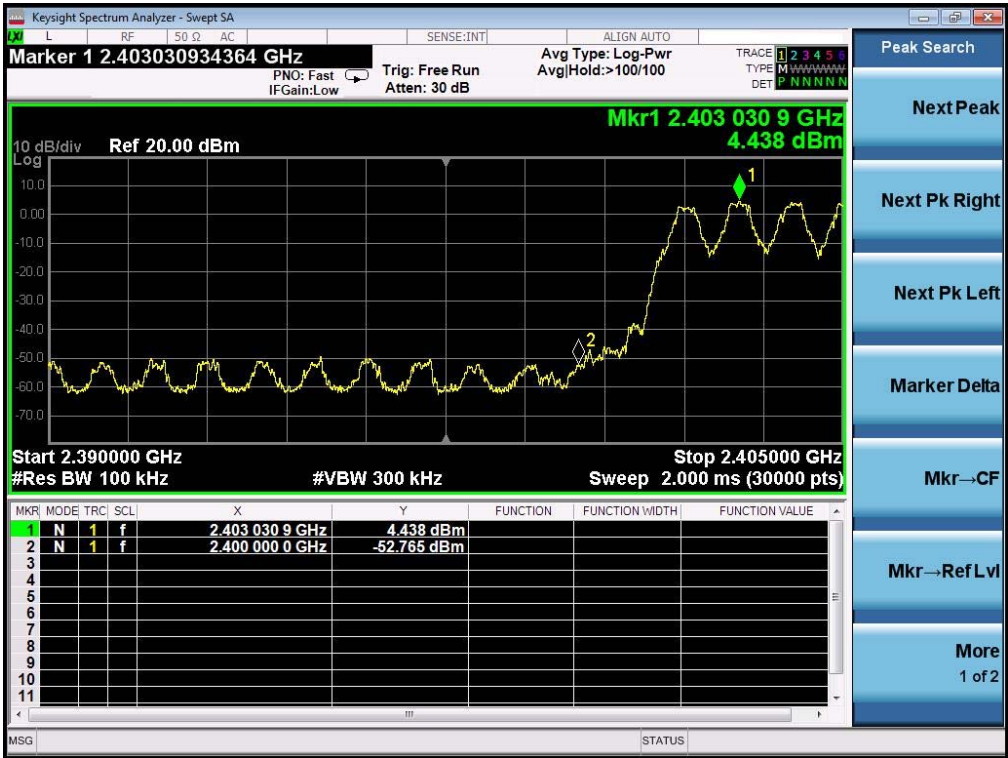


GFSK MODULATION IN HIGH CHANNEL
Hopping off




Hopping on

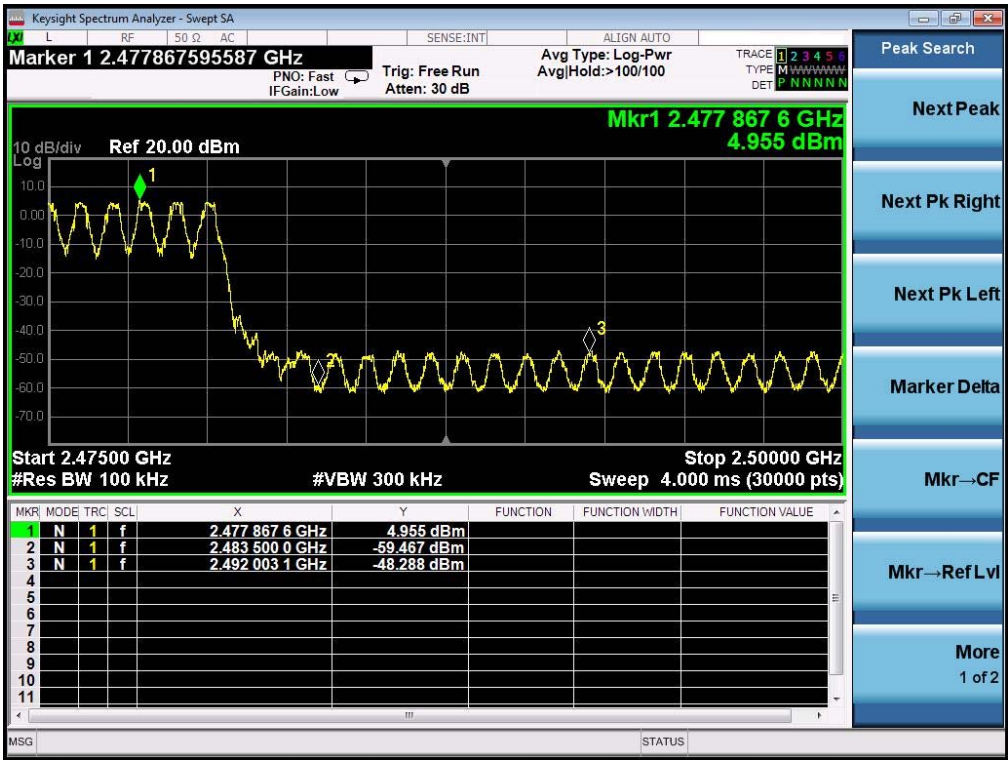


π /4-DQPSK MODULATION IN LOW CHANNEL
Hopping off

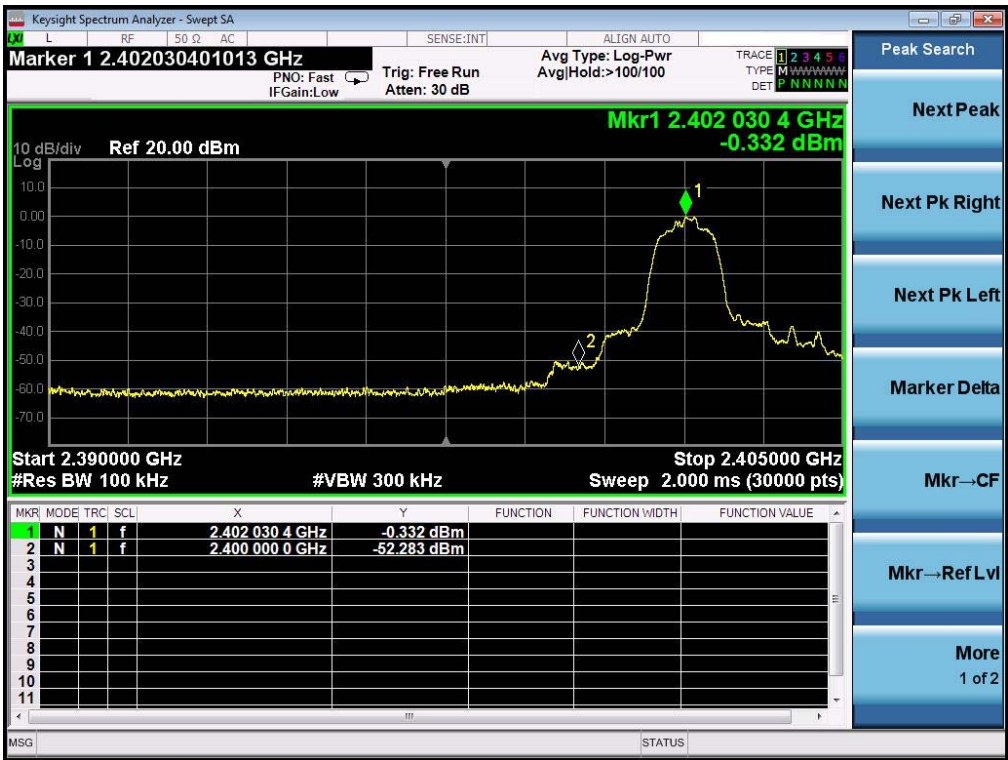

Hopping on

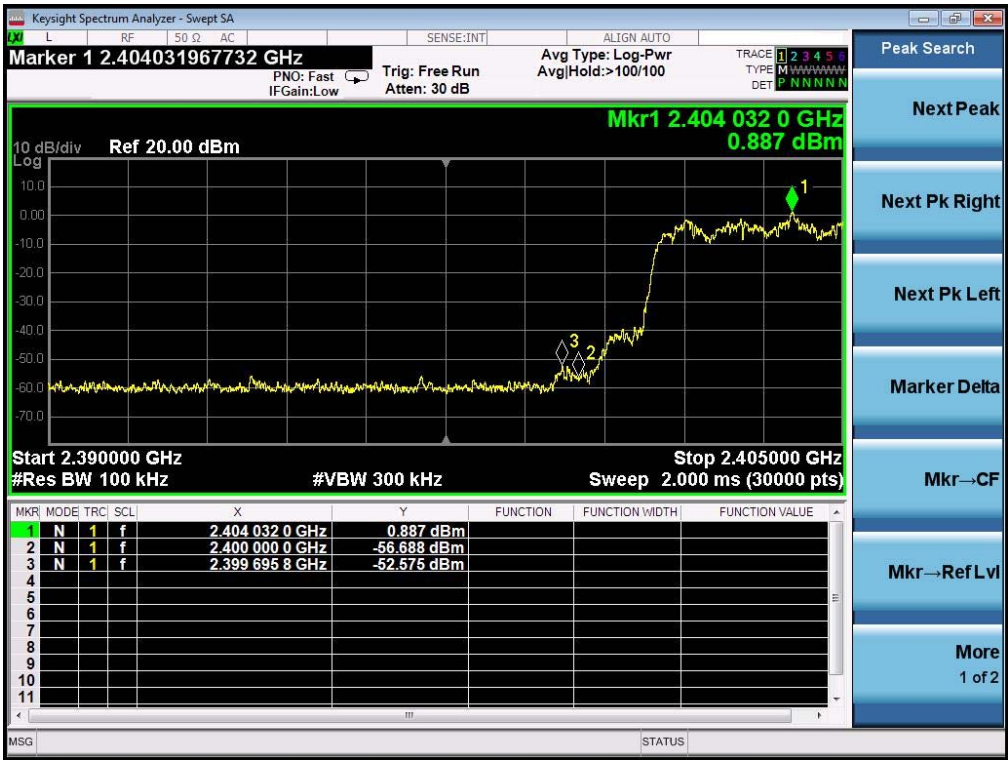

π /4-DQPSK MODULATION IN HIGH CHANNEL
Hopping off

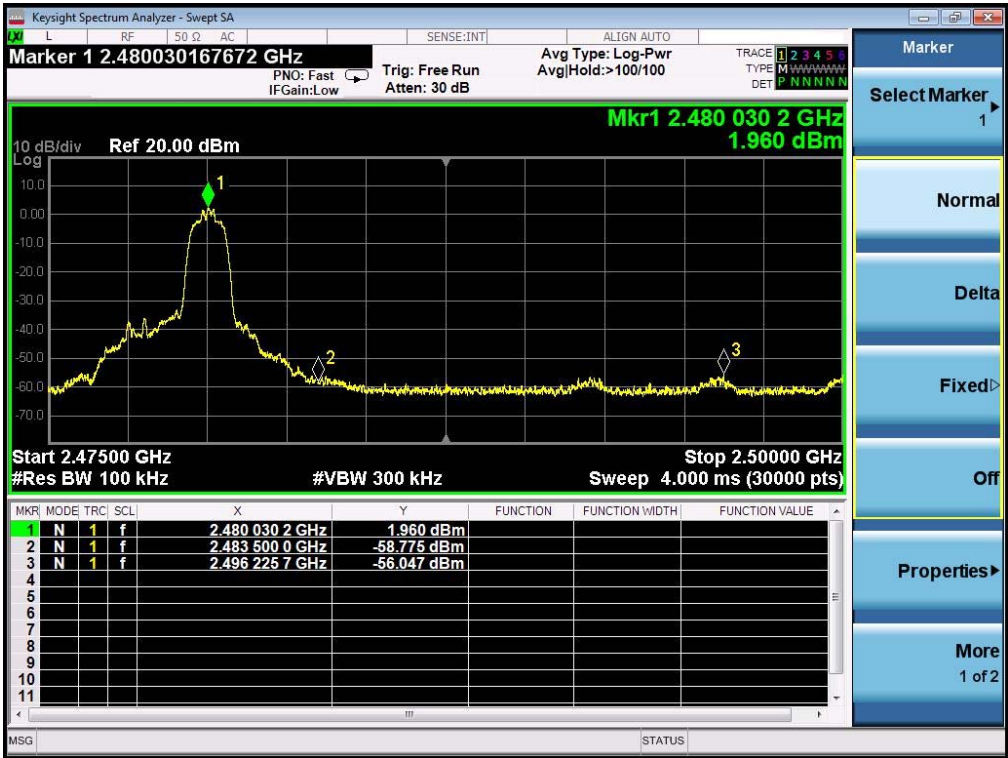

Hopping on

