

Operation Manual

TWS-K2


Wireless Headsets

O P E R A T I O N S G U I D E

Inside the box

1. Bluetooth Headset	× 2PCS
2. Charging Case	× 1PCS
3. Micro USB Cable	× 1PCS
4. Operations Guide	× 1PCS

Functional Diagram

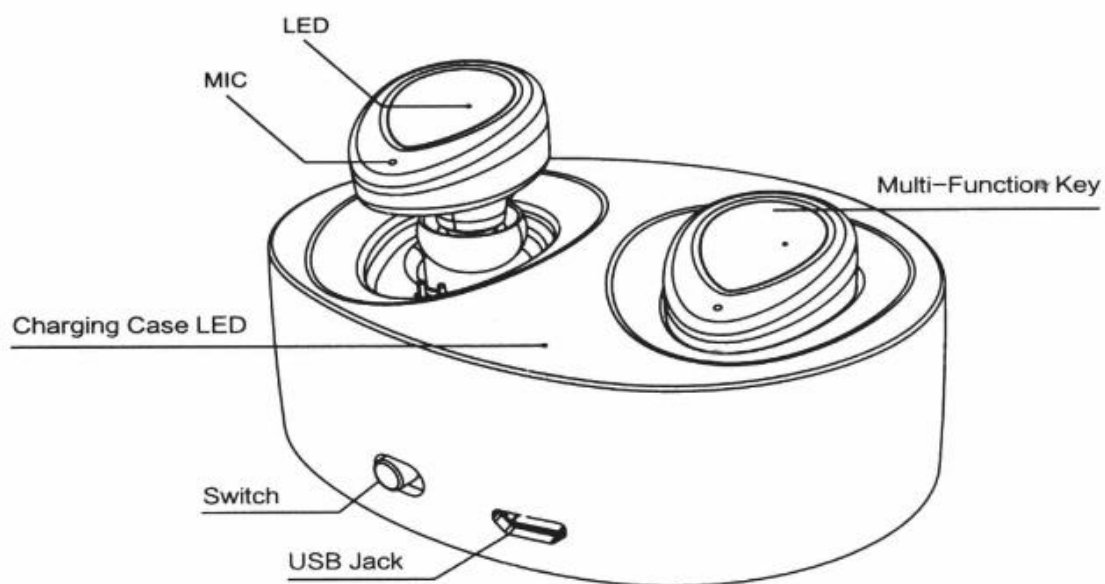

Specification

1. Version: BT 5.0
2. Supports: HSP/HFP/A2DP/AVRCP
3. Charging Interface: Point-contact
4. Size: 28*20*28mm
5. Standby Time: About 100hrs
6. Call Time: About 2hrs
7. Play Time: About 2hrs
8. Net Weight: 4.0g*2
9. Charging Case Size: 80*60*30mm
10. Charging Case Weight: 45g

How to Use

◆Charging

1. Place the earphone on the slots of the charging case correctly, slide the switch to the left to turn it on. The LED indicators will be red when charging and extinguished when fully charged.
2. Charging the case should be at least 2hrs. Plug the charging cable to a charger with USB ports or a USB output of a PC. Slide the switch to left to start charging the case.
3. Turn off the charging case if won't be used for a long period of time.

◆To Switch the Headset On/Off

1. To turn on: Press and hold the Multi-function key for 4 seconds until the LED indicator turns red.
2. To turn off: Press and hold the Multi-function key

for 3 seconds until the LED indicator turns red.

◆ True Wireless Mode Pairing

1. Press and hold the Multi-function keys for 7 seconds of the two headsets simultaneously, then they will be paired and connected automatically
2. The headsets will be specified as Left channel and Right channel relatively, then the left headset will enter pairing mode again, enable your phone's Bluetooth and search, click the model "TWS-K2" to pairing and connect.

◆ To Pair the Headset Single with Your Phone

- a. Press and hold the Multi-function key for 7 seconds, release when the red light and blue light flash alternatively, the Bluetooth headset enters pairing state;
- b. Open the Bluetooth of your mobile phone and search, click the model "TWS-K2" to pairing
- c. If asked to enter the password, enter 0000.

◆ To Answer A Call

Press the Multi-function key of the host headset only.

◆ To End A Call

Press the Multi-function key of the host headset only after the call.

◆ To Reject A Call

Press the Multi-function key of the host headset and hold for about 1 second while there is an incoming call on your phone.

◆ **To Activate Voice Dialing**

As long as your phone supports voice dialing, double click the left Multi-function key.

◆ **To Play or Pause**

Click the Multi-function Key of host headset to control pause and play the music.

◆ **To Play Next Song**

Click the Multi-function Key of vice headset to play the next song.

◆ **To Switch Language**

Press three times to change the languages of the voice prompt to under matching status.

Safety Precautions

Please read, follow and keep these instructions

1. Keep the device out of extreme heat and humidity
2. Battery life may differ on usage.
3. Observe all the warnings on the product and in the instructions.
4. Avoid using the device for long a period of time.
5. Stop using the device immediately if it causes discomfort or pain.



Reminder: Fully charge the battery on first time use is highly recommended.



Operation Instructions & Statements

KEY	ACT	FUNCTION OF EVENT						
		PAIRING	AVAILABLE FOR CONNECTIONS	CONNECTED	INCOMING CALL	DIALING	CALLING	CALL WAITING
Multi-Function Key	Short Press	Connect	Connect	Play / Pause	Answer	Cancel	Hang-up	Hang up and answer incoming call
	Double-Press		Pairing	Voice dialing				
	Press & hold for 1second			Redialing	Refuse			Hold on and answer incoming call

STATUS	RED LED		BLUE LED		COMMENTS
	ON	OFF	ON	OFF	
Charging	ON	OFF			
Charge complete	OFF	ON			
Power on	Remains 1second				
Power off	Remains 1second				
True Wireless Pairing	Red & Blue LED flash alternately				Default time remains 64seconds
Left channel			Flash once every 5 seconds		
Right channel			Flash once every 5 seconds		
Pairing	Red & Blue LED flash alternately				Default time remains 5minutes
Standby with no connection	Flash once every 5 seconds				Default time remains 10minutes
Standby connected			Flash once every 5 seconds		
Low Battery	3times flash once every 20 seconds				The battery is low
Incoming call / Dialing			Flash once every 5 seconds		
Phone is online			Flash once every 5 seconds		

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. To maintain compliance with FCC's

RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

FCC ID:2ATQ9-K2