


Appendix-L


HT240805005--T8--EDR--FCC FCC_BT (Part15.247) Test Data

1. -20dB Bandwidth


Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH5	2402.00	0.959	No
NVNT	ANT1	1-DH5	2441.00	0.957	No
NVNT	ANT1	1-DH5	2480.00	0.960	No
NVNT	ANT1	2-DH5	2402.00	1.284	Yes
NVNT	ANT1	2-DH5	2441.00	1.286	Yes
NVNT	ANT1	2-DH5	2480.00	1.285	Yes

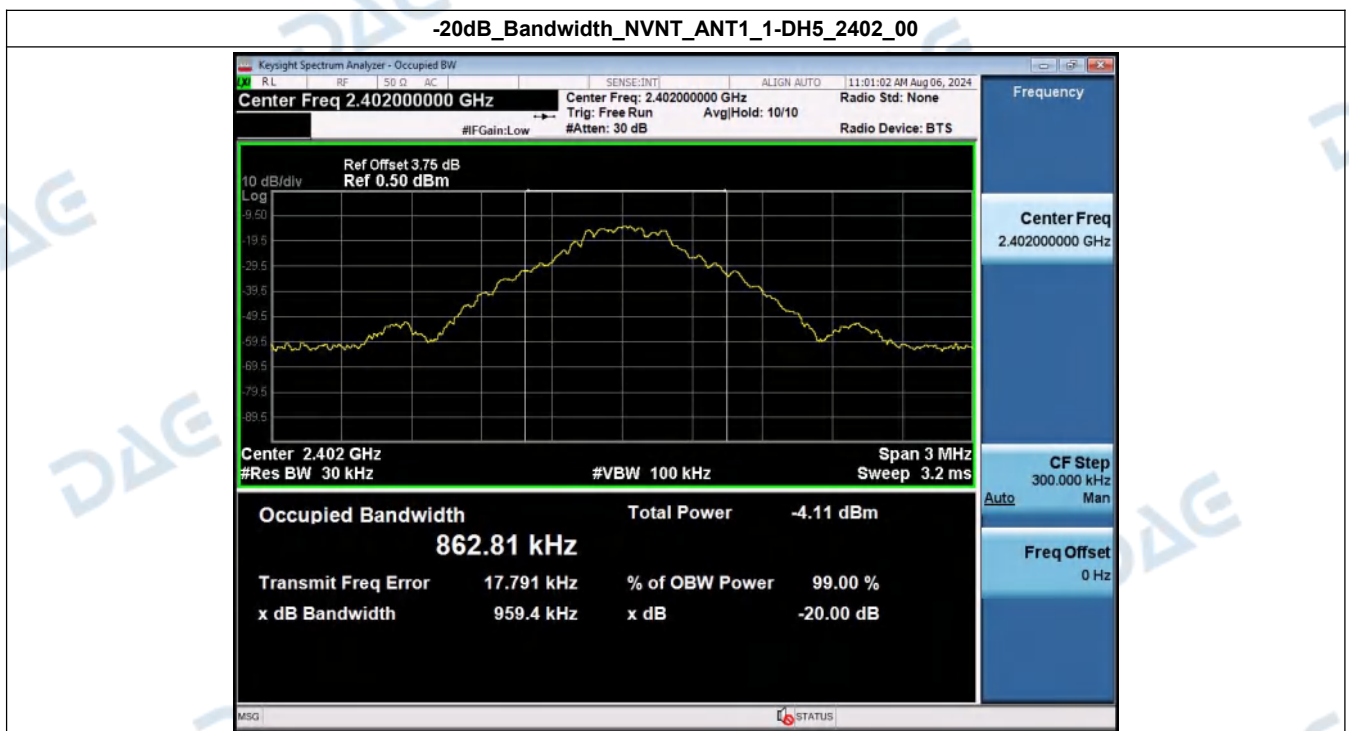


-20dB_Bandwidth_NVNT_ANT1_1-DH5_2441_00

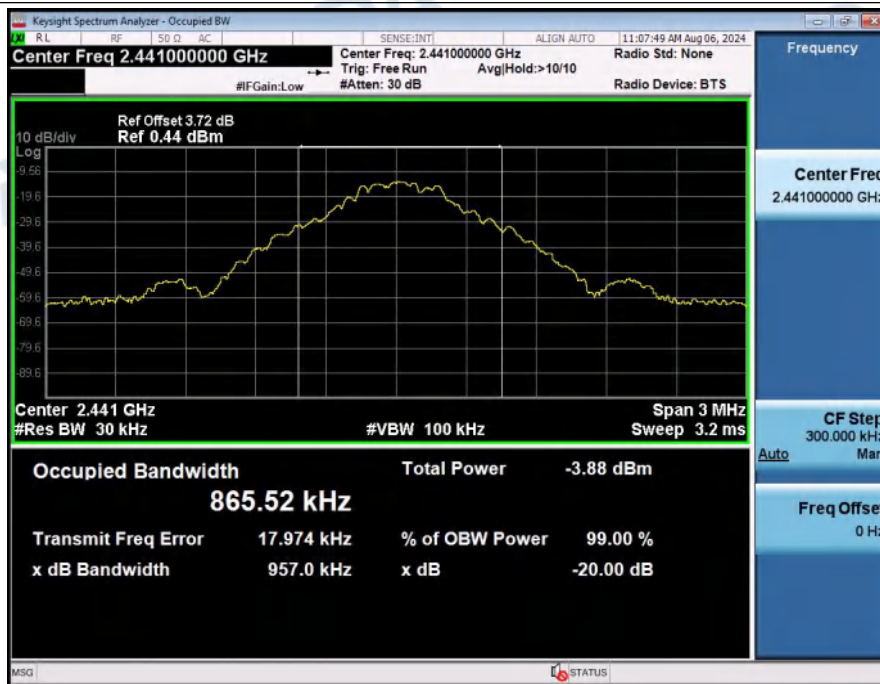


-20dB_Bandwidth_NVNT_ANT1_1-DH5_2480_00

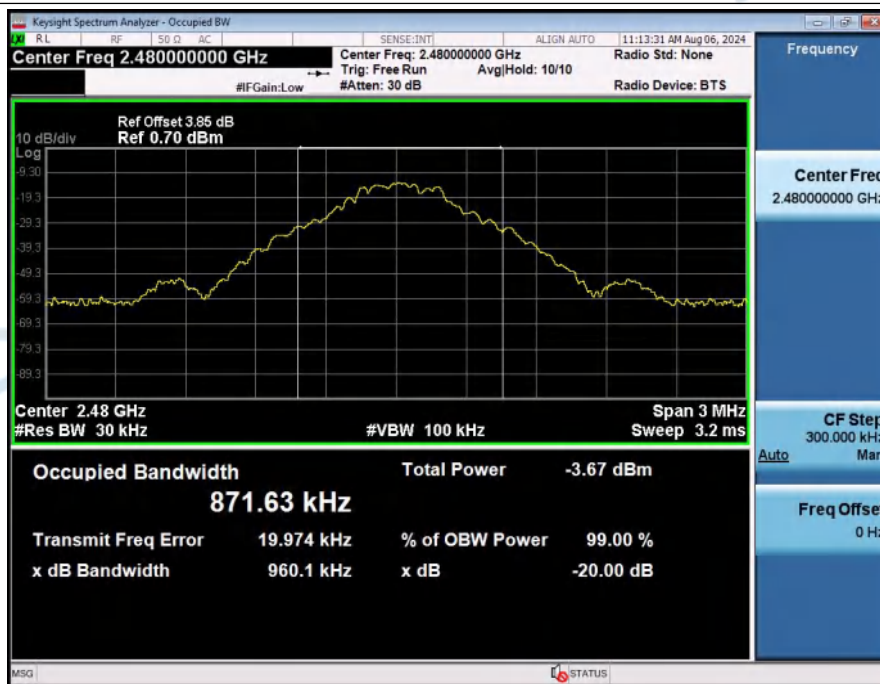


-20dB_Bandwidth_NVNT_ANT1_2-DH5_2402_00

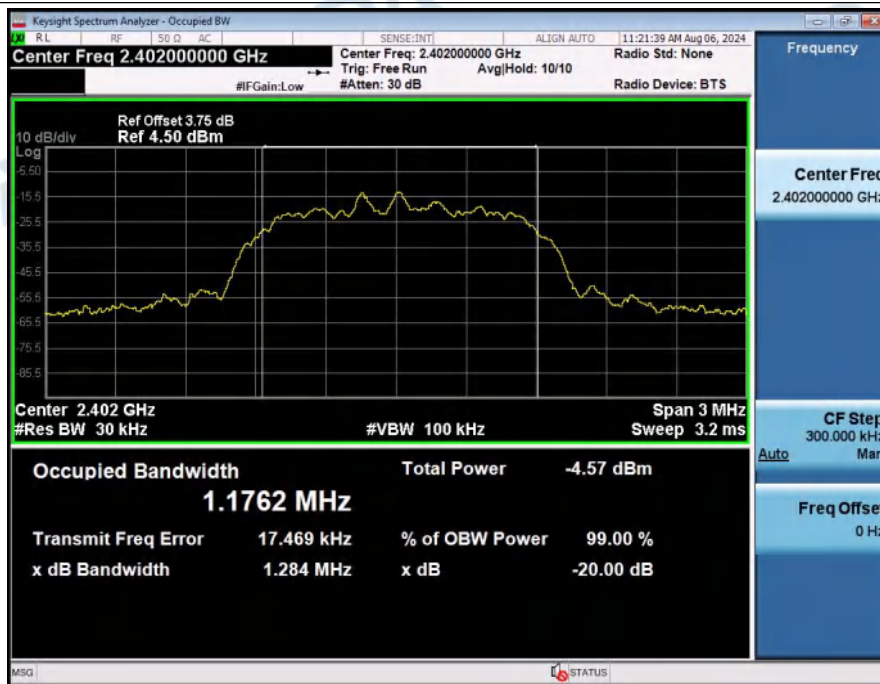

-20dB_Bandwidth_NVNT_ANT1_2-DH5_2441_00

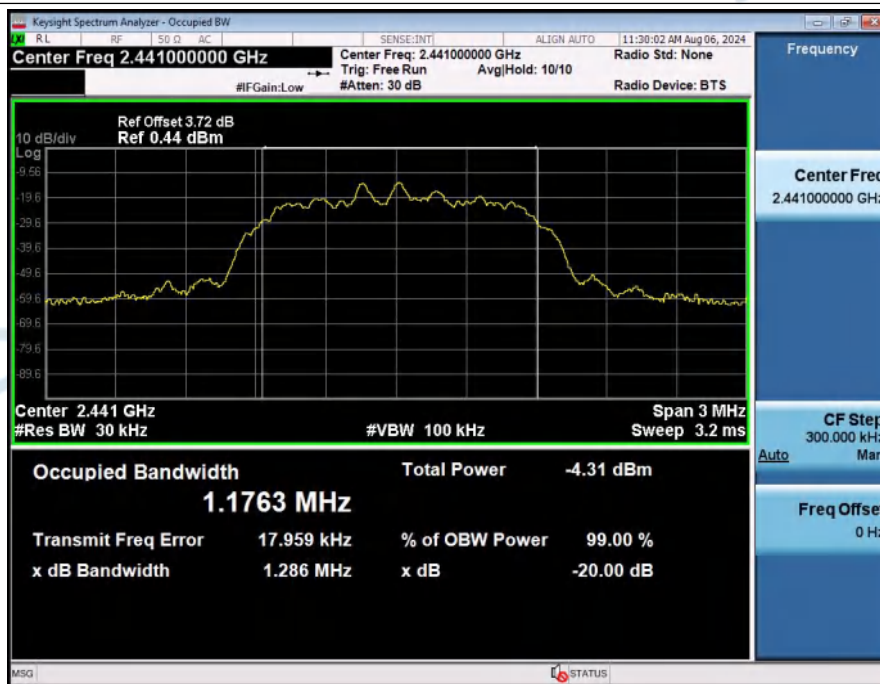

-20dB_Bandwidth_NVNT_ANT1_2-DH5_2480_00

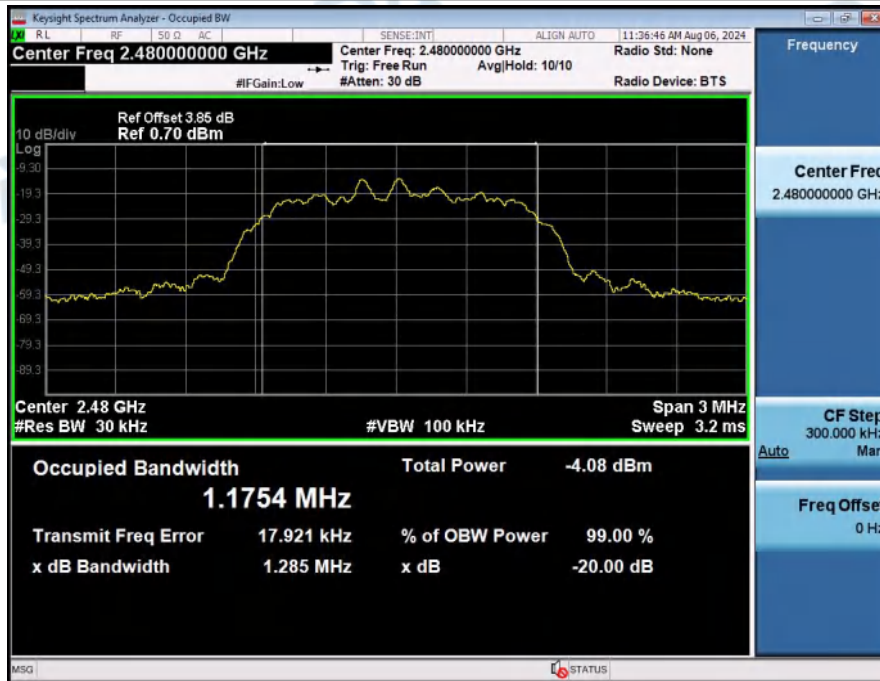


2. 99% Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	1-DH5	2402.00	0.863
NVNT	ANT1	1-DH5	2441.00	0.866
NVNT	ANT1	1-DH5	2480.00	0.870
NVNT	ANT1	2-DH5	2402.00	1.176
NVNT	ANT1	2-DH5	2441.00	1.176
NVNT	ANT1	2-DH5	2480.00	1.177


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2402_00




99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2441_00

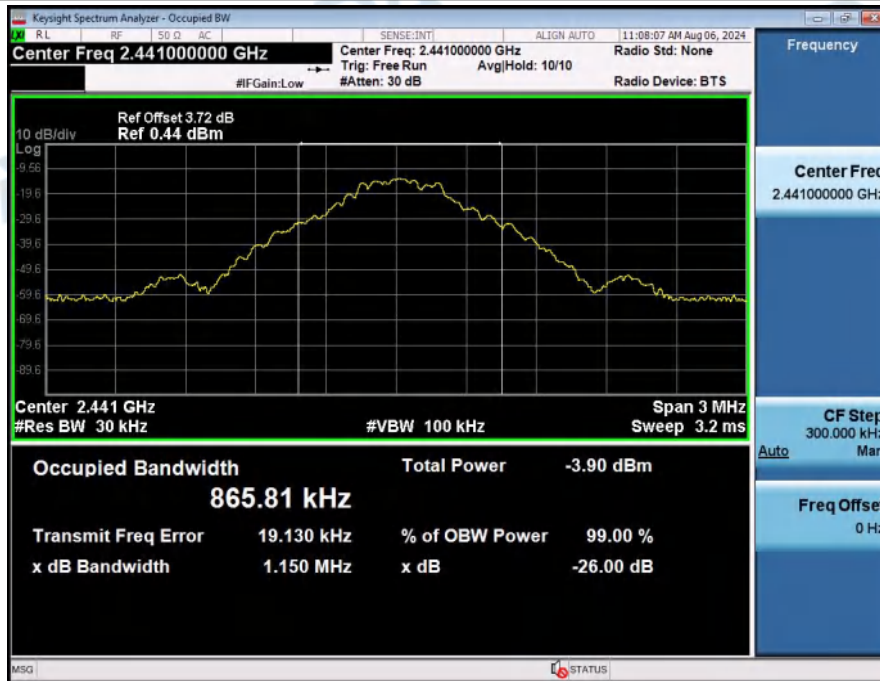


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2480_00

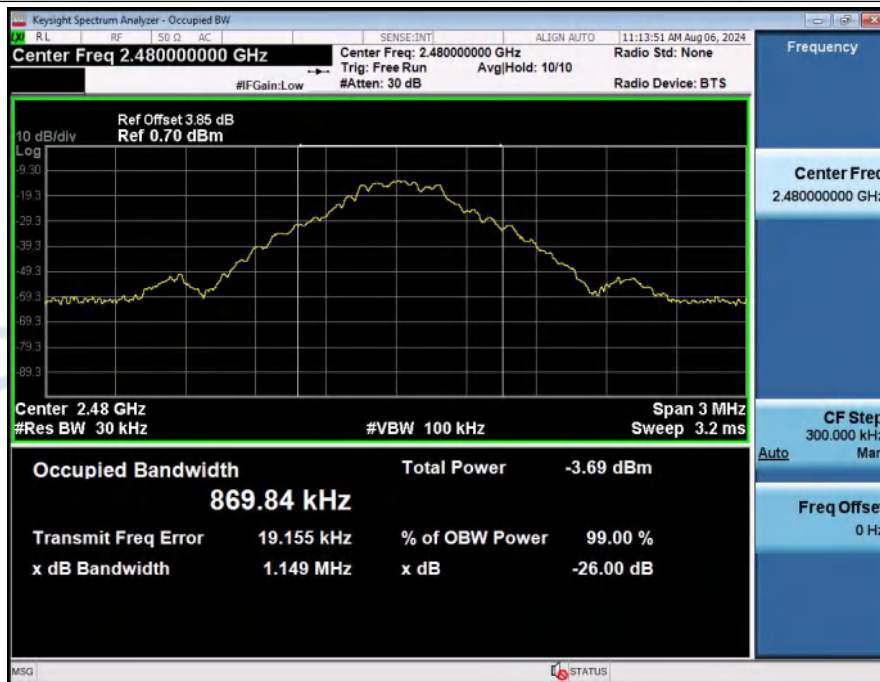


99%_Occupied_Bandwidth_NVNT_ANT1_2-DH5_2402_00

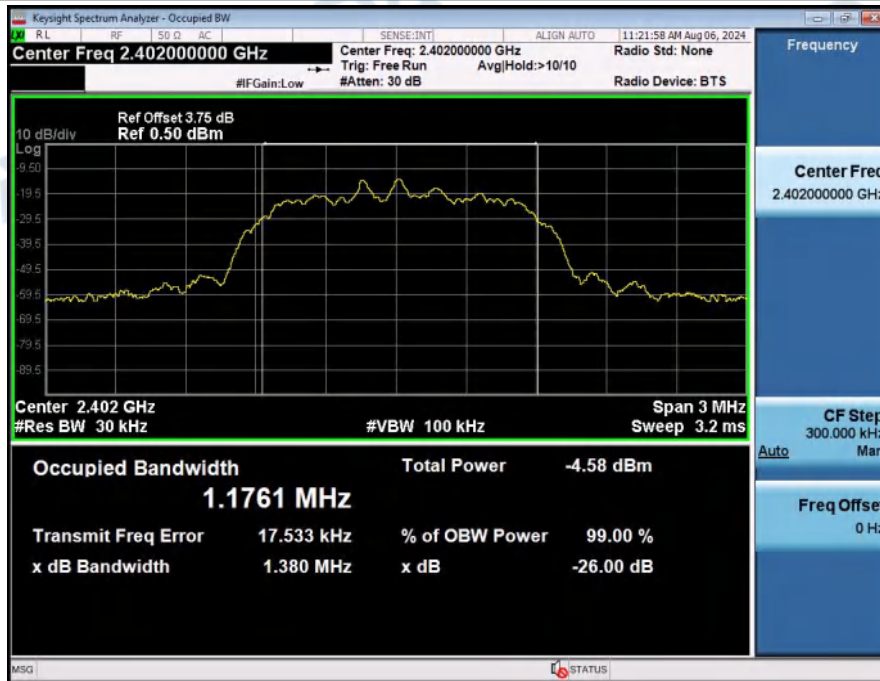

99%_Occupied_Bandwidth_NVNT_ANT1_2-DH5_2441_00

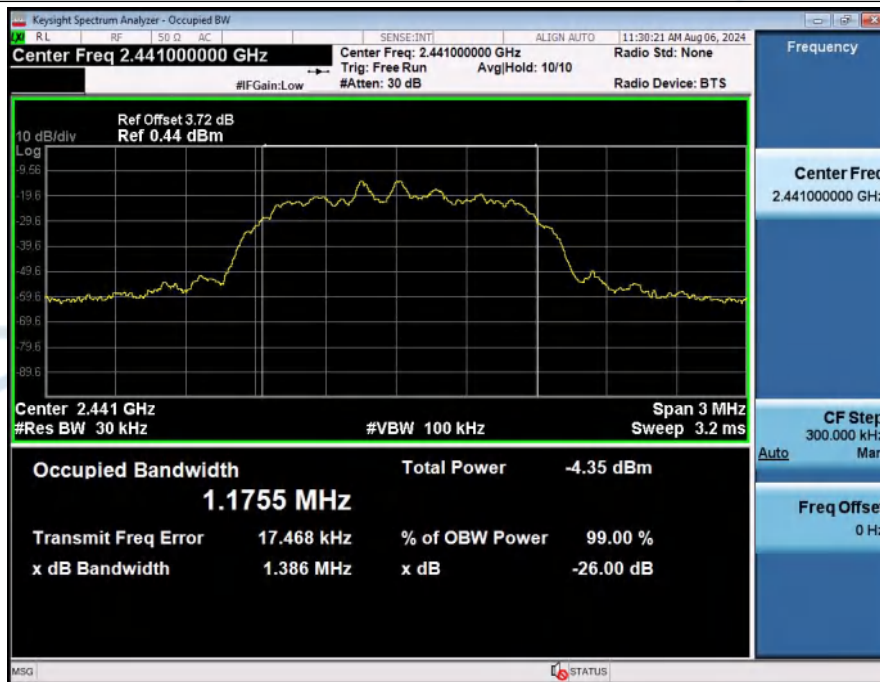


99%_Occupied_Bandwidth_NVNT_ANT1_2-DH5_2480_00

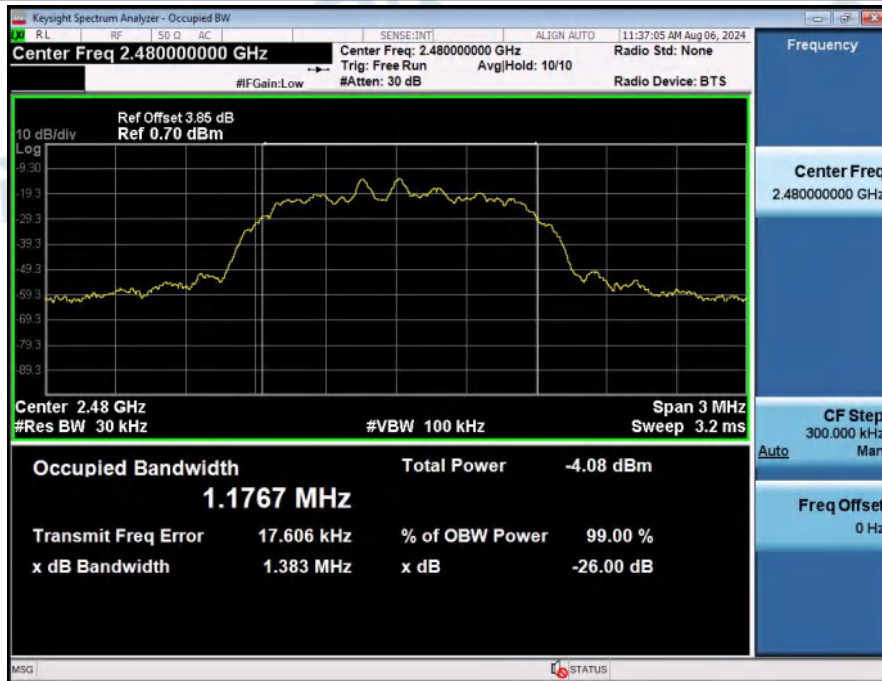

3. Peak Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH5	2402.00	-11.53	0.07	1000	Pass
NVNT	ANT1	1-DH5	2441.00	-11.20	0.08	1000	Pass
NVNT	ANT1	1-DH5	2480.00	-11.04	0.08	1000	Pass
NVNT	ANT1	2-DH5	2402.00	-10.50	0.09	125	Pass
NVNT	ANT1	2-DH5	2441.00	-10.26	0.09	125	Pass
NVNT	ANT1	2-DH5	2480.00	-10.05	0.10	125	Pass

Peak_Output_Power_NVNT_ANT1_1-DH5_2402_00

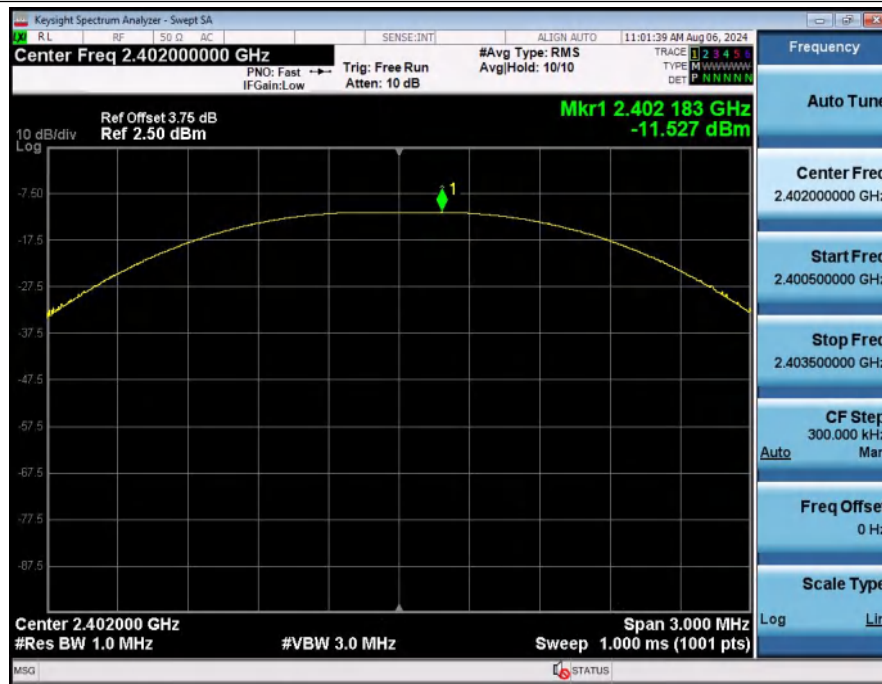


Peak_Output_Power_NVNT_ANT1_1-DH5_2441_00



Peak_Output_Power_NVNT_ANT1_1-DH5_2480_00



Peak_Output_Power_NVNT_ANT1_2-DH5_2402_00

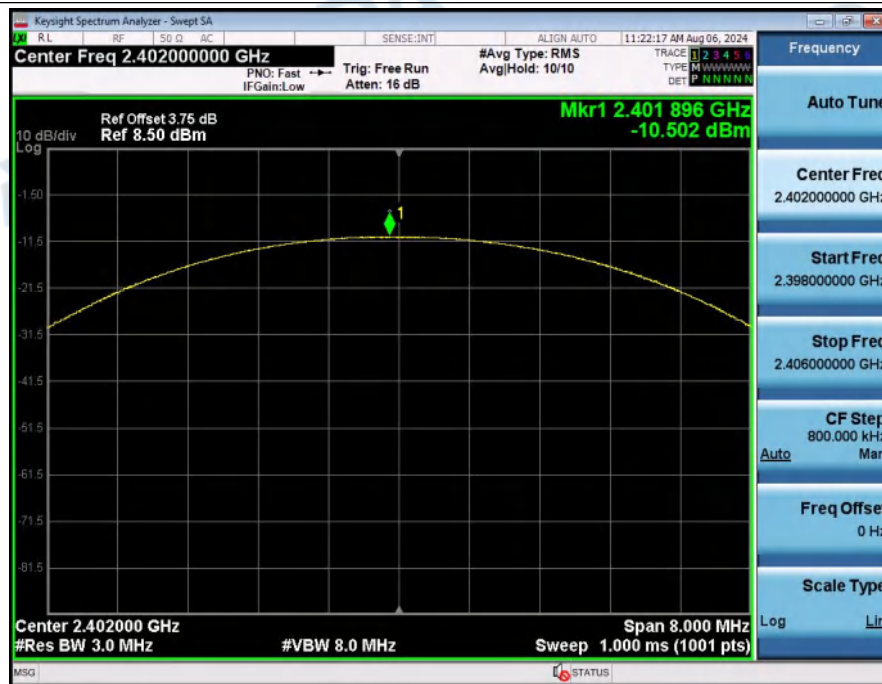

Peak_Output_Power_NVNT_ANT1_2-DH5_2441_00



Peak_Output_Power_NVNT_ANT1_2-DH5_2480_00




4. Spurious Emissions

Condition	Antenna	Modulation	TX Mode	Spurious MAX.Value(dBm)	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-52.058	-31.765	Pass
NVNT	ANT1	1-DH5	2441.00	-54.878	-31.691	Pass
NVNT	ANT1	1-DH5	2480.00	-55.475	-31.417	Pass
NVNT	ANT1	2-DH5	2402.00	-57.416	-31.768	Pass
NVNT	ANT1	2-DH5	2441.00	-57.827	-31.468	Pass
NVNT	ANT1	2-DH5	2480.00	-52.096	-31.226	Pass

1_Reference_Level_NVNT_ANT1_1-DH5_2402_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2402_00

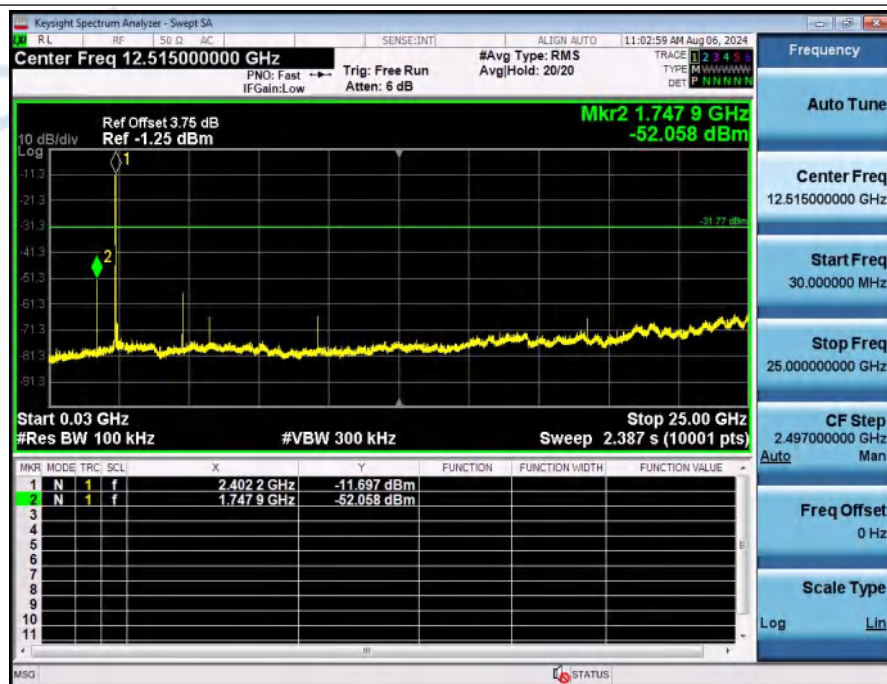

1_Reference_Level_NVNT_ANT1_1-DH5_2441_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2441_00

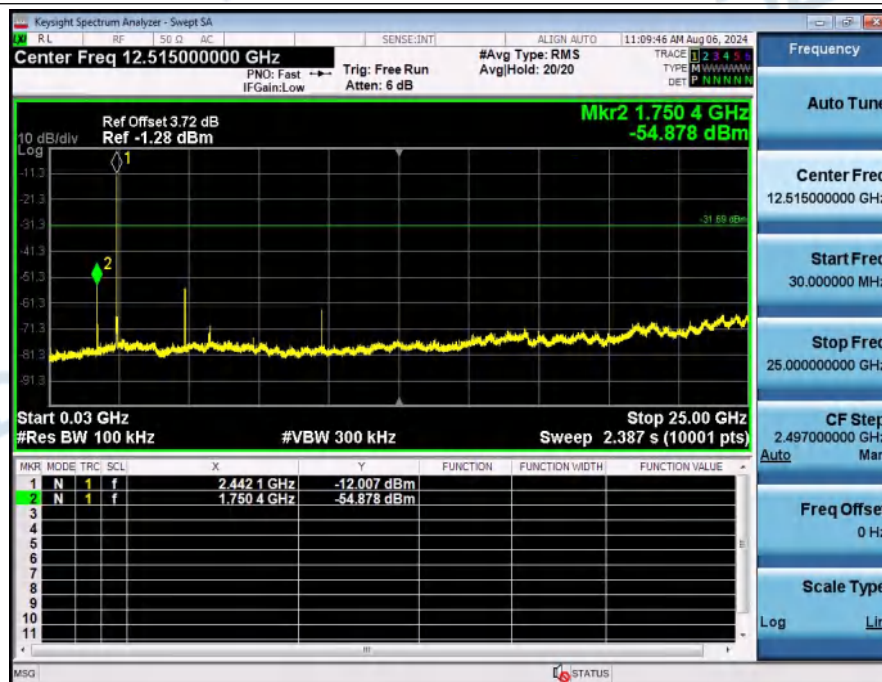


1_Reference_Level_NVNT_ANT1_1-DH5_2480_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2480_00

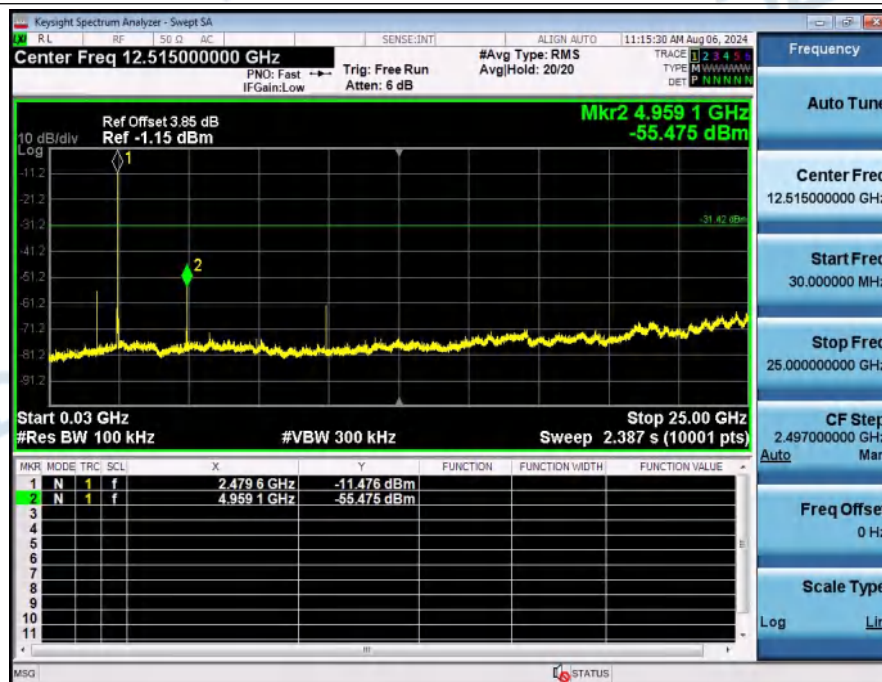


1_Reference_Level_NVNT_ANT1_2-DH5_2402_00

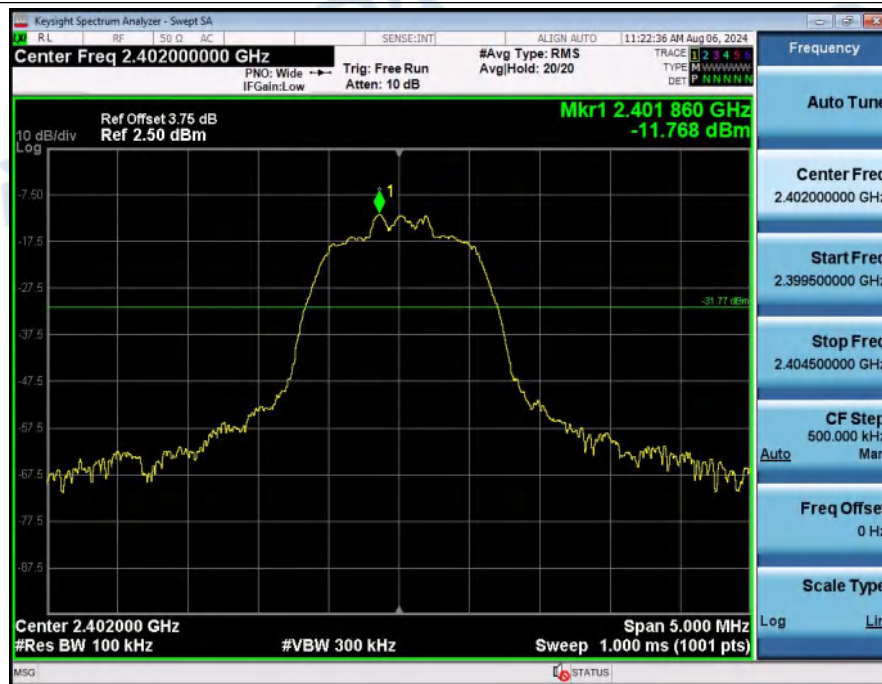


2_Spurious_Emissions_NVNT_ANT1_2-DH5_2402_00

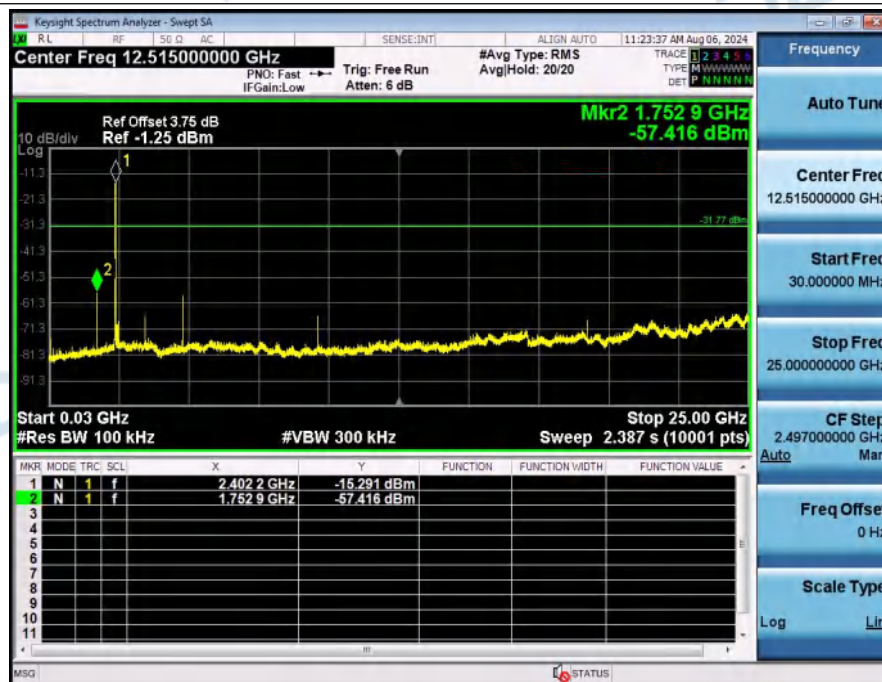


1_Reference_Level_NVNT_ANT1_2-DH5_2441_00

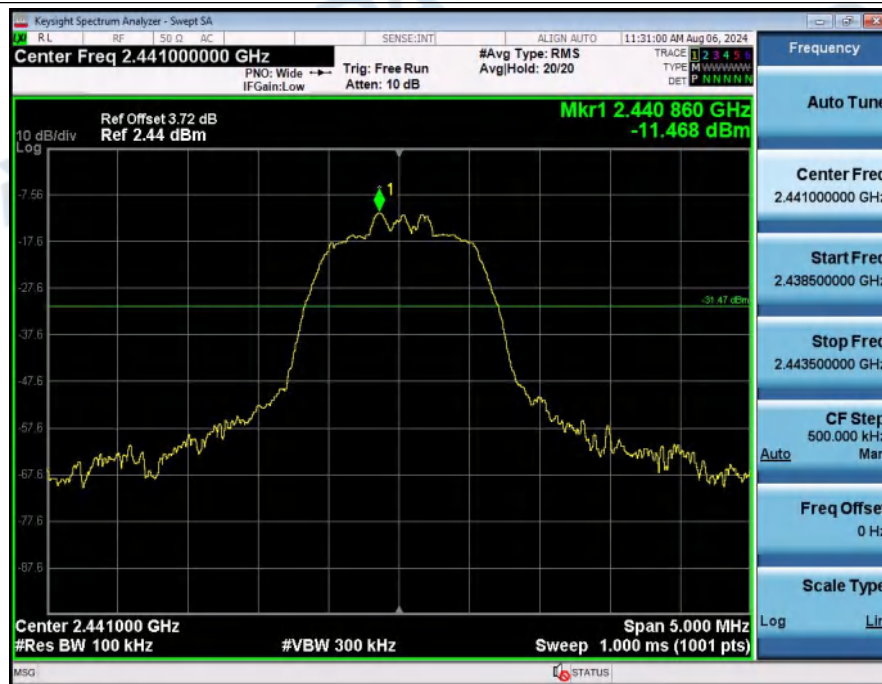


2_Spurious_Emissions_NVNT_ANT1_2-DH5_2441_00

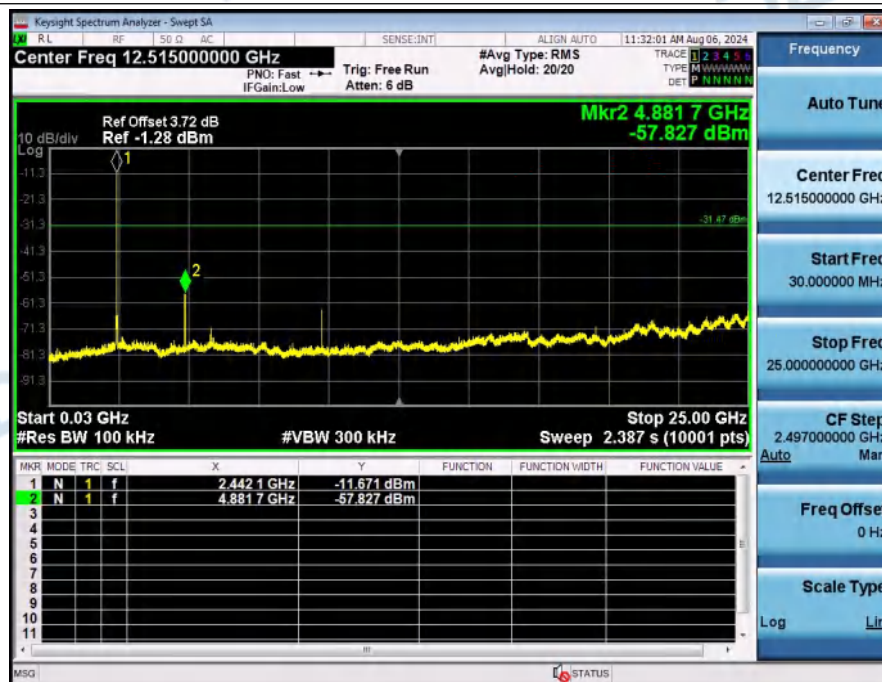

1_Reference_Level_NVNT_ANT1_2-DH5_2480_00

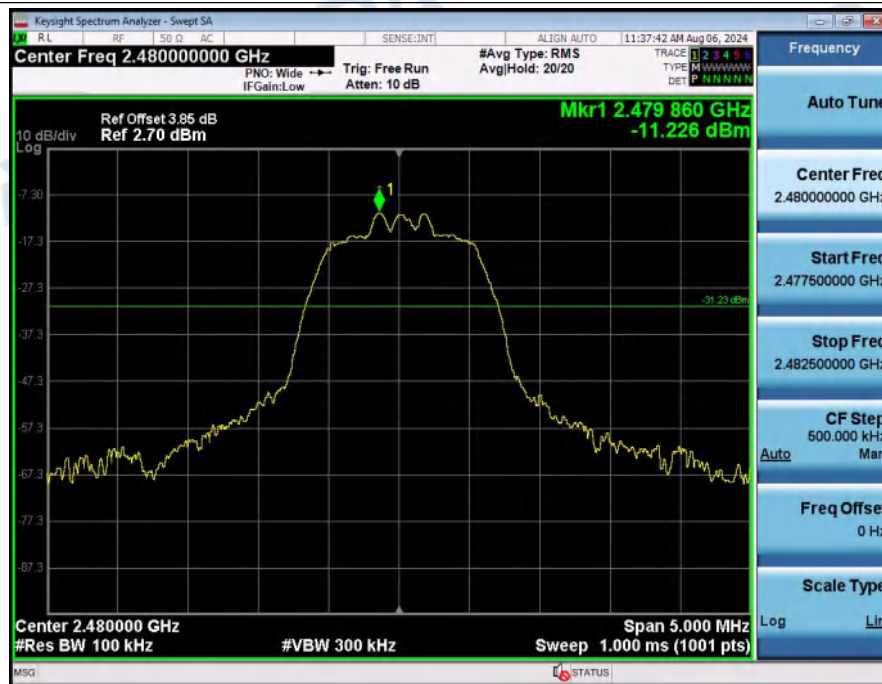

2_Spurious_Emissions_NVNT_ANT1_2-DH5_2480_00

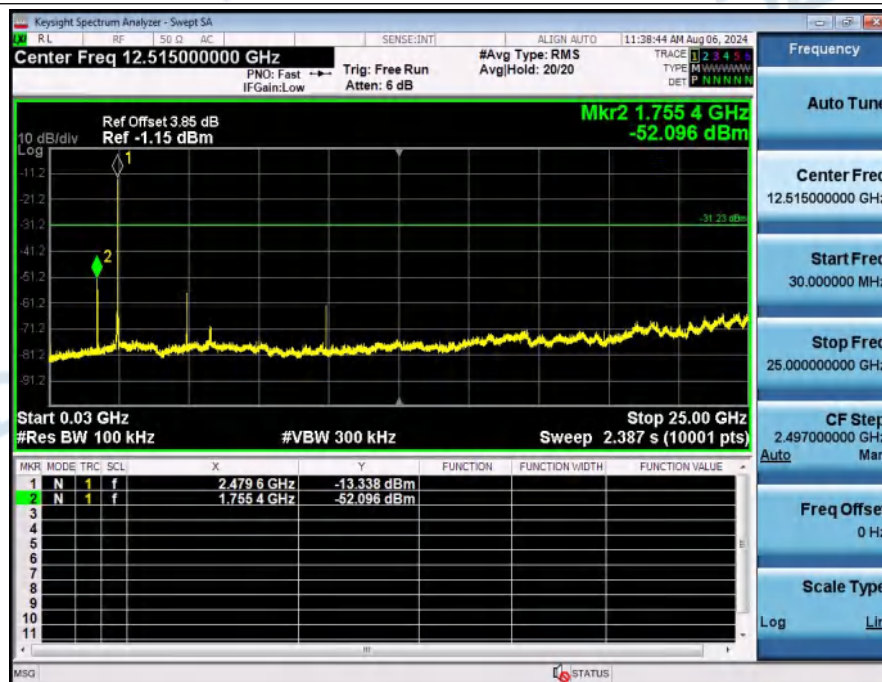


5. Bandedge

Condition	Antenna	Modulation	TX Mode	Bandedge MAX.Value	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-64.640	-31.765	Pass
NVNT	ANT1	1-DH5	Hopping_LCH	-66.262	-31.336	Pass
NVNT	ANT1	1-DH5	2480.00	-65.575	-31.417	Pass
NVNT	ANT1	1-DH5	Hopping_HCH	-65.666	-31.260	Pass
NVNT	ANT1	2-DH5	2402.00	-62.812	-31.768	Pass
NVNT	ANT1	2-DH5	Hopping_LCH	-65.205	-31.330	Pass
NVNT	ANT1	2-DH5	2480.00	-65.688	-31.226	Pass
NVNT	ANT1	2-DH5	Hopping_HCH	-65.096	-31.254	Pass

1_Reference_Level_NVNT_ANT1_1-DH5_2402_00




2_Bandedge_NVNT_ANT1_1-DH5_2402_00

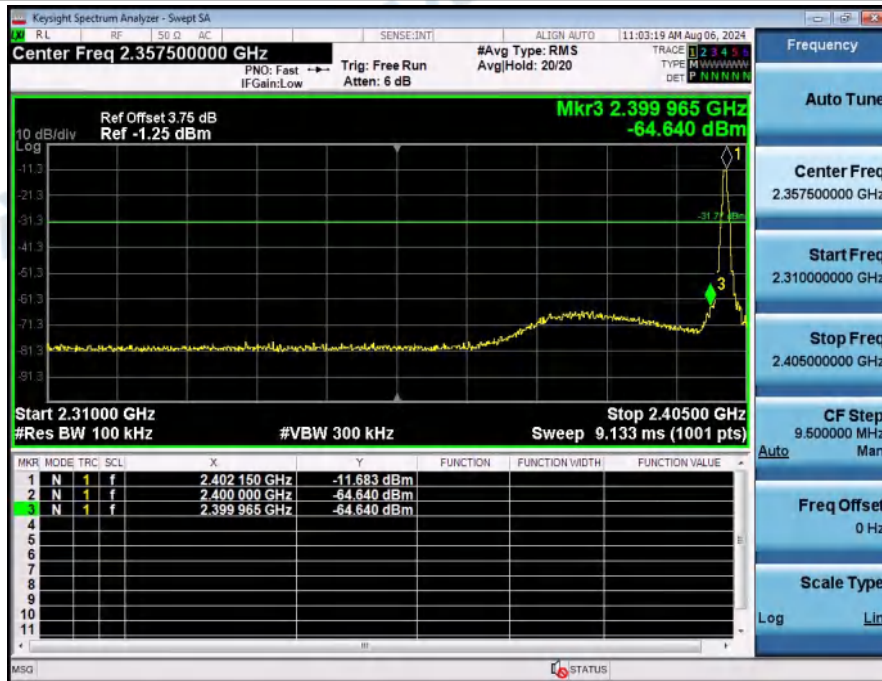

1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping




2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

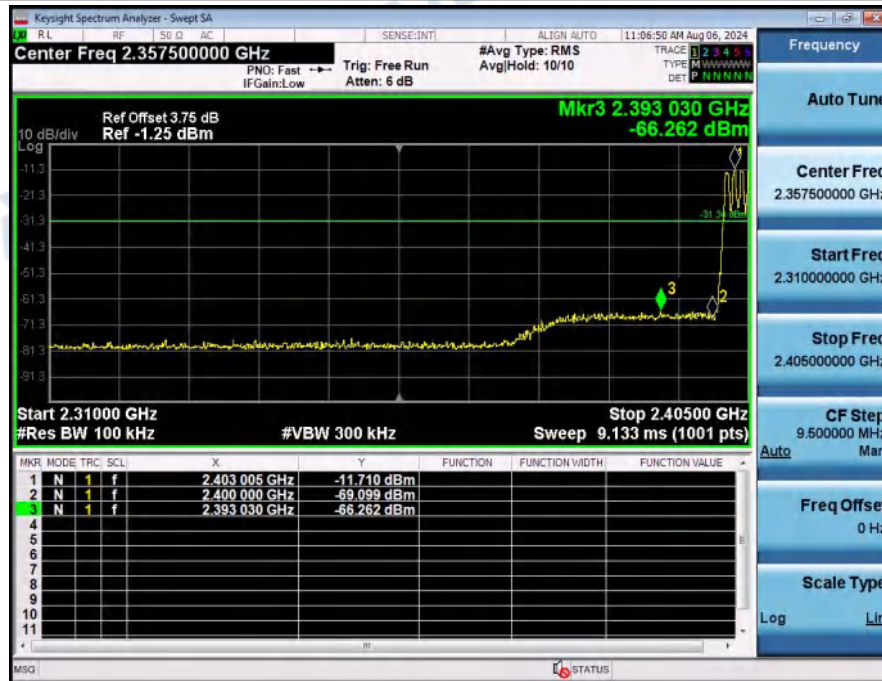


1_Reference_Level_NVNT_ANT1_1-DH5_2480_00




2_Bandedge_NVNT_ANT1_1-DH5_2480_00

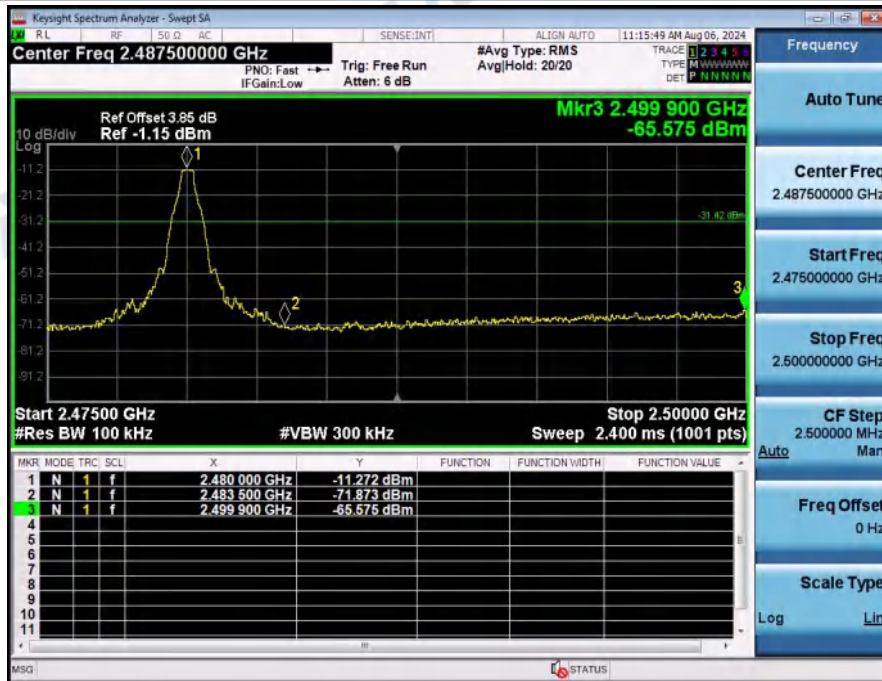


1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping

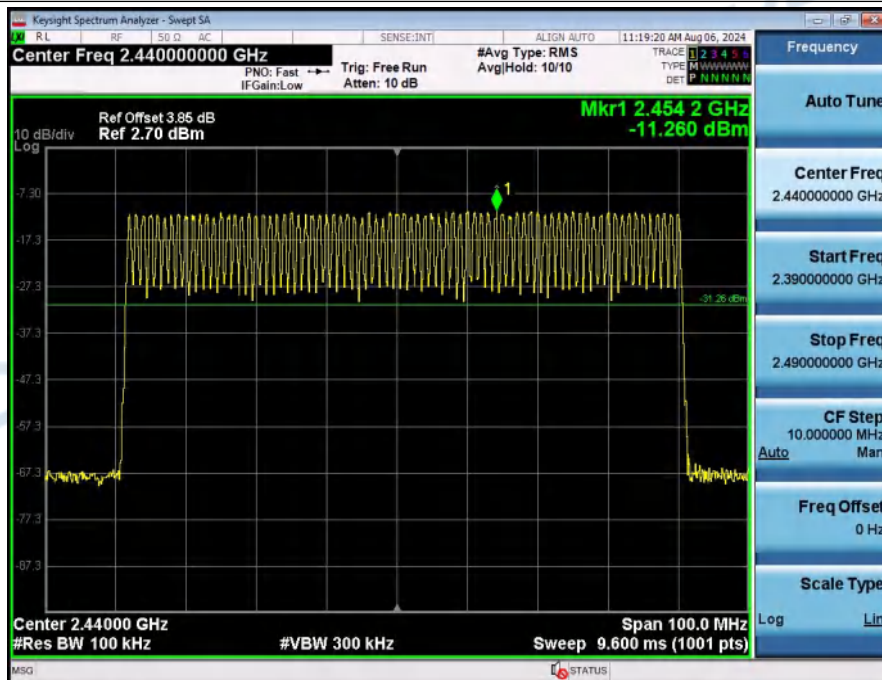


2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

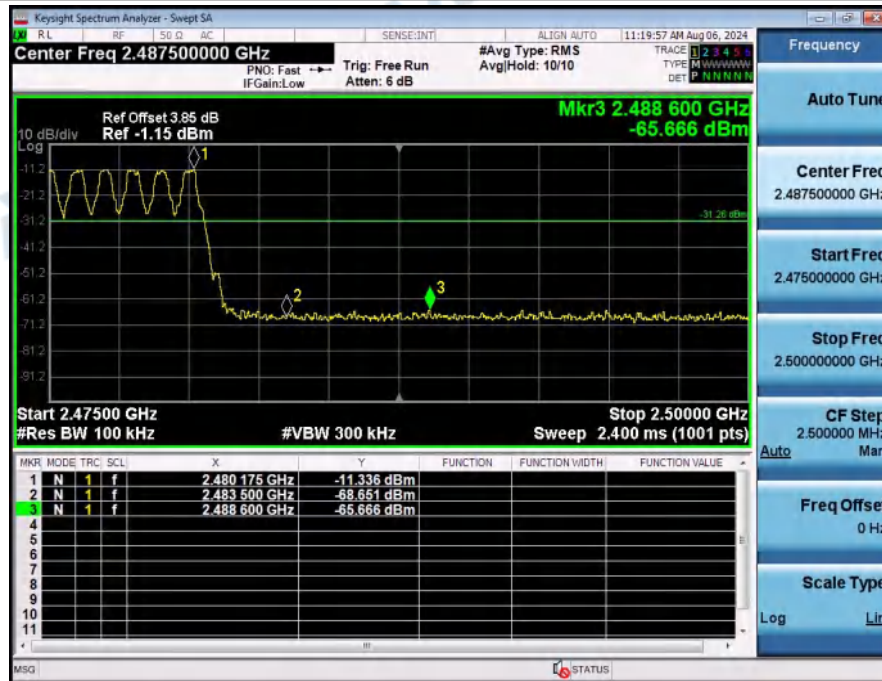


1_Reference_Level_NVNT_ANT1_2-DH5_2402_00

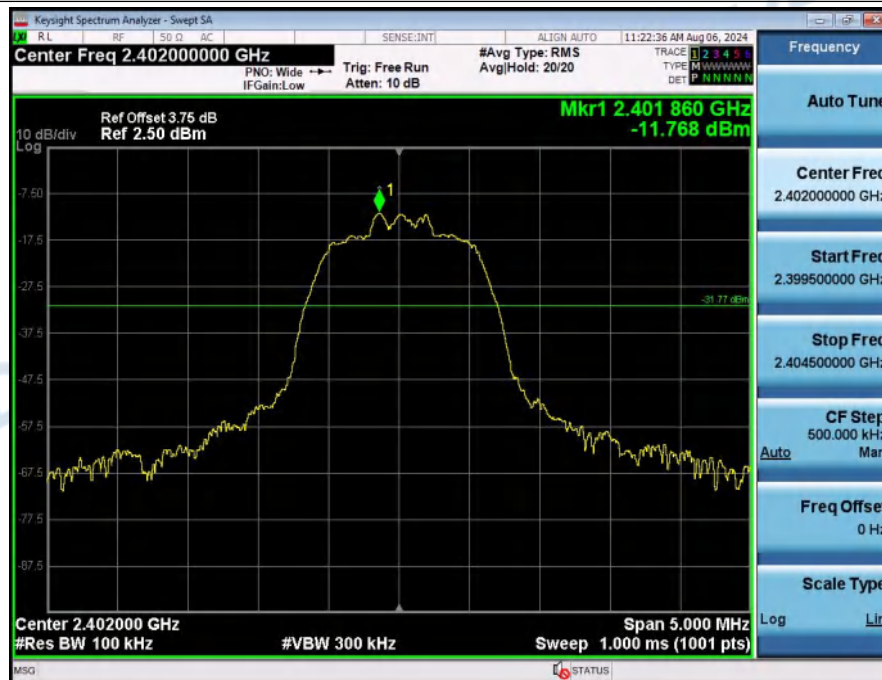


2_Bandedge_NVNT_ANT1_2-DH5_2402_00

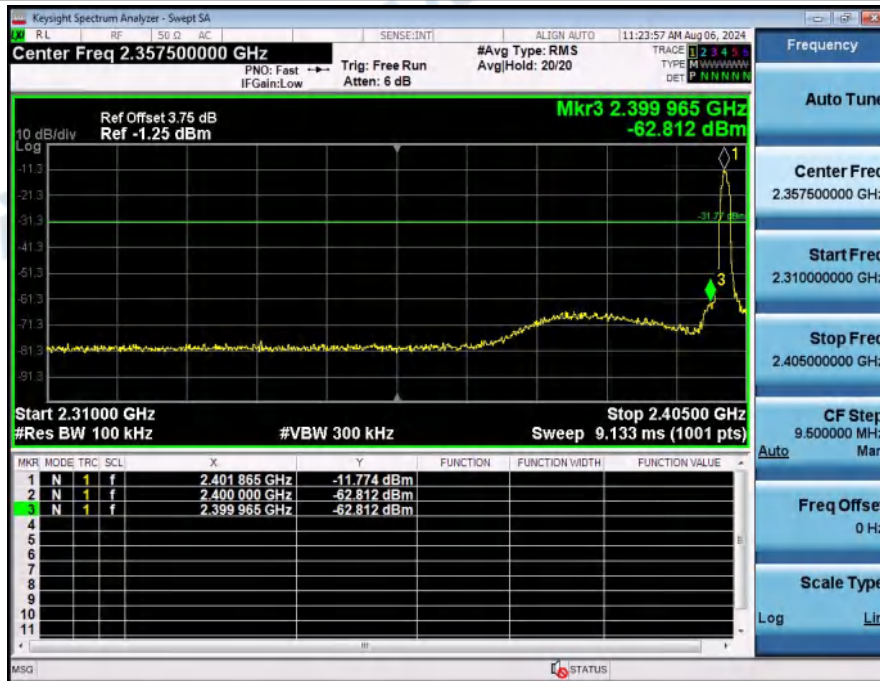


1_Reference_Level_Hopping_NVNT_ANT1_2-DH5_Hopping

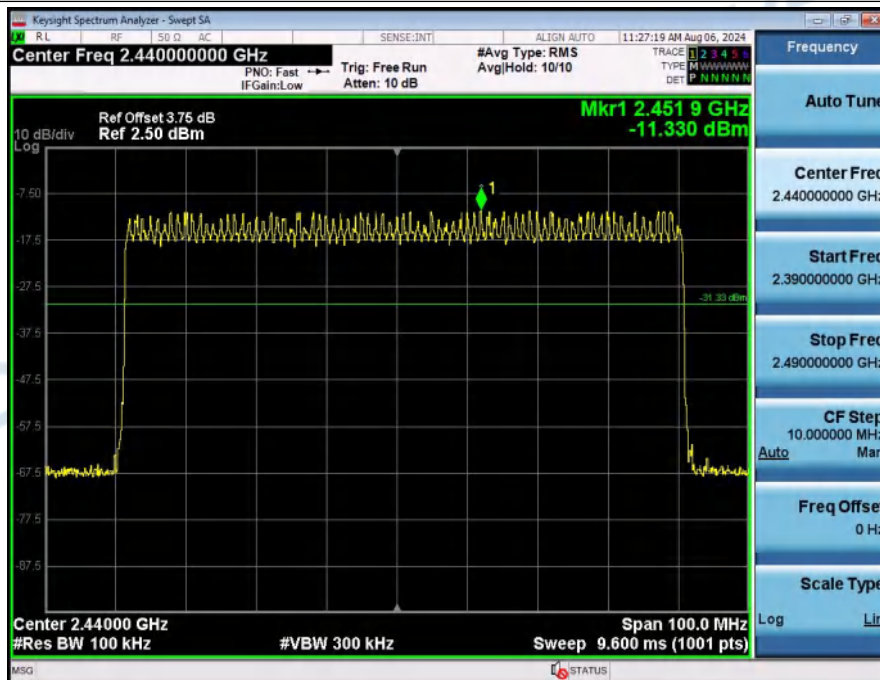


2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH5_Hopping

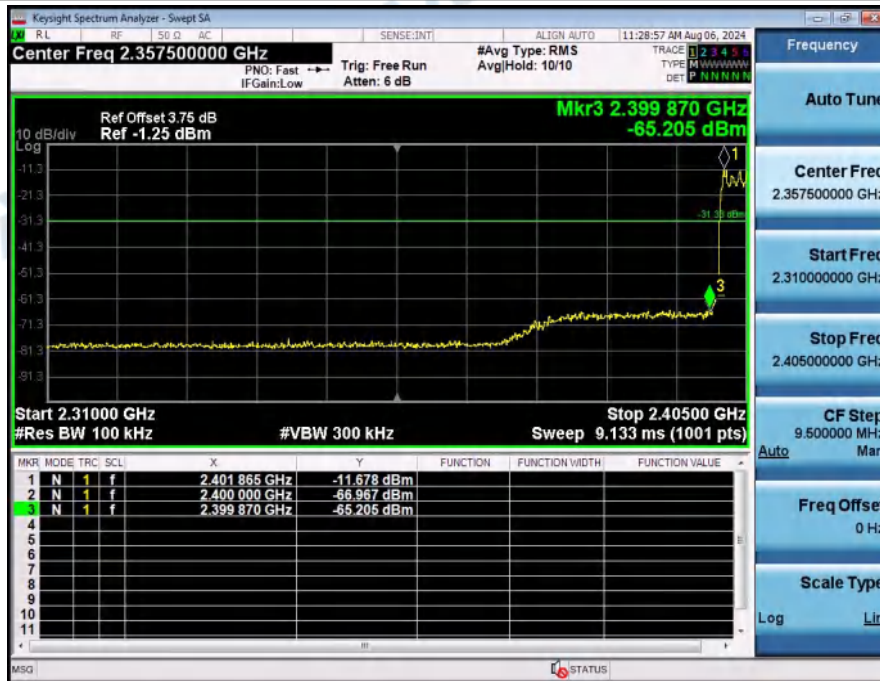


1_Reference_Level_NVNT_ANT1_2-DH5_2480_00

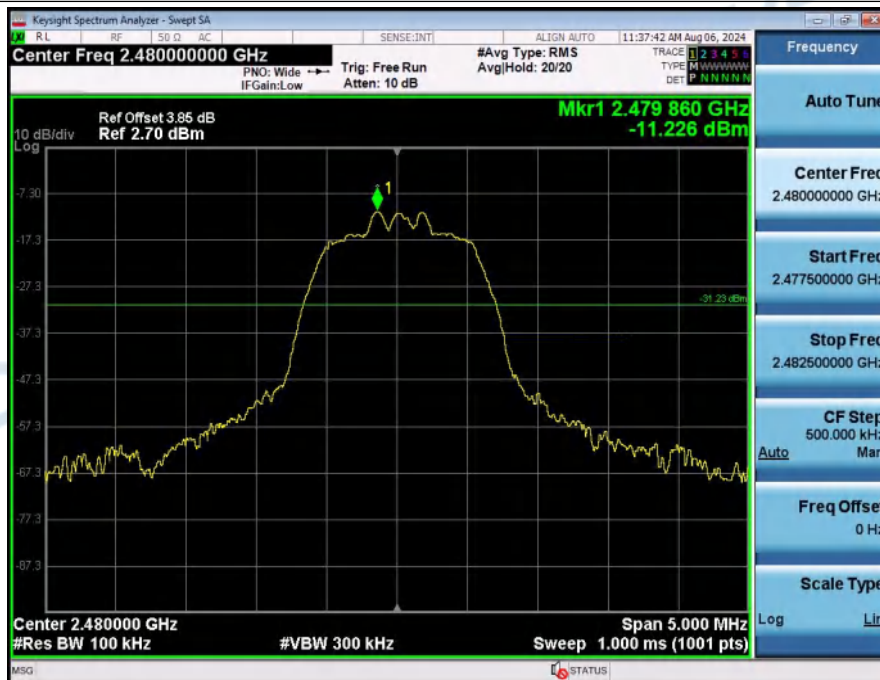


2_Bandedge_NVNT_ANT1_2-DH5_2480_00

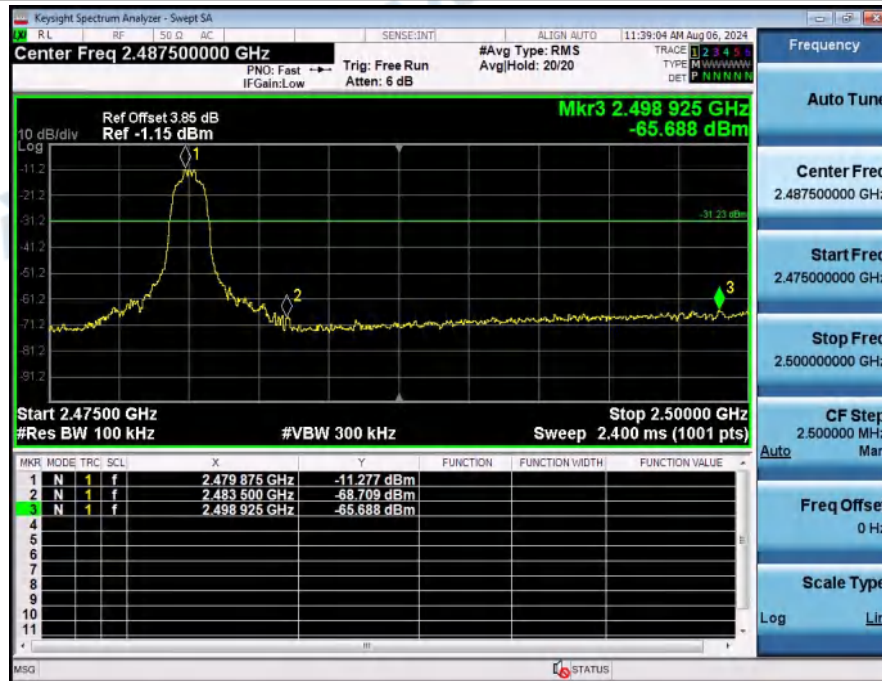

1_Reference_Level_Hopping_NVNT_ANT1_2-DH5_Hopping

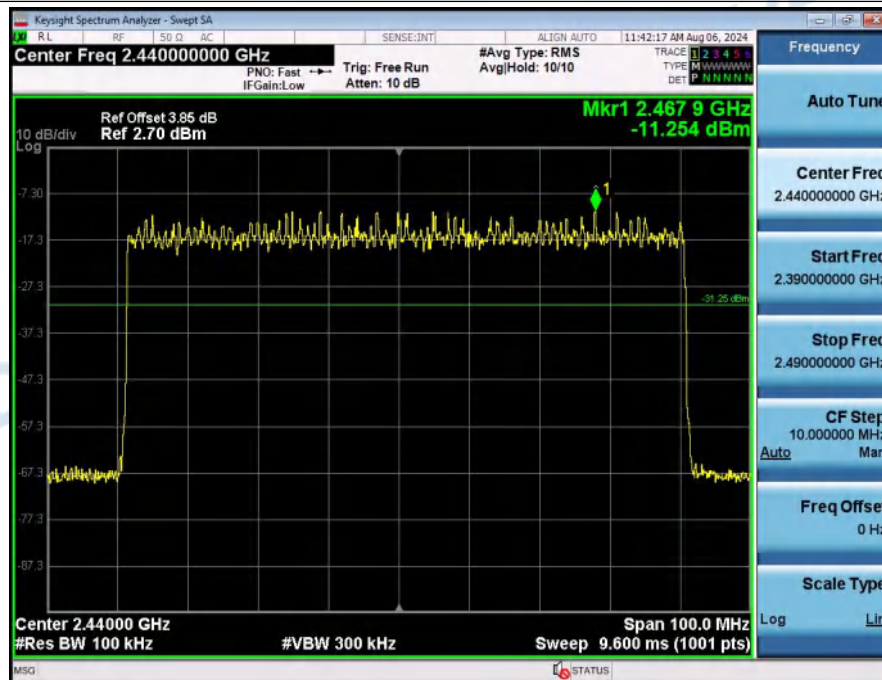

2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH5_Hopping

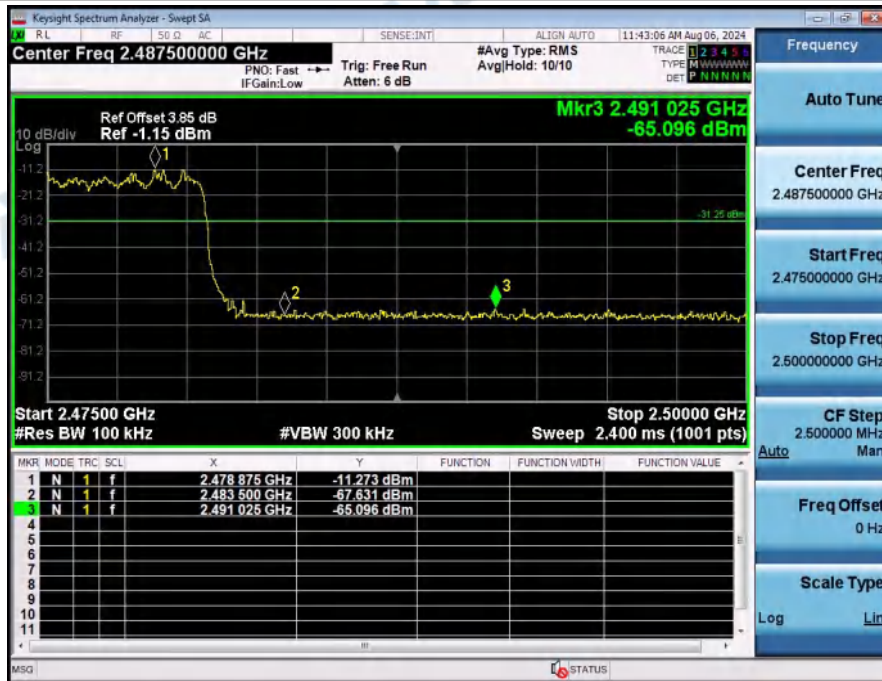


6. Carrier Frequencies Separation (Hopping)

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH5	2402.00	2401.849	2403.079	1.23	0.959	Pass
NVNT	ANT1	1-DH5	2441.00	2441.011	2442.004	0.99	0.957	Pass
NVNT	ANT1	1-DH5	2480.00	2479.023	2480.058	1.03	0.960	Pass
NVNT	ANT1	2-DH5	2402.00	2401.855	2402.866	1.01	0.856	Pass
NVNT	ANT1	2-DH5	2441.00	2440.858	2441.860	1.00	0.857	Pass
NVNT	ANT1	2-DH5	2480.00	2478.855	2480.181	1.33	0.857	Pass

Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_1-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_1-DH5_Hopping

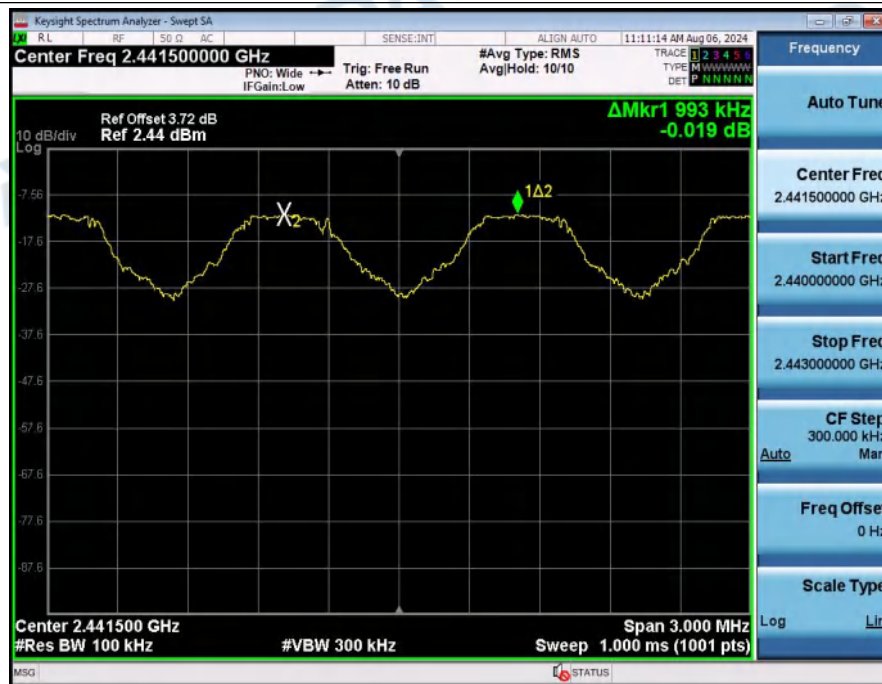

Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_1-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH5_Hopping




Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH5_Hopping




7. Number of Hopping Channel (Hopping)

Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping

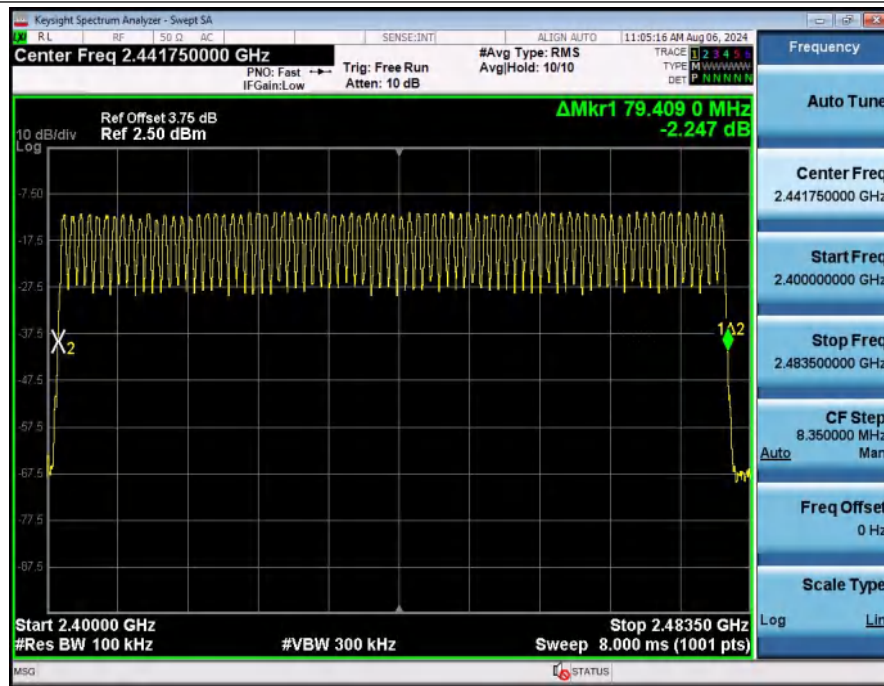


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping

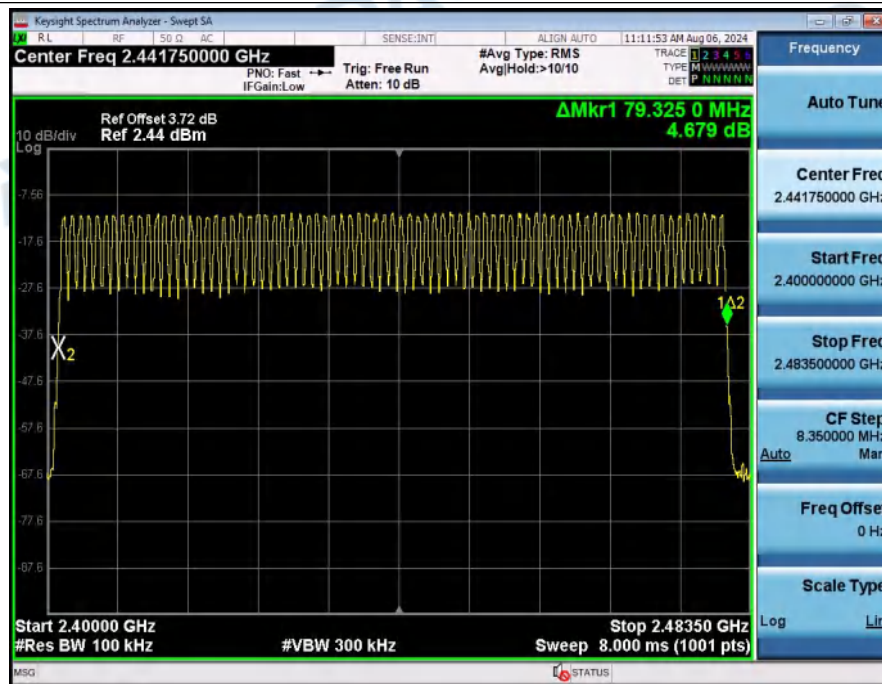


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping

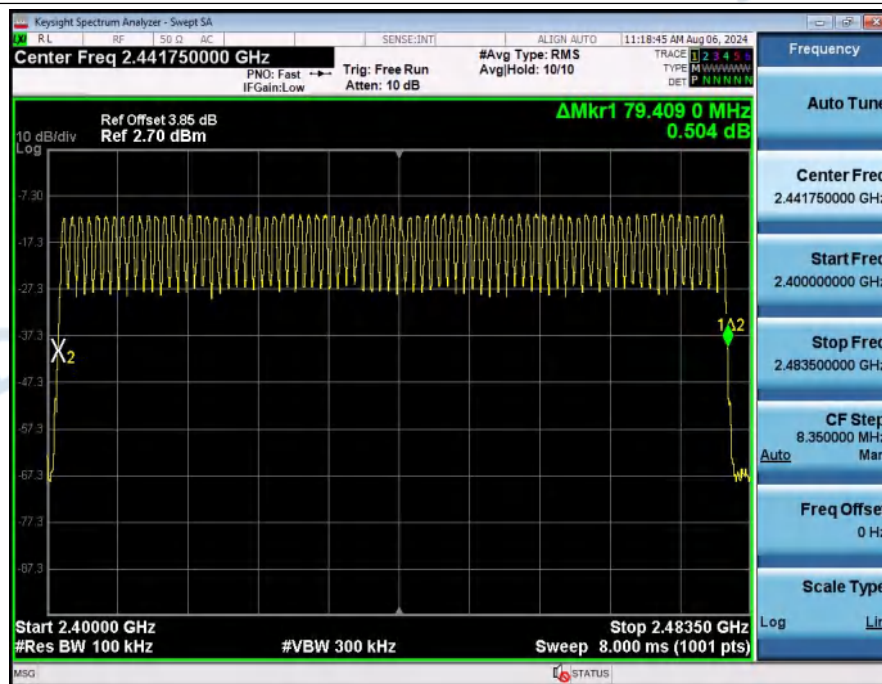


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH5_Hopping

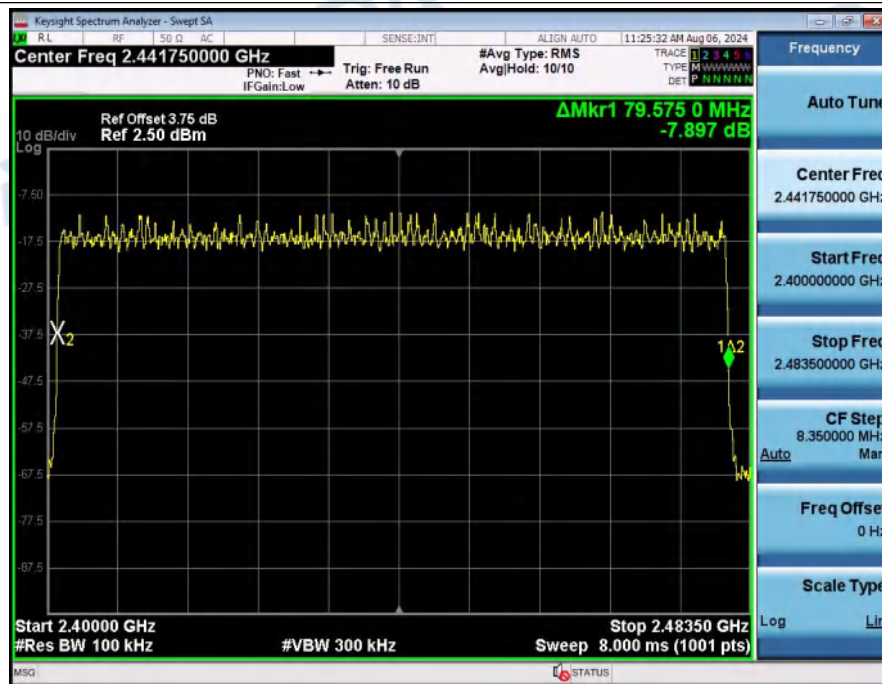

Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH5_Hopping

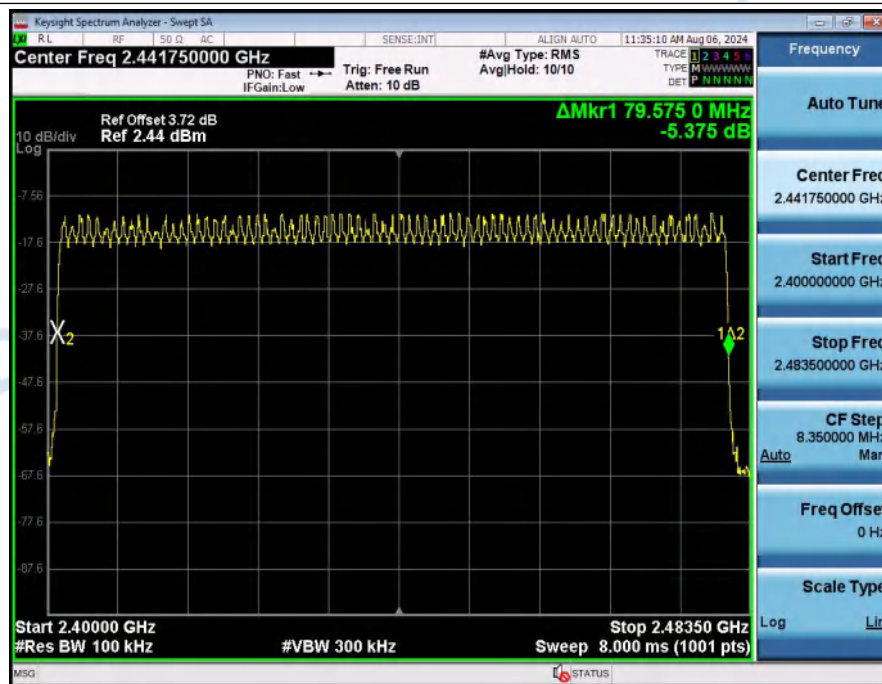


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH5_Hopping

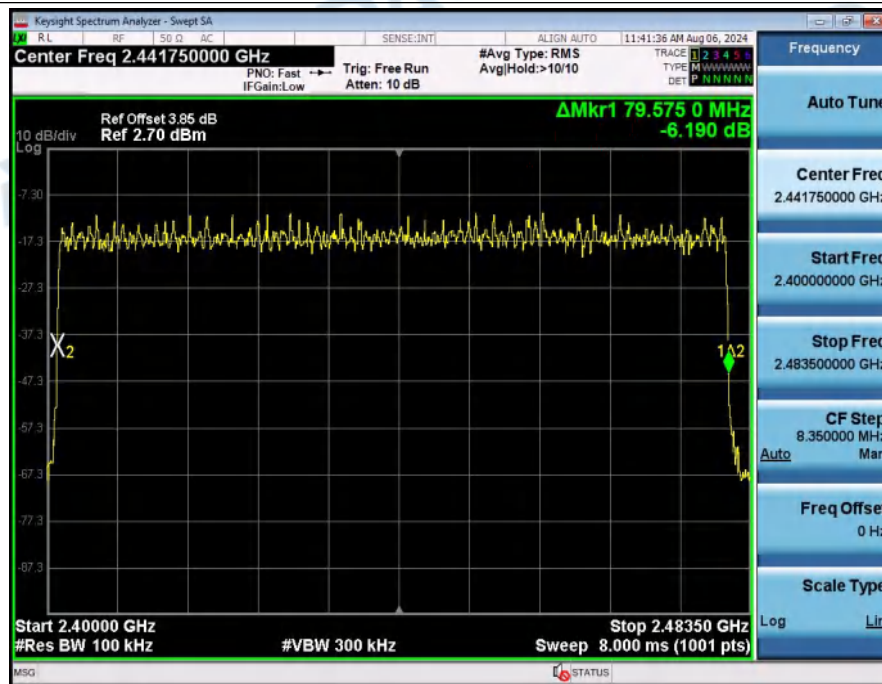


8. Dwell Time (Hopping)

Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH5	2.889	92.00	265.788	0.40	Pass
NVNT	ANT1	2-DH5	2.894	102.00	295.188	0.40	Pass
NVNT	ANT1	1-DH1	0.384	319.00	122.496	0.40	Pass
NVNT	ANT1	1-DH3	1.639	156.00	255.684	0.40	Pass
NVNT	ANT1	2-DH1	0.393	320.00	125.760	0.40	Pass
NVNT	ANT1	2-DH3	1.645	162.00	266.490	0.40	Pass


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_One_Burst_Time

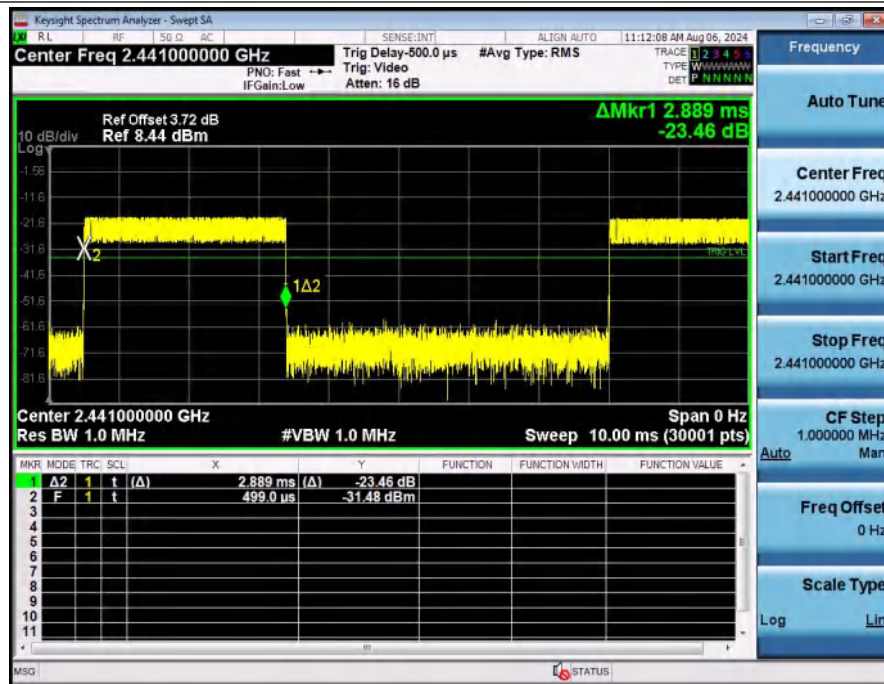


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_Accumulated

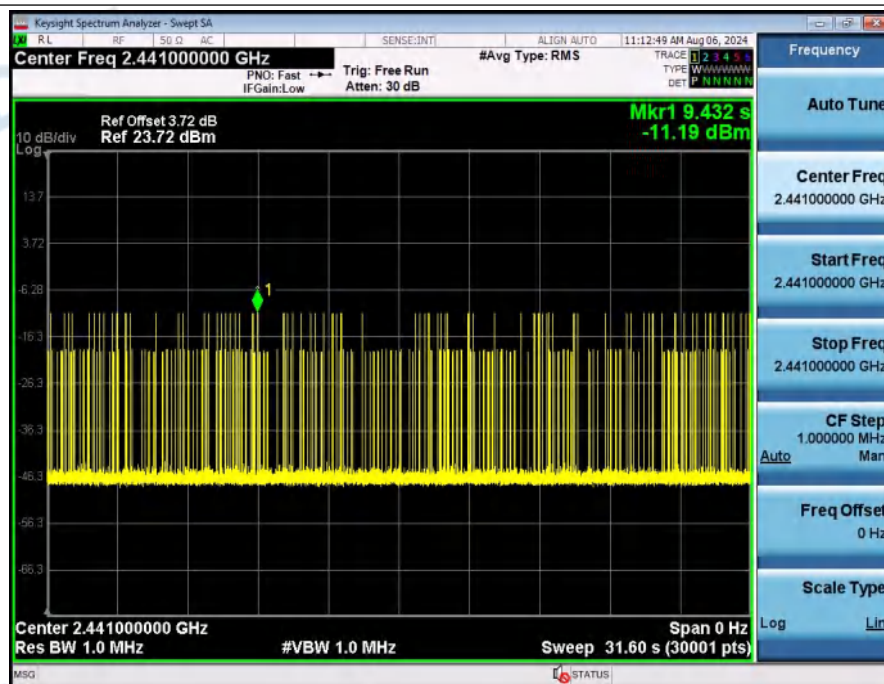


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH5_2441_00_One_Burst_Time

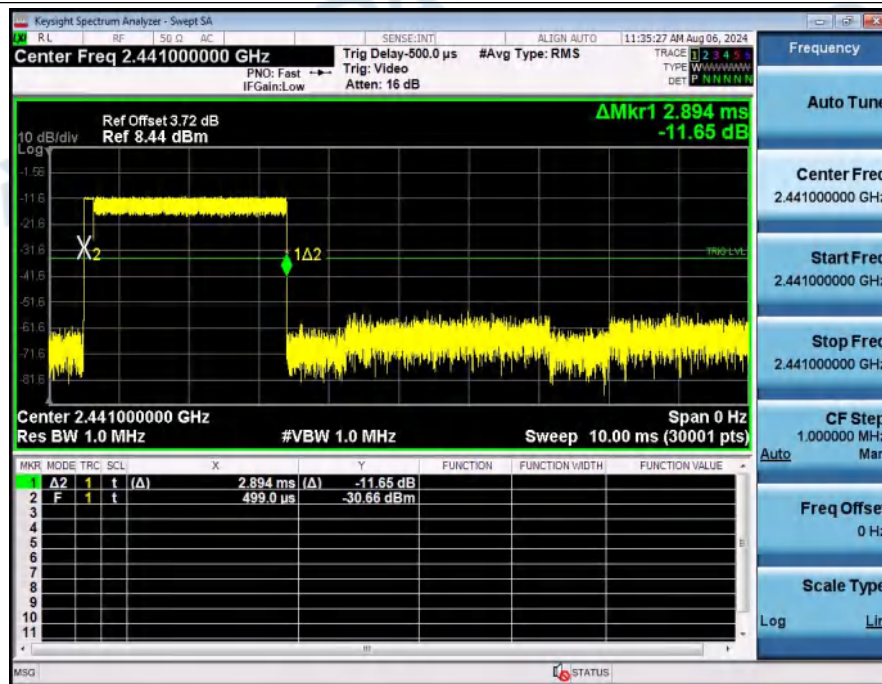


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH5_2441_00_Accumulated

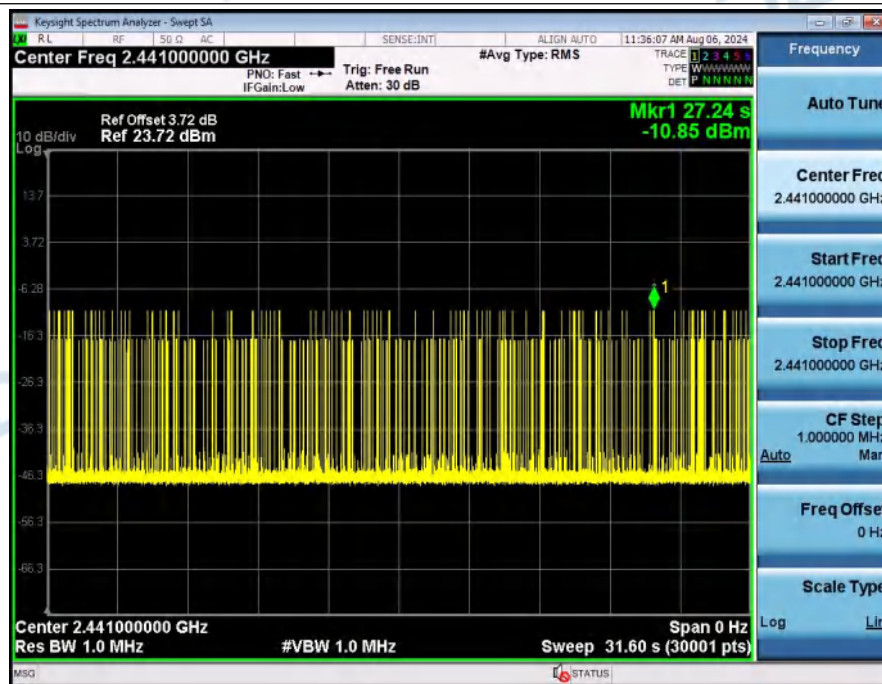


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH1_2441_00_One_Burst_Time

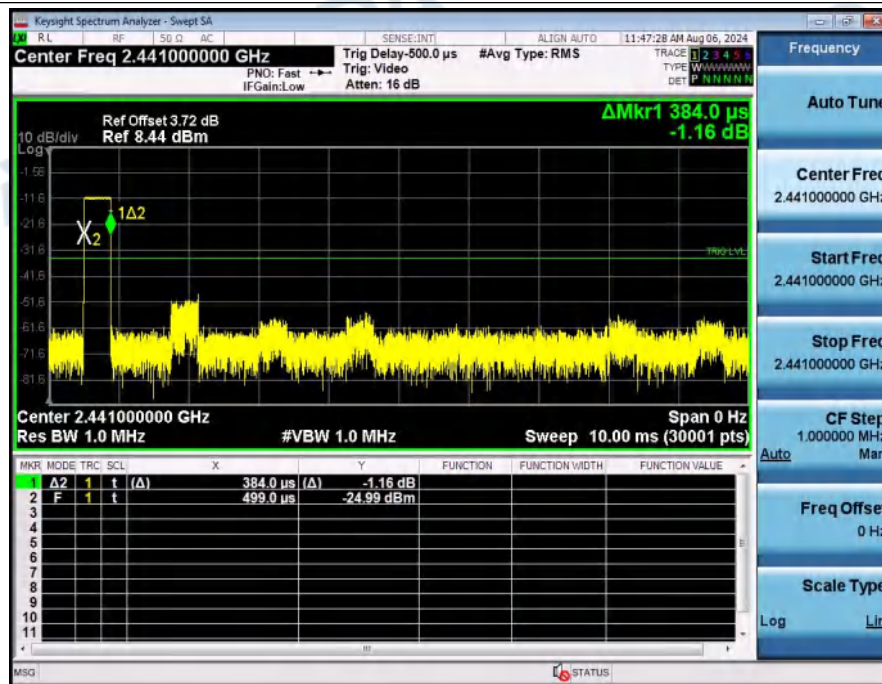


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH1_2441_00_Accumulated

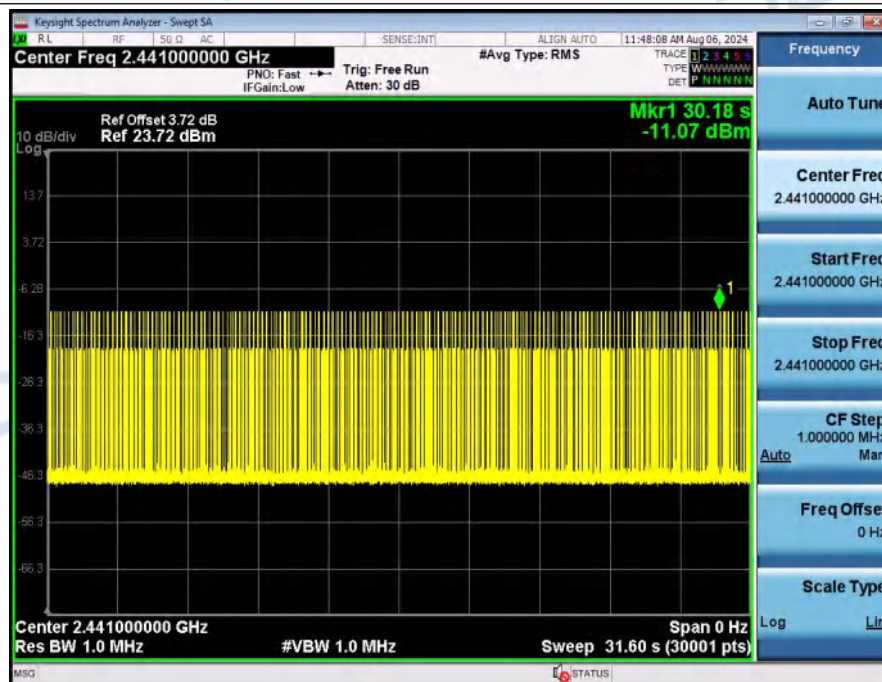


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH3_2441_00_One_Burst_Time

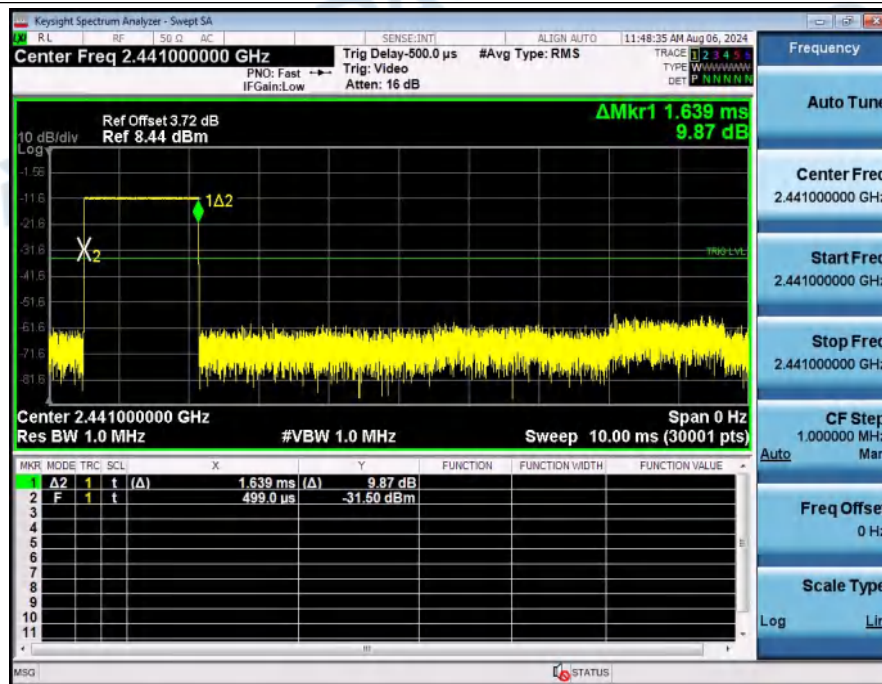


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH3_2441_00_Accumulated

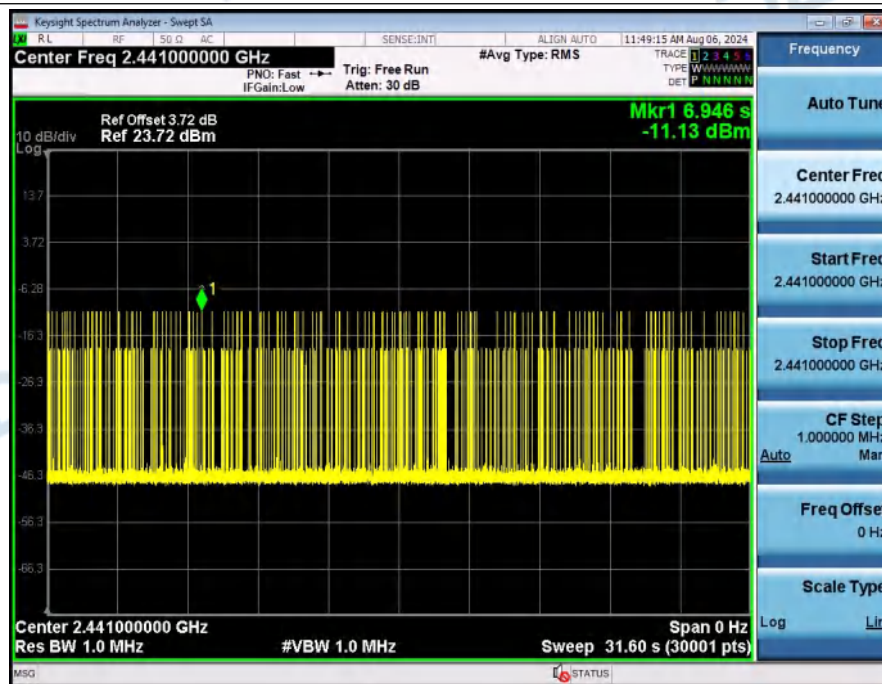


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH1_2441_00_One_Burst_Time

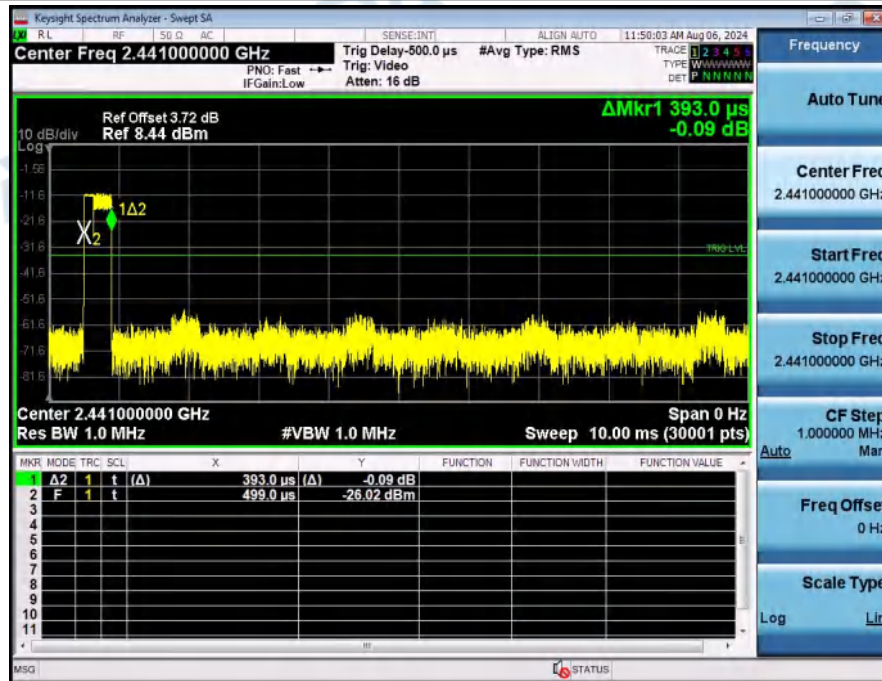


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH1_2441_00_Accumulated

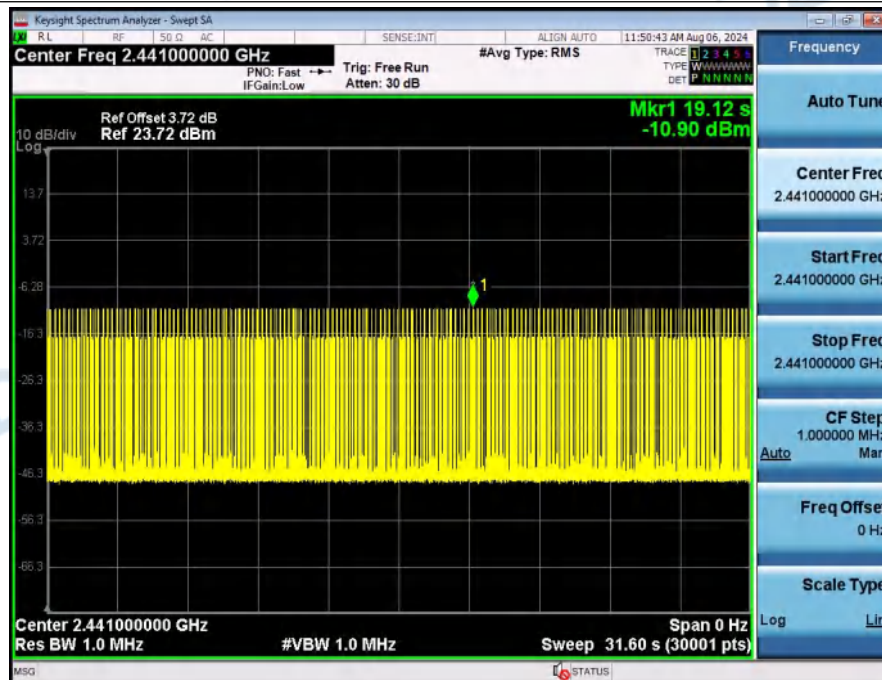

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH3_2441_00_One_Burst_Time

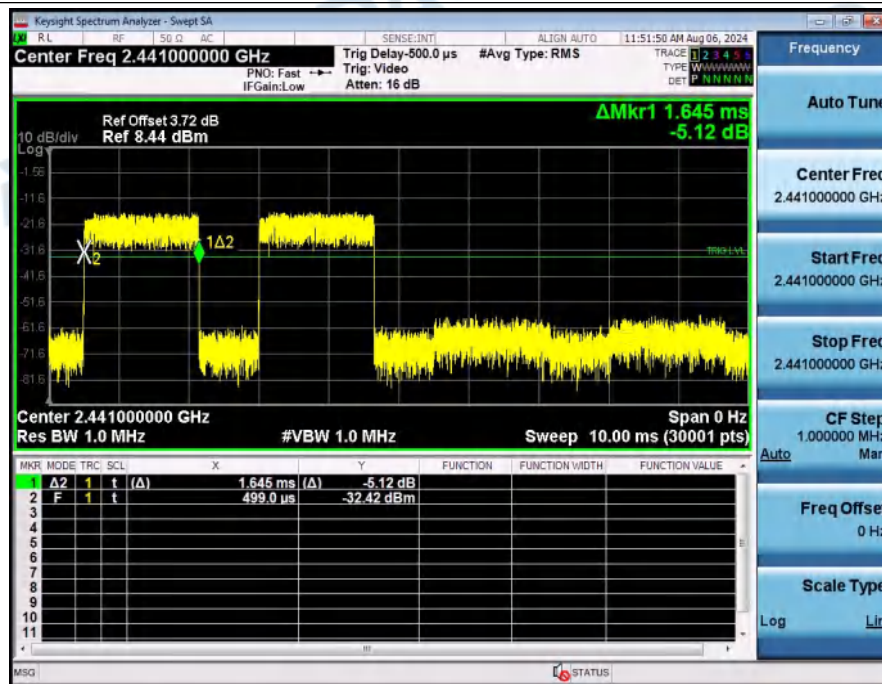

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH3_2441_00_Accumulated

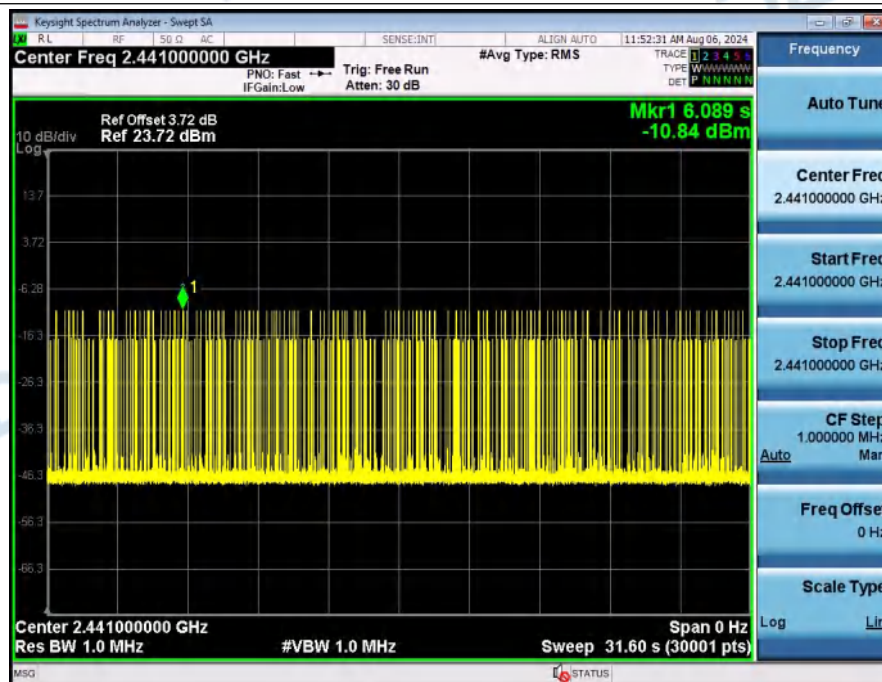


Appendix-R


HT240805005--T8--EDR--FCC--1 FCC_BT (Part15.247) Test Data

1. -20dB Bandwidth


Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH5	2402.00	0.956	No
NVNT	ANT1	1-DH5	2441.00	0.955	No
NVNT	ANT1	1-DH5	2480.00	0.955	No
NVNT	ANT1	2-DH5	2402.00	1.283	Yes
NVNT	ANT1	2-DH5	2441.00	1.285	Yes
NVNT	ANT1	2-DH5	2480.00	1.283	Yes

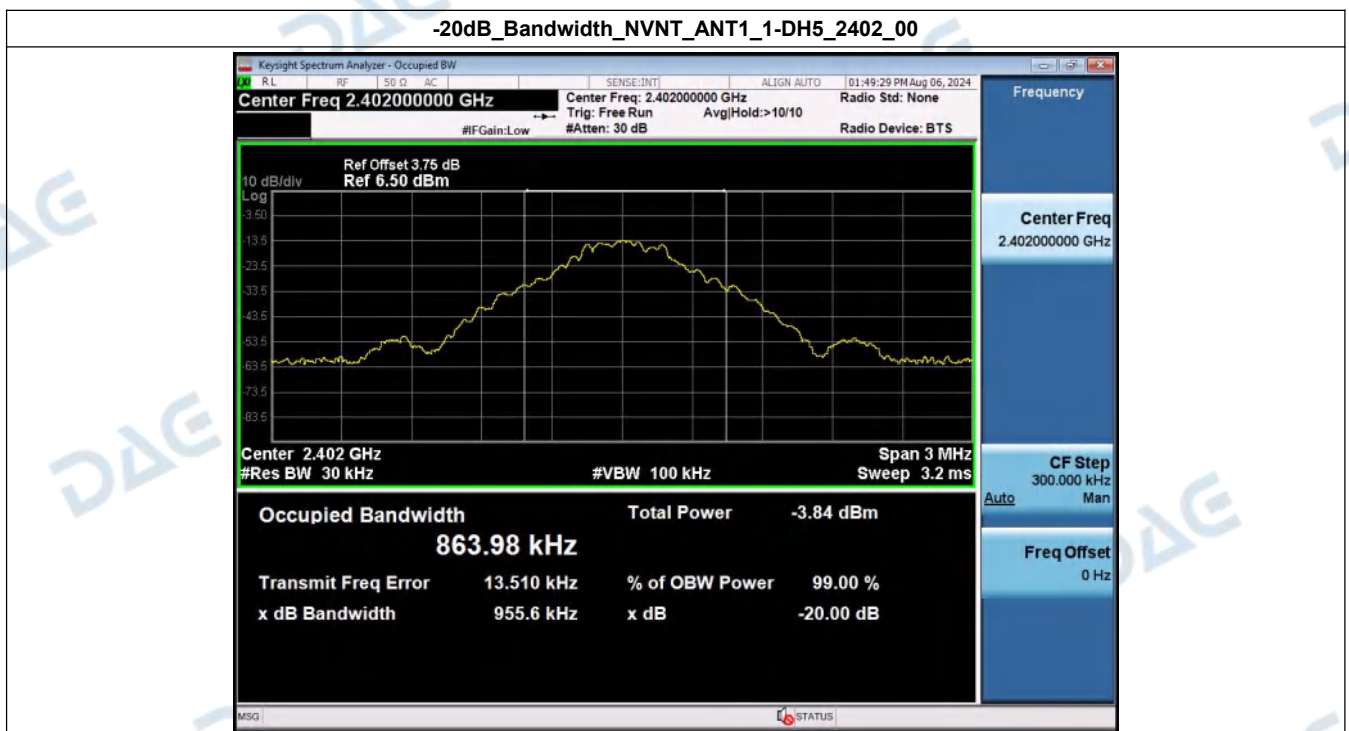


-20dB_Bandwidth_NVNT_ANT1_1-DH5_2441_00

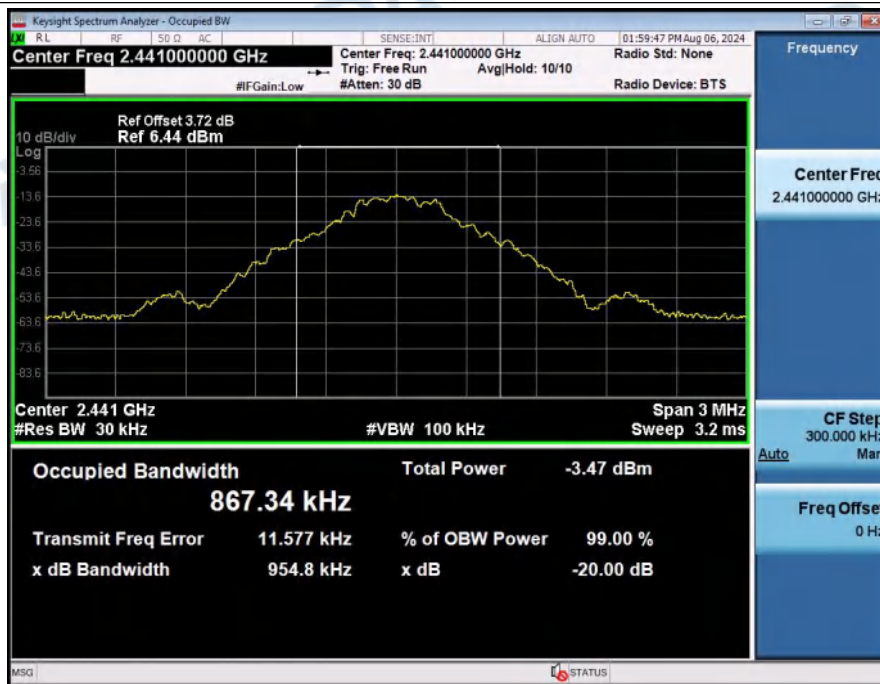


-20dB_Bandwidth_NVNT_ANT1_1-DH5_2480_00

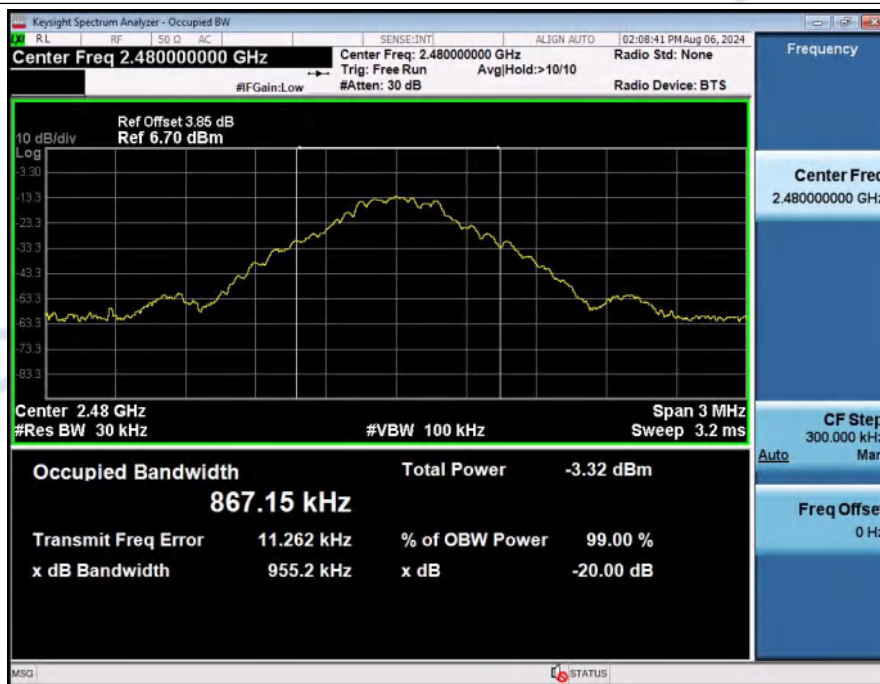


-20dB_Bandwidth_NVNT_ANT1_2-DH5_2402_00

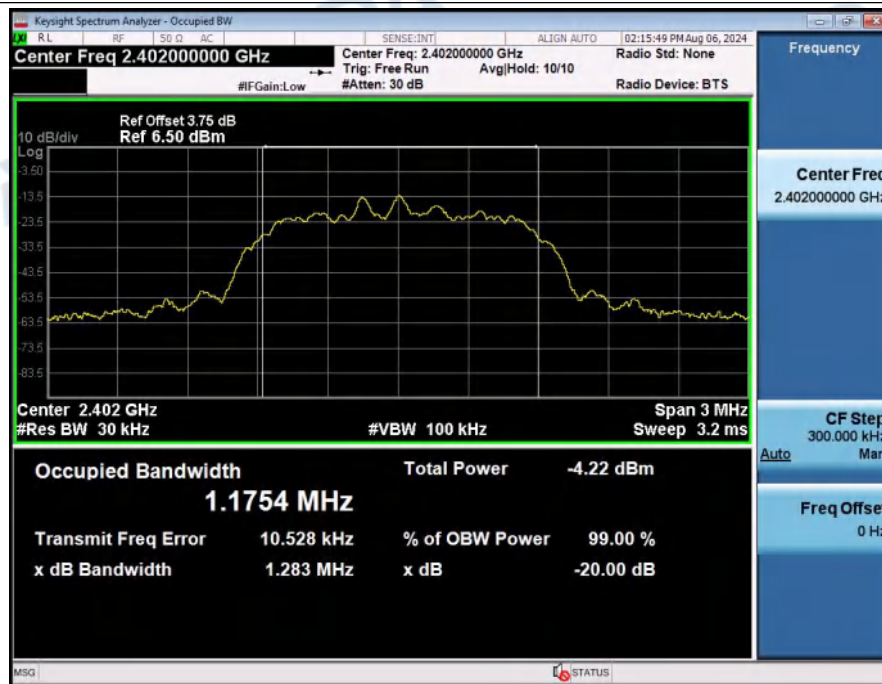

-20dB_Bandwidth_NVNT_ANT1_2-DH5_2441_00

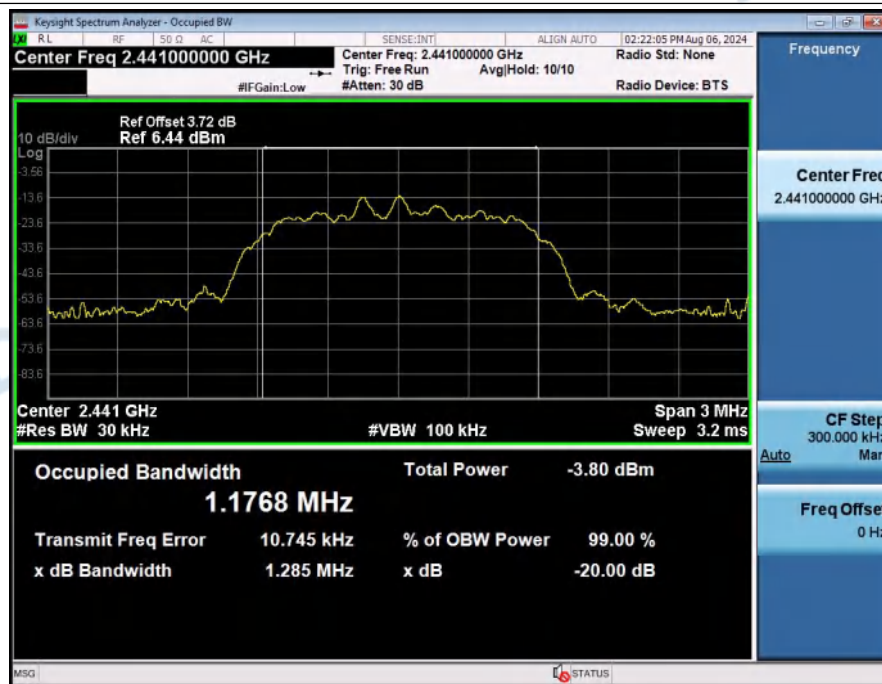


-20dB_Bandwidth_NVNT_ANT1_2-DH5_2480_00

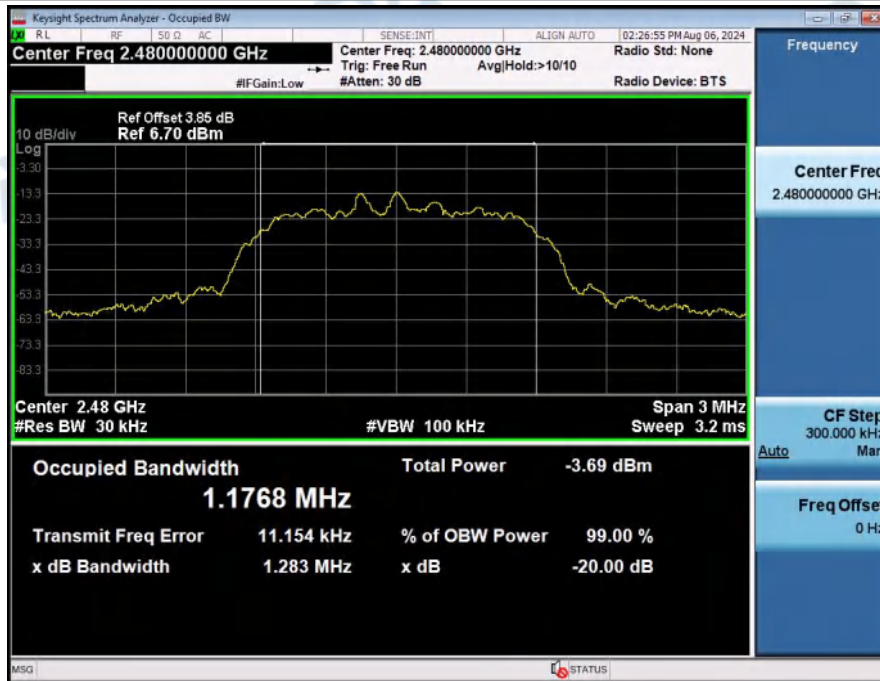

2. 99% Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	1-DH5	2402.00	0.863
NVNT	ANT1	1-DH5	2441.00	0.869
NVNT	ANT1	1-DH5	2480.00	0.870
NVNT	ANT1	2-DH5	2402.00	1.175
NVNT	ANT1	2-DH5	2441.00	1.174
NVNT	ANT1	2-DH5	2480.00	1.177


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2402_00

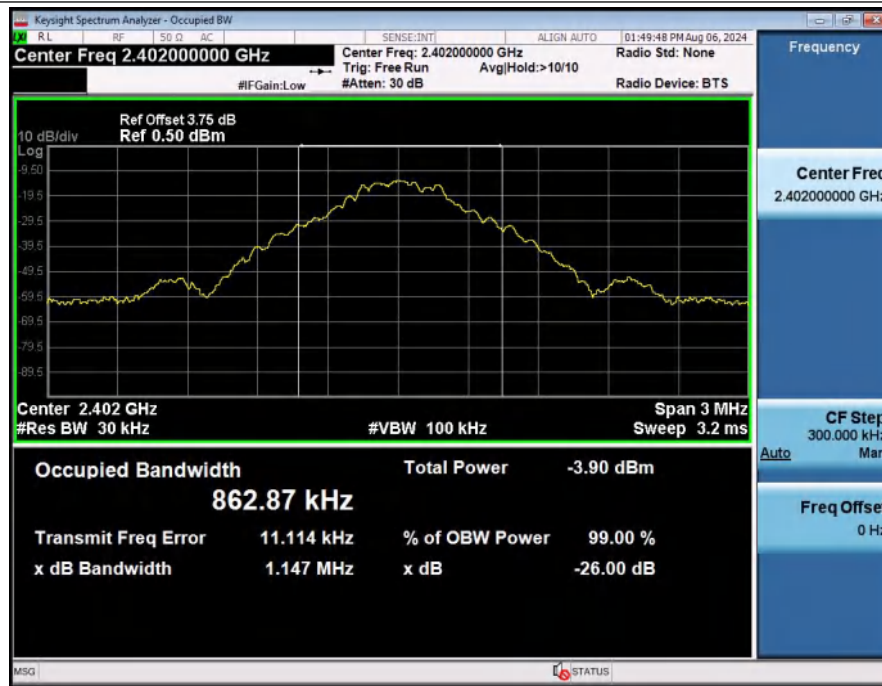

99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2441_00




99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2480_00

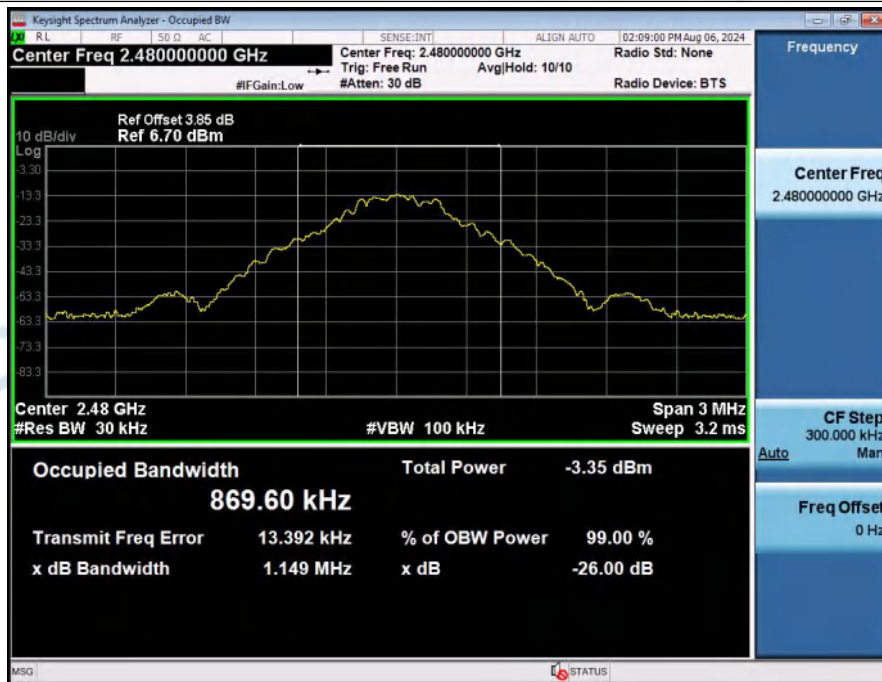

99%_Occupied_Bandwidth_NVNT_ANT1_2-DH5_2402_00



99%_Occupied_Bandwidth_NVNT_ANT1_2-DH5_2441_00

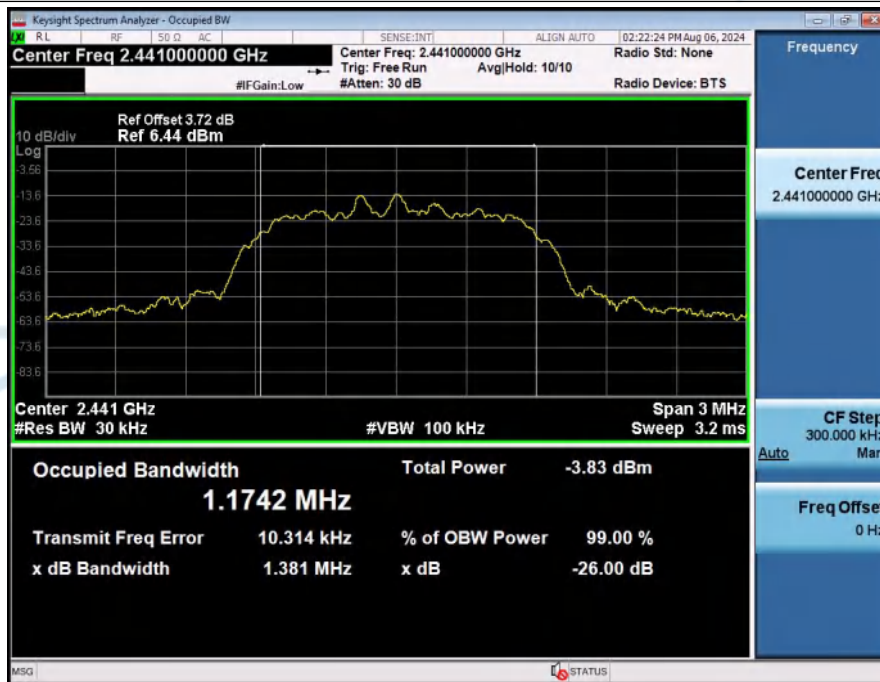

99%_Occupied_Bandwidth_NVNT_ANT1_2-DH5_2480_00




3. Peak Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH5	2402.00	-11.40	0.07	1000	Pass
NVNT	ANT1	1-DH5	2441.00	-10.85	0.08	1000	Pass
NVNT	ANT1	1-DH5	2480.00	-10.80	0.08	1000	Pass
NVNT	ANT1	2-DH5	2402.00	-10.26	0.09	125	Pass
NVNT	ANT1	2-DH5	2441.00	-9.84	0.10	125	Pass
NVNT	ANT1	2-DH5	2480.00	-9.76	0.11	125	Pass

Peak_Output_Power_NVNT_ANT1_1-DH5_2402_00



Peak_Output_Power_NVNT_ANT1_1-DH5_2441_00

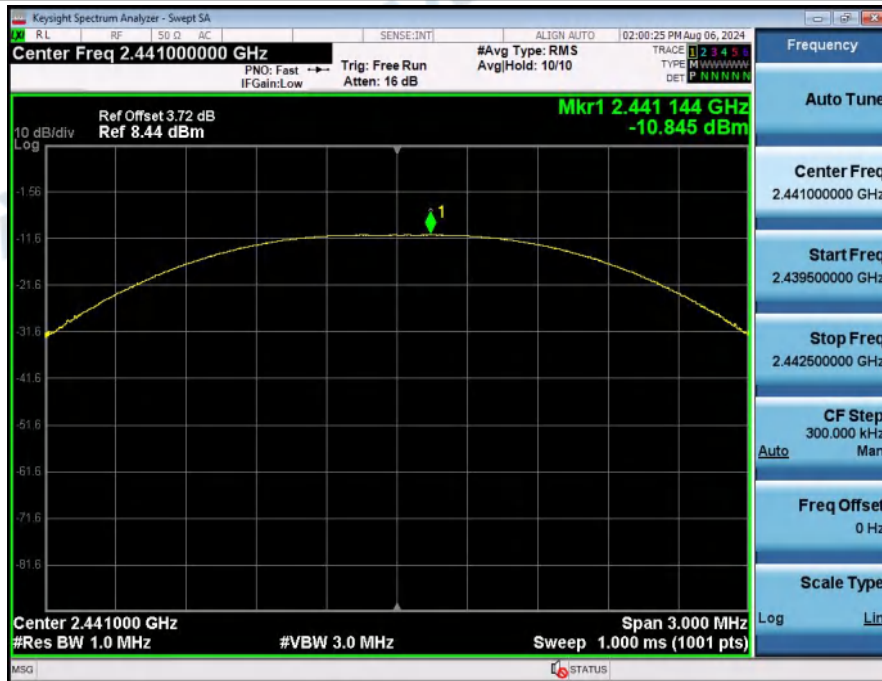

Peak_Output_Power_NVNT_ANT1_1-DH5_2480_00



Peak_Output_Power_NVNT_ANT1_2-DH5_2402_00



Peak_Output_Power_NVNT_ANT1_2-DH5_2441_00



Peak_Output_Power_NVNT_ANT1_2-DH5_2480_00




4. Spurious Emissions

Condition	Antenna	Modulation	TX Mode	Spurious MAX.Value(dBm)	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-54.199	-31.562	Pass
NVNT	ANT1	1-DH5	2441.00	-55.223	-31.087	Pass
NVNT	ANT1	1-DH5	2480.00	-47.568	-30.958	Pass
NVNT	ANT1	2-DH5	2402.00	-48.357	-31.422	Pass
NVNT	ANT1	2-DH5	2441.00	-43.232	-30.966	Pass
NVNT	ANT1	2-DH5	2480.00	-42.881	-30.874	Pass

1_Reference_Level_NVNT_ANT1_1-DH5_2402_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2402_00

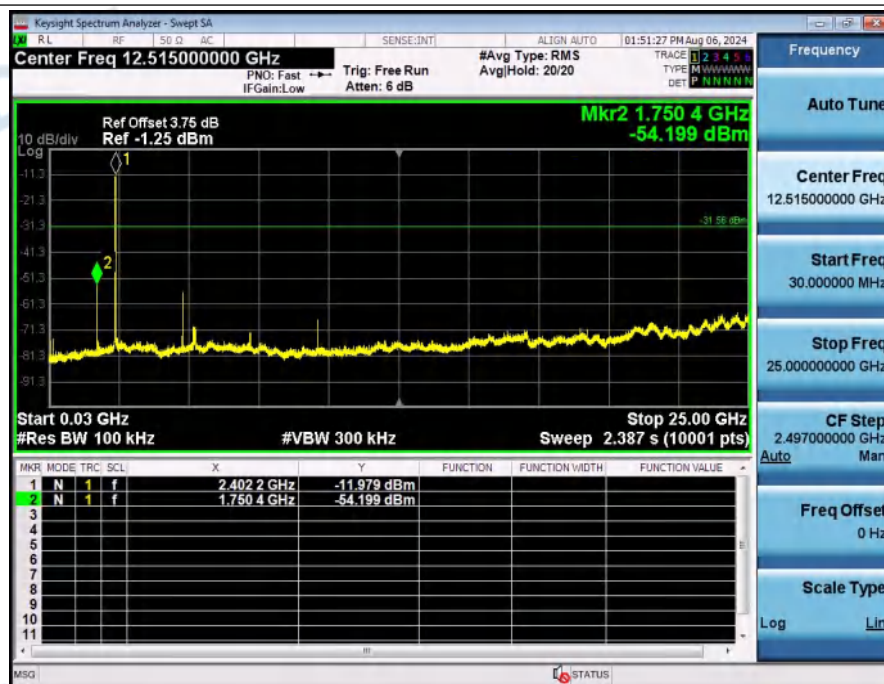

1_Reference_Level_NVNT_ANT1_1-DH5_2441_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2441_00

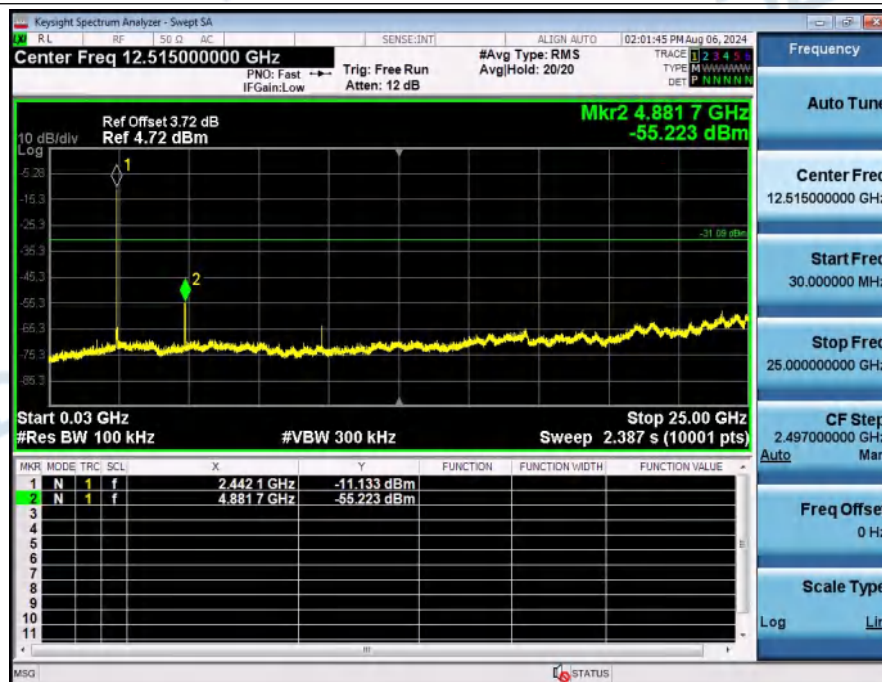


1_Reference_Level_NVNT_ANT1_1-DH5_2480_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2480_00

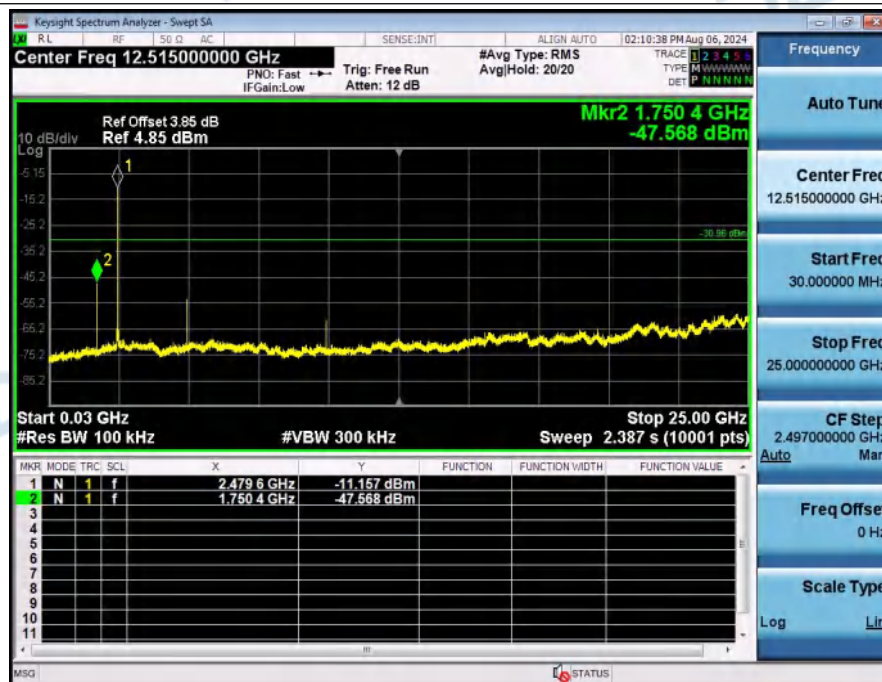

1_Reference_Level_NVNT_ANT1_2-DH5_2402_00

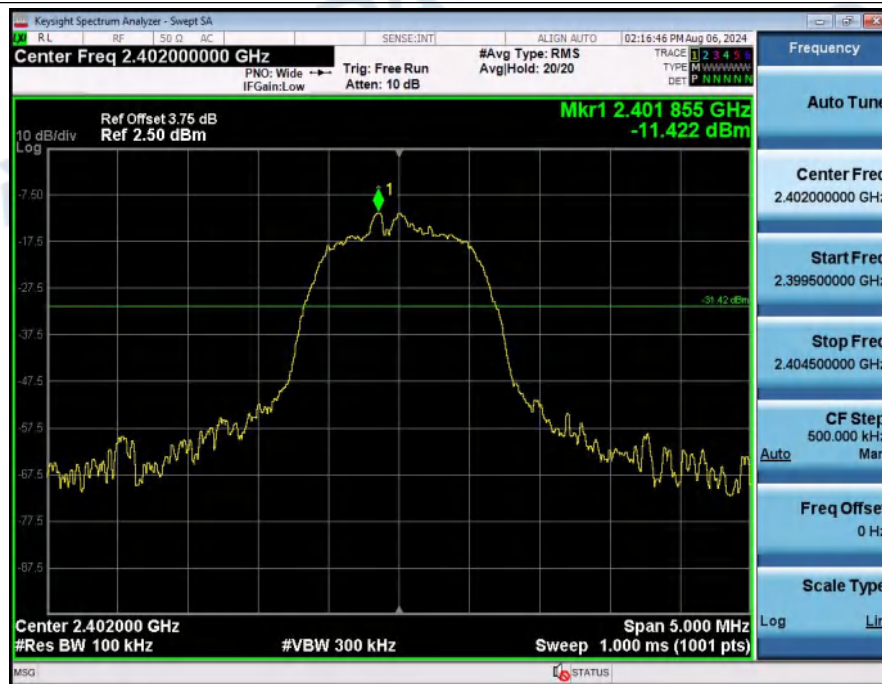


2_Spurious_Emissions_NVNT_ANT1_2-DH5_2402_00

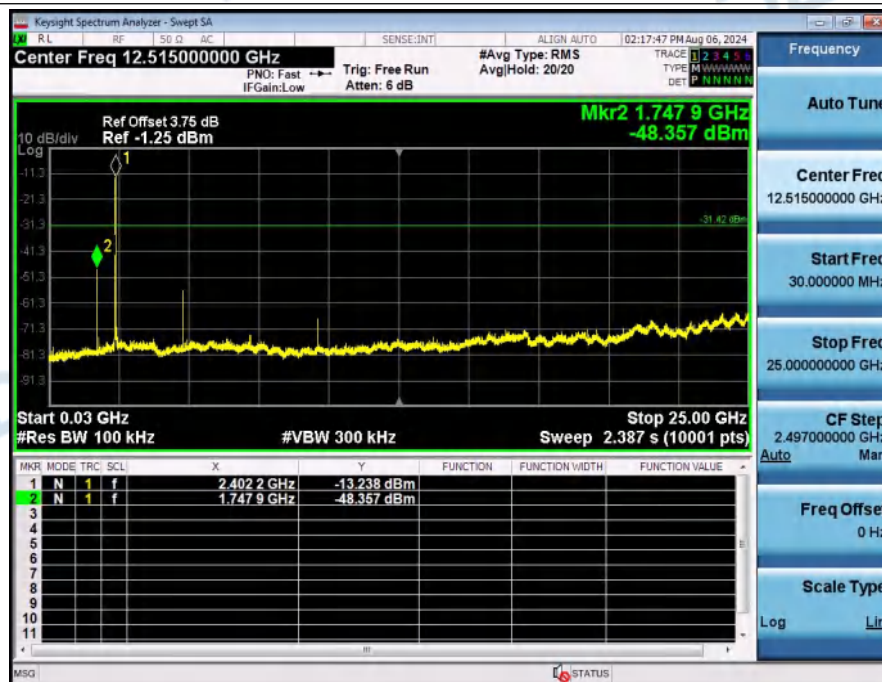

1_Reference_Level_NVNT_ANT1_2-DH5_2441_00




2_Spurious_Emissions_NVNT_ANT1_2-DH5_2441_00

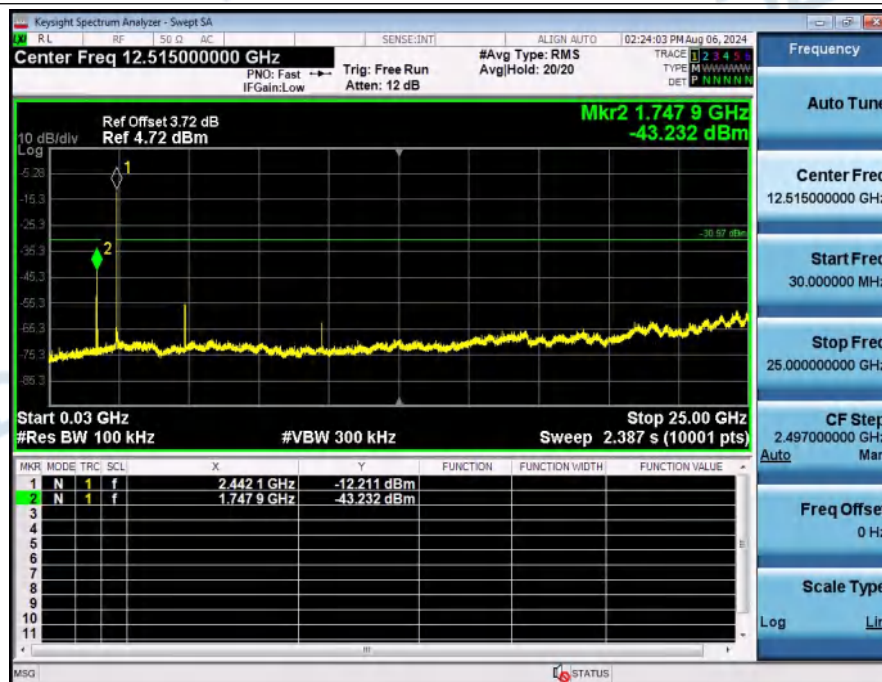

1_Reference_Level_NVNT_ANT1_2-DH5_2480_00



2_Spurious_Emissions_NVNT_ANT1_2-DH5_2480_00

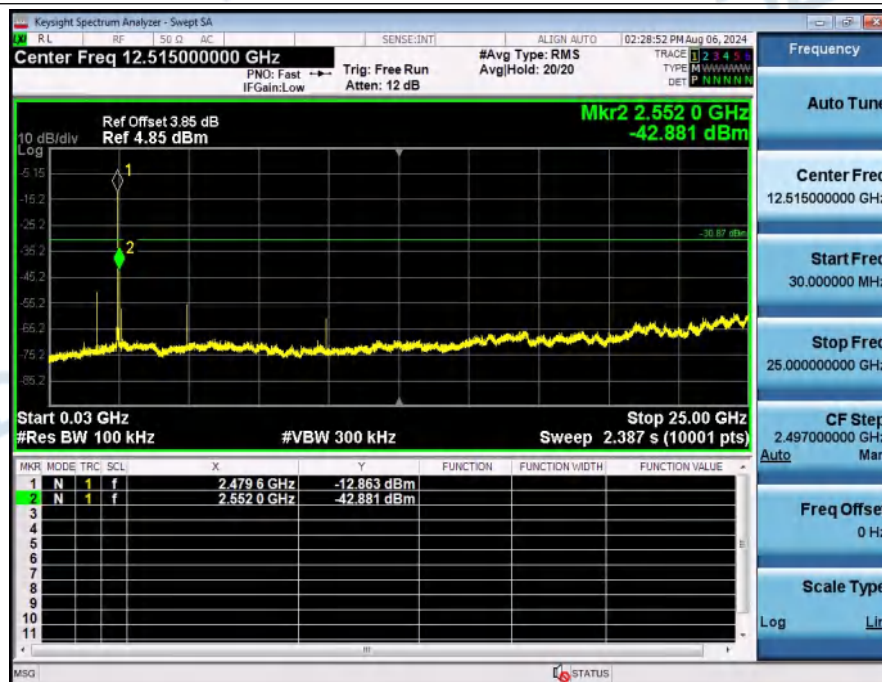


5. Bandedge

Condition	Antenna	Modulation	TX Mode	Bandedge MAX.Value	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-62.399	-31.562	Pass
NVNT	ANT1	1-DH5	Hopping_LCH	-64.215	-30.895	Pass
NVNT	ANT1	1-DH5	2480.00	-63.828	-30.958	Pass
NVNT	ANT1	1-DH5	Hopping_HCH	-64.356	-30.763	Pass
NVNT	ANT1	2-DH5	2402.00	-60.007	-31.422	Pass
NVNT	ANT1	2-DH5	Hopping_LCH	-65.339	-30.856	Pass
NVNT	ANT1	2-DH5	2480.00	-64.706	-30.874	Pass
NVNT	ANT1	2-DH5	Hopping_HCH	-64.014	-30.719	Pass


1_Reference_Level_NVNT_ANT1_1-DH5_2402_00




2_Bandedge_NVNT_ANT1_1-DH5_2402_00

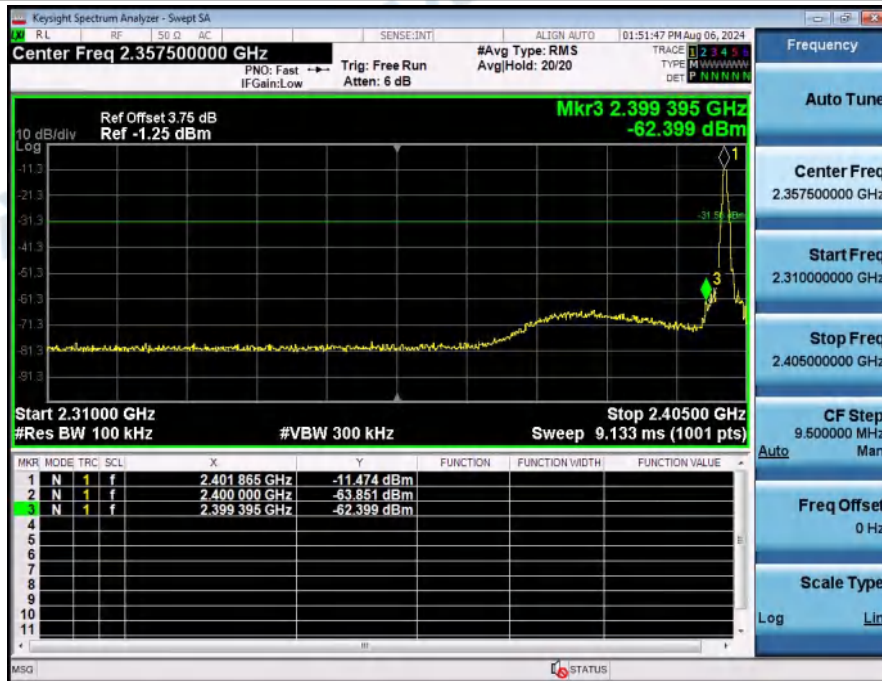

1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping

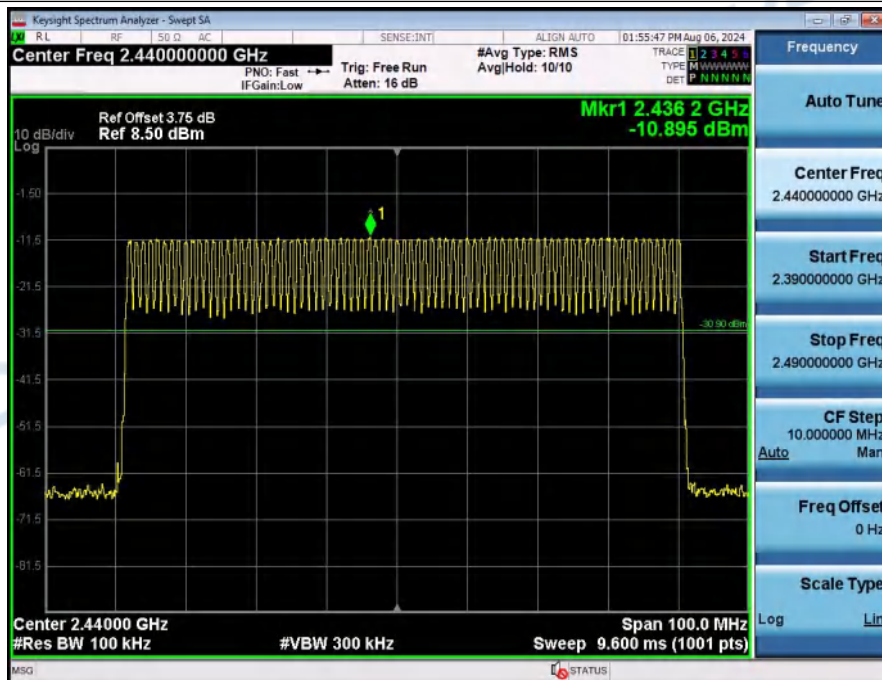


2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

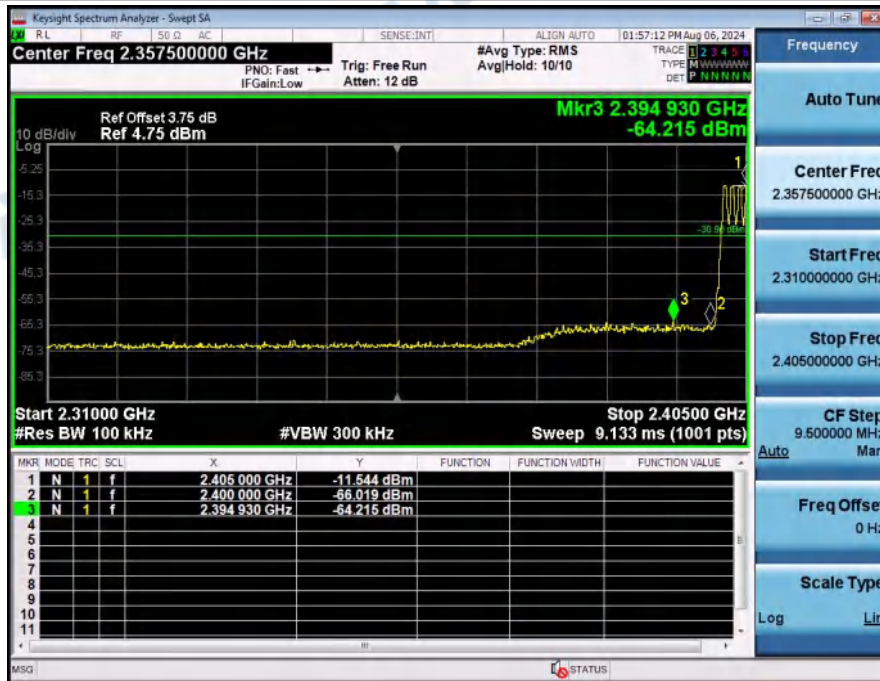


1_Reference_Level_NVNT_ANT1_1-DH5_2480_00




2_Bandedge_NVNT_ANT1_1-DH5_2480_00

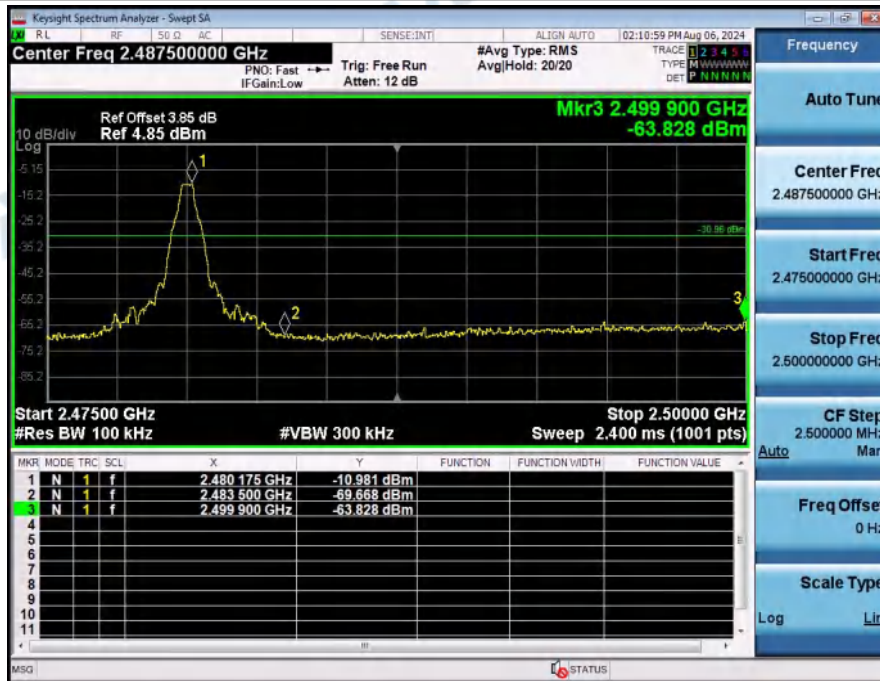


1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping

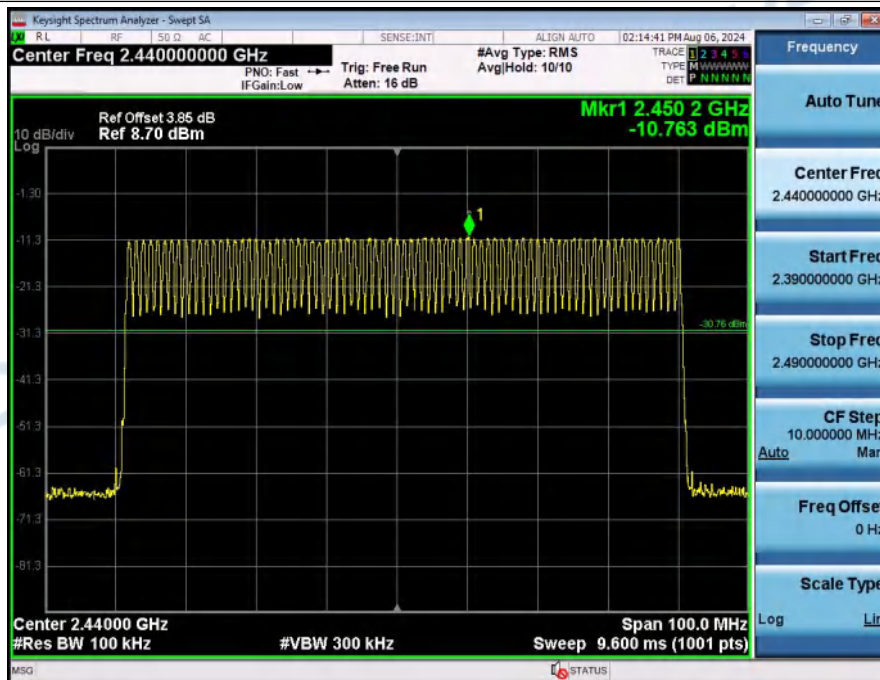


2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

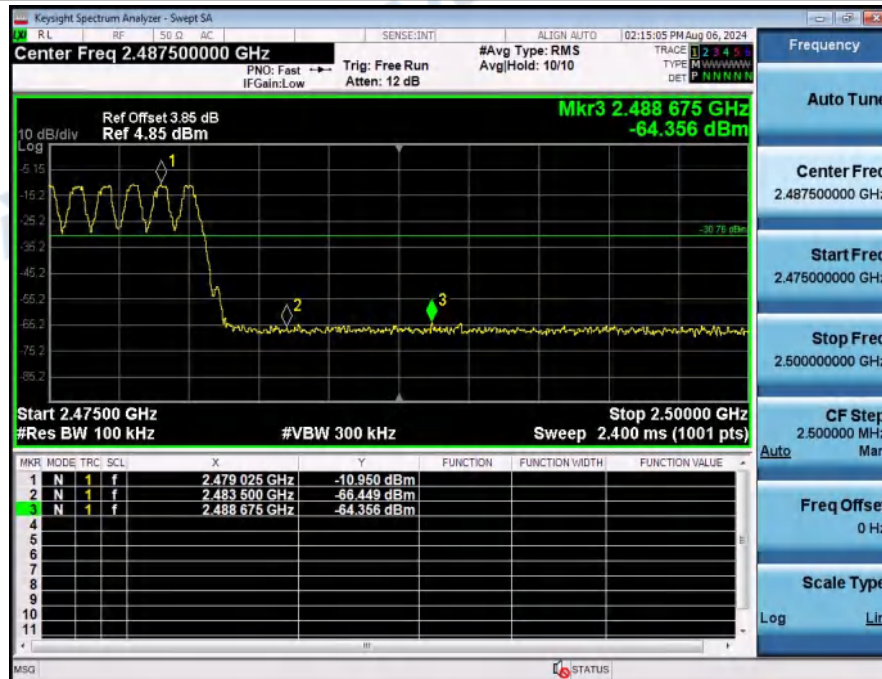


1_Reference_Level_NVNT_ANT1_2-DH5_2402_00

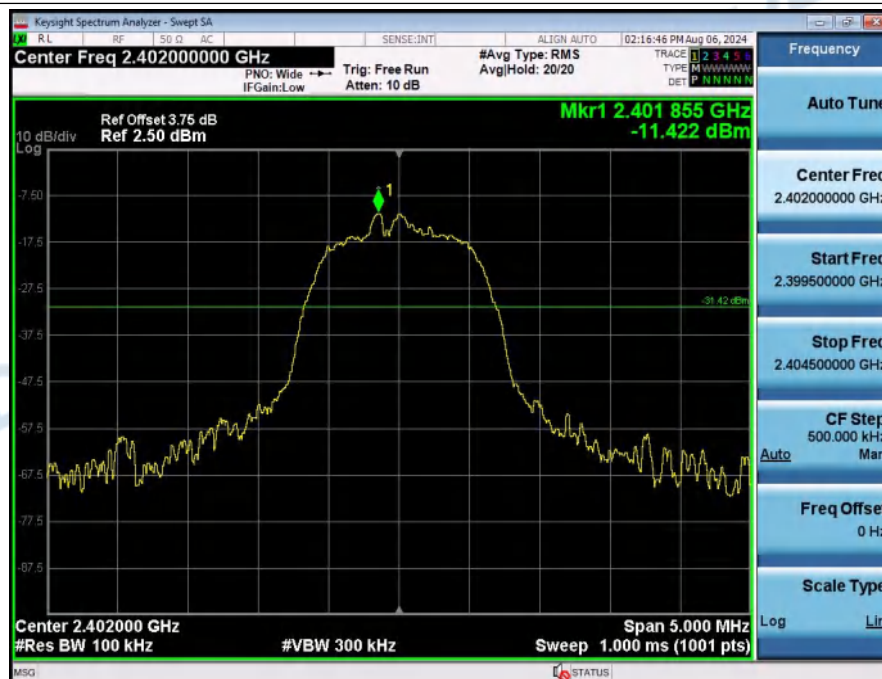


2_Bandedge_NVNT_ANT1_2-DH5_2402_00

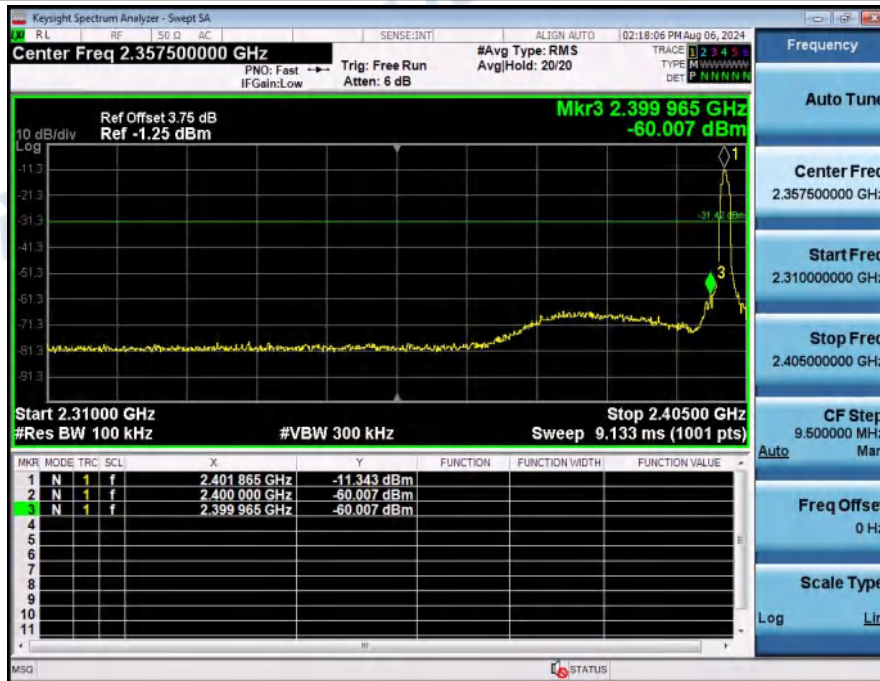

1_Reference_Level_Hopping_NVNT_ANT1_2-DH5_Hopping

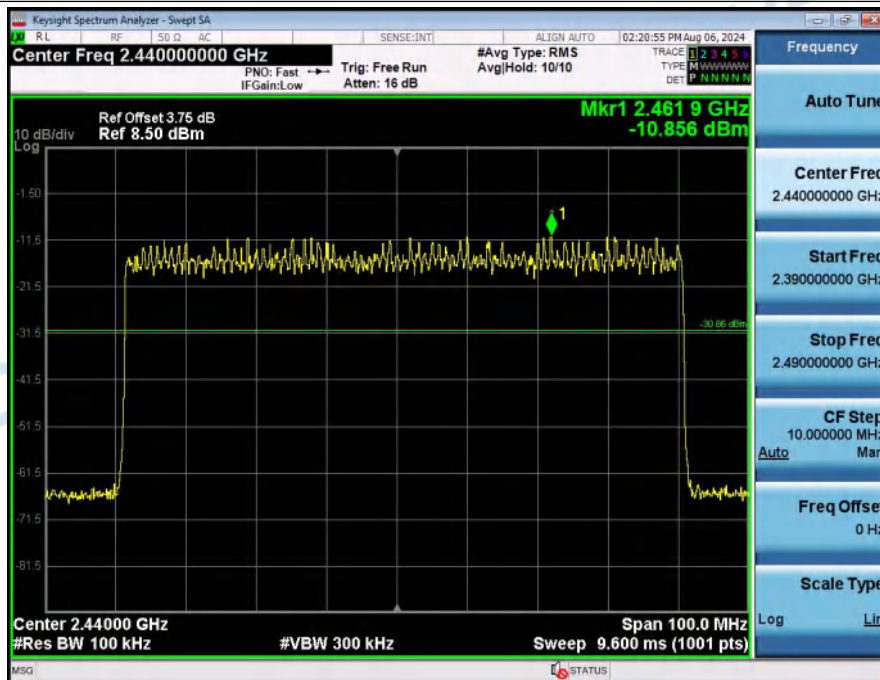


2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH5_Hopping

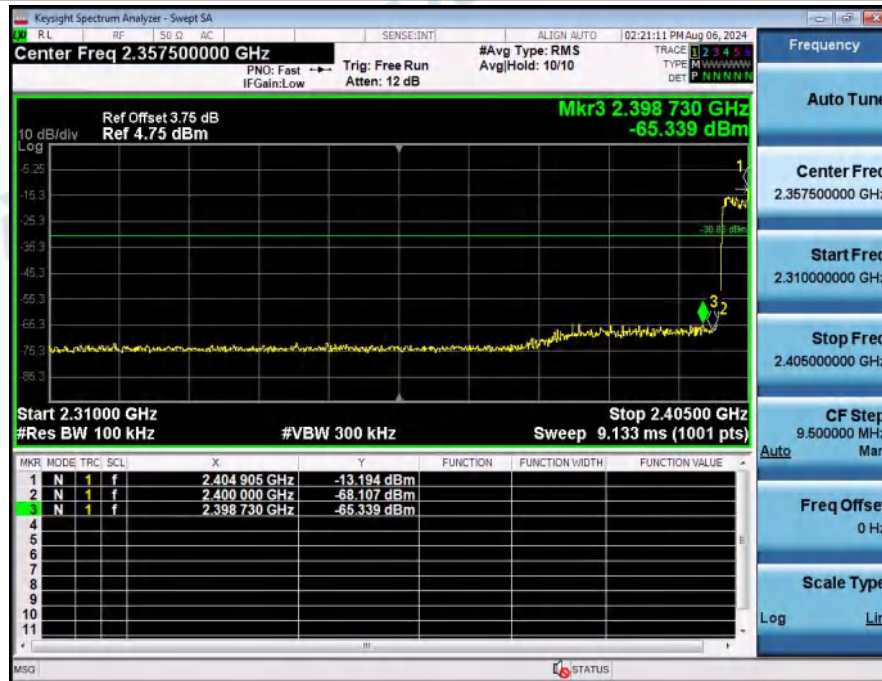


1_Reference_Level_NVNT_ANT1_2-DH5_2480_00




2_Bandedge_NVNT_ANT1_2-DH5_2480_00

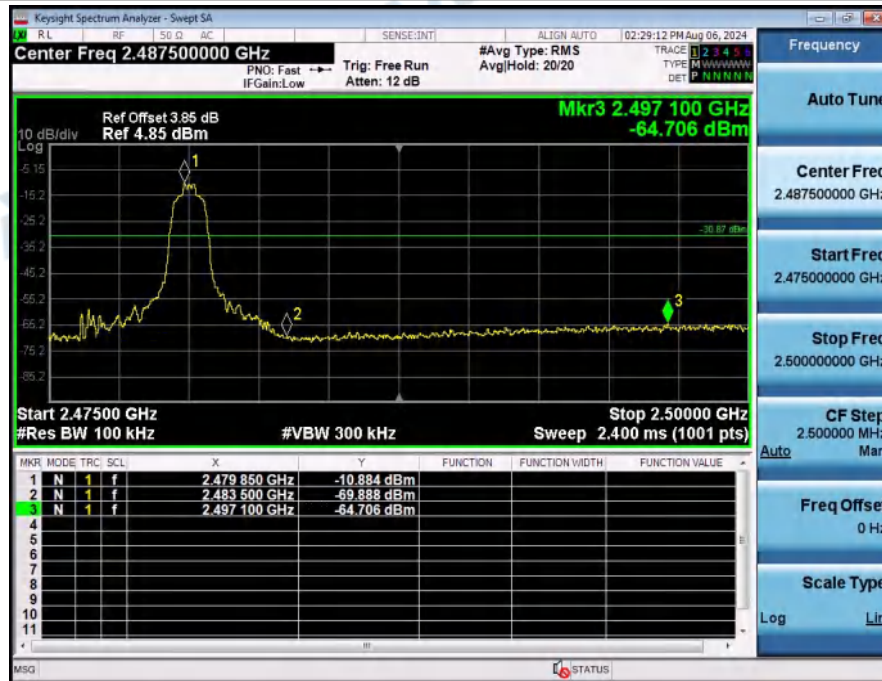

1_Reference_Level_Hopping_NVNT_ANT1_2-DH5_Hopping

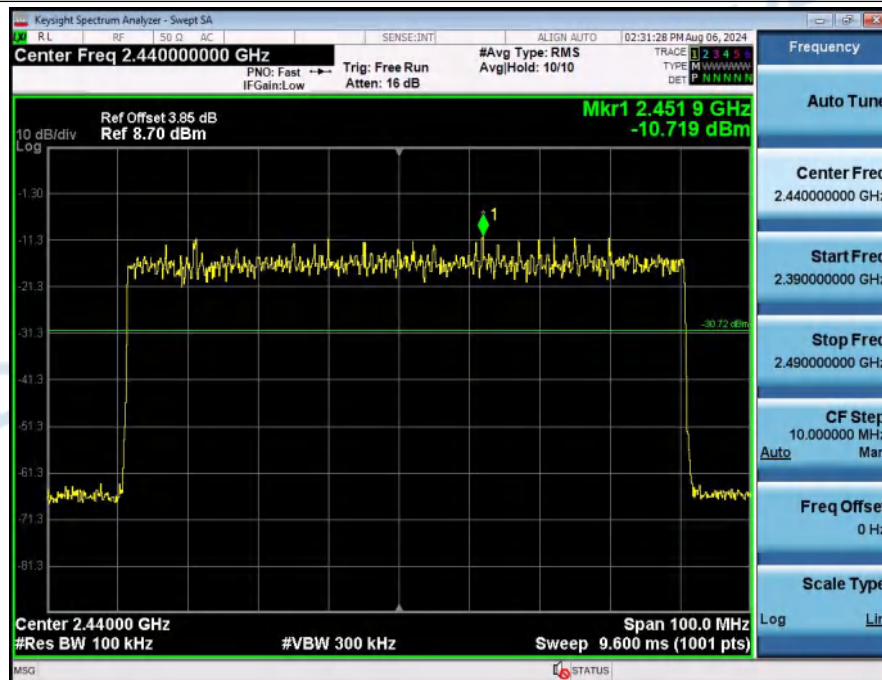

2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH5_Hopping

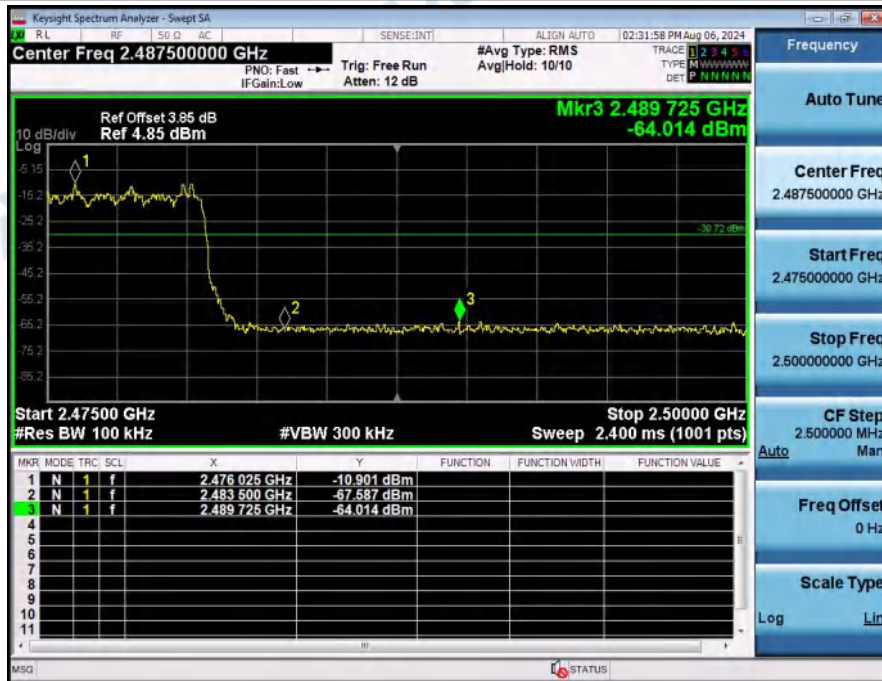

6. Carrier Frequencies Separation (Hopping)

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH5	2402.00	2401.867	2403.022	1.16	0.956	Pass
NVNT	ANT1	1-DH5	2441.00	2441.011	2442.172	1.16	0.955	Pass
NVNT	ANT1	1-DH5	2480.00	2478.846	2480.016	1.17	0.955	Pass
NVNT	ANT1	2-DH5	2402.00	2401.999	2403.022	1.02	0.855	Pass
NVNT	ANT1	2-DH5	2441.00	2440.855	2441.842	0.99	0.857	Pass
NVNT	ANT1	2-DH5	2480.00	2478.849	2480.013	1.16	0.855	Pass

Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_1-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_1-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_1-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH5_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH5_Hopping




Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH5_Hopping




7. Number of Hopping Channel (Hopping)

Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping

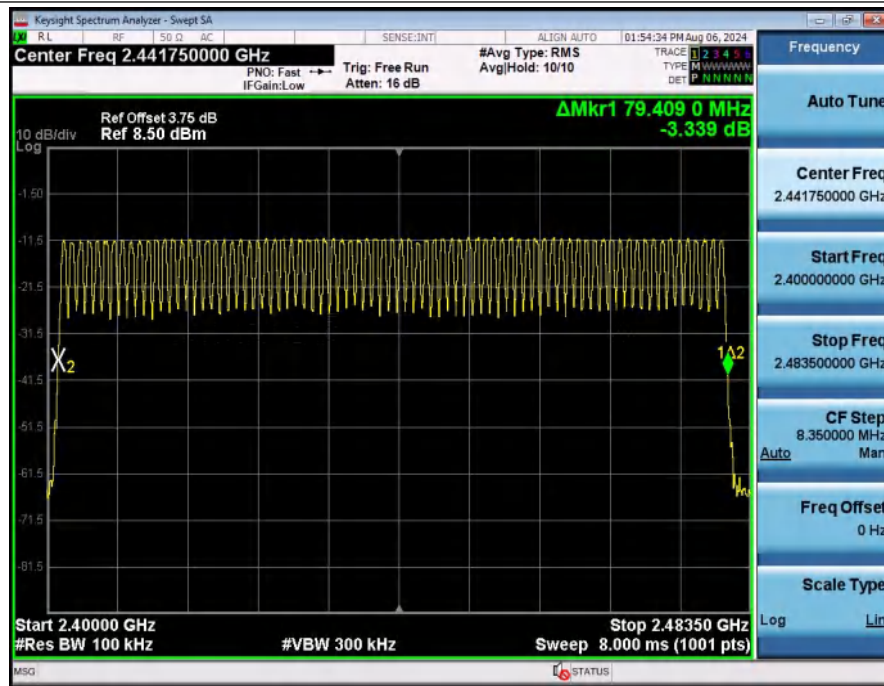


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping

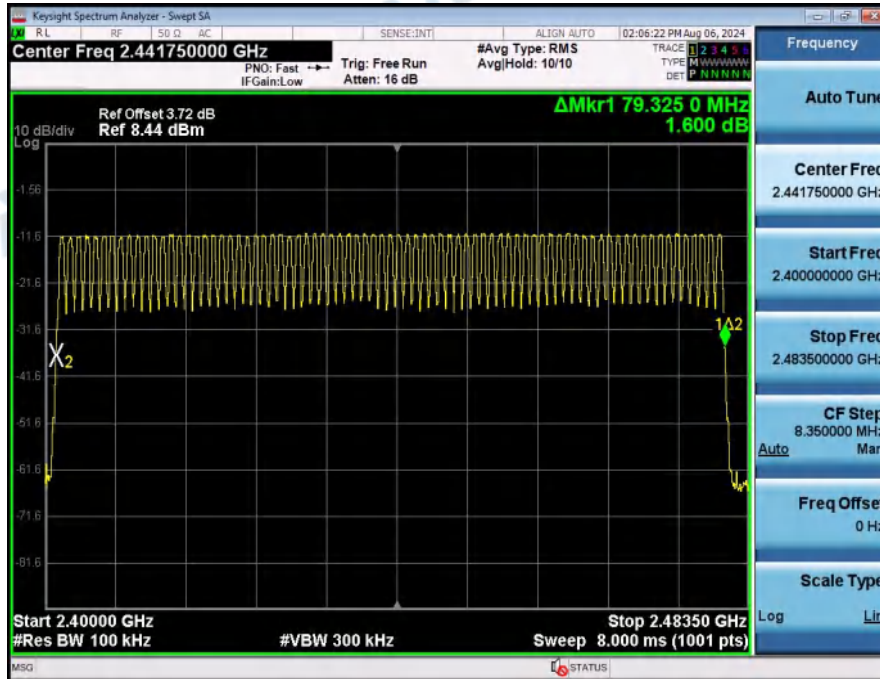


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping

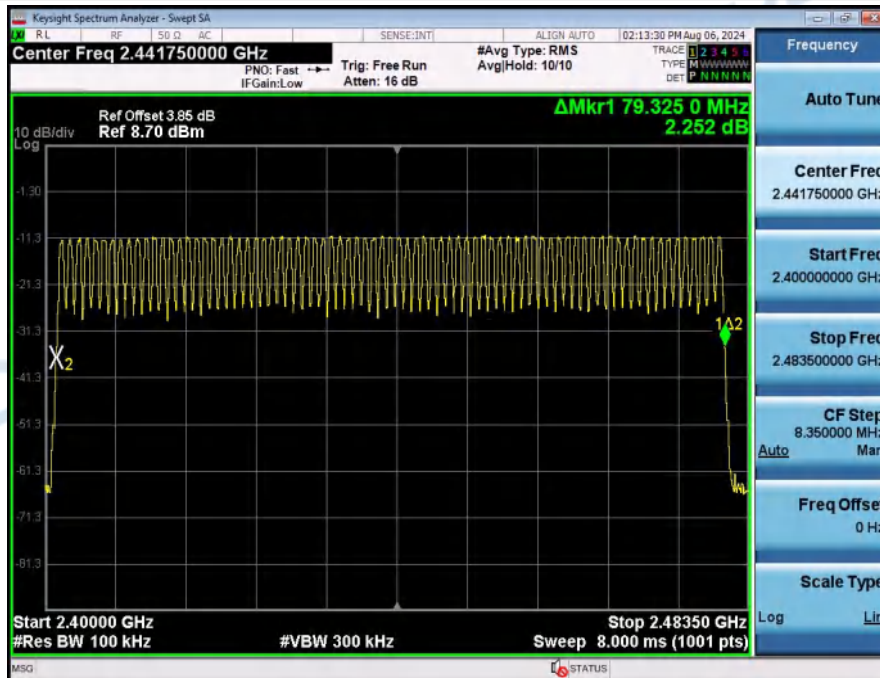


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH5_Hopping

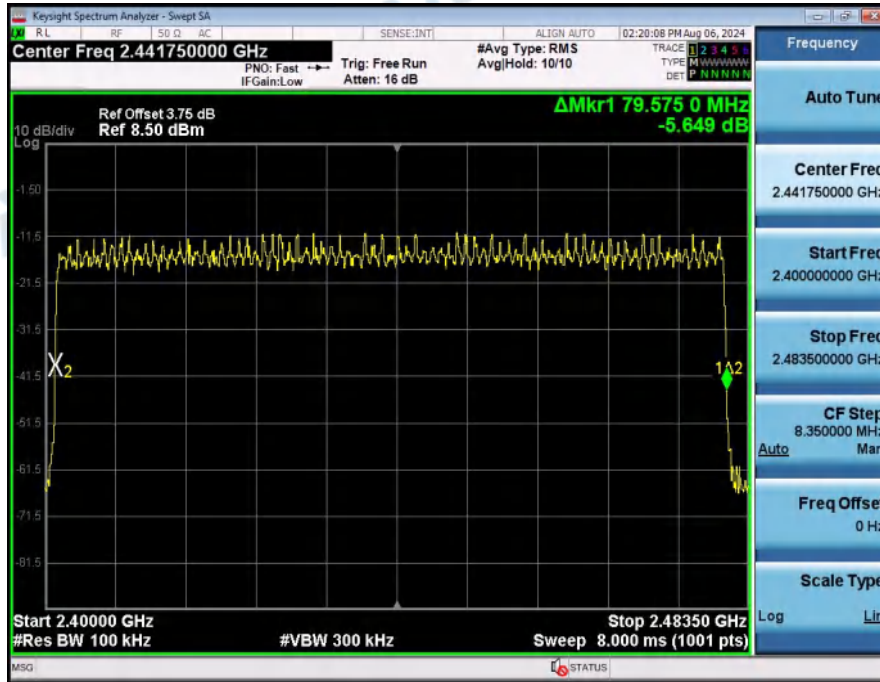

Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH5_Hopping

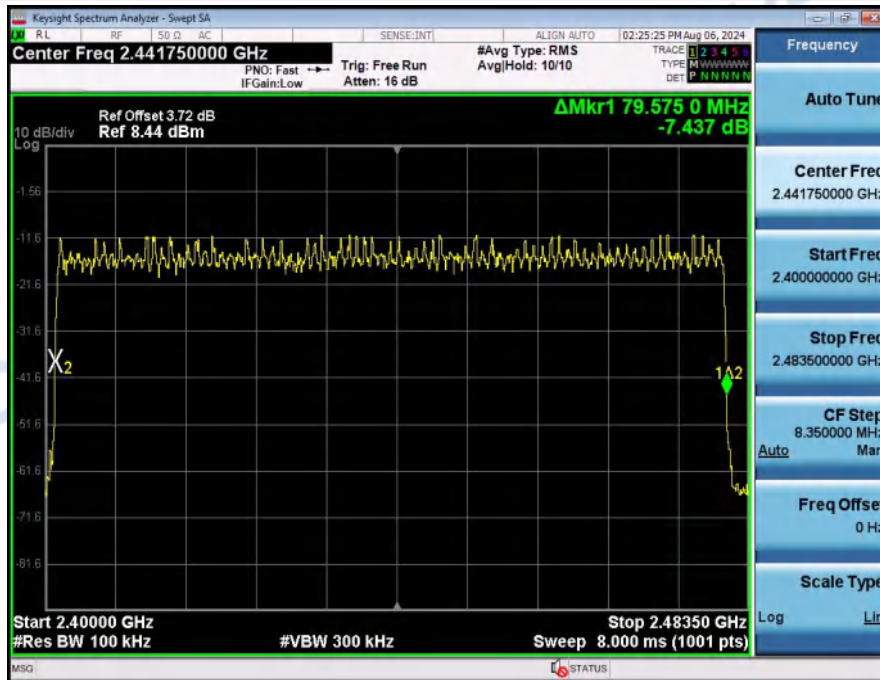


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH5_Hopping

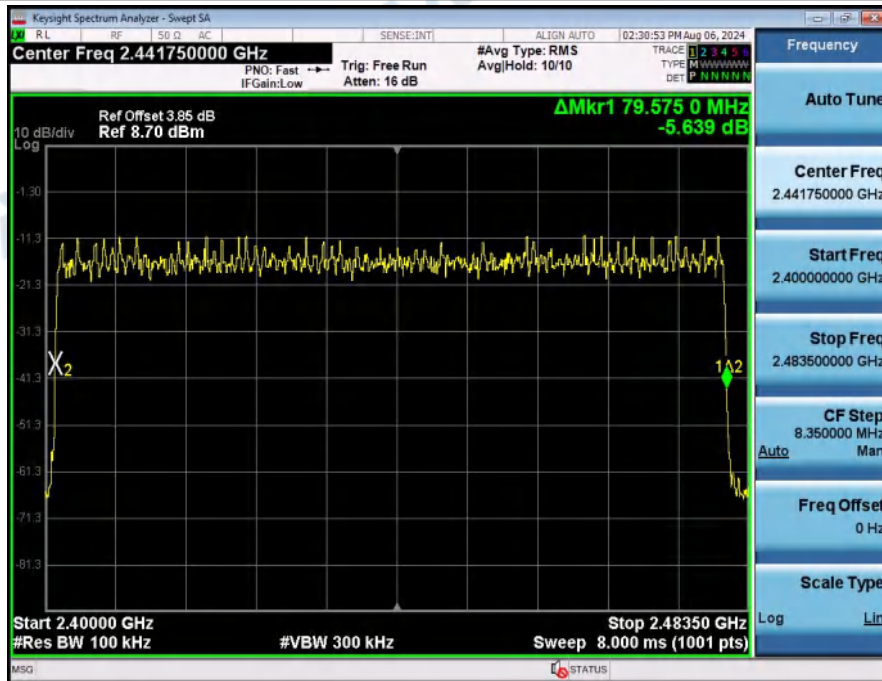


8. Dwell Time (Hopping)

Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH5	2.889	101.00	291.789	0.40	Pass
NVNT	ANT1	2-DH5	2.894	103.00	298.082	0.40	Pass
NVNT	ANT1	1-DH1	0.384	317.00	121.728	0.40	Pass
NVNT	ANT1	1-DH3	1.641	165.00	270.765	0.40	Pass
NVNT	ANT1	2-DH1	0.394	319.00	125.686	0.40	Pass
NVNT	ANT1	2-DH3	1.646	162.00	266.652	0.40	Pass


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_One_Burst_Time

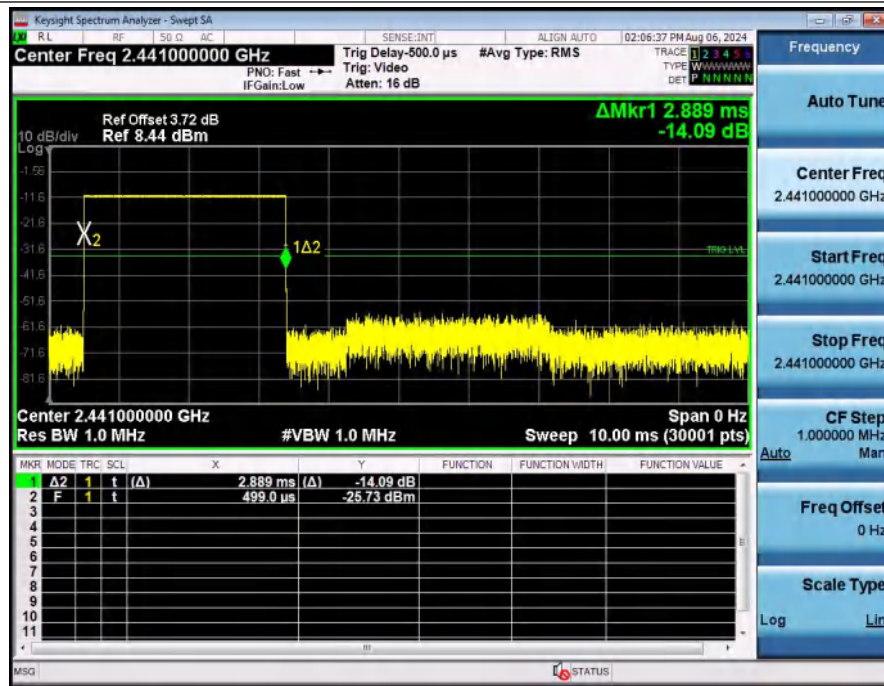


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_Accumulated

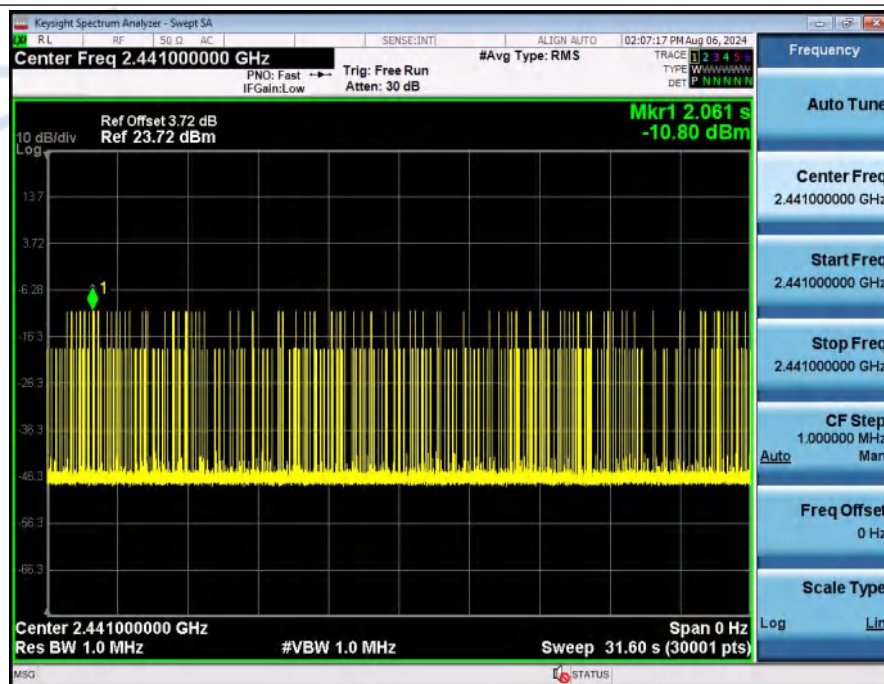


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH5_2441_00_One_Burst_Time

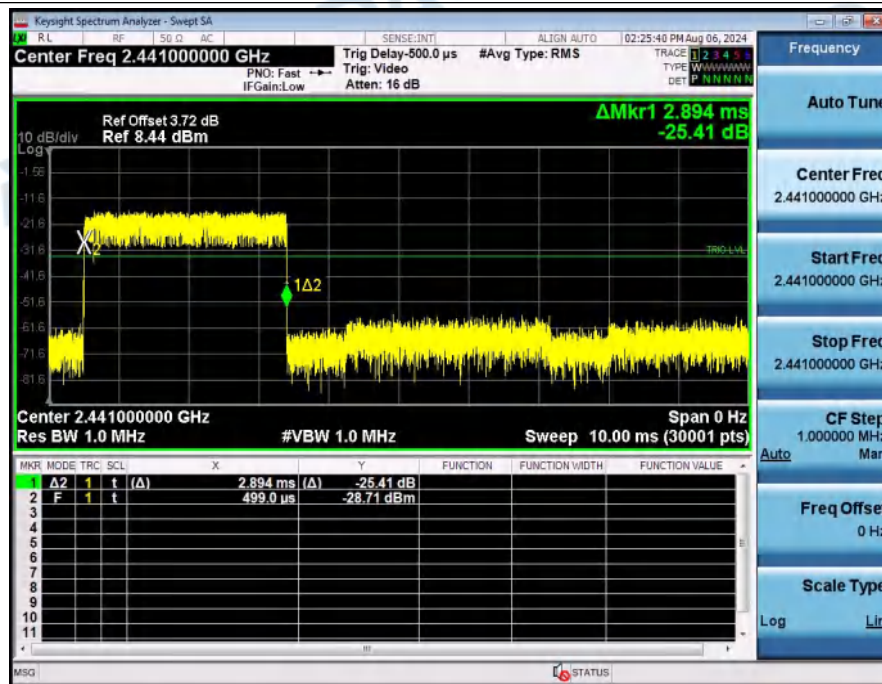


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH5_2441_00_Accumulated

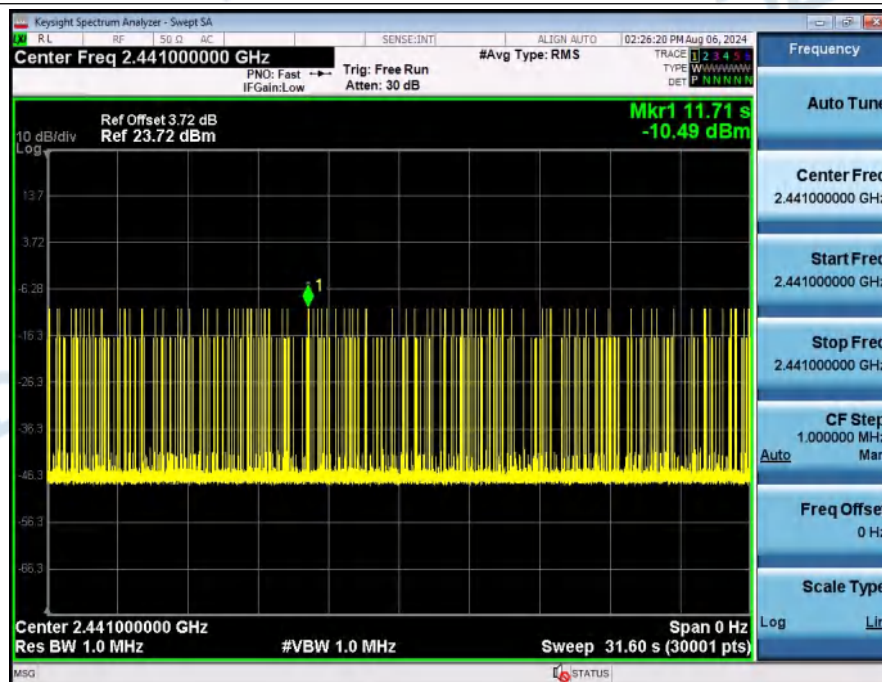


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH1_2441_00_One_Burst_Time

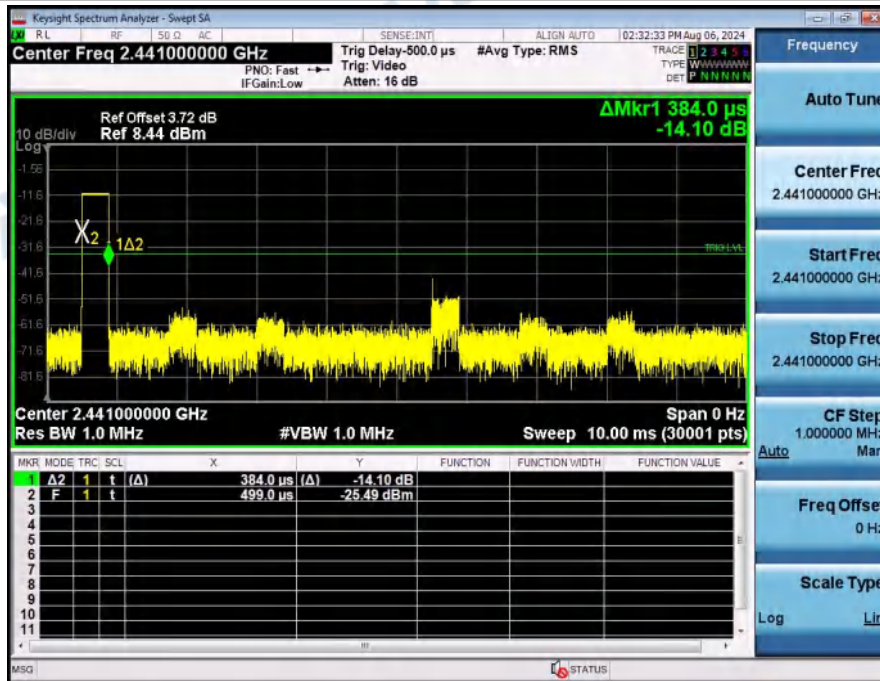


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH1_2441_00_Accumulated

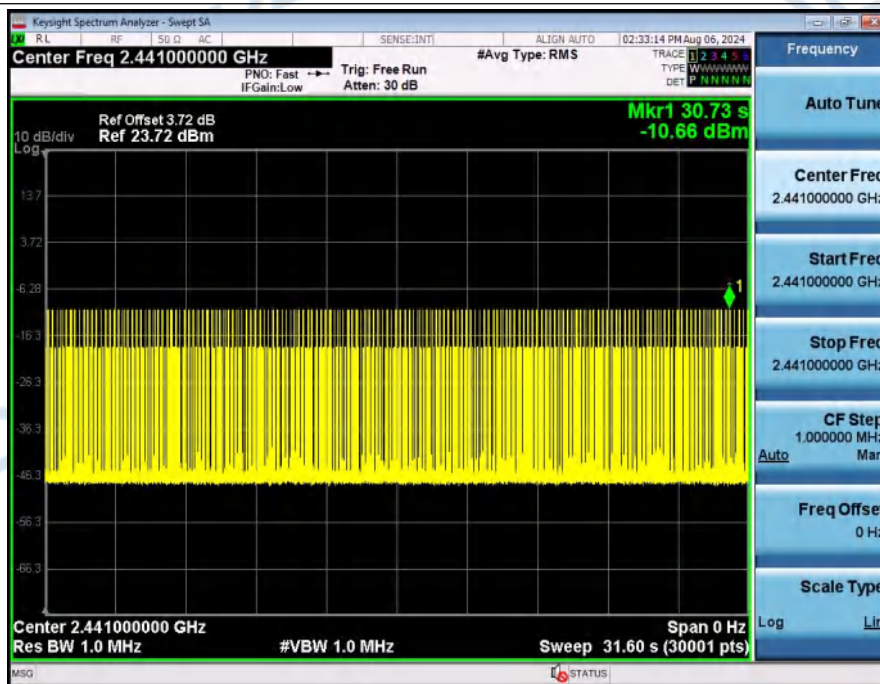


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH3_2441_00_One_Burst_Time

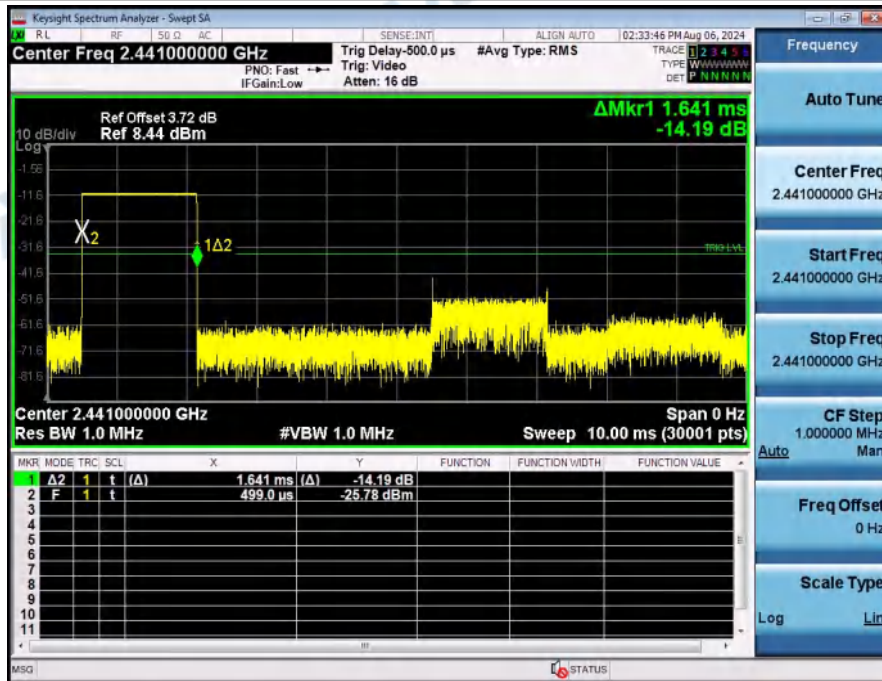


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH3_2441_00_Accumulated

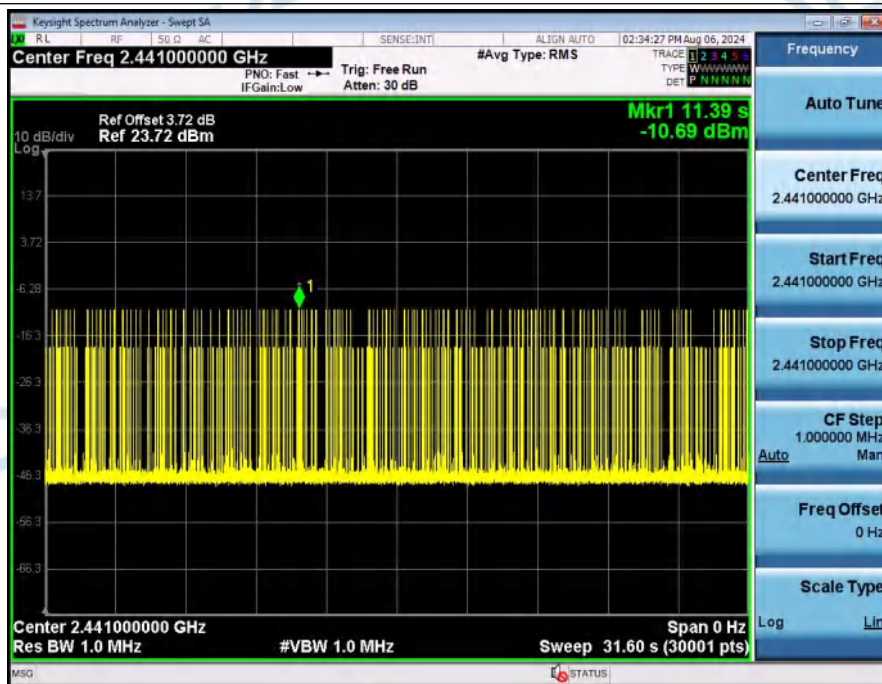


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH1_2441_00_One_Burst_Time

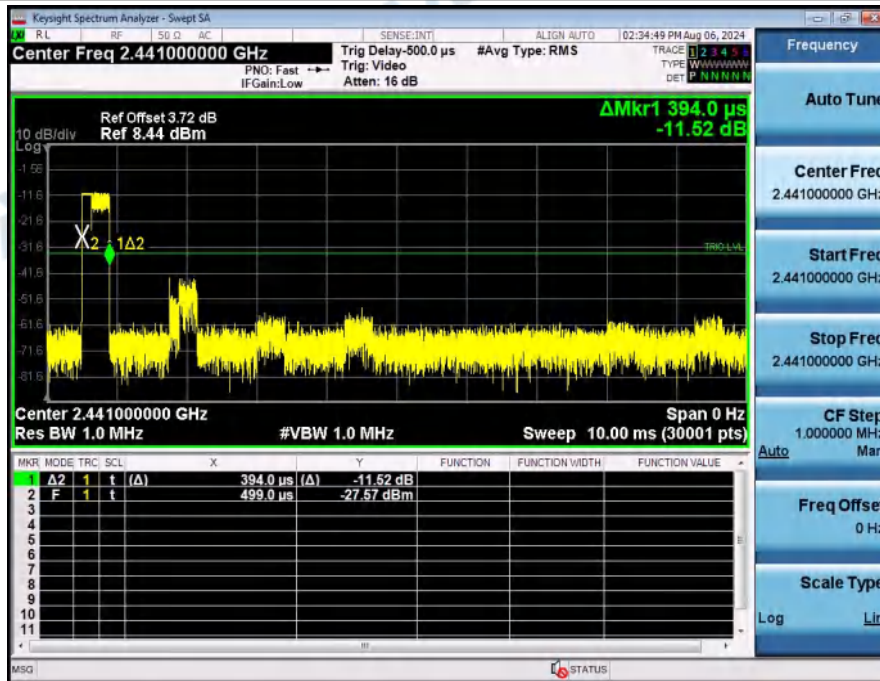


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH1_2441_00_Accumulated

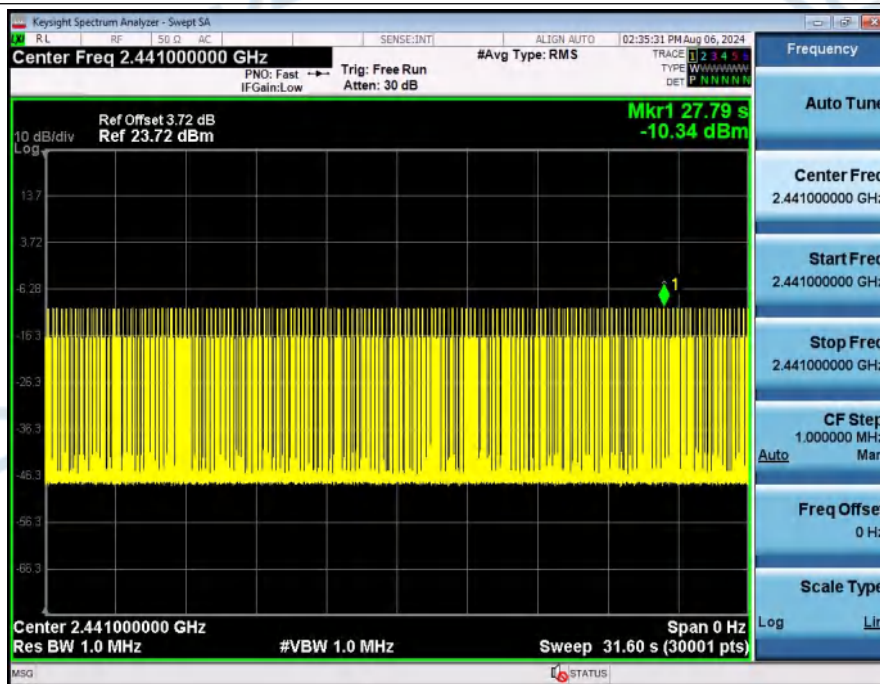

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH3_2441_00_One_Burst_Time

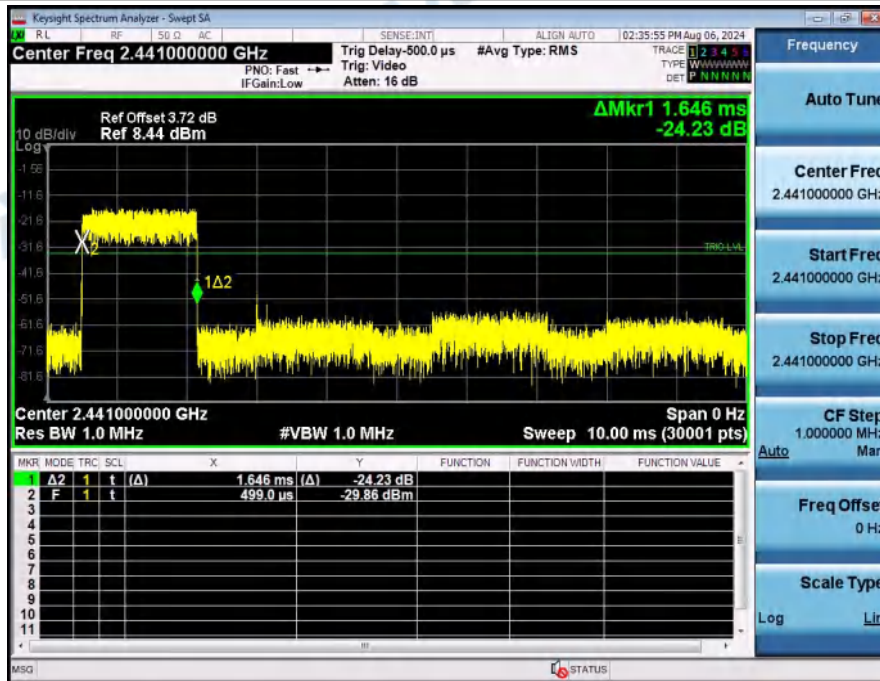

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH3_2441_00_Accumulated

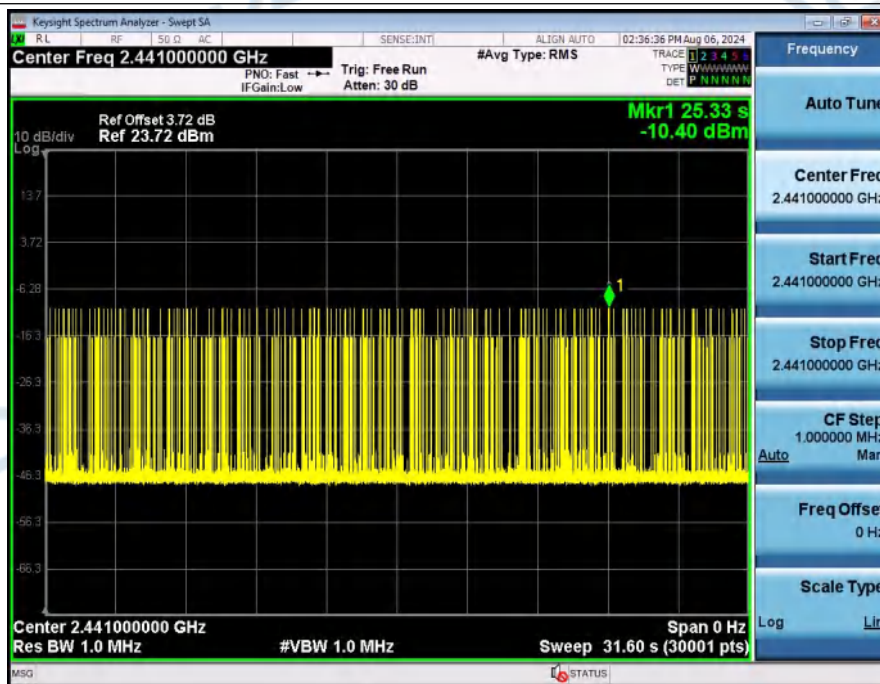

***** End of Report *****