




Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

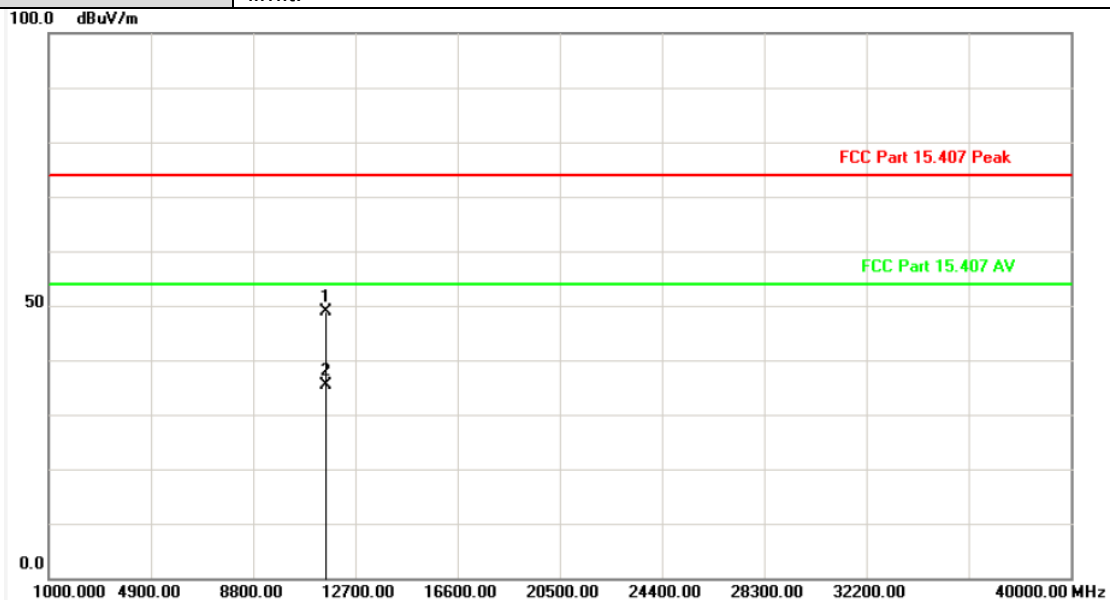

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11592.624	5.14	43.71	48.85	74.00	-25.15	peak
2	11589.046	5.14	30.23	35.37	54.00	-18.63	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

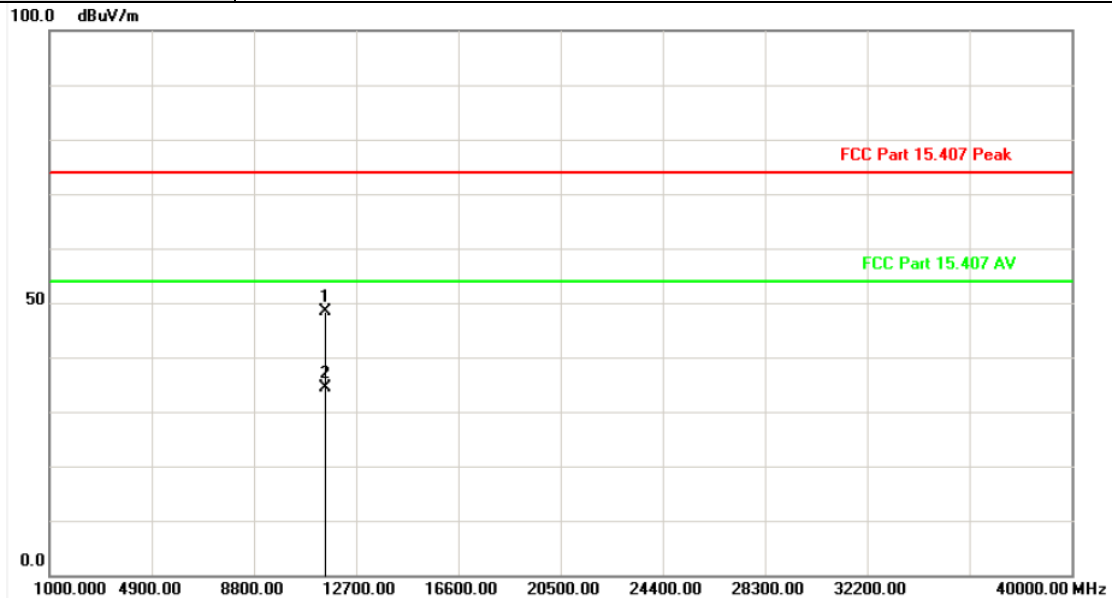

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11553.750	5.16	43.25	48.41	74.00	-25.59	peak
2	11553.277	5.16	29.32	34.48	54.00	-19.52	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

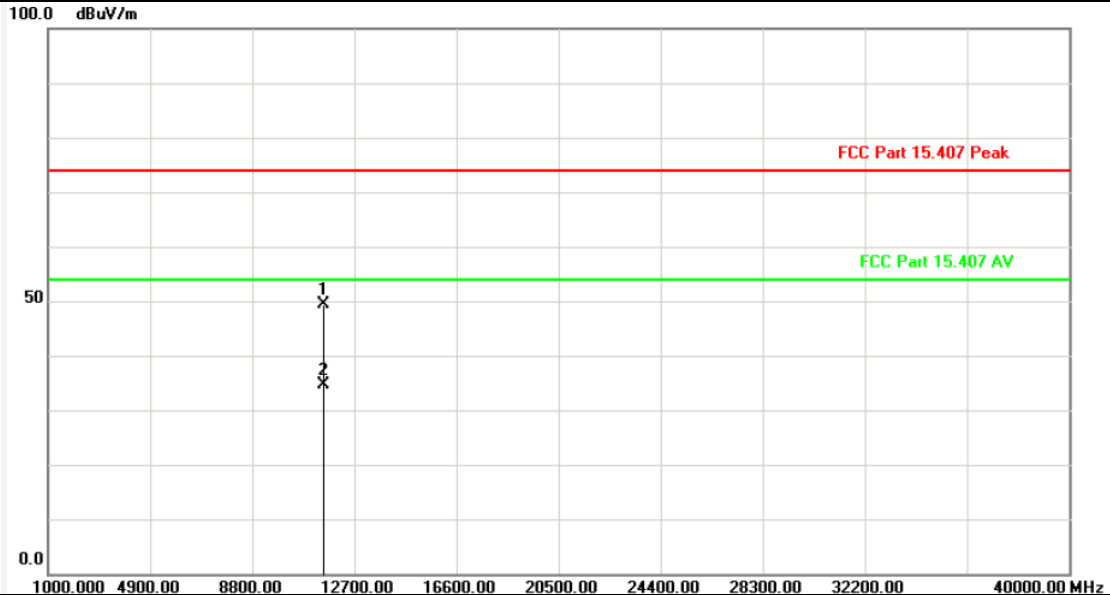

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11549.290	5.18	44.11	49.29	74.00	-24.71	peak
2	11552.675	5.16	29.59	34.75	54.00	-19.25	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

3.3. Band Edge Emissions

Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart C Section 15.407(b)/ RSS-247 6.2.1.2 & RSS-247 6.2.4.2

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2


NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Test Configuration

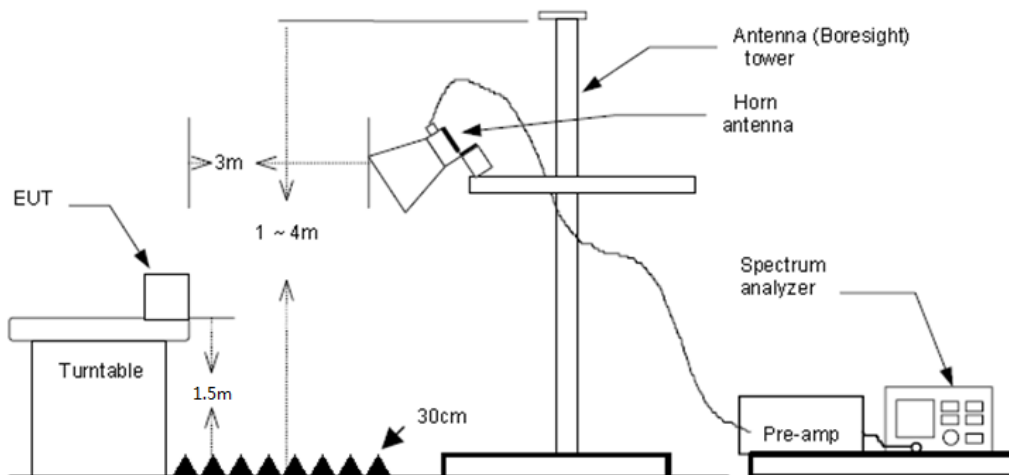

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn




RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode


Please refer to the clause 2.3

Test Results

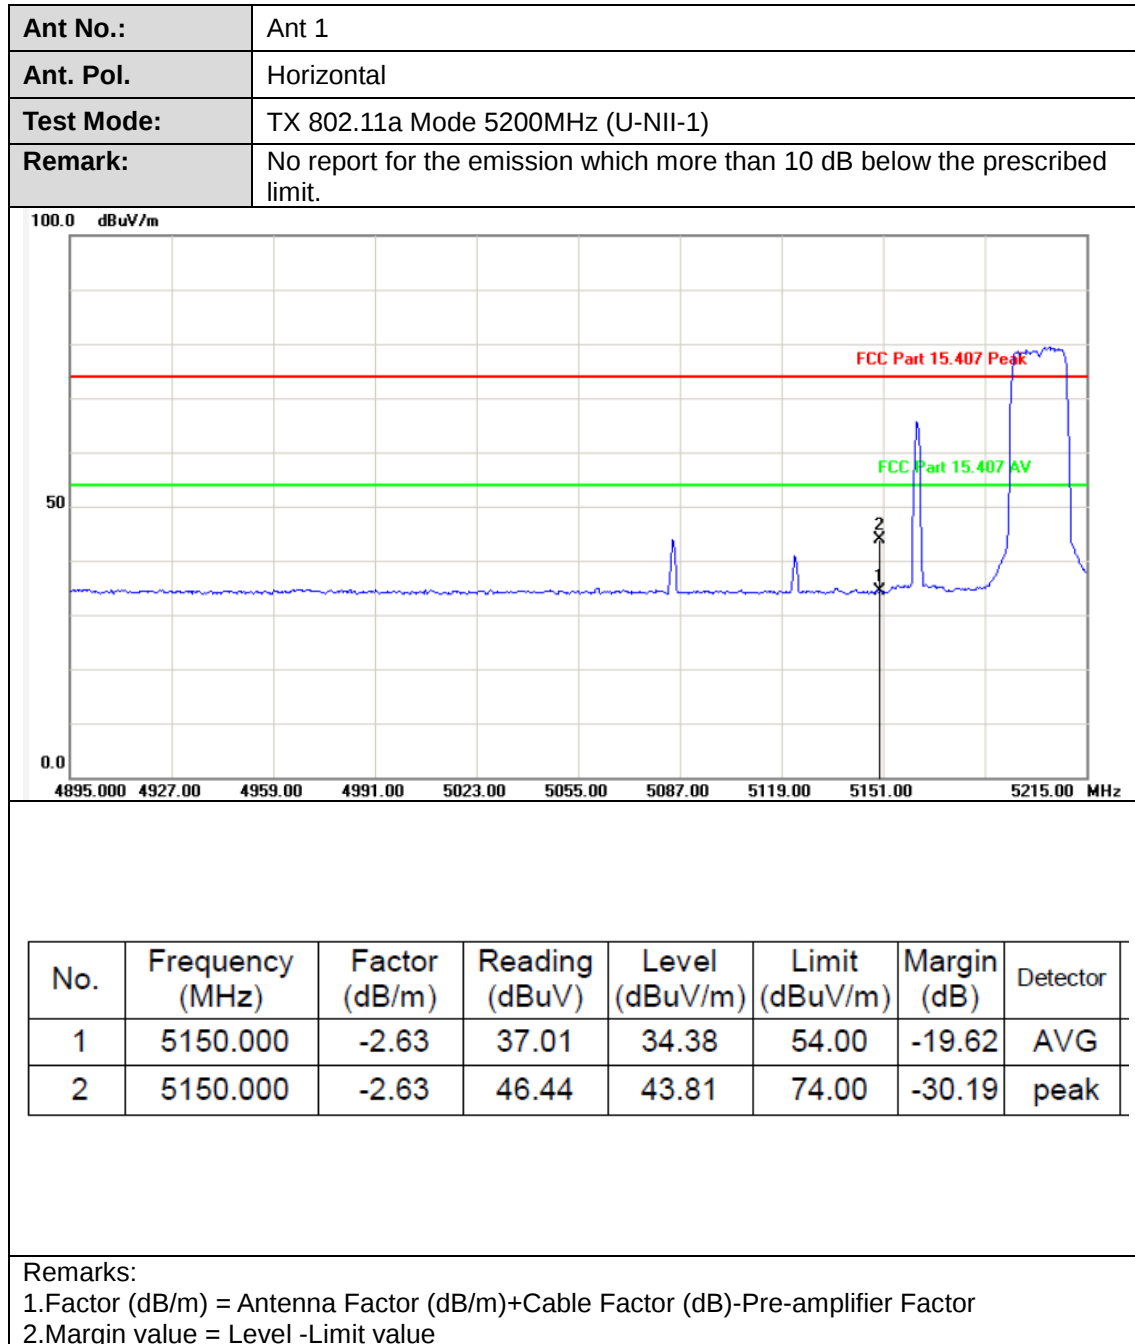



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

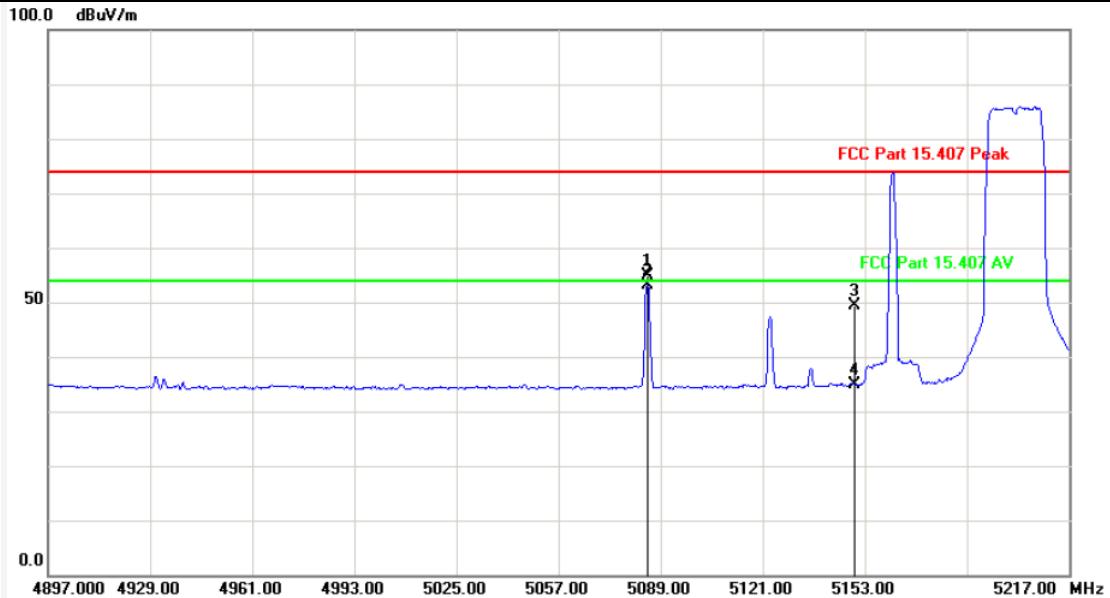


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5084.790	-2.70	57.50	54.80	74.00	-19.20	peak
2	5084.840	-2.70	55.86	53.16	54.00	-0.84	AVG
3	5150.000	-2.63	52.07	49.44	74.00	-24.56	peak
4	5150.000	-2.63	37.49	34.86	54.00	-19.14	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

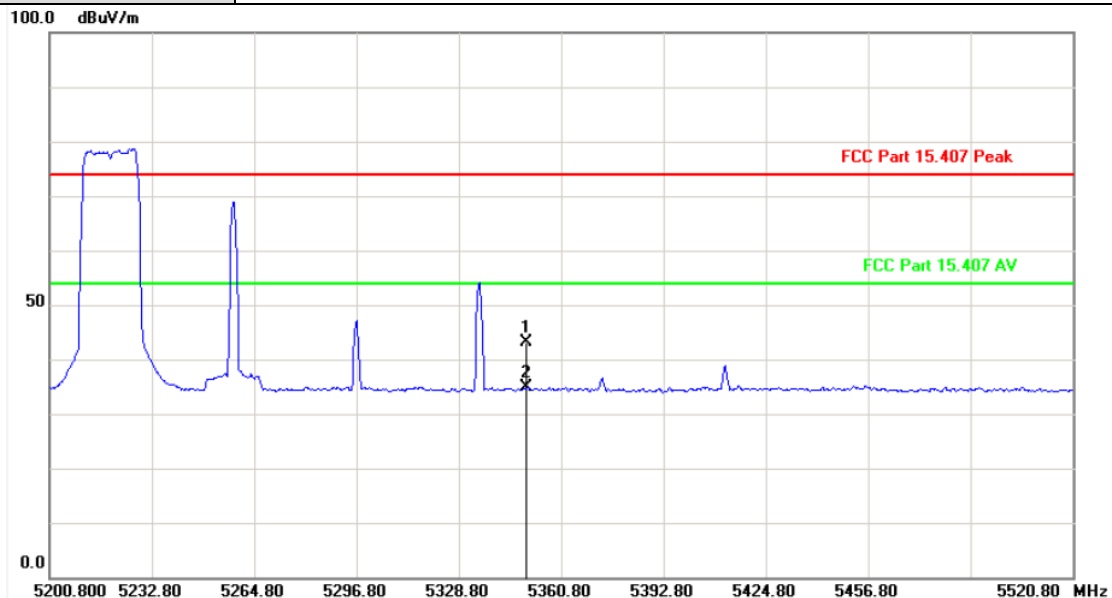


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	45.54	43.21	74.00	-30.79	peak
2	5350.000	-2.33	37.22	34.89	54.00	-19.11	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

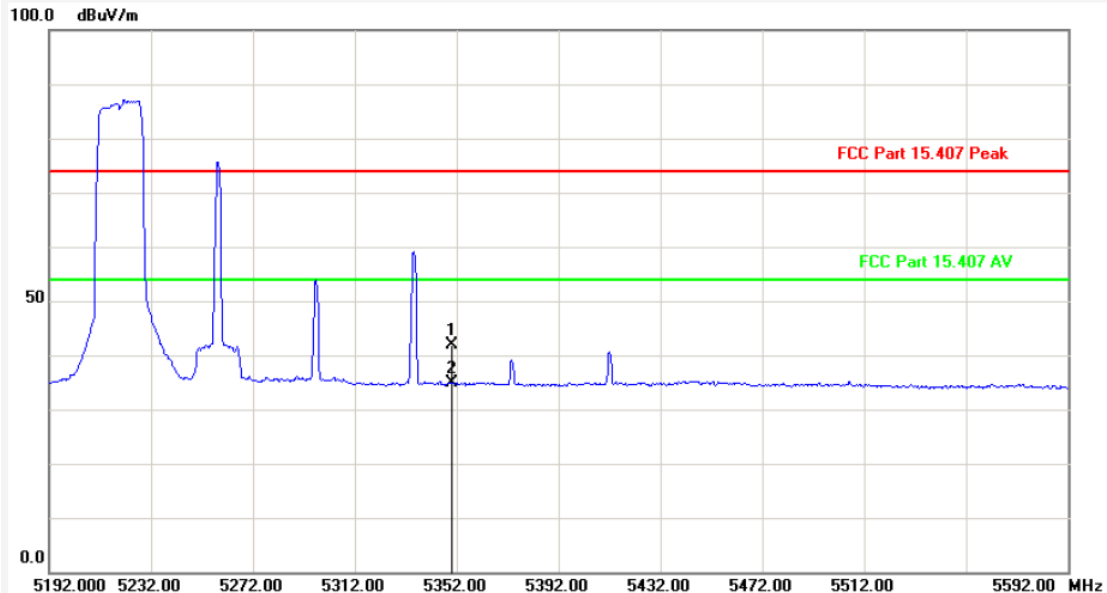


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.10	41.77	74.00	-32.23	peak
2	5350.000	-2.33	37.24	34.91	54.00	-19.09	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

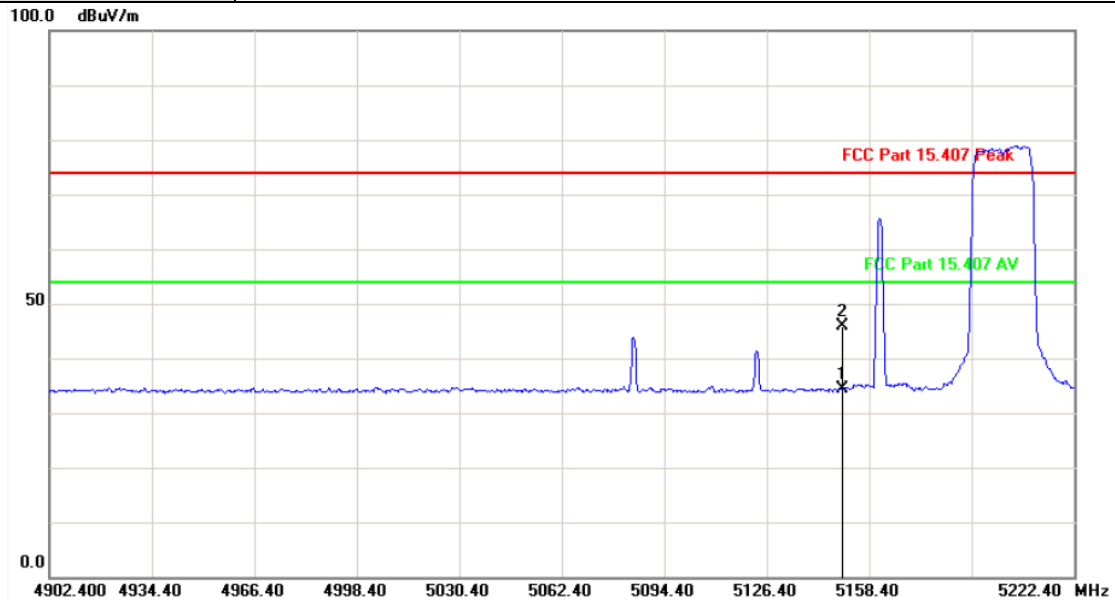

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	36.95	34.32	54.00	-19.68	AVG
2	5150.000	-2.63	48.57	45.94	74.00	-28.06	peak


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

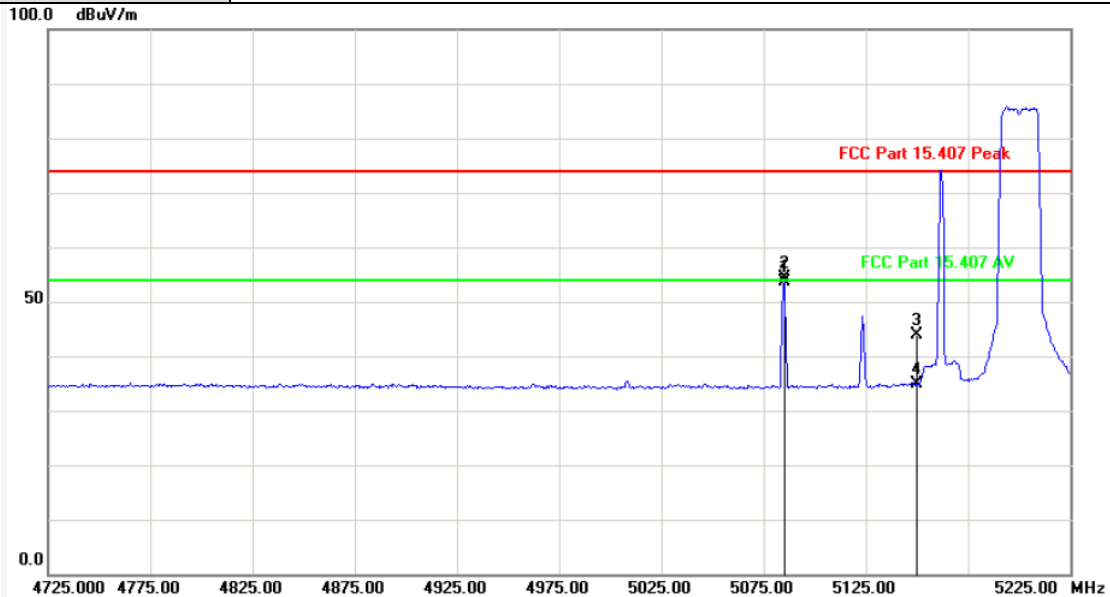


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5085.000	-2.70	56.26	53.56	54.00	-0.44	AVG
2	5085.390	-2.70	57.16	54.46	74.00	-19.54	peak
3	5150.000	-2.63	46.60	43.97	74.00	-30.03	peak
4	5150.000	-2.63	37.63	35.00	54.00	-19.00	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

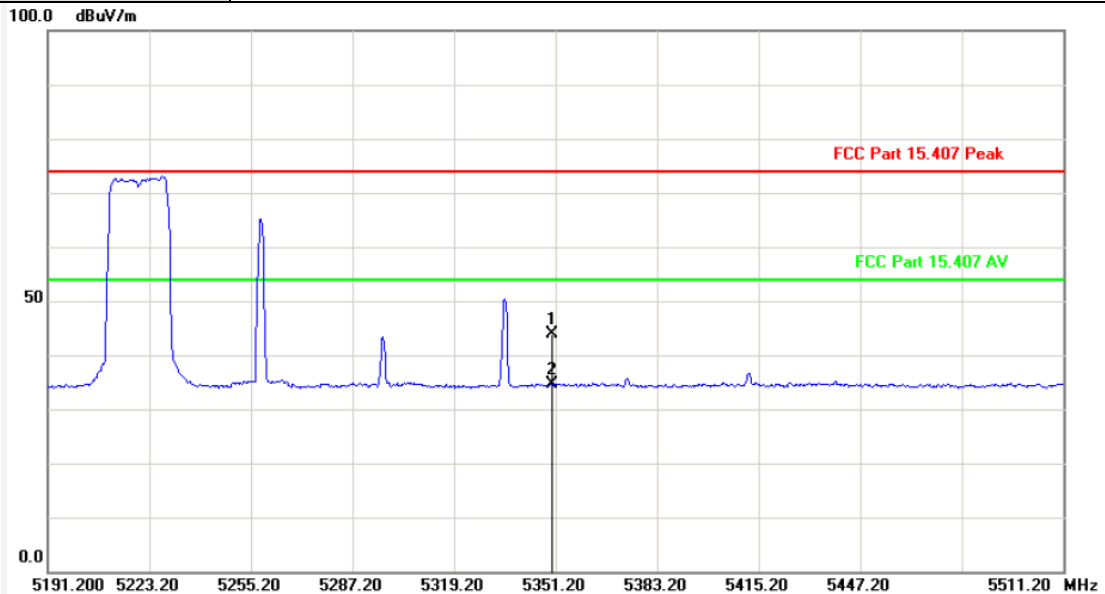


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	46.26	43.93	74.00	-30.07	peak
2	5350.000	-2.33	36.92	34.59	54.00	-19.41	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

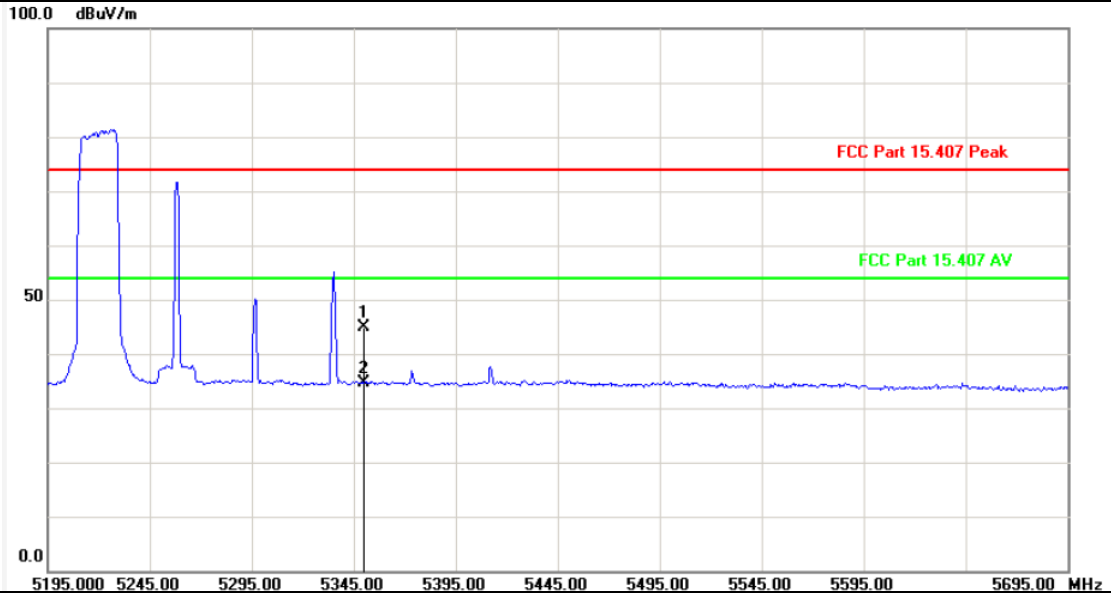

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	47.12	44.79	74.00	-29.21	peak
2	5350.000	-2.33	36.92	34.59	54.00	-19.41	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

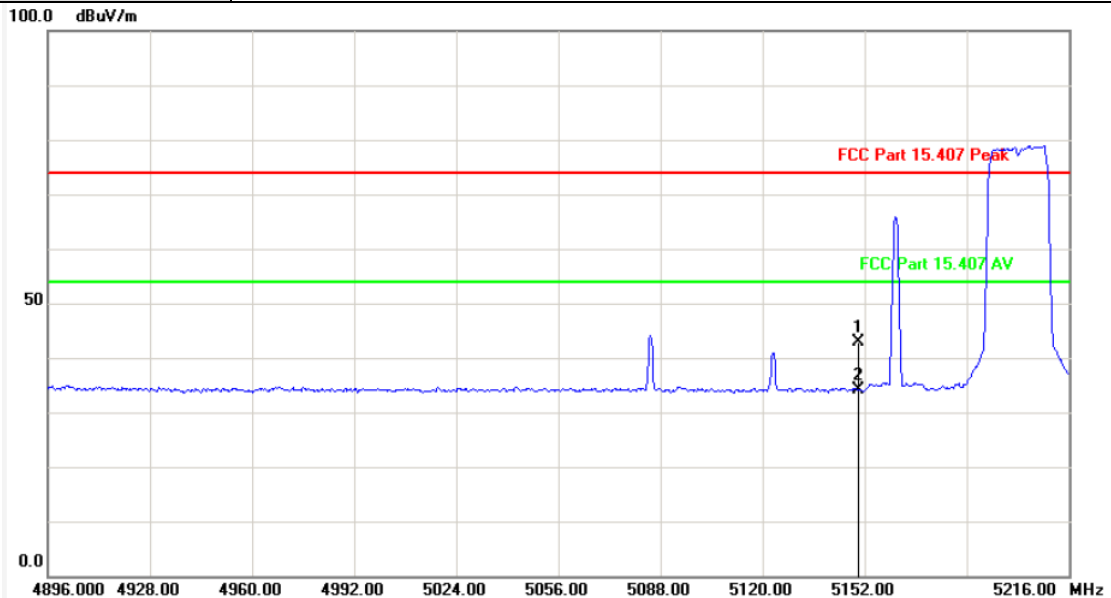

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	45.41	42.78	74.00	-31.22	peak
2	5150.000	-2.63	36.86	34.23	54.00	-19.77	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

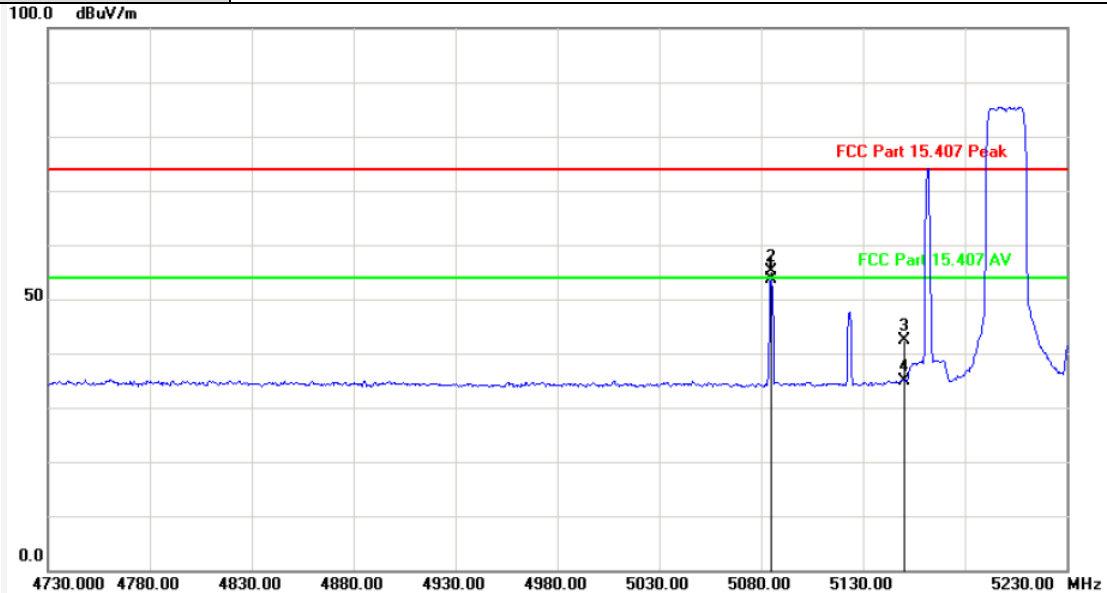

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5085.000	-2.70	56.21	53.51	54.00	-0.49	AVG
2	5085.060	-2.70	57.83	55.13	74.00	-18.87	peak
3	5150.000	-2.63	45.12	42.49	74.00	-31.51	peak
4	5150.000	-2.63	37.43	34.80	54.00	-19.20	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

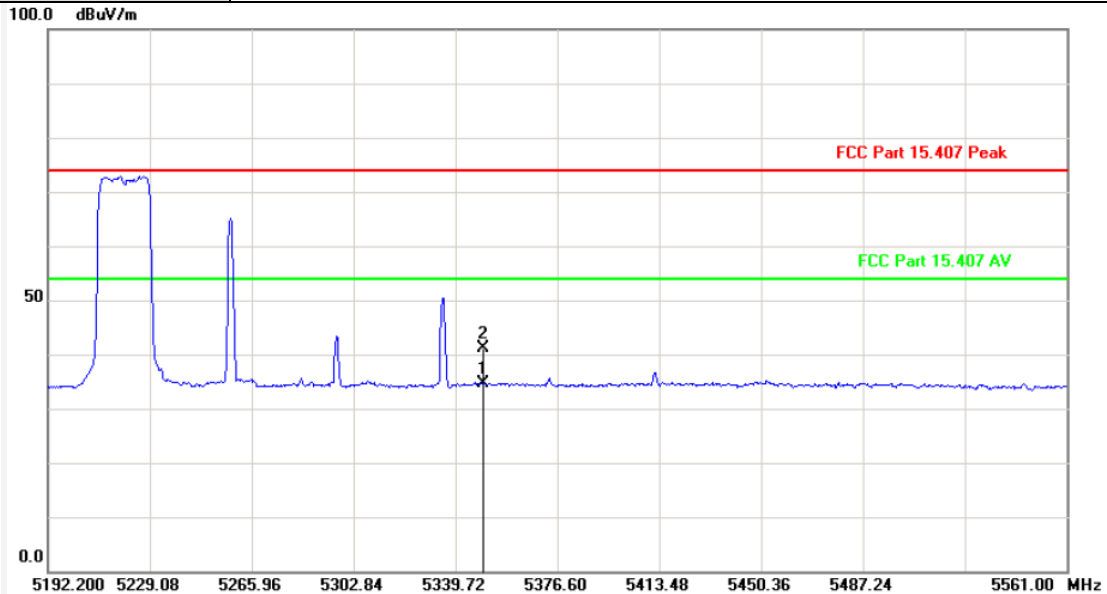


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	37.03	34.70	54.00	-19.30	AVG
2	5350.000	-2.33	43.42	41.09	74.00	-32.91	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

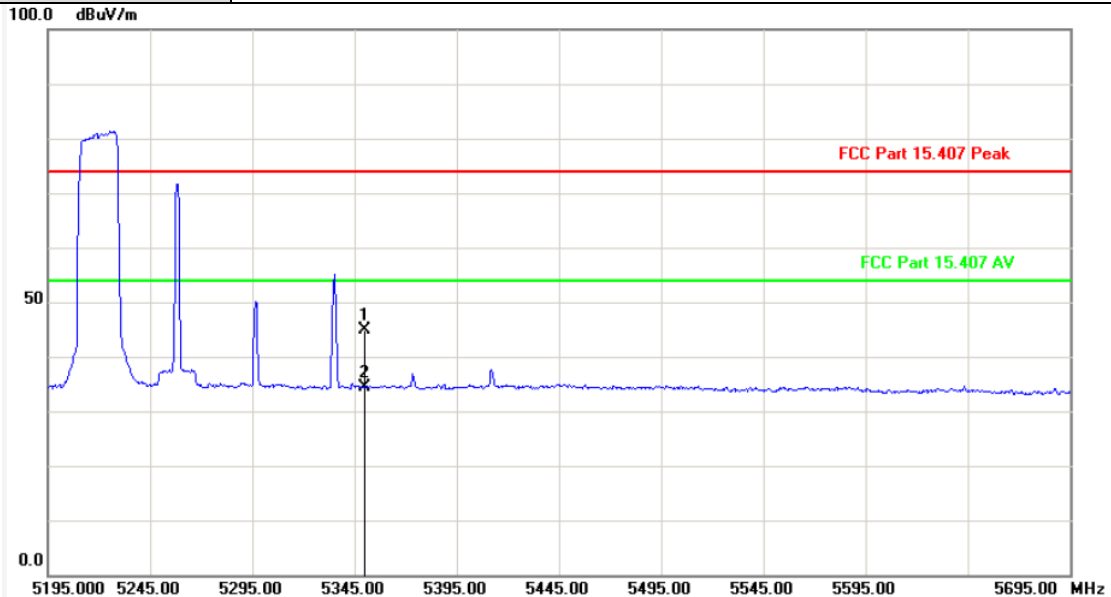


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	47.16	44.83	74.00	-29.17	peak
2	5350.000	-2.33	36.69	34.36	54.00	-19.64	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

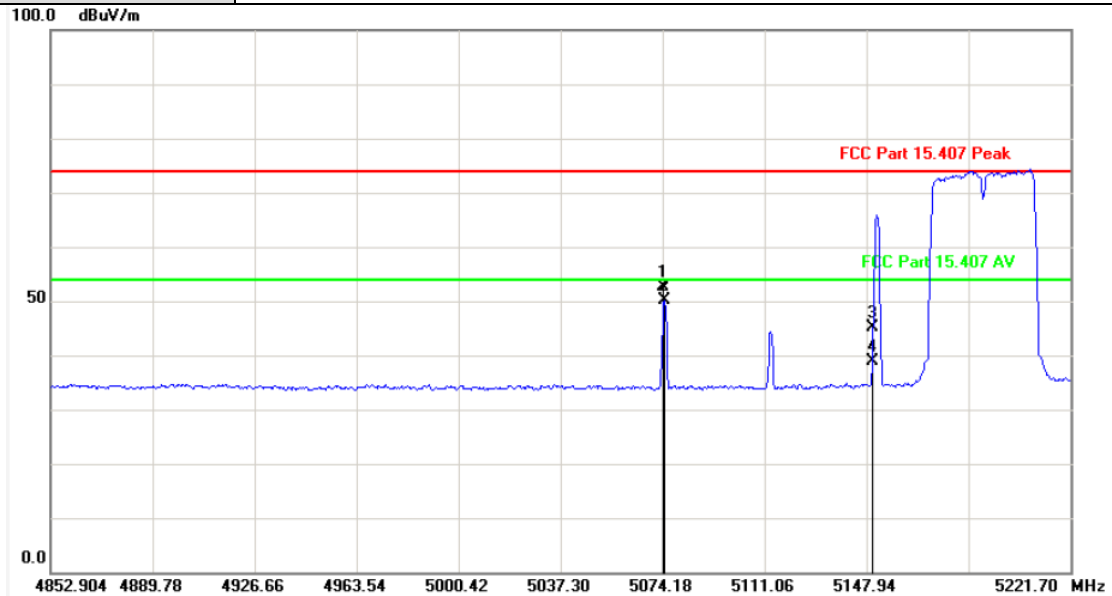


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5074.474	-2.72	55.35	52.63	74.00	-21.37	peak
2	5074.922	-2.72	52.74	50.02	54.00	-3.98	AVG
3	5150.000	-2.63	47.73	45.10	74.00	-28.90	peak
4	5150.000	-2.63	41.49	38.86	54.00	-15.14	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

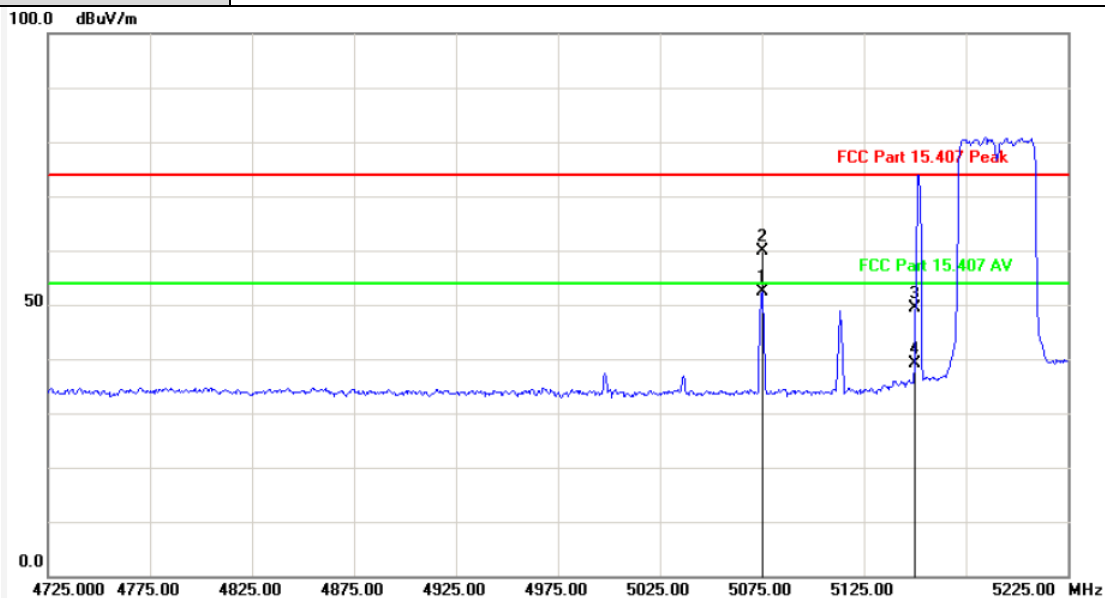

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5075.000	-2.72	55.08	52.36	54.00	-1.64	AVG
2	5075.070	-2.72	62.66	59.94	74.00	-14.06	peak
3	5150.000	-2.63	51.94	49.31	74.00	-24.69	peak
4	5150.000	-2.63	41.77	39.14	54.00	-14.86	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

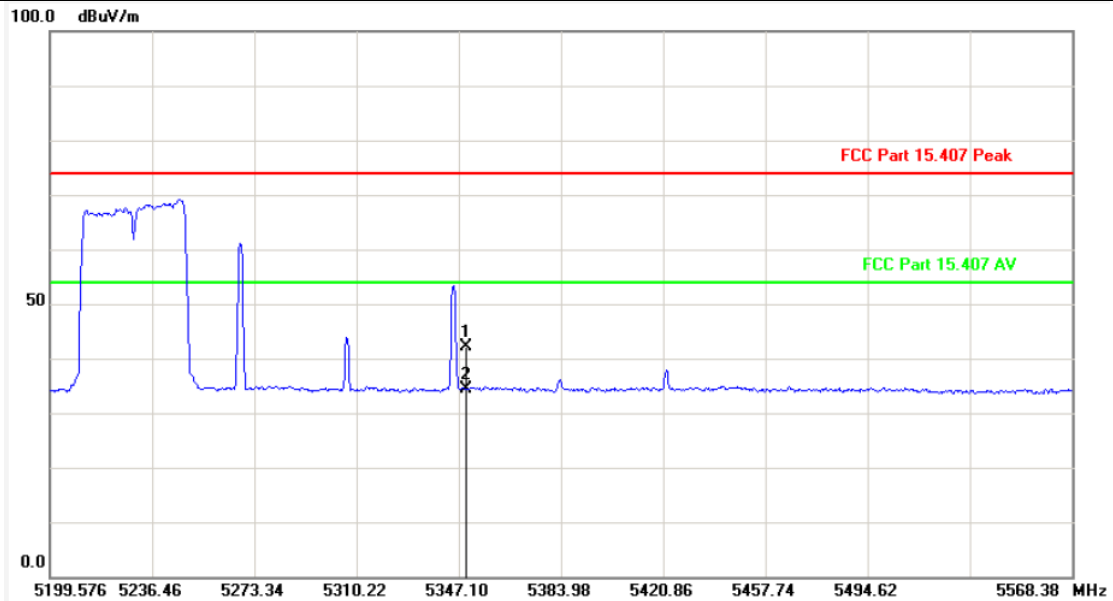

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.53	42.20	74.00	-31.80	peak
2	5350.000	-2.33	36.78	34.45	54.00	-19.55	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

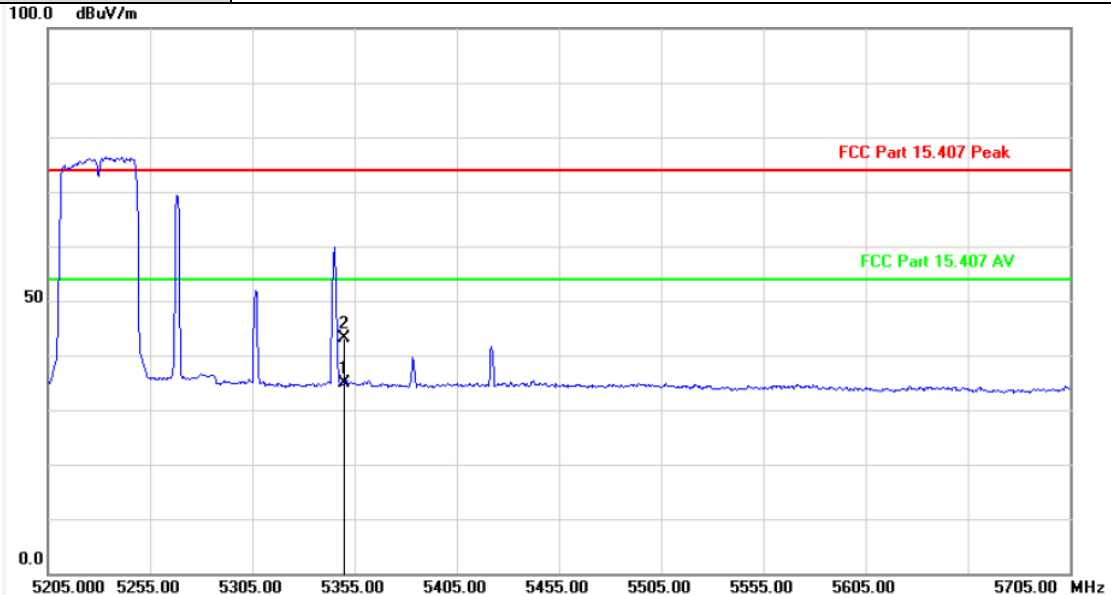

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	37.27	34.94	54.00	-19.06	AVG
2	5350.000	-2.33	45.39	43.06	74.00	-30.94	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

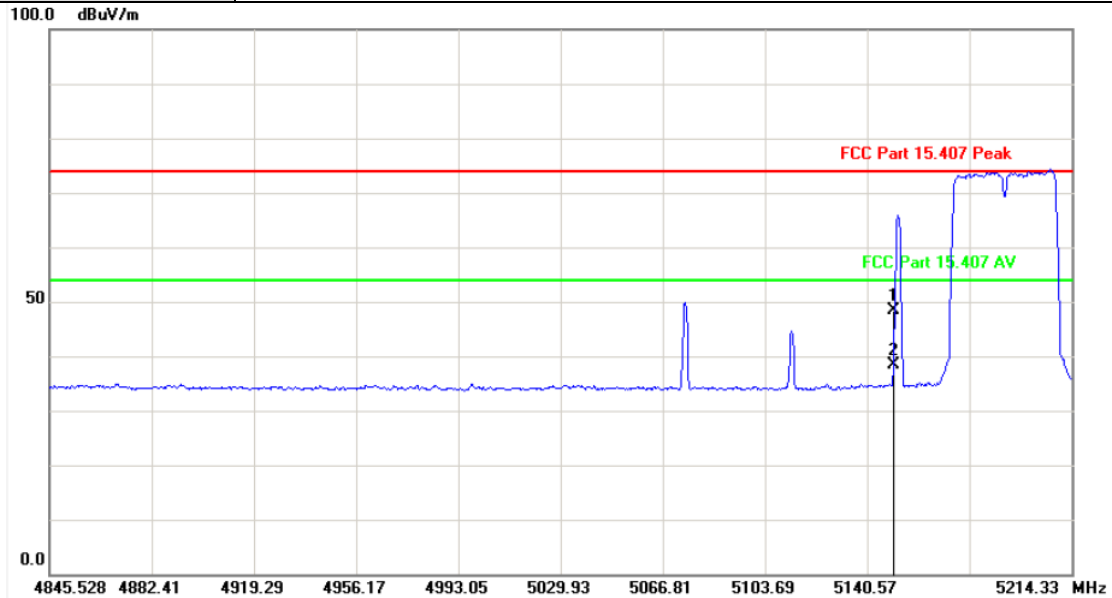

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	50.89	48.26	74.00	-25.74	peak
2	5150.000	-2.63	41.10	38.47	54.00	-15.53	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

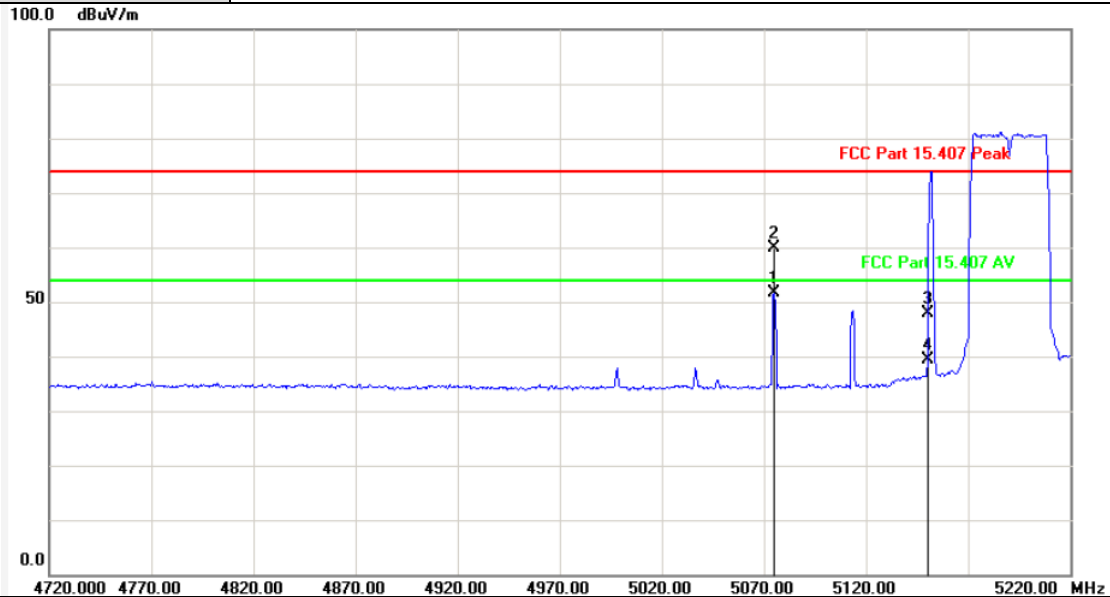

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5075.000	-2.72	54.23	51.51	54.00	-2.49	AVG
2	5075.070	-2.72	62.64	59.92	74.00	-14.08	peak
3	5150.000	-2.63	50.54	47.91	74.00	-26.09	peak
4	5150.000	-2.63	41.91	39.28	54.00	-14.72	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

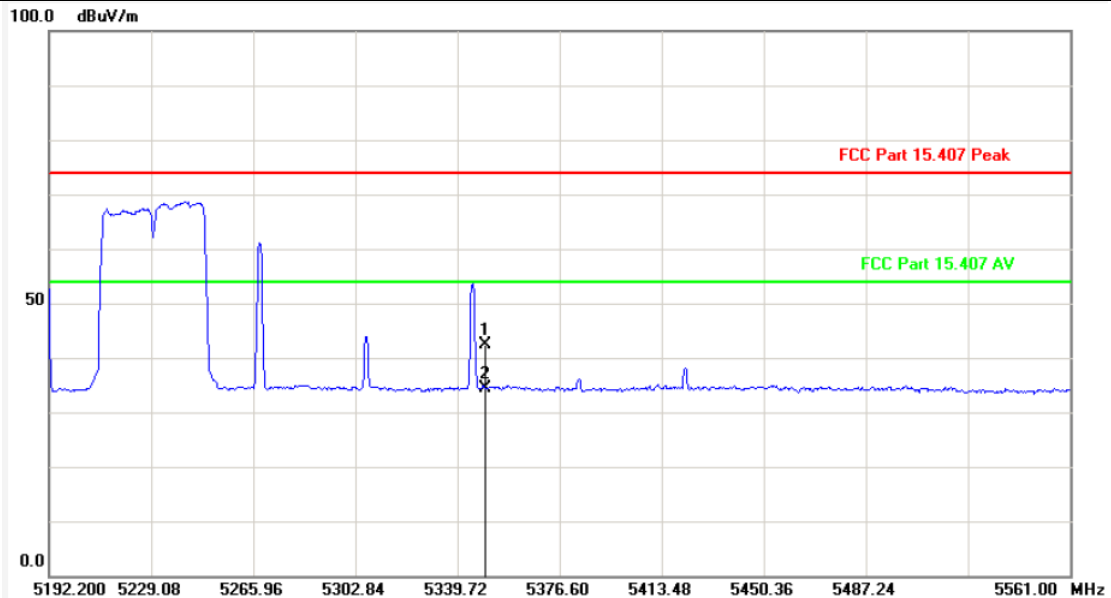

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.74	42.41	74.00	-31.59	peak
2	5350.000	-2.33	36.77	34.44	54.00	-19.56	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

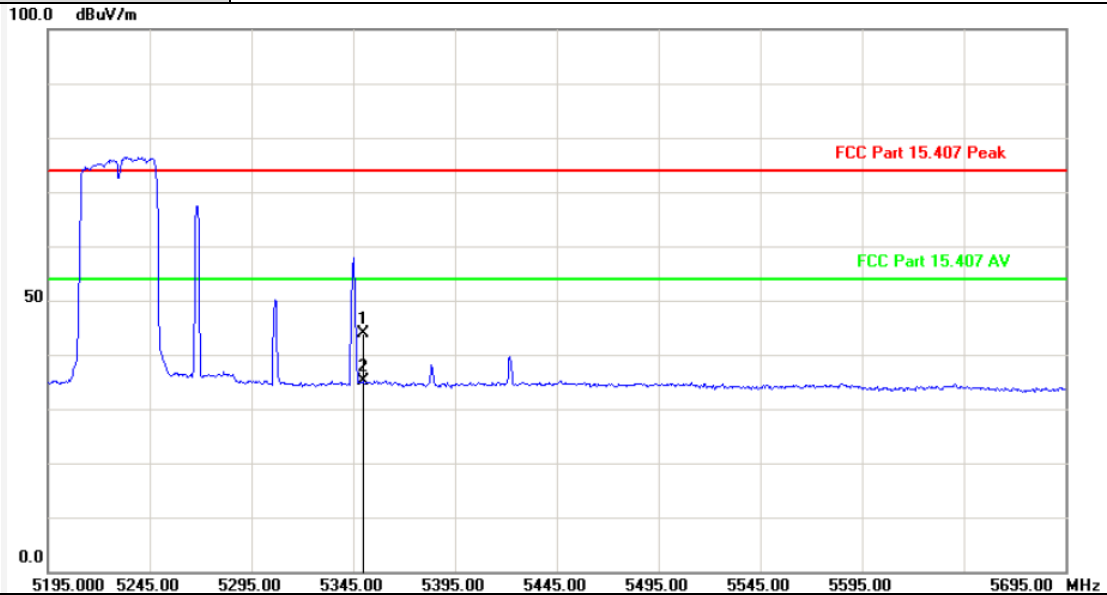

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	46.14	43.81	74.00	-30.19	peak
2	5350.000	-2.33	37.39	35.06	54.00	-18.94	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

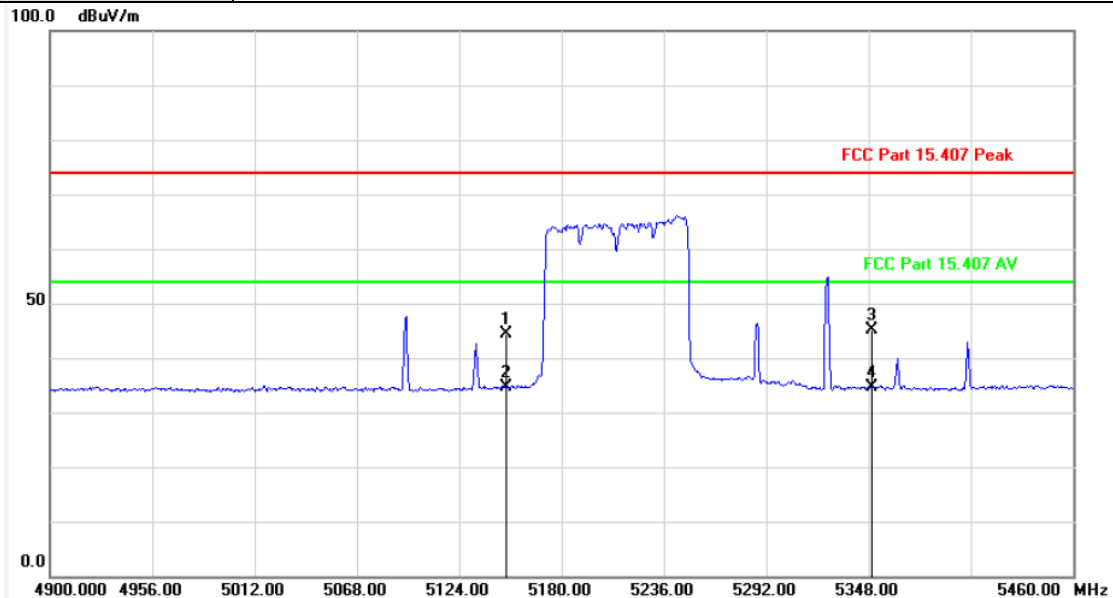

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	46.90	44.27	74.00	-29.73	peak
2	5150.000	-2.63	37.25	34.62	54.00	-19.38	AVG
3	5350.000	-2.33	47.53	45.20	74.00	-28.80	peak
4	5350.000	-2.33	36.97	34.64	54.00	-19.36	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

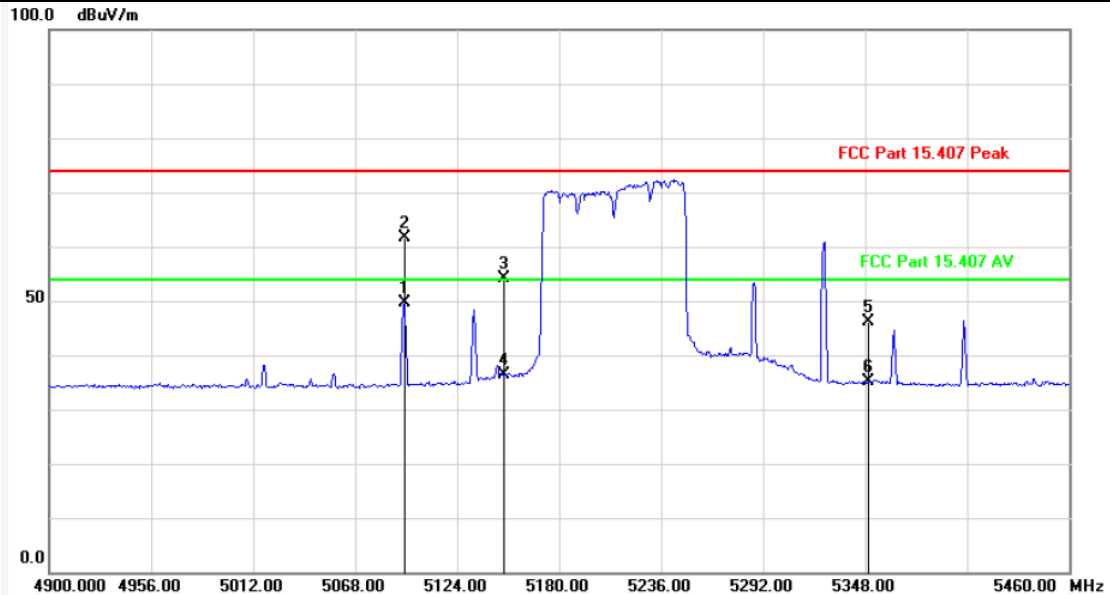


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5094.880	-2.69	52.34	49.65	54.00	-4.35	AVG
2	5095.170	-2.69	64.39	61.70	74.00	-12.30	peak
3	5150.000	-2.63	56.78	54.15	74.00	-19.85	peak
4	5150.000	-2.63	39.04	36.41	54.00	-17.59	AVG
5	5350.000	-2.33	48.50	46.17	74.00	-27.83	peak
6	5350.000	-2.33	37.49	35.16	54.00	-18.84	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

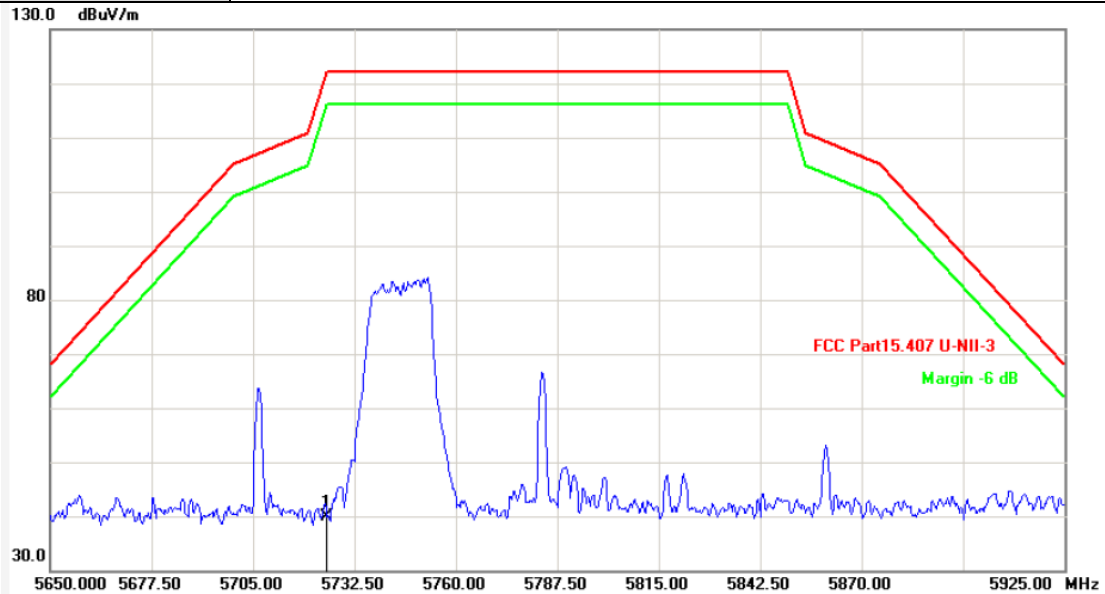


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	41.42	39.91	122.20	-82.29	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

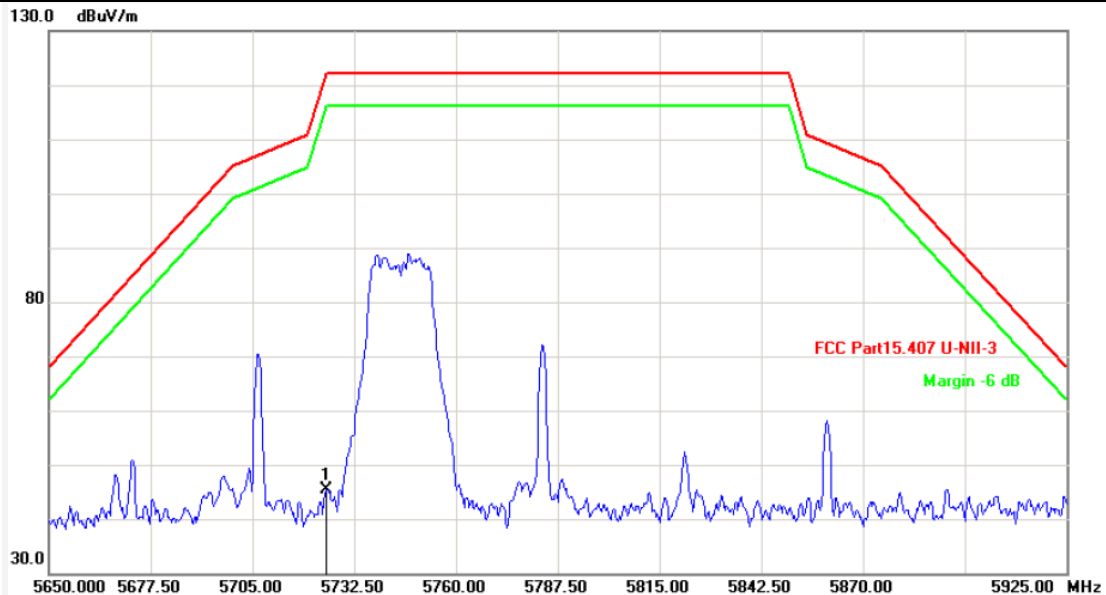


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.89	45.38	122.20	-76.82	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

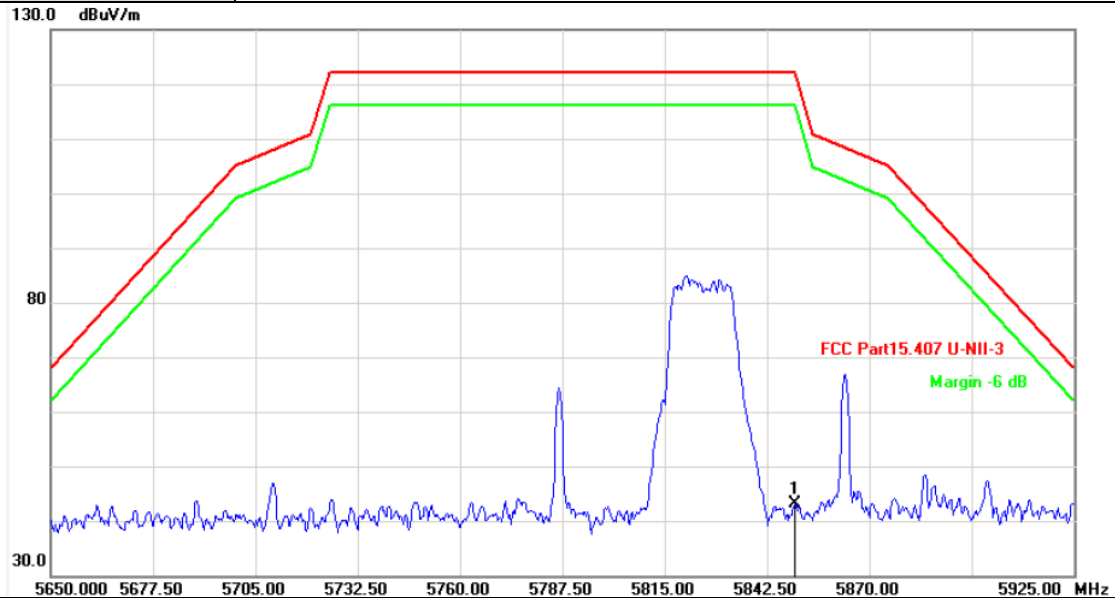


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	44.33	43.13	122.20	-79.07	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

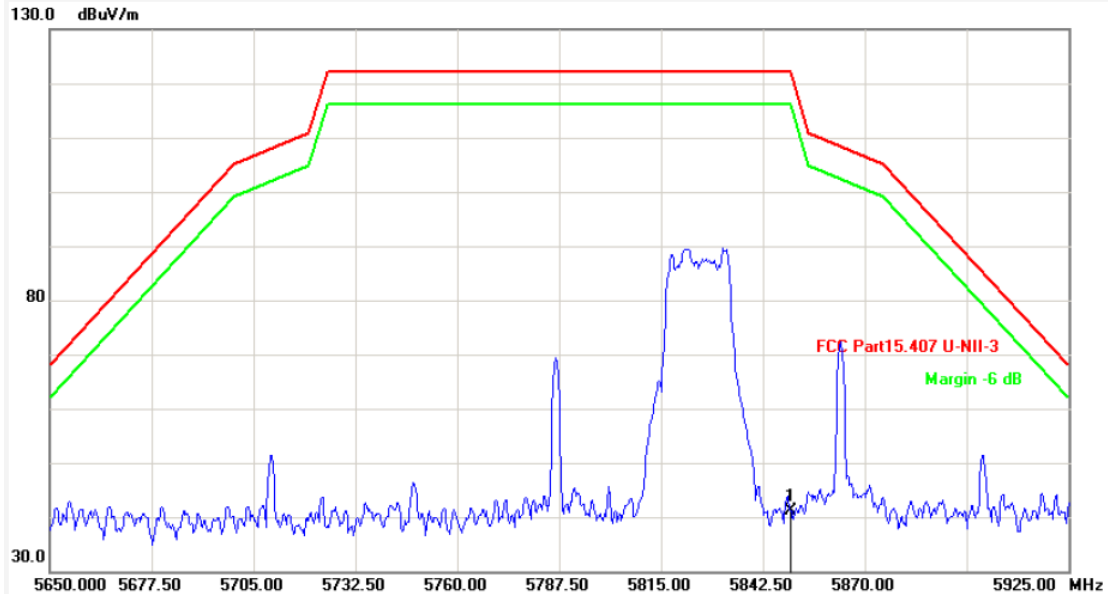


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.22	41.02	122.20	-81.18	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

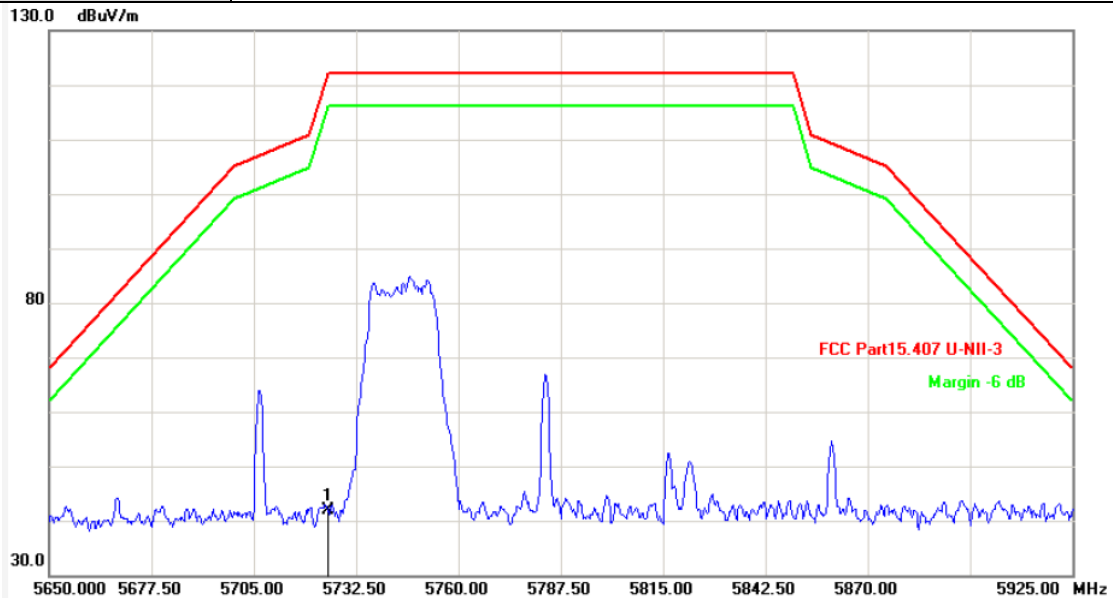

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	43.27	41.76	122.20	-80.44	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

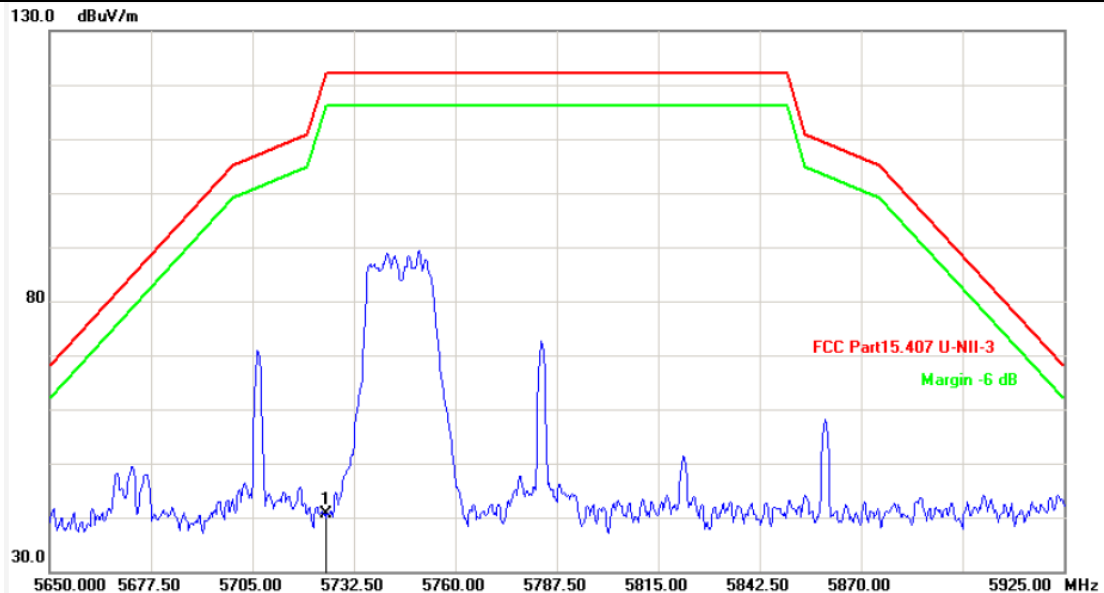


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	42.05	40.54	122.20	-81.66	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

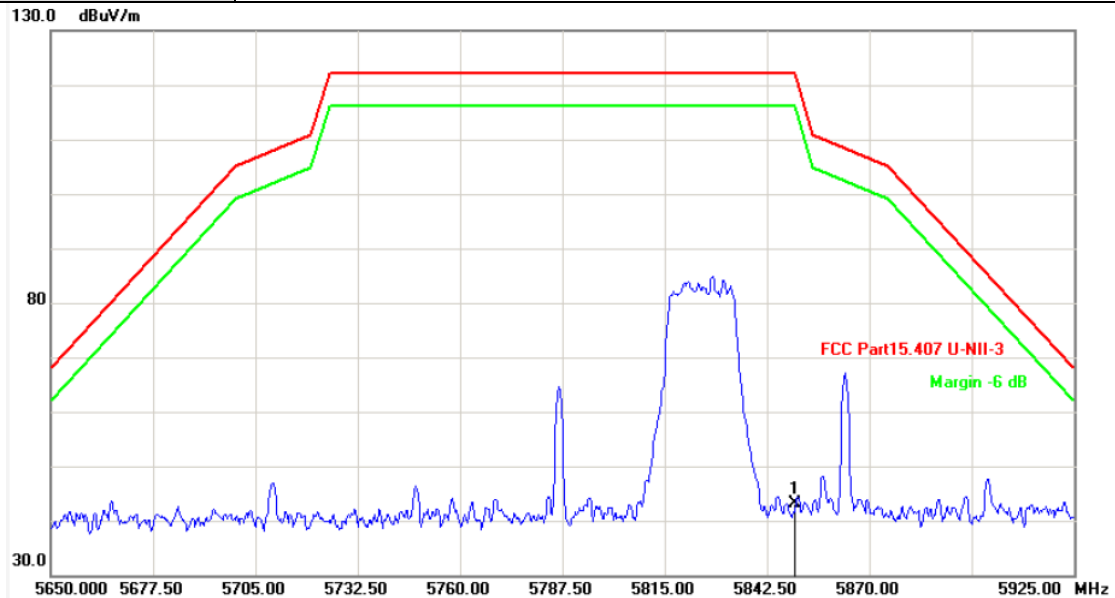

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	44.40	43.20	122.20	-79.00	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

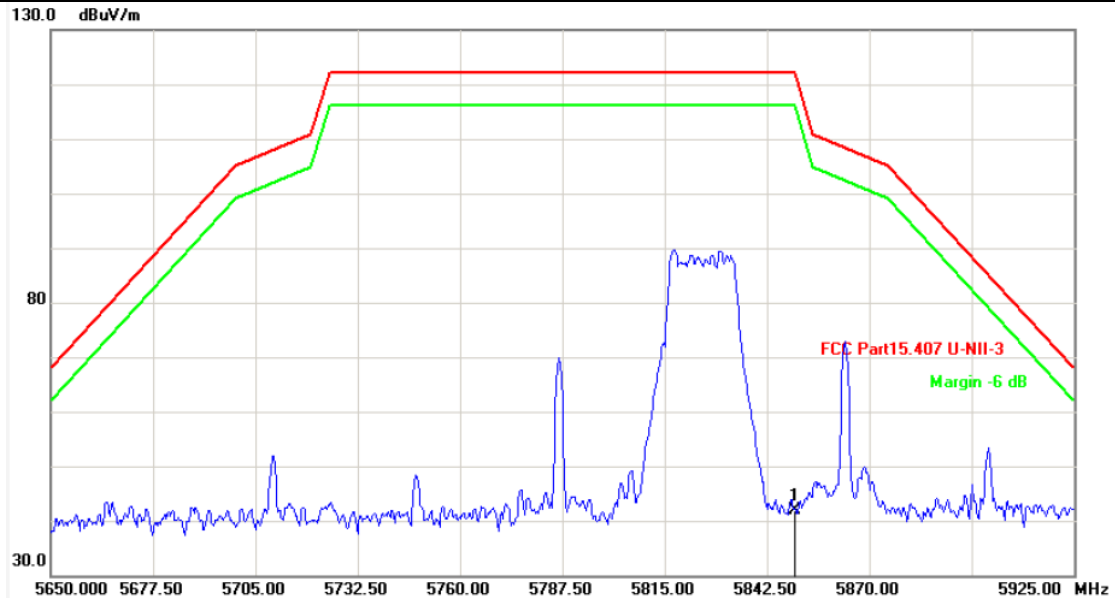


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	43.10	41.90	122.20	-80.30	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

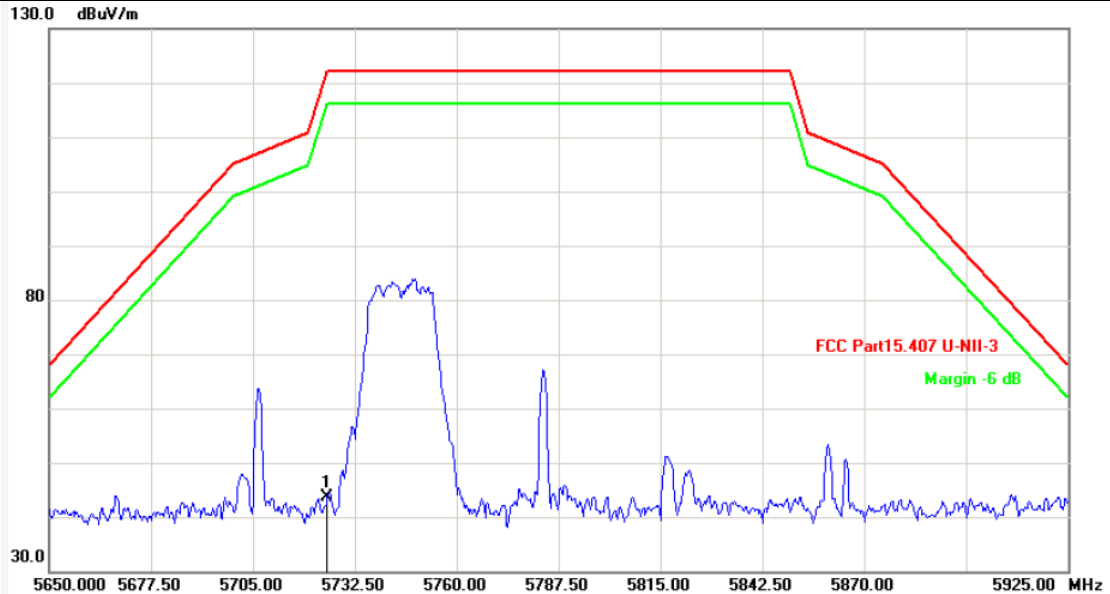


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	5725.000	-1.51	45.25	43.74	122.20	-78.46	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

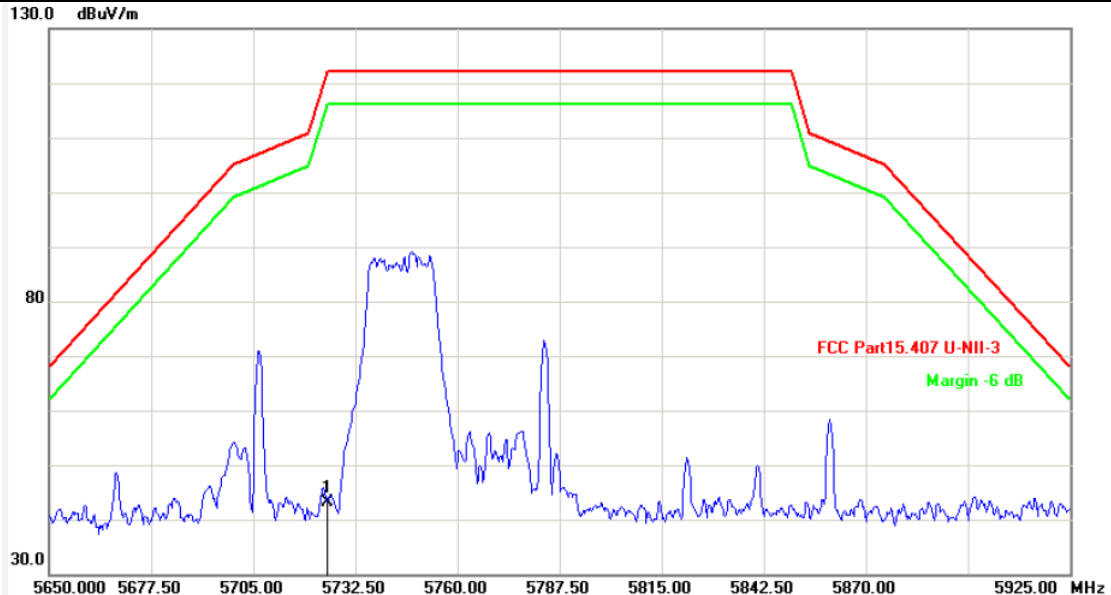


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	44.61	43.10	122.20	-79.10	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

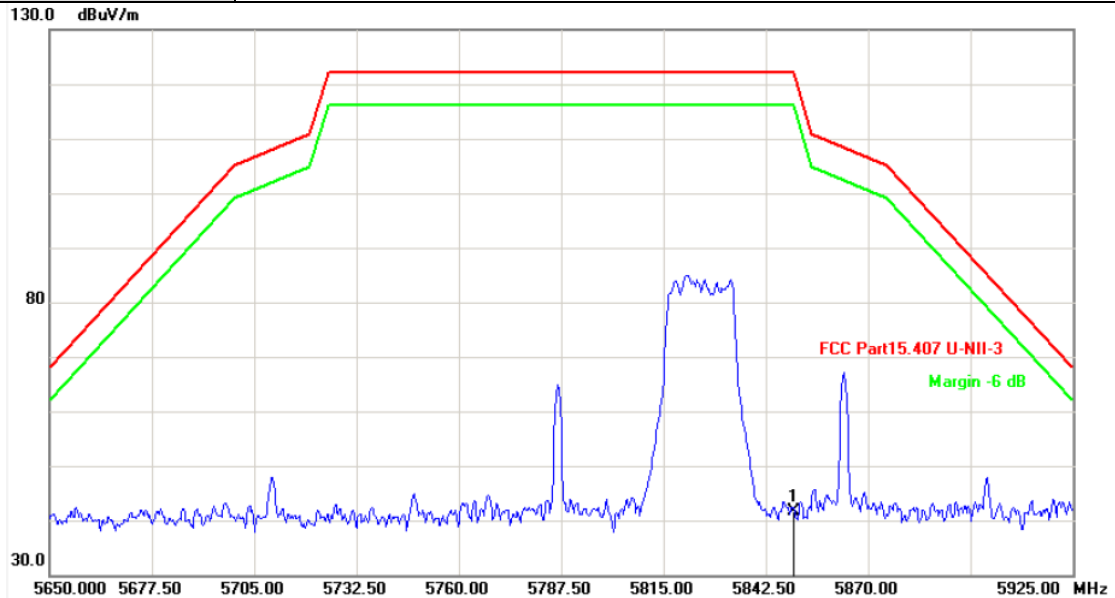

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.95	41.75	122.20	-80.45	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

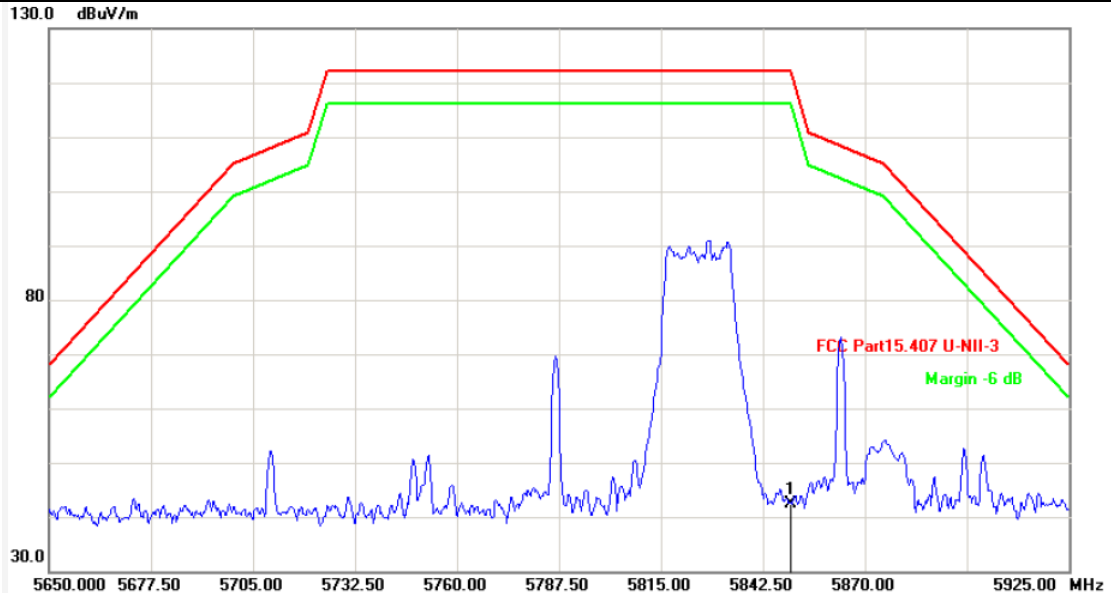

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	43.54	42.34	122.20	-79.86	peak


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

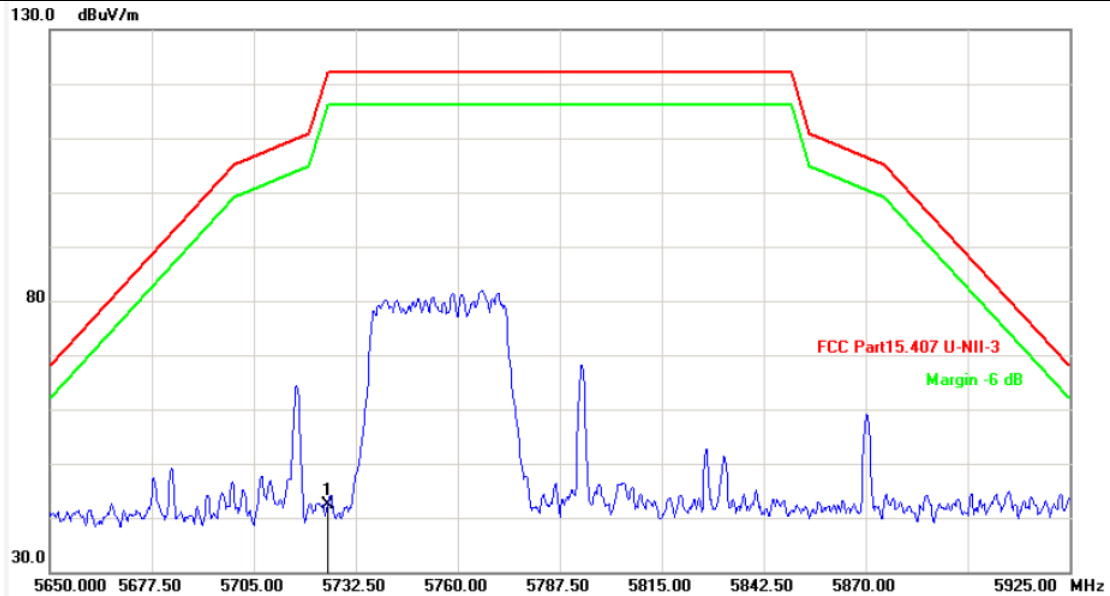


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	43.98	42.47	122.20	-79.73	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

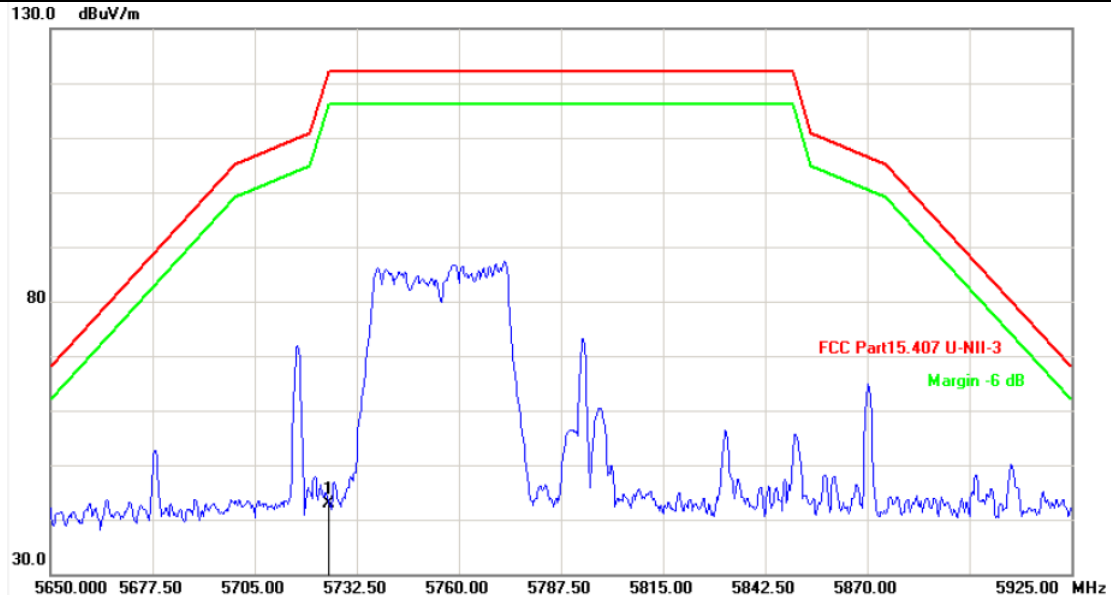


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	44.29	42.78	122.20	-79.42	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

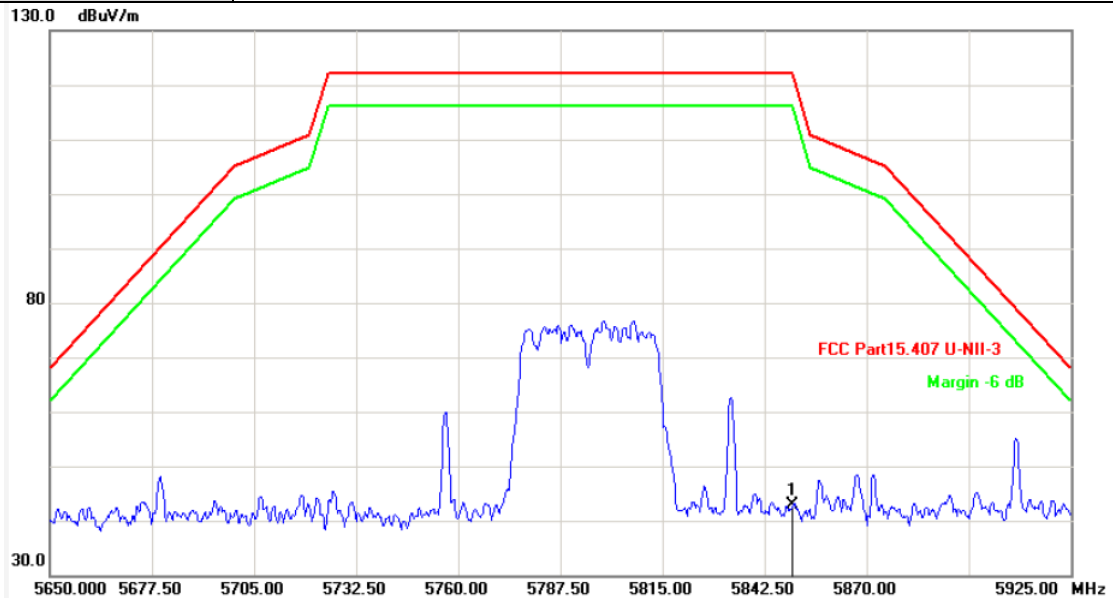

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	44.16	42.96	122.20	-79.24	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

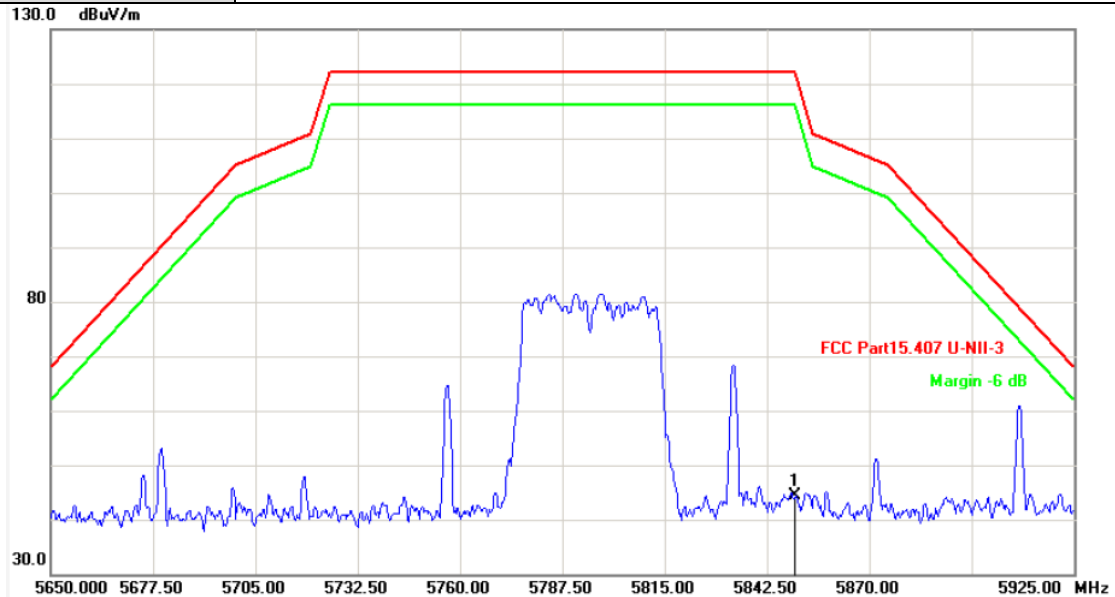


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	45.58	44.38	122.20	-77.82	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

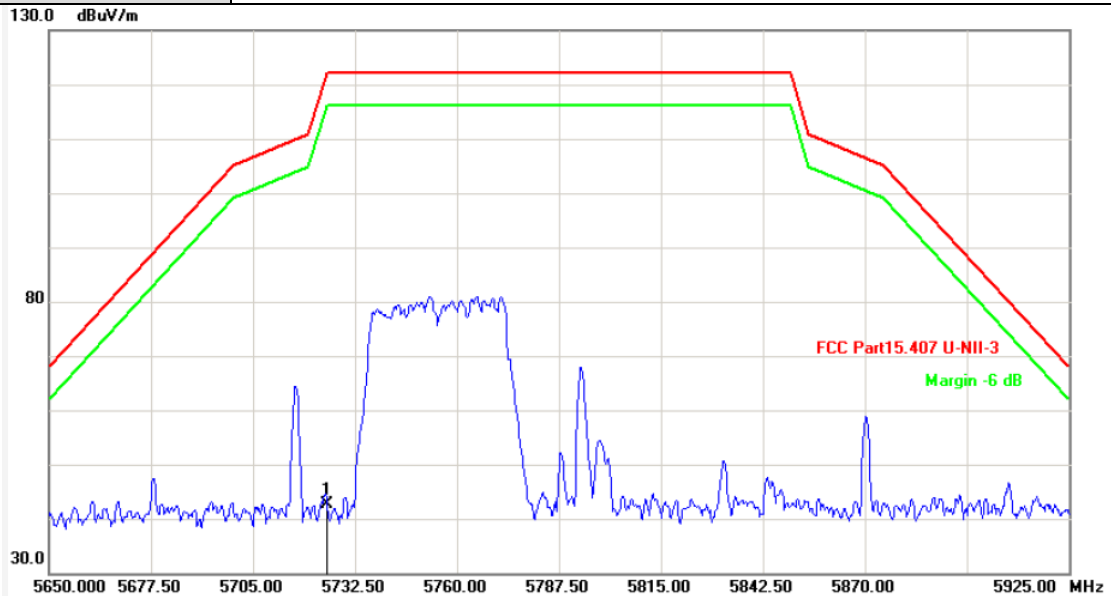


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	44.14	42.63	122.20	-79.57	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

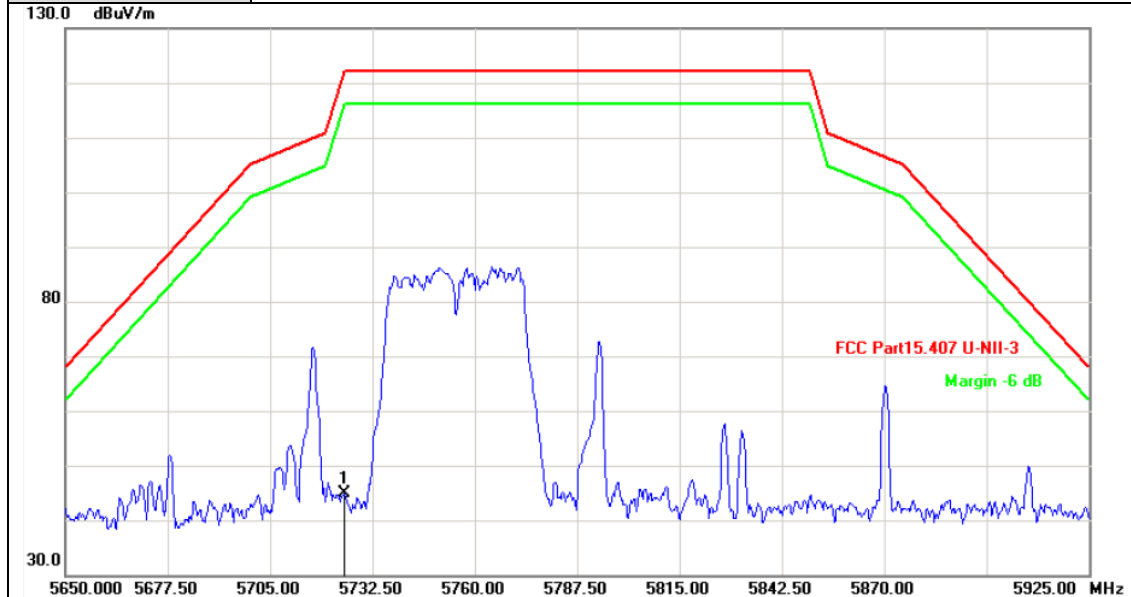


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.35	44.84	122.20	-77.36	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

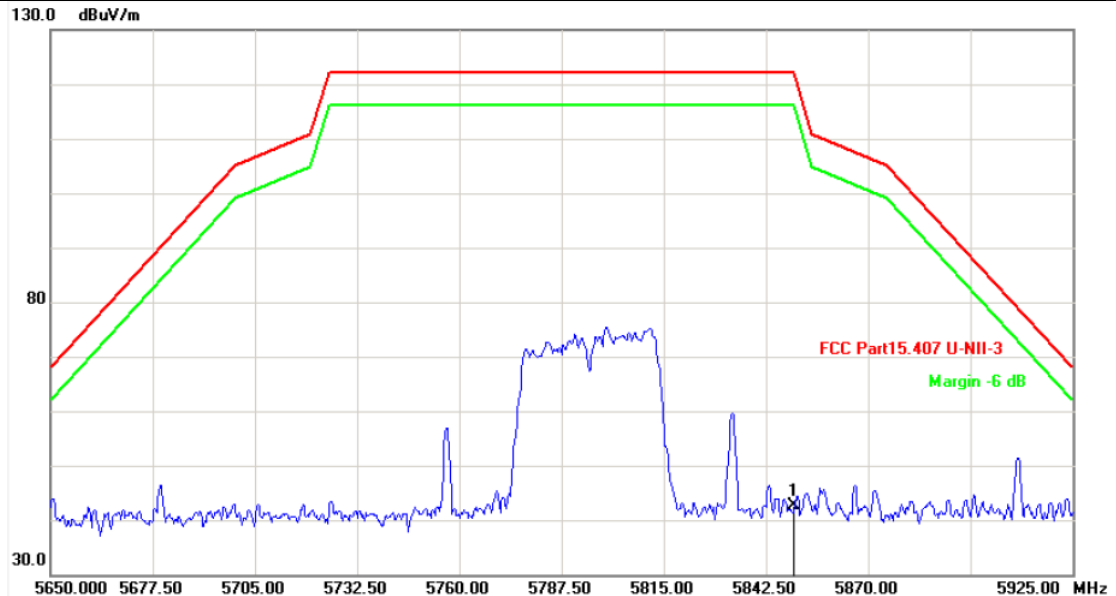


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	43.76	42.56	122.20	-79.64	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

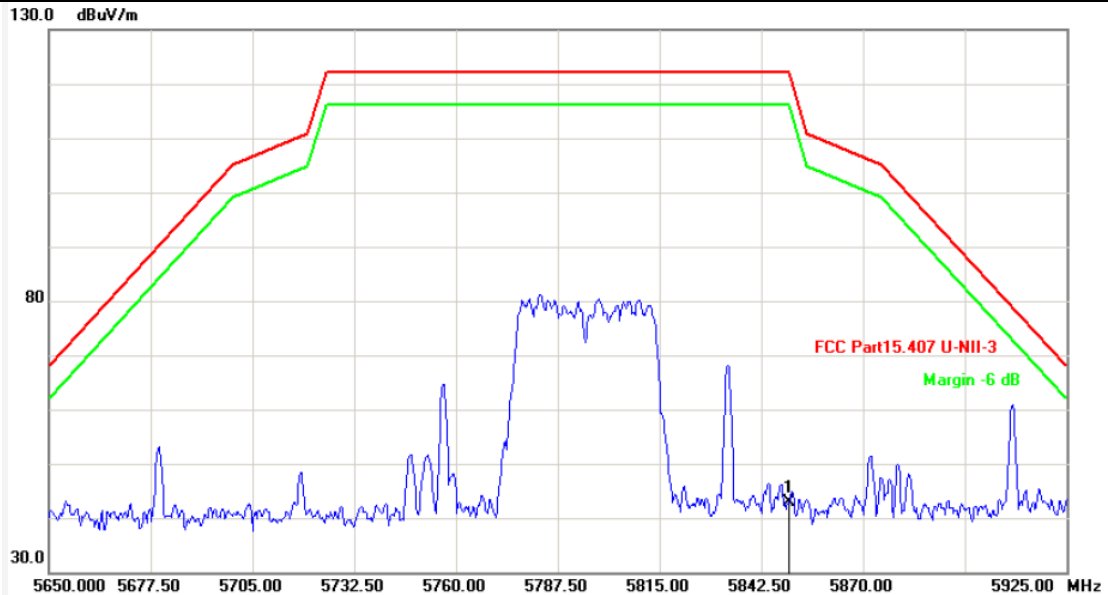


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	44.20	43.00	122.20	-79.20	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

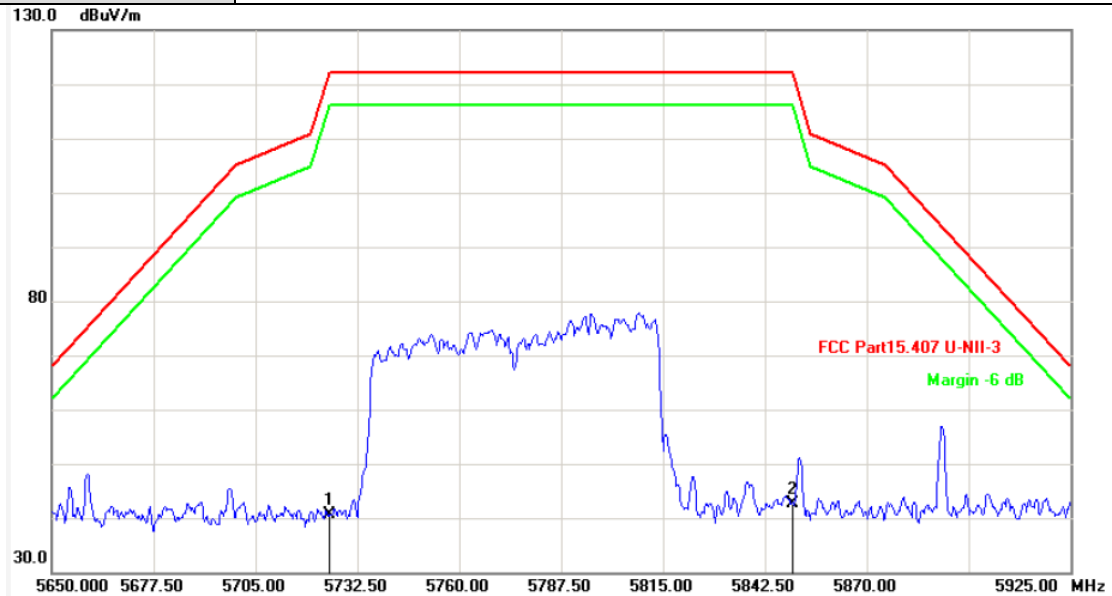


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	42.09	40.58	122.20	-81.62	peak
2	5850.000	-1.20	43.80	42.60	122.20	-79.60	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

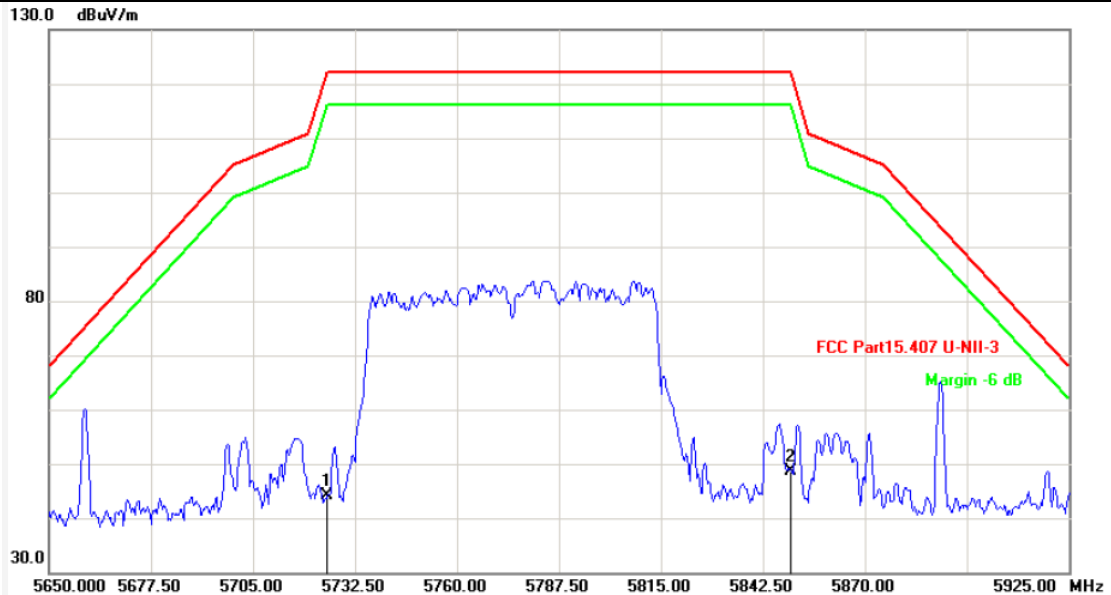

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	45.67	44.16	122.20	-78.04	peak
2	5850.000	-1.20	49.93	48.73	122.20	-73.47	peak


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

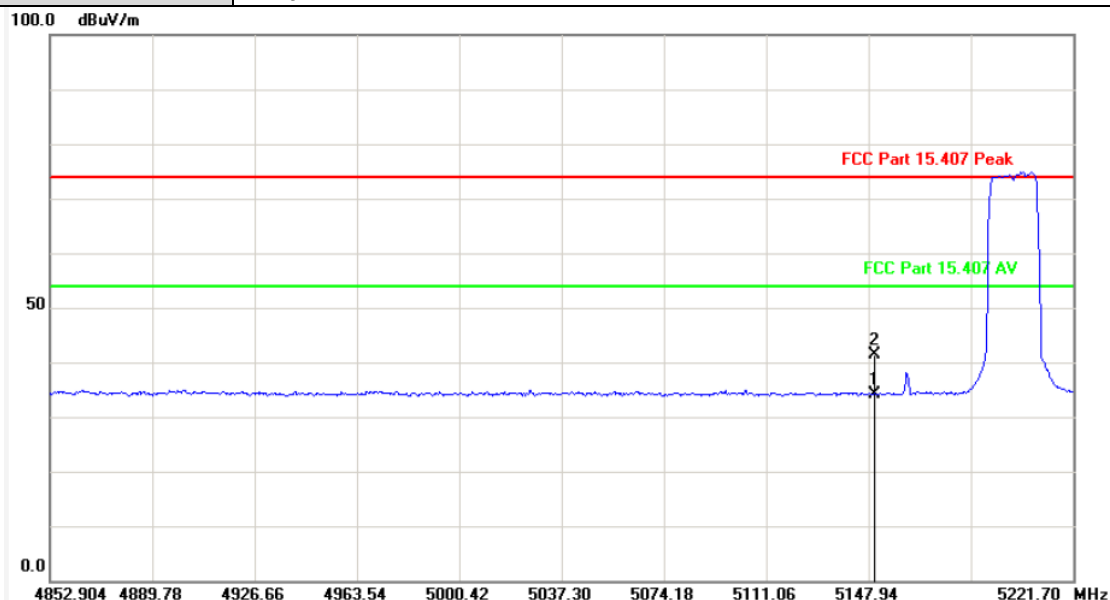


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	36.88	34.25	54.00	-19.75	AVG
2	5150.000	-2.63	43.96	41.33	74.00	-32.67	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

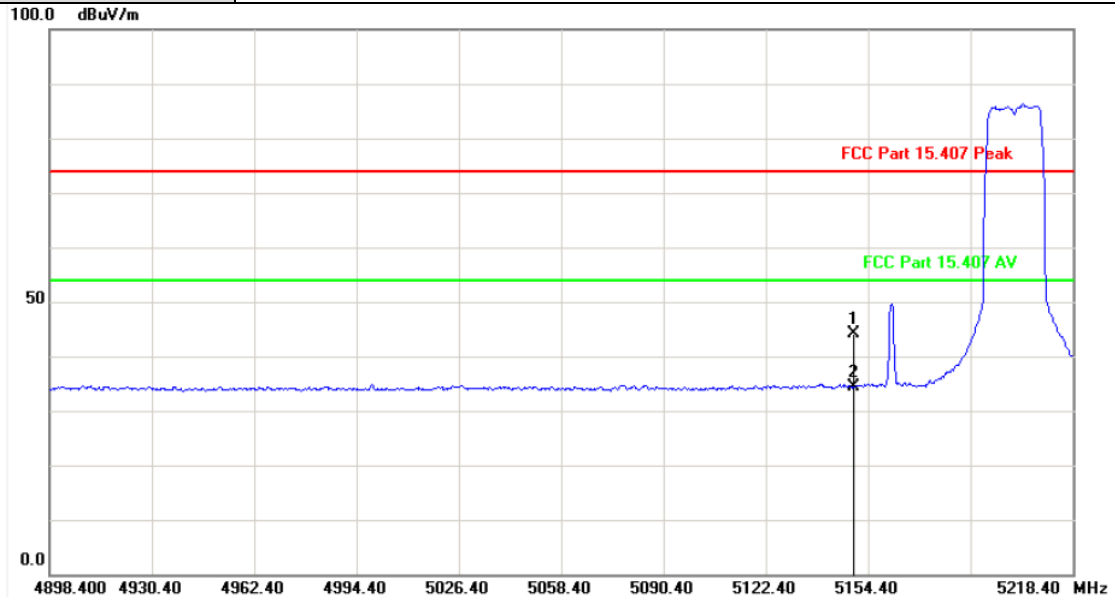

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	46.68	44.05	74.00	-29.95	peak
2	5150.000	-2.63	37.10	34.47	54.00	-19.53	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

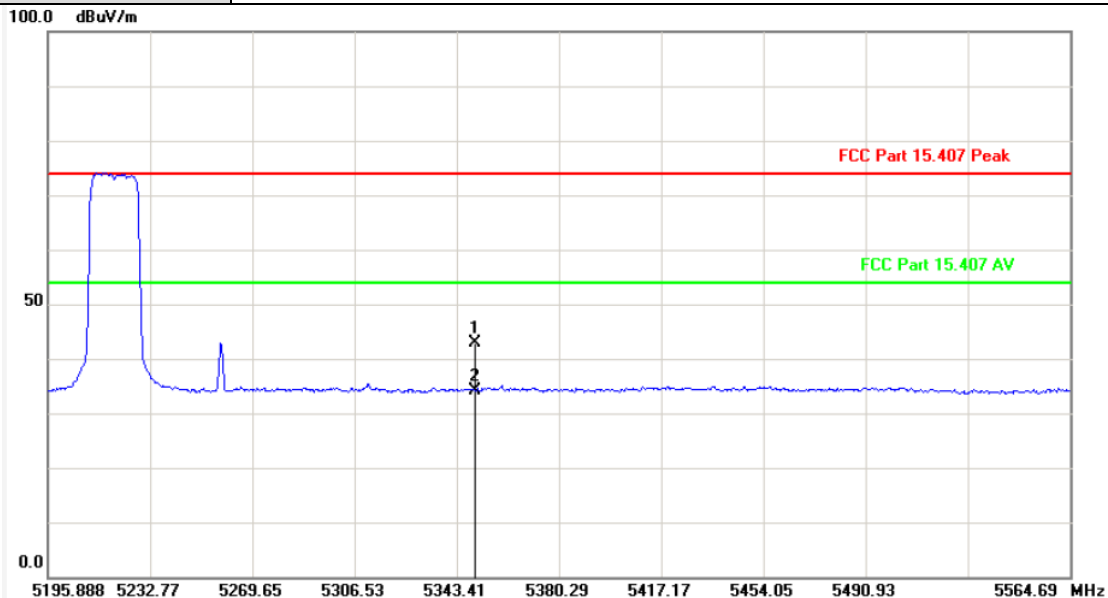

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	45.20	42.87	74.00	-31.13	peak
2	5350.000	-2.33	36.46	34.13	54.00	-19.87	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

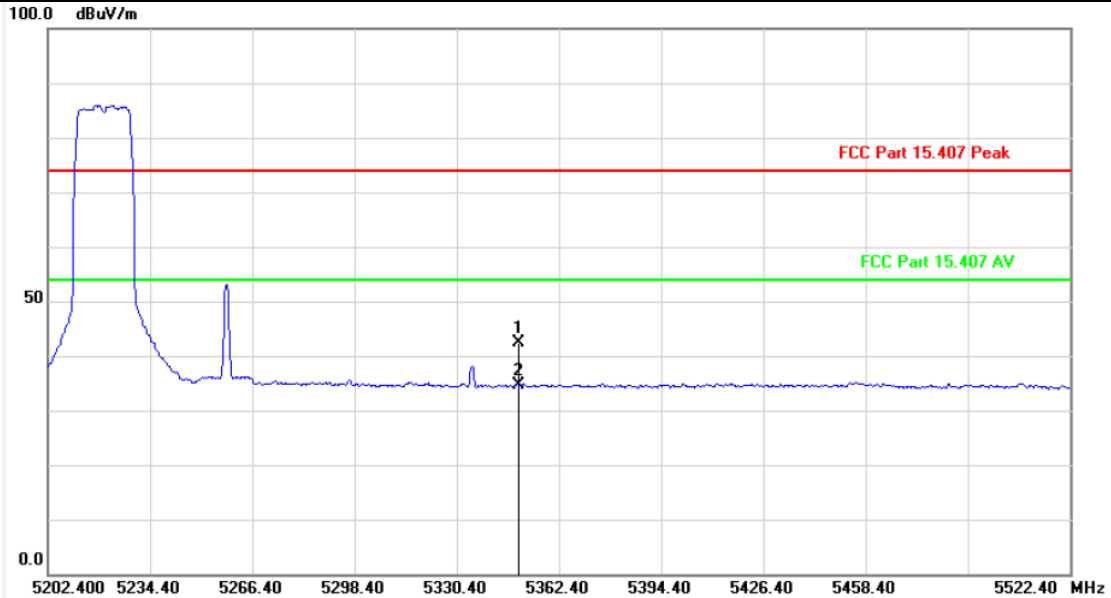


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.69	42.36	74.00	-31.64	peak
2	5350.000	-2.33	36.86	34.53	54.00	-19.47	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

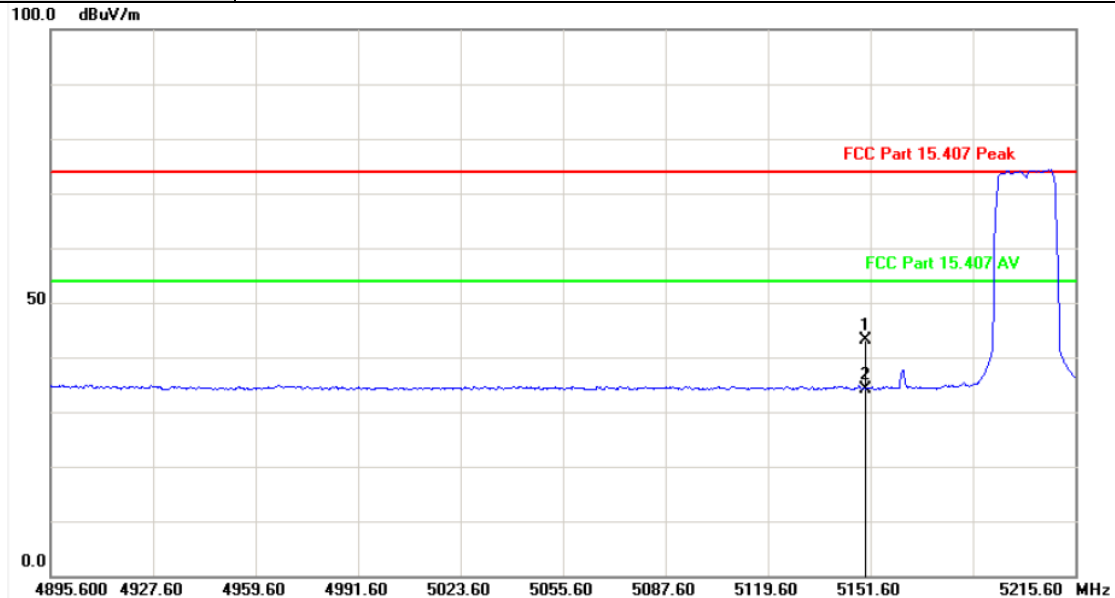

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	45.70	43.07	74.00	-30.93	peak
2	5150.000	-2.63	36.82	34.19	54.00	-19.81	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

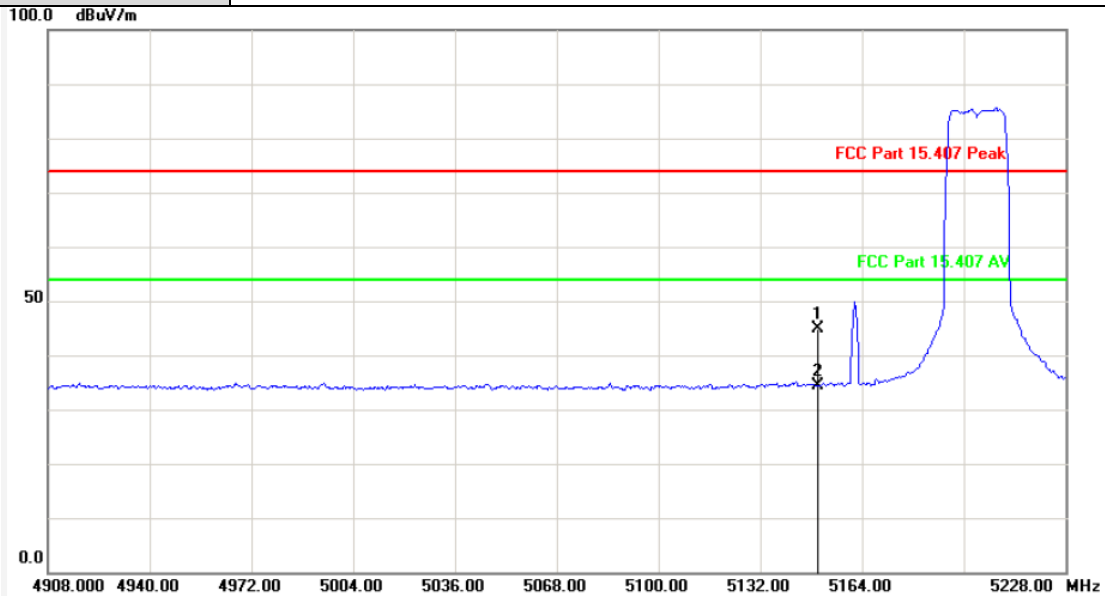

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	47.40	44.77	74.00	-29.23	peak
2	5150.000	-2.63	37.10	34.47	54.00	-19.53	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

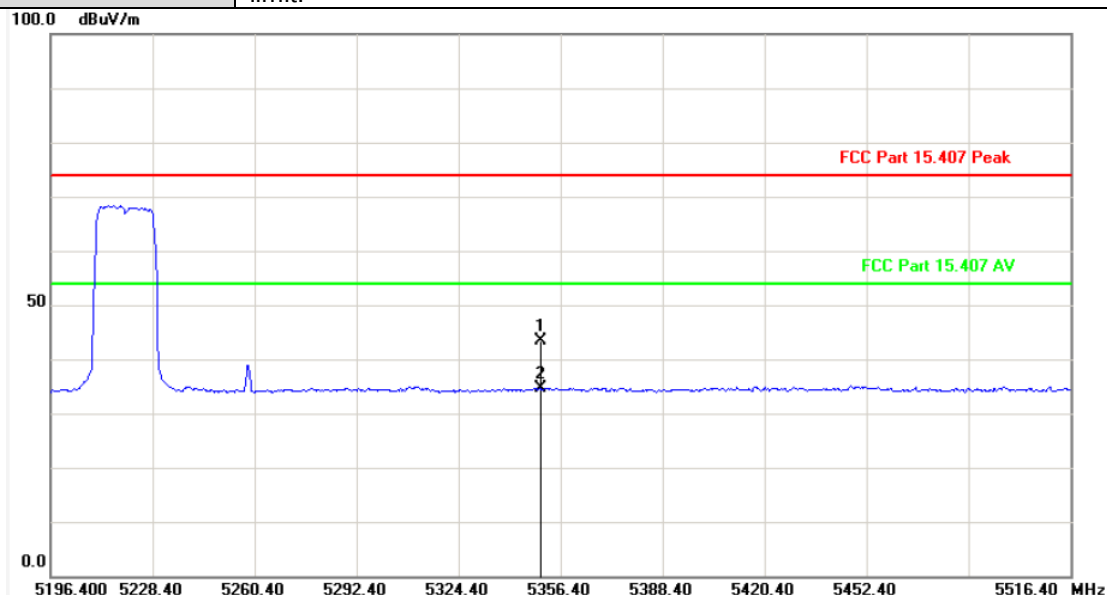


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	45.69	43.36	74.00	-30.64	peak
2	5350.000	-2.33	36.96	34.63	54.00	-19.37	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

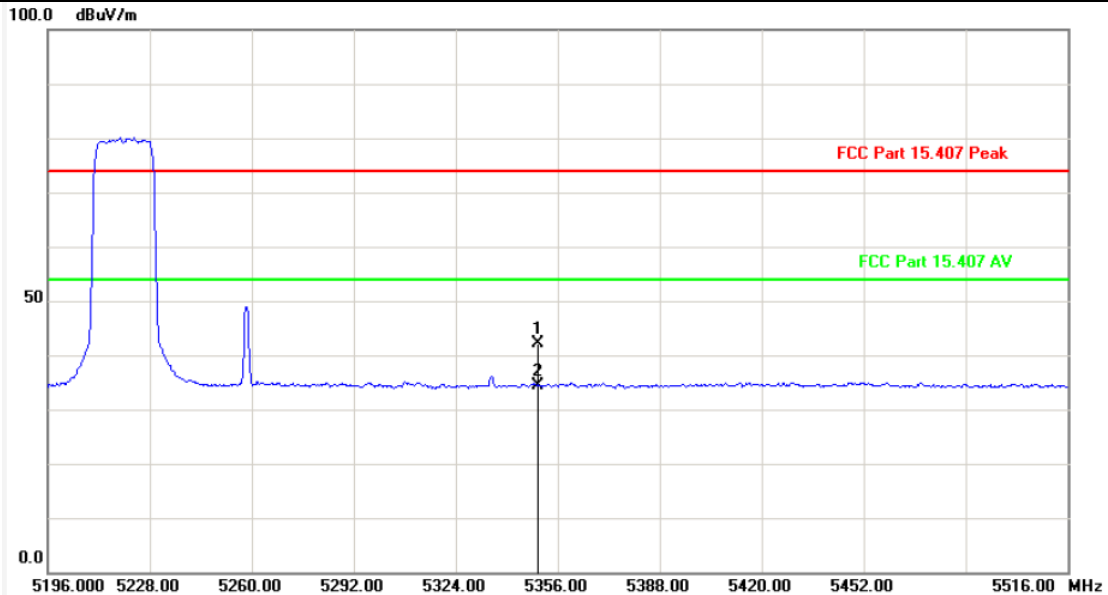

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.35	42.02	74.00	-31.98	peak
2	5350.000	-2.33	36.81	34.48	54.00	-19.52	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

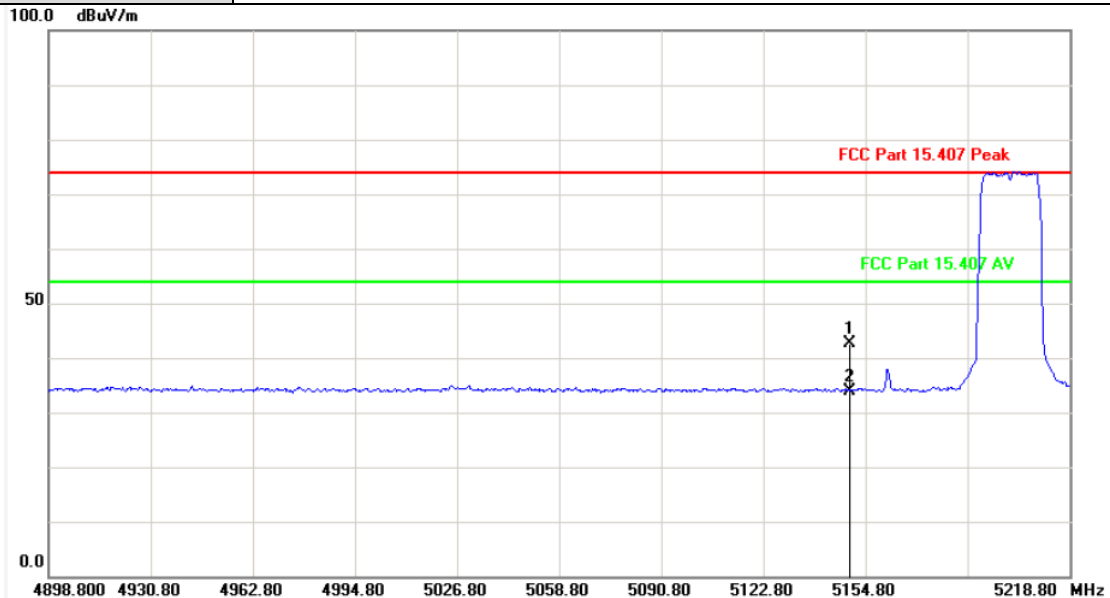


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	45.36	42.73	74.00	-31.27	peak
2	5150.000	-2.63	36.53	33.90	54.00	-20.10	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

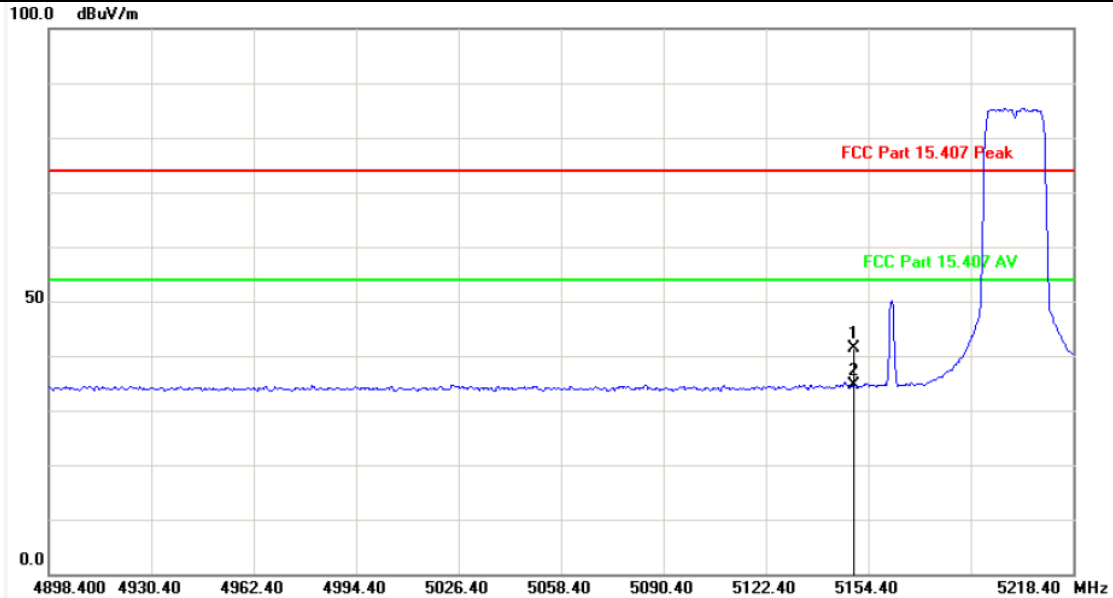


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	43.98	41.35	74.00	-32.65	peak
2	5150.000	-2.63	37.17	34.54	54.00	-19.46	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

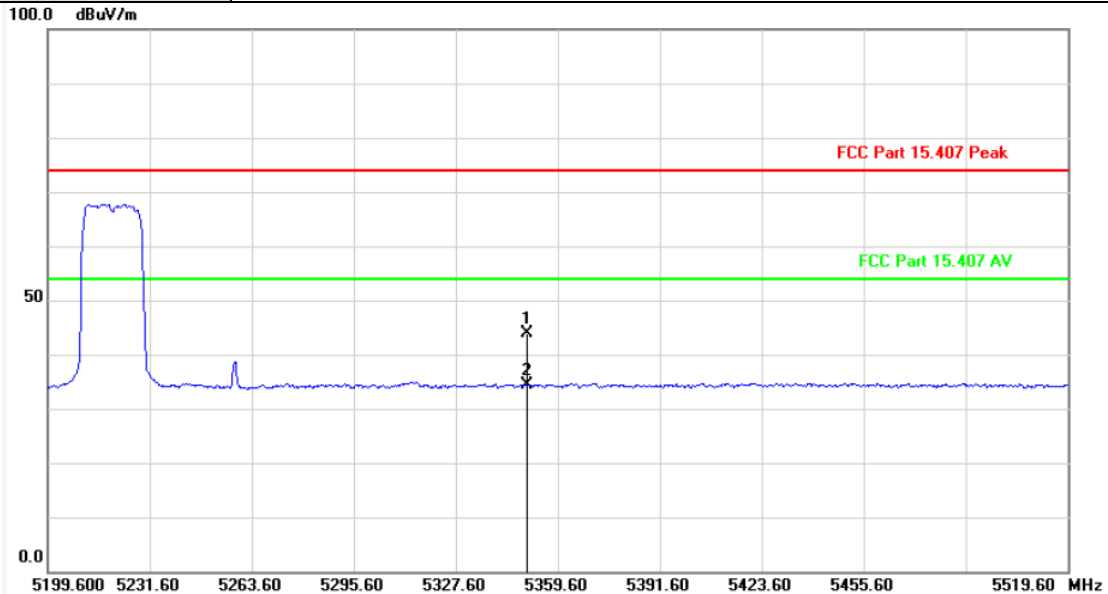


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	46.16	43.83	74.00	-30.17	peak
2	5350.000	-2.33	36.72	34.39	54.00	-19.61	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5220MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

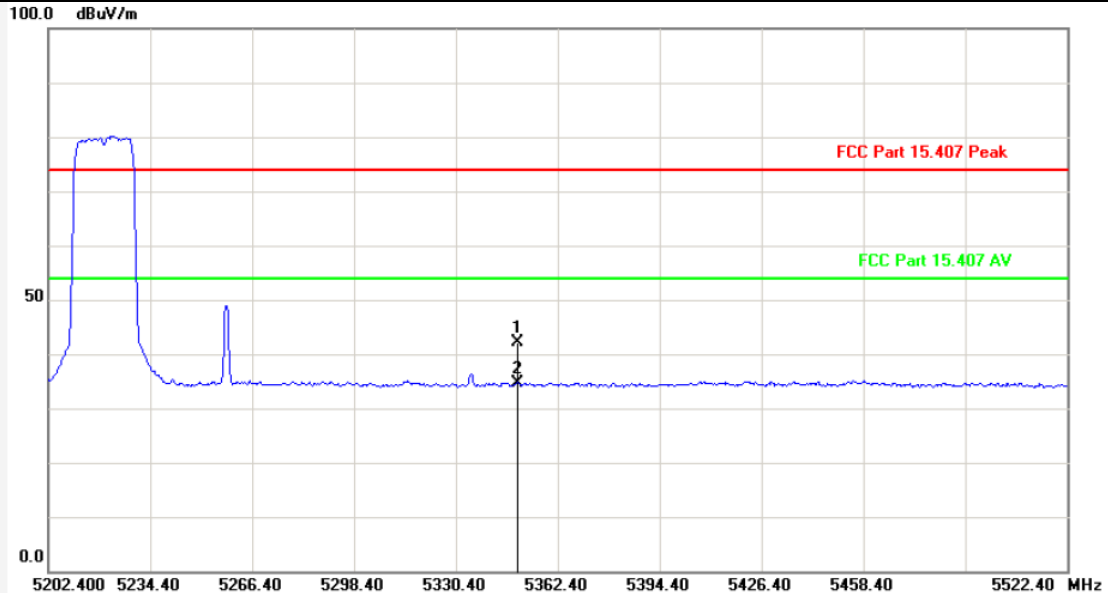

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.38	42.05	74.00	-31.95	peak
2	5350.000	-2.33	36.87	34.54	54.00	-19.46	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.




No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	47.67	45.04	74.00	-28.96	peak
2	5150.000	-2.63	37.76	35.13	54.00	-18.87	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

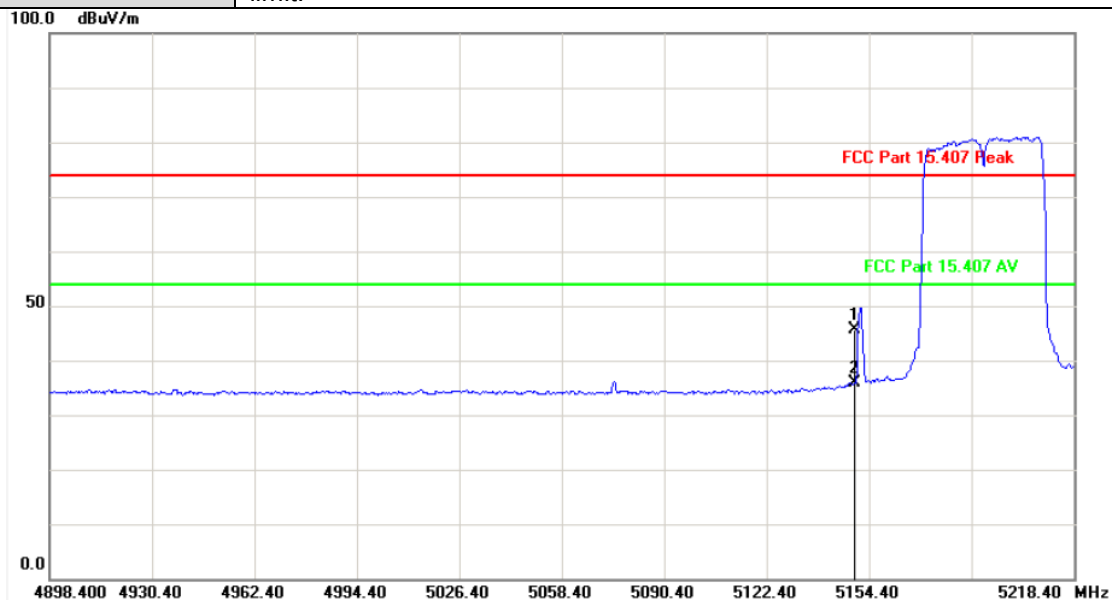

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	48.36	45.73	74.00	-28.27	peak
2	5150.000	-2.63	38.53	35.90	54.00	-18.10	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

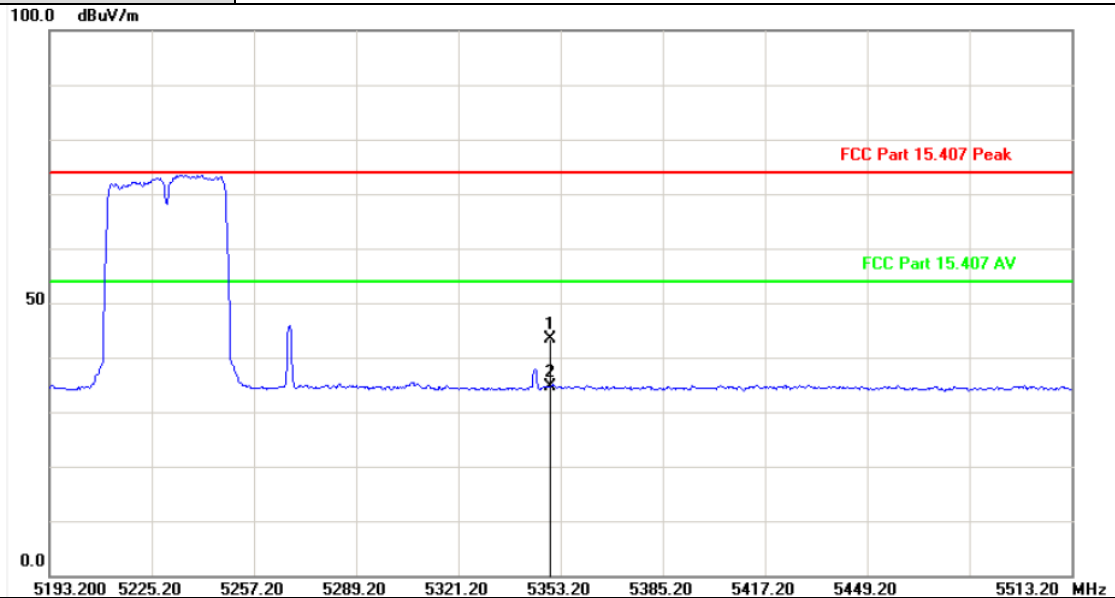


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	45.76	43.43	74.00	-30.57	peak
2	5350.000	-2.33	36.84	34.51	54.00	-19.49	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

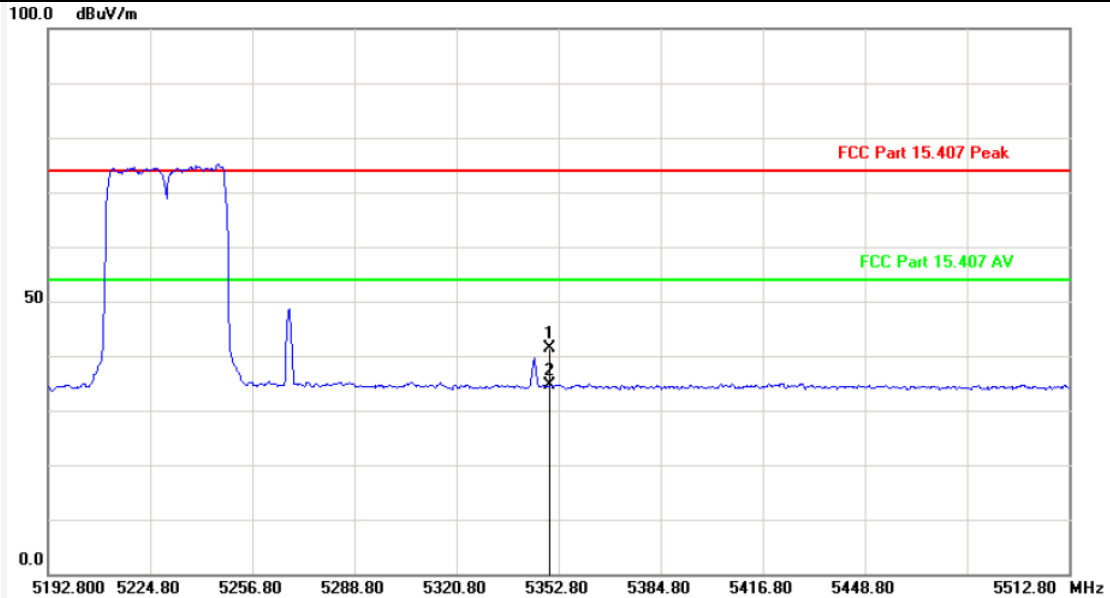


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	43.64	41.31	74.00	-32.69	peak
2	5350.000	-2.33	36.87	34.54	54.00	-19.46	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

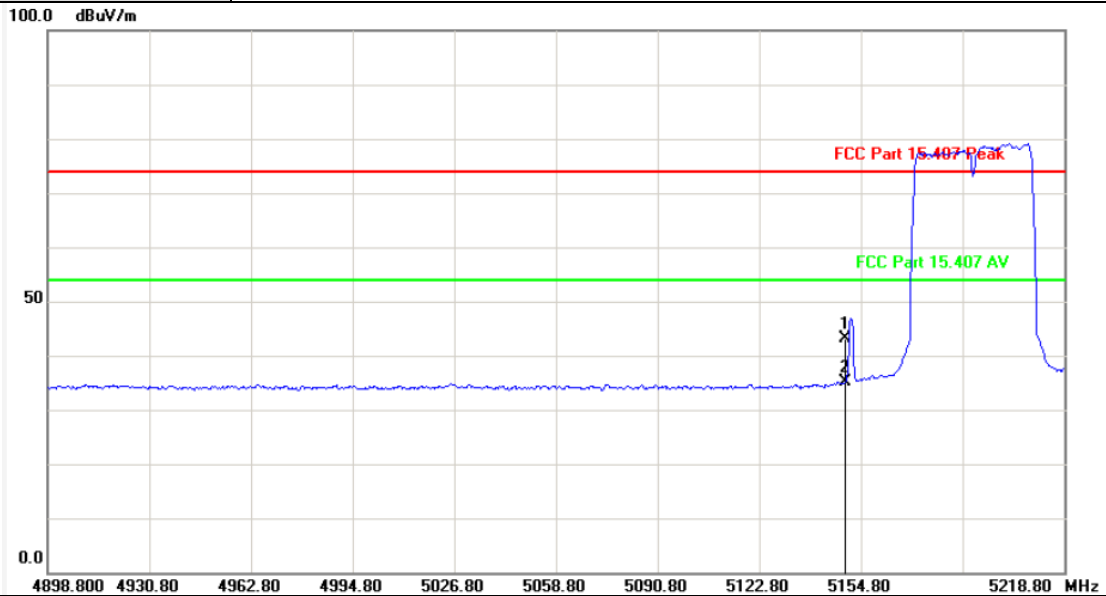


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	45.68	43.05	74.00	-30.95	peak
2	5150.000	-2.63	37.76	35.13	54.00	-18.87	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

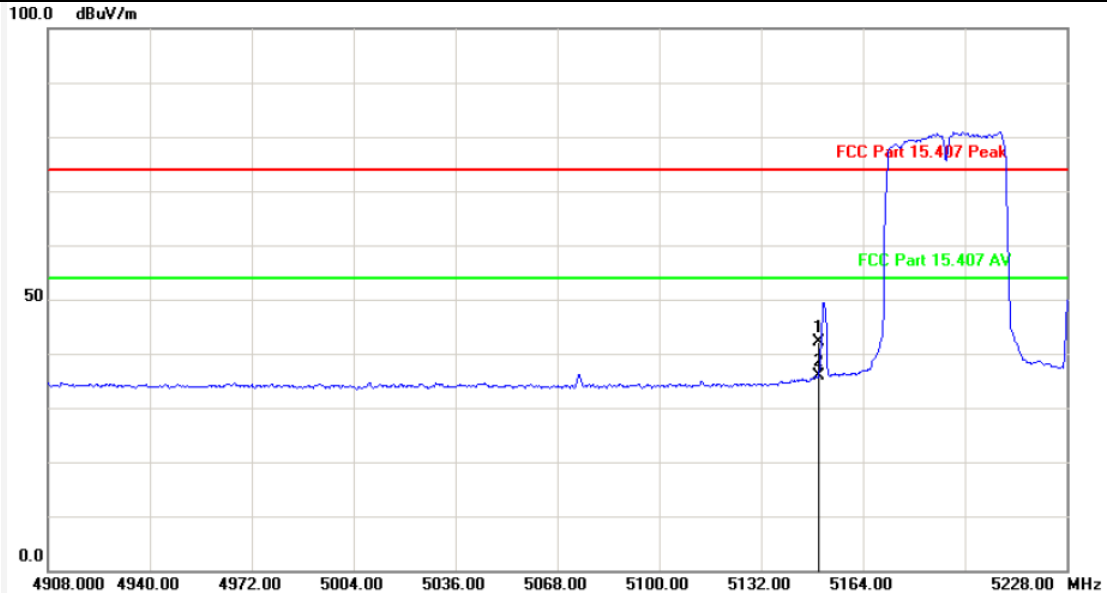

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	44.67	42.04	74.00	-31.96	peak
2	5150.000	-2.63	38.60	35.97	54.00	-18.03	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

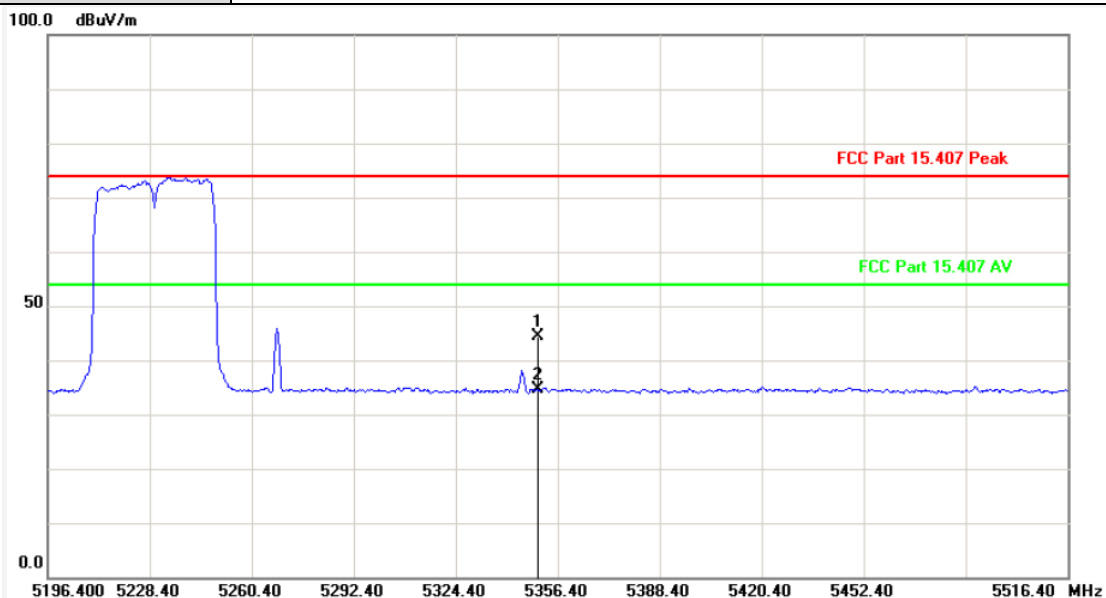

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	46.74	44.41	74.00	-29.59	peak
2	5350.000	-2.33	36.85	34.52	54.00	-19.48	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

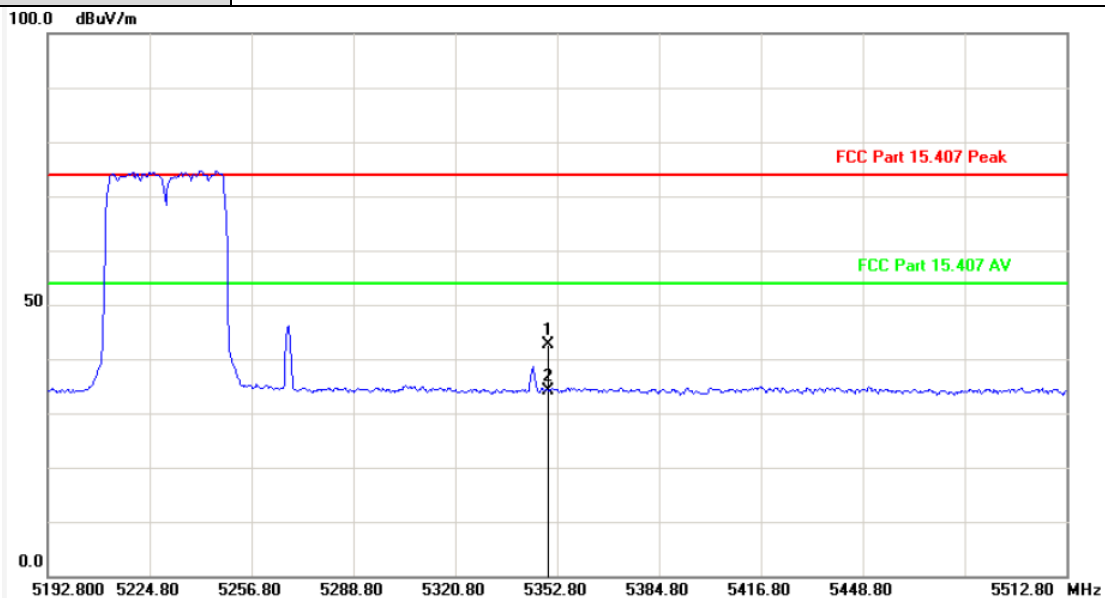

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	-2.33	44.99	42.66	74.00	-31.34	peak
2	5350.000	-2.33	36.45	34.12	54.00	-19.88	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

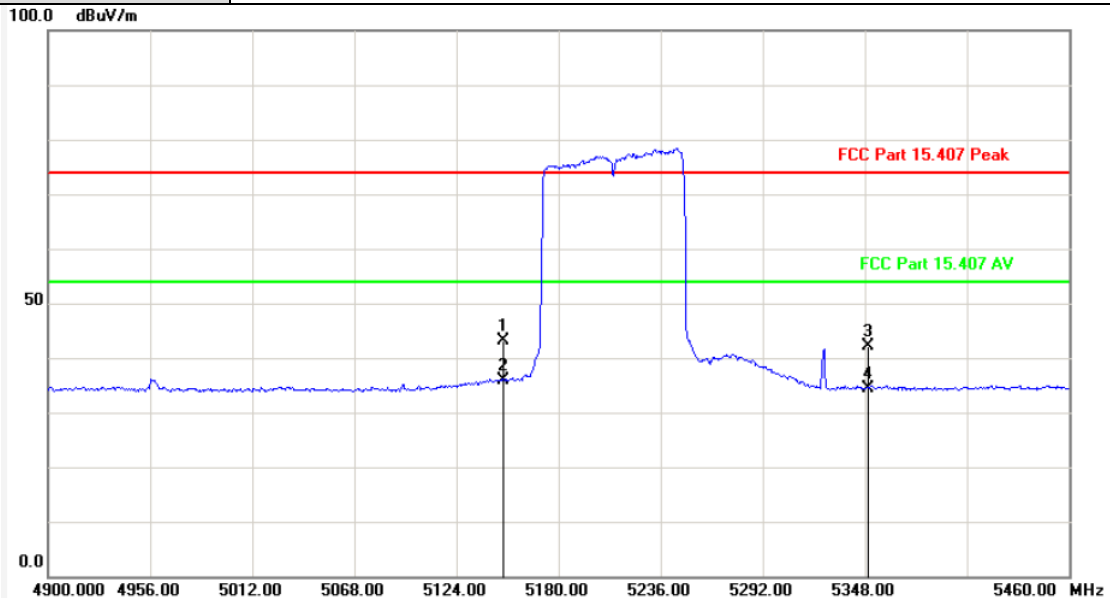


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	45.82	43.19	74.00	-30.81	peak
2	5150.000	-2.63	38.50	35.87	54.00	-18.13	AVG
3	5350.000	-2.33	44.49	42.16	74.00	-31.84	peak
4	5350.000	-2.33	36.82	34.49	54.00	-19.51	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

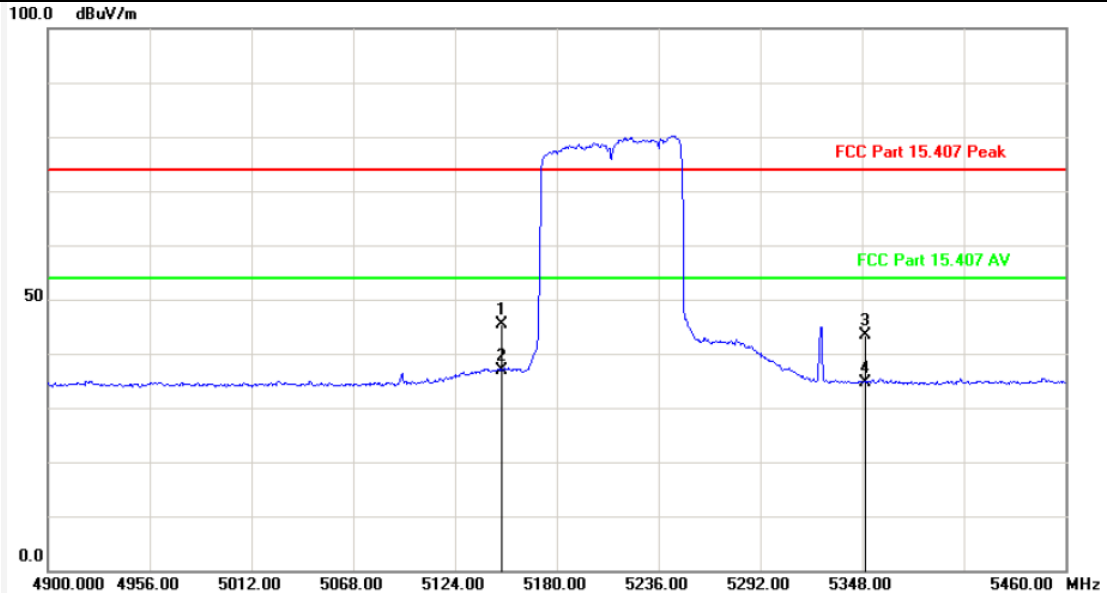

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	-2.63	48.04	45.41	74.00	-28.59	peak
2	5150.000	-2.63	39.53	36.90	54.00	-17.10	AVG
3	5350.000	-2.33	45.63	43.30	74.00	-30.70	peak
4	5350.000	-2.33	37.05	34.72	54.00	-19.28	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

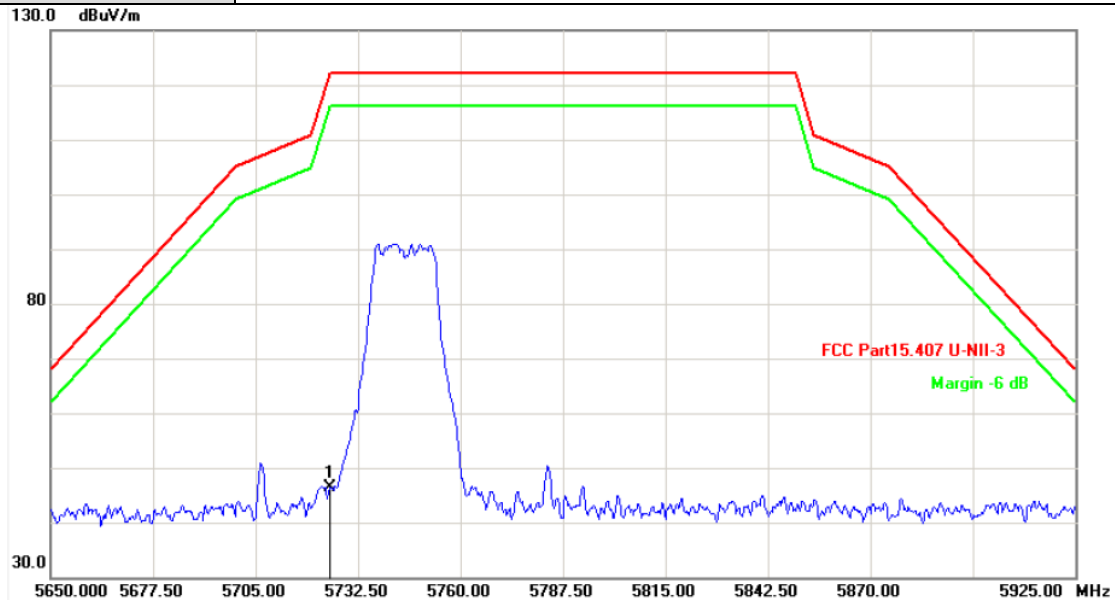


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	47.92	46.41	122.20	-75.79	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

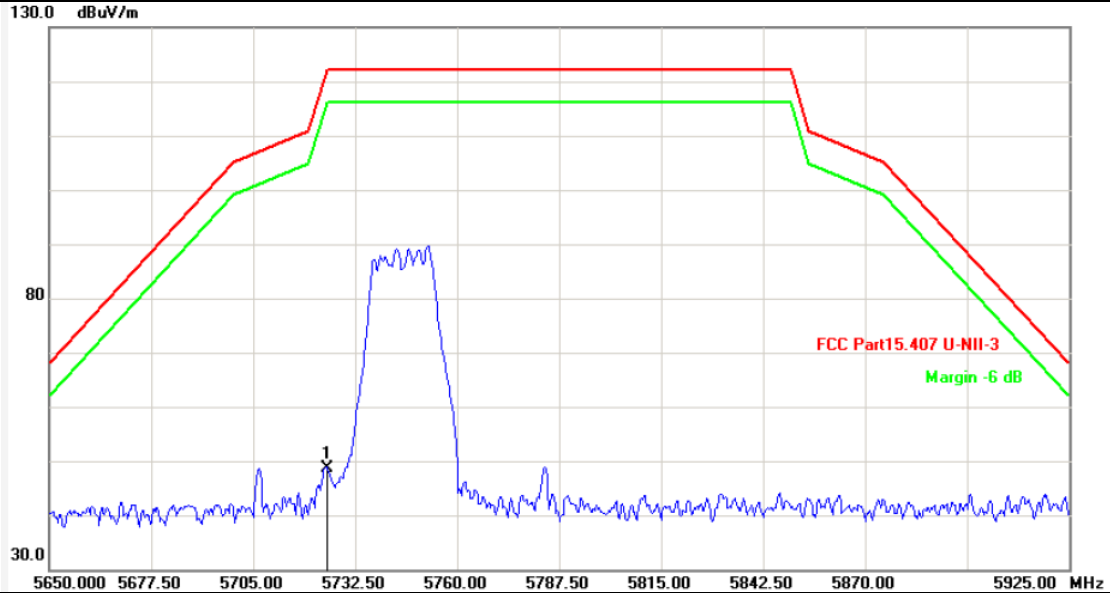


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	50.20	48.69	122.20	-73.51	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

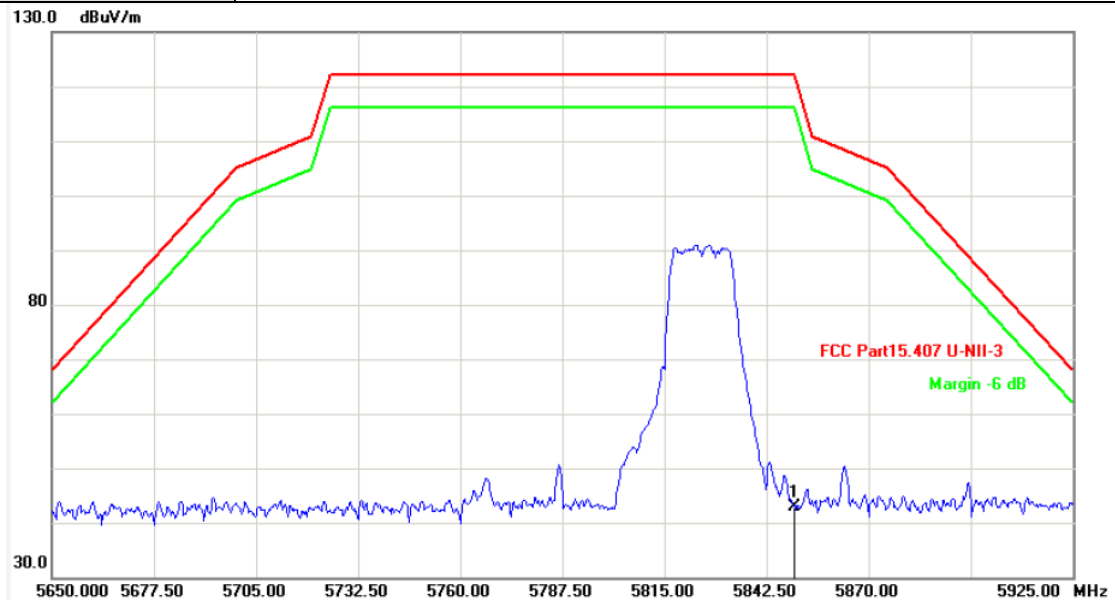

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	44.20	43.00	122.20	-79.20	peak


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

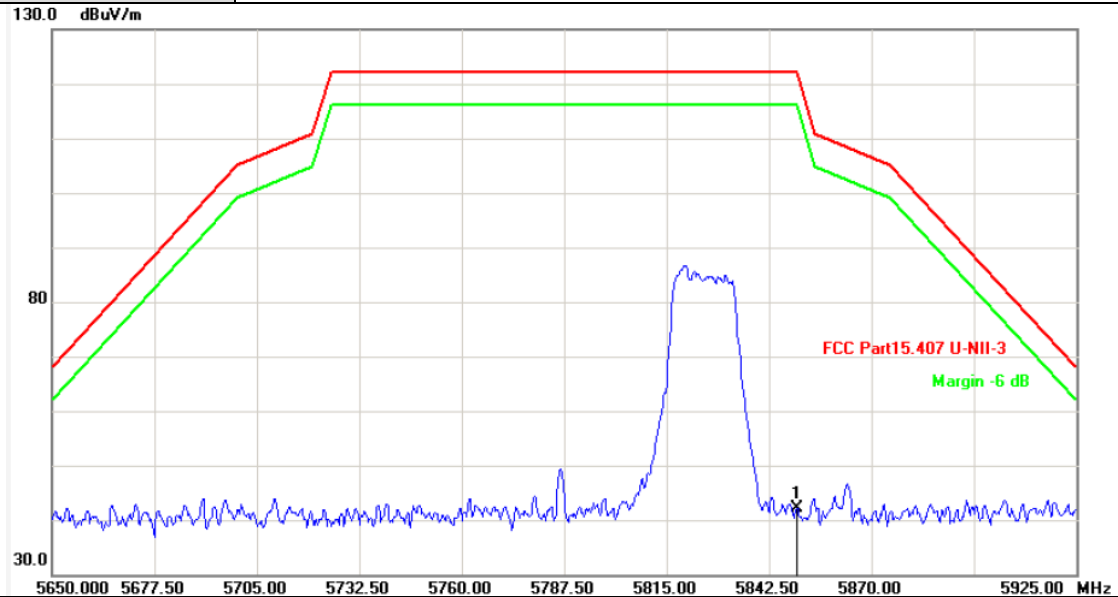


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	43.23	42.03	122.20	-80.17	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

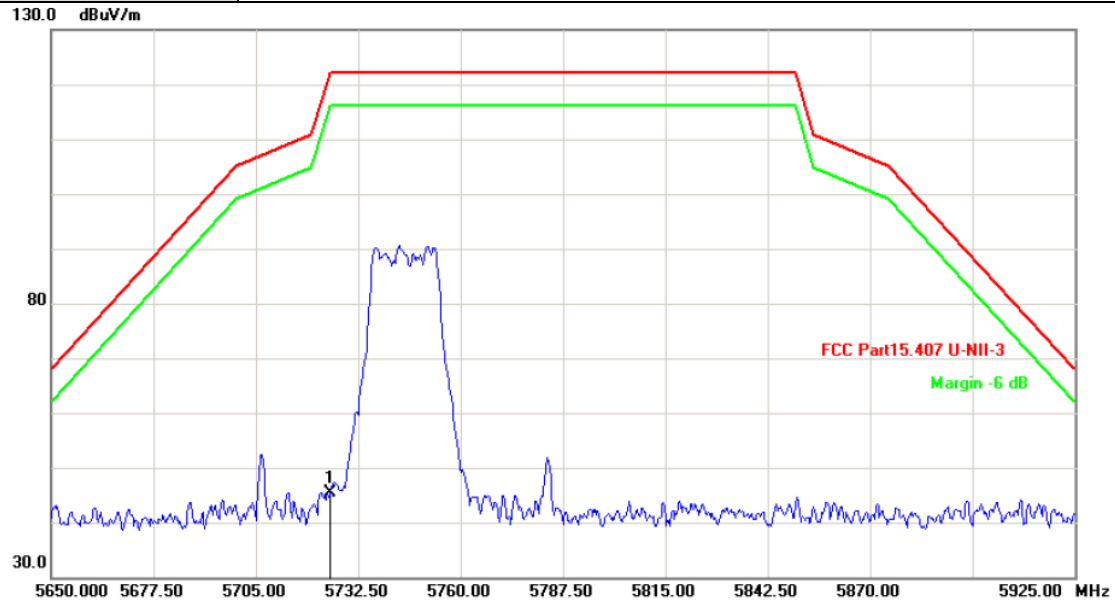

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.99	45.48	122.20	-76.72	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

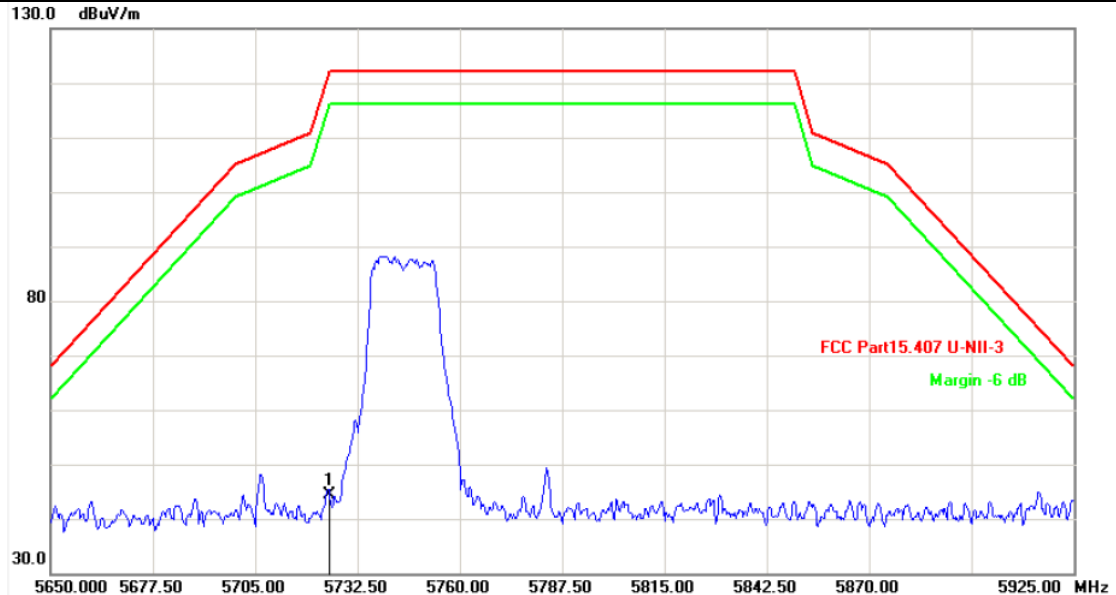


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.00	44.49	122.20	-77.71	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

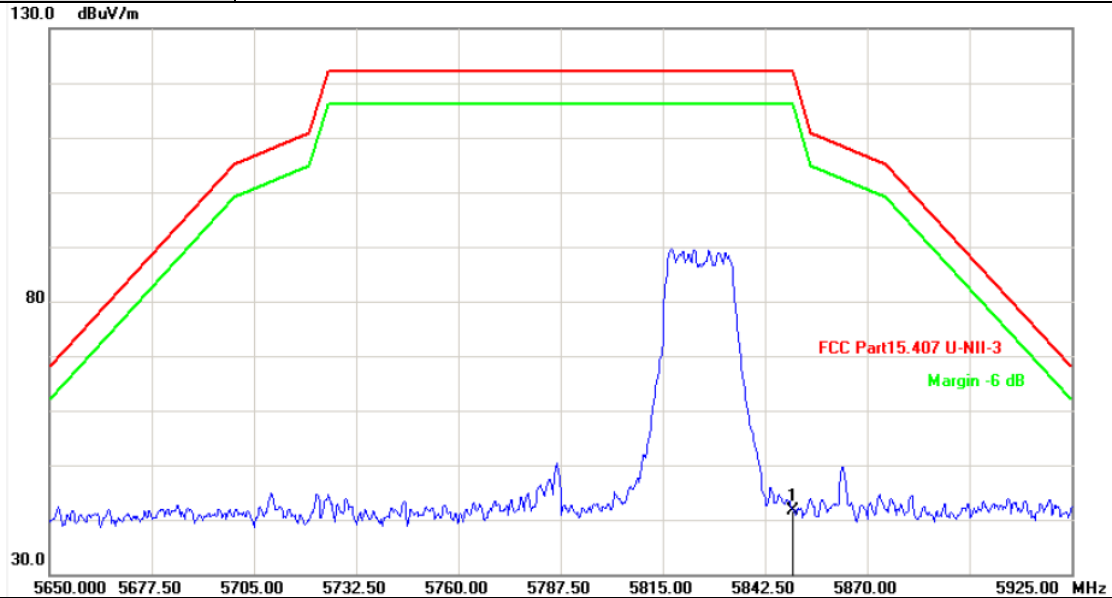


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.90	41.70	122.20	-80.50	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

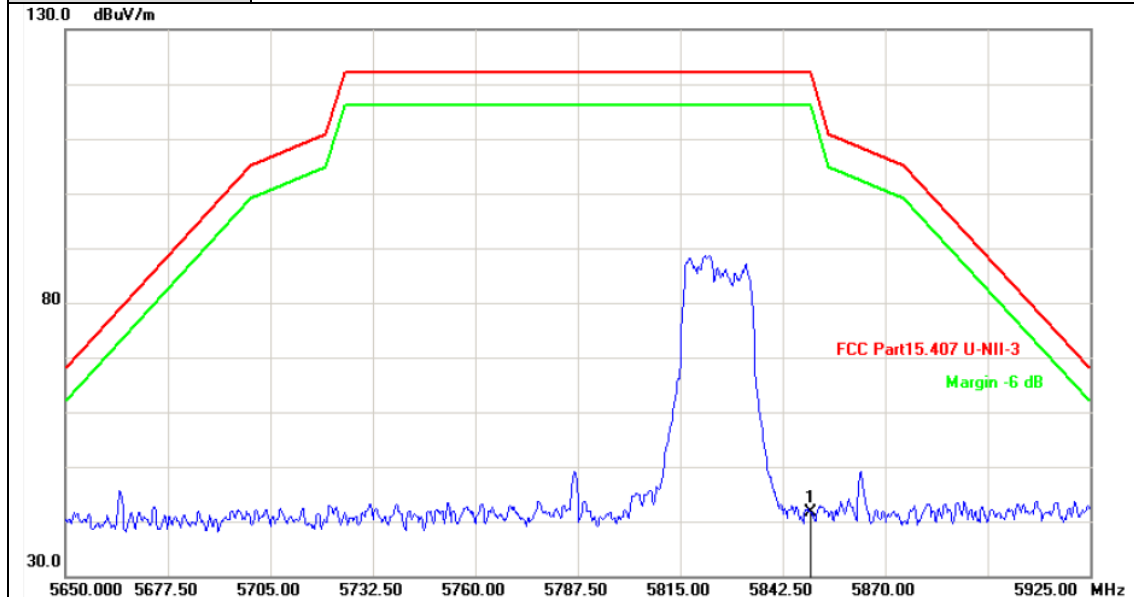


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.87	41.67	122.20	-80.53	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

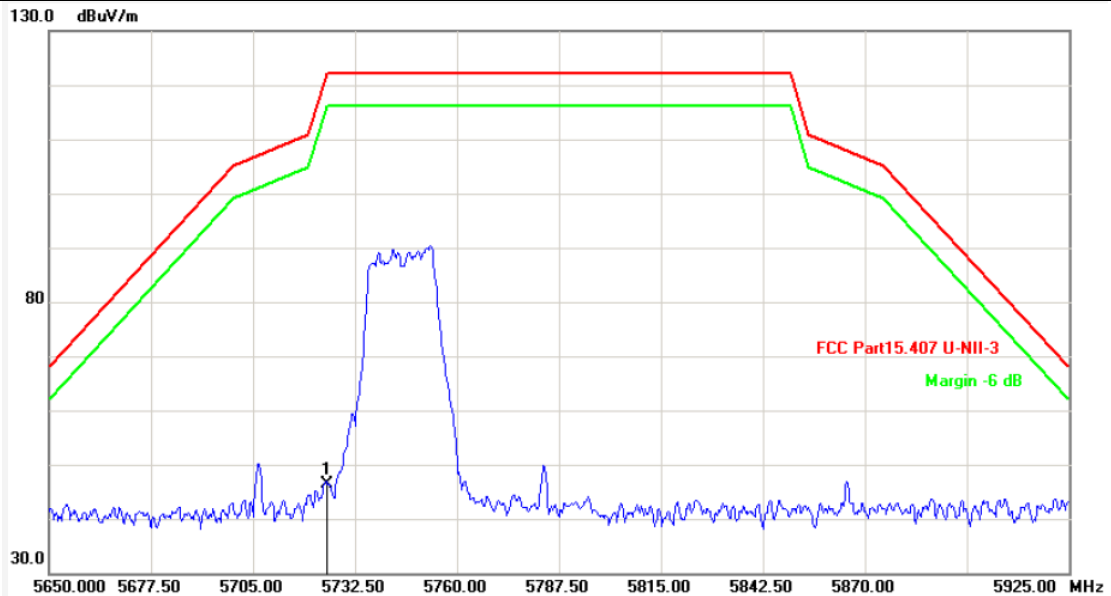

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	47.98	46.47	122.20	-75.73	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

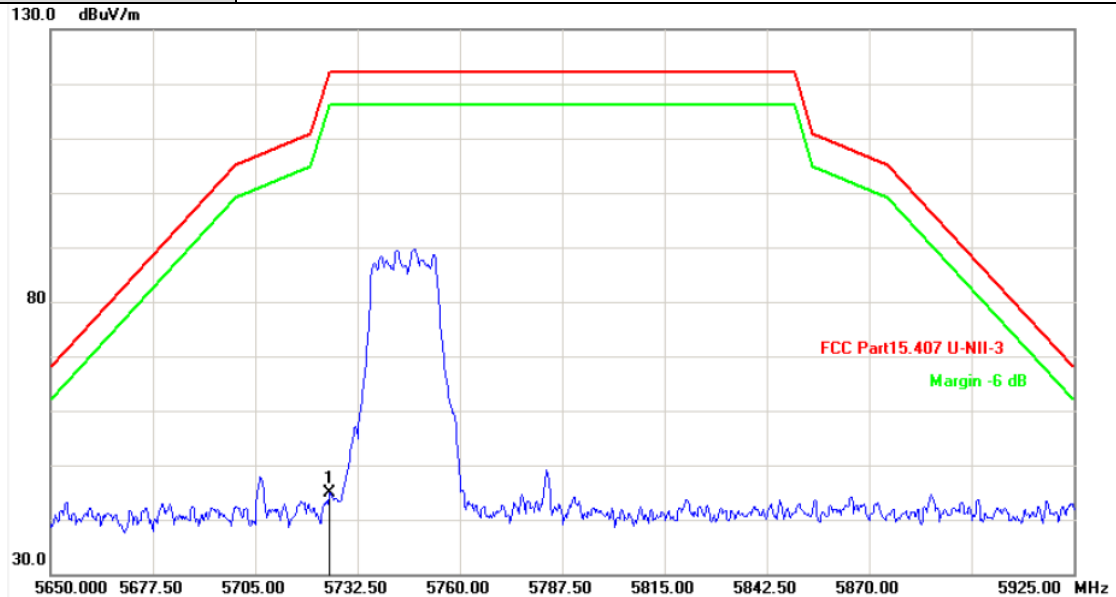


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.36	44.85	122.20	-77.35	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

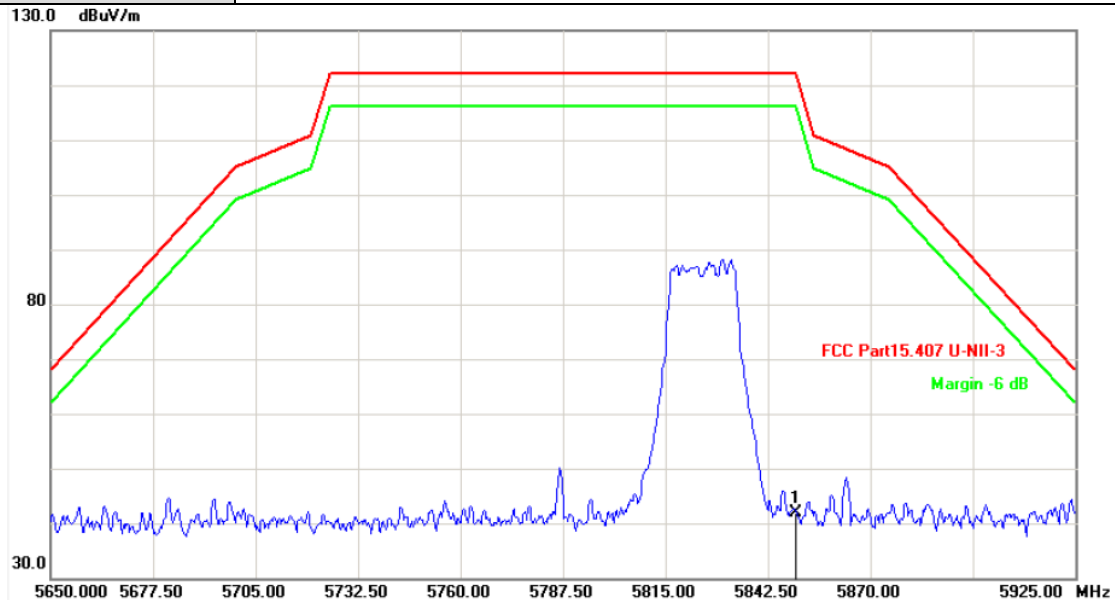

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	43.04	41.84	122.20	-80.36	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

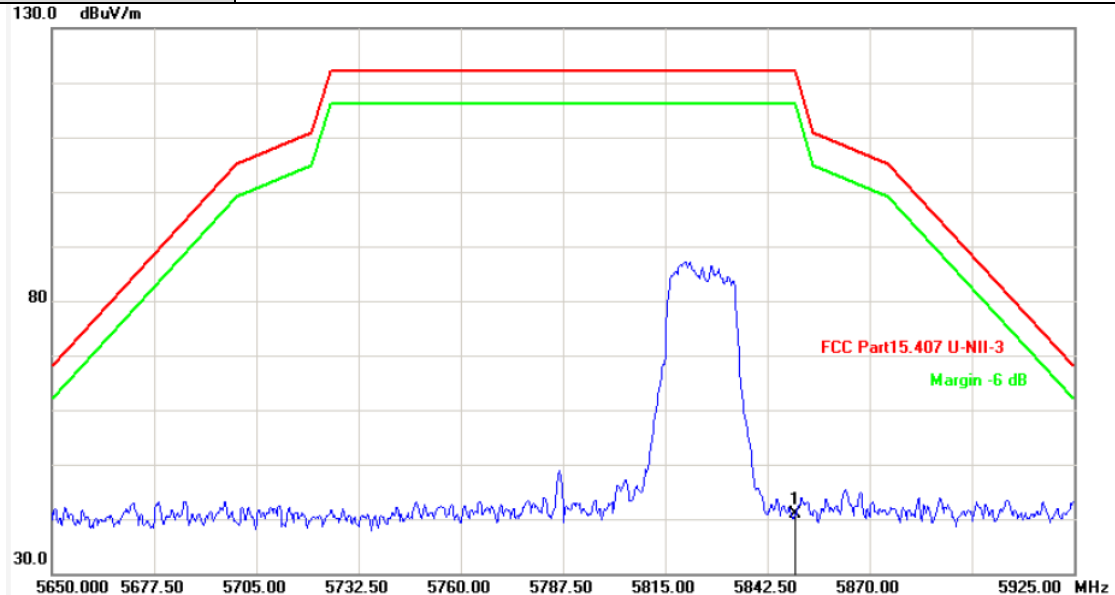

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.17	40.97	122.20	-81.23	peak


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

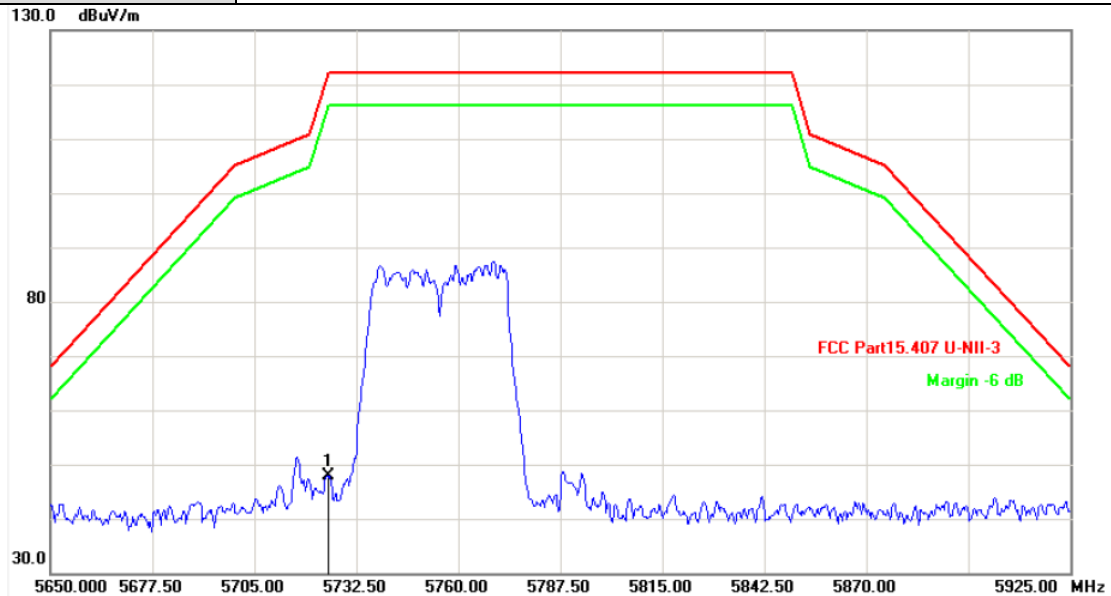


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	49.43	47.92	122.20	-74.28	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

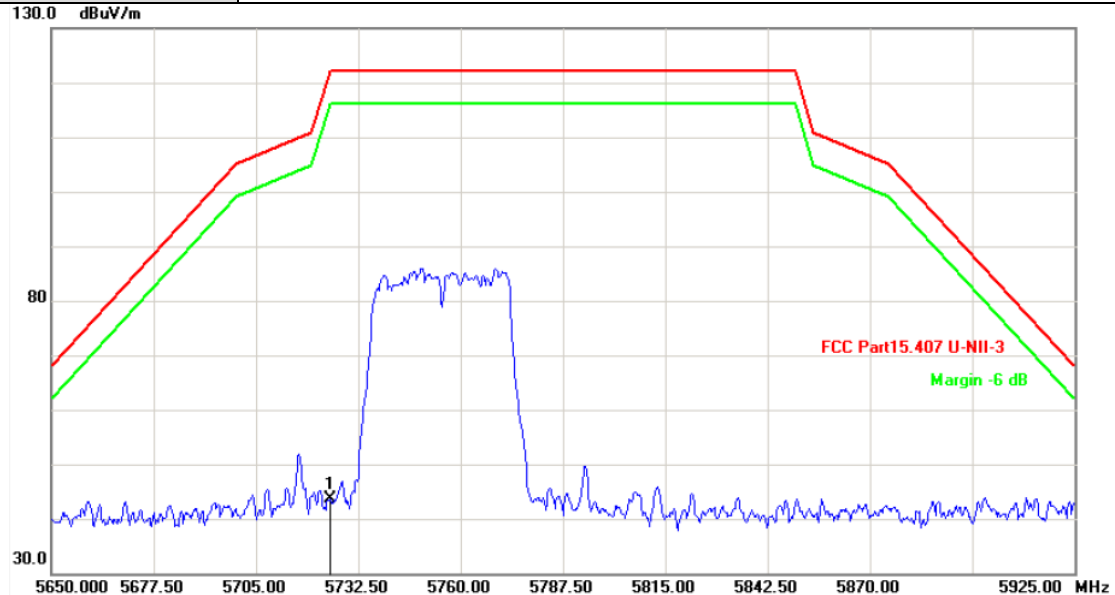


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	45.10	43.59	122.20	-78.61	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

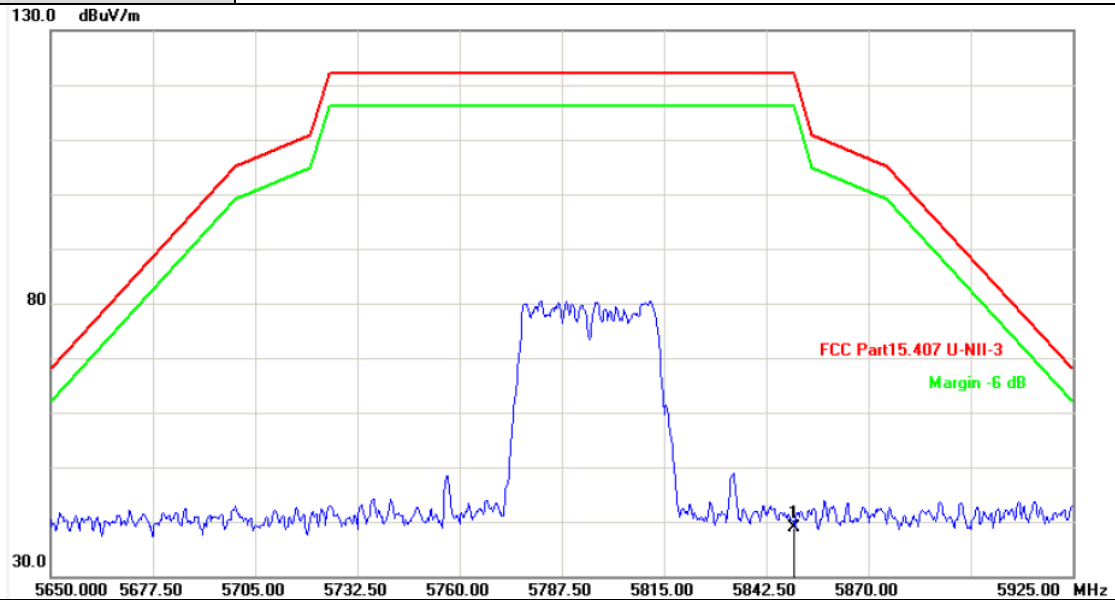


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	40.06	38.86	122.20	-83.34	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

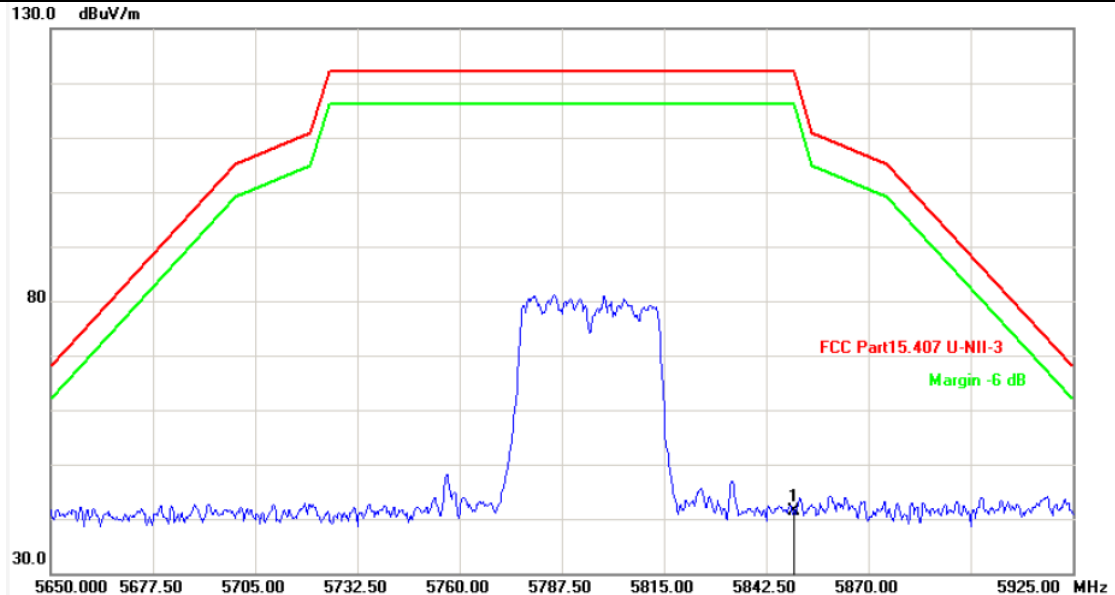


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.66	41.46	122.20	-80.74	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

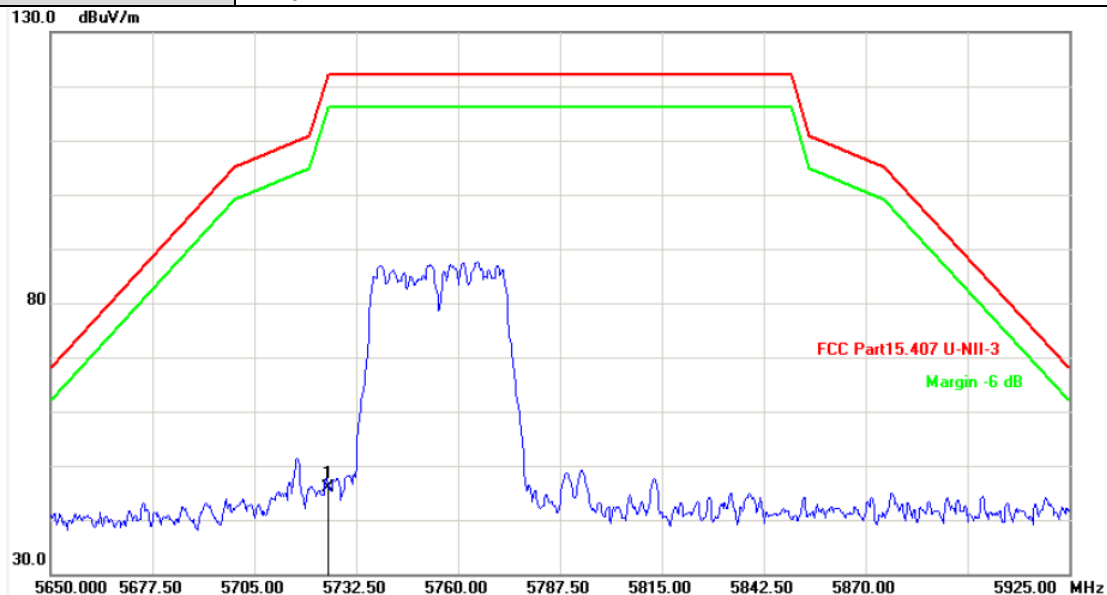


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	47.38	45.87	122.20	-76.33	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

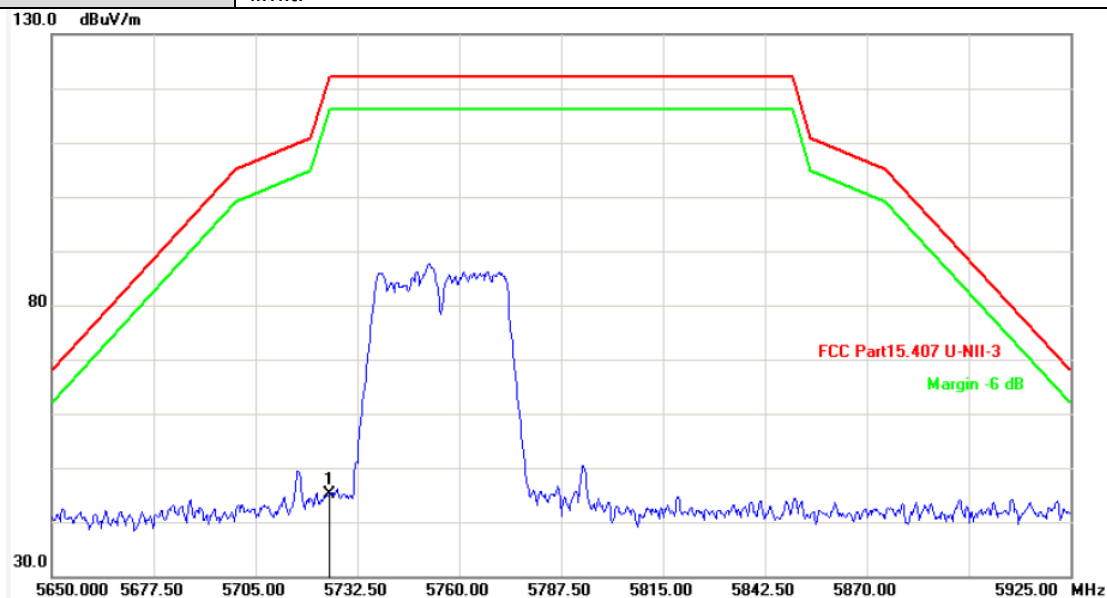

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.67	45.16	122.20	-77.04	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

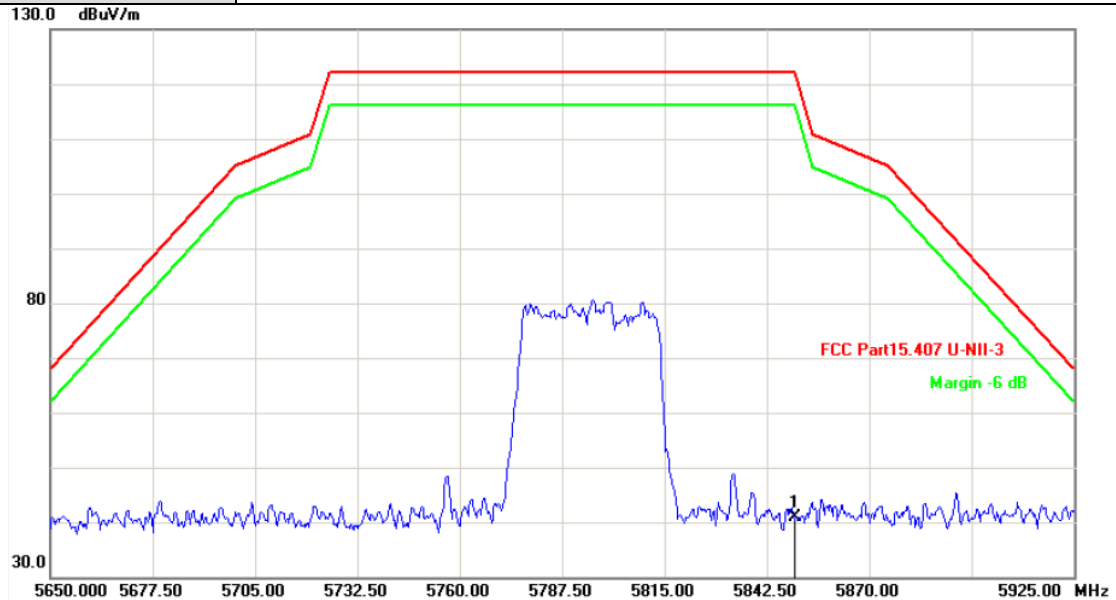

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.19	40.99	122.20	-81.21	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

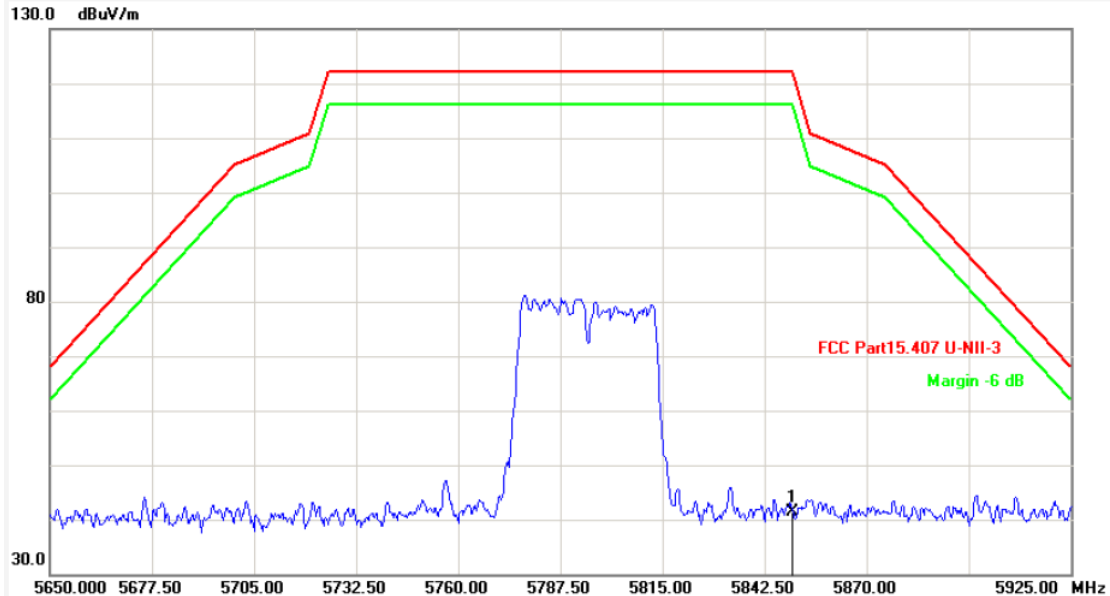


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	-1.20	42.54	41.34	122.20	-80.86	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.:	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

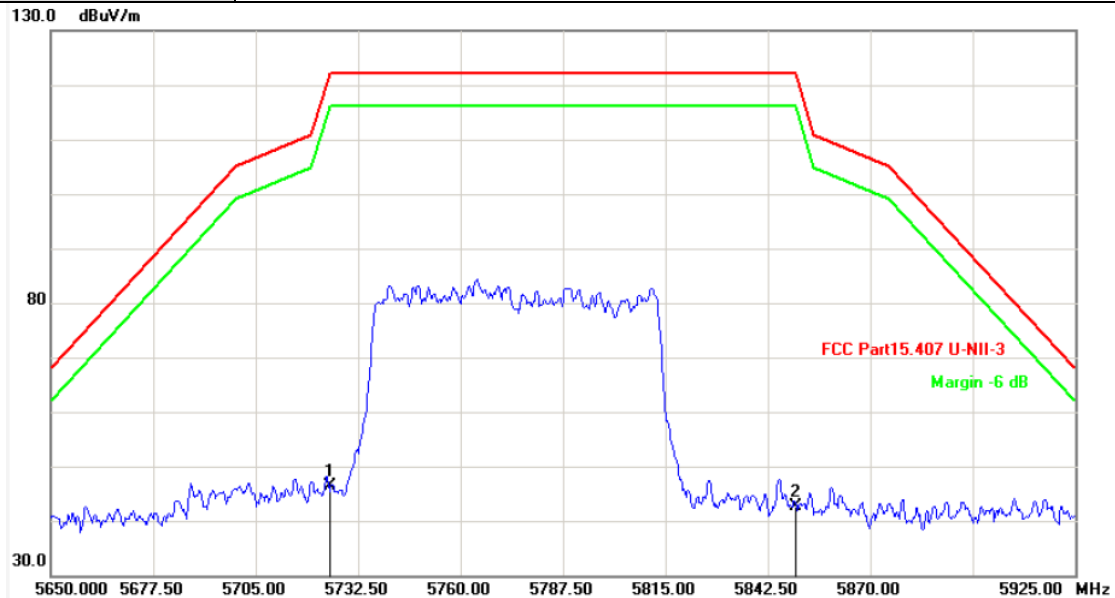

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	47.85	46.34	122.20	-75.86	peak
2	5850.000	-1.20	43.85	42.65	122.20	-79.55	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.:	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

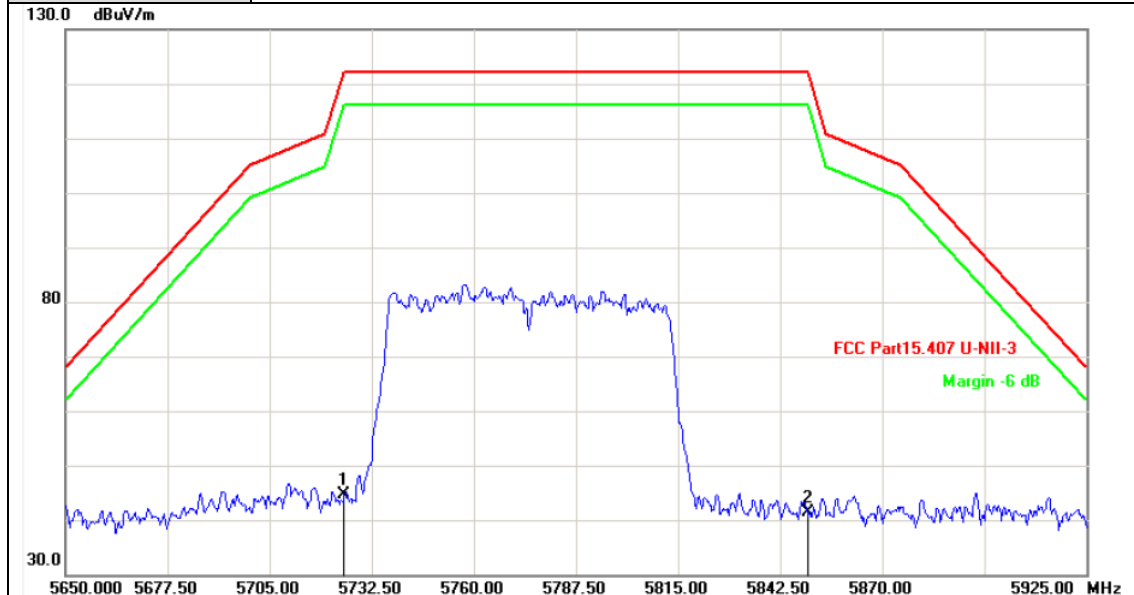

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	-1.51	46.16	44.65	122.20	-77.55	peak
2	5850.000	-1.20	42.59	41.39	122.20	-80.81	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value




3.4. Bandwidth Test

Limit

FCC Part 15 Subpart C(15.407)/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
26 Bandwidth	N/A	5150~5250
		5250~5350
		5500~5700
6 dB Bandwidth	>500kHz	5725~5850

Test Configuration

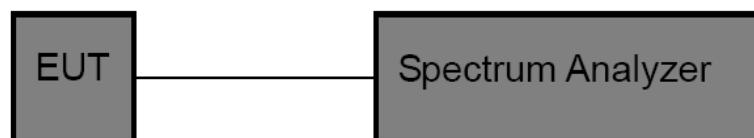

Test Procedure

Please refer to According to KDB789033 D02, for the measurement methods.

The setting of the spectrum analyser as below:

26dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW>RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto



6dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	VBW>=3*RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
RBW	1% to 5% of the OBW
VBW	≥ 3RBW
Detector	Peak
Trace	Max Hold

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3

Test Results

Please see the Appendix A1, A2, A3




3.5. Output Power Test

Limit

FCC Part 15 Subpart E (15.407)		
Test Item	Limit	Frequency Range(MHz)
Conducted Output Power	Fixed: 1 Watt (30dBm) Mobile and Portable: 250mW (24dBm)	5150~5250
	250mW (24dBm)	5250~5350
	250mW (24dBm)	5500~5700
	1 Watt (30dBm)	5725~5850

RSS-247		
Test Item	Limit	Frequency Range(MHz)
Conducted Output Power	/	5150~5250
	/	
	/	
	Other devices: 250mW or $11 + 10 \cdot \log_{10}^B$ dBm, Whichever is less (B=99% OBW in MHz)	5250~5350
	All devices: 250mW or $11 + 10 \cdot \log_{10}^B$ dBm, Whichever is less (B=99% OBW in MHz)	5500~5700
	1W	5725~5850

Test Configuration

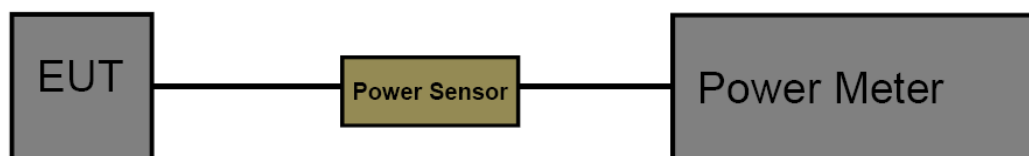

Test Procedure

The measurement is according to section 3 of KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

Test Mode

Please refer to the clause 2.3

Test Result

Please see the Appendix B




3.6. Power Spectral Density Test

Limit

FCC Part 15 Subpart E(15.407)/ RSS-247		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	Other than Mobile and Portable : 17dBm/MHz Mobile and Portable : 11dBm/MHz	5150~5250
	11dBm/MHz	5250~5350
	11dBm/MHz	5500~5700
	30dBm/500kHz	5725~5850

Test Configuration

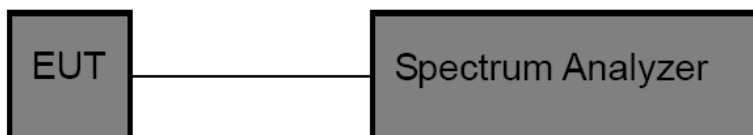

Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW)(alternatively, the entire 99% OBW) of the signal.
- (4) Set the RBW to: 1 MHz
- (5) Set the VBW to: 3 MHz
- (6) Detector: RMS
- (7) Trace: Max Hold
- (7) Sweep time: auto
- (8) Trace average at least 100 traces in power averaging.
- (9) User the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3

Test Result

Please see the Appendix C




3.7. Frequency Stability Measurement

Limit

FCC Part 15 Subpart C(15.407)		
Test Item	Limit	Frequency Range(MHz)
Peak Excursion Measurement	Specified in the user's manual, the transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)	5150~5250
		5250~5350
		5500~5700
		5725~5850

Test Configuration

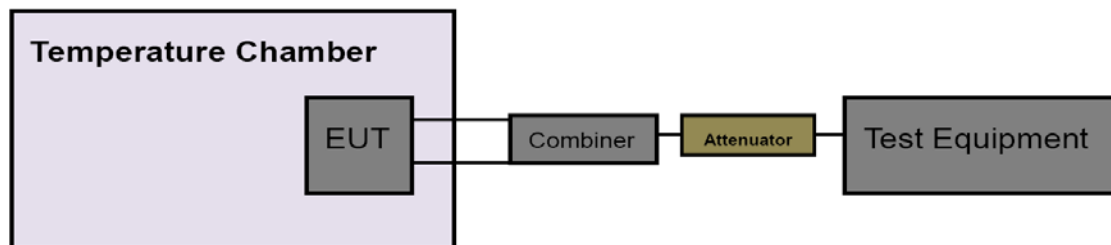

Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 10 kHz, VBW=10 kHz with peak detector and maxhold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- (6) Extreme temperature is 0°C~50°C

NOTE: The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

Test Mode

Please refer to the clause 2.3

Test Result



Voltage								
Test Mode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5200	NV	NT	-19000	-3.653846	20	PASS
			LV	NT	-19000	-3.653846	20	PASS
			HV	NT	-20000	-3.846154	20	PASS
	Ant2	5200	NV	NT	-18000	-3.461538	20	PASS
			LV	NT	-19000	-3.653846	20	PASS
			HV	NT	-19000	-3.653846	20	PASS
	Ant1	5220	NV	NT	-19000	-3.639847	20	PASS
			LV	NT	-19000	-3.639847	20	PASS
			HV	NT	-19000	-3.639847	20	PASS
	Ant2	5220	NV	NT	-20000	-3.831418	20	PASS
			LV	NT	-19000	-3.639847	20	PASS
			HV	NT	-19000	-3.639847	20	PASS
	Ant1	5745	NV	NT	-22000	-3.829417	20	PASS
			LV	NT	-22000	-3.829417	20	PASS
			HV	NT	-22000	-3.829417	20	PASS
	Ant2	5745	NV	NT	-21000	-3.655352	20	PASS
			LV	NT	-21000	-3.655352	20	PASS
			HV	NT	-21000	-3.655352	20	PASS
	Ant1	5785	NV	NT	-22000	-3.802939	20	PASS
			LV	NT	-22000	-3.802939	20	PASS
			HV	NT	-23000	-3.975799	20	PASS
	Ant2	5785	NV	NT	-21000	-3.630078	20	PASS
			LV	NT	-21000	-3.630078	20	PASS
			HV	NT	-21000	-3.630078	20	PASS
	Ant1	5825	NV	NT	-22000	-3.776824	20	PASS
			LV	NT	-22000	-3.776824	20	PASS
			HV	NT	-23000	-3.948498	20	PASS
	Ant2	5825	NV	NT	-21000	-3.605150	20	PASS
			LV	NT	-21000	-3.605150	20	PASS
			HV	NT	-21000	-3.605150	20	PASS
11N20SISO	Ant1	5200	NV	NT	-19000	-3.653846	20	PASS
			LV	NT	-19000	-3.653846	20	PASS
			HV	NT	-19000	-3.653846	20	PASS
	Ant2	5200	NV	NT	-19000	-3.653846	20	PASS
			LV	NT	-19000	-3.653846	20	PASS
			HV	NT	-19000	-3.653846	20	PASS
	Ant1	5220	NV	NT	-18000	-3.448276	20	PASS
			LV	NT	-18000	-3.448276	20	PASS
			HV	NT	-18000	-3.448276	20	PASS
	Ant2	5220	NV	NT	-19000	-3.639847	20	PASS
			LV	NT	-19000	-3.639847	20	PASS
			HV	NT	-19000	-3.639847	20	PASS
	Ant1	5745	NV	NT	-22000	-3.829417	20	PASS
			LV	NT	-22000	-3.829417	20	PASS
			HV	NT	-22000	-3.829417	20	PASS
	Ant2	5745	NV	NT	-21000	-3.655352	20	PASS
			LV	NT	-21000	-3.655352	20	PASS
			HV	NT	-21000	-3.655352	20	PASS
	Ant1	5785	NV	NT	-22000	-3.802939	20	PASS
			LV	NT	-21000	-3.630078	20	PASS
			HV	NT	-21000	-3.630078	20	PASS
	Ant2	5785	NV	NT	-21000	-3.630078	20	PASS
			LV	NT	-21000	-3.630078	20	PASS
			HV	NT	-21000	-3.630078	20	PASS
	Ant1	5825	NV	NT	-21000	-3.605150	20	PASS
			LV	NT	-21000	-3.605150	20	PASS
			HV	NT	-21000	-3.605150	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



	Ant2	5825	LV	NT	-21000	-3.605150	20	PASS
			HV	NT	-21000	-3.605150	20	PASS
			NV	NT	-21000	-3.605150	20	PASS
			LV	NT	-21000	-3.605150	20	PASS
			HV	NT	-21000	-3.605150	20	PASS
11N40SISO	Ant1	5190	NV	NT	-18000	-3.468208	20	PASS
			LV	NT	-18000	-3.468208	20	PASS
			HV	NT	-18000	-3.468208	20	PASS
	Ant2	5190	NV	NT	-18000	-3.468208	20	PASS
			LV	NT	-18000	-3.468208	20	PASS
			HV	NT	-18000	-3.468208	20	PASS
	Ant1	5230	NV	NT	-18000	-3.441683	20	PASS
			LV	NT	-18000	-3.441683	20	PASS
			HV	NT	-18000	-3.441683	20	PASS
	Ant2	5230	NV	NT	-18000	-3.441683	20	PASS
			LV	NT	-18000	-3.441683	20	PASS
			HV	NT	-18000	-3.441683	20	PASS
	Ant1	5755	NV	NT	-20000	-3.475239	20	PASS
			LV	NT	-20000	-3.475239	20	PASS
			HV	NT	-20000	-3.475239	20	PASS
	Ant2	5755	NV	NT	-20000	-3.475239	20	PASS
			LV	NT	-20000	-3.475239	20	PASS
			HV	NT	-20000	-3.475239	20	PASS
	Ant1	5795	NV	NT	-20000	-3.451251	20	PASS
			LV	NT	-20000	-3.451251	20	PASS
			HV	NT	-20000	-3.451251	20	PASS
	Ant2	5795	NV	NT	-20000	-3.451251	20	PASS
			LV	NT	-20000	-3.451251	20	PASS
			HV	NT	-21000	-3.623814	20	PASS
11AC20SISO	Ant1	5200	NV	NT	-18000	-3.461538	20	PASS
			LV	NT	-18000	-3.461538	20	PASS
			HV	NT	-18000	-3.461538	20	PASS
	Ant2	5200	NV	NT	-18000	-3.461538	20	PASS
			LV	NT	-17000	-3.269231	20	PASS
			HV	NT	-17000	-3.269231	20	PASS
	Ant1	5220	NV	NT	-18000	-3.448276	20	PASS
			LV	NT	-18000	-3.448276	20	PASS
			HV	NT	-18000	-3.448276	20	PASS
	Ant2	5220	NV	NT	-19000	-3.639847	20	PASS
			LV	NT	-19000	-3.639847	20	PASS
			HV	NT	-19000	-3.639847	20	PASS
	Ant1	5745	NV	NT	-20000	-3.481288	20	PASS
			LV	NT	-20000	-3.481288	20	PASS
			HV	NT	-20000	-3.481288	20	PASS
	Ant2	5745	NV	NT	-20000	-3.481288	20	PASS
			LV	NT	-20000	-3.481288	20	PASS
			HV	NT	-20000	-3.481288	20	PASS
	Ant1	5785	NV	NT	-20000	-3.457217	20	PASS
			LV	NT	-20000	-3.457217	20	PASS
			HV	NT	-20000	-3.457217	20	PASS
	Ant2	5785	NV	NT	-21000	-3.630078	20	PASS
			LV	NT	-21000	-3.630078	20	PASS
			HV	NT	-21000	-3.630078	20	PASS
	Ant1	5825	NV	NT	-21000	-3.605150	20	PASS
			LV	NT	-21000	-3.605150	20	PASS
			HV	NT	-22000	-3.776824	20	PASS
	Ant2	5825	NV	NT	-22000	-3.776824	20	PASS
			LV	NT	-21000	-3.605150	20	PASS
			HV	NT	-21000	-3.605150	20	PASS
11AC40SISO	Ant1	5190	NV	NT	-19000	-3.660886	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			LV	NT	-18000	-3.468208	20	PASS
			HV	NT	-19000	-3.660886	20	PASS
			NV	NT	-19000	-3.660886	20	PASS
	Ant2	5190	LV	NT	-18000	-3.468208	20	PASS
			HV	NT	-19000	-3.660886	20	PASS
			NV	NT	-18000	-3.441683	20	PASS
	Ant1	5230	LV	NT	-19000	-3.632887	20	PASS
			HV	NT	-19000	-3.632887	20	PASS
			NV	NT	-19000	-3.632887	20	PASS
	Ant2	5230	LV	NT	-19000	-3.632887	20	PASS
			HV	NT	-19000	-3.632887	20	PASS
			NV	NT	-21000	-3.649001	20	PASS
	Ant1	5755	LV	NT	-21000	-3.649001	20	PASS
			HV	NT	-21000	-3.649001	20	PASS
			NV	NT	-23000	-3.996525	20	PASS
	Ant2	5755	LV	NT	-23000	-3.996525	20	PASS
			HV	NT	-22000	-3.822763	20	PASS
			NV	NT	-20000	-3.451251	20	PASS
	Ant1	5795	LV	NT	-20000	-3.451251	20	PASS
			HV	NT	-21000	-3.623814	20	PASS
			NV	NT	-23000	-3.968939	20	PASS
11AC80SISO	Ant1	5210	LV	NT	-19000	-3.646833	20	PASS
			HV	NT	-19000	-3.646833	20	PASS
			NV	NT	-18000	-3.454894	20	PASS
	Ant2	5210	LV	NT	-22000	-4.222649	20	PASS
			HV	NT	-21000	-4.030710	20	PASS
			NV	NT	-21000	-3.636364	20	PASS
	Ant1	5775	LV	NT	-20000	-3.463203	20	PASS
			HV	NT	-21000	-3.636364	20	PASS
			NV	NT	-24000	-4.155844	20	PASS
	Ant2	5775	LV	NT	-24000	-4.155844	20	PASS
			HV	NT	-24000	-4.155844	20	PASS
			NV	NT	-24000	-4.155844	20	PASS

Temperature								
Test Mode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5200	NV	-30	-20000	-3.846154	20	PASS
			NV	-20	-20000	-3.846154	20	PASS
			NV	-10	-20000	-3.846154	20	PASS
			NV	0	-20000	-3.846154	20	PASS
			NV	10	-20000	-3.846154	20	PASS
			NV	20	-20000	-3.846154	20	PASS
			NV	30	-20000	-3.846154	20	PASS
			NV	40	-20000	-3.846154	20	PASS
			NV	50	-20000	-3.846154	20	PASS
	Ant2	5200	NV	-30	-19000	-3.653846	20	PASS
			NV	-20	-19000	-3.653846	20	PASS
			NV	-10	-19000	-3.653846	20	PASS
			NV	0	-19000	-3.653846	20	PASS
			NV	10	-19000	-3.653846	20	PASS
			NV	20	-19000	-3.653846	20	PASS
			NV	30	-19000	-3.653846	20	PASS
			NV	40	-19000	-3.653846	20	PASS
			NV	50	-19000	-3.653846	20	PASS
	Ant1	5200	NV	-30	-19000	-3.653846	20	PASS
			NV	-20	-19000	-3.653846	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			NV	-10	-19000	-3.653846	20	PASS
			NV	0	-18000	-3.461538	20	PASS
			NV	10	-19000	-3.653846	20	PASS
			NV	20	-19000	-3.653846	20	PASS
			NV	30	-19000	-3.653846	20	PASS
			NV	40	-18000	-3.461538	20	PASS
			NV	50	-18000	-3.461538	20	PASS
	Ant2	5220	NV	-30	-19000	-3.639847	20	PASS
			NV	-20	-19000	-3.639847	20	PASS
			NV	-10	-19000	-3.639847	20	PASS
			NV	0	-19000	-3.639847	20	PASS
			NV	10	-19000	-3.639847	20	PASS
			NV	20	-19000	-3.639847	20	PASS
			NV	30	-19000	-3.639847	20	PASS
			NV	40	-19000	-3.639847	20	PASS
			NV	50	-19000	-3.639847	20	PASS
	Ant1	5745	NV	-30	-22000	-3.829417	20	PASS
			NV	-20	-22000	-3.829417	20	PASS
			NV	-10	-22000	-3.829417	20	PASS
			NV	0	-22000	-3.829417	20	PASS
			NV	10	-22000	-3.829417	20	PASS
			NV	20	-22000	-3.829417	20	PASS
			NV	30	-22000	-3.829417	20	PASS
			NV	40	-22000	-3.829417	20	PASS
			NV	50	-22000	-3.829417	20	PASS
	Ant2	5745	NV	-30	-20000	-3.481288	20	PASS
			NV	-20	-21000	-3.655352	20	PASS
			NV	-10	-21000	-3.655352	20	PASS
			NV	0	-21000	-3.655352	20	PASS
			NV	10	-21000	-3.655352	20	PASS
			NV	20	-21000	-3.655352	20	PASS
			NV	30	-20000	-3.481288	20	PASS
			NV	40	-20000	-3.481288	20	PASS
			NV	50	-21000	-3.655352	20	PASS
	Ant1	5785	NV	-30	-22000	-3.802939	20	PASS
			NV	-20	-22000	-3.802939	20	PASS
			NV	-10	-22000	-3.802939	20	PASS
			NV	0	-22000	-3.802939	20	PASS
			NV	10	-23000	-3.975799	20	PASS
			NV	20	-23000	-3.975799	20	PASS
			NV	30	-23000	-3.975799	20	PASS
			NV	40	-23000	-3.975799	20	PASS
			NV	50	-22000	-3.802939	20	PASS
	Ant2	5785	NV	-30	-21000	-3.630078	20	PASS
			NV	-20	-21000	-3.630078	20	PASS
			NV	-10	-21000	-3.630078	20	PASS
			NV	0	-21000	-3.630078	20	PASS
			NV	10	-21000	-3.630078	20	PASS
			NV	20	-20000	-3.457217	20	PASS
			NV	30	-21000	-3.630078	20	PASS
			NV	40	-21000	-3.630078	20	PASS
			NV	50	-21000	-3.630078	20	PASS
	Ant1	5825	NV	-30	-23000	-3.948498	20	PASS
			NV	-20	-22000	-3.776824	20	PASS
			NV	-10	-22000	-3.776824	20	PASS
			NV	0	-22000	-3.776824	20	PASS
			NV	10	-22000	-3.776824	20	PASS
			NV	20	-22000	-3.776824	20	PASS
			NV	30	-22000	-3.776824	20	PASS
			NV	40	-22000	-3.776824	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



	Ant2	5825	NV	50	-23000	-3.948498	20	PASS
			NV	-30	-21000	-3.605150	20	PASS
			NV	-20	-21000	-3.605150	20	PASS
			NV	-10	-21000	-3.605150	20	PASS
			NV	0	-21000	-3.605150	20	PASS
			NV	10	-21000	-3.605150	20	PASS
			NV	20	-21000	-3.605150	20	PASS
			NV	30	-21000	-3.605150	20	PASS
			NV	40	-21000	-3.605150	20	PASS
11N20SISO	Ant1	5200	NV	50	-21000	-3.605150	20	PASS
			NV	-30	-19000	-3.653846	20	PASS
			NV	-20	-20000	-3.846154	20	PASS
			NV	-10	-19000	-3.653846	20	PASS
			NV	0	-19000	-3.653846	20	PASS
			NV	10	-19000	-3.653846	20	PASS
			NV	20	-20000	-3.846154	20	PASS
			NV	30	-19000	-3.653846	20	PASS
	Ant2	5200	NV	40	-20000	-3.846154	20	PASS
			NV	50	-19000	-3.653846	20	PASS
			NV	-30	-19000	-3.653846	20	PASS
			NV	-20	-19000	-3.653846	20	PASS
			NV	-10	-19000	-3.653846	20	PASS
			NV	0	-19000	-3.653846	20	PASS
			NV	10	-19000	-3.653846	20	PASS
			NV	20	-18000	-3.461538	20	PASS
	Ant1	5220	NV	30	-18000	-3.461538	20	PASS
			NV	40	-19000	-3.653846	20	PASS
			NV	50	-19000	-3.653846	20	PASS
			NV	-30	-18000	-3.448276	20	PASS
			NV	-20	-18000	-3.448276	20	PASS
			NV	-10	-18000	-3.448276	20	PASS
			NV	0	-18000	-3.448276	20	PASS
			NV	10	-18000	-3.448276	20	PASS
	Ant2	5220	NV	20	-18000	-3.448276	20	PASS
			NV	30	-18000	-3.448276	20	PASS
			NV	40	-18000	-3.448276	20	PASS
			NV	50	-18000	-3.448276	20	PASS
			NV	-30	-20000	-3.831418	20	PASS
			NV	-20	-19000	-3.639847	20	PASS
			NV	-10	-19000	-3.639847	20	PASS
			NV	0	-20000	-3.831418	20	PASS
	Ant1	5745	NV	10	-20000	-3.831418	20	PASS
			NV	20	-20000	-3.831418	20	PASS
			NV	30	-19000	-3.639847	20	PASS
			NV	40	-19000	-3.639847	20	PASS
			NV	50	-20000	-3.831418	20	PASS
			NV	-30	-22000	-3.829417	20	PASS
			NV	-20	-22000	-3.829417	20	PASS
			NV	-10	-22000	-3.829417	20	PASS
	Ant2	5745	NV	0	-22000	-3.829417	20	PASS
			NV	10	-22000	-3.829417	20	PASS
			NV	20	-22000	-3.829417	20	PASS
			NV	30	-22000	-3.829417	20	PASS
			NV	40	-22000	-3.829417	20	PASS
			NV	50	-21000	-3.655352	20	PASS
			NV	-30	-20000	-3.481288	20	PASS
			NV	-20	-20000	-3.481288	20	PASS
			NV	-10	-21000	-3.655352	20	PASS
			NV	0	-21000	-3.655352	20	PASS
			NV	10	-20000	-3.481288	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			NV	20	-21000	-3.655352	20	PASS
			NV	30	-21000	-3.655352	20	PASS
			NV	40	-20000	-3.481288	20	PASS
			NV	50	-21000	-3.655352	20	PASS
	Ant1	5785	NV	-30	-21000	-3.630078	20	PASS
			NV	-20	-21000	-3.630078	20	PASS
			NV	-10	-21000	-3.630078	20	PASS
			NV	0	-22000	-3.802939	20	PASS
			NV	10	-22000	-3.802939	20	PASS
			NV	20	-22000	-3.802939	20	PASS
			NV	30	-22000	-3.802939	20	PASS
			NV	40	-22000	-3.802939	20	PASS
			NV	50	-22000	-3.802939	20	PASS
	Ant2	5785	NV	-30	-21000	-3.630078	20	PASS
			NV	-20	-20000	-3.457217	20	PASS
			NV	-10	-20000	-3.457217	20	PASS
			NV	0	-21000	-3.630078	20	PASS
			NV	10	-21000	-3.630078	20	PASS
			NV	20	-20000	-3.457217	20	PASS
			NV	30	-20000	-3.457217	20	PASS
			NV	40	-20000	-3.457217	20	PASS
			NV	50	-21000	-3.630078	20	PASS
	Ant1	5825	NV	-30	-22000	-3.776824	20	PASS
			NV	-20	-21000	-3.605150	20	PASS
			NV	-10	-21000	-3.605150	20	PASS
			NV	0	-21000	-3.605150	20	PASS
			NV	10	-21000	-3.605150	20	PASS
			NV	20	-21000	-3.605150	20	PASS
			NV	30	-21000	-3.605150	20	PASS
			NV	40	-21000	-3.605150	20	PASS
			NV	50	-21000	-3.605150	20	PASS
	Ant2	5825	NV	-30	-21000	-3.605150	20	PASS
			NV	-20	-21000	-3.605150	20	PASS
			NV	-10	-21000	-3.605150	20	PASS
			NV	0	-21000	-3.605150	20	PASS
			NV	10	-21000	-3.605150	20	PASS
			NV	20	-21000	-3.605150	20	PASS
			NV	30	-20000	-3.433476	20	PASS
			NV	40	-21000	-3.605150	20	PASS
			NV	50	-20000	-3.433476	20	PASS
11N40SISO	Ant1	5190	NV	-30	-19000	-3.660886	20	PASS
			NV	-20	-18000	-3.468208	20	PASS
			NV	-10	-18000	-3.468208	20	PASS
			NV	0	-18000	-3.468208	20	PASS
			NV	10	-18000	-3.468208	20	PASS
			NV	20	-18000	-3.468208	20	PASS
			NV	30	-18000	-3.468208	20	PASS
			NV	40	-18000	-3.468208	20	PASS
			NV	50	-18000	-3.468208	20	PASS
	Ant2	5190	NV	-30	-18000	-3.468208	20	PASS
			NV	-20	-18000	-3.468208	20	PASS
			NV	-10	-18000	-3.468208	20	PASS
			NV	0	-18000	-3.468208	20	PASS
			NV	10	-18000	-3.468208	20	PASS
			NV	20	-18000	-3.468208	20	PASS
			NV	30	-18000	-3.468208	20	PASS
			NV	40	-18000	-3.468208	20	PASS
			NV	50	-18000	-3.468208	20	PASS
	Ant1	5230	NV	-30	-18000	-3.441683	20	PASS
			NV	-20	-19000	-3.632887	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			NV	-10	-18000	-3.441683	20	PASS
			NV	0	-18000	-3.441683	20	PASS
			NV	10	-18000	-3.441683	20	PASS
			NV	20	-18000	-3.441683	20	PASS
			NV	30	-18000	-3.441683	20	PASS
			NV	40	-18000	-3.441683	20	PASS
			NV	50	-18000	-3.441683	20	PASS
	Ant2	5230	NV	-30	-18000	-3.441683	20	PASS
			NV	-20	-18000	-3.441683	20	PASS
			NV	-10	-18000	-3.441683	20	PASS
			NV	0	-18000	-3.441683	20	PASS
			NV	10	-18000	-3.441683	20	PASS
			NV	20	-18000	-3.441683	20	PASS
			NV	30	-18000	-3.441683	20	PASS
			NV	40	-18000	-3.441683	20	PASS
			NV	50	-18000	-3.441683	20	PASS
	Ant1	5755	NV	-30	-20000	-3.475239	20	PASS
			NV	-20	-20000	-3.475239	20	PASS
			NV	-10	-20000	-3.475239	20	PASS
			NV	0	-20000	-3.475239	20	PASS
			NV	10	-20000	-3.475239	20	PASS
			NV	20	-20000	-3.475239	20	PASS
			NV	30	-20000	-3.475239	20	PASS
			NV	40	-20000	-3.475239	20	PASS
			NV	50	-20000	-3.475239	20	PASS
	Ant2	5755	NV	-30	-20000	-3.475239	20	PASS
			NV	-20	-20000	-3.475239	20	PASS
			NV	-10	-21000	-3.649001	20	PASS
			NV	0	-20000	-3.475239	20	PASS
			NV	10	-20000	-3.475239	20	PASS
			NV	20	-21000	-3.649001	20	PASS
			NV	30	-20000	-3.475239	20	PASS
			NV	40	-20000	-3.475239	20	PASS
			NV	50	-21000	-3.649001	20	PASS
	Ant1	5795	NV	-30	-20000	-3.451251	20	PASS
			NV	-20	-20000	-3.451251	20	PASS
			NV	-10	-20000	-3.451251	20	PASS
			NV	0	-20000	-3.451251	20	PASS
			NV	10	-20000	-3.451251	20	PASS
			NV	20	-21000	-3.623814	20	PASS
			NV	30	-20000	-3.451251	20	PASS
			NV	40	-20000	-3.451251	20	PASS
			NV	50	-20000	-3.451251	20	PASS
	Ant2	5795	NV	-30	-20000	-3.451251	20	PASS
			NV	-20	-21000	-3.623814	20	PASS
			NV	-10	-21000	-3.623814	20	PASS
			NV	0	-20000	-3.451251	20	PASS
			NV	10	-21000	-3.623814	20	PASS
			NV	20	-20000	-3.451251	20	PASS
			NV	30	-21000	-3.623814	20	PASS
			NV	40	-20000	-3.451251	20	PASS
			NV	50	-21000	-3.623814	20	PASS
11AC20SISO	Ant1	5200	NV	-30	-18000	-3.461538	20	PASS
			NV	-20	-18000	-3.461538	20	PASS
			NV	-10	-18000	-3.461538	20	PASS
			NV	0	-18000	-3.461538	20	PASS
			NV	10	-18000	-3.461538	20	PASS
			NV	20	-18000	-3.461538	20	PASS
			NV	30	-18000	-3.461538	20	PASS
			NV	40	-18000	-3.461538	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



	Ant2	5200	NV	50	-18000	-3.461538	20	PASS
			NV	-30	-17000	-3.269231	20	PASS
			NV	-20	-18000	-3.461538	20	PASS
			NV	-10	-18000	-3.461538	20	PASS
			NV	0	-18000	-3.461538	20	PASS
			NV	10	-18000	-3.461538	20	PASS
			NV	20	-17000	-3.269231	20	PASS
			NV	30	-17000	-3.269231	20	PASS
			NV	40	-18000	-3.461538	20	PASS
	Ant1	5220	NV	50	-18000	-3.461538	20	PASS
			NV	-30	-18000	-3.448276	20	PASS
			NV	-20	-18000	-3.448276	20	PASS
			NV	-10	-18000	-3.448276	20	PASS
			NV	0	-19000	-3.639847	20	PASS
			NV	10	-18000	-3.448276	20	PASS
			NV	20	-18000	-3.448276	20	PASS
			NV	30	-18000	-3.448276	20	PASS
			NV	40	-18000	-3.448276	20	PASS
	Ant2	5220	NV	50	-19000	-3.639847	20	PASS
			NV	-30	-19000	-3.639847	20	PASS
			NV	-20	-19000	-3.639847	20	PASS
			NV	-10	-19000	-3.639847	20	PASS
			NV	0	-19000	-3.639847	20	PASS
			NV	10	-19000	-3.639847	20	PASS
			NV	20	-19000	-3.639847	20	PASS
			NV	30	-19000	-3.639847	20	PASS
			NV	40	-19000	-3.639847	20	PASS
	Ant1	5745	NV	50	-20000	-3.831418	20	PASS
			NV	-30	-20000	-3.481288	20	PASS
			NV	-20	-20000	-3.481288	20	PASS
			NV	-10	-20000	-3.481288	20	PASS
			NV	0	-20000	-3.481288	20	PASS
			NV	10	-20000	-3.481288	20	PASS
			NV	20	-20000	-3.481288	20	PASS
			NV	30	-20000	-3.481288	20	PASS
			NV	40	-20000	-3.481288	20	PASS
	Ant2	5745	NV	50	-20000	-3.481288	20	PASS
			NV	-30	-21000	-3.655352	20	PASS
			NV	-20	-21000	-3.655352	20	PASS
			NV	-10	-21000	-3.655352	20	PASS
			NV	0	-21000	-3.655352	20	PASS
			NV	10	-21000	-3.655352	20	PASS
			NV	20	-21000	-3.655352	20	PASS
			NV	30	-20000	-3.481288	20	PASS
			NV	40	-20000	-3.481288	20	PASS
	Ant1	5785	NV	50	-20000	-3.481288	20	PASS
			NV	-30	-20000	-3.457217	20	PASS
			NV	-20	-20000	-3.457217	20	PASS
			NV	-10	-20000	-3.457217	20	PASS
			NV	0	-19000	-3.284356	20	PASS
			NV	10	-20000	-3.457217	20	PASS
			NV	20	-20000	-3.457217	20	PASS
			NV	30	-20000	-3.457217	20	PASS
			NV	40	-20000	-3.457217	20	PASS
	Ant2	5785	NV	50	-20000	-3.457217	20	PASS
			NV	-30	-21000	-3.630078	20	PASS
			NV	-20	-21000	-3.630078	20	PASS
			NV	-10	-21000	-3.630078	20	PASS
			NV	0	-21000	-3.630078	20	PASS
			NV	10	-21000	-3.630078	20	PASS
			NV	10	-21000	-3.630078	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			NV	20	-21000	-3.630078	20	PASS
			NV	30	-21000	-3.630078	20	PASS
			NV	40	-21000	-3.630078	20	PASS
			NV	50	-21000	-3.630078	20	PASS
	Ant1	5825	NV	-30	-22000	-3.776824	20	PASS
			NV	-20	-21000	-3.605150	20	PASS
			NV	-10	-21000	-3.605150	20	PASS
			NV	0	-21000	-3.605150	20	PASS
			NV	10	-21000	-3.605150	20	PASS
			NV	20	-21000	-3.605150	20	PASS
			NV	30	-21000	-3.605150	20	PASS
			NV	40	-22000	-3.776824	20	PASS
			NV	50	-21000	-3.605150	20	PASS
	Ant2	5825	NV	-30	-21000	-3.605150	20	PASS
			NV	-20	-21000	-3.605150	20	PASS
			NV	-10	-21000	-3.605150	20	PASS
			NV	0	-21000	-3.605150	20	PASS
			NV	10	-21000	-3.605150	20	PASS
			NV	20	-21000	-3.605150	20	PASS
			NV	30	-21000	-3.605150	20	PASS
			NV	40	-21000	-3.605150	20	PASS
			NV	50	-21000	-3.605150	20	PASS
11AC40SISO	Ant1	5190	NV	-30	-18000	-3.468208	20	PASS
			NV	-20	-19000	-3.660886	20	PASS
			NV	-10	-19000	-3.660886	20	PASS
			NV	0	-19000	-3.660886	20	PASS
			NV	10	-19000	-3.660886	20	PASS
			NV	20	-19000	-3.660886	20	PASS
			NV	30	-19000	-3.660886	20	PASS
			NV	40	-19000	-3.660886	20	PASS
	Ant2	5190	NV	-30	-18000	-3.468208	20	PASS
			NV	-20	-19000	-3.660886	20	PASS
			NV	-10	-19000	-3.660886	20	PASS
			NV	0	-19000	-3.660886	20	PASS
			NV	10	-19000	-3.660886	20	PASS
			NV	20	-19000	-3.660886	20	PASS
			NV	30	-19000	-3.660886	20	PASS
			NV	40	-19000	-3.660886	20	PASS
	Ant1	5230	NV	-30	-19000	-3.632887	20	PASS
			NV	-20	-19000	-3.632887	20	PASS
			NV	-10	-19000	-3.632887	20	PASS
			NV	0	-19000	-3.632887	20	PASS
			NV	10	-19000	-3.632887	20	PASS
			NV	20	-19000	-3.632887	20	PASS
			NV	30	-19000	-3.632887	20	PASS
			NV	40	-19000	-3.632887	20	PASS
	Ant2	5230	NV	-30	-20000	-3.824092	20	PASS
			NV	-20	-20000	-3.824092	20	PASS
			NV	-10	-20000	-3.824092	20	PASS
			NV	0	-20000	-3.824092	20	PASS
			NV	10	-20000	-3.824092	20	PASS
			NV	20	-20000	-3.824092	20	PASS
			NV	30	-20000	-3.824092	20	PASS
			NV	40	-20000	-3.824092	20	PASS
	Ant1	5755	NV	-30	-21000	-3.649001	20	PASS
			NV	-20	-21000	-3.649001	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			NV	-10	-21000	-3.649001	20	PASS
			NV	0	-21000	-3.649001	20	PASS
			NV	10	-21000	-3.649001	20	PASS
			NV	20	-21000	-3.649001	20	PASS
			NV	30	-21000	-3.649001	20	PASS
			NV	40	-21000	-3.649001	20	PASS
			NV	50	-21000	-3.649001	20	PASS
	Ant2	5755	NV	-30	-22000	-3.822763	20	PASS
			NV	-20	-22000	-3.822763	20	PASS
			NV	-10	-23000	-3.996525	20	PASS
			NV	0	-23000	-3.996525	20	PASS
			NV	10	-23000	-3.996525	20	PASS
			NV	20	-23000	-3.996525	20	PASS
			NV	30	-23000	-3.996525	20	PASS
			NV	40	-23000	-3.996525	20	PASS
			NV	50	-23000	-3.996525	20	PASS
	Ant1	5795	NV	-30	-21000	-3.623814	20	PASS
			NV	-20	-21000	-3.623814	20	PASS
			NV	-10	-21000	-3.623814	20	PASS
			NV	0	-21000	-3.623814	20	PASS
			NV	10	-21000	-3.623814	20	PASS
			NV	20	-21000	-3.623814	20	PASS
			NV	30	-21000	-3.623814	20	PASS
			NV	40	-21000	-3.623814	20	PASS
			NV	50	-21000	-3.623814	20	PASS
	Ant2	5795	NV	-30	-23000	-3.968939	20	PASS
			NV	-20	-23000	-3.968939	20	PASS
			NV	-10	-23000	-3.968939	20	PASS
			NV	0	-23000	-3.968939	20	PASS
			NV	10	-23000	-3.968939	20	PASS
			NV	20	-24000	-4.141501	20	PASS
			NV	30	-24000	-4.141501	20	PASS
			NV	40	-23000	-3.968939	20	PASS
			NV	50	-24000	-4.141501	20	PASS
11AC80SISO	Ant1	5210	NV	-30	-19000	-3.646833	20	PASS
			NV	-20	-19000	-3.646833	20	PASS
			NV	-10	-18000	-3.454894	20	PASS
			NV	0	-19000	-3.646833	20	PASS
			NV	10	-19000	-3.646833	20	PASS
			NV	20	-19000	-3.646833	20	PASS
			NV	30	-19000	-3.646833	20	PASS
			NV	40	-19000	-3.646833	20	PASS
			NV	50	-19000	-3.646833	20	PASS
	Ant2	5210	NV	-30	-21000	-4.030710	20	PASS
			NV	-20	-22000	-4.222649	20	PASS
			NV	-10	-21000	-4.030710	20	PASS
			NV	0	-21000	-4.030710	20	PASS
			NV	10	-21000	-4.030710	20	PASS
			NV	20	-22000	-4.222649	20	PASS
			NV	30	-21000	-4.030710	20	PASS
			NV	40	-22000	-4.222649	20	PASS
			NV	50	-21000	-4.030710	20	PASS
	Ant1	5775	NV	-30	-21000	-3.636364	20	PASS
			NV	-20	-21000	-3.636364	20	PASS
			NV	-10	-21000	-3.636364	20	PASS
			NV	0	-21000	-3.636364	20	PASS
			NV	10	-21000	-3.636364	20	PASS
			NV	20	-21000	-3.636364	20	PASS
			NV	30	-21000	-3.636364	20	PASS
			NV	40	-21000	-3.636364	20	PASS

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



			NV	50	-21000	-3.636364	20	PASS
	Ant2	5775	NV	-30	-25000	-4.329004	20	PASS
			NV	-20	-24000	-4.155844	20	PASS
			NV	-10	-24000	-4.155844	20	PASS
			NV	0	-25000	-4.329004	20	PASS
			NV	10	-25000	-4.329004	20	PASS
			NV	20	-25000	-4.329004	20	PASS
			NV	30	-24000	-4.155844	20	PASS
			NV	40	-25000	-4.329004	20	PASS
			NV	50	-25000	-4.329004	20	PASS



3.8. Antenna Requirement

Standard Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.



3.9. Dynamic Frequency Selection(DFS)

Requirement

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

LIMIT

1. DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm



Note 1: This is the level at the input of the receiver assuming a 0dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

2. DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{SEC}}} \right) \right\}$	60%	30



		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μ sec, with a minimum increment of 1 μ sec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μ sec is selected, the number of pulses would be

$$\left\lceil \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} \right\rceil$$

Round up = Round up {17.2} = 18.

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878



20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveforms are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type wave forms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

Calibration of Radar Waveform

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB .
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup

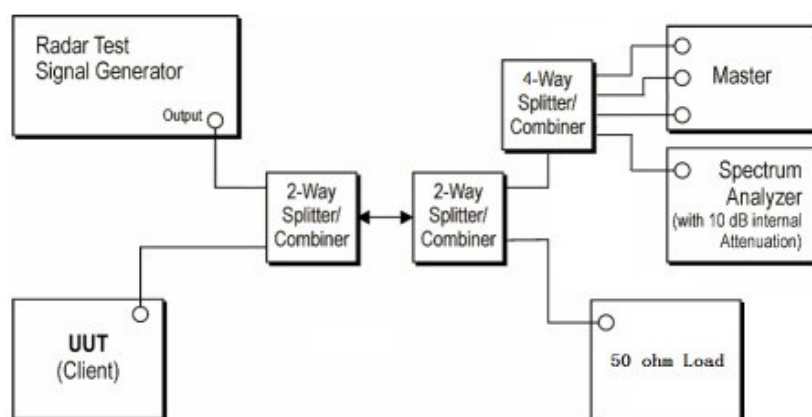


Radar Waveform Calibration Result

Not Applicable

Test Configuration

Setup for Client with injection at the Master

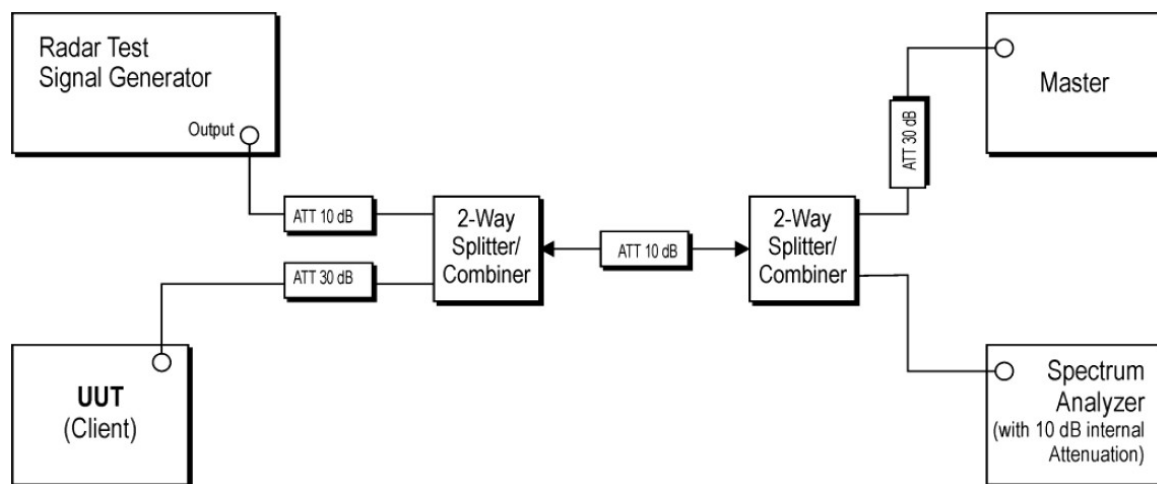

Test Procedure

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start



at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type

7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $D_{\text{well}} (0.3\text{ms}) = S (12000\text{ms}) / B (4000)$; where D_{well} is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (\text{ms}) = N \times D_{\text{well}} (0.3\text{ms})$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and D_{well} is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Test Mode

Please refer to the clause 2.3

Test Results

☐ Passed

☒ Not Applicable