



TEST REPORT

FCC PART 15 SUBPART C 15.247

Test report

On Behalf of

WANG YONGFENG

For

Remote control car series

Model No.: 336-87J, Please refer to page 8 for Serial models

FCC ID: 2ATYG-SH198333687J

Prepared for : **WANG YONGFENG**

**LIANXIA TOWN LIANFENG ROAD MIDDLE, CHENGHAI DISTRICT, SHANTOU,
China**

Prepared By :

Shenzhen HUAK Testing Technology Co., Ltd.

**1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China**

Date of Test: **Jun. 05, 2020 ~Jun. 12, 2020**

Date of Report: **Jun. 12, 2020**

Report Number: **HK2005261129-E**



TEST RESULT CERTIFICATION

Applicant's name : WANG YONGFENG

Address : LIANXIA TOWN LIANFENG ROAD MIDDLE, CHENGHAI DISTRICT,
SHANTOU, China

Manufacture's Name : WANG YONGFENG

Address : LIANXIA TOWN LIANFENG ROAD MIDDLE, CHENGHAI DISTRICT,
SHANTOU, China

Product description

Trade Mark: N/A

Product name : Remote control car series

Model and/or type reference .. : 336-87J, Please refer to page 8 for Serial models

Standards : **47 CFR FCC Part 15 Subpart C 15.247**


This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :


Date (s) of performance of tests : Jun. 05, 2020 ~Jun. 12, 2020

Date of Issue : Jun. 12, 2020


Test Result : **Pass**

Prepared by: 

Project Engineer

Reviewed by: 

Project Supervisor

Approved by: 

Technical Director



Contents

	Page
CONTENTS	3
1 TEST SUMMARY	6
1.1 TEST DESCRIPTION.....	6
1.2 MEASUREMENT UNCERTAINTY.....	7
2 TEST FACILITY	8
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST CONDITIONS	10
3.3 DESCRIPTION OF TEST SETUP	10
4 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
5 TEST RESULT	13
5.1 ANTENNA REQUIREMENT	13
5.1.1 Standard requirement	13
5.1.2 EUT Antenna	13
5.2 CONDUCTION EMISSIONS MEASUREMENT	14
5.2.1 Applied procedures / Limit	14
5.2.2 Test procedure.....	14
5.2.3 Test setup	15
5.2.4 Test results	16
5.3 RADIATED EMISSIONS MEASUREMENT	17
5.3.1 Applied procedures / Limit	17
5.3.2 Test setup	17
5.3.3 Test Result.....	19
5.4 MAXIMUM OUTPUT POWER MEASUREMENT	26
5.4.1 Limit	26
5.4.2 Test procedure.....	26
5.4.3 Deviation from standard.....	26
5.4.4 Test setup	26
5.4.5 Test results	26
5.5 POWER SPECTRAL DENSITY	27
5.5.1 Limit	27
5.5.2 Test procedure.....	27
5.5.3 Deviation from standard.....	27
5.5.4 Test setup	27
5.5.5 Test results	28
5.6 6dB BANDWIDTH	30
5.6.1 Limit	30
5.6.2 Test procedure.....	30
5.6.3 Deviation from standard.....	30
5.6.4 Test setup	30
5.6.5 Test result	30



5.7	OCCUPIED BANDWIDTH	33
5.7.1	Test procedure.....	33
5.7.2	Deviation from standard.....	33
5.7.3	Test setup	33
5.7.4	Test result	33
5.8	BAND EDGE	34
5.8.1	Limit	34
5.8.2	Test procedure.....	34
5.8.3	Deviation from standard.....	34
5.8.4	Test setup	34
5.8.5	Test results	35
5.9	CONDUCTED SPURIOUS EMISSIONS	36
5.9.1	Applied procedures / Limit	36
5.9.2	Test procedure.....	36
5.9.3	Deviation from standard.....	36
5.9.4	Test setup	36
5.9.5	Test results	37
6	TEST SETUP PHOTO	40
7	PHOTOS OF THE EUT	41



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Jun. 12, 2020	Jason Zhou



1 Test Summary

1.1 Test Description

Test Item	Test Requirement	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
Conducted Emission	FCC Part 15.207	N/A
Radiated Emissions	FCC Part 15.205/15.209	PASS
Maximum Peak Output Power	FCC Part 15.247(b)	PASS
Power Spectral Density	FCC Part 15.247 (e)	PASS
6dB Bandwidth & 99% Bandwidth	FCC Part 15.247(a)(2)	PASS
Spurious RF Conducted Emission	FCC Part 15.247(d)	PASS
Band Edge	FCC Part 15.247(d)	PASS



1.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. The maximum value of the uncertainty as below:

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	All emissions, radiated(<1G)	±3.92dB
3	All emissions, radiated(>1G)	±4.28dB



2 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

Address of the test laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community,
Fuhai Street, Bao'an District, Shenzhen, China

Designation Number: CN1229

Test Firm Registration Number: 616276

3 General Information

3.1 General Description of EUT

Manufacturer:	WANG YONGFENG
Manufacturer Address:	LIANXIA TOWN LIANFENG ROAD MIDDLE, CHENGHAI DISTRICT, SHANTOU, China
EUT Name:	Remote control car series
Model No:	336-87J
Serial No:	336-86J, 336-88J, 336-89J, 336-90J, 336-73T, 336-74T, 336-63T, 336-70K, 336-71K, 336-68K, 336-69K, 336-73K, 336-74K, 336-80J, 336-81J, 336-82J, 336-83J, 336-85J, 336-91J, 336-92J, 336-93J, 336-94J, 336-95J, 336-96J, 336-97J, 336-98J, 336-99J, 336-129T, 336-130T, 336-56K, 336-57K, GHD249585, GHD249586, GHD249583, GHD249584, GHD357037, GHD357038, GHD357039, GHD357040, GHD357260
Model Difference:	All model's the function, software and electric circuit are the same, only with a product model named different. Test sample model: 336-87J
Brand Name:	N/A
Operation frequency:	2405 MHz to 2480 MHz
Channel separation:	1MHz
NUMBER OF CHANNEL:	71
Modulation Technology:	GFSK
Hardware Version:	V1.0
Software Version:	V1.0
Antenna Type:	Internal Antenna
Antenna Gain:	0dBi
Power Supply:	DC 3V from Battery
Note:	
1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.	



Description of Channel:							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2405	18	2424	36	2442	54	2460
1	2407	19	2425	37	2443	55	2461
2	2408	20	2426	38	2444	56	2462
3	2409	21	2427	39	2445	57	2463
4	2410	22	2428	40	2446	58	2464
5	2411	23	2429	41	2447	59	2465
6	2412	24	2430	42	2448	60	2466
7	2413	25	2431	43	2449	61	2467
8	2414	26	2432	44	2450	62	2468
9	2415	27	2433	45	2451	63	2469
10	2416	28	2434	46	2452	64	2470
11	2417	29	2435	47	2453	65	2471
12	2418	30	2436	48	2454	66	2472
13	2419	31	2437	49	2455	67	2473
14	2420	32	2438	50	2456	68	2474
15	2421	33	2439	51	2457	69	2475
16	2422	34	2440	52	2458	70	2480
17	2423	35	2441	53	2459		



3.2 Description of Test conditions

(1) E.U.T. test conditions:

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(2) Frequency range of radiated measurements:

The test range will be up to the tenth harmonic of the highest fundamental frequency.

(3) Pre-test the EUT in all transmitting mode at the lowest (2405 MHz), middle (2448 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode,

only the worst-case results are recorded in this report.

(4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 DESCRIPTION OF TEST SETUP

Operation of EUT during testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



4 Equipments List for All Test Items

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 26, 2019	1 Year
2.	L.I.S.N.	R&S	ENV216	HKE-059	Dec. 26, 2019	1 Year
3.	Receiver	R&S	ESCI 7	HKE-010	Dec. 26, 2019	1 Year
4.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 26, 2019	1 Year
5.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 26, 2019	1 Year
6.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2019	1 Year
7.	High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Dec. 26, 2019	1 Year
8.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 26, 2019	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 26, 2019	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019	1 Year
11.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019	1 Year
12.	Pre-amplifier	EMCI	EMC051845SE	HKE-015	Dec. 26, 2019	1 Year
13.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 26, 2019	1 Year
14.	High pass filter unit	Tonscend	JS0806-F	HKE-055	Dec. 26, 2019	1 Year
15.	Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A
16.	Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
17.	RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A	N/A
18.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	3 Year
19.	RF test software	Tonscend	JS1120-4	HKE-113	N/A	N/A
20.	RF test software	Tonscend	JS1120-3	HKE-114	N/A	N/A
21.	RF test software	Tonscend	JS1120-1	HKE-115	N/A	N/A
22.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2019	1 Year
23.	Signal generator	Agilent	N5182A	HKE-029	Dec. 26, 2019	1 Year
24.	Signal Generator	Agilent	83630A	HKE-028	Dec. 26, 2019	1 Year
25.	Power meter	Agilent	E4419B	HKE-085	Dec. 26, 2019	1 Year
26.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 26, 2019	1 Year
27.	RF Cable(below1GHz)	Times	9kHz-1GHz	HKE-117	Dec. 26, 2019	1 Year



28.	RF Cable(above 1GHz)	Times	1-40G	HKE-034	Dec. 26, 2019	1 Year
29	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	Dec. 26, 2019	1 Year
30	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year
31	High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Dec. 26, 2019	1 Year

5 Test Result

5.1 Antenna Requirement

5.1.1 Standard requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Internal Antenna which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.

5.1.2 EUT Antenna

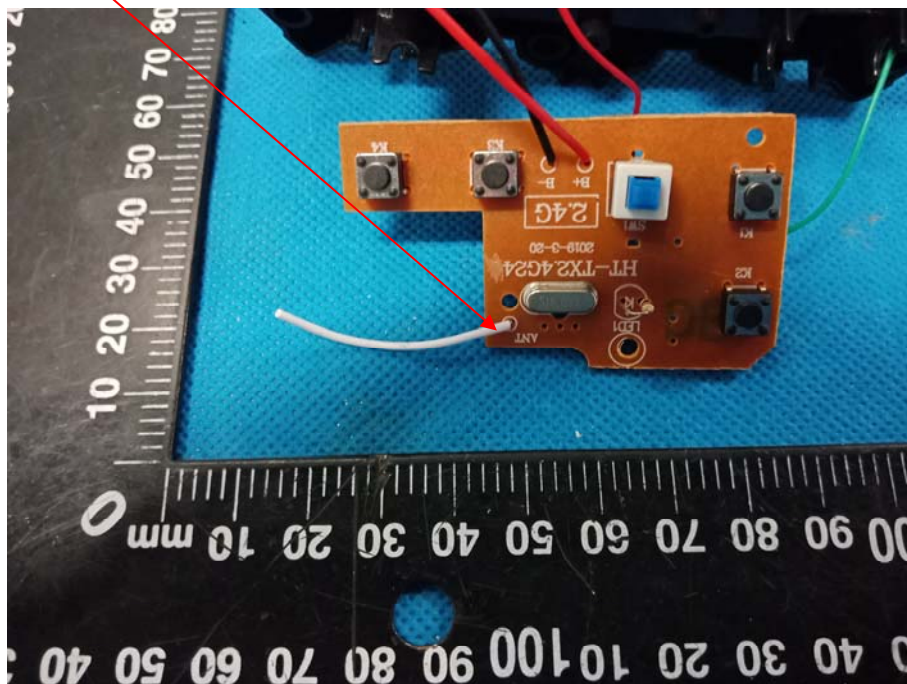



5.2 Conduction Emissions Measurement

5.2.1 Applied procedures / Limit

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

5.2.2 Test procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

5.2.3 Test setup

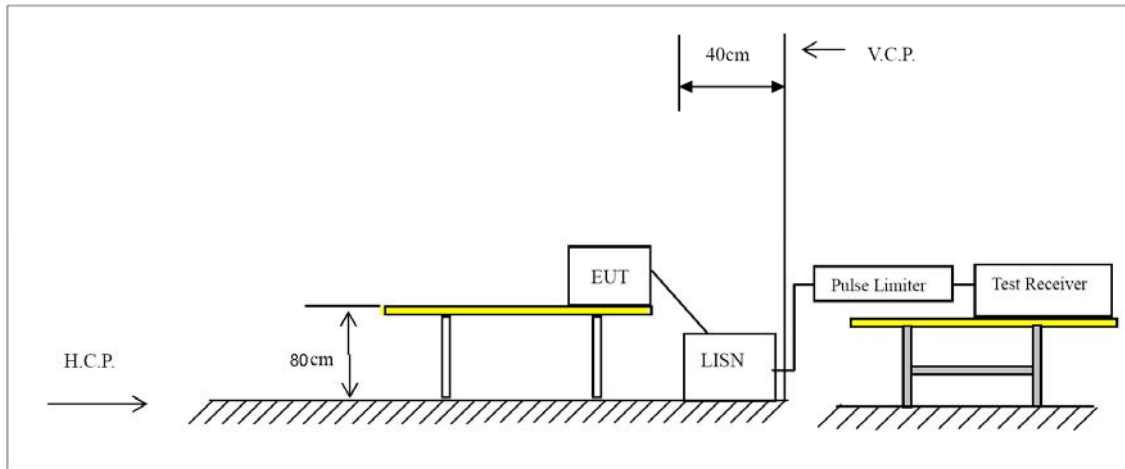



5.2.4 Test results

Not applicable.

Note: EUT power supply by DC Power, so this test item not applicable.

5.3 Radiated Emissions Measurement

5.3.1 Applied procedures / Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter’s fundamental emission.


Radiated emission limits

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+ 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+ 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


5.3.2 Test setup

Test Configuration:

- 1) 9 kHz to 30 MHz emissions:

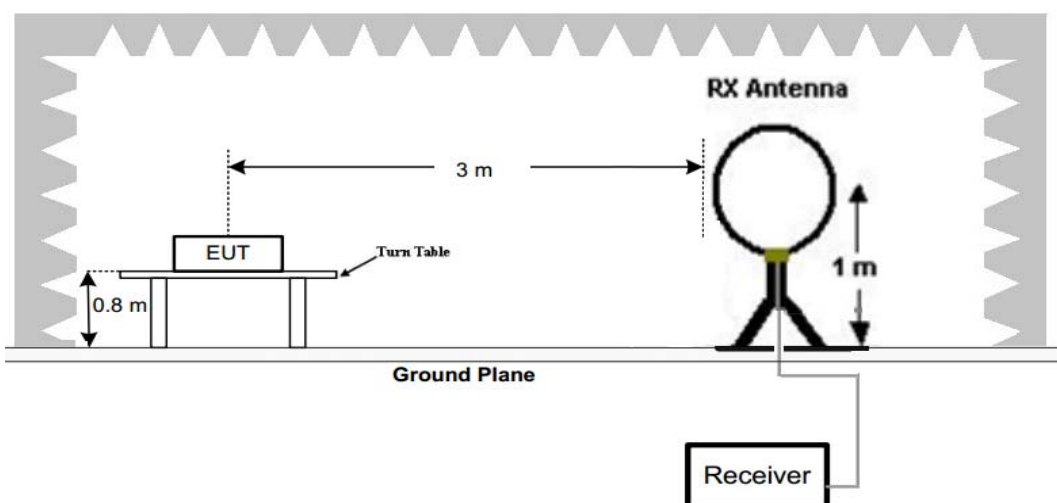


2) 30 MHz to 1 GHz emissions:

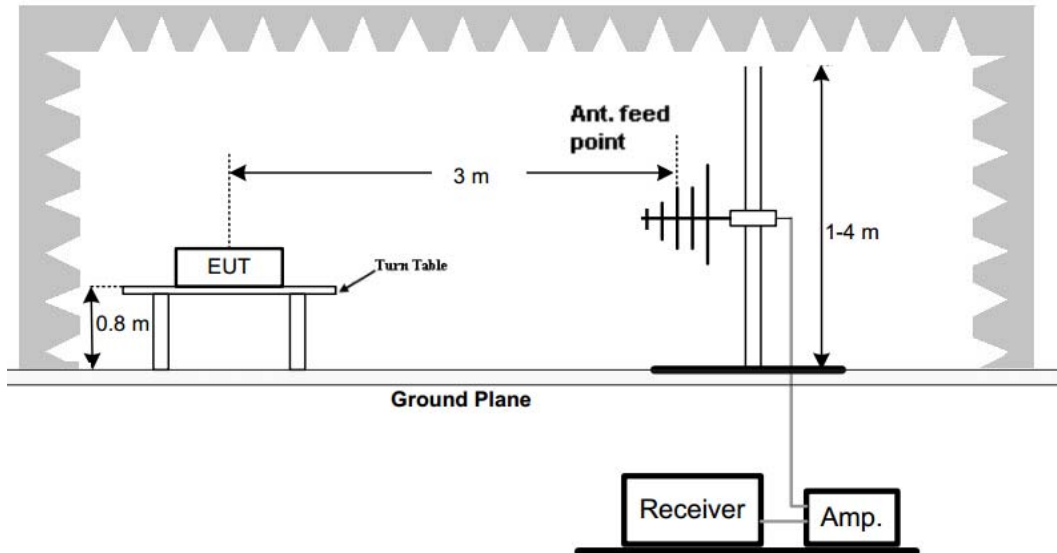

3)

1 GHz to 25 GHz emissions:

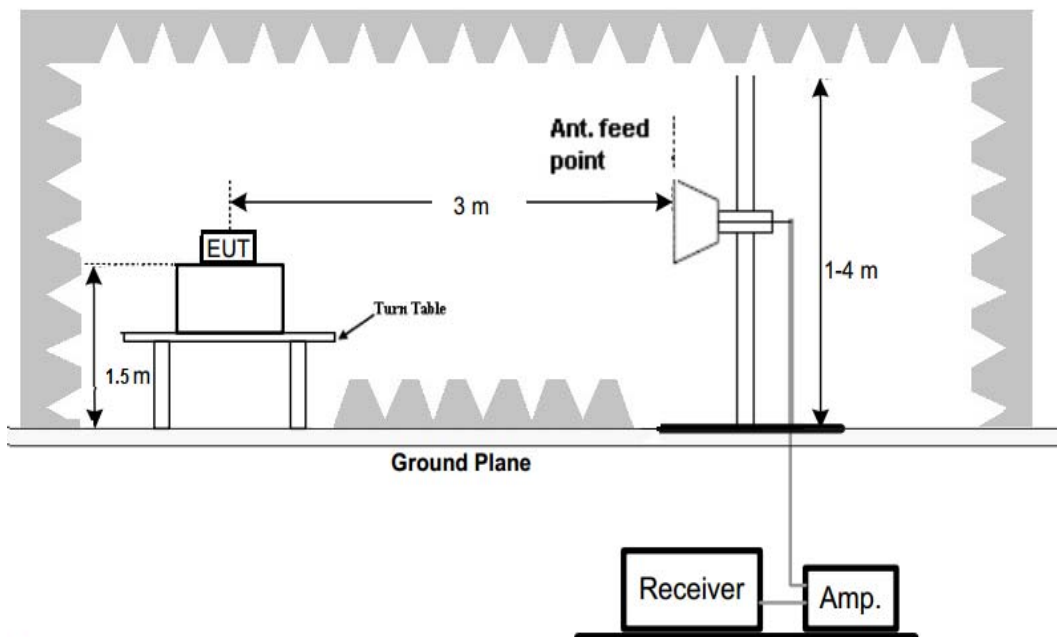**Test Procedure**


1. The EUT was placed on turn table which is 0.8m above ground plane for below 1GHz test, and on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.



5.3.3 Test Result

Below 1GHz Test Results:

Antenna polarity: H

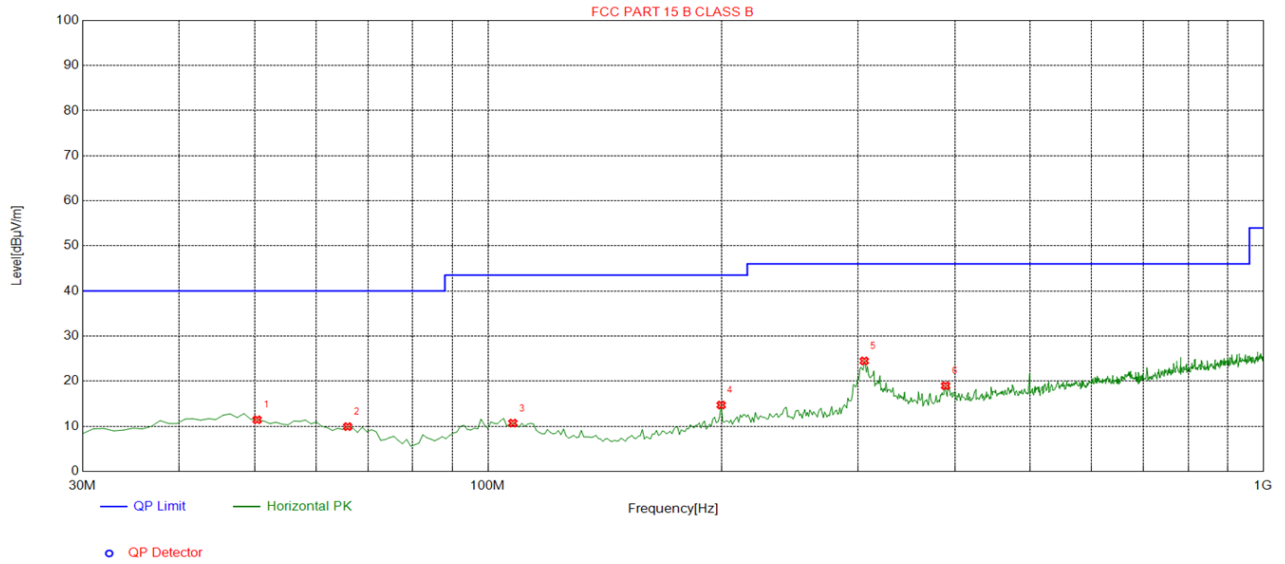


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.3904	-13.71	25.14	11.43	40.00	28.57	100	338	Horizontal
2	65.9259	-16.65	26.56	9.91	40.00	30.09	100	184	Horizontal
3	107.6777	-15.42	26.12	10.70	43.50	32.80	100	126	Horizontal
4	199.9199	-15.07	29.77	14.70	43.50	28.80	100	329	Horizontal
5	305.7558	-12.66	37.14	24.48	46.00	21.52	100	91	Horizontal
6	389.2593	-10.66	29.64	18.98	46.00	27.02	100	101	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

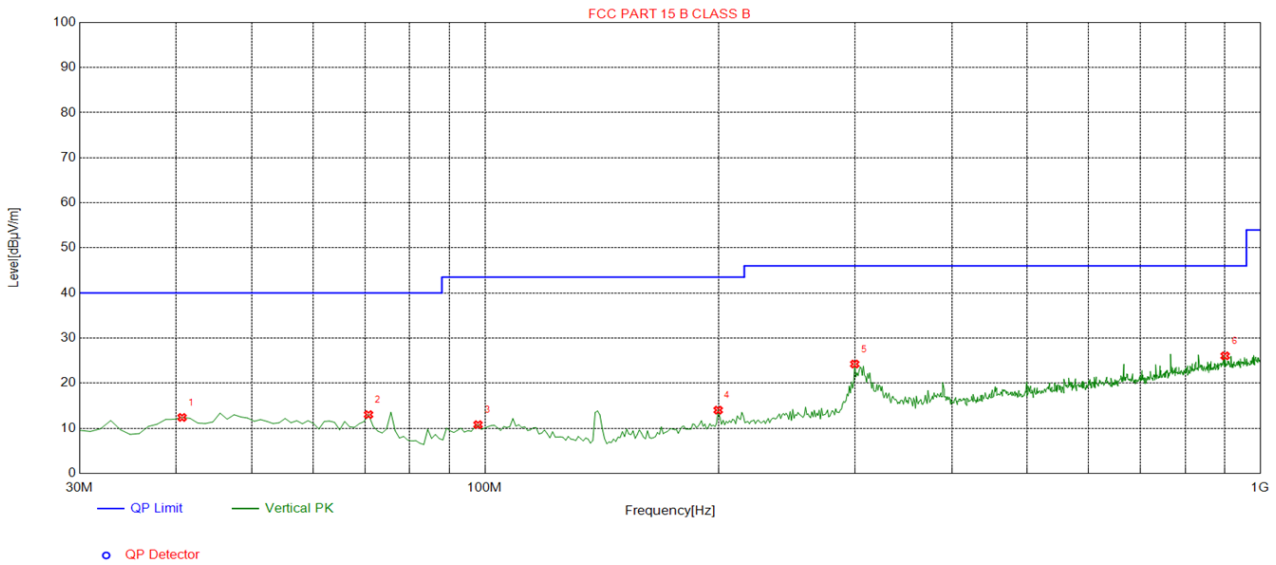

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.6807	-14.42	26.81	12.39	40.00	27.61	100	247	Vertical
2	70.7808	-17.81	30.83	13.02	40.00	26.98	100	282	Vertical
3	97.9680	-15.74	26.53	10.79	43.50	32.71	100	38	Vertical
4	199.9199	-15.07	29.08	14.01	43.50	29.49	100	70	Vertical
5	299.9299	-12.74	36.98	24.24	46.00	21.76	100	76	Vertical
6	900.9610	-1.78	27.83	26.05	46.00	19.95	100	314	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Remark :

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

**For 1GHz to 25GHz**

CH Low (2405MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	57.48	-3.65	53.83	74.00	-20.17	peak
4804	45.33	-3.65	41.68	54.00	-12.32	AVG
7206	53.96	-0.95	53.01	74.00	-20.99	peak
7206	42.59	-0.95	41.64	54.00	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	56.73	-3.65	53.08	74.00	-20.92	peak
4804	44.66	-3.65	41.01	54.00	-12.99	AVG
7206	54.49	-0.95	53.54	74.00	-20.46	peak
7206	40.62	-0.95	39.67	54.00	-14.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2448MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4880.00	56.64	-3.54	53.10	74.00	-20.90	peak
4880.00	43.83	-3.54	40.29	54.00	-13.71	AVG
7320.00	56.38	-0.81	55.57	74.00	-18.43	peak
7320.00	43.83	-0.81	43.02	54.00	-10.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4880.00	56.73	-3.54	53.19	74.00	-20.81	peak
4880.00	46.57	-3.54	43.03	54.00	-10.97	AVG
7320.00	53.46	-0.81	52.65	74.00	-21.35	peak
7320.00	39.52	-0.81	38.71	54.00	-15.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	55.72	-3.43	52.29	74.00	-21.71	peak
4960	44.48	-3.44	41.04	54.00	-12.96	AVG
7440	55.63	-0.77	54.86	74.00	-19.14	peak
7440	40.85	-0.77	40.08	54.00	-13.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	54.72	-3.43	51.29	74.00	-22.71	peak
4960	45.49	-3.44	42.05	54.00	-11.95	AVG
7440	56.55	-0.77	55.78	74.00	-18.22	peak
7440	37.62	-0.77	36.85	54.00	-17.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



Radiated Band Edge Test:

Operation Mode: TX CH Low (2405MHz)

Horizontal (Worst case):

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	60.28	-5.81	54.47	74	-19.53	peak
2310.00	51.49	-5.81	45.68	54	-8.32	AVG
2390.00	56.38	-5.84	50.54	74	-23.46	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	57.77	-5.84	51.93	74	-22.07	peak
2400.00	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	58.28	-5.81	52.47	74	-21.53	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.63	-5.84	48.79	74	-25.21	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	57.47	-5.84	51.63	74	-22.37	peak
2400.00	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.28	-5.81	49.47	74	-24.53	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.78	-6.06	47.72	74	-26.28	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.38	-5.81	48.57	74	-25.43	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	54.63	-6.06	48.57	74	-25.43	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

5.4 Maximum Output Power Measurement

5.4.1 Limit

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 Test procedure


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

5.4.3 Deviation from standard

No deviation.

5.4.4 Test setup

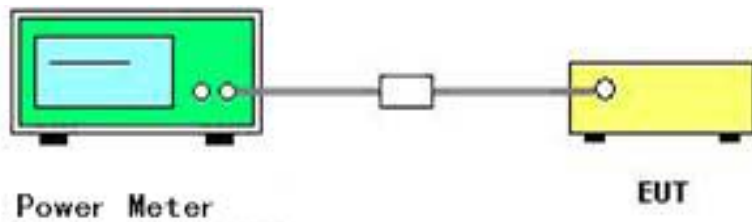

5.4.5 Test results

Channel	Channel frequency (MHz)	Output power (dBm)	Limit (dBm)	Result
Low	2405	-19.473	30	Pass
Middle	2448	-19.702		Pass
High	2480	-19.275		Pass



5.5 Power Spectral Density

5.5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.5.2 Test procedure

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

Set the RBW =3 kHz.

Set the VBW =10 KHz.

Set the span to 1.5 times the DTS channel bandwidth.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum power level.


If measured value exceeds limit, reduce RBW(no less than 3 kHz)and repeat.

The resulting peak PSD level must be 8 dBm.

5.5.3 Deviation from standard

No deviation.

5.5.4 Test setup

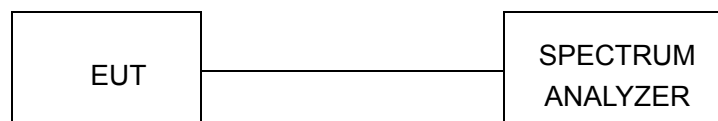



5.5.5 Test results

Channel	Channel frequency (MHz)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
Low	2405	-36.09	8.00	Pass
Middle	2448	-36.95		Pass
High	2480	-36.72		Pass

CH 00



CH 19





CH 39





5.6 6dB Bandwidth

5.6.1 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.6.2 Test procedure


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6.3 Deviation from standard

No deviation.

5.6.4 Test setup




5.6.5 Test result


Channel	Channel frequency (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
Low	2405	0.7887	≥500	Pass
Middle	2448	0.8303		Pass
High	2480	0.8964		Pass




CH 00

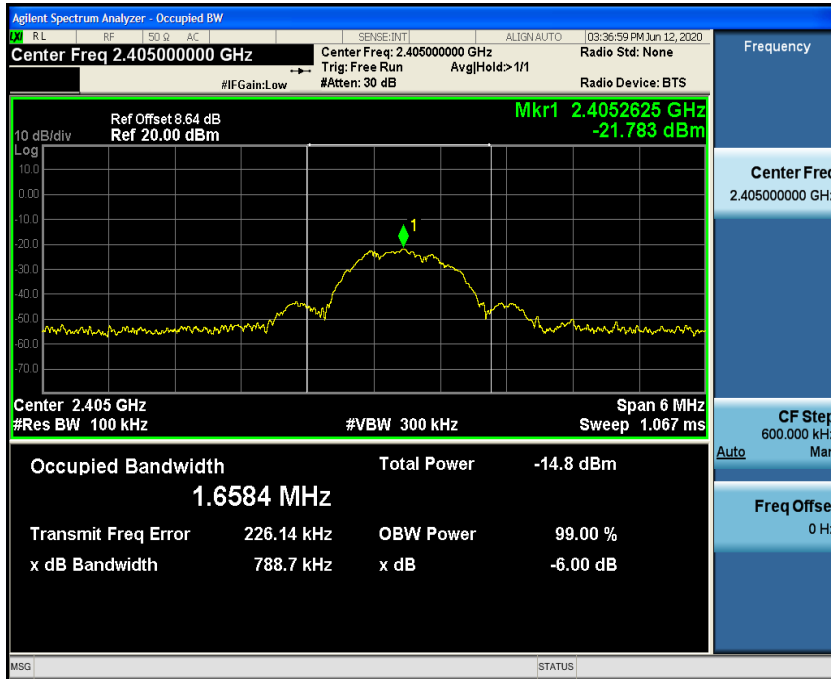

CH 19

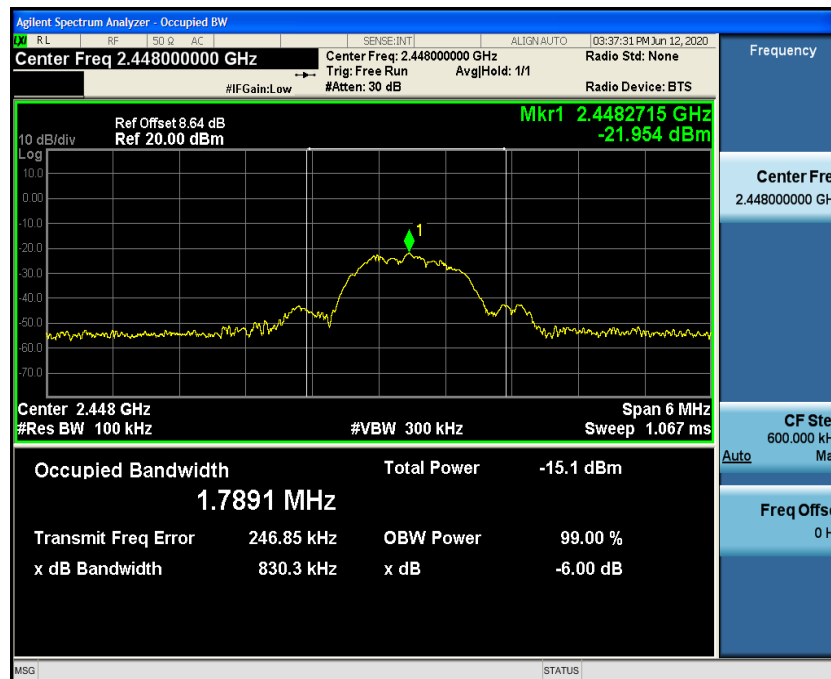

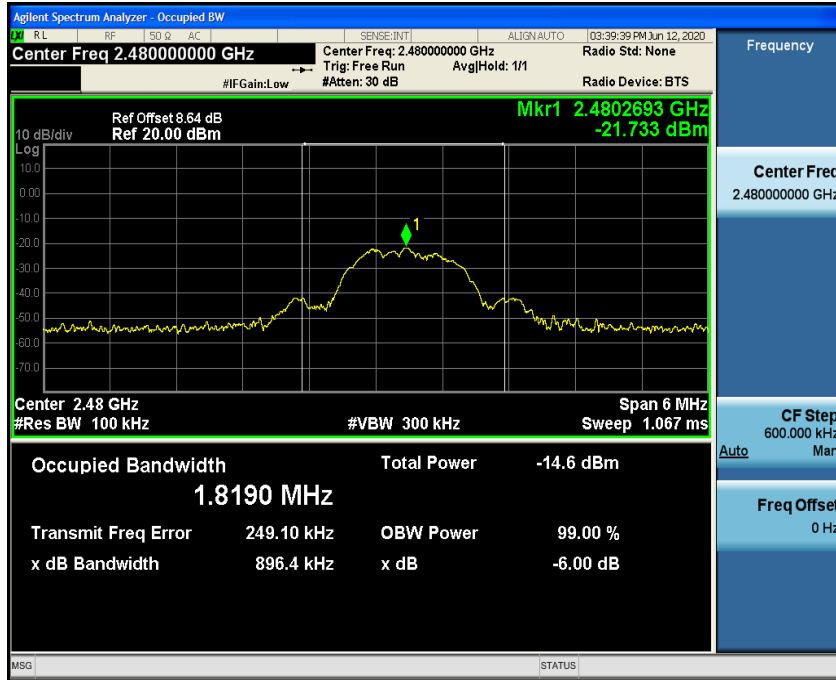



5.7 Occupied Bandwidth

5.7.1 Test procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak


Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

5.7.2 Deviation from standard

No deviation.

5.7.3 Test setup



5.7.4 Test result

N/A



5.8 Band edge

5.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under FCC rules in section 5.8.1, the attenuation required shall be 30 dB instead of 20 dB.


5.8.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak, Trace = max hold

5.8.3 Deviation from standard

No deviation.


5.8.4 Test setup

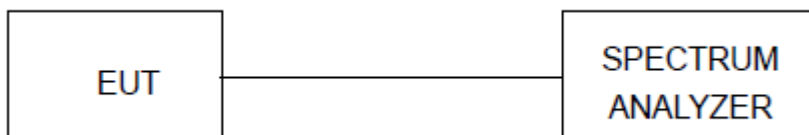




5.8.5 Test results

PASS

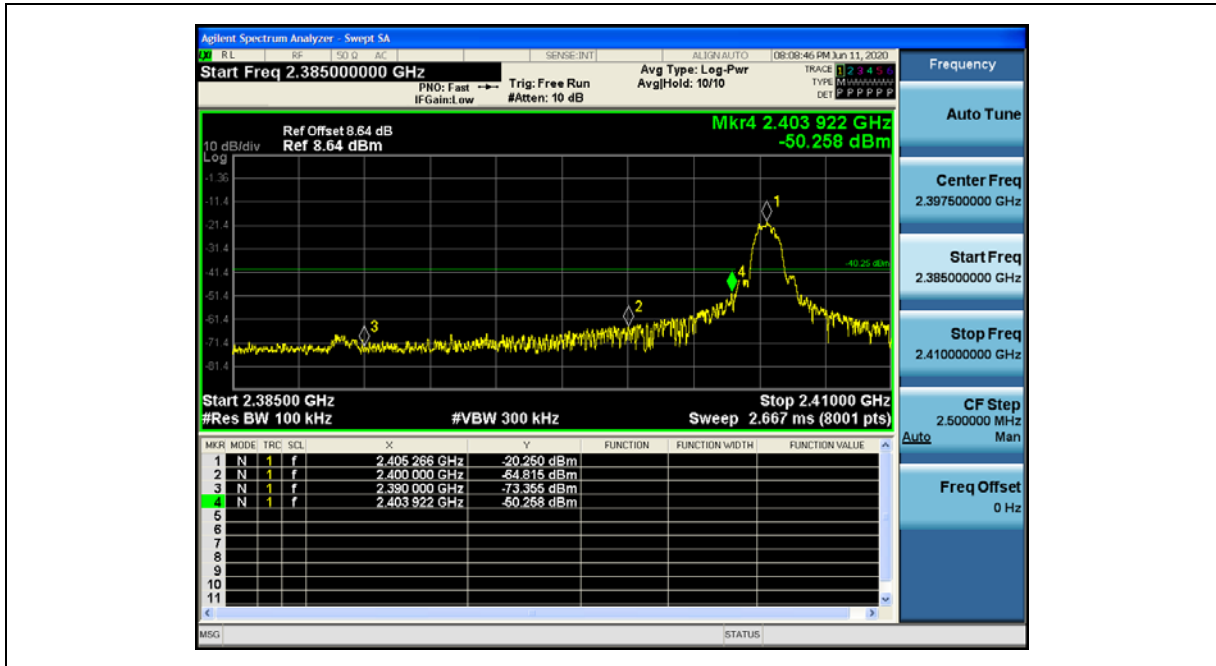

2405

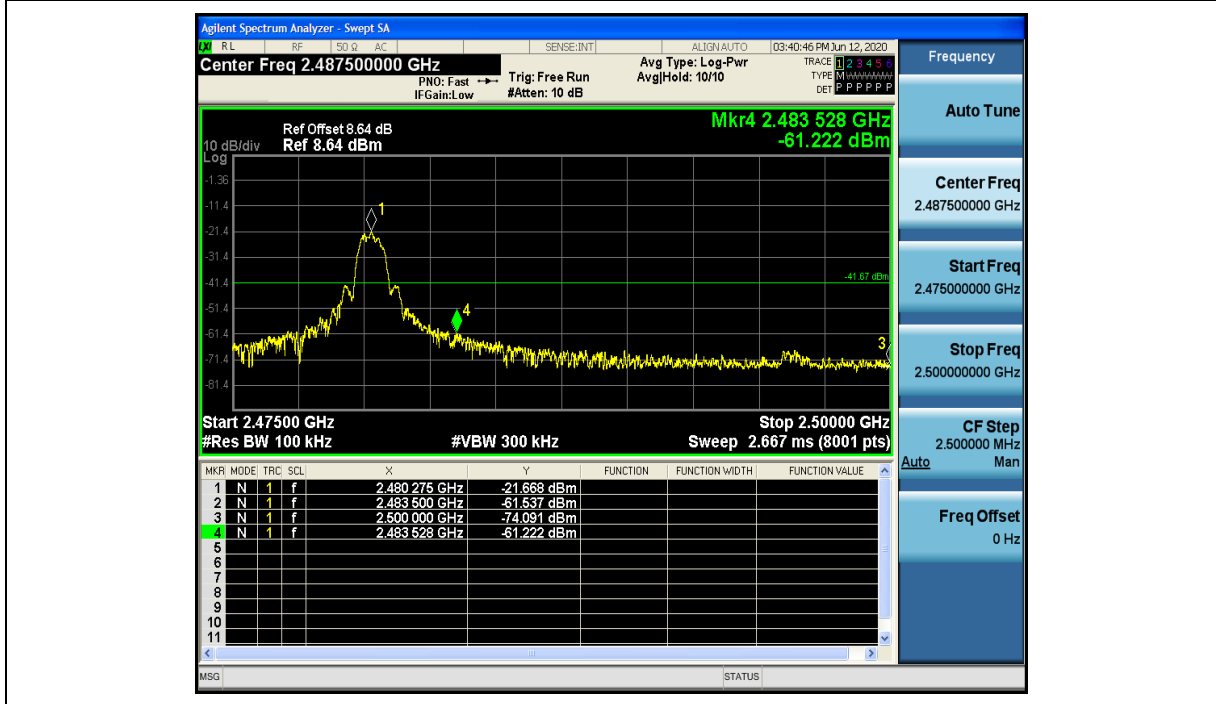

2480



5.9 Conducted Spurious Emissions

5.9.1 Applied procedures / Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section (b)(3) of RSS 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to calculated by $10\lg(BW1/BW2)$. for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.


5.9.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak, Trace = max hold

5.9.3 Deviation from standard

No deviation.



5.9.4 Test setup

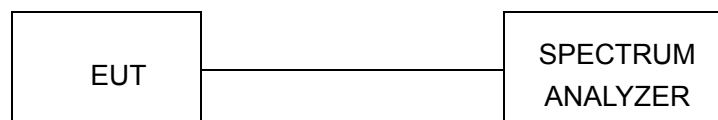




5.9.5 Test results

CH 00

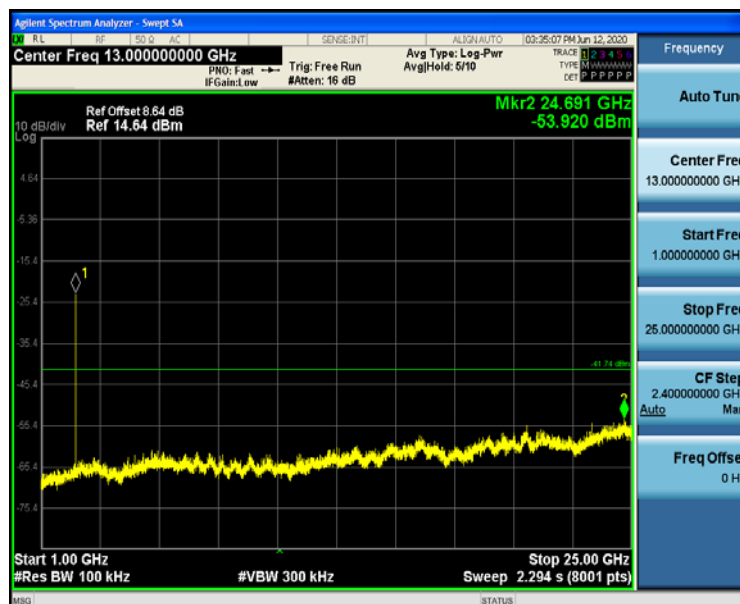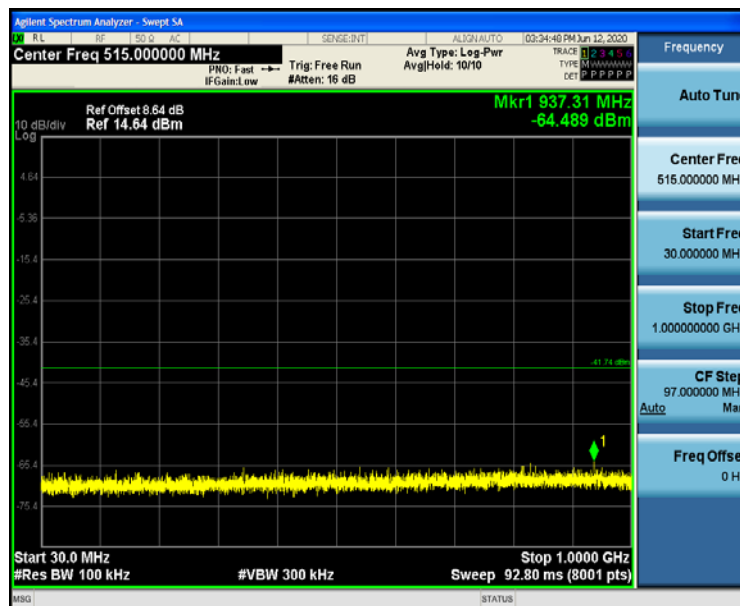





CH 19

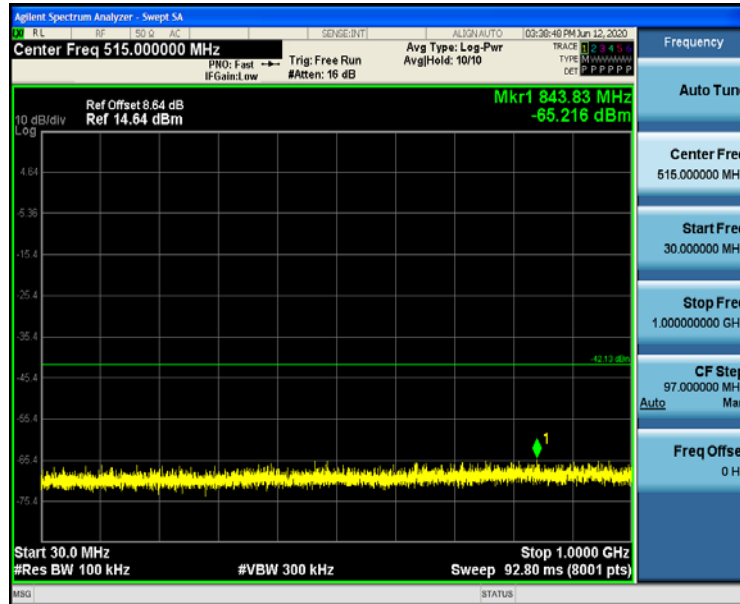





CH 39

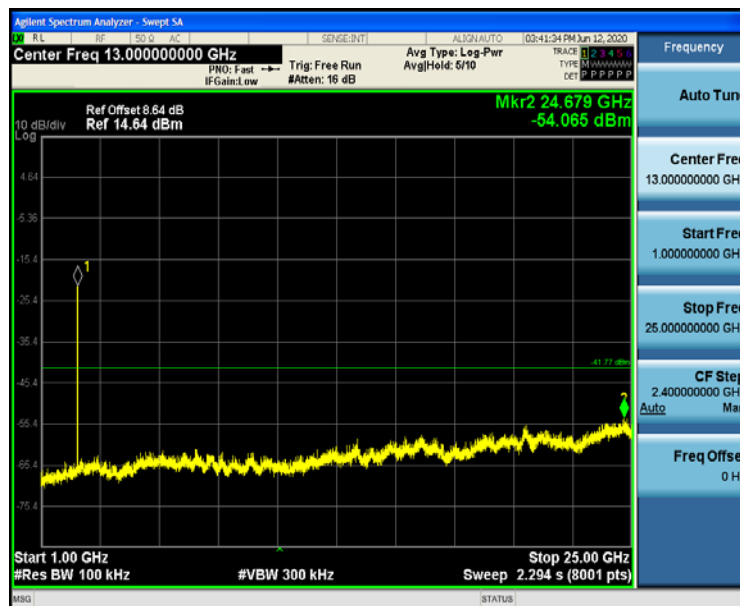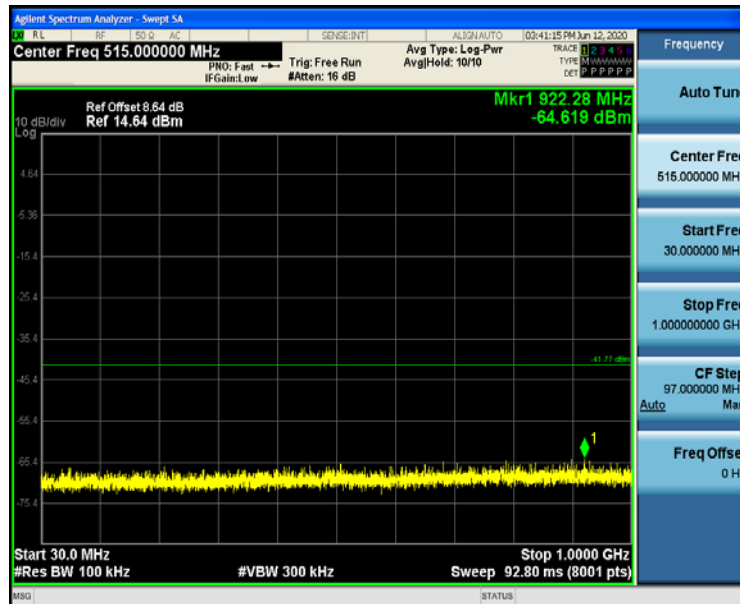

6 Test setup photo

Radiated Emissions

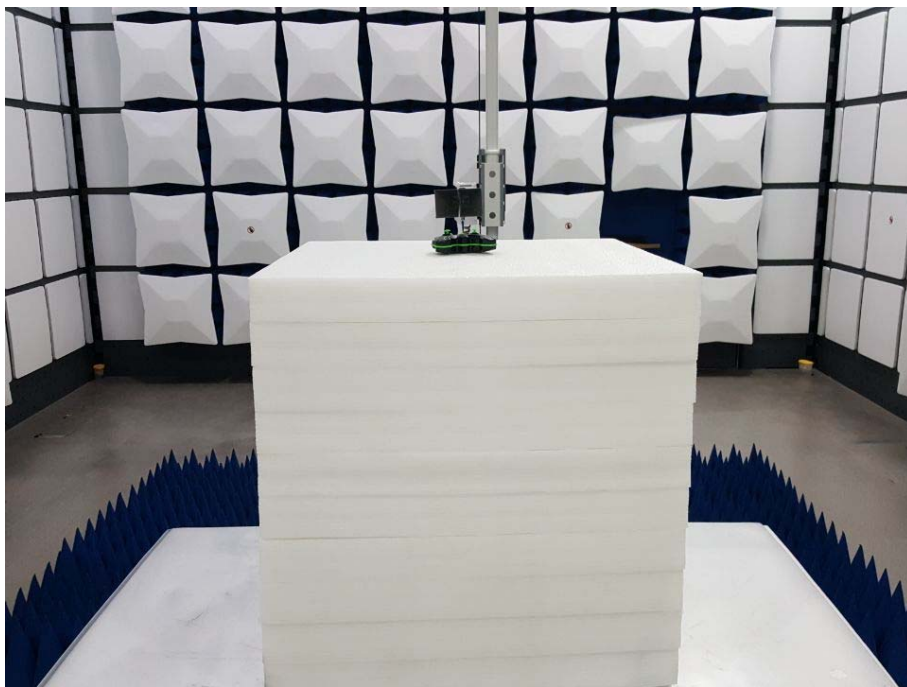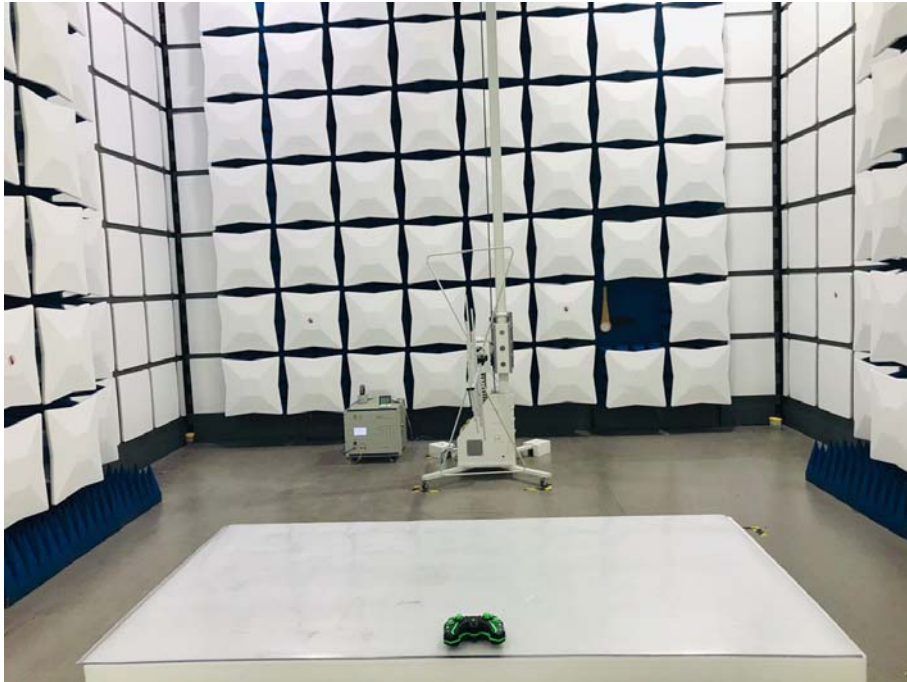



7 PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----