


U-NII-3 Band:

ANT A

11a

5745MHz

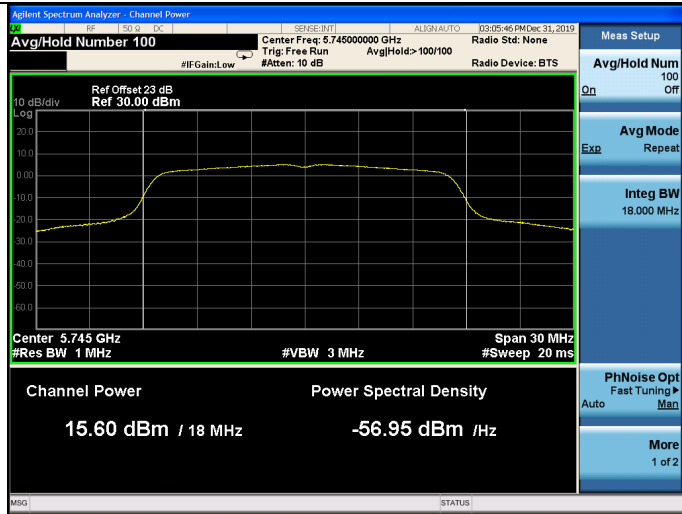


11n HT20


5745MHz




5785MHz

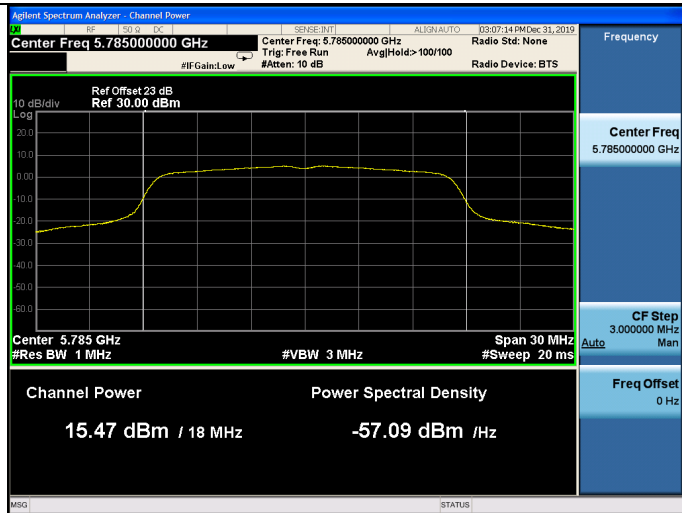

5785MHz

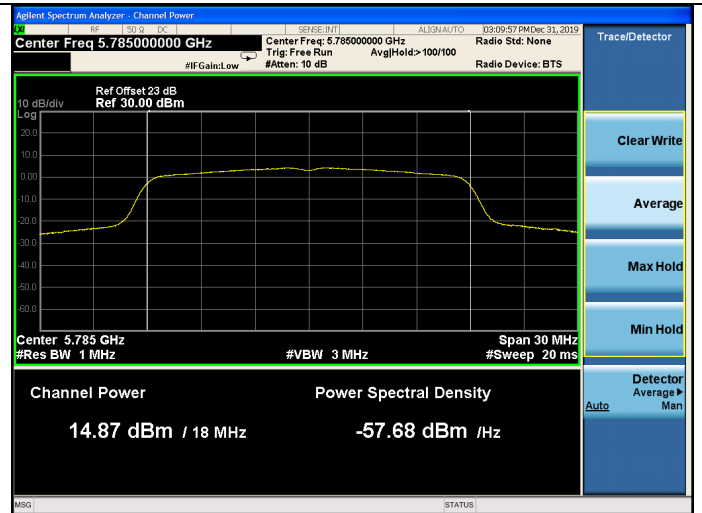

5825MHz

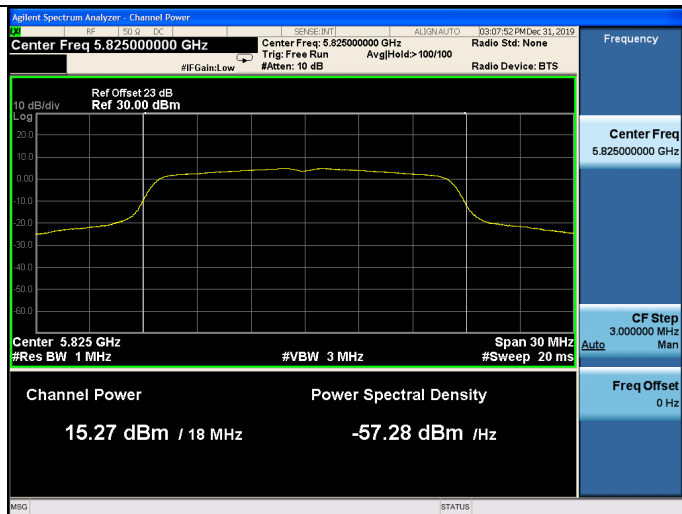


5825MHz




11n HT40


5755MHz

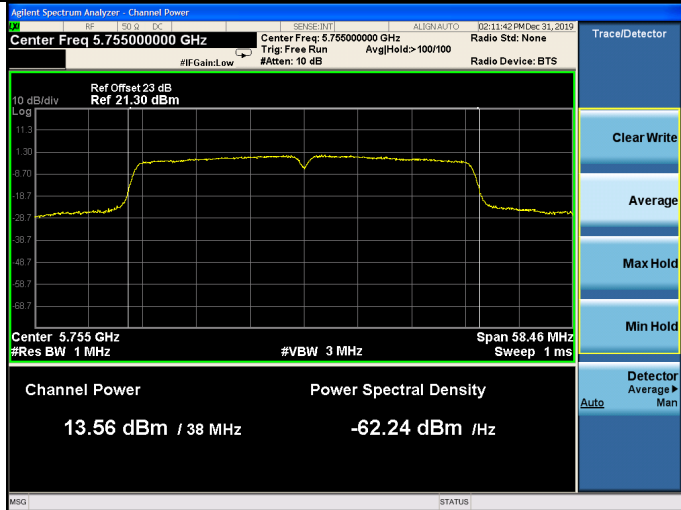


5785MHz

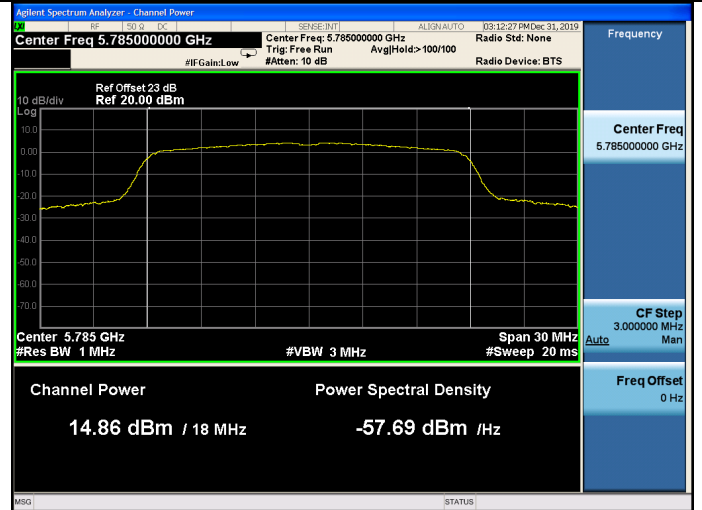

5795MHz

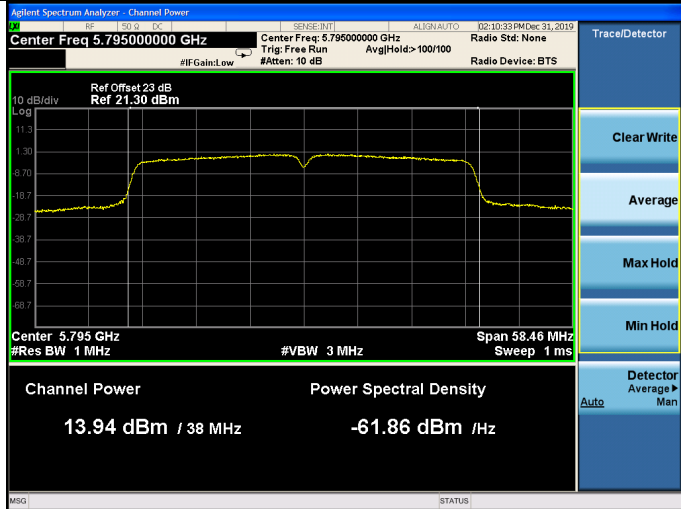

5825MHz

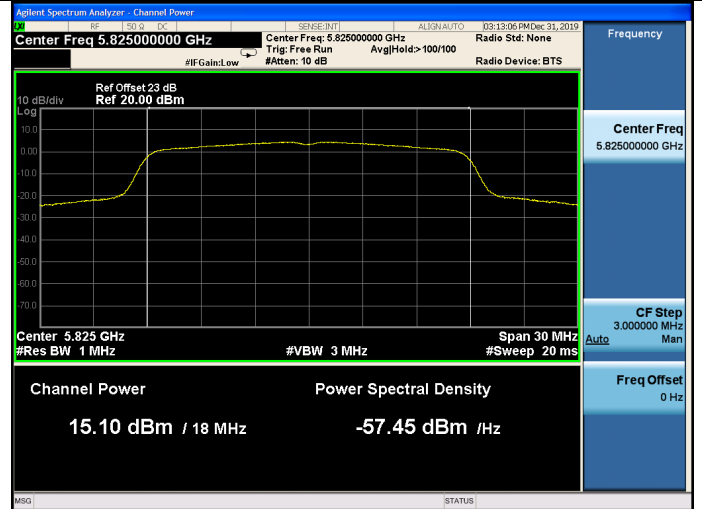

11ac VHT20


5745MHz



11ac VHT40

5755MHz



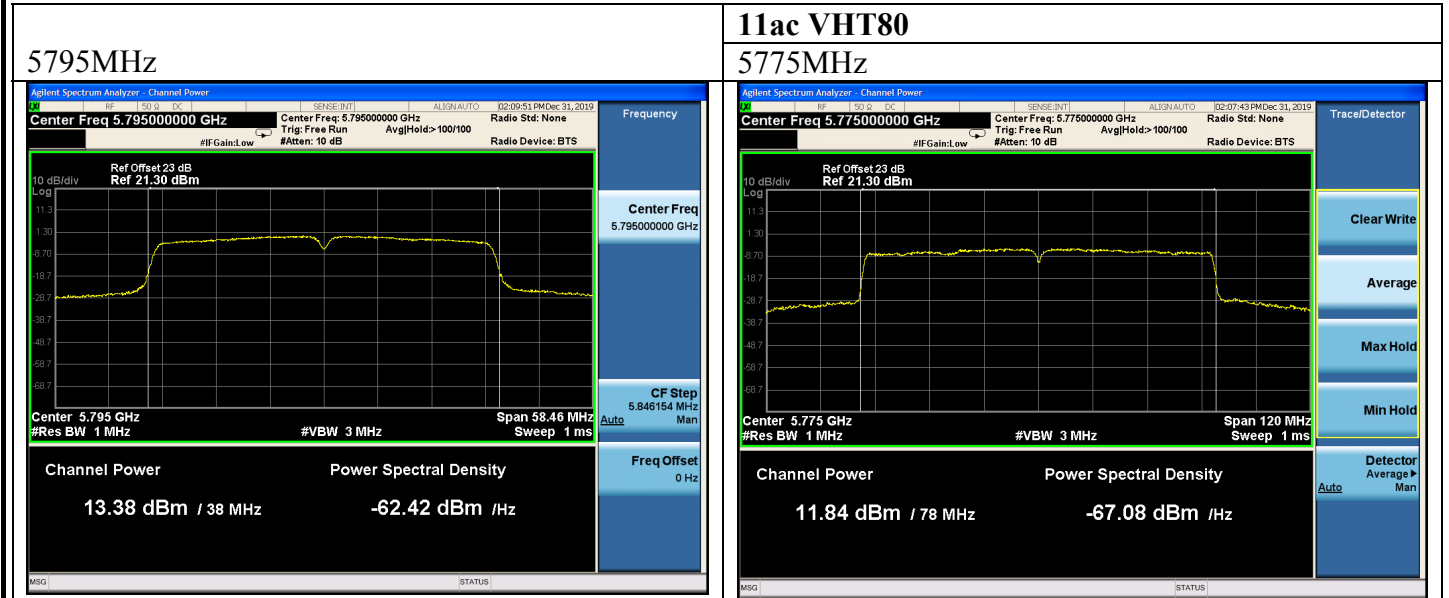


U-NII-3 Band:

ANT B


11a

5745MHz

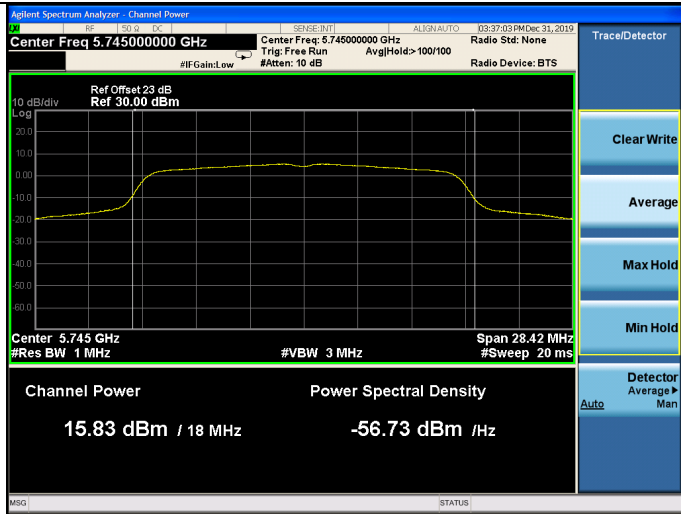


11n HT20

5745MHz

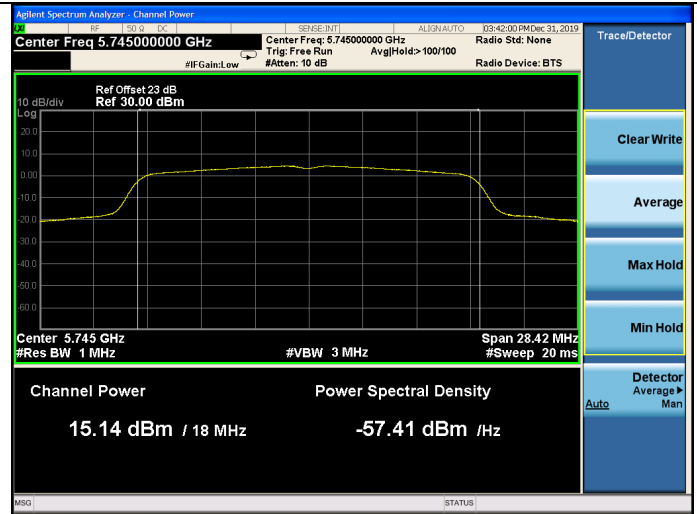


5785MHz

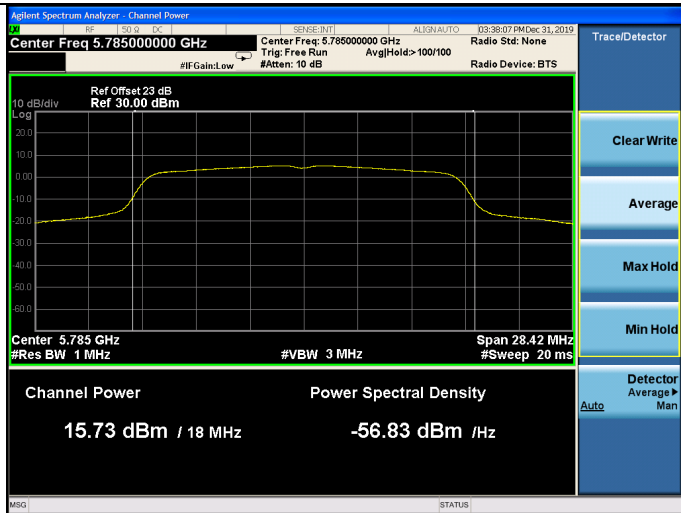

5785MHz



5825MHz

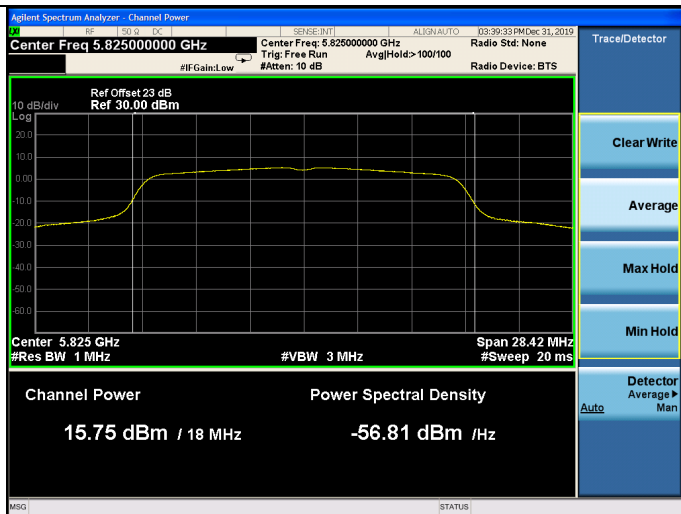


5825MHz




11n HT40


5755MHz

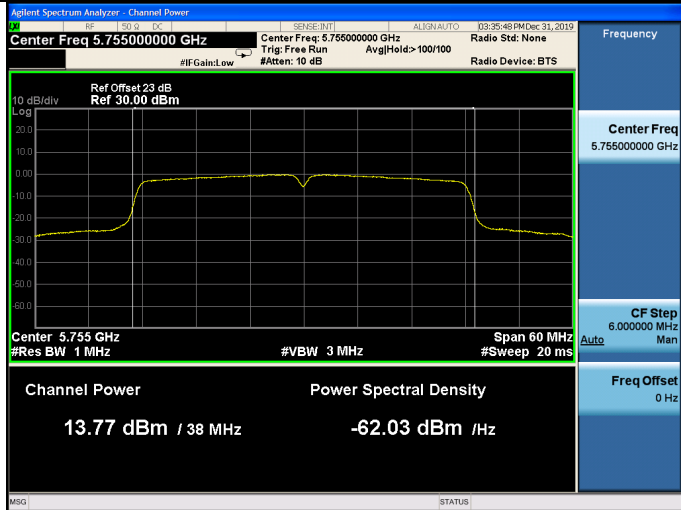


5785MHz

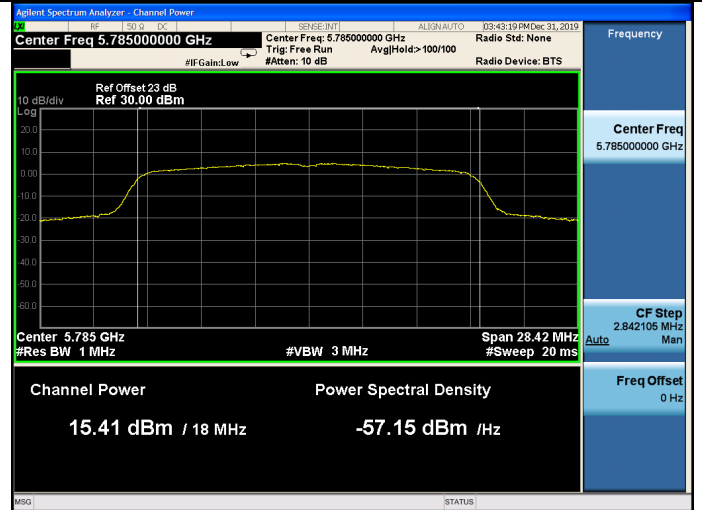

5795MHz

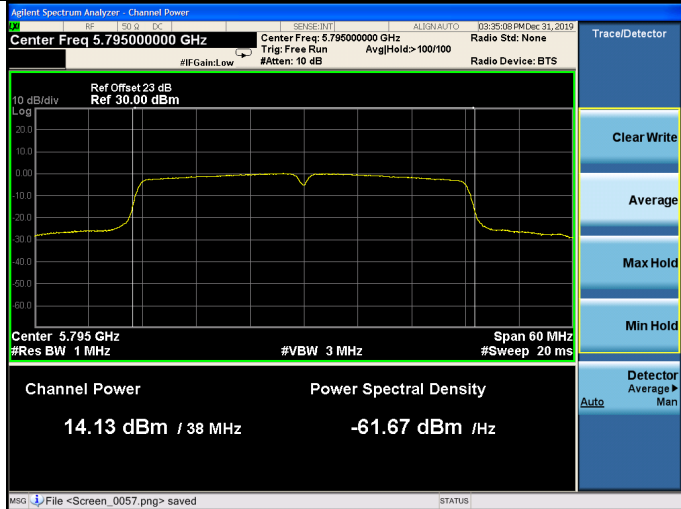


5825MHz

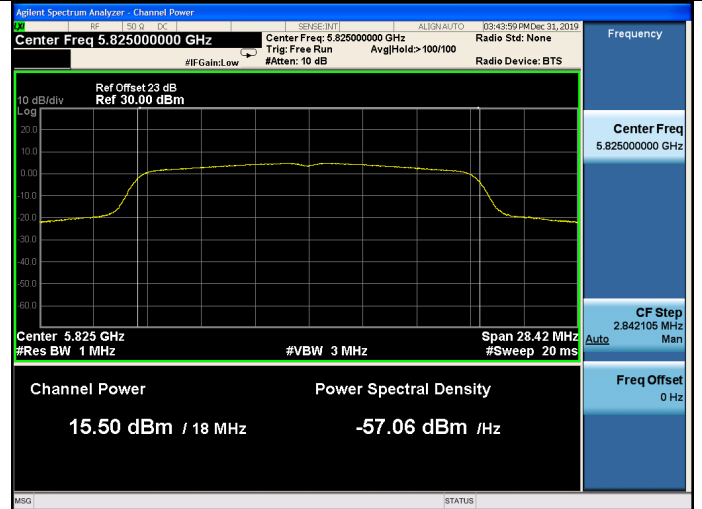


11ac VHT20

5745MHz

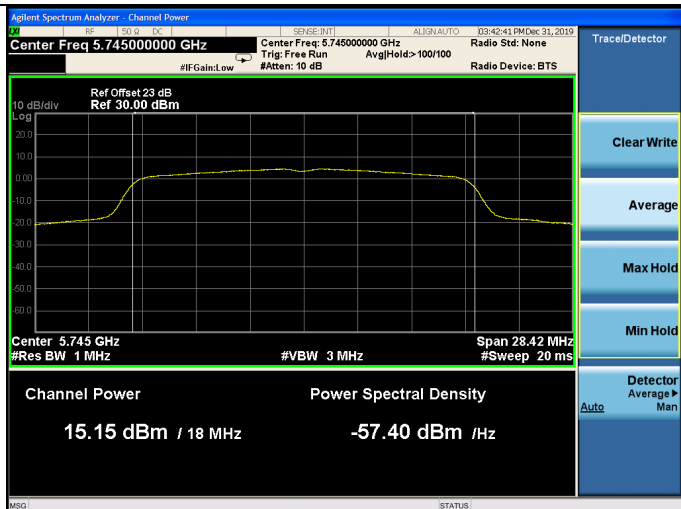

11ac VHT40



5755MHz

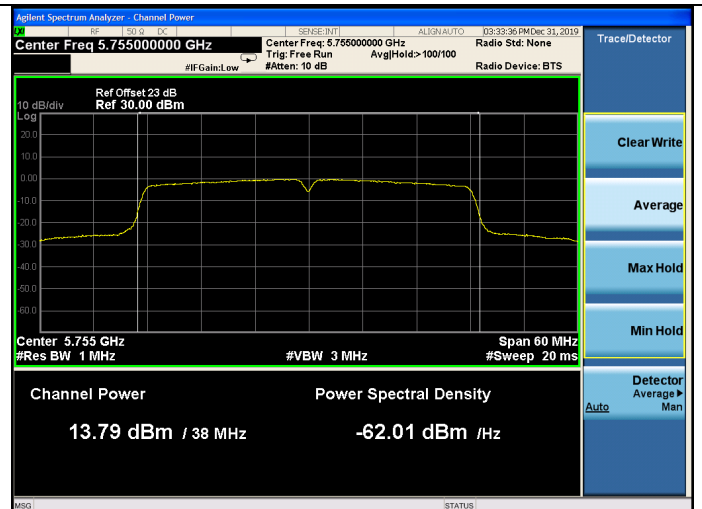

11ac VHT80

5795MHz

5775MHz

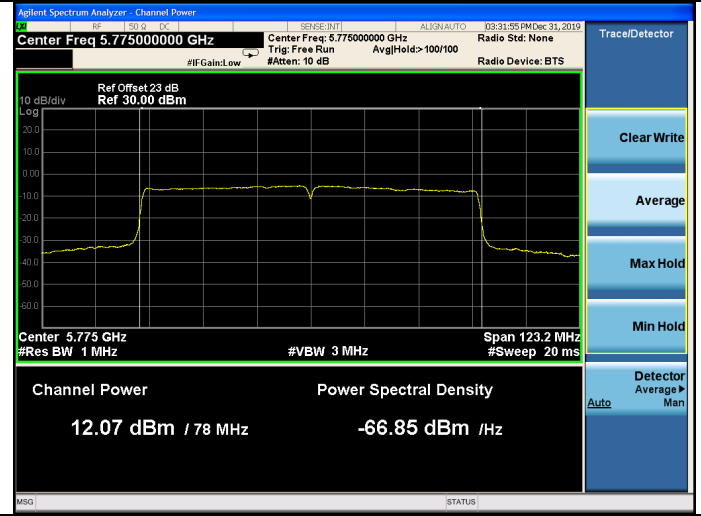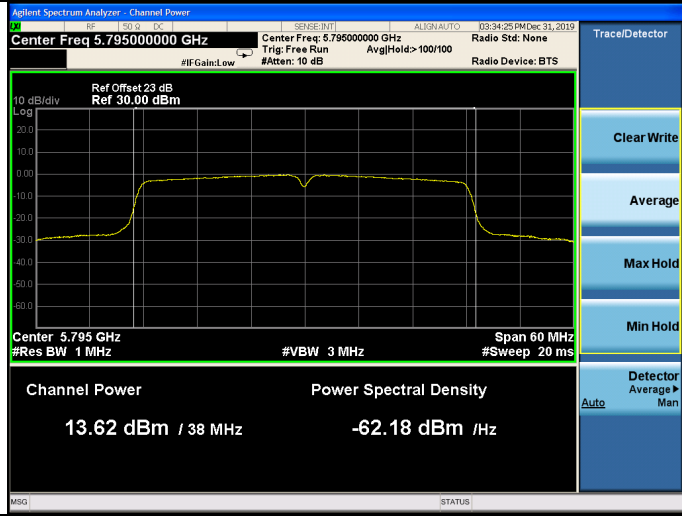

8. EQUIVALENT ISOTROPIC RADIATED POWER TEST

8.1.Limit

Use the test method described in FCC Part 15.407(h) (1):

Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

8.2.Test Procedure

Use the test method described in ANSI C63.10 Annex G :

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator ,set the Spectrum Analyzer as below:

Span: Zero

RBW:100KHz

VBW:100KHz

Read out the duty cycle(X) of the transmitter and record as X

(2) The channel power measure function of spectrum Analyzer was used to measure out average output power of transmitter.

(3)Calculated e.i.r.p according to the formula: Read + Cable loss + Atten loss + Antenna Gain + $10\log(1/x)$

(4)Repeated test at the lowest, the middle, and the highest frequency of the stated frequency range.

8.3. Test Results

U-NII-1 Band:

EUT: WiFi module		
M/N: 2AU3BU9W42		
Test date: 2019-12-31~2020-01-06	Pressure: 102.5±1.0 kpa	Humidity: 53.1±3.0%
Tested by: Garry	Test site: RF site	Temperature: 22.6±0.6 °C

Test Mode	Frequency (MHz)	EIRP (dBm)			Limit (dBm)
		ANT A	ANT B	Total	
11a	5180	17.14	10.4	N/A	22.22
	5200	17.02	10.55	N/A	
	5240	16.75	10.79	N/A	
11n HT20	5180	14.05	7.42	14.90	22.22
	5200	14.01	7.51	14.89	
	5240	13.57	7.39	14.51	
11n HT40	5190	16.32	9.7	17.18	23.01
	5230	15.87	9.91	16.85	
11ac VHT20	5180	14.08	7.45	14.93	22.22
	5200	14.04	8.01	15.01	
	5240	13.76	7.42	14.67	
11ac VHT40	5190	15.71	9.74	16.69	23.01
	5230	15.36	9.33	16.33	
11ac VHT80	5210	14.88	8.53	15.79	23.01

Conclusion: PASS

Note: For 11a/11n HT20/11ac VHT20 Mode

Limit=10dBm + 10 log B=22.22dBm

where B is the 99% emission bandwidth in megahertz.

For 11n HT40/11ac VHT40/ 11ac VHT80Mode

Limit= 23.01dBm

9. SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Jun.30,19	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.13,19	1 Year
3.	RF Cable	EMCI	EMC102-KM-KM 3500	170702	May.13,19	1 Year

9.2. Limit

Band 5150-5250 MHz:

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

Band 5725-5850 MHz:

The power spectral density shall not exceed 30 dBm in any 500 KHz band.

9.3. Test Procedure

For the Band 5.15-5.25GHz:

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW; Detector: RMS mode.

For the band 5.725-5.85 GHz:

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW, RMS Detector.

So use the test method described in KDB789033 clause E

- 1) Set the RBW=100kHz and VBW ≥ 3 RBW
- 2) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2 so that narrowband signals are not lost between frequency bins.)
- 3) Sweep time = auto
- 4) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- 5) Use the "peak search" function of spectrum analyzer find the max value, then add $10\log(500\text{kHz}/\text{RBW})$ to the measured result.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

9.4. Test Results

U-NII-1 Band:

EUT: WiFi module		
M/N: U9W42		
Test date: 2019-12-04~2020-01-06	Pressure: 102.5±1.0 kpa	Humidity: 53.1±3.0%
Tested by: Garry	Test site: RF site	Temperature: 22.6±0.6 °C

Test Mode	Frequency (MHz)	Power density (dBm/MHz)			Limit (dBm/MHz)
		ANT A	ANT B	Total	
11a	5180	3.619	4.113	N/A	11
	5200	3.594	3.961	N/A	
	5240	3.478	3.015	N/A	
11n HT20	5180	0.438	0.860	3.66	11
	5200	0.521	0.967	3.76	
	5240	0.081	0.573	3.34	
11n HT40	5190	1.199	-2.725	2.68	11
	5230	-4.029	-2.545	-0.21	
11ac VHT20	5180	0.630	0.851	3.75	11
	5200	0.485	0.945	3.73	
	5240	0.512	0.502	3.52	
11ac VHT40	5190	-3.995	-3.221	-0.58	11
	5230	-4.085	-3.238	-0.63	
11ac VHT80	5210	-9.575	-9.146	-6.35	11

Conclusion: PASS

Note: 1. Directional Gain= $10 \log[(10^{2.9/20} + 10^{-3.8/20})^2 / 2]$ dBi

$$= 3.19 \text{ dBi} < 6 \text{ dBi}$$

2. The transmit signals are correlated.

U-NII-3 Band:

EUT: WiFi module		
M/N: U9W42		
Test date: 2019-12-04~2020-01-05	Pressure: 102.7±1.0 kpa	Humidity: 54.1±3.0%
Tested by: Garry	Test site: RF site	Temperature: 23.4±0.6 °C

Test Mode	Frequency (MHz)	Power density (dBm/500KHz)			Limit (dBm/500KHz)
		ANT A	ANT B	Total	
11a	5745	2.736	1.586	N/A	30
	5785	2.137	0.969	N/A	
	5825	2.343	1.123	N/A	
11n HT20	5745	0.780	0.171	3.50	30
	5785	-0.053	-0.111	2.93	
	5825	0.377	-0.230	3.09	
11n HT40	5755	-3.971	-5.659	-1.72	30
	5795	-3.355	-6.047	-1.49	
11ac VHT20	5745	0.939	-0.558	3.27	30
	5785	0.690	-1.091	2.90	
	5825	0.652	-0.732	3.03	
11ac VHT40	5755	-6.078	-6.215	-3.14	30
	5795	-5.526	-6.214	-2.85	
11ac VHT80	5775	-10.394	-11.637	-7.96	30

Conclusion: PASS

Note: 1. Directional Gain= $10 \log[(10^{-1.9/20} + 10^{-4.5/20})^2 / 2]$ dBi
 = -0.093 dBi < 6 dBi.

2. The transmit signals are correlated.

3. The total result = Reading + $10 \log(500 \text{kHz} / 100 \text{kHz})$


FCC ID: 2AU3BU9W42

U-NII-1 Band:

ANT A


11a

5180MHz

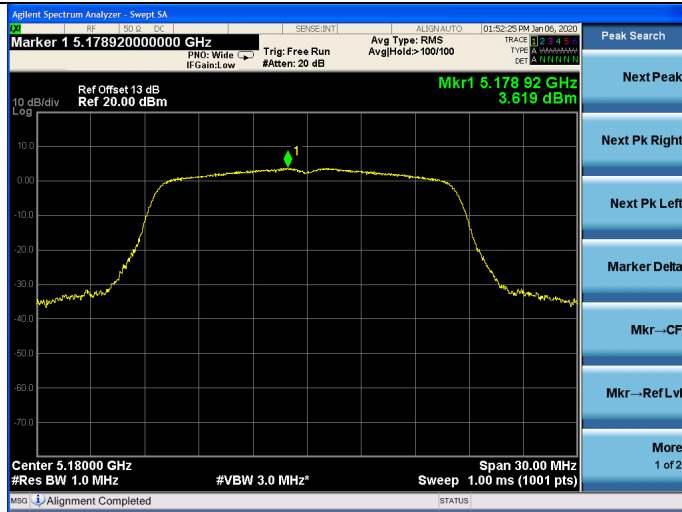


11n HT20


5180MHz

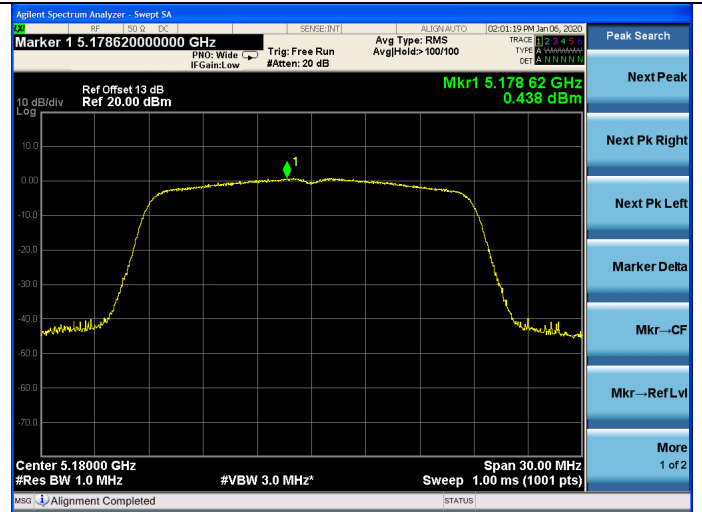


5200MHz

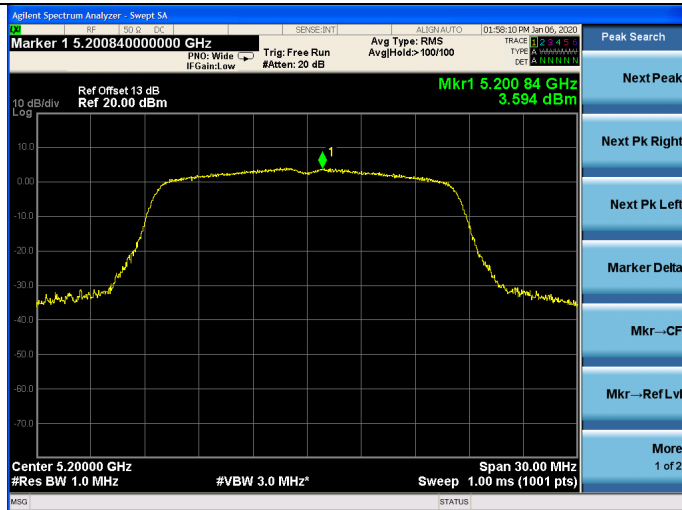


5200MHz

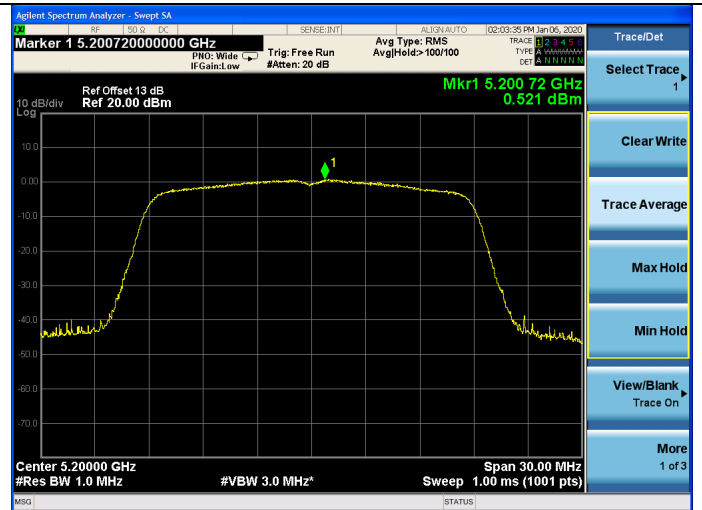

5240MHz

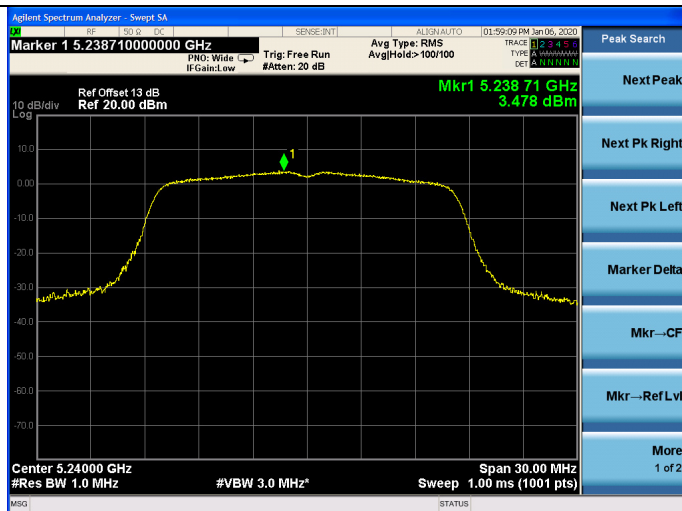


5240MHz

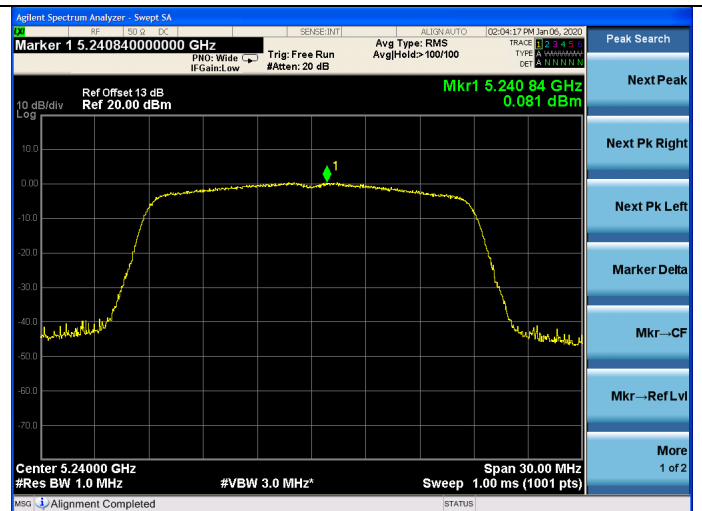


11n HT40


5190MHz

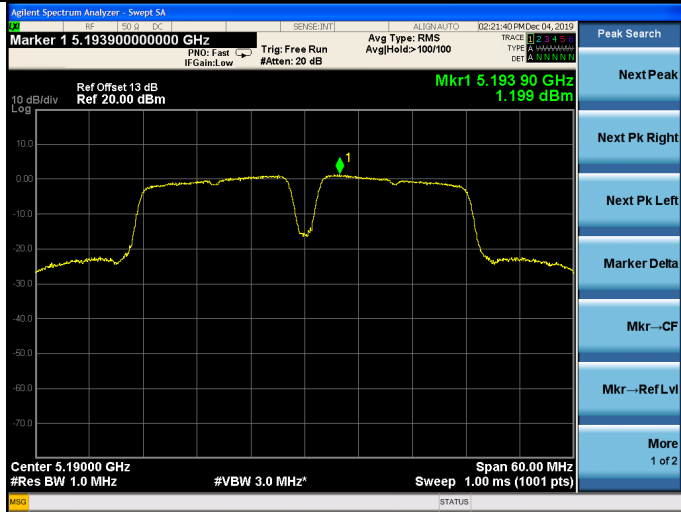


5200MHz

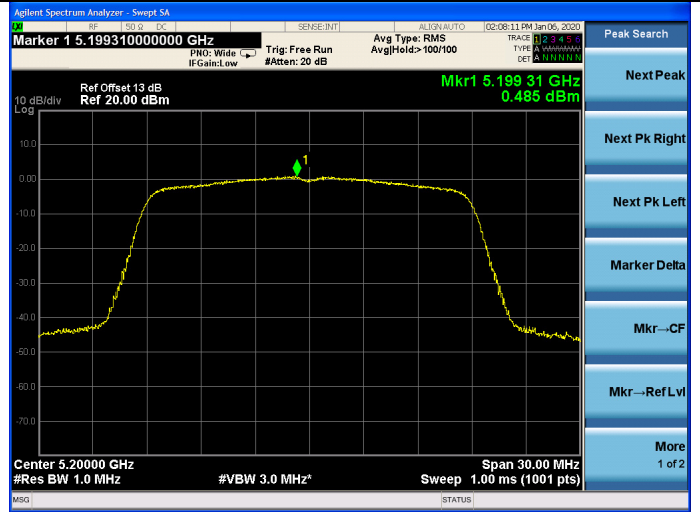

5230MHz

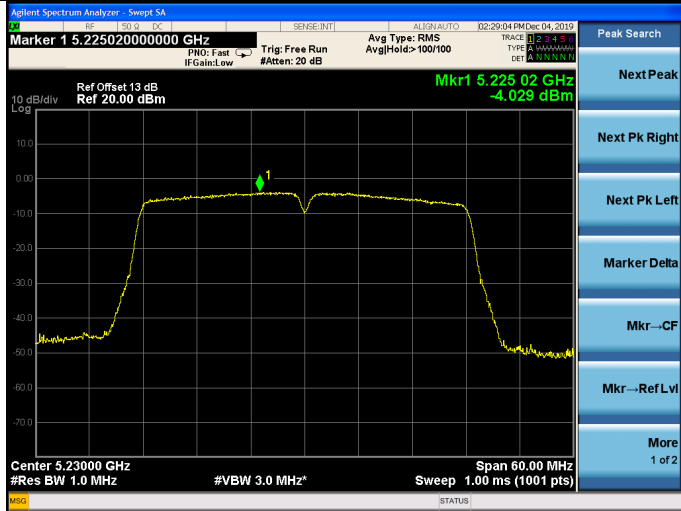


5240MHz

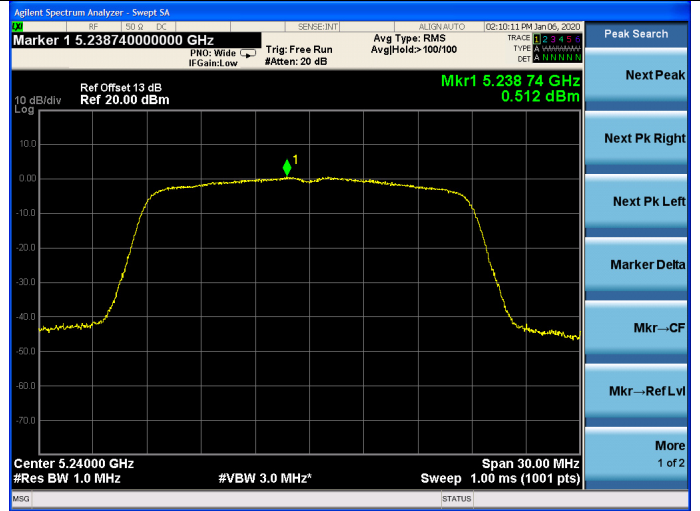


11ac VHT20


5180MHz

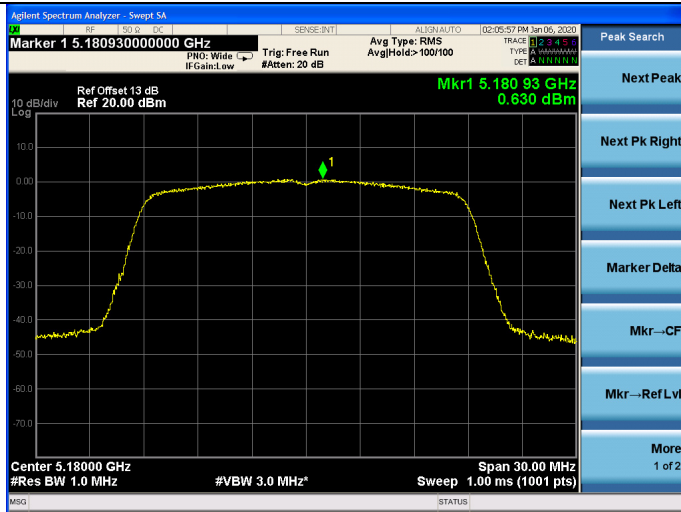

11ac VHT40

5190MHz

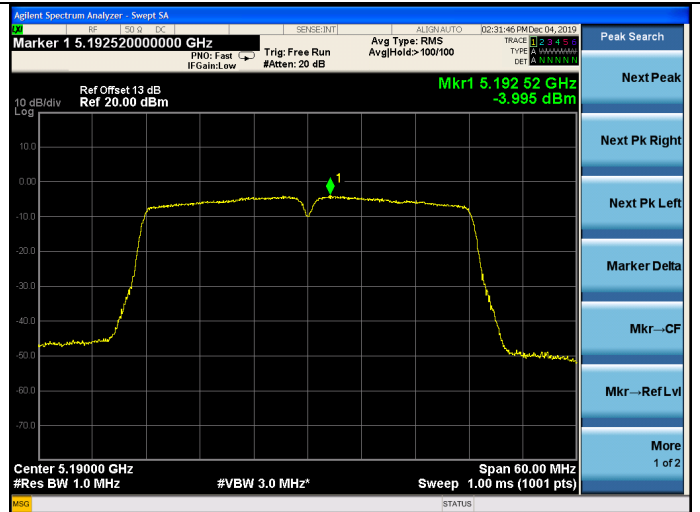

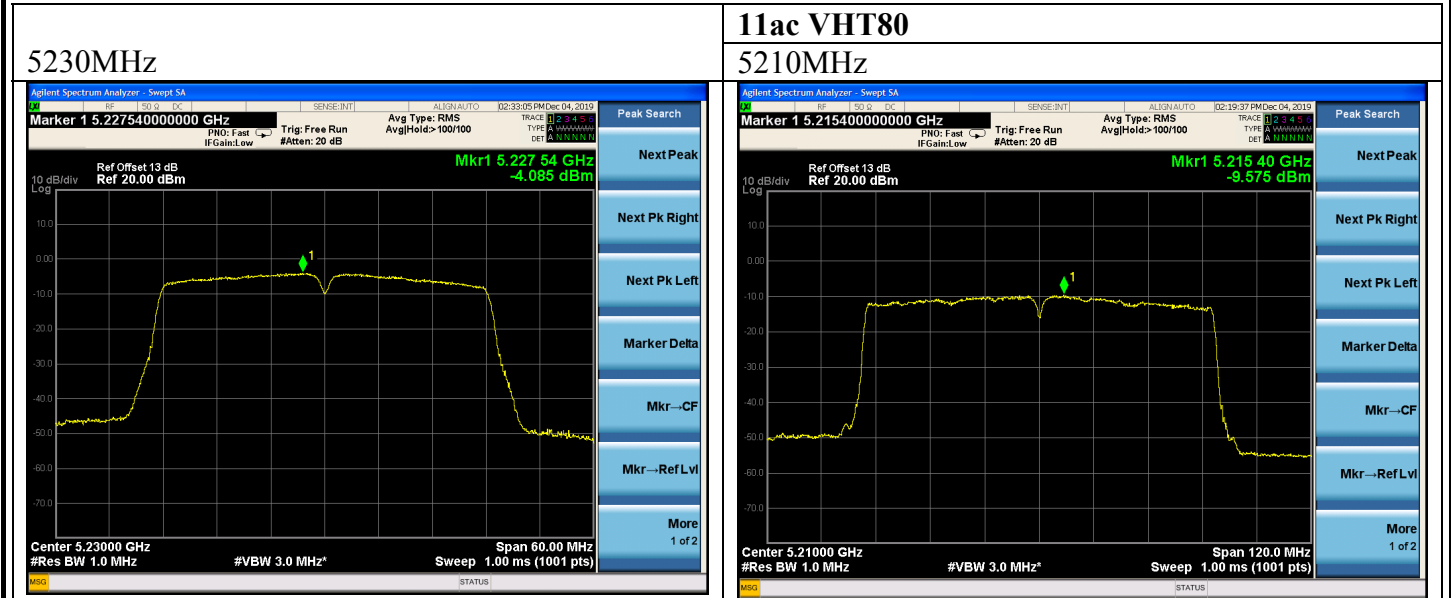


FCC ID: 2AU3BU9W42

U-NII-1 Band:

ANT B


11a

5180MHz

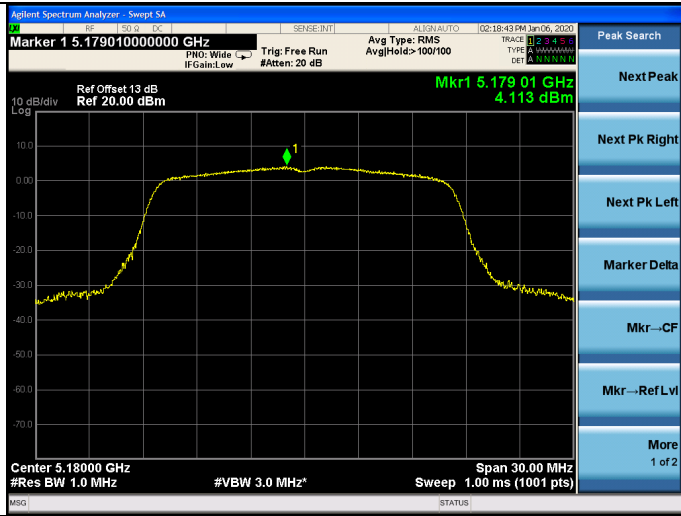


11n HT20


5180MHz

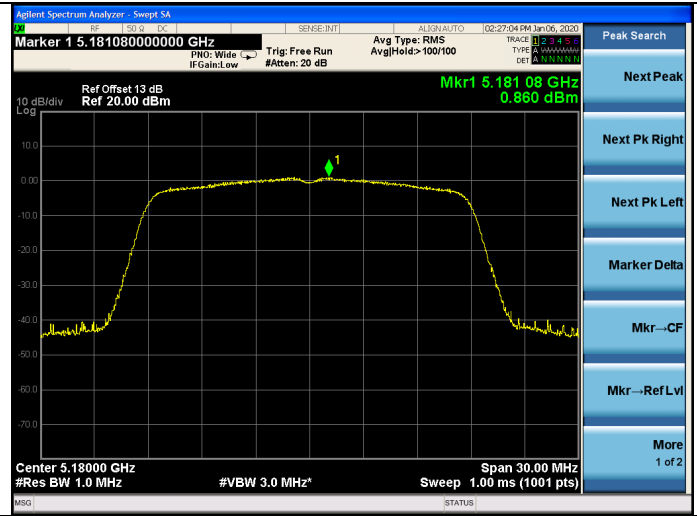


5200MHz

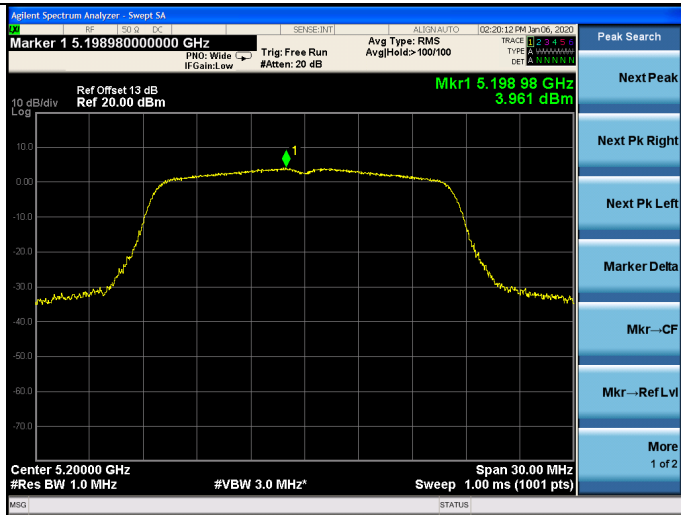


5200MHz

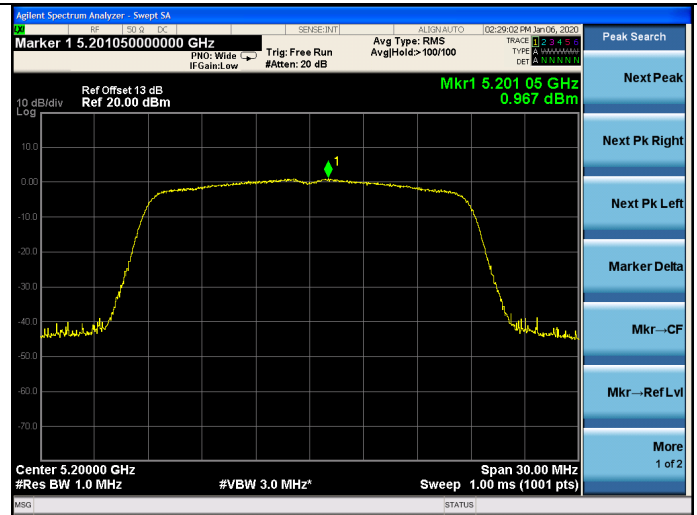

5240MHz

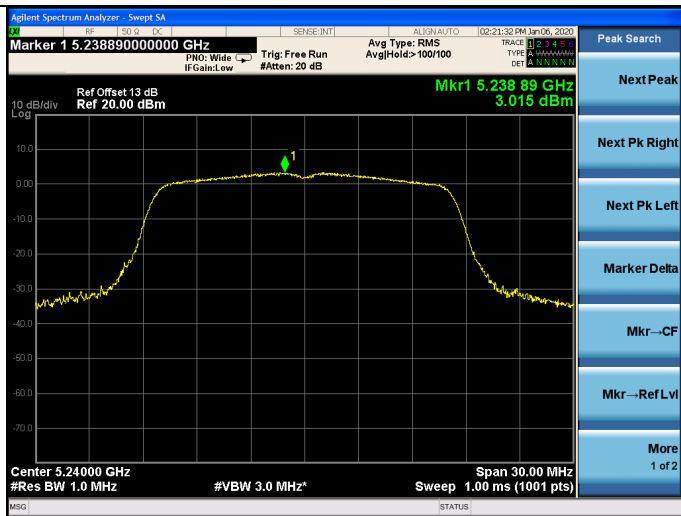


5240MHz

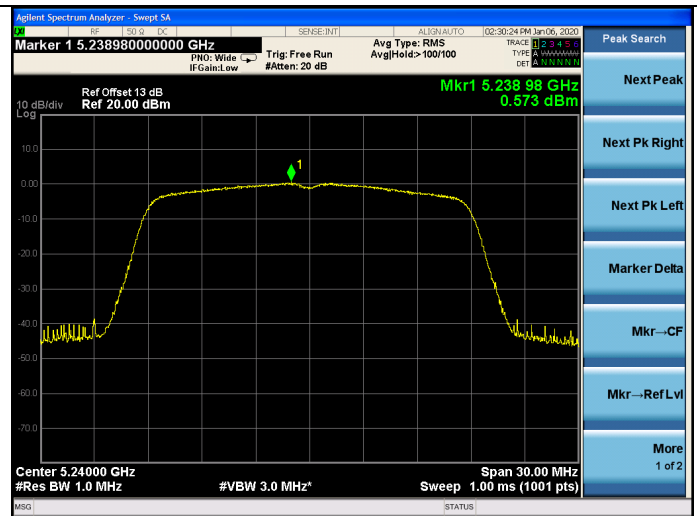


11n HT40


5190MHz

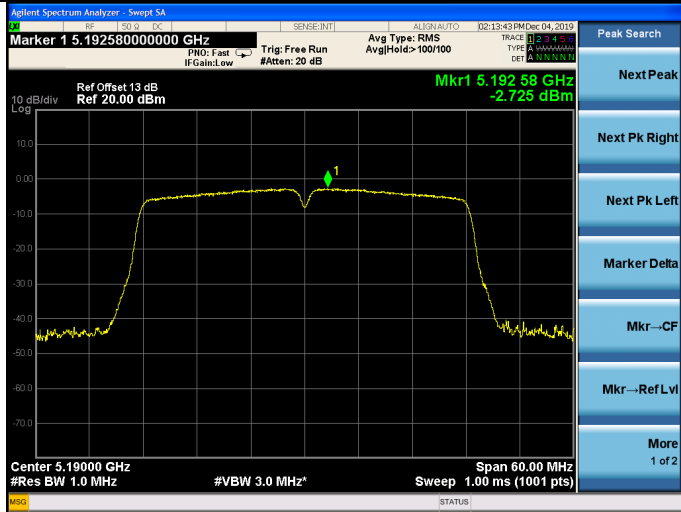


5200MHz

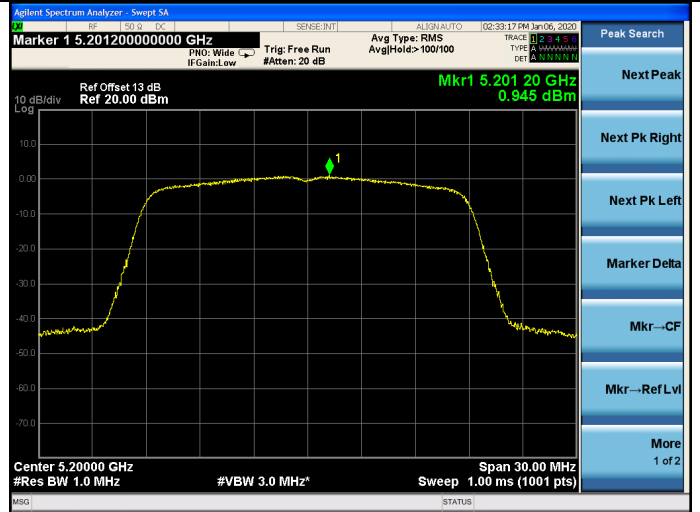

5230MHz

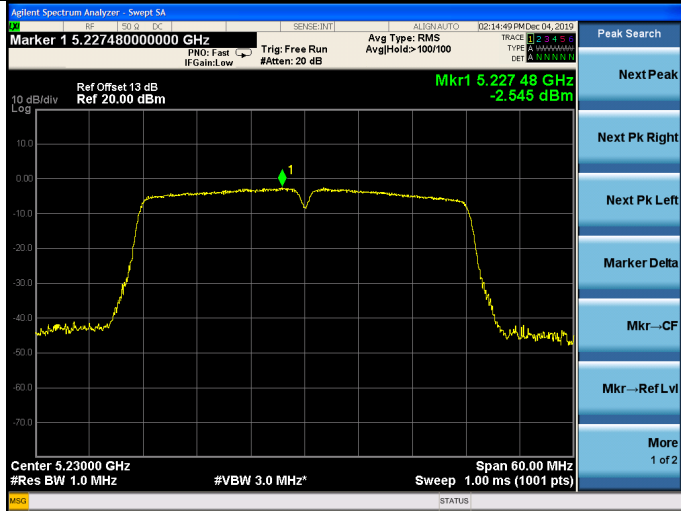


5240MHz

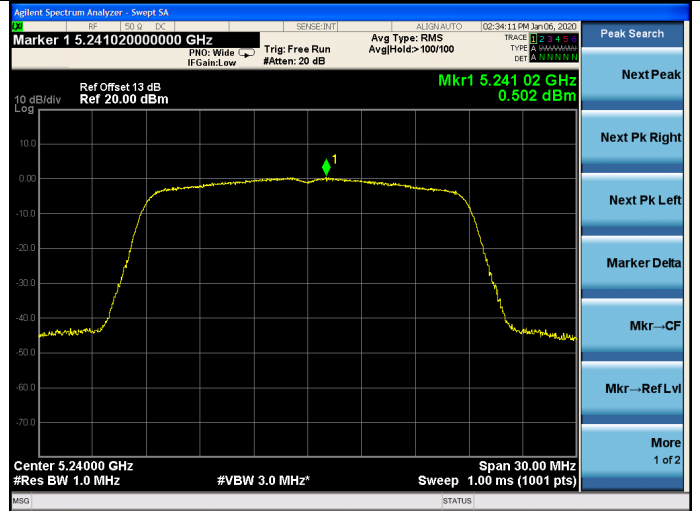


11ac VHT20

5180MHz

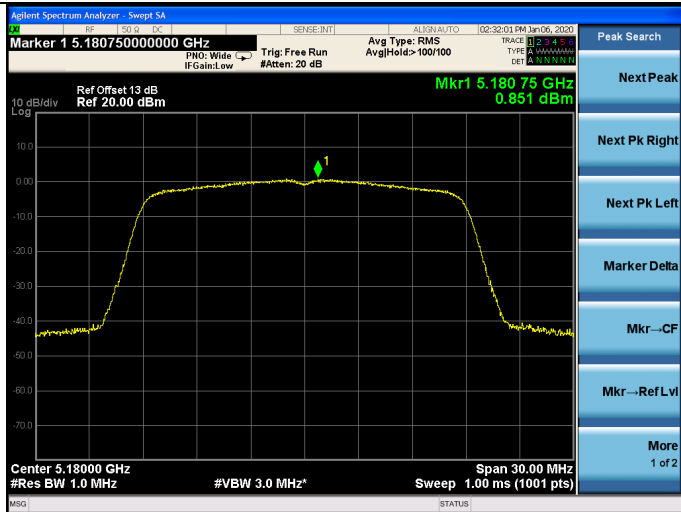

11ac VHT40

5190MHz

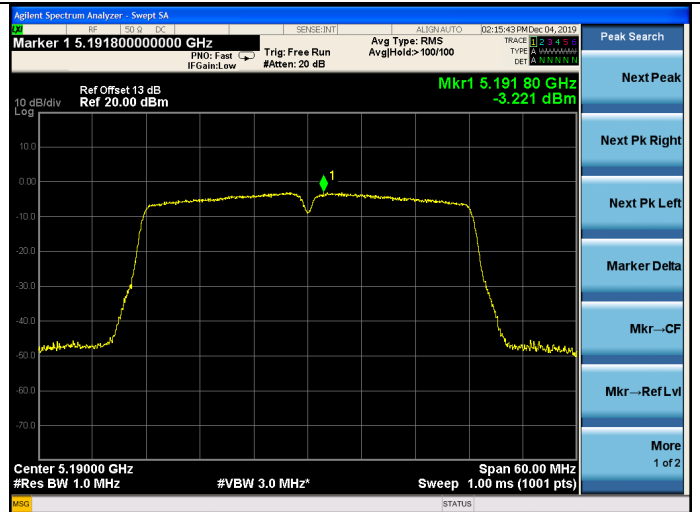

11ac VHT80

5230MHz

5210MHz

