



**ANTA:**

Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

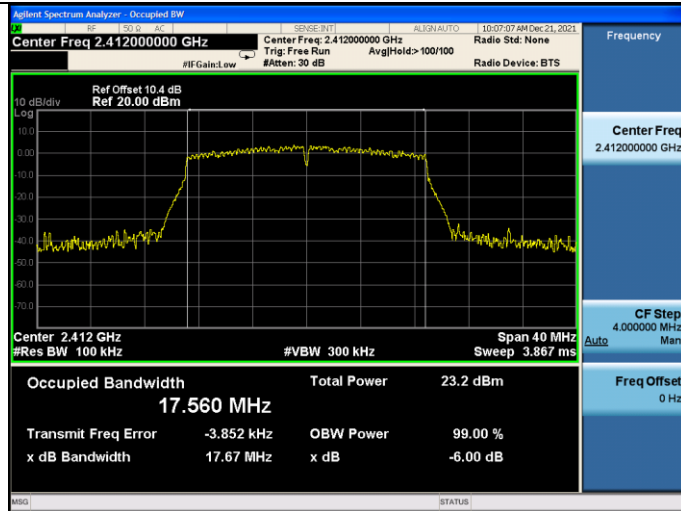


**ANTB:**


Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

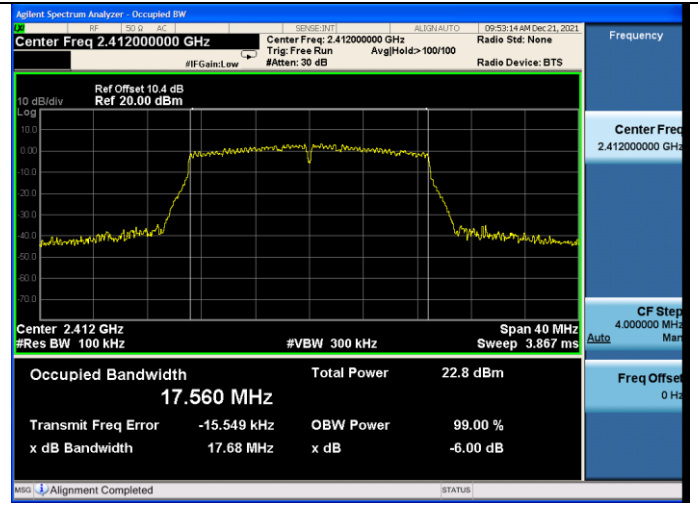


**Test CH6: 2437MHz**

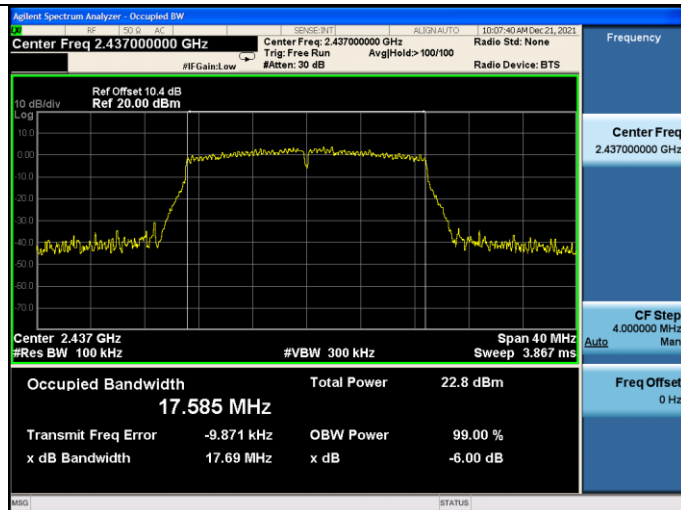


**Test CH6: 2437MHz**

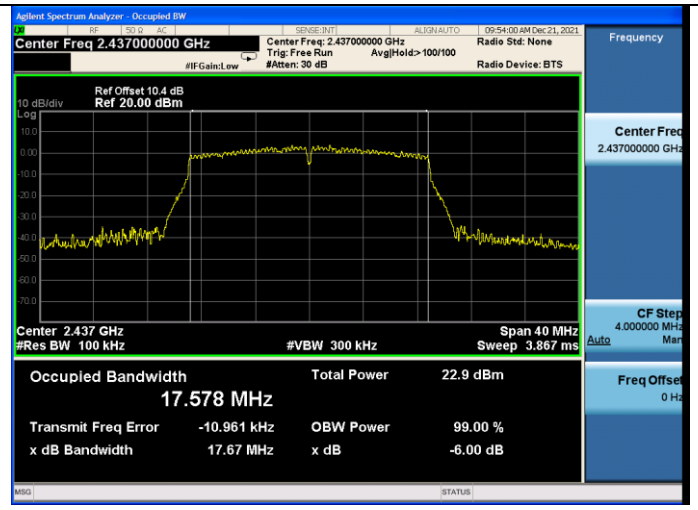

**Test CH11: 2462MHz**

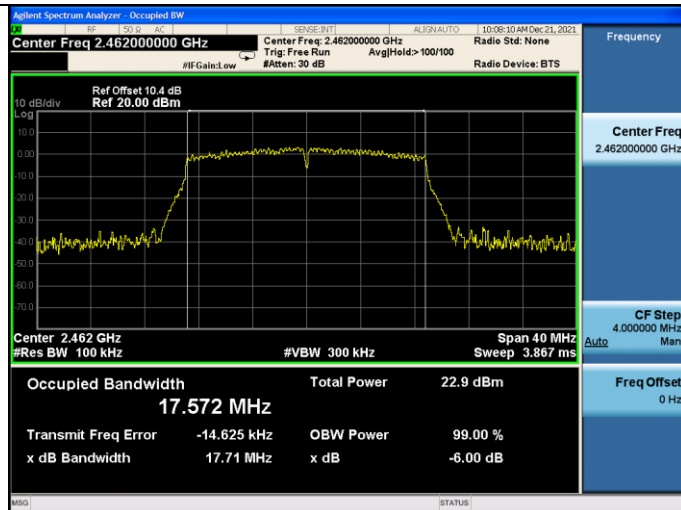


**Test CH11: 2462MHz**

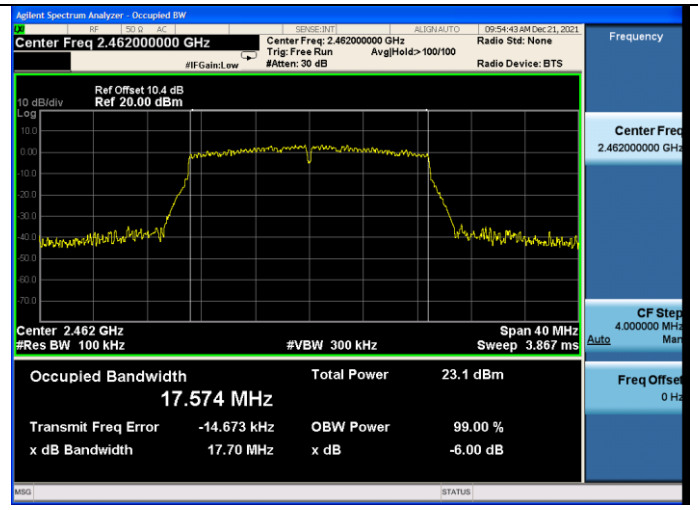


**ANTA:**

Test Mode: IEEE 802.11n HT40  
Test CH3: 2422MHz

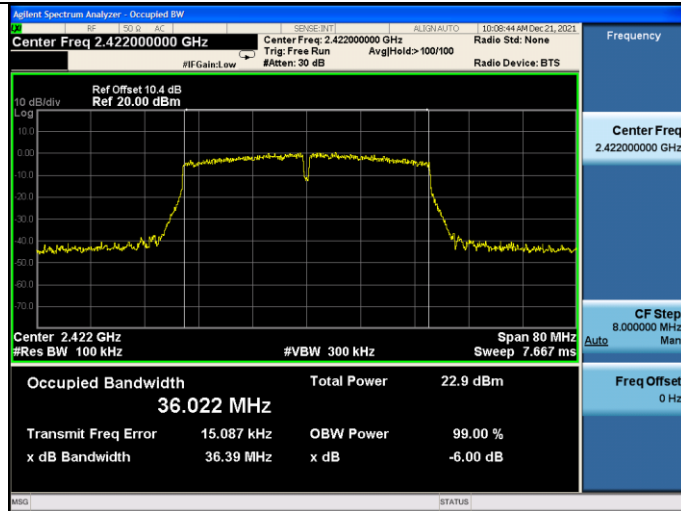


**ANTB:**


Test Mode: IEEE 802.11n HT40  
Test CH3: 2422MHz

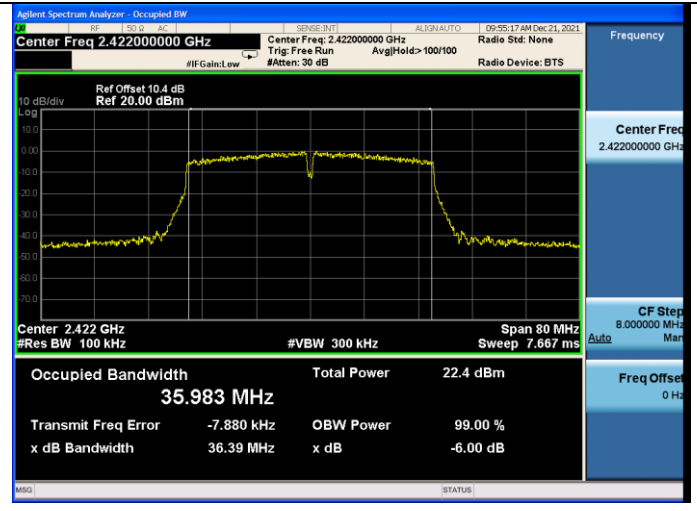


**Test CH6: 2437MHz**

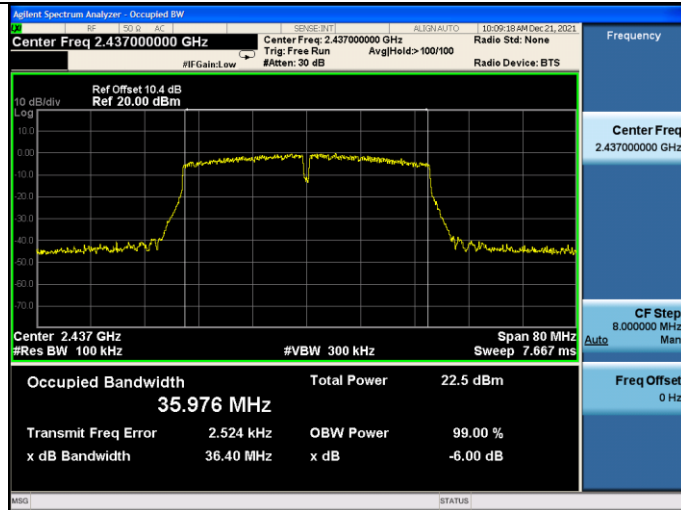


**Test CH6: 2437MHz**

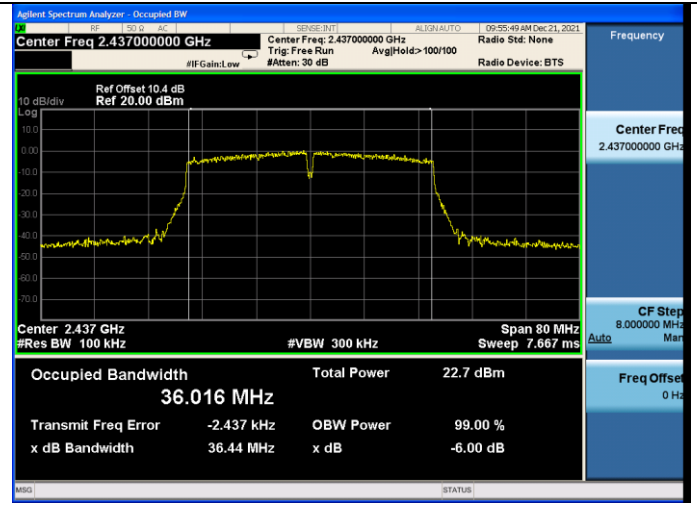

**Test CH9: 2452MHz**

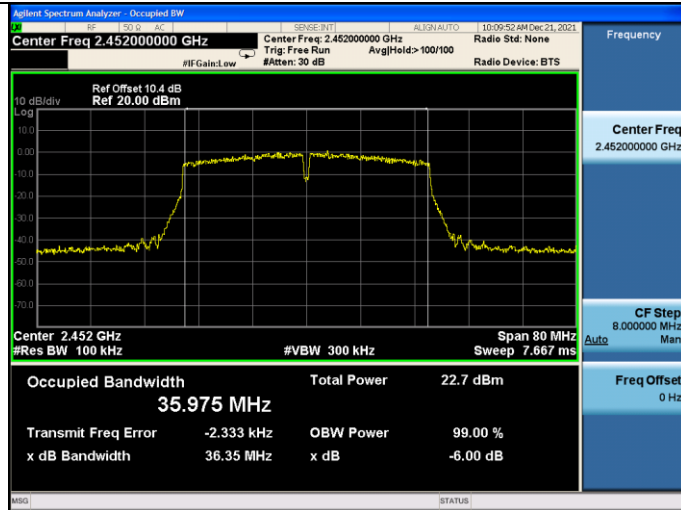

**Test CH9: 2452MHz**

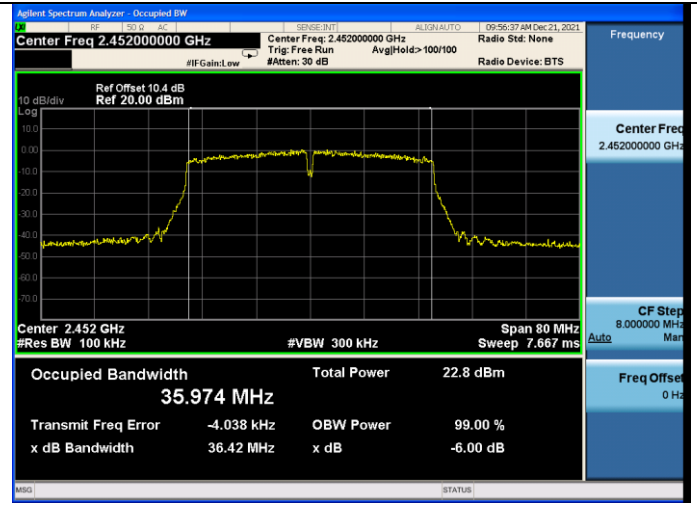

## 8. OUTPUT POWER TEST

### 8.1. Test Equipments

| Item | Equipment           | Manufacturer | Model No.     | Serial No. | Last Cal. | Cal. Interval |
|------|---------------------|--------------|---------------|------------|-----------|---------------|
| 1.   | PXA Signal Analyzer | Agilent      | N9030A        | MY51380221 | Apr.07,21 | 1 Year        |
| 2.   | Power meter         | Anritsu      | ML2487A       | 6K00002472 | Apr.07,21 | 1 Year        |
| 3.   | Power sensor        | Anritsu      | MA2491A       | 033005     | Apr.06,21 | 1 Year        |
| 4.   | RF Cable            | HUBER+SUHNER | SUCOFLE X-106 | 505238/6   | Apr.07,21 | 1 Year        |

### 8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm), As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

### 8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, Use the test method described in ANSI C63.10-2013 clause 11.9.2.2.2 Method AVGSA-1.
  - 1) Set span to at least 1.5 times the OBW.
  - 2) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
  - 3) Set VBW  $\geq [3 \times \text{RBW}]$ .
  - 4) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
  - 5) Sweep time = auto.
  - 6) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
  - 7) If transmit duty cycle  $< 98\%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle  $\geq 98\%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
  - 8) Trace average at least 100 traces in power averaging (rms) mode.
  - 9) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**8.4. Test Results**

|                       |                          |                           |
|-----------------------|--------------------------|---------------------------|
| EUT: WiFi module      |                          |                           |
| M/N: U9W43            |                          |                           |
| Test date: 2021-12-09 | Pressure: 102.1 ±1.0 kpa | Humidity: 51.1 ±3.0%      |
| Tested by: Winter     | Test site: RF site       | Temperature: 22.8 ±0.6 °C |

**SISO:**

| Test Mode | CH   | output Power (dBm) |       | Limit (dBm) |
|-----------|------|--------------------|-------|-------------|
|           |      | ANTA               | ANTB  |             |
| 11b       | CH1  | 18.29              | 17.75 | 30          |
|           | CH6  | 18.44              | 18.24 |             |
|           | CH11 | 18.26              | 18.26 |             |
| 11g       | CH1  | 17.78              | 17.16 | 30          |
|           | CH6  | 17.27              | 17.33 |             |
|           | CH11 | 17.41              | 17.51 |             |
| 11n HT20  | CH1  | 16.54              | 16.13 | 30          |
|           | CH6  | 16.22              | 16.13 |             |
|           | CH11 | 16.58              | 16.29 |             |
| 11n HT40  | CH3  | 16.41              | 16.03 | 30          |
|           | CH6  | 16.44              | 16.13 |             |
|           | CH9  | 16.40              | 16.39 |             |

Conclusion: PASS

**MIMO:**

| Test Mode | CH   | Output Power (dBm) |       |        | Limit (dBm) |
|-----------|------|--------------------|-------|--------|-------------|
|           |      | ANTA               | ANTB  | Total  |             |
| 11n HT20  | CH1  | 19.17              | 15.59 | 20.749 | 30          |
|           | CH6  | 16.26              | 18.12 | 20.299 |             |
|           | CH11 | 18.35              | 16.27 | 20.444 |             |
| 11n HT40  | CH3  | 16.26              | 17.95 | 20.194 | 30          |
|           | CH6  | 18.67              | 16.12 | 20.590 |             |
|           | CH9  | 16.36              | 18.12 | 20.339 |             |

Conclusion: PASS


Note: 1. For 11n HT20/11n HT40 Mode

$$\text{Directional Gain} = 10 \log[(10^{-1.04/20} + 10^{-2.61/20})^2 / 2] \text{dBi} = 1.22 \text{dB} < 6 \text{dBi}$$

2. The transmit signals are correlated.


**ANTA:**

Test Mode: IEEE 802.11b  
Test CH1: 2412MHz

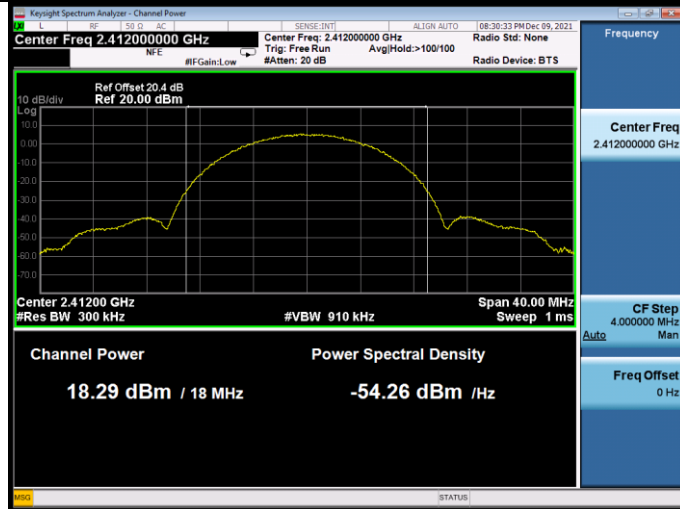


**ANTB:**


Test Mode: IEEE 802.11b  
Test CH1: 2412MHz

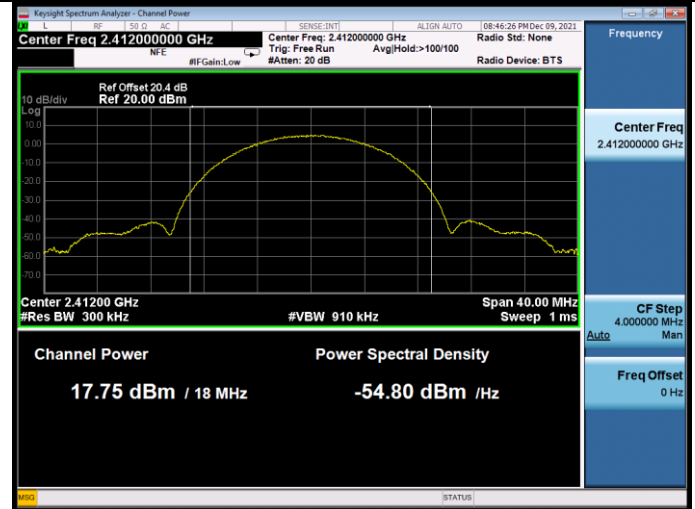


**Test CH6: 2437MHz**

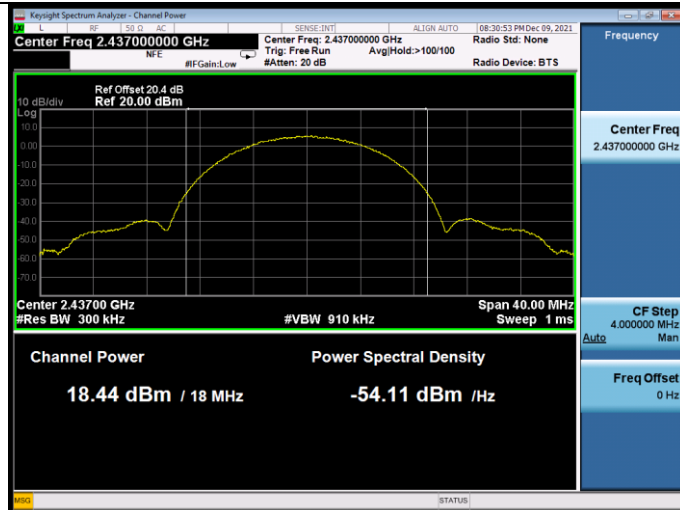


**Test CH6: 2437MHz**

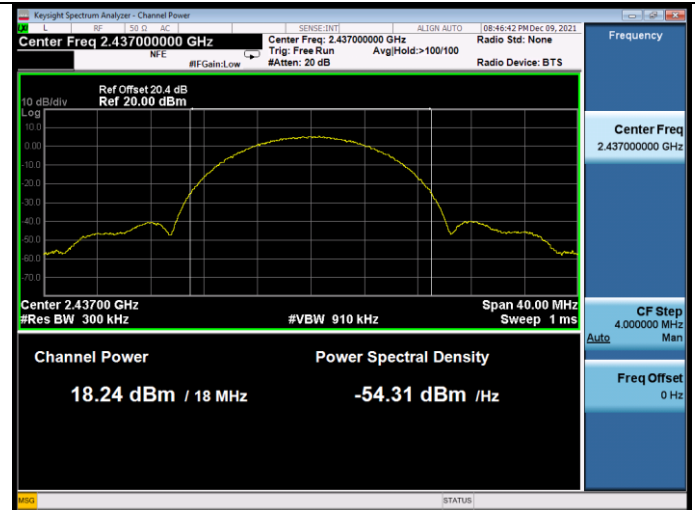

**Test CH11: 2462MHz**

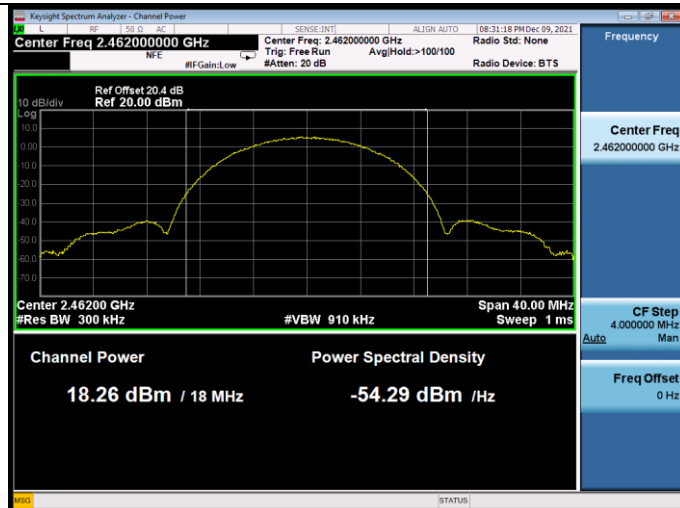


**Test CH11: 2462MHz**

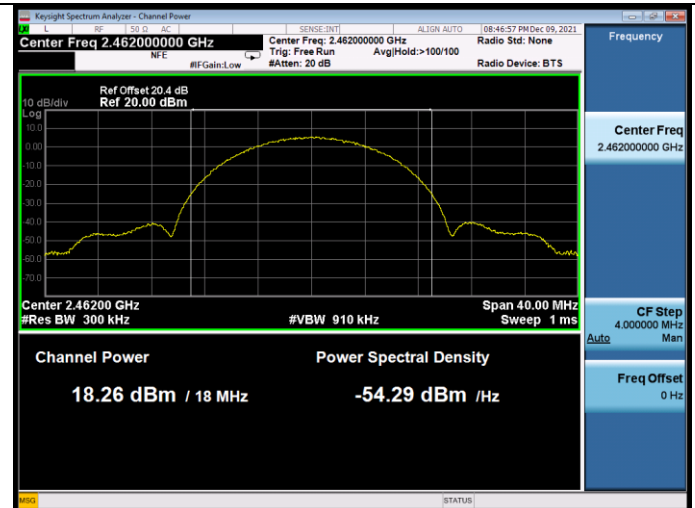




**ANTA:**

Test Mode: IEEE 802.11g  
Test CH1: 2412MHz

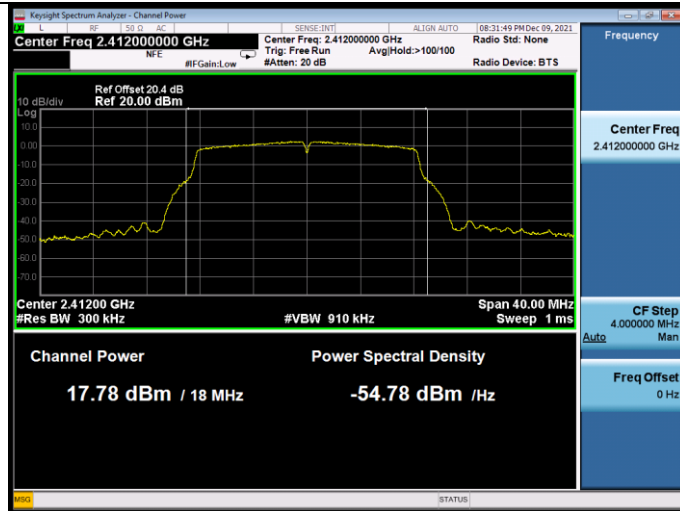


**ANTB:**


Test Mode: IEEE 802.11g  
Test CH1: 2412MHz

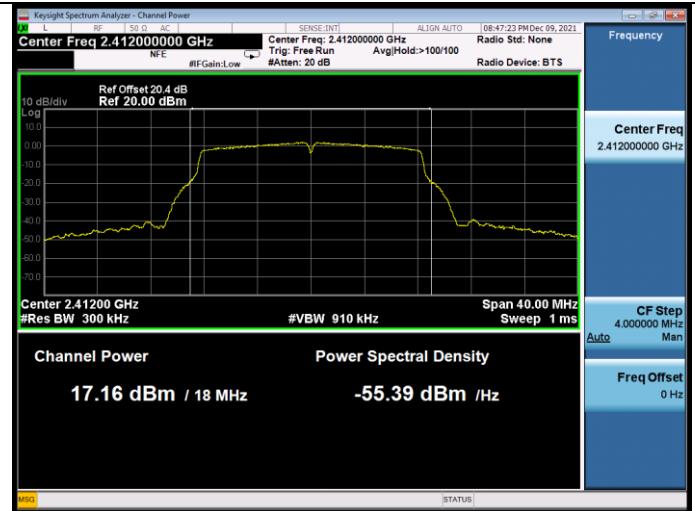


**Test CH6: 2437MHz**

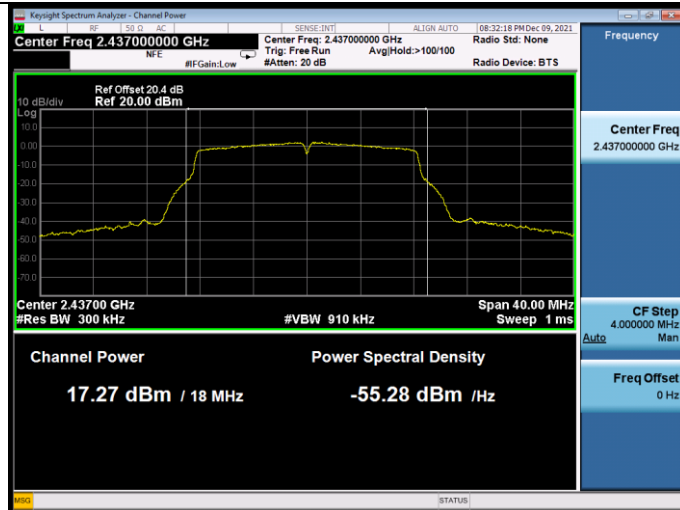


**Test CH6: 2437MHz**

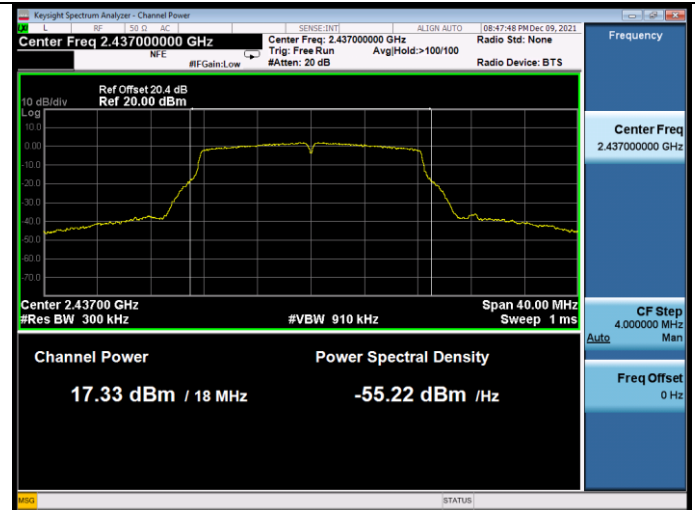

**Test CH11: 2462MHz**

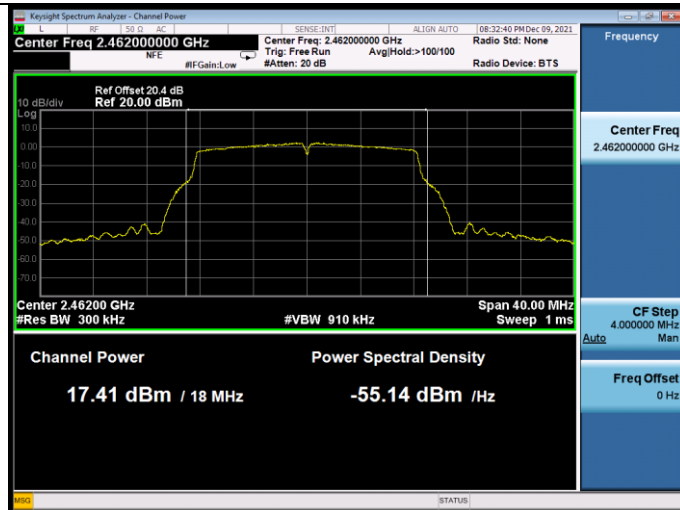


**Test CH11: 2462MHz**

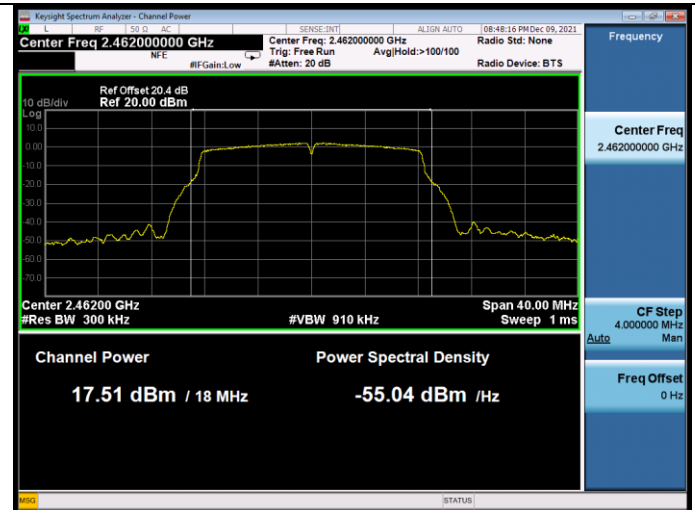


**ANTA:**

Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

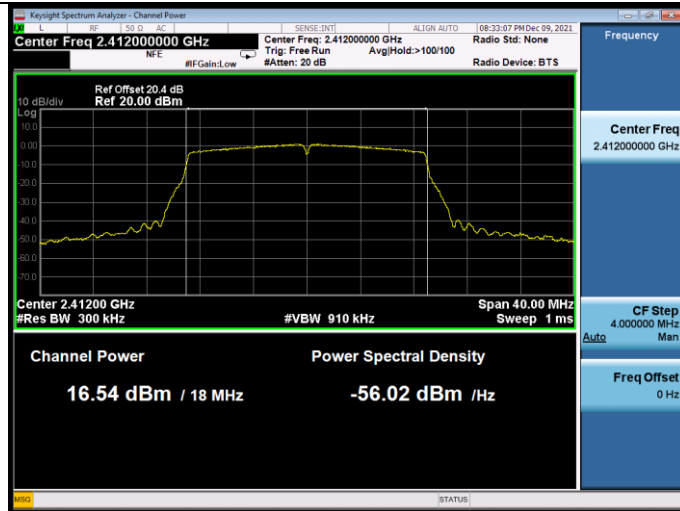


**ANTB:**

Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

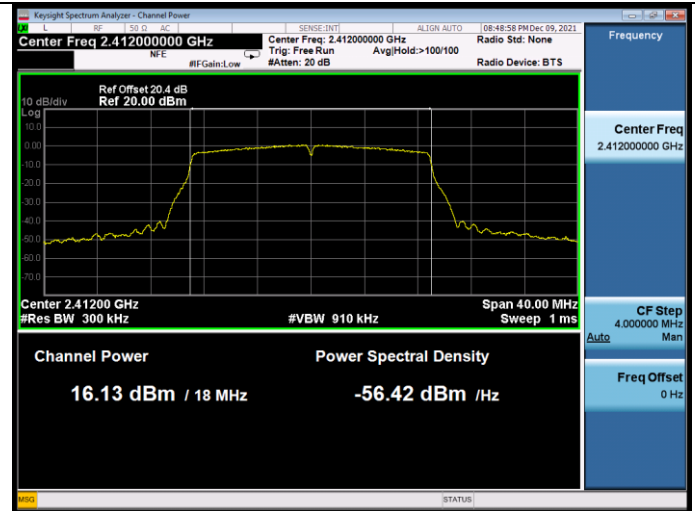


**Test CH6: 2437MHz**

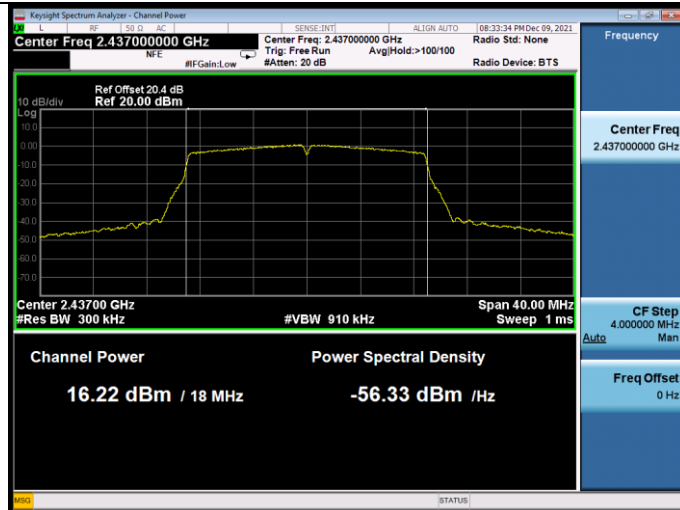


**Test CH6: 2437MHz**



**Test CH11: 2462MHz**

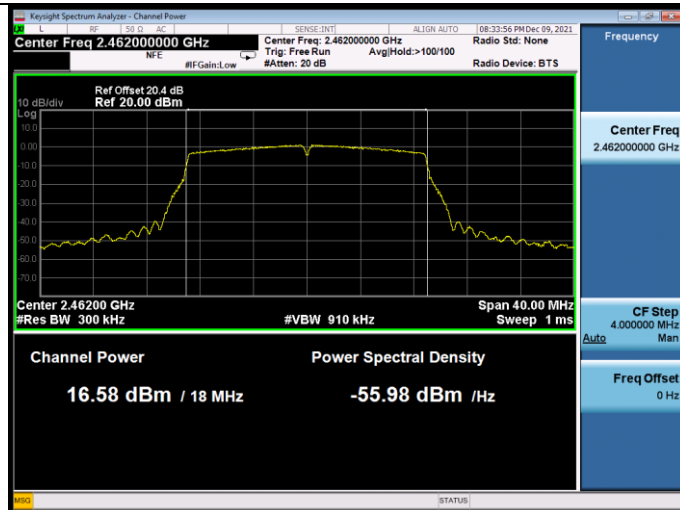


**Test CH11: 2462MHz**

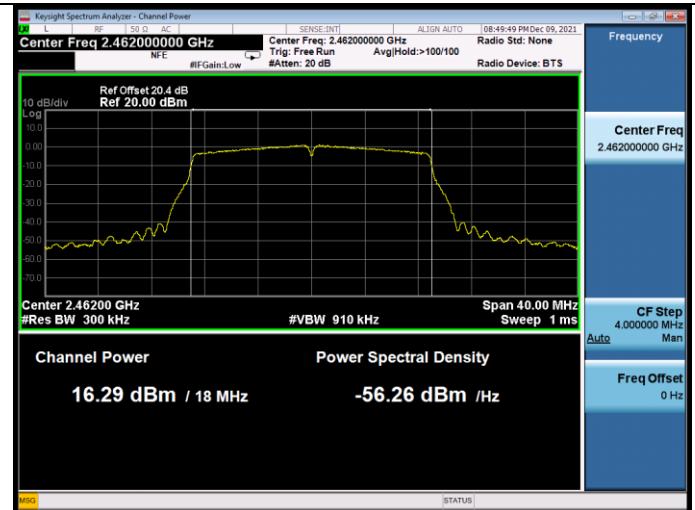


**ANTA:**

Test Mode: IEEE 802.11n HT40  
Test CH3: 2422MHz

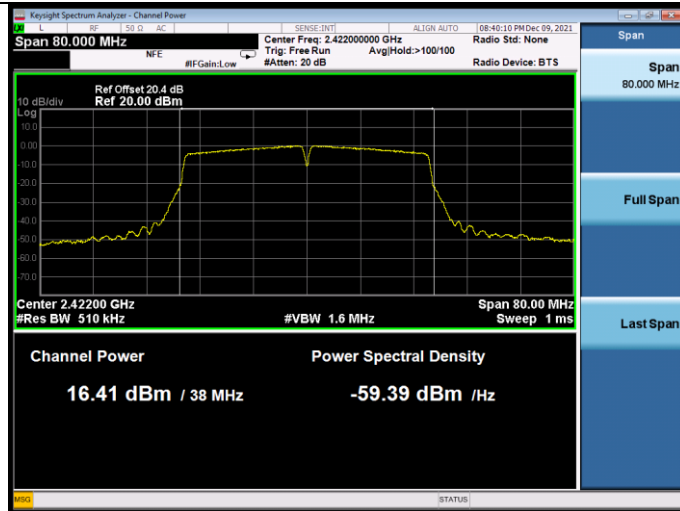


**ANTB:**


Test Mode: IEEE 802.11n HT40  
Test CH3: 2422MHz

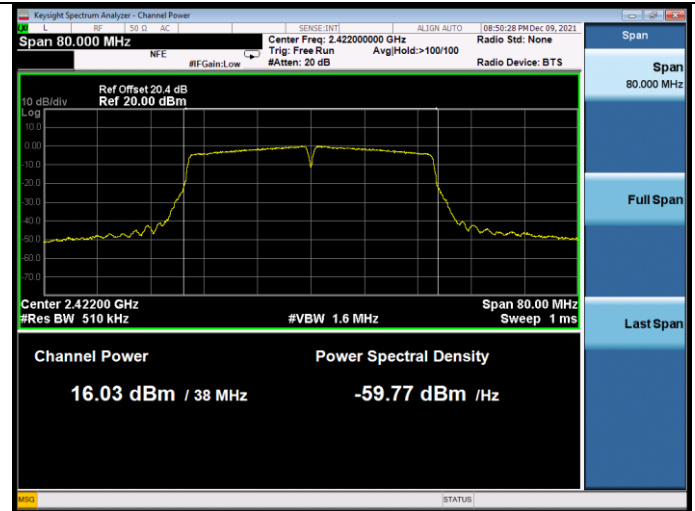


**Test CH6: 2437MHz**

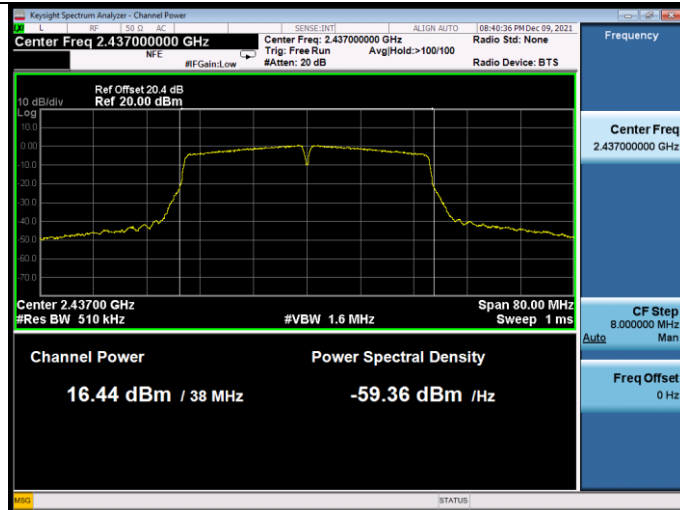


**Test CH6: 2437MHz**

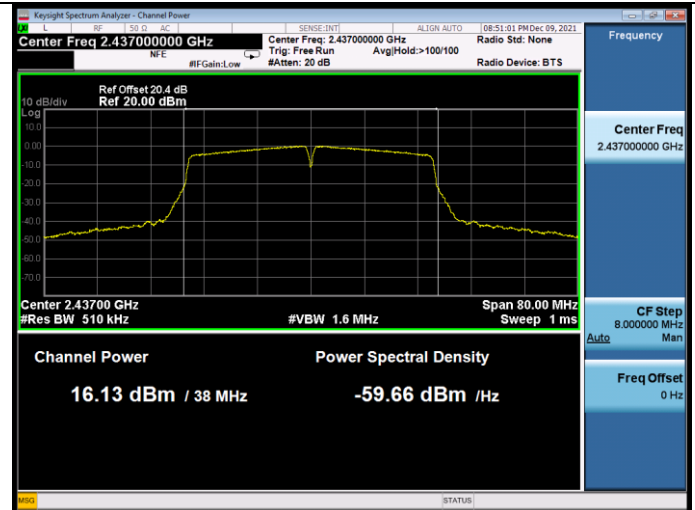

**Test CH9: 2452MHz**

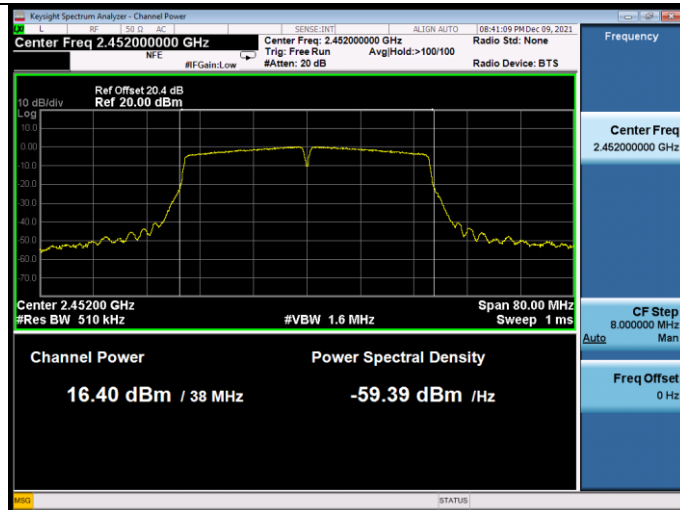


**Test CH9: 2452MHz**

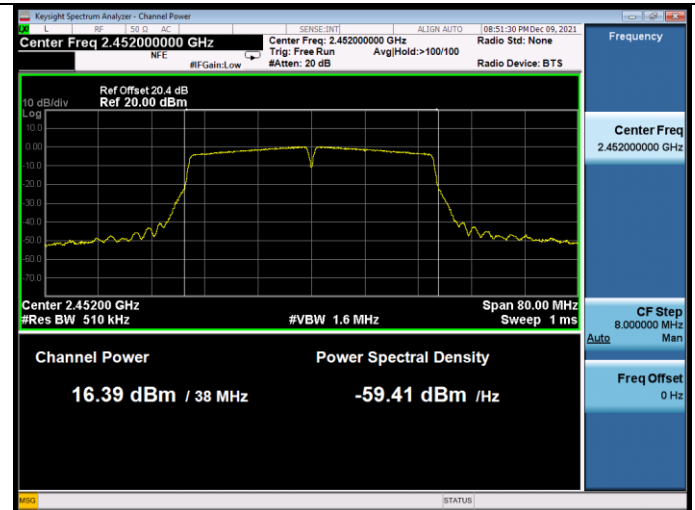




**ANTA:**

Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

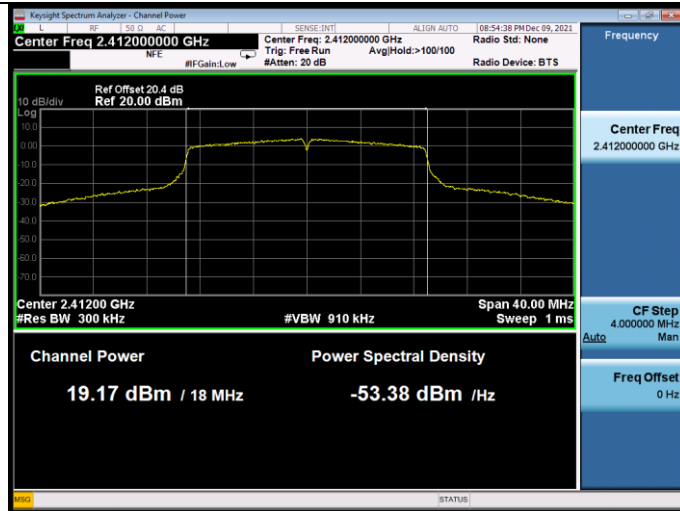


**ANTB:**


Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

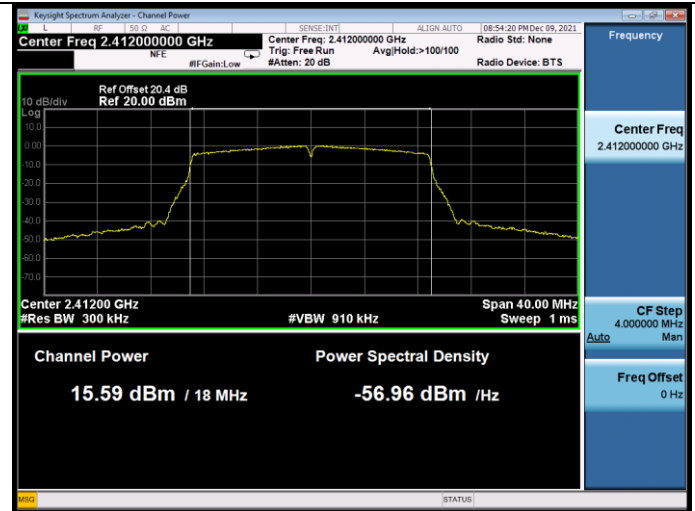


**Test CH6: 2437MHz**

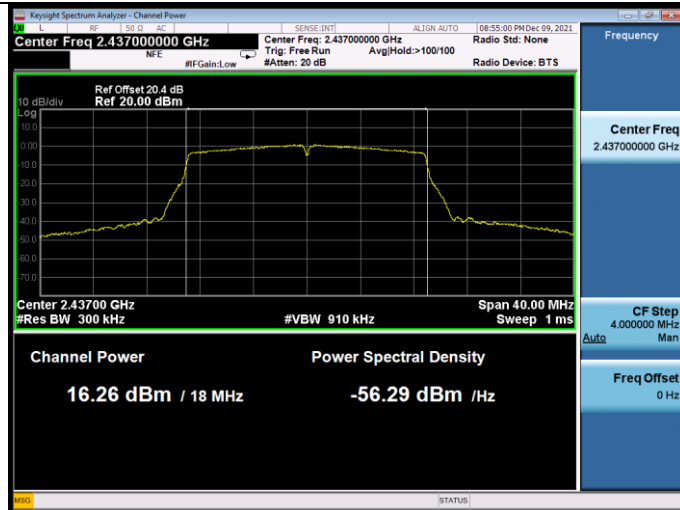


**Test CH6: 2437MHz**

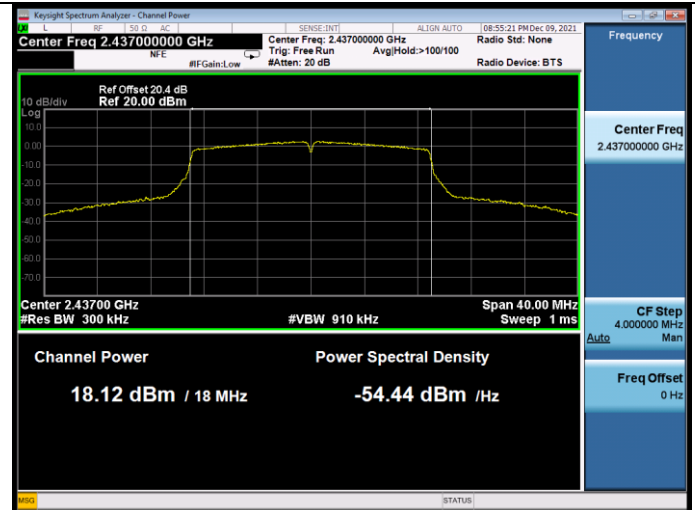

**Test CH11: 2462MHz**

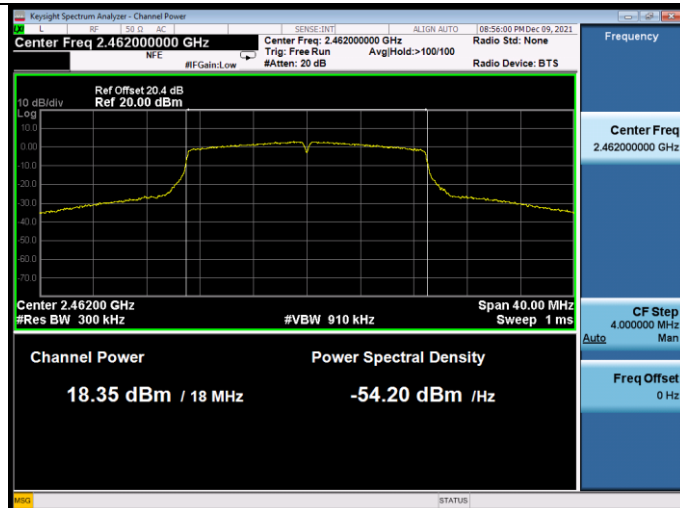


**Test CH11: 2462MHz**

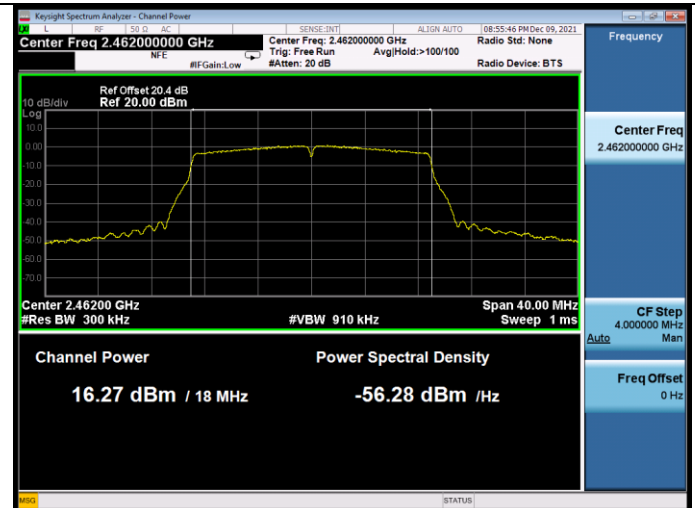


**ANTA:**

Test Mode: IEEE 802.11n HT40  
Test CH3: 2422MHz

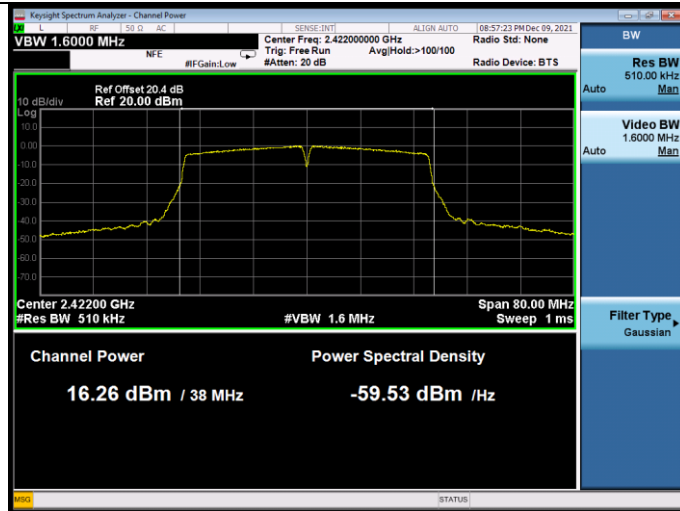


**ANTB:**


Test Mode: IEEE 802.11n HT40  
Test CH3: 2422MHz

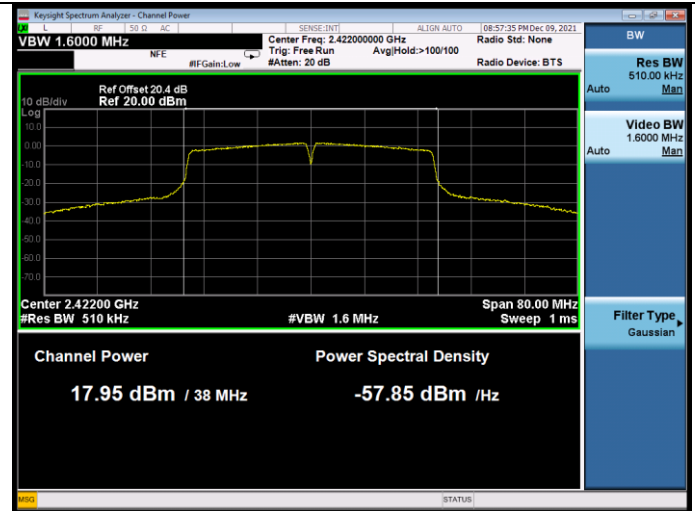


**Test CH6: 2437MHz**

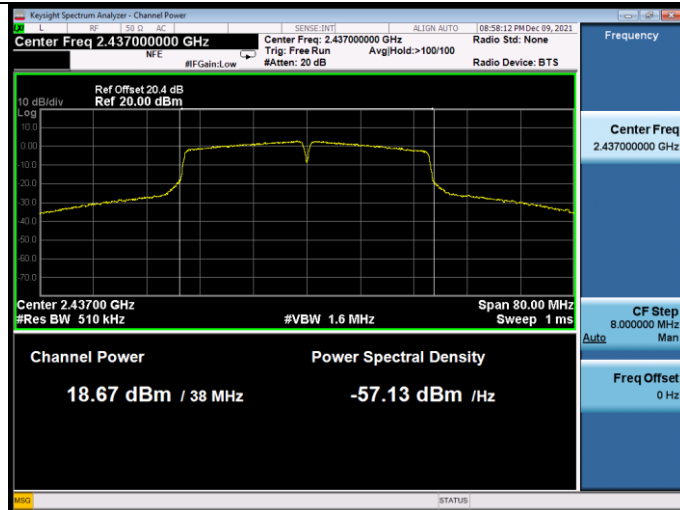

**Test CH6: 2437MHz**

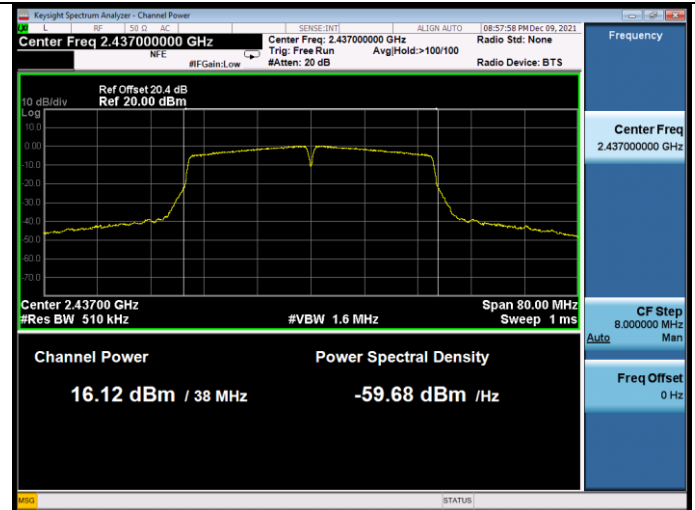

**Test CH9: 2452MHz**

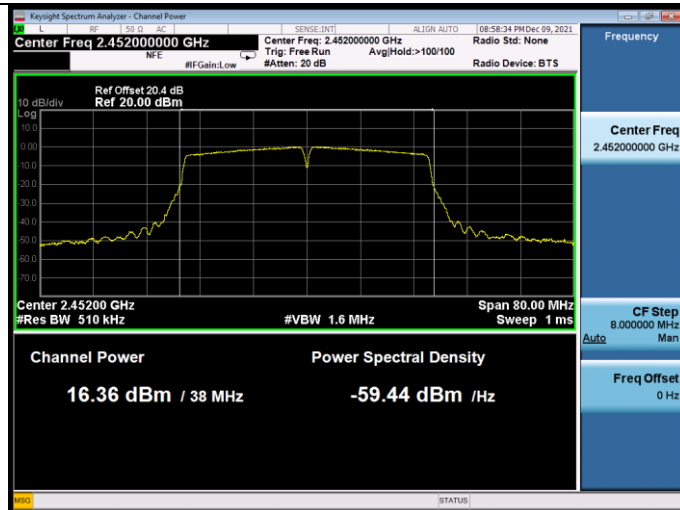

**Test CH9: 2452MHz**

