
FCC Test Report

Report No.: AGC00677191101FE02

FCC ID : 2AU3DGRAVITY6P
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Smartphone
BRAND NAME : MAXWEST, MTT, Vantec
MODEL NAME : Gravity 6P, Gravity_6P_Plus, L604, L604a, L604b, L604c,
L607, L607a, L607b, L607c, L661, G6, G8
APPLICANT : United Creation Technology Corp., Ltd
DATE OF ISSUE : Dec. 24, 2019
STANDARD(S) : FCC Part 22H & 24E Rules
REPORT VERSION : V1.0

Attestation of **Global Compliance (Shenzhen) Co., Ltd.**

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 24, 2019	Valid	Initial Release

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 TEST METHODOLOGY	8
2.4 TEST FACILITY	9
2.6 SPECIAL ACCESSORIES	11
2.7 EQUIPMENT MODIFICATIONS	11
3. SYSTEM TEST CONFIGURATION	12
3.1 EUT CONFIGURATION	12
3.2 EUT EXERCISE	12
3.3 CONFIGURATION OF EUT SYSTEM	12
4. SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	14
6. OUTPUT POWER	15
6.1 CONDUCTED OUTPUT POWER	15
6.2 RADIATED OUTPUT POWER	21
6.2.1 MEASUREMENT METHOD	21
6.2.2 PROVISIONS APPLICABLE	22
6.3. PEAK-TO-AVERAGE RATIO	25
6.3.1 MEASUREMENT METHOD	25
6.3.2 PROVISIONS APPLICABLE	25
6.3.3 MEASUREMENT RESULT	26
7. OCCUPIED BANDWIDTH	27
7.1 MEASUREMENT METHOD	27
7.2 PROVISIONS APPLICABLE	27
7.3 MEASUREMENT RESULT	28
8. BAND EDGE	34
8.1 MEASUREMENT METHOD	34
8.2 PROVISIONS APPLICABLE	34
8.3 MEASUREMENT RESULT	35
9. SPURIOUS EMISSION	38
9.1 CONDUCTED SPURIOUS EMISSION	38
9.2 RADIATED SPURIOUS EMISSION	52
9.2.2 TEST SETUP	53
10. FREQUENCY STABILITY	57
10.1 MEASUREMENT METHOD	57

10.2 PROVISIONS APPLICABLE 58
10.3 MEASUREMENT RESULT 59
APPENDIX A: PHOTOGRAPHS OF TEST SETUP 68

1. VERIFICATION OF COMPLIANCE

Applicant	United Creation Technology Corp.,Ltd
Address	Room 201, Block A, Science and Technology Buliding Phase-2,Nanhai Road 1057, Shekou, Nanshan District, Shenzhen
Manufacturer	United Creation Technology Corp.,Ltd
Address	Room 201, Block A, Science and Technology Buliding Phase-2, Nanhai Road 1057, Shekou, Nanshan District, Shenzhen
Factory	United Creation Technology Corp.,Ltd
Address	Room 201, Block A, Science and Technology Buliding Phase-2, Nanhai Road 1057, Shekou, Nanshan District, Shenzhen
Product Designation	Smartphone
Brand Name	MAXWEST, MTT, Vantec
Test Model	Gravity 6P
Series Model	Gravity_6P_Plus,L604, L604a,L604b,L604c, L607, L607a,L607b, L607c, L661,G6,G8
Model Description	All the same except for brand name and model name, the corresponding relationship are as follow: MAXWEST is corresponding Gravity 6P, Gravity_6P_Plus; MTT is corresponding L604, L604a,L604b,L604c, L607, L607a,L607b, L607c, L661; Vantec is corresponding G6, G8;
Date of test	Nov. 07, 2019 to Dec. 24, 2019
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E. The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jeast zhan

Jeast Zhan

(Project Engineer)

Dec. 24, 2019

Reviewed By

Max Zhang

MaxZhang

(Reviewer)

Dec. 24, 2019

Approved By

Forrest Lei

Forrest Lei

(Authorized Officer)

Dec. 24, 2019

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smartphone
Frequency Bands:	<input checked="" type="checkbox"/> GPRS 850 <input checked="" type="checkbox"/> PCS1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (Non-U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band IV <input checked="" type="checkbox"/> UMTS FDD Band V (U.S. Bands) <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII (Non-U.S. Bands)
Hardware Version	E64B_V2.0G
Software Version	Maxwest_Gravity_6P_GEN
Antenna Type	PIFA Antenna
Antenna gain	GSM850: 0.56dBi; PCS1900:0.79dBi; WCDMA850: 0.79dBi; WCDMA1900: 0.56dBi;
Power Supply:	DC 3.8V by Built-in Li-ion Battery
Battery parameter:	DC 3.8V 3300mAh
Dual Card:	GSM /WCDMA Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.23V to 4.35V (Normal: DC 3.8V)
Extreme Temp. Tolerance	-10°C to +40°C
<p>*** Note: 1. The High Voltage DC4.35V and Low Voltage DC3.23V were declared by manufacturer 2. The EUT couldn't be operating normally with higher or lower voltage.</p>	

*** **Note:**1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band Vonly these modes were used for all tests.
2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst caseas a representative.

GSM/WCDMA Slot 1:

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GSM 850	31.36	32.59
PCS 1900	27.99	28.20
UMTS BAND V	22.50	23.43
UMTS BAND II	20.36	22.39

GSM Slot 2:

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.33	32.56
PCS 1900	27.59	28.16
UMTS BAND V	21.44	22.56
UMTS BAND II	20.16	21.27

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:2AU3DGRAVITY6P**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

2.4 TEST FACILITY

TestSite	Attestation of Global Compliance(Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.12, 2019	Jun.11, 2020
LISN	R&S	ESH2-Z5	100086	Aug.26, 2019	Aug.25, 2020
TEST RECEIVER	R&S	ESCI	10096	Jun.12, 2019	Jun.11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.09, 2019	Sep.08, 2020
preamplifier	ChengYi	EMC184045SE	980508	Sep.23, 2019	Sep.22, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 01, 2018	Feb. 28, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.12, 2019	Jun.11, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.20, 2018	Sep.19, 2020
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep.09, 2019	Sep.08, 2020
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Sep.09, 2019	Sep.08, 2020
Universal Radio Communication Tester	R&S	CMU200	120237	Feb. 27, 2019	Feb. 26, 2020
Universal Radio Communication Tester	Agilent	8960	GB46200384	July 11,2019	July 10,2020
Power Splitter	Agilent	11636A	34	Jun.12, 2019	Jun.11, 2020
Attenuator	JFW	50FHC-006-50	N/A	Jun.12, 2019	Jun.11, 2020
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170		Mar. 01, 2018	Feb. 28, 2020

Horn Ant (18G-40GHz)	ETS	QWH_SL_18_4 0_K_SG		Mar. 01, 2018	Feb. 28, 2020
Power Splitter	Agilent	11636A	/	Sep.09, 2019	Sep.08, 2020
CMU200	R&S	120237	/	Feb. 27, 2019	Feb. 26, 2020
Artificial Mains Network ENV216	R&S	101242	/	July 11,2019	July 10,2020
Filter Bank Notch 1(880-915MHz)	MICRO-TRONICS	010	/	Feb. 27, 2019	Feb. 26, 2020
Filter Bank Notch2 (1710-1785MHz)	MICRO-TRONICS	009	/	Feb. 27, 2019	Feb. 26, 2020
Filter Bank Notch 3 (1920-1980MHz)	MICRO-TRONICS	008	/	Feb. 27, 2019	Feb. 26, 2020

2.6 SPECIAL ACCESSORIES

The battery was supplied by the applicant and was used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission’s requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

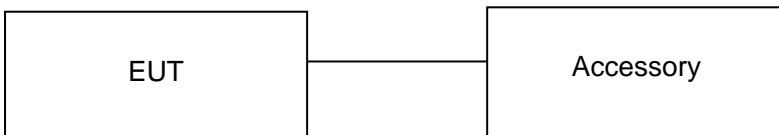


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Smartphone	Gravity 6P	FCC ID: 2AU3DGRAVITY6P	EUT
2	Adapter-1	LM601U-05120U01	DC 5.0V 1.2A	AE
3	Adapter-2	UT-236A-5150ZY	DC 5.0V 1.5A	AE
4	Battery	BP-60AT	DC 3.8V 3300mAh	AE
5	USB Cable	N/A	N/A	AE

***Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046	Pass
		Radiated Output Power	22.913(a) (2) / 24.232 (c)/ 27.50(d)(4)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1053/22.917(a)/24.238(a)/27.53(h)	Pass
5	Occupied Bandwidth		2.1049	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

*****Note:** GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

GSM 850:

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM 850	824.2	32.59	-9	23.59
	836.6	32.34	-9	23.34
	848.8	32.26	-9	23.26
GPRS 850 (1 Slot)	824.2	32.41	-9	23.41
	836.6	32.09	-9	23.09
	848.8	31.96	-9	22.96
GPRS 850 (2 Slot)	824.2	28.78	-6	22.78
	836.6	28.86	-6	22.86
	848.8	28.69	-6	22.69
GPRS 850 (3 Slot)	824.2	26.86	-4.26	22.60
	836.6	26.78	-4.26	22.52
	848.8	26.53	-4.26	22.27
GPRS 850 (4 Slot)	824.2	27.89	-3	24.89
	836.6	27.83	-3	24.83
	848.8	27.64	-3	24.64

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	25.37
	190	836.6	25.02
	251	848.8	24.78
EDGE (2 Slot)	128	824.2	23.53
	190	836.6	23.67
	251	848.8	23.55
EDGE (3 Slot)	128	824.2	22.22
	190	836.6	22.55
	251	848.8	22.67
EDGE (4 Slot)	128	824.2	22.57
	190	836.6	22.29
	251	848.8	22.59

PCS 1900:

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	26.75	-9	17.75
	1880	28.09	-9	19.09
	1909.8	28.20	-9	19.2
GPRS1900 (1 Slot)	1850.2	26.76	-9	17.76
	1880	28.07	-9	19.07
	1909.8	25.56	-6	19.56
GPRS 1900 (2 Slot)	1850.2	25.75	-6	19.75
	1880	25.61	-6	19.61
	1909.8	24.52	-4.26	20.26
GPRS 1900 (3 Slot)	1850.2	24.45	-4.26	20.19
	1880	24.32	-4.26	20.06
	1909.8	23.29	-3	20.29
GPRS 1900 (4 Slot)	1850.2	23.21	-3	20.21
	1880	23.20	-3	20.20
	1909.8	25.56	-6	19.56

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	22.66
	661	1880	24.56
	810	1909.8	23.75
EDGE (2 Slot)	512	1850.2	23.58
	661	1880	23.43
	810	1909.8	23.35
EDGE (3 Slot)	512	1850.2	23.22
	661	1880	23.65
	810	1909.8	23.52
EDGE (4 Slot)	512	1850.2	20.76
	661	1880	20.56
	810	1909.8	20.69

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA 850 RMC	826.4	24	23.21
	836.4	24	23.24
	846.6	24	23.43
WCDMA850 AMR	826.4	24	22.95
	836.4	24	23.06
	846.6	24	23.10
HSDPA Subtest 1	826.4	24	22.46
	836.4	24	22.53
	846.6	24	22.71
HSDPA Subtest 2	826.4	24	21.96
	836.4	24	22.01
	846.6	24	22.17
HSDPA Subtest 3	826.4	24	21.54
	836.4	24	21.65
	846.6	24	21.81
HSDPA Subtest 4	826.4	24	21.44
	836.4	24	21.52
	846.6	24	21.67
HSUPA Subtest 1	826.4	24	20.36
	836.4	24	21.12
	846.6	24	21.38
HSUPA Subtest 2	826.4	24	20.89
	836.4	24	20.64
	846.6	24	20.95
HSUPA Subtest 3	826.4	24	21.16
	836.4	24	21.10
	846.6	24	21.37
HSUPA Subtest 4	826.4	24	20.52
	836.4	24	20.54
	846.6	24	20.71
HSUPA Subtest 5	826.4	24	22.91
	836.4	24	21.69
	846.6	24	21.99

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA 1900 RMC	1852.4	24	21.93
	1880	24	21.87
	1907.6	24	21.97
WCDMA1900 AMR	1852.4	24	21.81
	1880	24	21.72
	1907.6	24	21.86
HSDPA Subtest 1	1852.4	24	22.39
	1880	24	22.22
	1907.6	24	22.22
HSDPA Subtest 2	1852.4	24	21.84
	1880	24	21.61
	1907.6	24	21.58
HSDPA Subtest 3	1852.4	24	21.93
	1880	24	21.73
	1907.6	24	21.71
HSDPA Subtest 4	1852.4	24	21.61
	1880	24	21.39
	1907.6	24	21.38
HSUPA Subtest 1	1852.4	24	19.60
	1880	24	22.22
	1907.6	24	20.04
HSUPA Subtest 2	1852.4	24	20.34
	1880	24	20.17
	1907.6	24	19.96
HSUPA Subtest 3	1852.4	24	20.49
	1880	24	22.19
	1907.6	24	20.27
HSUPA Subtest 4	1852.4	24	20.48
	1880	24	20.41
	1907.6	24	21.99
HSUPA Subtest 5	1852.4	24	20.81
	1880	24	20.92
	1907.6	24	20.50

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ dBi} \dots$

6.2.2 PROVISIONS APPLICABLE

Mode	FCC Part Section(s)	Nominal Peak Power
GSM/GPRS 850	22.913(a)(2)	$\leq 38.45\text{dBm}$ (7W). ERP
GSM/GPRS 1900	24.232(c)	$\leq 33\text{dBm}$ (2W). EIRP
UMTS BAND II	24.232(c)	$\leq 33\text{dBm}$ (2W).EIRP
UMTS BANDV	22.913(a)(2)	$\leq 38.45\text{dBm}$ (7W).ERP

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM/GPRS 850				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	31.23	Horizontal	Pass
	836.6	31.25	Horizontal	Pass
	848.8	31.36	Horizontal	Pass
	824.2	30.02	Vertical	Pass
	836.6	30.07	Vertical	Pass
	848.8	30.11	Vertical	Pass

Radiated Power (E.I.R.P) for GSM/GPRS 1900				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	27.99	Horizontal	Pass
	1880.0	27.62	Horizontal	Pass
	1909.8	27.34	Horizontal	Pass
	1850.2	26.20	Vertical	Pass
	1880.0	26.28	Vertical	Pass
	1909.8	26.24	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
UMTS	1852.4	20.52	Horizontal	Pass
	1880	20.63	Horizontal	Pass
	1907.6	20.18	Horizontal	Pass
	1852.4	19.86	Vertical	Pass
	1880	19.67	Vertical	Pass
	1907.6	19.73	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
UMTS	826.4	22.27	Horizontal	Pass
	836.4	22.50	Horizontal	Pass
	846.6	22.18	Horizontal	Pass
	826.4	21.25	Vertical	Pass
	836.4	21.39	Vertical	Pass
	846.6	21.43	Vertical	Pass

Note: Above is the worst mode data.

6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	2.62	2.62	2.62

Modes	PCS1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	2.62	2.62	2.63

Modes	UMTS BAND II		
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	3.14	3.10	2.97

Modes	UMTS BAND V		
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	3.00	3.15	3.01

7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
2. RBW=1~5% of the expected OBW, VBW \geq 3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

7.3 MEASUREMENT RESULT

Test Results


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM 850	GSM	LCH	247.8	311	PASS
		MCH	246.4	310	PASS
		HCH	247.1	312	PASS
	EGPRS	LCH	257.4	317	PASS
		MCH	256.7	328	PASS
		HCH	243.3	313	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
PCS 1900	GSM	LCH	246.8	315	PASS
		MCH	242.4	311	PASS
		HCH	247.1	320	PASS
	EGPRS	LCH	249.1	308	PASS
		MCH	246.8	306	PASS
		HCH	243.8	303	PASS


For GSM

Test Band=GSM 850/PCS1900


Test Mode= GSM/EGPRS

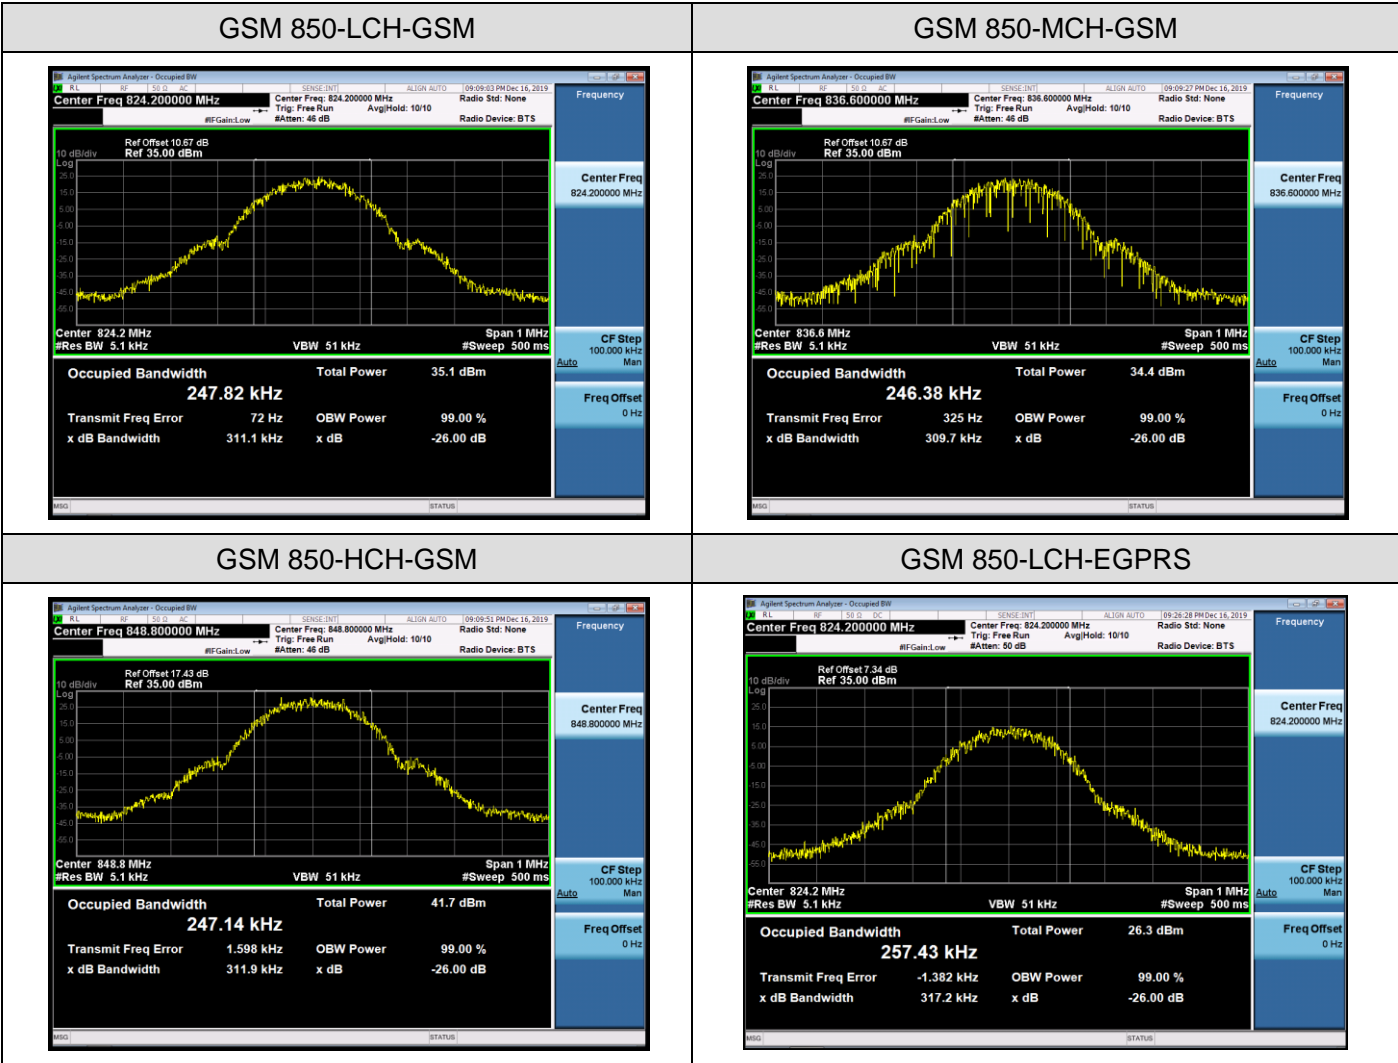


GSM 850-MCH- EGPRS

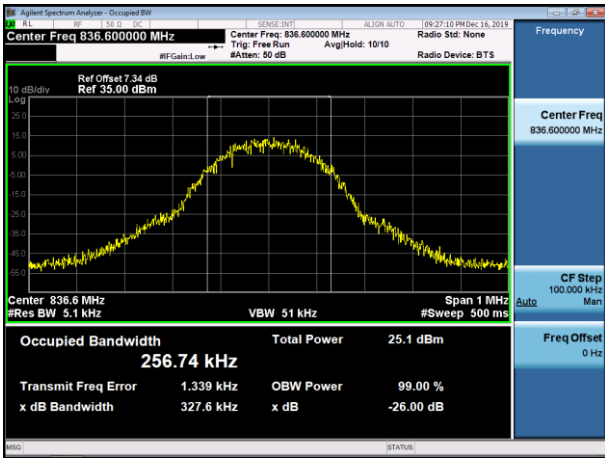


GSM 850-HCH- EGPRS

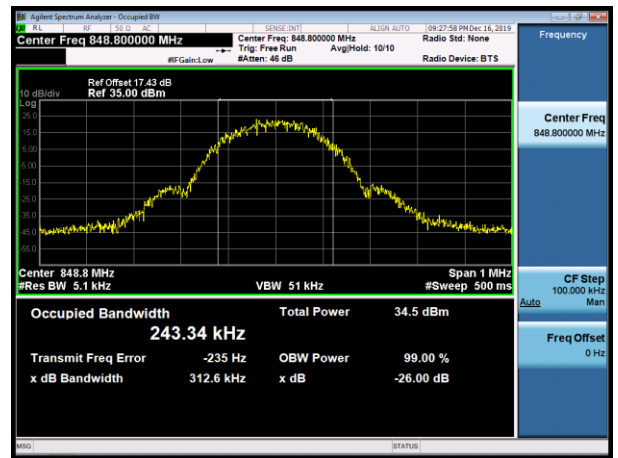


GSM 1900-LCH-GSM

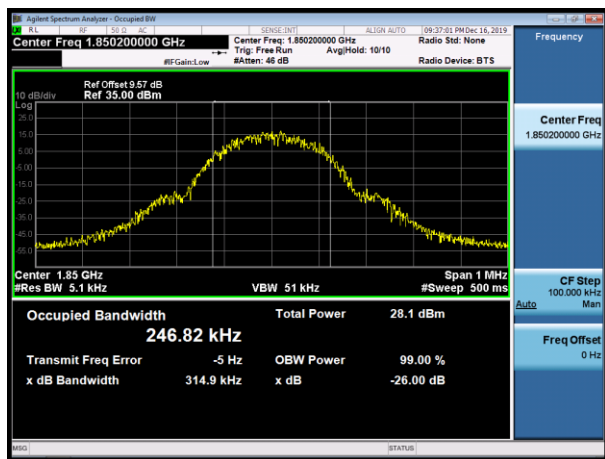


GSM 1900-MCH-GSM

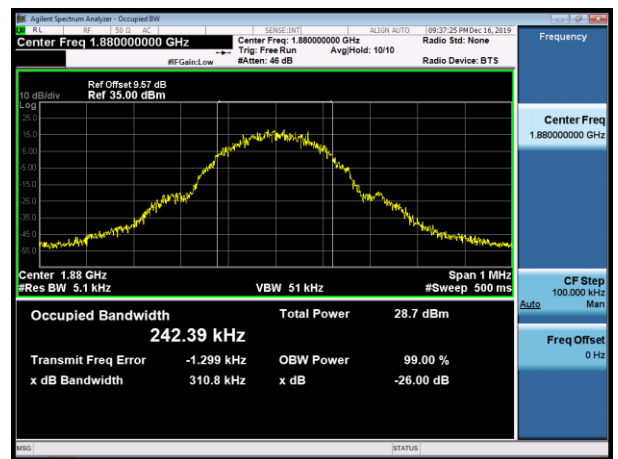

GSM 1900-HCH-GSM


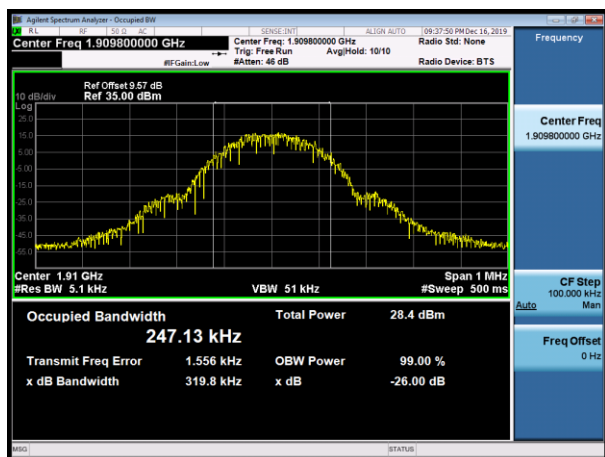


GSM 1900-LCH-EGPRS

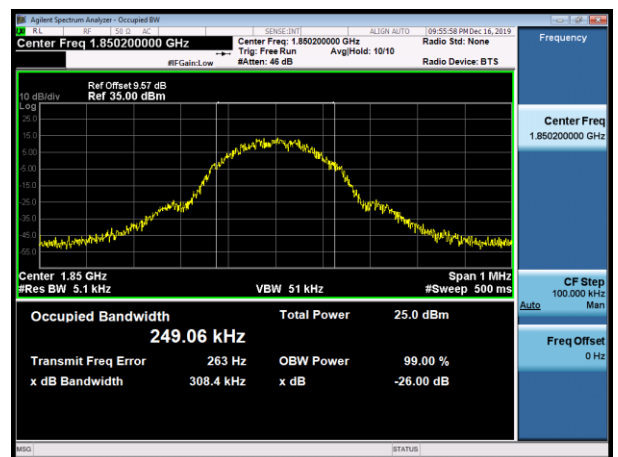

GSM 1900-MCH- EGPRS

GSM 1900-HCH- EGPRS

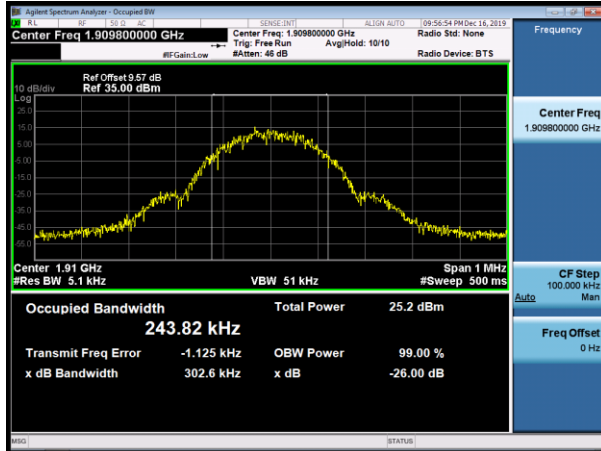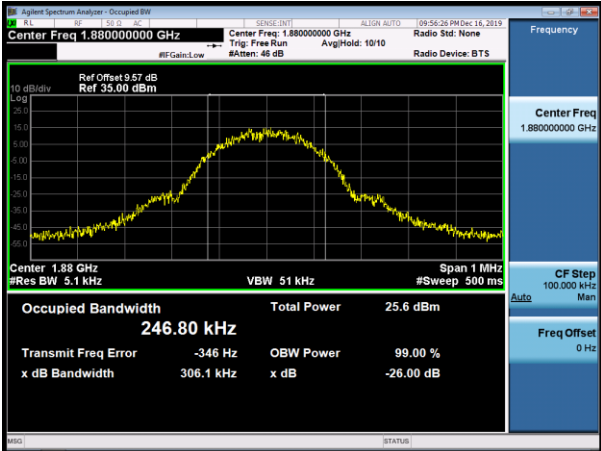


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4146.4	4662	PASS
		MCH	4148.8	4675	PASS
		HCH	4148.6	4669	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4159.0	4698	PASS
		MCH	4153.7	4689	PASS
		HCH	4176.4	4702	PASS

For WCDMA



Test Band=WCDMA850/WCDMA1900

Test Mode=UMTS

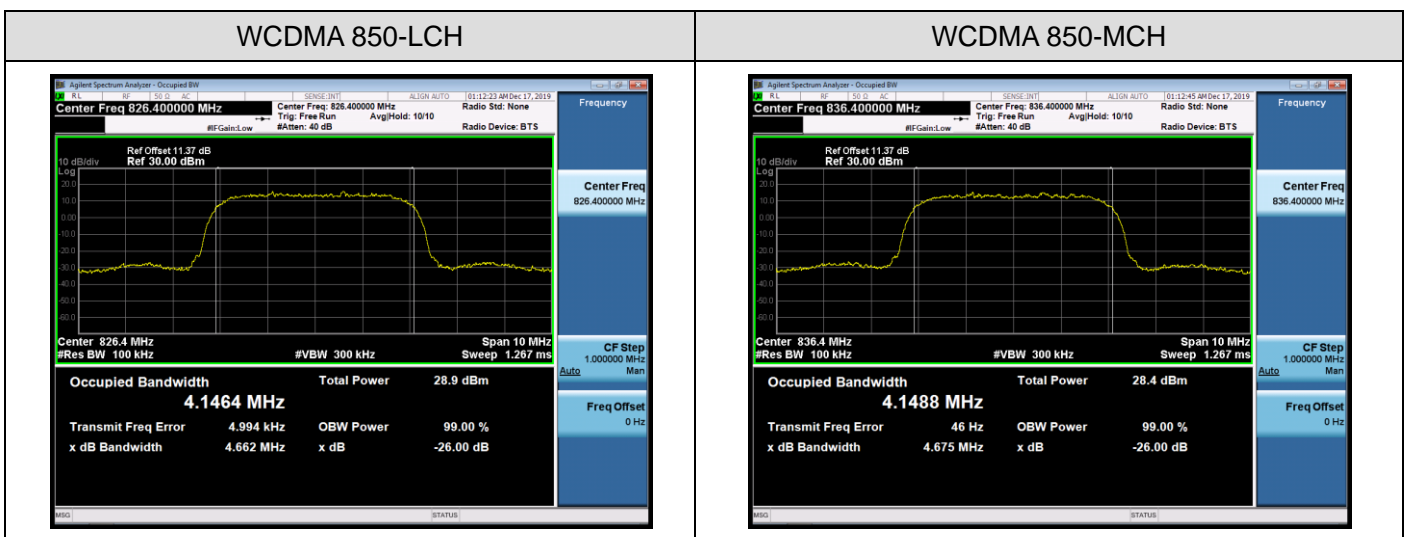



WCDMA 850-HCH

WCDMA 1900-LCH

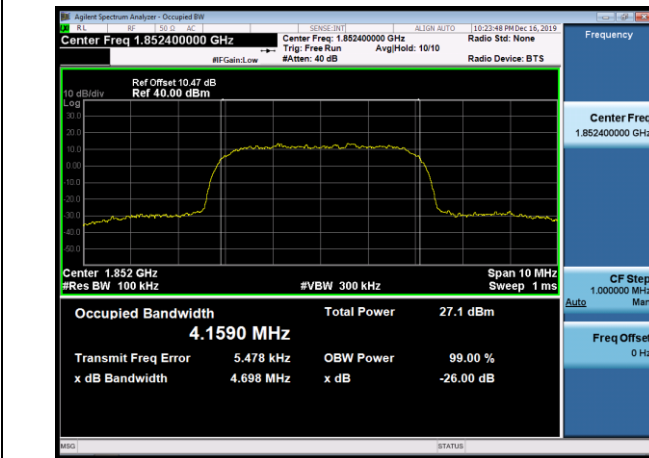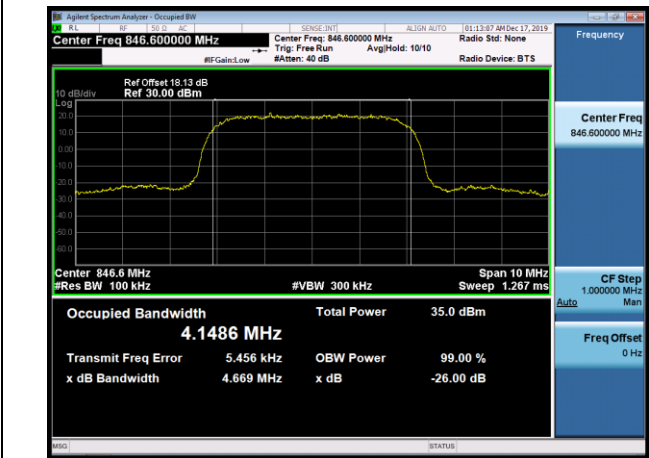

WCDMA 1900-MCH

WCDMA 1900-HCH

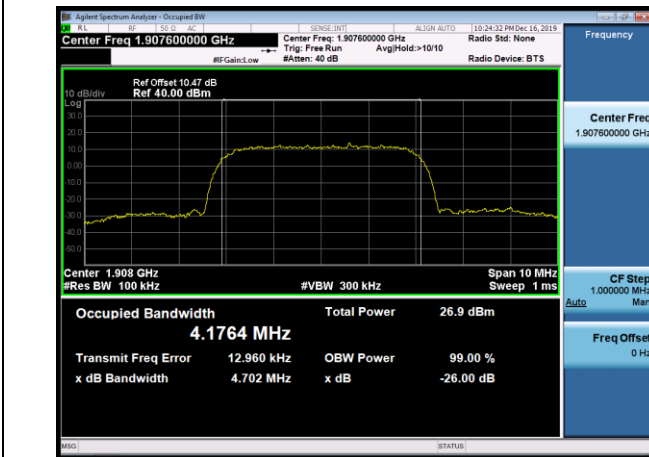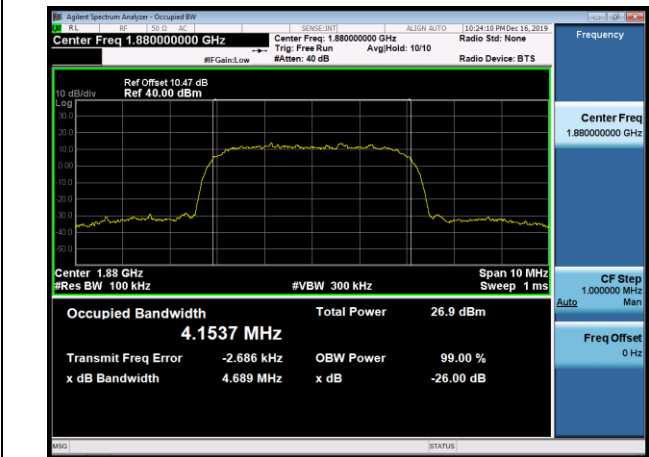

8. BAND EDGE

8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW>1% of the emission bandwidth, VBW $\geq 3 \times$ RBW, Detector=RMS, Number of points $\geq 2 \times$ Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) 、 24.238(a)and KDB 971168 D1 V03R01.

8.3 MEASUREMENT RESULT


Test Results

For GSM


Test Band=GSM 850/PCS 1900

Test Mode=GSM/EGPRS


GSM 850-LCH-GSM

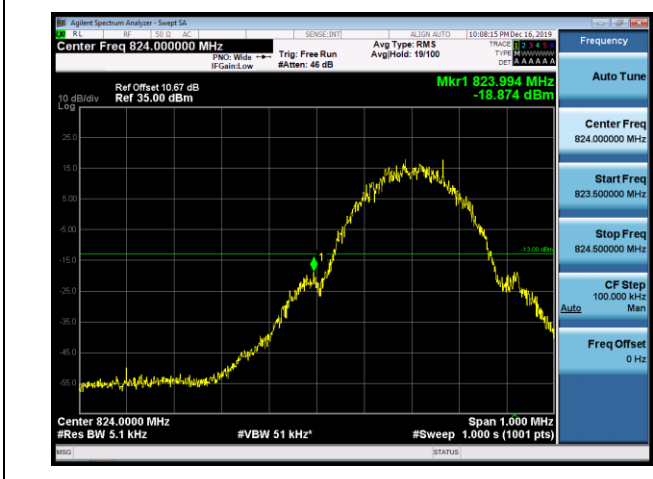


GSM 850-HCH-GSM

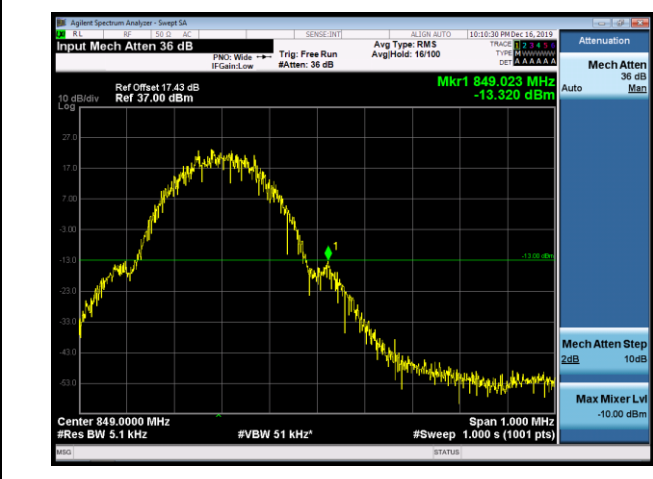


GSM 850-LCH-EDGE

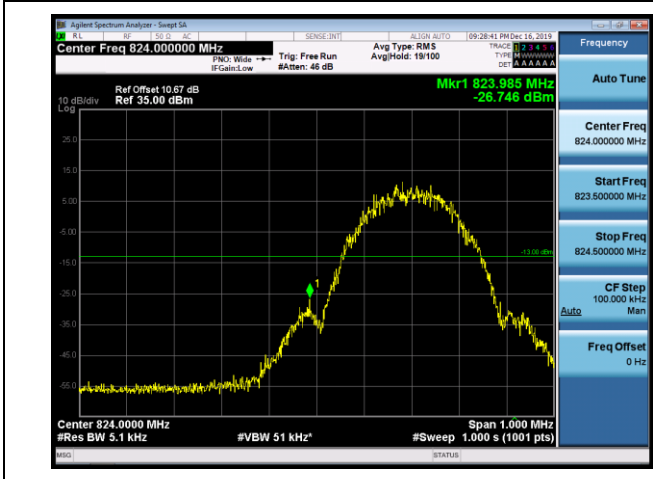


GSM 850-HCH-EDGE

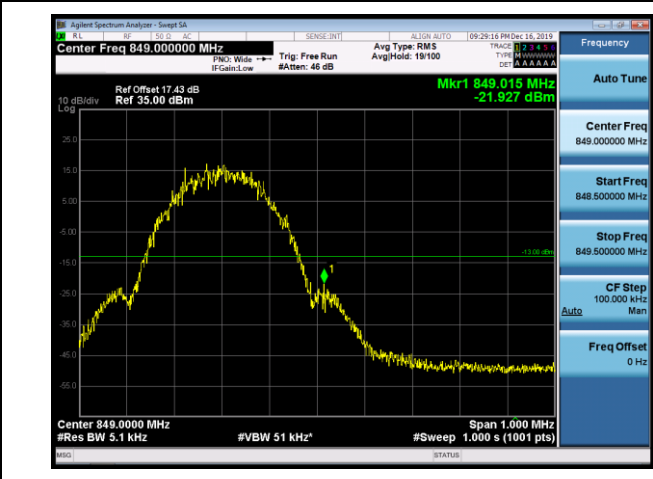


PCS 1900-LCH-GSM

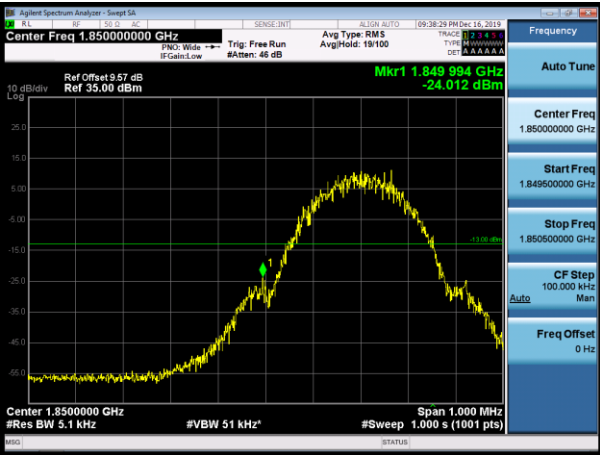


PCS 1900-HCH-GSM

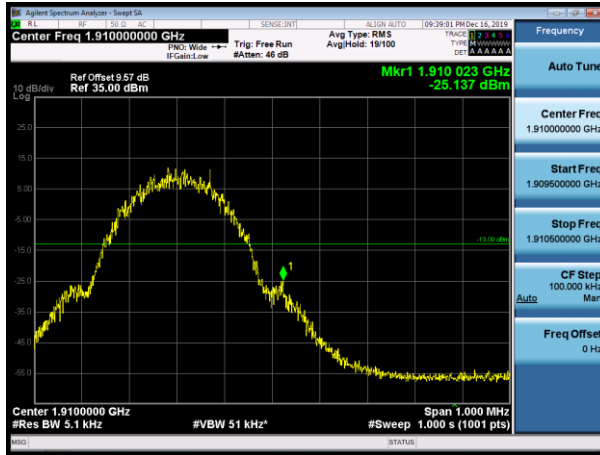

PCS 1900-LCH-EDGE

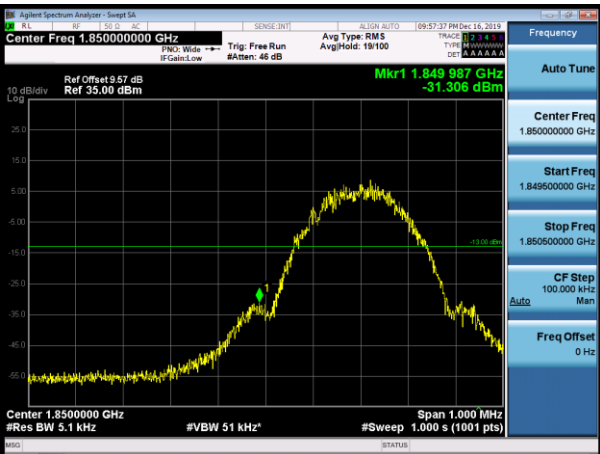

PCS 1900-HCH-EDGE

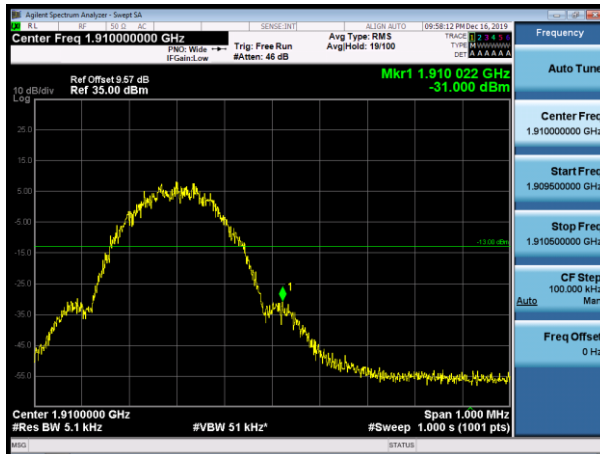


For WCDMA
 Test Band=WCDMA850/WCDMA1900
 Test Mode=UMTS


WCDMA 850-LCH




WCDMA 850-HCH

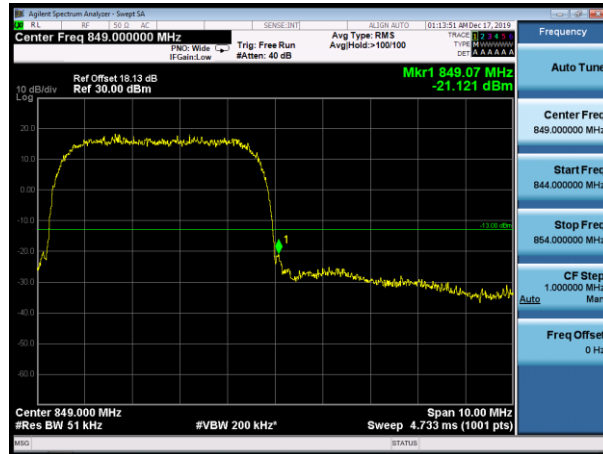

WCDMA 1900-LCH

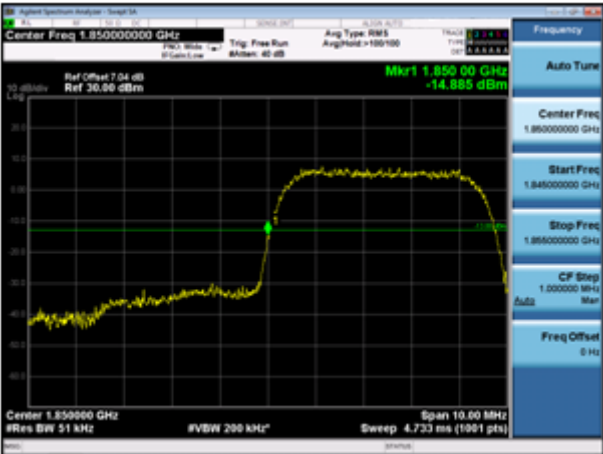

WCDMA 1900-HCH

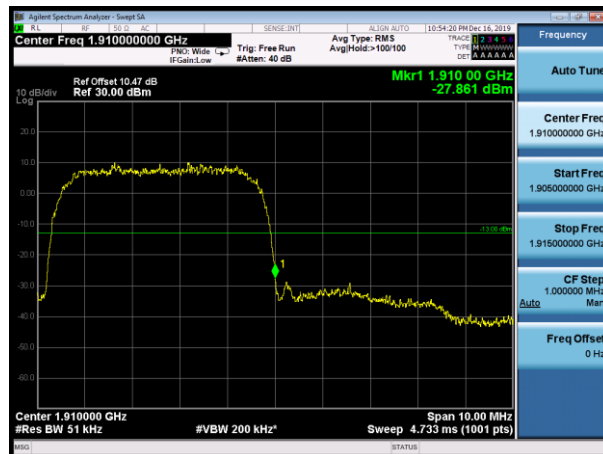

9. SPURIOUS EMISSION

9.1 CONDUCTED SPURIOUS EMISSION

9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.
2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880
9538	1907.6

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4182	836.4
4233	846.6

9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\text{Log}(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.