

# Instruction Manual

## 1. Product introduction

### 1) Features:

◆ Time, date, temperature, can automatically switch display, you can also manually lock the display time, temperature.

◆ Support wireless charging

◆ Working voltage: DC 5V/2A

◆ Perpetual calendar from 2000 to 2099, a total of 100 years.

◆ 12/24 hours: 12/24 hour conversion is possible, default 24-hour system, January 1, 2016, 12:00

◆ Three groups of alarms, each group is 1 minute long

◆ The voice switch is freely adjustable (press the Down button)

### 2) General product configuration

Tips: When you open the product packaging, please check if there are the following accessories in the box:

◆ One digital clock

◆ One instruction manual

◆ 2A USB cable

## 2. Main technical parameters of the product

◆ This product is directly equipped with power adapter, INPUT: AC100-240V-50/60HZ, OUTPUT: 5V-2000MA

◆ Wireless charging: power 5W, output voltage 5V, charging current 600-750MA

◆ Bluetooth speaker:

Version: Bluetooth V4.1

Wireless transmission distance: more than 10 meters

Transmission power: CLASS 3, 0dbm

Sensitivity: -80dBm<0.1%BER

Frequency range: 2.402GHz-2.480GHz

Audio performance SBC decoding

Audio signal to noise ratio:  $\geq 75$ dB

Speaker impedance 4 ohms

Speaker power 3W\*2

## 3. Display and button introduction

### 1) Display function description


#### Time/Temperature



Alarm 1 on



Alarm 3 off



#### Afternoon indicate




Working day on



Working day off



#### Date




Sound control on



Sound control off



## 2) Button introduction

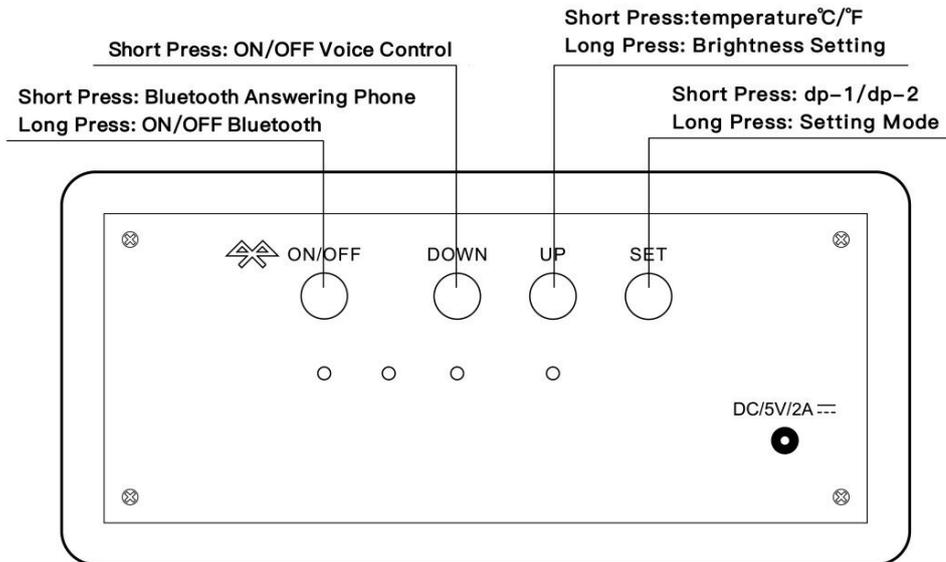

## Other introductions:

### 1. Display mode:

There are two display modes, press the button “SET”, you could change the mode of display;  
Dp-1: time, temperature and year, month and day display would change orderly (Carousel mode)  
Dp-2: only time, temperature display (Fixed mode)

### 2. Voice Mode (power-saving mode):

Press the button “DOWN”, on: Sd”←→”--:Sd”;

“on: Sd” means sound control in on;

“--: SD” means sound control is off.

It will automatically close the voice mode in seconds; Display will be woke up when the sound is louder than 60 decibels or flapping the clock. If close the voice control mode, constant light function will be opened.

### 3. Temperature Mode Setting:

Press the button of “UP”, you could change the Temperature Mode between °C and °F

### 4. Brightness Setting:

Press the button of “UP” for 3 seconds, you could enter into the mode of brightness, then you could change the brightness through pressing the button of “UP” (more bright) and pressing the button of “DOWN”(less bright).

L1: Bright

L2: Less Bright

L3: Weakest brightness

### 5. Power supply:

It must use plugged-in power supply when charging the phone.

(The clock with built-in cell battery, it will automatically remember the time when the power is off, we don't need to reset the time);

### 6. Alarm Setting:

User can set 3 alarm times every day, alarm lasting 1 minute, the sound is: beep beep beep, can press any key on the back of clock to stop the alarm;

# SETTING INSTRUCTION

Press the button “SET” (While the numbers flashing), you would enter into the setting mode. And the setting order are as follows:

## 1. Setting of Date

When entering the set mode, the letter flashing setting order “Year” “Month” “Day”, press button “UP” or “DOWN” to change the number.

## 2. 12H/24H Setting

After finishing the setting of date, you would enter into the 12H/24H Setting mode while you press “SET”, and also you could change the 12H/24H through pressing the “UP” and “DOWN”. At the 12H Setting mode, PM lights on.

## 3. Time Setting

After finishing the date setting mode, you could enter into the time mode setting while you need to press “SET” and then you could adjust the time through pressing “UP” and “DOWN”.

## 4. Alarm Setting

After finishing the time mode setting, you could enter into the alarm setting while you need to continue press “SET”, and then you could adjust the time through pressing “UP” and “DOWN”.

Press “UP” and “DOWN” can adjust upward or downward too pen on A1/Close -: A1. When the letter “on : A1” appears, you could press “SET” and enter into A1 Alarm clock Setting (you could set 3 Alarm clock A1/A2/A3 ). Then the letter of time “--” flashing, you continue to press “UP” and “DOWN” to set alarm .

You could continue set the Alarm clock A2/A3 follow the step 1 and step 2.

## 5. Alarm Setting For Work Day

After finishing the alarm setting, Press the key “SET”. Then you could press “UP” and “DOWN” to change the status of on/off workday alarm. (on: E means on; -:E means off.)

◆ ON/OFF button: Press and hold the ON/OFF switch Bluetooth in any mode to search for WOODSHOW SPEAKER connection. In Bluetooth mode, press this button to answer the call and pause playback.

Wireless charging method: top wireless charging, mobile phone with wireless charging function, or mobile phone without this function plug in the receiving piece, the receiving part is placed in the middle of the product to be charged, whether the charging is successful to see the mobile phone prompt. Automatically disconnects the charge when fully charged.

## FCC COMPLIANCE STATEMENTS

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

**Caution:** changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

## Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.

This device must not be co-located for operating in conjunction with any other antenna or transmitter.

The distance between user and products should be no less than 20cm.