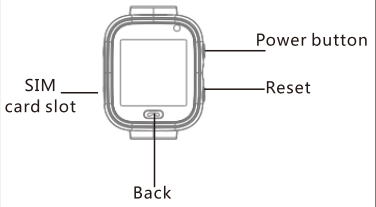


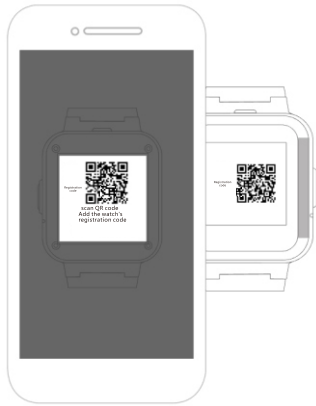


# 英文爱说明书(侧插)尺寸75X50mm

<p><b>Children's smart watch Quick Start Guide</b></p> <p>Please read the instruction manual carefully before you use it so that the correct installation and quick use can be made.</p> <p>Please refer to the real product for product colors.</p> <p><b>1. Preparation before using</b></p> <p>(1)Check all the accessories if they are complete and the device model is correct.</p> <p>(2)Choose the SIM card which match to the GSM network, you can refer to opinions of the dealer.(Power off before you insert the SIM card)</p> <p>(3)The SIM card need to open the GPRS function and call screening function.</p> <p>(4)Install the APP on the phone,you can ask the dealer if you don't know how to download it.</p>	<p><b>2. Install SIM card</b></p> <p>Please select the 2G SIM card of the GSM network, This card needs to open display caller ID, GPRS data traffic Internet access function, call function.</p> <p>Note: this watch can only support 2G data flow. Install your Sim card in turn off state then turn on the watch, in case of damage the SIM card. Install the APP on the phone,you can ask the dealer if you don't know how to download it.</p> <p><b>3.Turn On/ Turn off</b></p> <p>Turn on: hold press the power button if the watch was turned off.</p> <p>Turn off: Only can remote turn off the watch when the watch is in normal working state. If the SIM card isn't installed or don't connect with APP, you can hold press the power button to turn off.</p> <p>Note: please don't directly remove the SIM card under working mode in case of damage your SIM card.</p>	<p><b>4.Watch introduction</b></p>  <p><b>5.Download APP</b></p> <p>5.1Scan QR code to download APP "Setraker"</p> <p>It can be searched in the APP download interface in the watch</p>	 <p><b>5.2Register and Login</b></p> <p>Register a account and login according to instruction from the APP.</p>  <p>Fill in related information to register account</p> <p>After registered, login in</p>
<p><b>5.3 APP account bind with watch</b></p> <p>Bind with the watch after registered successfully. Scan or input 15 bytes register code. The register code can be found on App download interface in the watch. Then enter the Bind setting.</p> 	<p><b>6.Function introduction</b></p> <p><b>LBS location:</b> check the real time position on APP map</p> <p>Weather forecast: update weather information automatically</p> <p><b>Voice chat:</b> take voice chat between watch and APP</p> <p><b>Footprint:</b> check the historic trajectory</p> <p><b>Safety Zone:</b> set 3 Geo fences. There will be an alarm notice when the watch leaves the fence.</p> <p><b>Alarm clock:</b> 3 alarm clocks can be set.</p> <p><b>Phone book:</b> 10 numbers can be set into the watch. Can make calls to each other</p> <p><b>SOS:</b> Set 3 emergency numbers</p> <p><b>Remote monitor:</b> set in the APP, the watch will dial the set number(generally set parents' number), The mobile phone can realize one-way listening to the watch</p> <p><b>Anti-Disturb period:</b> In the 3 periods, no calls in.(Except for the weekend)</p> <p><b>SMS Alerts setting:</b> set SMS alarm</p>	<p>switch for low power,and SOS . The number set in the APP receiving the SMS, the cost is same with normal SMS, this number is also the monitoring number by default</p> <p><b>Family member:</b> display all family members whom bind with the watch.</p> <p><b>Switch setting:</b> switch some functions</p> <p>Work mode:3 work modes optional, default normal mode.</p> <p><b>Remote turn off:</b> The watch can't be turned off by hold press the button when it's working, it can only be remote turned off.</p> <p><b>7.Trouble shooting</b></p> <p>If the watch can not connect with the server at the first use, and the device shows no networking, please check as following:</p> <p>1). Please check to see if the watch SIM card is GSM</p> <p>2)Check if you have put the SIM card correct, and the screen display is normal. Whether the Sim card open data flow and compatible with 2g. it can only support 2g data flow at present.</p>	<p>3). Please check to see if the IP ,Port and ID number is correct, you must make sure that the ID number pasted on the watch is the same as the ID number of the device itself. The user can check the ID number of the device itself by sending the message "pw, 123456, ts#" from your cellphone to the watch (The watch must have a SIM card inserted and powered on). Please ask the distributor for help if still any problems</p> <p>4). There are two situations if you can not register on the APP.</p> <p>a. The ID number do not exist or have already been registered, please contact the distributor for help.</p> <p>b. Your register account name have already been registered, please change to another new account name</p> <p>This manual is for reference only, the right to interpret belongs to our company.</p>

## FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

## SAR Information Statement

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radiofrequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limits set by the FCC are 1.6 W/kg for Head and 4.0 W/kg for Extremity. \* Tests for SAR are conducted with the smart watch phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the smart watch while operating can be well below the maximum value. This is because the smart watch phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a smart watch phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model smart watch phone when tested for use at next to mouth is **1.184 W/Kg** and when worn on wrist, as described in this user guide, is **1.683 W/Kg**(wrist-worn mode measurements differ among phone models, depending upon available accessories and FCC requirements). While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement for safe exposure. The FCC has granted an Equipment Authorization for this model smart watch phone with all reported SAR levels evaluated as in compliance with the FCC RFexposure guidelines. SAR information on this model smart watch phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on

FCC ID: **2AUBCSW28** Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) web-site at <http://www.wow-com.com>. \* In the United States and Canada, the SAR limit for smart watch phones used by the public are 1.6 watts/kg (W/kg) for head and averaged over one gram of tissue and 4.0 watts/kg (W/kg) for extremity averaged over ten gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements.

### Next to mouth and Wrist-worn mode Operation

This device was tested for typical next to mouth and wrist-worn operations. To comply with RF exposure requirements, for next to mouth mode, a minimum separation distance of **10mm** must be maintained between the user's head and the handset, including the antenna, for wrist-worn mode, a minimum separation distance of **0mm** must be maintained between the user's wrist and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.