

# FCC RF Test Report

APPLICANT : vivo Mobile Communication Co., Ltd.  
EQUIPMENT : Mobile Phone  
BRAND NAME : vivo  
MODEL NAME : V2349  
FCC ID : 2AUCY-V2349  
STANDARD : 47 CFR Part 2, Part 27 Subpart Q  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Jan. 06, 2024 ~ Jan. 19, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 5
1.5 Modification of EUT ..... 6
1.6 Maximum EIRP Power and Emission Designator ..... 6
1.7 Testing Site ..... 8
1.8 Test Software ..... 8
1.9 Applied Standards ..... 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10
2.1 Test Mode ..... 10
2.2 Connection Diagram of Test System ..... 11
2.3 Support Unit used in test configuration and system ..... 11
2.4 Measurement Results Explanation Example ..... 11
2.5 Frequency List of Low/Middle/High Channels ..... 12
3 CONDUCTED TEST ITEMS ..... 13
3.1 Measuring Instruments ..... 13
3.2 Test Setup ..... 13
3.3 Test Result of Conducted Test ..... 13
3.4 Conducted Output Power Measurement ..... 14
3.5 Peak-to-Average Ratio ..... 15
3.6 EIRP ..... 16
3.7 Occupied Bandwidth ..... 17
3.8 Conducted Band Edge Measurement ..... 18
3.9 Conducted Spurious Emission Measurement ..... 19
3.10 Frequency Stability Measurement ..... 20
4 RADIATED TEST ITEMS ..... 21
4.1 Measuring Instruments ..... 21
4.2 Test Setup ..... 21
4.3 Test Result of Radiated Test ..... 22
4.4 Radiated Spurious Emission Measurement ..... 23
5 LIST OF MEASURING EQUIPMENT ..... 24
6 MEASUREMENT UNCERTAINTY ..... 25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3D0709G	Rev. 01	Initial issue of report	Feb. 05, 2024

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 31.34 dB at 10336 MHz

<b>Conformity Assessment Condition:</b>	
1.	The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2.	The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
<b>Disclaimer:</b>	
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.	

# 1 General Description

## 1.1 Applicant

vivo Mobile Communication Co., Ltd.  
 No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

## 1.2 Manufacturer

vivo Mobile Communication Co., Ltd.  
 No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	vivo
Model Name	V2349
FCC ID	2AUCY-V2349
IMEI Code	Conducted : 866829079997636/866829079997628 Radiation : 865264079978645/865264079978652
HW Version	MP_0.1
SW Version	PD2341EF_EX_A_14.0.6.16.W30
EUT Stage	Identical Prototype

## 1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n77/n78: 10 / 15 / 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<b>&lt;Ant. 11&gt;</b> 5G NR n77: 0.95 dBi 5G NR n78: 0.95 dBi <b>&lt;Ant. 12&gt;</b> 5G NR n77: -2.39 dBi 5G NR n78: -2.39 dBi <b>&lt;Ant. 21&gt;</b> 5G NR n77: -1.10 dBi 5G NR n78: -1.10 dBi <b>&lt;Ant. 23&gt;</b> 5G NR n77: 1.86 dBi 5G NR n78: 1.86 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

**Remark:**

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Antenna 11 for 5G NR n77/n78 is shown in the report.
2. 5G NR n77/n78 support SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode, and 5G NR n78 covers n77.
3. The device supports HPUE mode for 5G NR n78.
4. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum EIRP Power and Emission Designator

5G NR n77 SA		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.2805	8M59G7D	0.2350	8M59W7D
15	3457.50 ~ 3542.49	0.2729	13M6G7D	0.2296	13M6W7D
20	3460.02 ~ 3540.00	0.2692	18M2G7D	0.2323	18M2W7D
30	3465.00 ~ 3534.99	0.2825	27M9G7D	0.2483	27M9W7D
40	3470.01 ~ 3529.98	0.2780	37M8G7D	0.2382	37M9W7D
50	3475.02 ~ 3525.00	0.2618	47M6G7D	0.2218	47M7W7D
60	3480.00 ~ 3519.99	0.2624	57M7G7D	0.2239	57M9W7D
70	3485.01 ~ 3514.98	0.2642	67M6G7D	0.2249	67M6W7D
80	3490.02 ~ 3510.00	0.2624	77M4G7D	0.2244	77M6W7D
90	3495.00 ~ 3504.99	0.2612	87M3G7D	0.2153	87M6W7D
100	3500.01	0.2831	97M5G7D	0.2178	97M7W7D



5G NR n78 SA		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.3532	8M59G7D	0.3334	8M59W7D
15	3457.50 ~ 3542.49	0.3524	13M6G7D	0.3327	13M6W7D
20	3460.02 ~ 3540.00	0.3681	18M2G7D	0.3428	18M2W7D
30	3465.00 ~ 3534.99	0.3690	27M9G7D	0.3483	27M9W7D
40	3470.01 ~ 3529.98	0.3631	37M8G7D	0.3388	37M9W7D
50	3475.02 ~ 3525.00	0.3508	47M6G7D	0.3221	47M7W7D
60	3480.00 ~ 3519.99	0.3516	57M7G7D	0.3273	57M9W7D
70	3485.01 ~ 3514.98	0.3540	67M6G7D	0.3289	67M6W7D
80	3490.02 ~ 3510.00	0.3508	77M4G7D	0.3327	77M6W7D
90	3495.00 ~ 3504.99	0.3573	87M3G7D	0.3251	87M6W7D
100	3500.01	0.3776	97M5G7D	0.3141	97M7W7D

**Note:**

1. 5G NR Band n78 overlaps the entire frequency range of Band n77, and n78 power > n77 power, therefore the conducted test results of n78 provided in this report cover n77.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

### 1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH03-SZ	CN1256	421272

### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24



## 1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X Plane)

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	10M, 15M, 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB	L, M, H
	5G n78	10M, 15M, 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n78	20M	PI/2 BPSK, QPSK	Full RB	M
E.I.R.P	5G n77	10M, 15M, 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB	L, M, H
	5G n78	10M, 15M, 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB	L, M, H
26dB and 99% Bandwidth	5G n78	10M, 15M, 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	5G n78	10M, 50M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n78	10M, 50M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n78	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n77	Worst case from maximum power			M
	5G n78	Worst case from maximum power			M

**Note:**

- The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- Frequency Stability: Normal Voltage = 3.91V ; Low Voltage =3.7V.; High Voltage =4.4V.

## 2.2 Connection Diagram of Test System

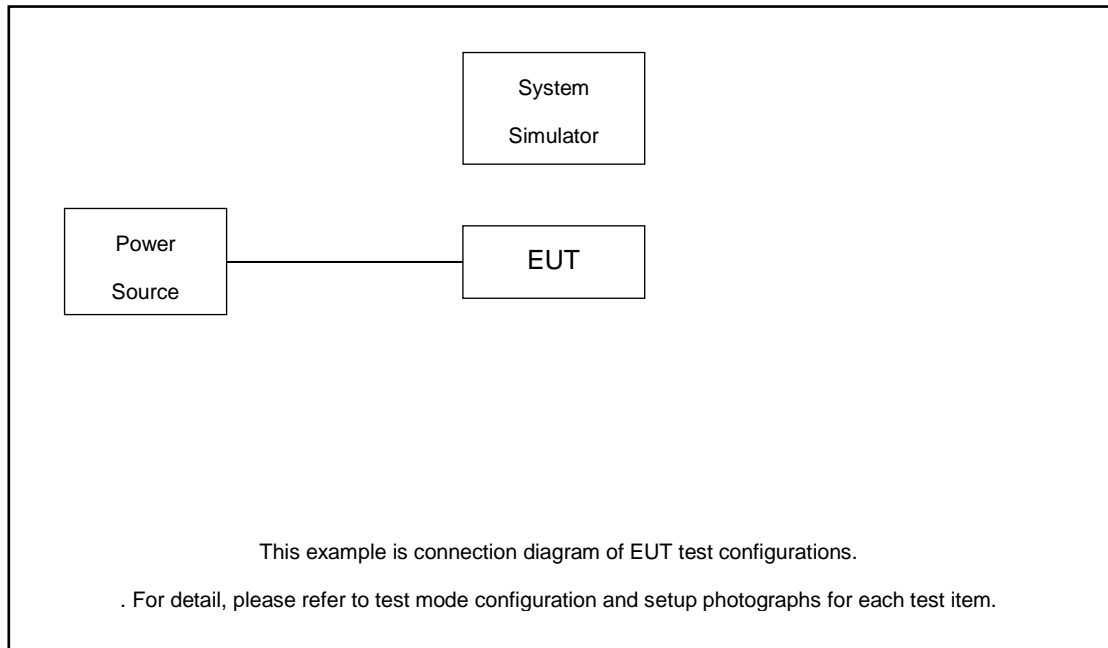

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss

$Offset = RF\ cable\ loss.$

Following shows an offset computation example with cable loss 8.9 dB

Example :

$Offset(dB) = RF\ cable\ loss(dB).$

=8.9 (dB)

## 2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

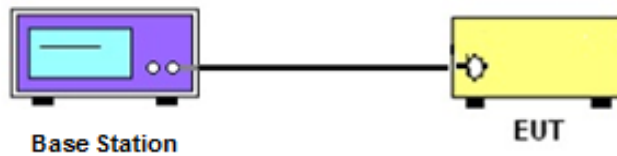

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

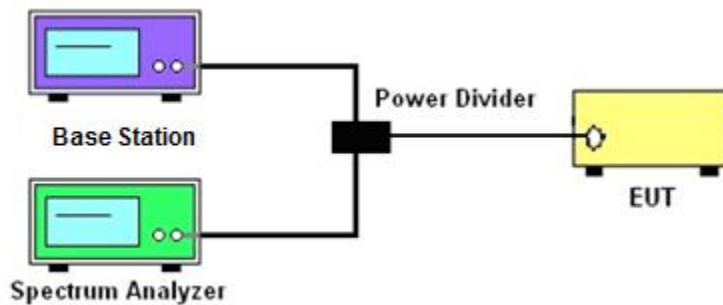

##### 3.2.3 Frequency Stability

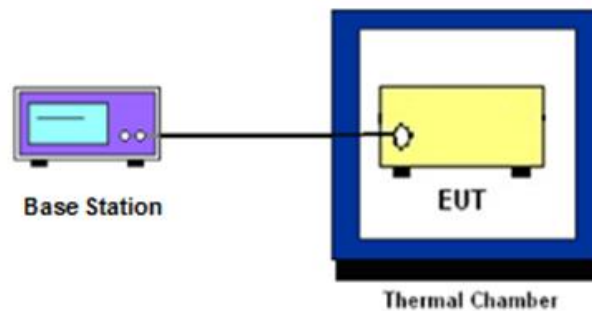

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.4 Conducted Output Power Measurement

### 3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

## 3.6 EIRP

### 3.6.1 Description of EIRP Limit

#### § 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

### 3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2.  $EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where  
 $P_T$  = transmitter output power in dBm  
 $G_T$  = gain of the transmitting antenna in dBi  
 $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB



## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.8 Conducted Band Edge Measurement

### 3.8.1 Description of Conducted Band Edge Measurement

#### § 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed  $-13$  dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq 1\%$  EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW  $\geq 500$ KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

## 3.10 Frequency Stability Measurement

### 3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

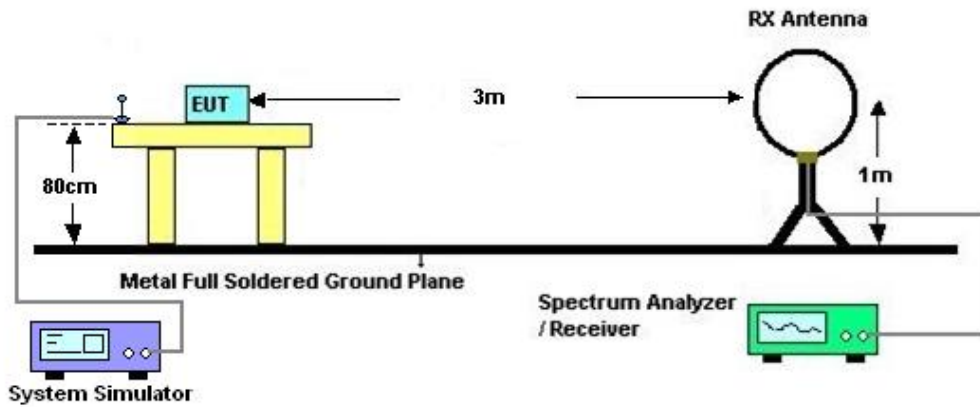

#### 4.2.2 For radiated test from 30MHz to 1GHz

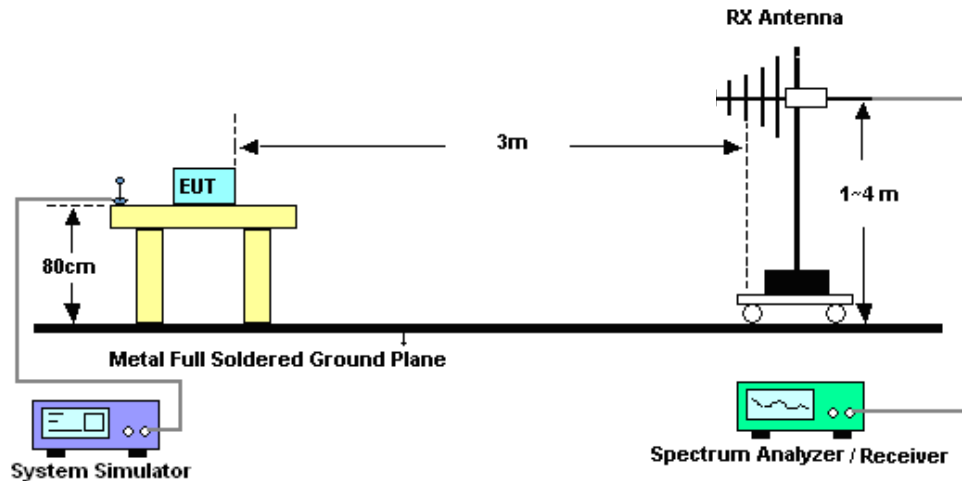

#### 4.2.3 For radiated test above 1GHz

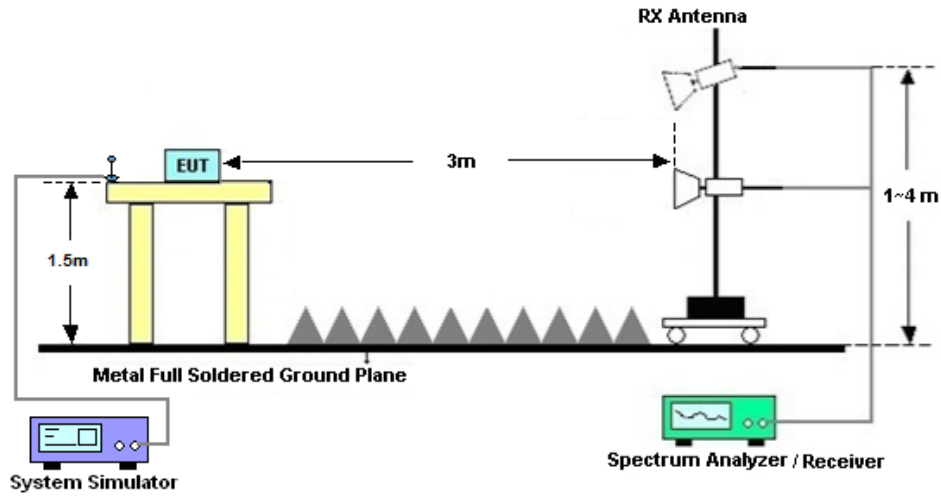

#### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Jan. 06, 2024~ Jan. 19, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Jan. 06, 2024~ Jan. 19, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2023	Jan. 06, 2024~ Jan. 19, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Jan. 06, 2024~ Jan. 19, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	Jan. 17, 2024	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	Jan. 17, 2024	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Jan. 17, 2024	Jun. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Jan. 17, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	Jan. 17, 2024	Apr. 07, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 08, 2023	Jan. 17, 2024	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Jan. 17, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jan. 17, 2024	Jul. 06, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Jan. 17, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2023	Jan. 17, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 17, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 17, 2024	NCR	Radiation (03CH03-SZ)
Thermo meter	Anymetre	JR593	#11	- 10°C ~ 50°C 10%RH~99%RH	Oct. 19, 2023	Jan. 17, 2024	Oct. 18, 2024	Radiation (03CH03-SZ)

NCR: No Calibration Required



## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.6 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.8 dB
---	--------

----- THE END -----



## Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%

# FR1 N77(ANT11)

## Transmitter Conducted Output Power And EIRP, (G<sub>T</sub> - L<sub>C</sub>)=0.95dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	23.2	24.15	0.2600
77	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	22.56	23.51	0.2244
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.25	24.2	0.2630
77	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.63	23.58	0.2280
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	23.53	24.48	0.2805
77	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	22.76	23.71	0.2350
77	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	23.35	24.3	0.2692
77	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	22.5	23.45	0.2213
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.39	24.34	0.2716
77	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.64	23.59	0.2286
77	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	23.41	24.36	0.2729
77	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	22.66	23.61	0.2296
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	23.35	24.3	0.2692
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	22.61	23.56	0.2270
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.27	24.22	0.2642
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.71	23.66	0.2323
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	23.32	24.27	0.2673
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	22.37	23.32	0.2148
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	23.34	24.29	0.2685
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	22.59	23.54	0.2259
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.46	24.41	0.2761
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.71	23.66	0.2323
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	23.56	24.51	0.2825
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	23	23.95	0.2483
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	23.49	24.44	0.2780
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	22.77	23.72	0.2355
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.46	24.41	0.2761
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.82	23.77	0.2382
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	23.47	24.42	0.2767

77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	22.78	23.73	0.2360
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	23.12	24.07	0.2553
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	22.38	23.33	0.2153
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.23	24.18	0.2618
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.51	23.46	0.2218
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	23.21	24.16	0.2606
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	22.5	23.45	0.2213
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	23.23	24.18	0.2618
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	22.42	23.37	0.2173
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.24	24.19	0.2624
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.53	23.48	0.2228
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	23.14	24.09	0.2564
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	22.55	23.5	0.2239
77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	23.11	24.06	0.2547
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	22.42	23.37	0.2173
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.27	24.22	0.2642
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.51	23.46	0.2218
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	23.27	24.22	0.2642
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	22.57	23.52	0.2249
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	23.24	24.19	0.2624
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	22.31	23.26	0.2118
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.17	24.12	0.2582
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.44	23.39	0.2183
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	23.14	24.09	0.2564
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	22.56	23.51	0.2244
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	23.12	24.07	0.2553
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	22.28	23.23	0.2104
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.18	24.13	0.2588
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.33	23.28	0.2128
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	23.22	24.17	0.2612
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	22.38	23.33	0.2153
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	23.57	24.52	0.2831
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.39	24.34	0.2716
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	23.42	24.37	0.2735
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	23.43	24.38	0.2742

77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.34	24.29	0.2685
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	23.4	24.35	0.2723
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	22.33	23.28	0.2128
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.33	23.28	0.2128
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	22.43	23.38	0.2178
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	20.8	21.75	0.1496
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	20.9	21.85	0.1531
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	20.91	21.86	0.1535
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	19.25	20.2	0.1047
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	19.08	20.03	0.1007
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	19.12	20.07	0.1016
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	22.11	23.06	0.2023
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	22.1	23.05	0.2018
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	22.22	23.17	0.2075

# FR1 N78(ANT11)

## Transmitter Conducted Output Power And EIRP, (G<sub>T</sub> - L<sub>C</sub>)=0.95dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	24.53	25.48	0.3532
78	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	24.28	25.23	0.3334
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.47	25.42	0.3483
78	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.27	25.22	0.3327
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	24.45	25.4	0.3467
78	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	24.17	25.12	0.3251
78	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	24.52	25.47	0.3524
78	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	24.23	25.18	0.3296
78	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.41	25.36	0.3436
78	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.27	25.22	0.3327
78	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	24.36	25.31	0.3396
78	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	24.22	25.17	0.3289
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	24.71	25.66	0.3681
78	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.4	25.35	0.3428
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.61	25.56	0.3597
78	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.3	25.25	0.3350
78	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	24.51	25.46	0.3516
78	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	24.31	25.26	0.3357
78	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	24.72	25.67	0.3690
78	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	24.47	25.42	0.3483
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.69	25.64	0.3664
78	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.28	25.23	0.3334
78	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	24.63	25.58	0.3614
78	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	24.4	25.35	0.3428
78	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	24.65	25.6	0.3631
78	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	24.35	25.3	0.3388
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.54	25.49	0.3540
78	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.27	25.22	0.3327
78	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	24.53	25.48	0.3532

78	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	24.24	25.19	0.3304
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	24.4	25.35	0.3428
78	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.11	25.06	0.3206
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.5	25.45	0.3508
78	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.13	25.08	0.3221
78	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	24.2	25.15	0.3273
78	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	23.98	24.93	0.3112
78	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	24.45	25.4	0.3467
78	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	24.18	25.13	0.3258
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.51	25.46	0.3516
78	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.2	25.15	0.3273
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	24.4	25.35	0.3428
78	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.11	25.06	0.3206
78	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	24.54	25.49	0.3540
78	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	24.22	25.17	0.3289
78	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.54	25.49	0.3540
78	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.18	25.13	0.3258
78	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	24.46	25.41	0.3475
78	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	24.15	25.1	0.3236
78	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	24.5	25.45	0.3508
78	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.22	25.17	0.3289
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.44	25.39	0.3459
78	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.27	25.22	0.3327
78	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	24.31	25.26	0.3357
78	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	24.13	25.08	0.3221
78	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	24.29	25.24	0.3342
78	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	24.09	25.04	0.3192
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.4	25.35	0.3428
78	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.17	25.12	0.3251
78	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	24.58	25.53	0.3573
78	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	24.17	25.12	0.3251
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	24.28	25.23	0.3334
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.3	25.25	0.3350
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	24.35	25.3	0.3388
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	24.5	25.45	0.3508

78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.82	25.77	0.3776
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	24.5	25.45	0.3508
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.02	24.97	0.3141
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.9	24.85	0.3055
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	23.84	24.79	0.3013
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	23.53	24.48	0.2805
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.52	24.47	0.2799
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	23.36	24.31	0.2698
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	21.91	22.86	0.1932
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.72	22.67	0.1849
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	21.46	22.41	0.1742
78	30	100	633334	3500.01	CP-OFDM QPSK	137@68	24.29	25.24	0.3342
78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.24	25.19	0.3304
78	30	100	633334	3500.01	CP-OFDM QPSK	1@271	24	24.95	0.3126




## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0047	PASS	NV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0031	PASS	LV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0065	PASS	HV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0063	PASS	-30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0070	PASS	-20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0026	PASS	-10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0035	PASS	0°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0059	PASS	10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0047	PASS	20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0061	PASS	30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0068	PASS	40°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0030	PASS	50°C


# Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	4.14	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	4.81	13	PASS

N78(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

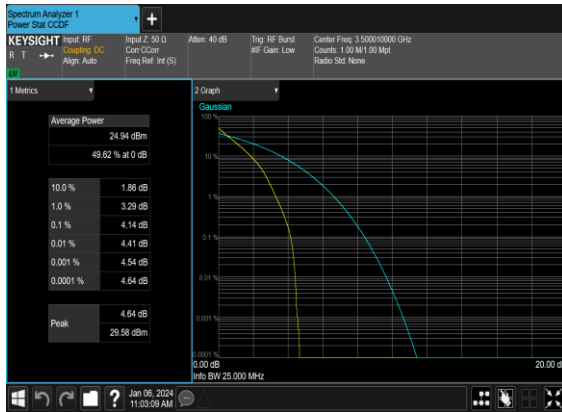

N78(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

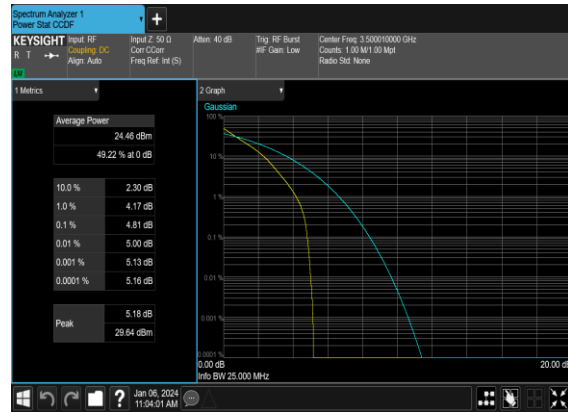

## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
78	30	10	633334	3500.01	CP-OFDM QPSK	24@0	8.5878	9.758
78	30	10	633334	3500.01	CP-OFDM 16 QAM	24@0	8.588	10.05
78	30	10	633334	3500.01	CP-OFDM 64 QAM	24@0	8.5711	9.533
78	30	10	633334	3500.01	CP-OFDM 256 QAM	24@0	8.5605	9.296
78	30	15	633334	3500.01	CP-OFDM QPSK	38@0	13.594	14.67
78	30	15	633334	3500.01	CP-OFDM 16 QAM	38@0	13.574	14.59
78	30	15	633334	3500.01	CP-OFDM 64 QAM	38@0	13.558	14.5
78	30	15	633334	3500.01	CP-OFDM 256 QAM	38@0	13.555	14.53
78	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.239	19.86
78	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.188	20.08
78	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.225	19.4
78	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.203	19.58
78	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.888	28.91
78	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.884	28.99
78	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.837	29.04
78	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.918	28.97
78	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.843	39.47
78	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.886	39.16
78	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.861	39.69
78	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.859	39.17
78	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.582	49.58
78	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.687	49.28
78	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.506	49.04
78	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.421	49.09
78	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.744	59.73

78	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.881	59.72
78	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.826	59.78
78	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.714	59.89
78	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.554	70.25
78	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.484	69.64
78	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.614	70.68
78	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.416	69.77
78	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.432	79.96
78	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.58	79.92
78	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.566	79.95
78	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.515	79.92
78	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.3	90.38
78	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.528	90.26
78	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.333	90.32
78	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.624	90.17
78	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.532	100.6
78	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.544	100.5
78	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.362	100.6
78	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.684	100.4

### N78(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N78(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH




### N78(10M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH




### N78(10M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

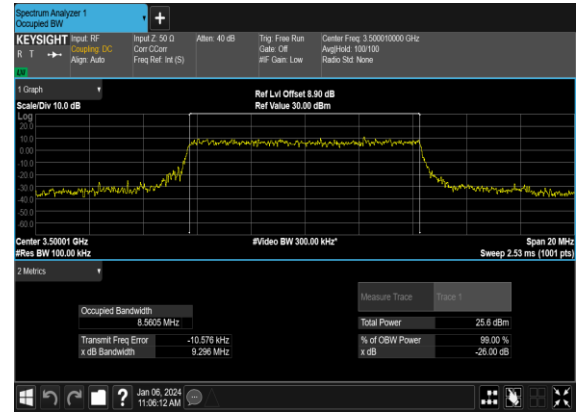


### N78(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

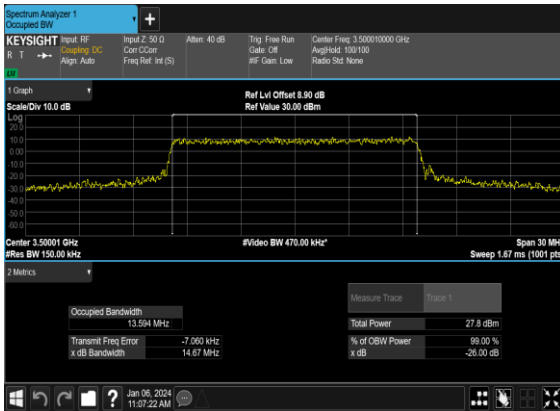


### N78(15M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

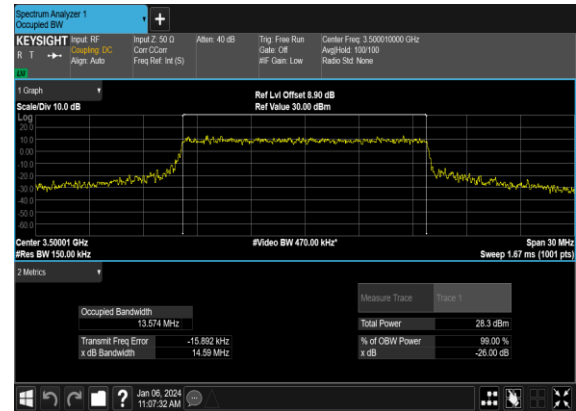

### N78(15M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

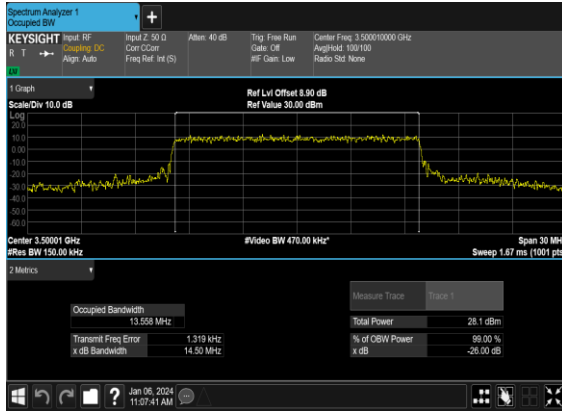

### N78(15M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

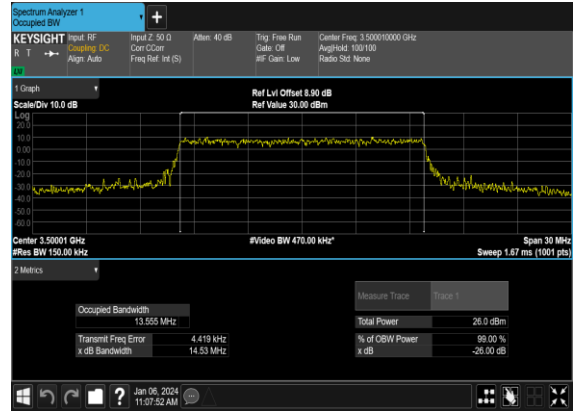


### N78(20M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N78(20M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH




### N78(20M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

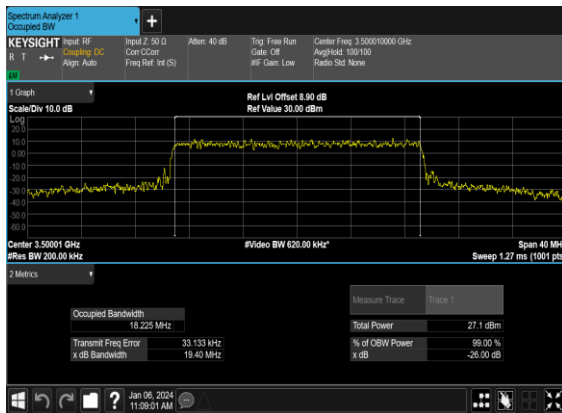


### N78(20M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

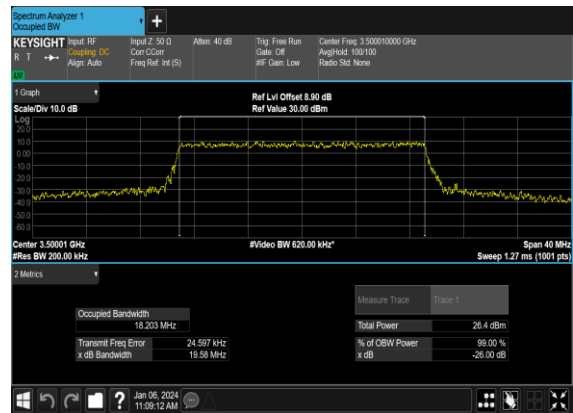


### N78(30M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

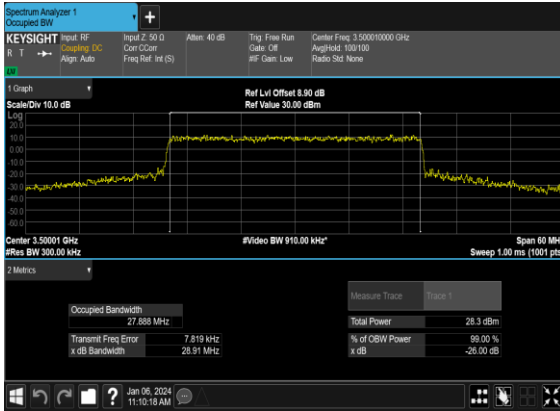


### N78(30M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

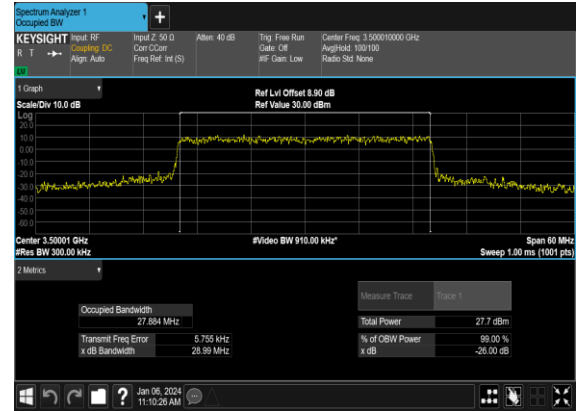


### N78(30M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

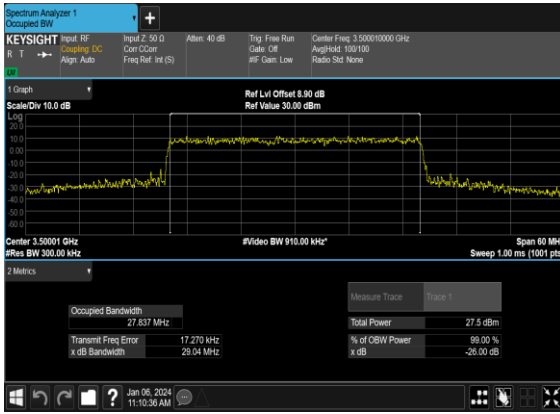


### N78(30M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

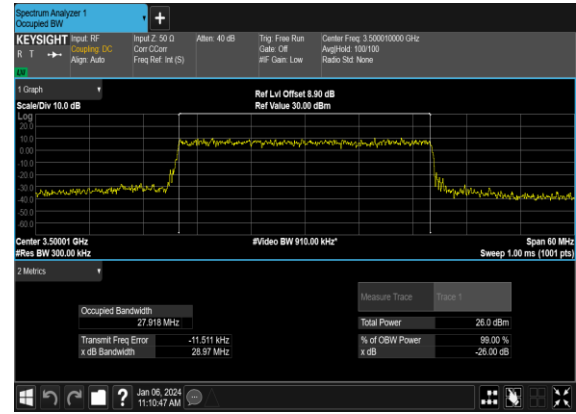


### N78(40M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

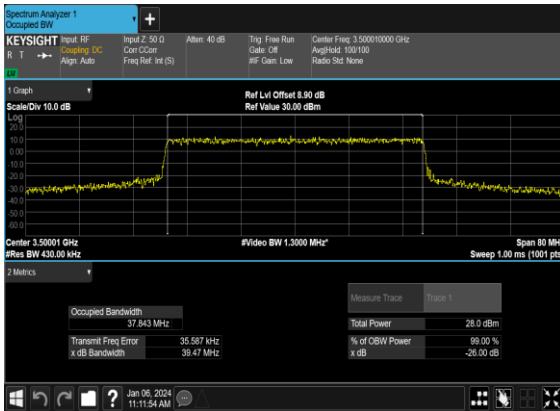


### N78(40M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

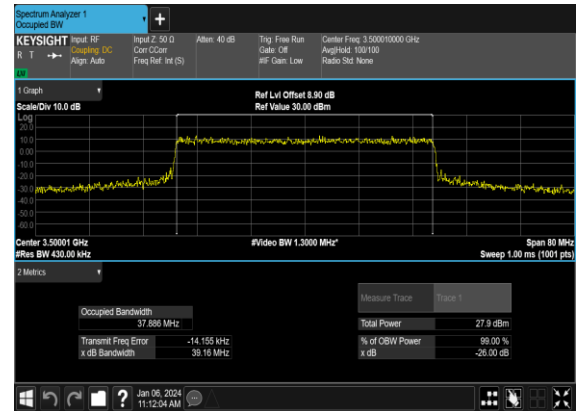


### N78(40M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

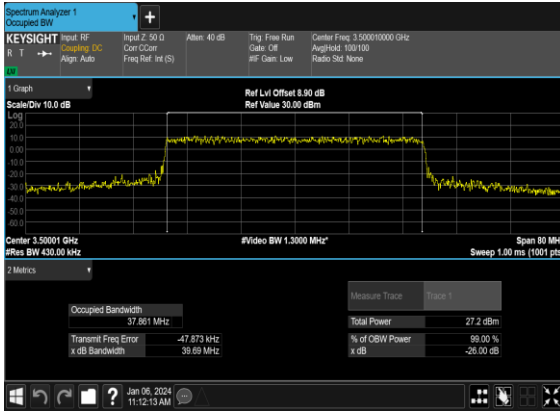

### N78(40M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

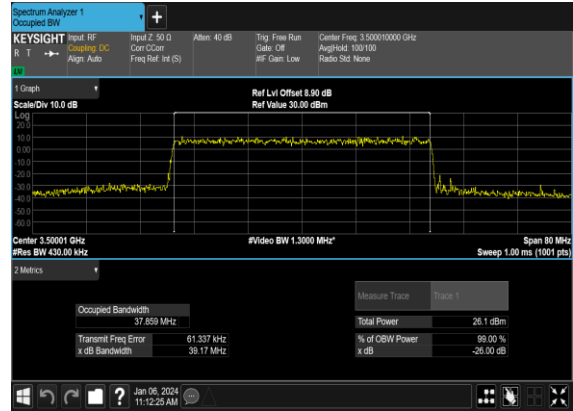


### N78(50M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

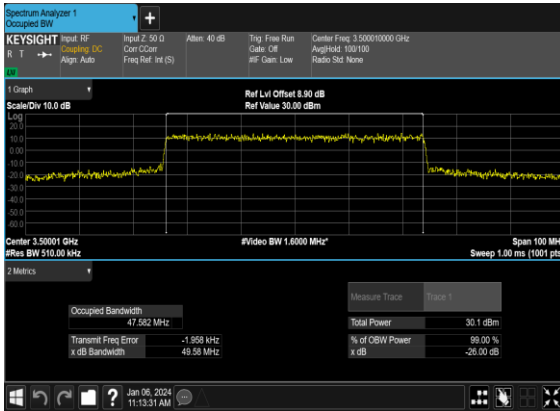


### N78(50M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH



### N78(50M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

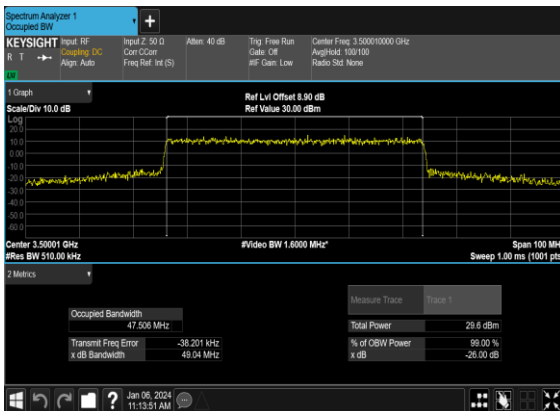


### N78(50M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

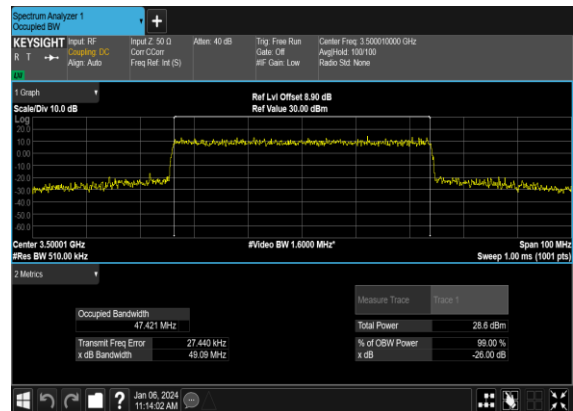




### N78(60M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

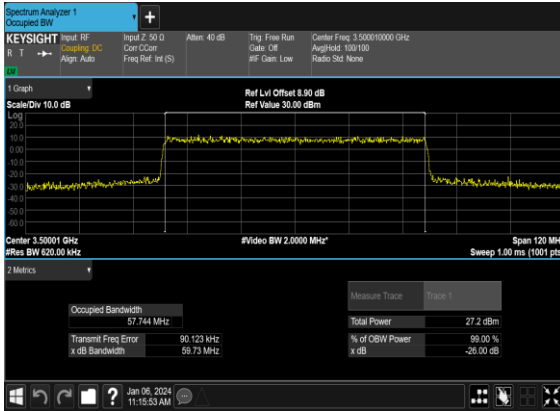

### N78(60M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

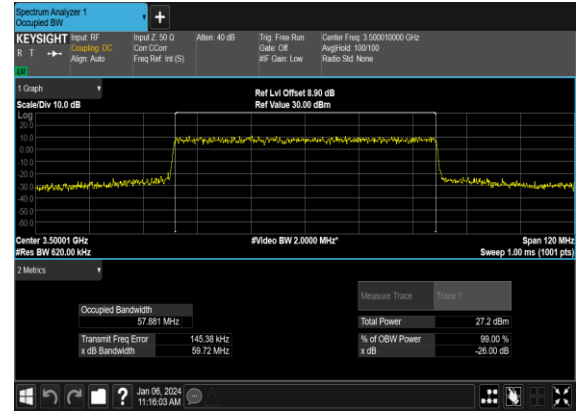


### N78(60M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH




### N78(60M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH




### N78(70M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

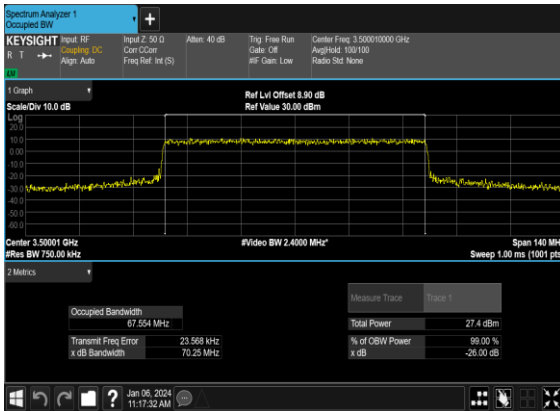


### N78(70M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

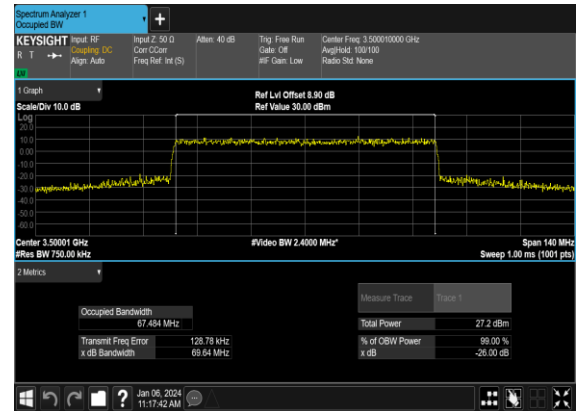


### N78(70M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

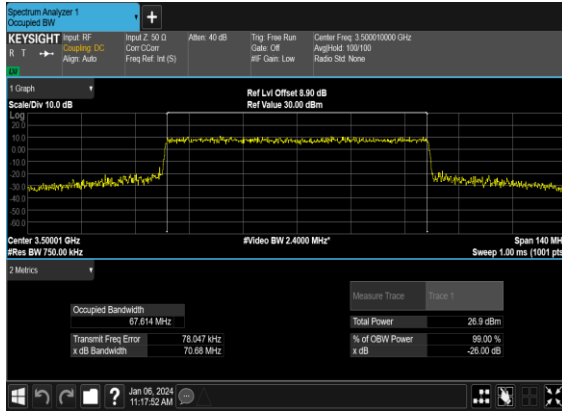


### N78(70M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

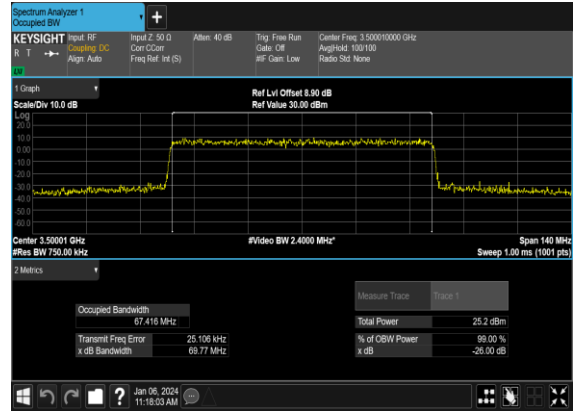


### N78(80M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

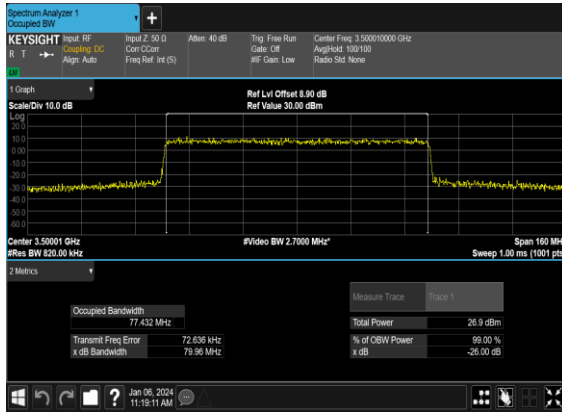


### N78(80M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

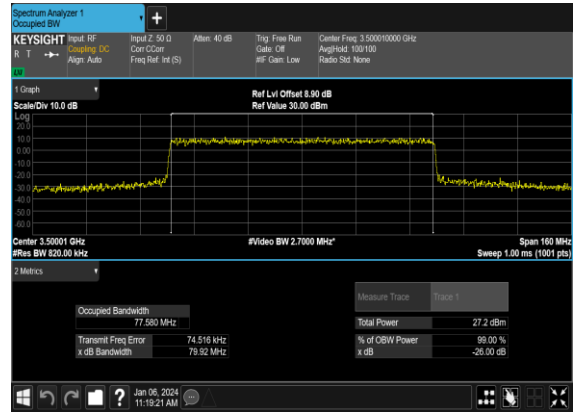


### N78(80M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

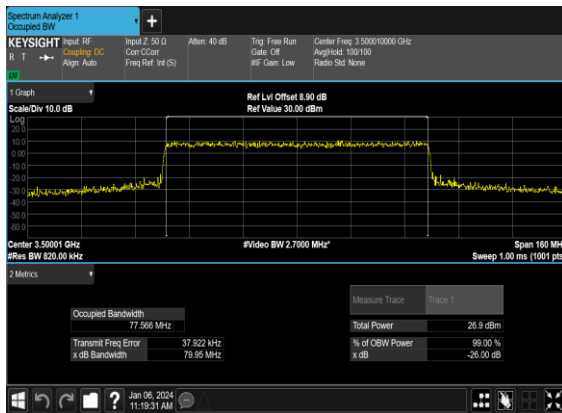


### N78(80M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

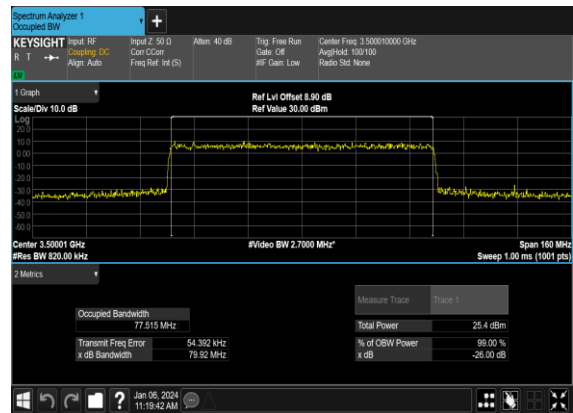


### N78(90M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

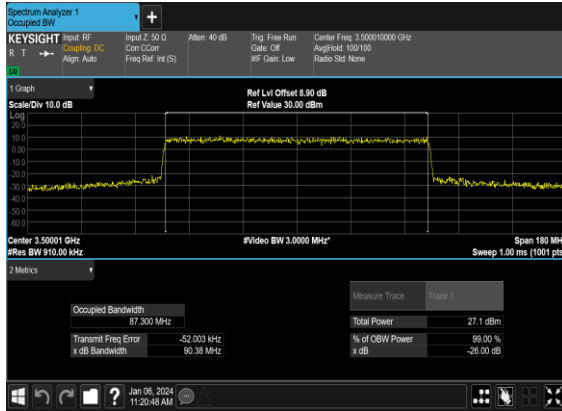

### N78(90M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

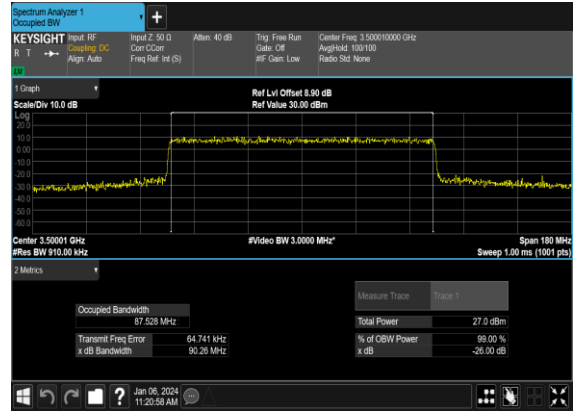


### N78(90M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

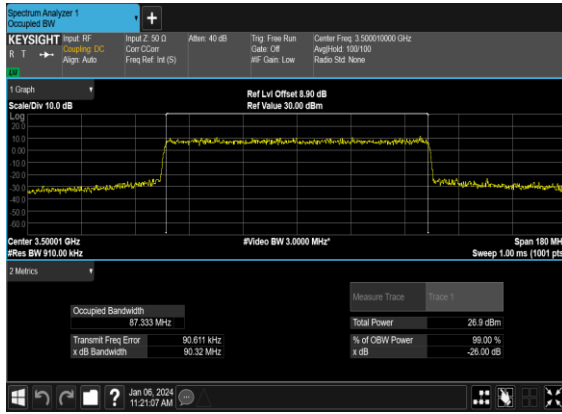

### N78(90M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH




### N78(100M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

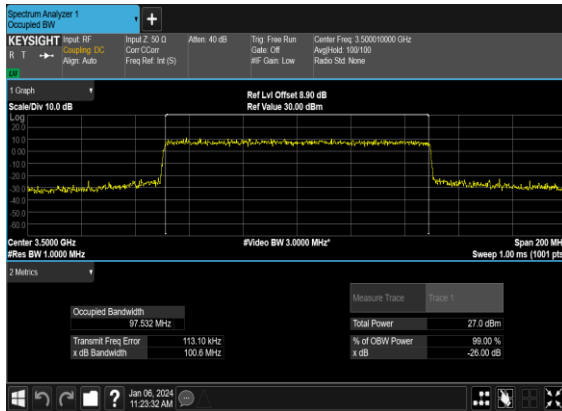

### N78(100M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH



## N78(100M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

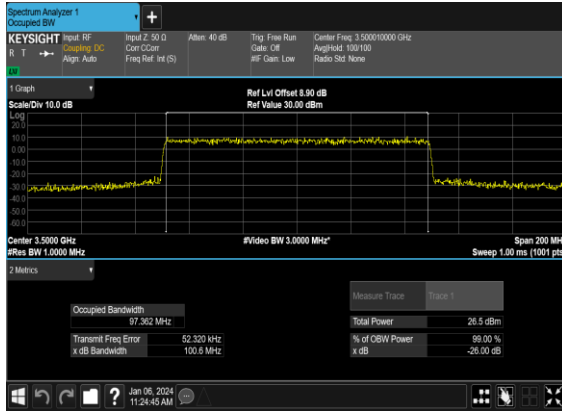

## N78(100M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH




## Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	---

78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


### N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

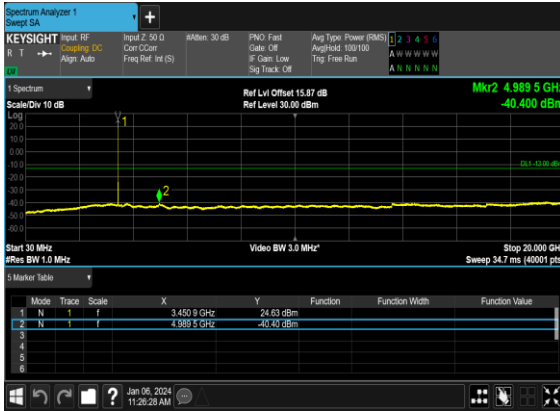


### N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

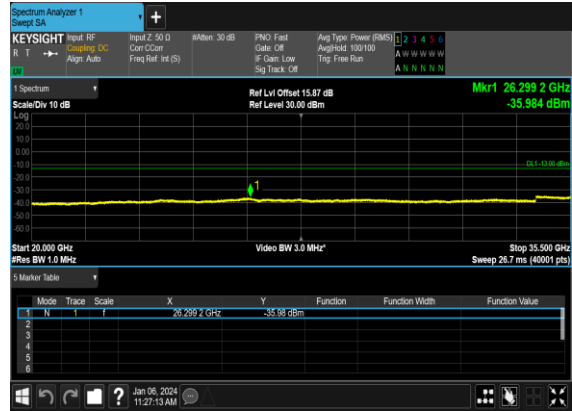


### N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

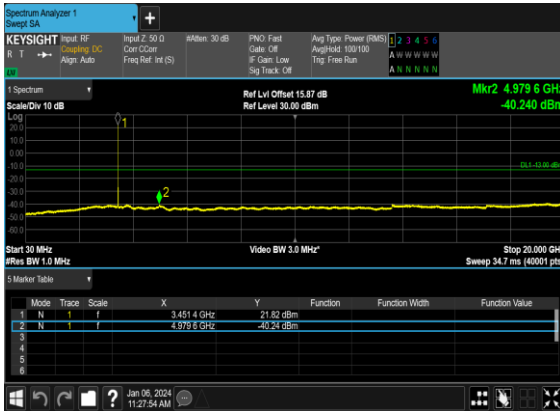


### N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

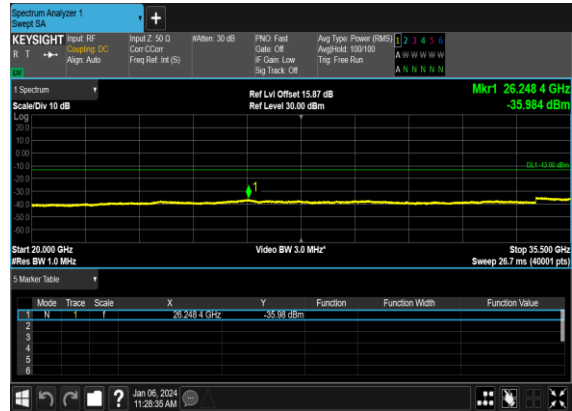


### N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

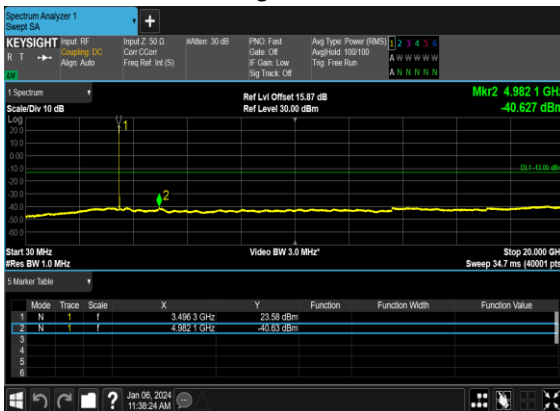


### N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

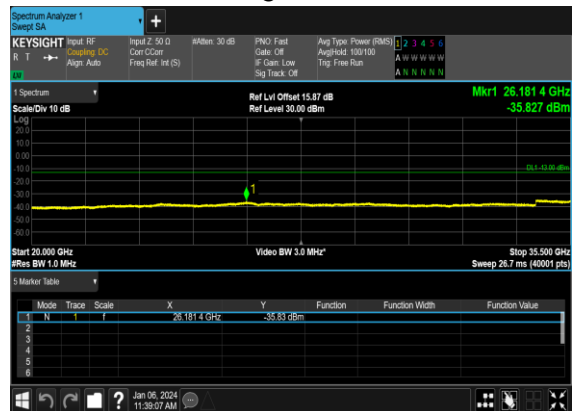


### N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

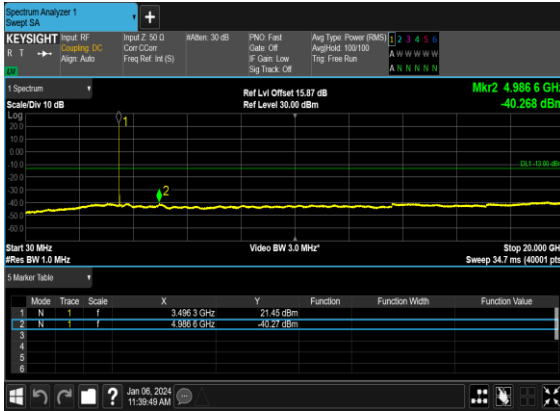


### N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

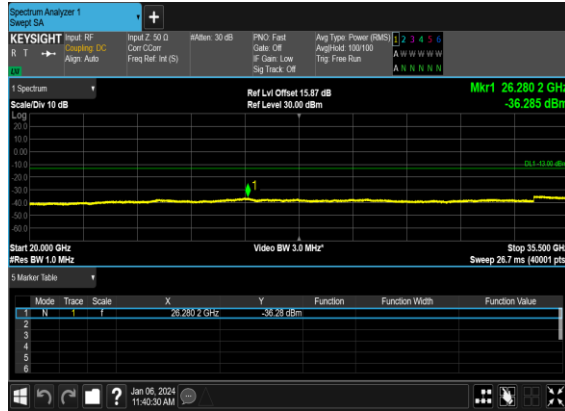

### N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

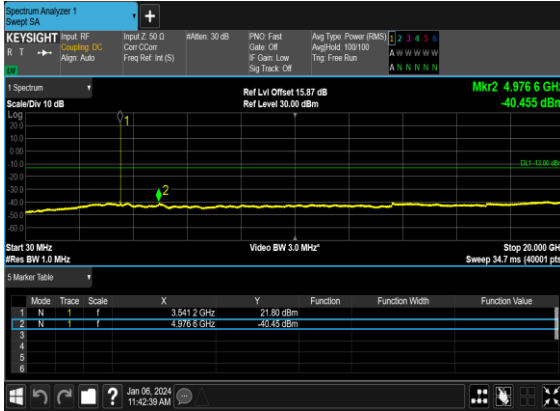


### N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

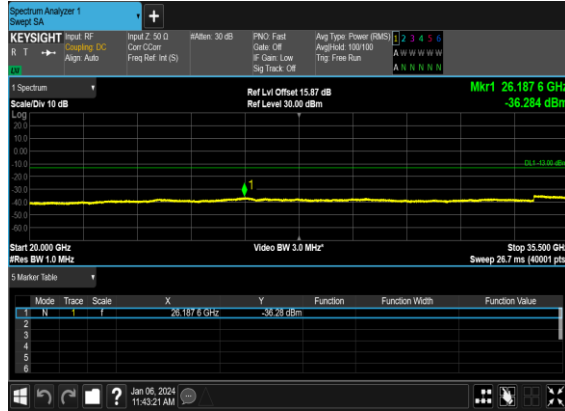

### N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




### N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

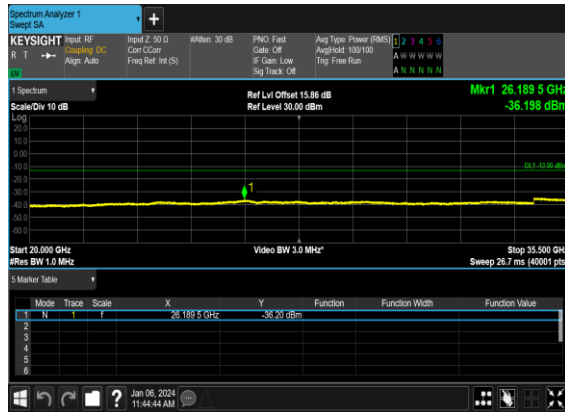





### N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

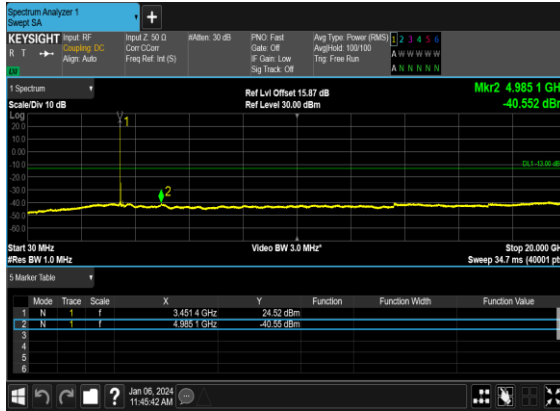


### N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

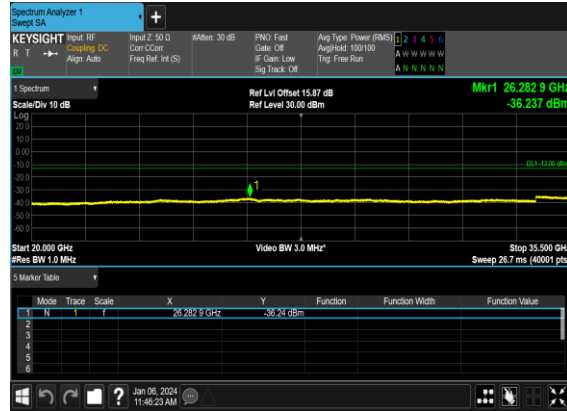

### N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

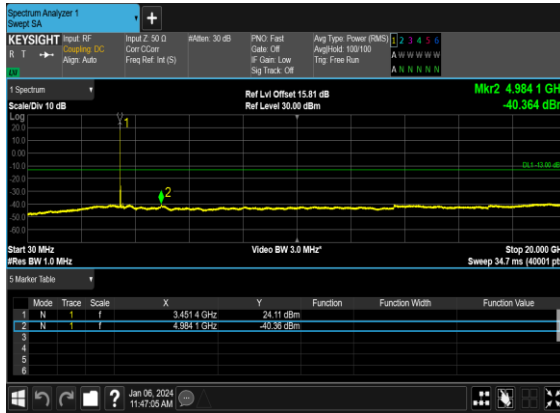


### N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

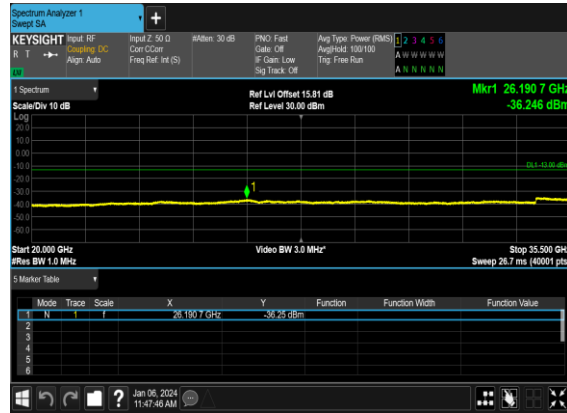


### N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH




### N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

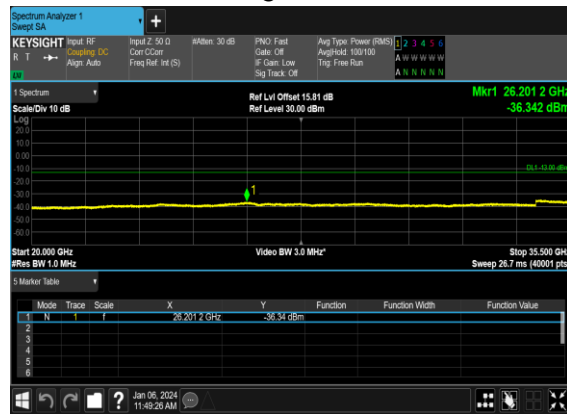


### N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

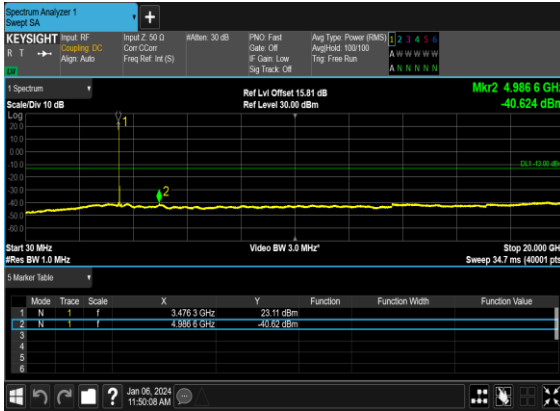


### N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

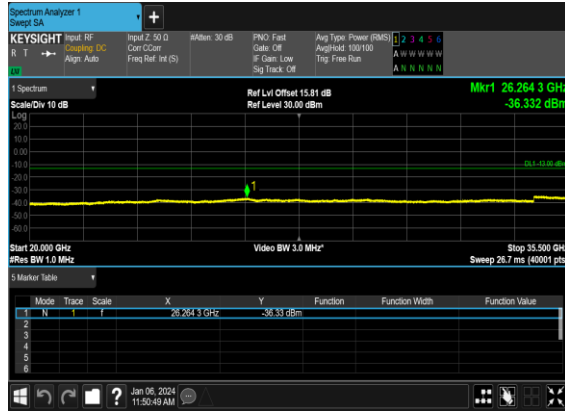

### N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

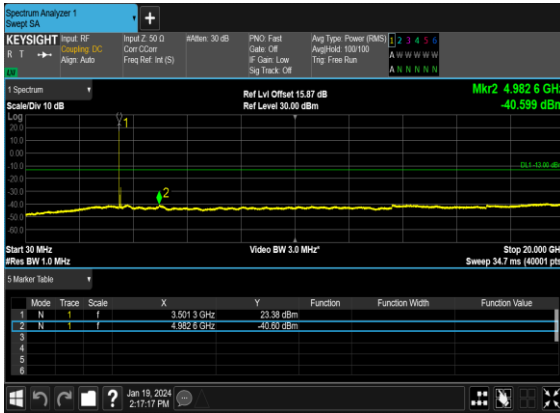


### N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

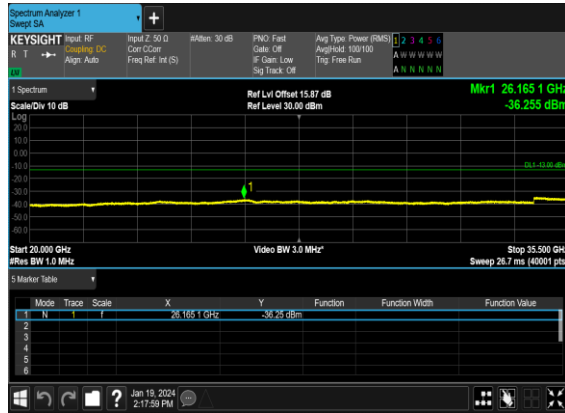

### N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH



### N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

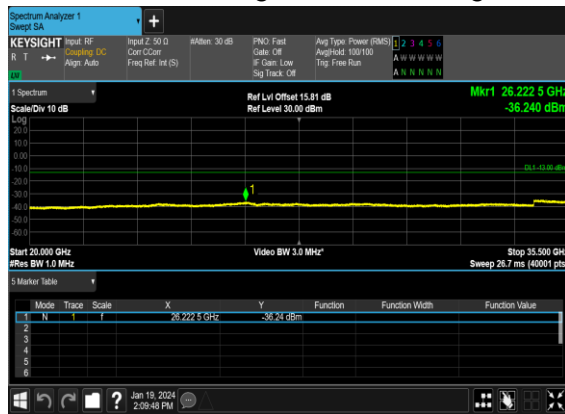

### N78(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH




### N78(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH



### N78(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




### N78(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

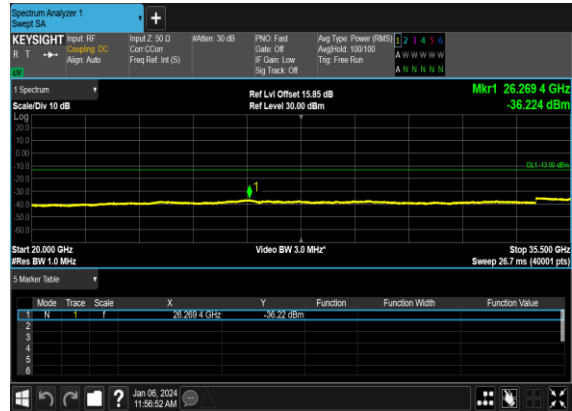


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	24@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	24@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	128@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	128@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@132	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@132	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	128@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	128@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS

N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

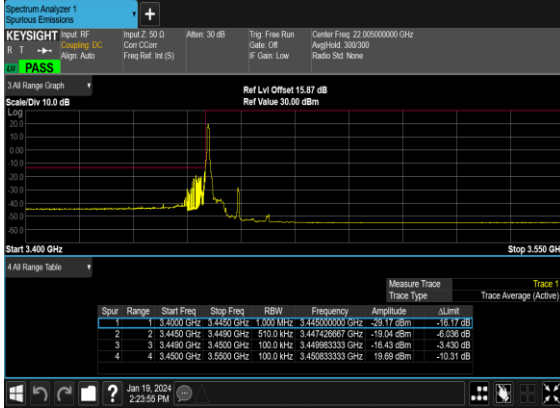

N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

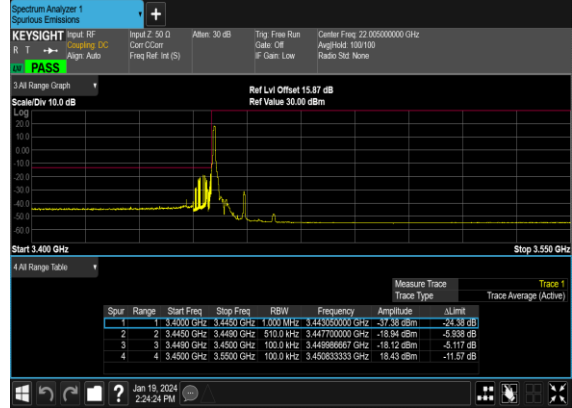

N78(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH




N78(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH




N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH




N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

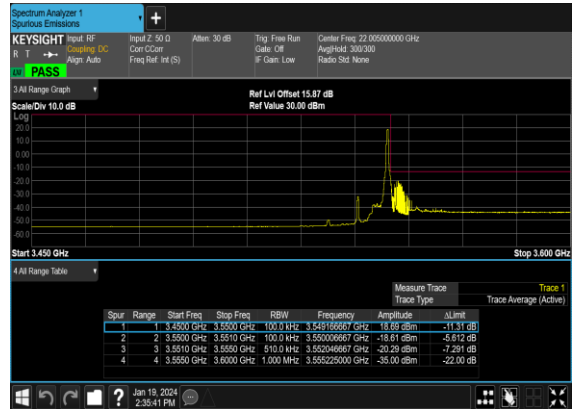

N78(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

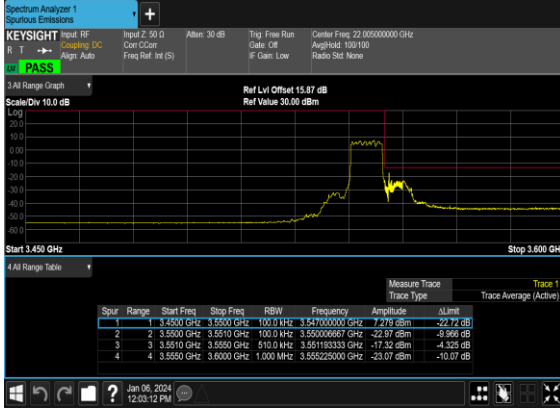


N78(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

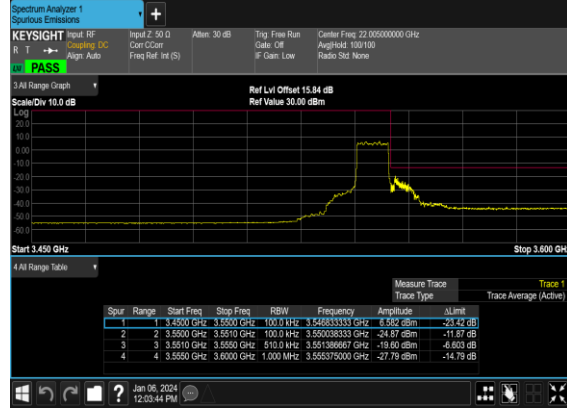


N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH



N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

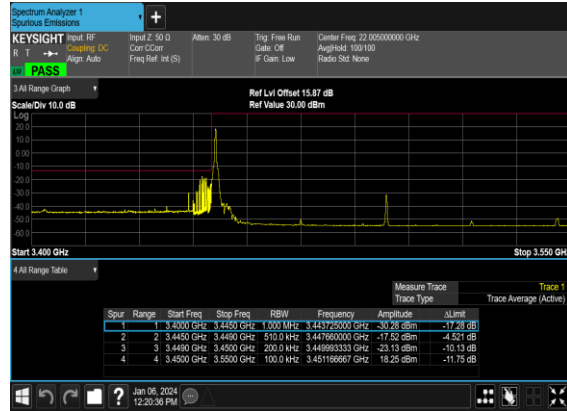

N78(50M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

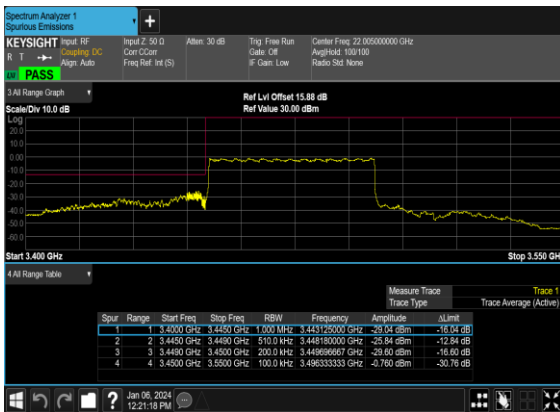

N78(50M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

