

RF Test Data for 2.4G WiFi (Conducted Measurements)


| General Description of EUT | |
|--|---------------------------|
| Product Name: | Smart Battery Camera |
| Test Model: | CG9 |
| Sample ID: | HC-C-202308-0212-01-01-2# |
| Environmental Conditions | |
| Temperature: | 24°C |
| Relative Humidity: | 50% |
| Test Voltage: | DC 3.7V |
| Test Engineer: | Liyingsing |
| Note: For a more detailed features description, please refer to the report TBR-C-202308-0212-21 The report only show the worst case data. | |

Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|---------|-----------------|---------|----------------|------------------------|-----------|
| NVNT | b | 2412 | Ant1 | 99.88 | 0.01 | 0.06 |
| NVNT | b | 2437 | Ant1 | 99.82 | 0.01 | 0.06 |
| NVNT | b | 2462 | Ant1 | 99.88 | 0.01 | 0.06 |
| NVNT | g | 2412 | Ant1 | 99.27 | 0.03 | 0.37 |
| NVNT | g | 2437 | Ant1 | 98.56 | 0.06 | 0.37 |
| NVNT | g | 2462 | Ant1 | 99.28 | 0.03 | 0.36 |
| NVNT | n(HT20) | 2412 | Ant1 | 98.83 | 0.05 | 0.39 |
| NVNT | n(HT20) | 2437 | Ant1 | 98.83 | 0.05 | 0.39 |
| NVNT | n(HT20) | 2462 | Ant1 | 98.84 | 0.05 | 0.39 |

Test Graphs


Duty Cycle NVNT b 2412MHz Ant1

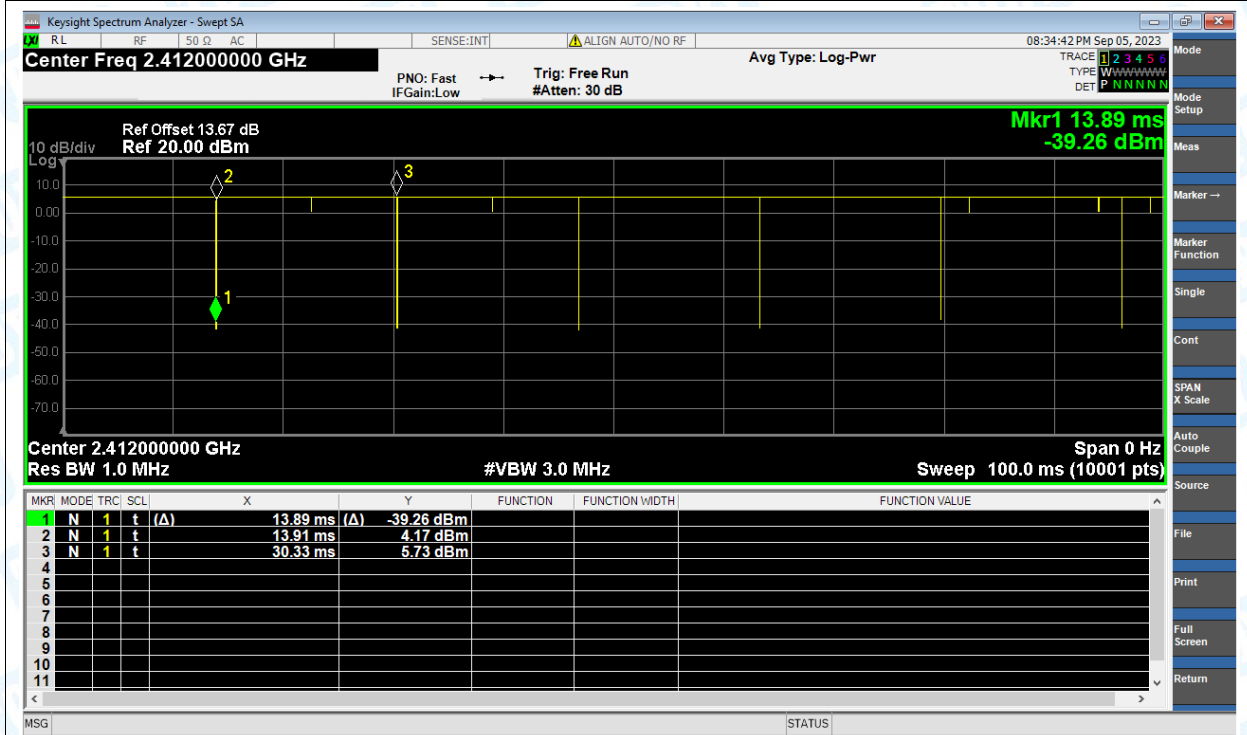


Duty Cycle NVNT b 2437MHz Ant1

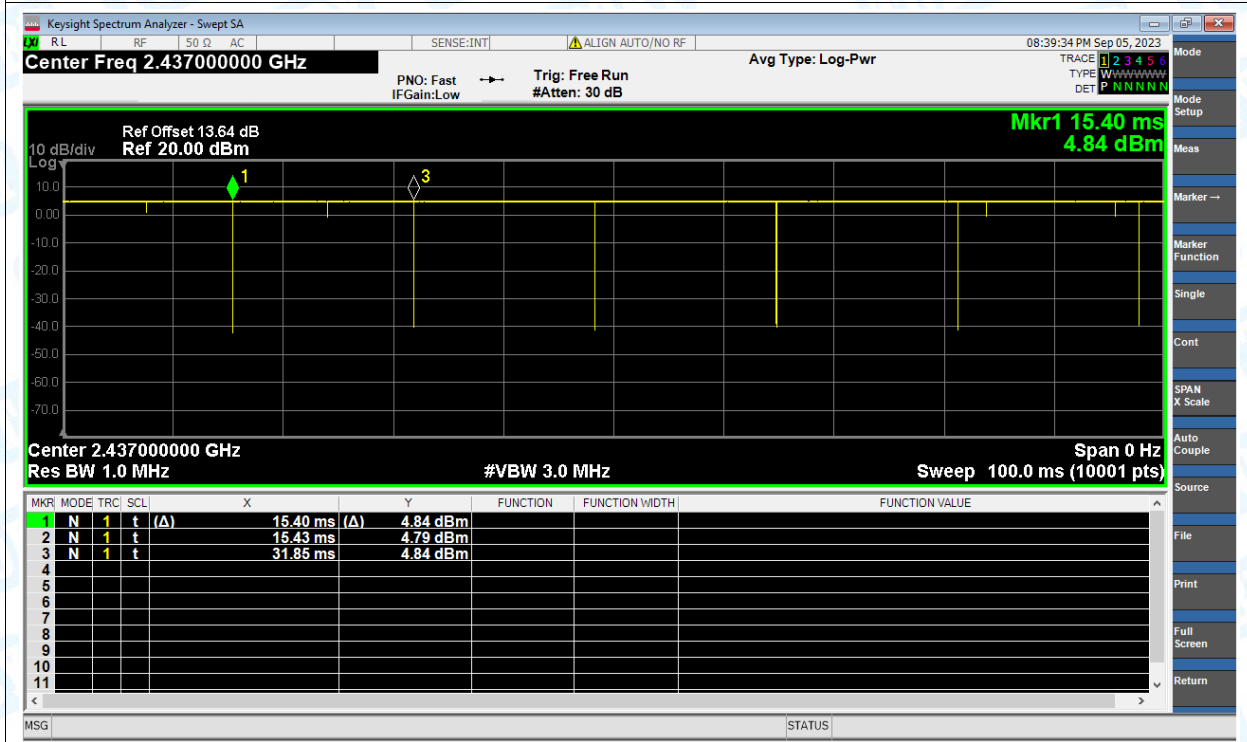


Duty Cycle NVNT b 2462MHz Ant1

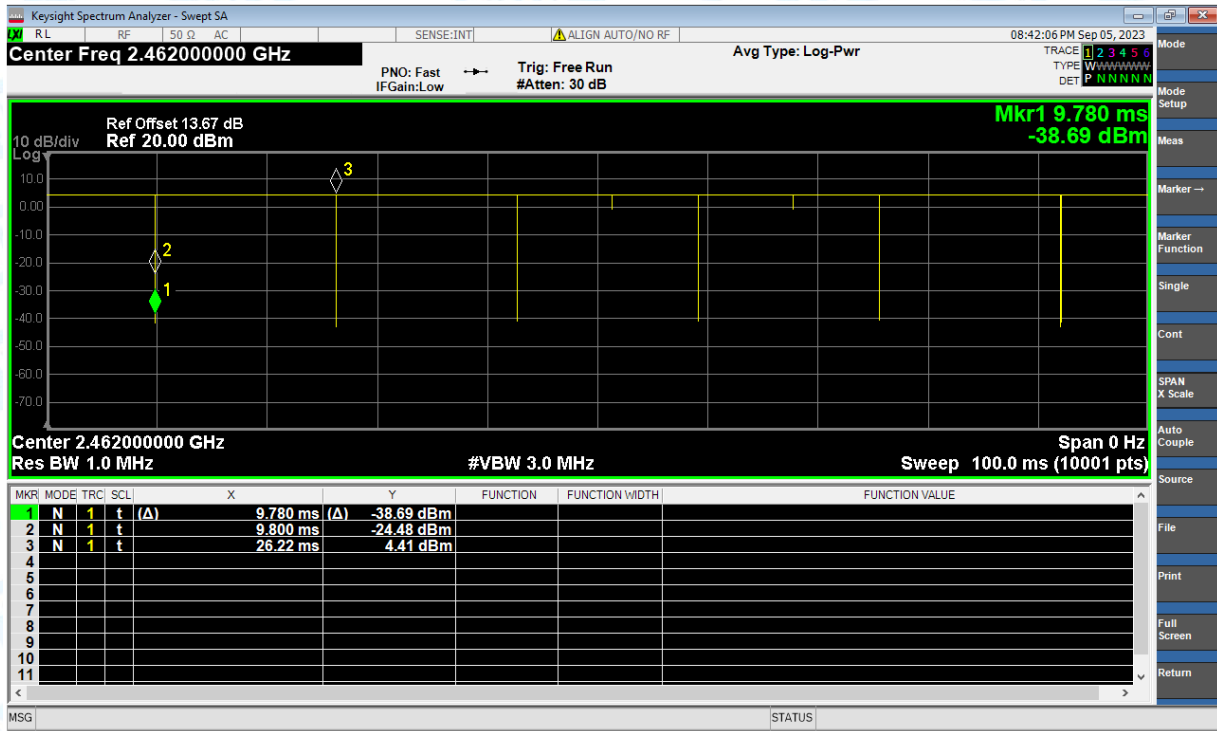


Duty Cycle NVNT g 2412MHz Ant1

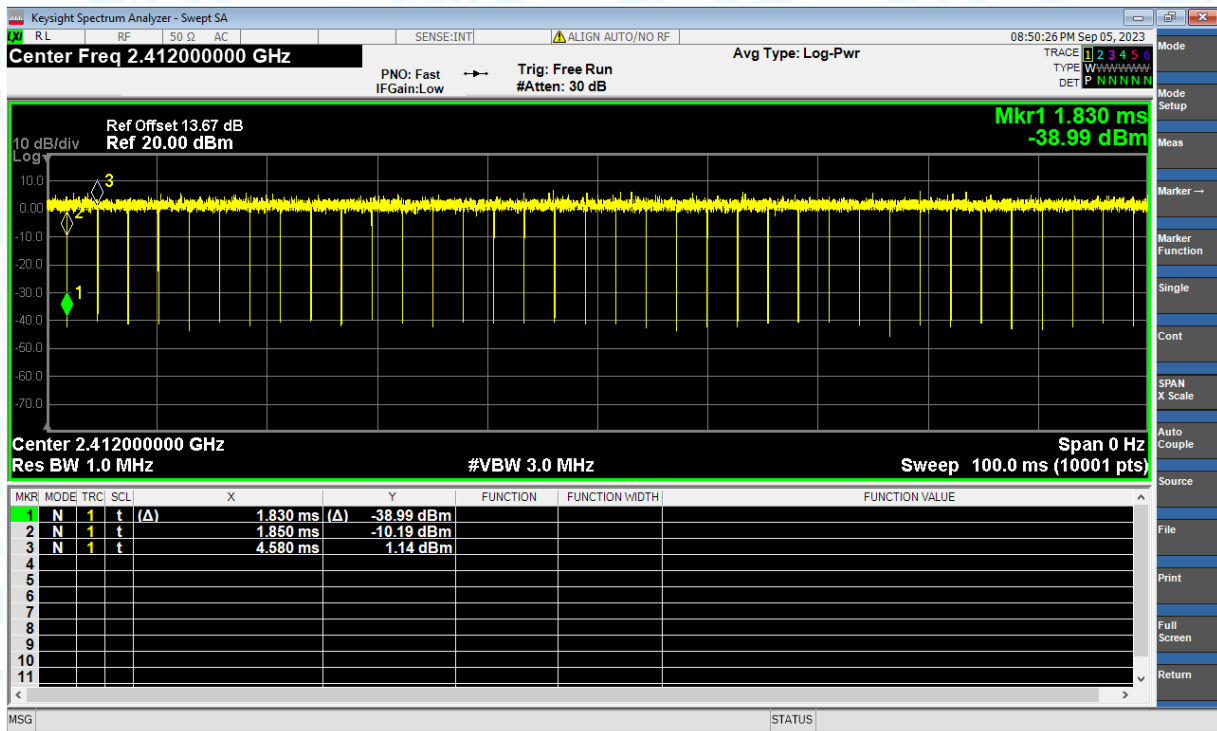


Duty Cycle NVNT g 2437MHz Ant1

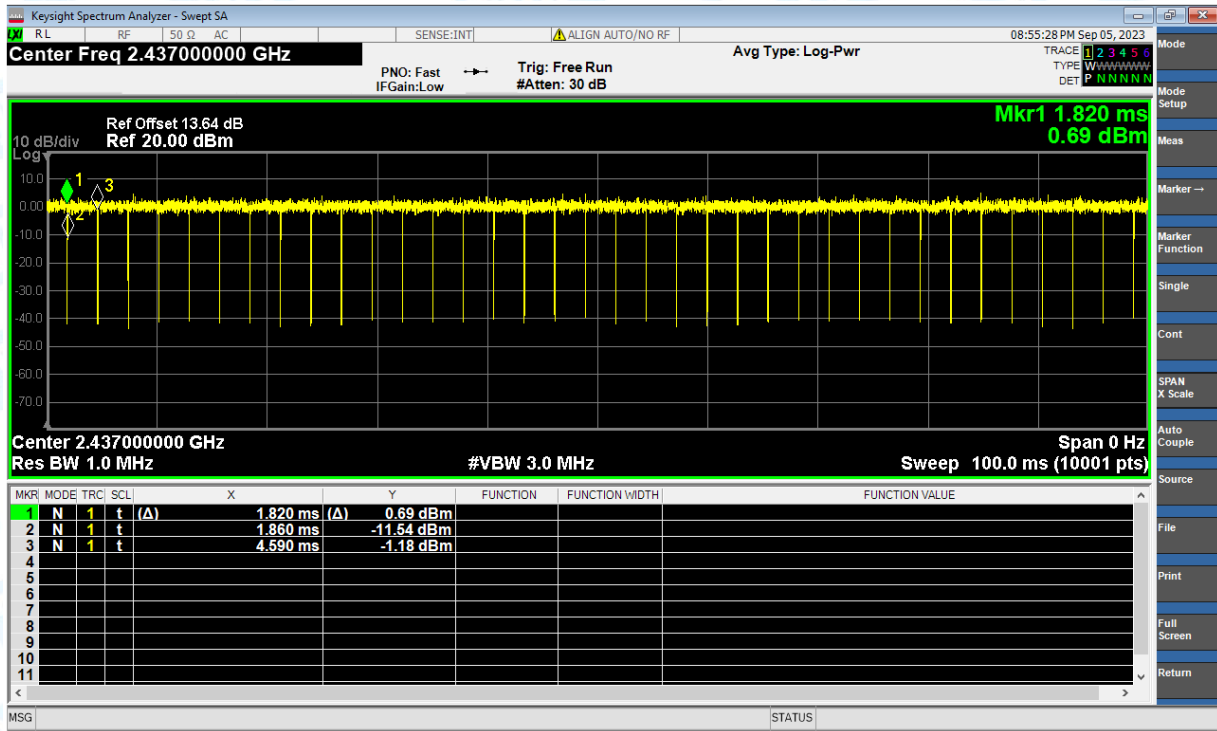


Duty Cycle NVNT g 2462MHz Ant1

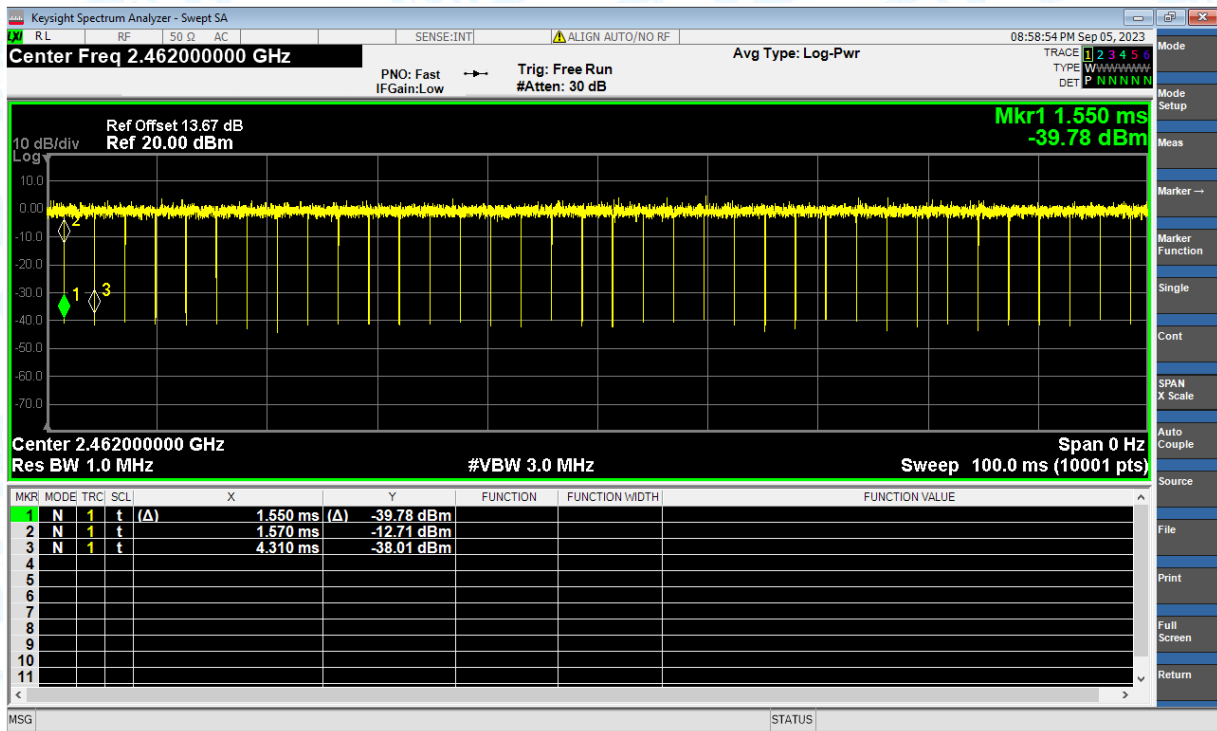


Duty Cycle NVNT n(HT20) 2412MHz Ant1

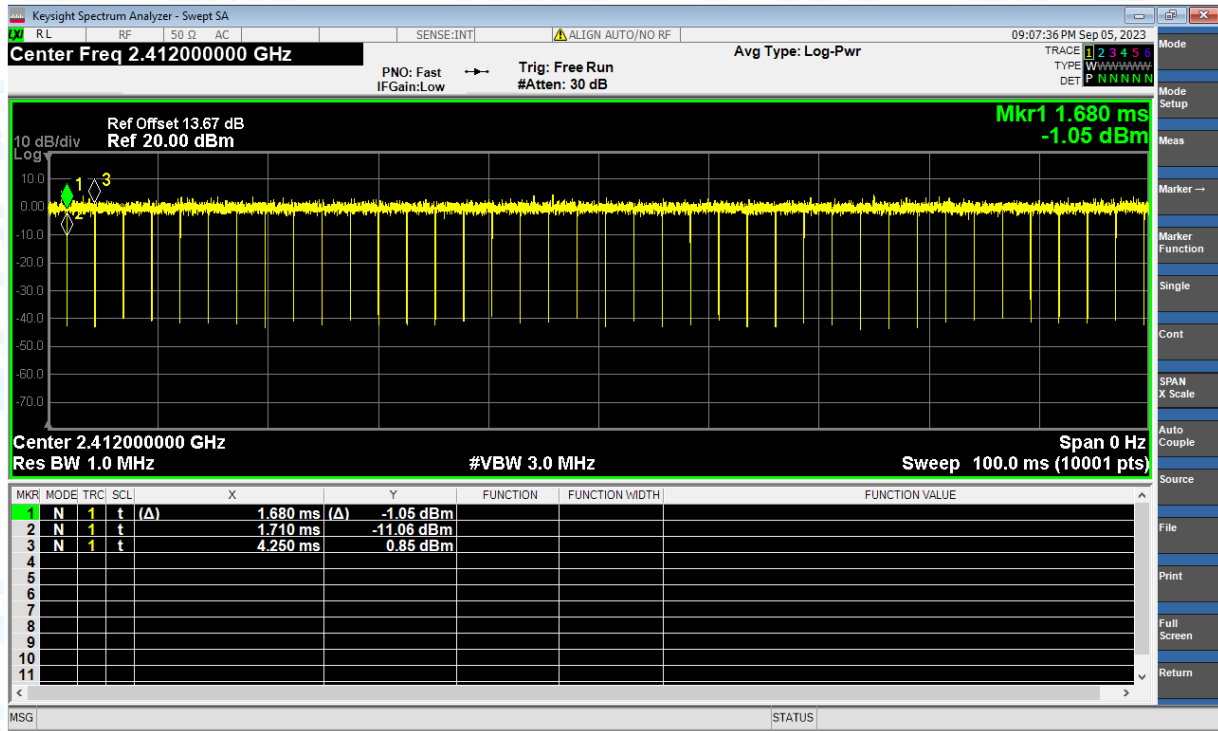

Duty Cycle NVNT n(HT20) 2437MHz Ant1

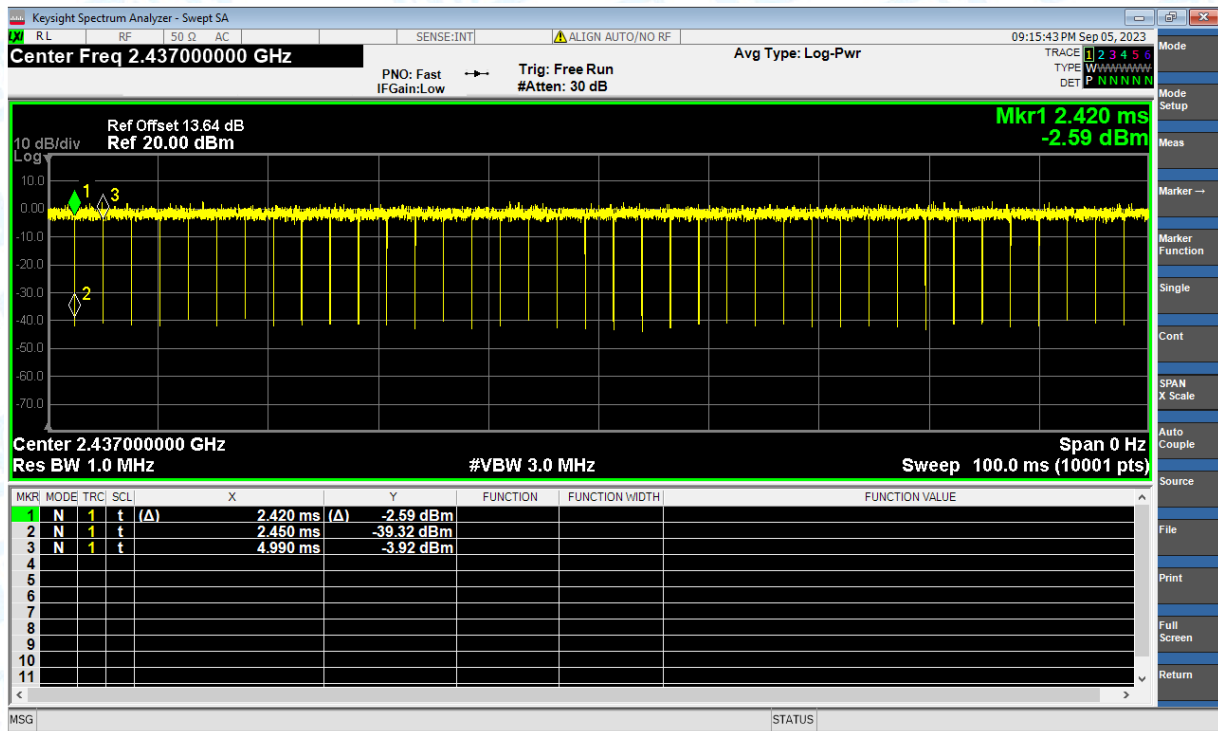

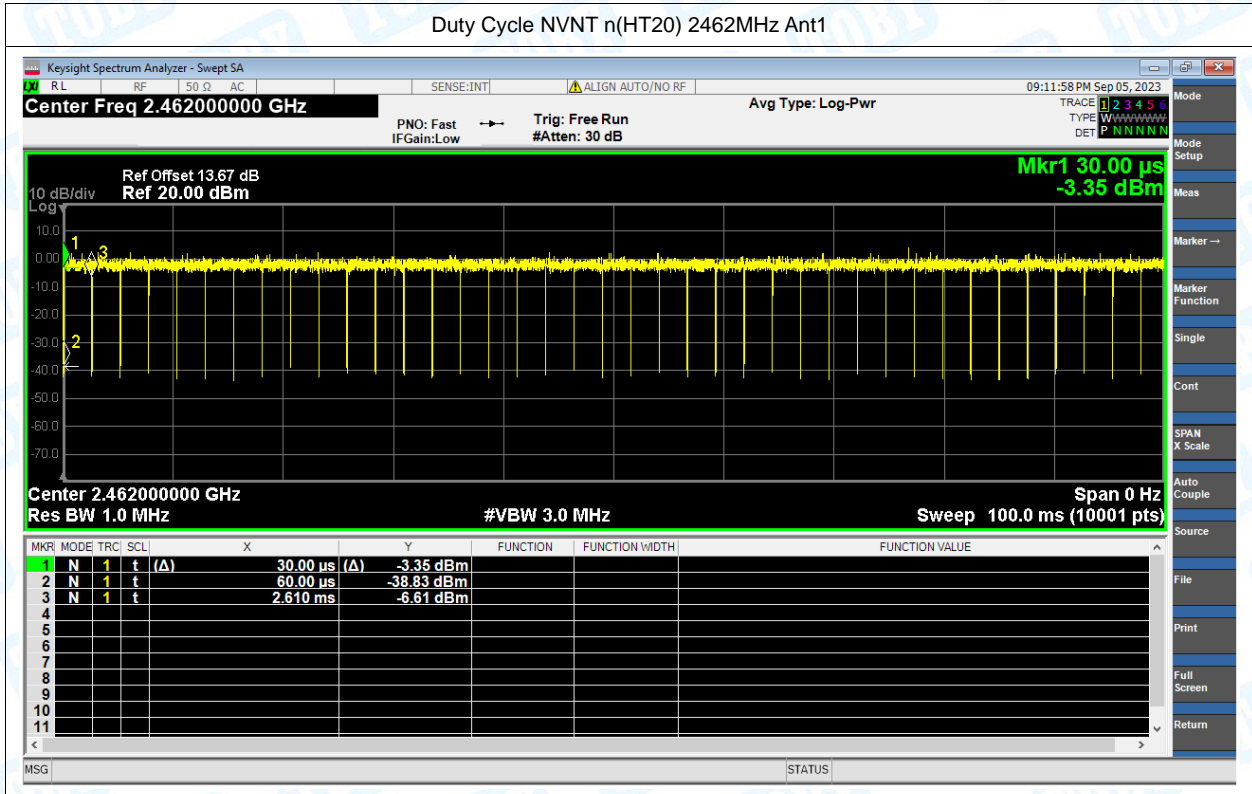


Maximum Conducted Output Power


| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|---------|-----------------|---------|-----------------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | 12.42 | 30 | Pass |
| NVNT | b | 2437 | Ant1 | 11.559 | 30 | Pass |
| NVNT | b | 2462 | Ant1 | 11.094 | 30 | Pass |
| NVNT | g | 2412 | Ant1 | 9.362 | 30 | Pass |
| NVNT | g | 2437 | Ant1 | 8.219 | 30 | Pass |
| NVNT | g | 2462 | Ant1 | 7.129 | 30 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 7.889 | 30 | Pass |
| NVNT | n(HT20) | 2437 | Ant1 | 6.538 | 30 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 6.128 | 30 | Pass |



Test Graphs



Power NVNT b 2412MHz Ant1

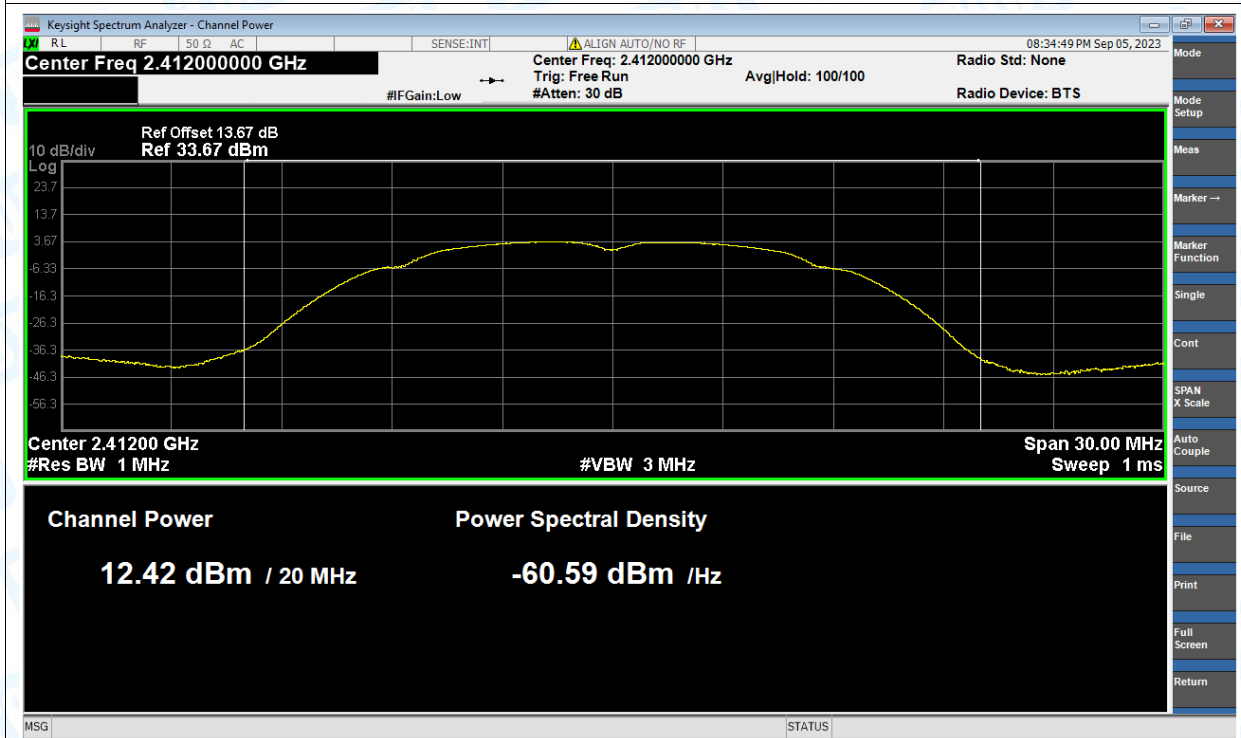


Power NVNT b 2437MHz Ant1

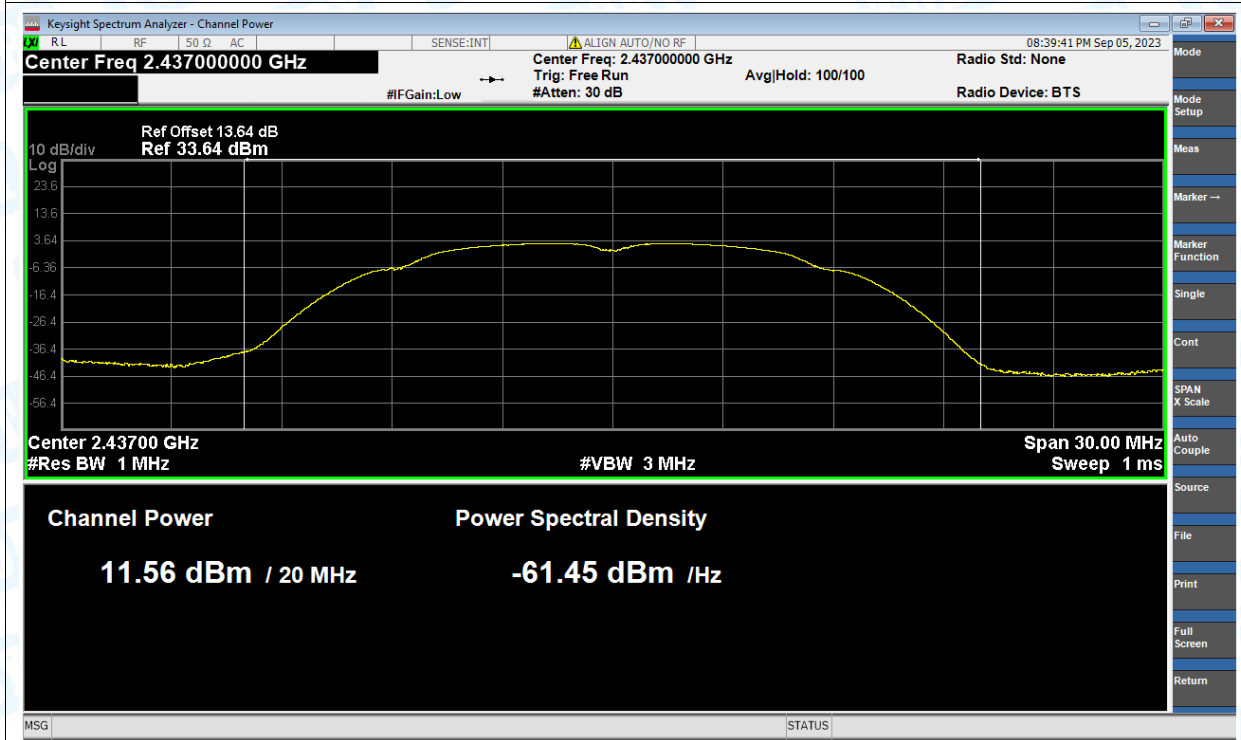

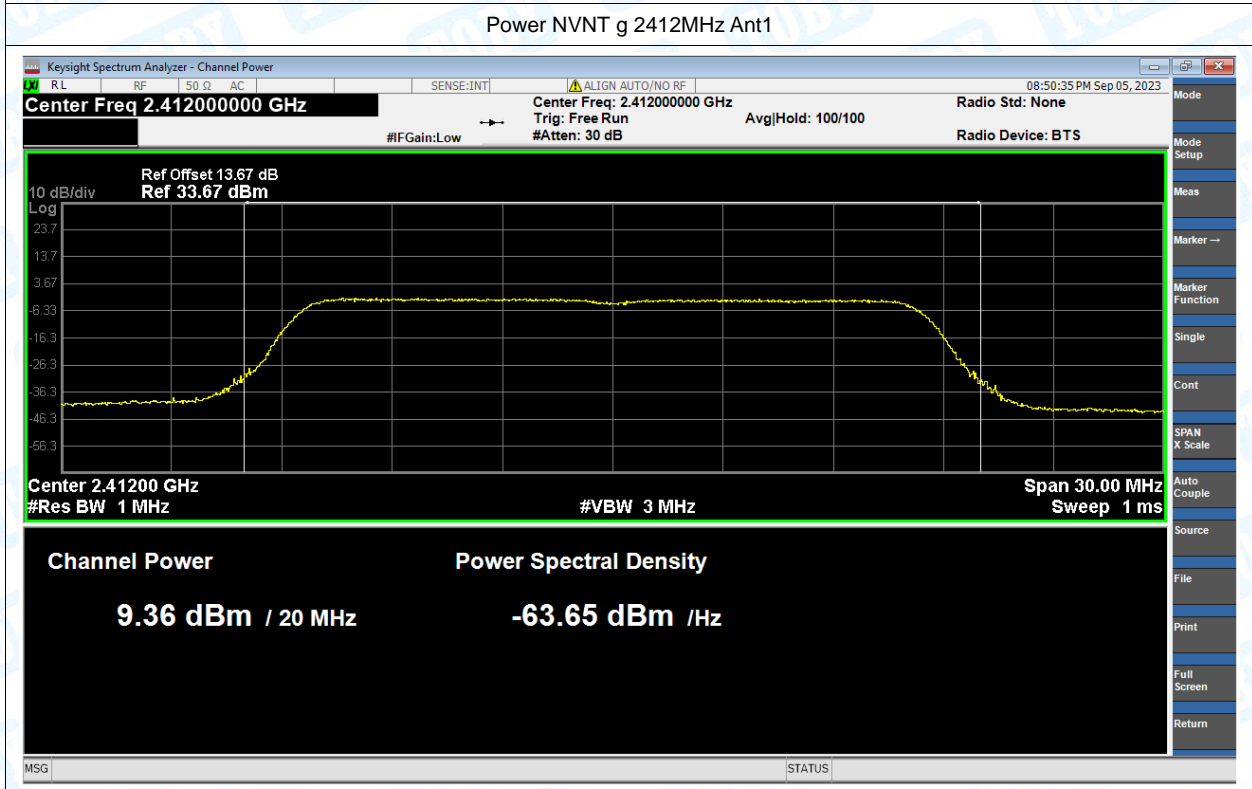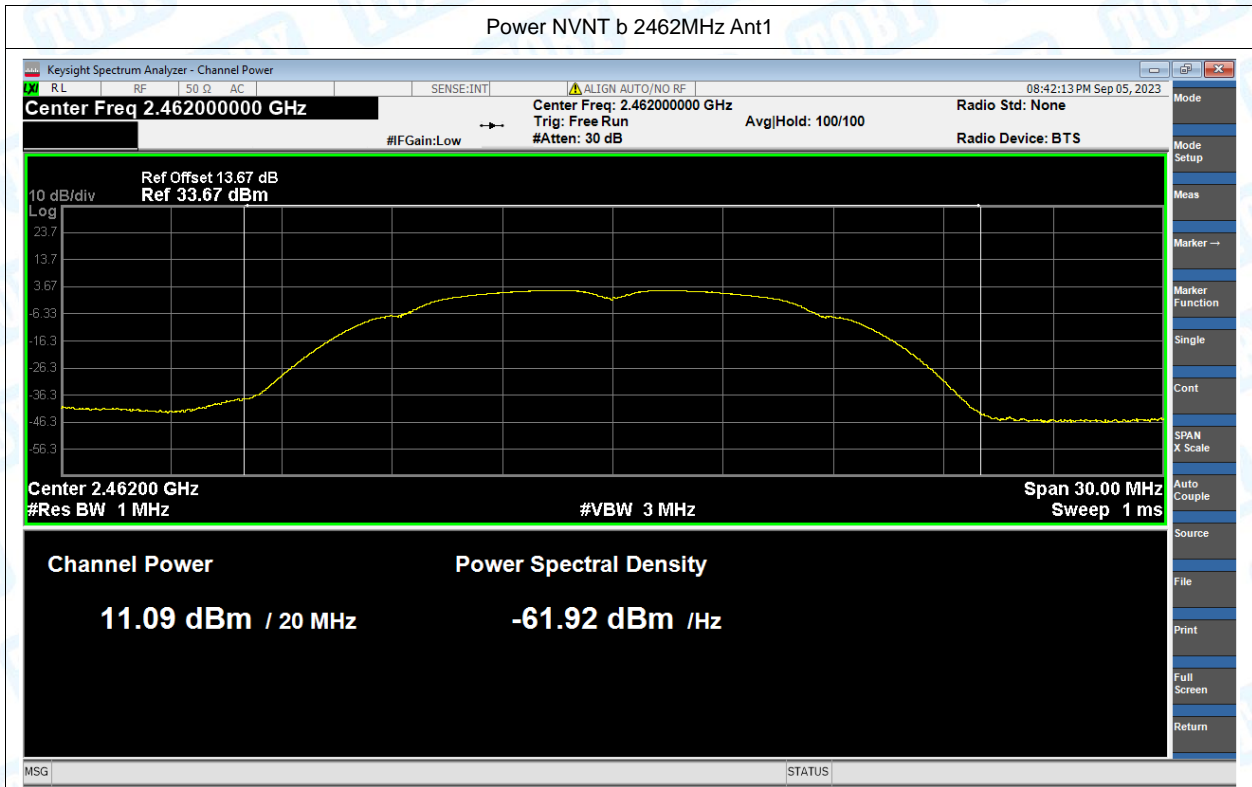


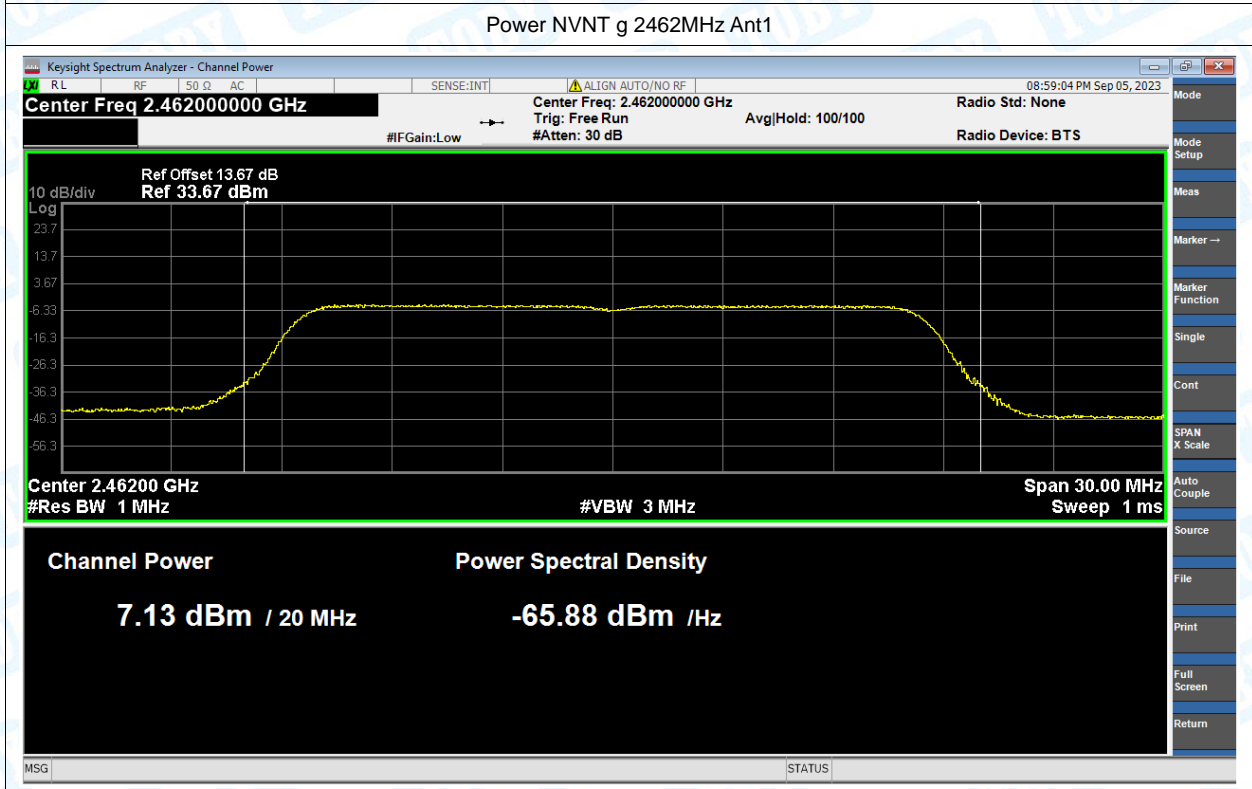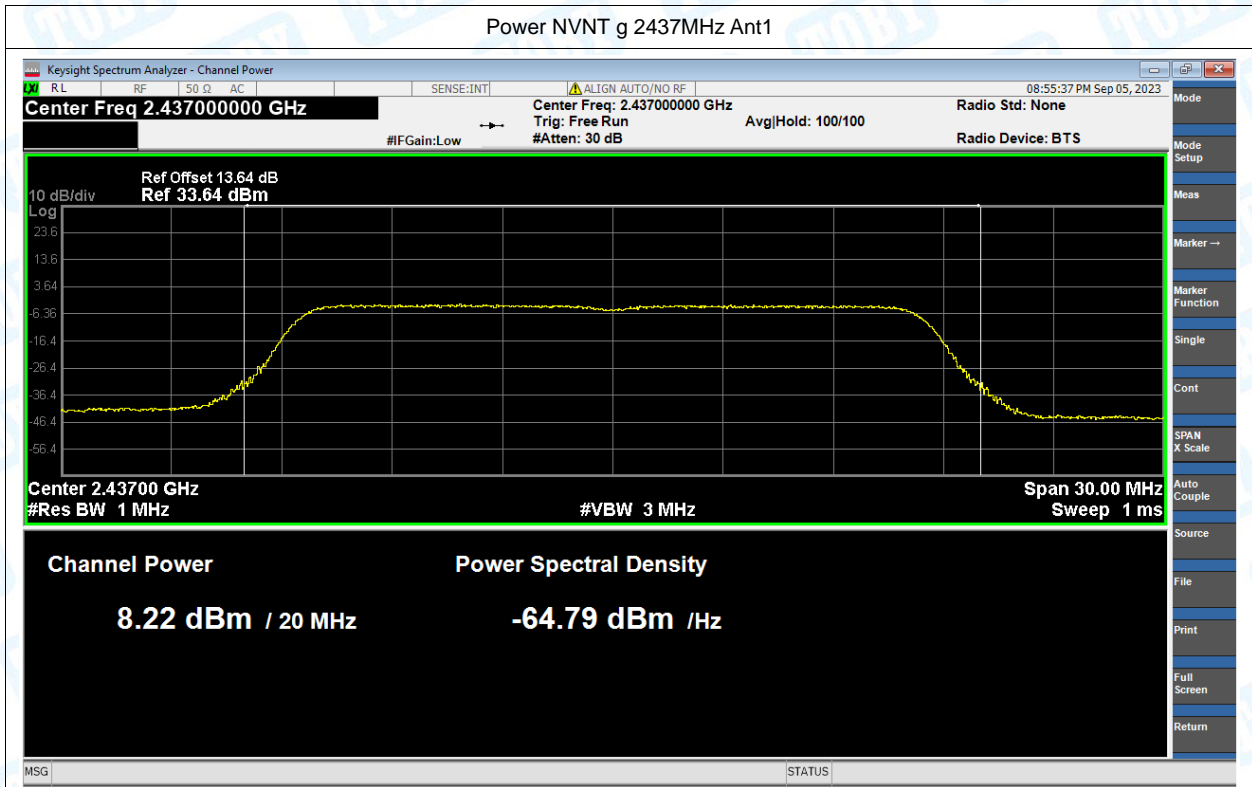


Power NVNT n(HT20) 2412MHz Ant1

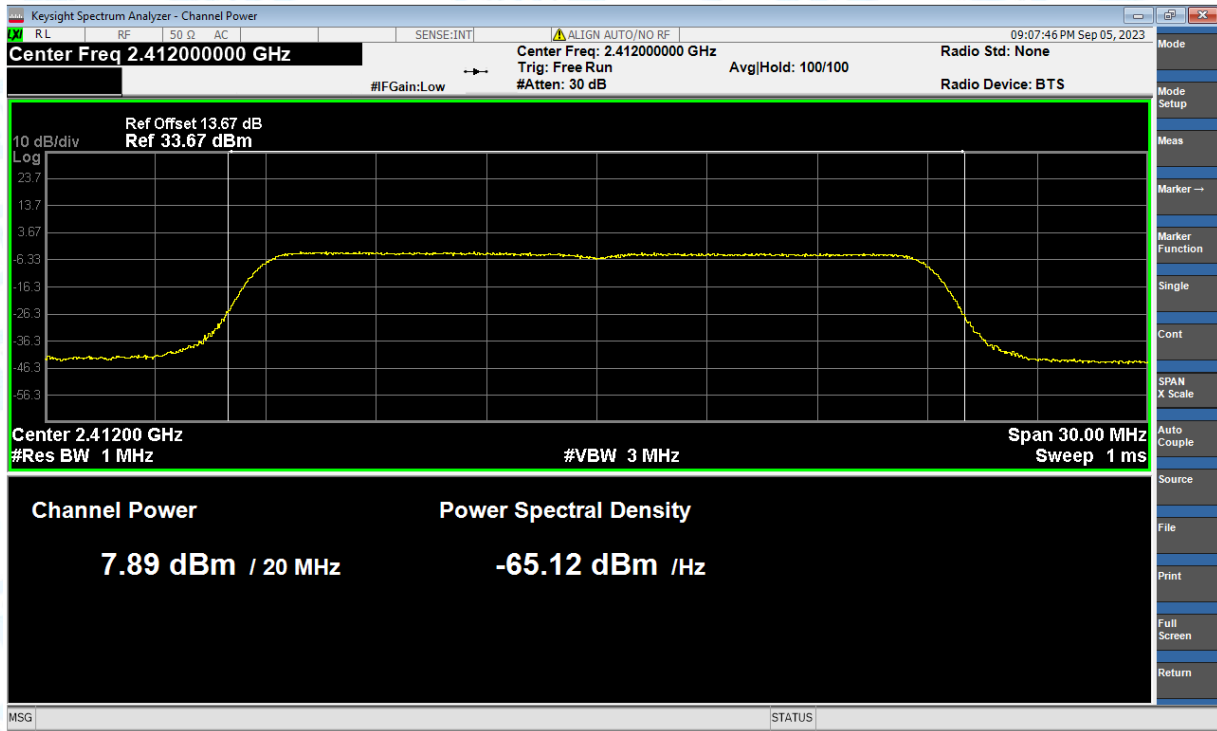

Power NVNT n(HT20) 2437MHz Ant1

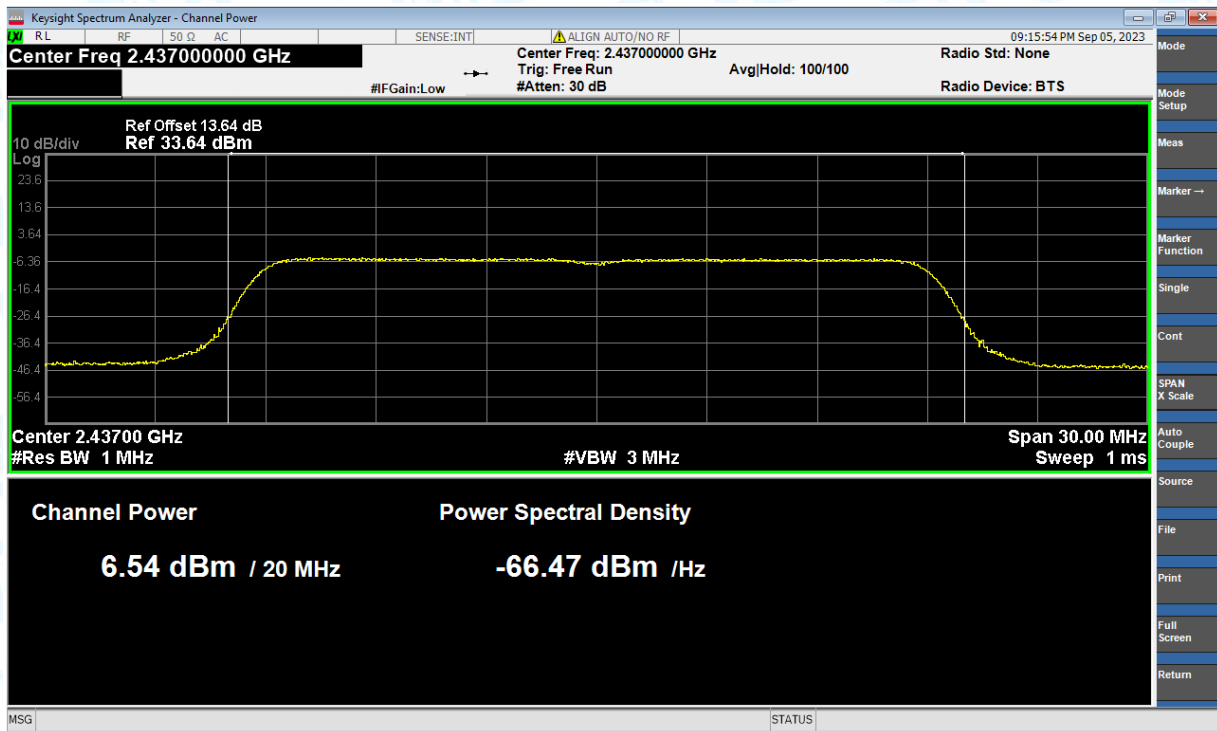

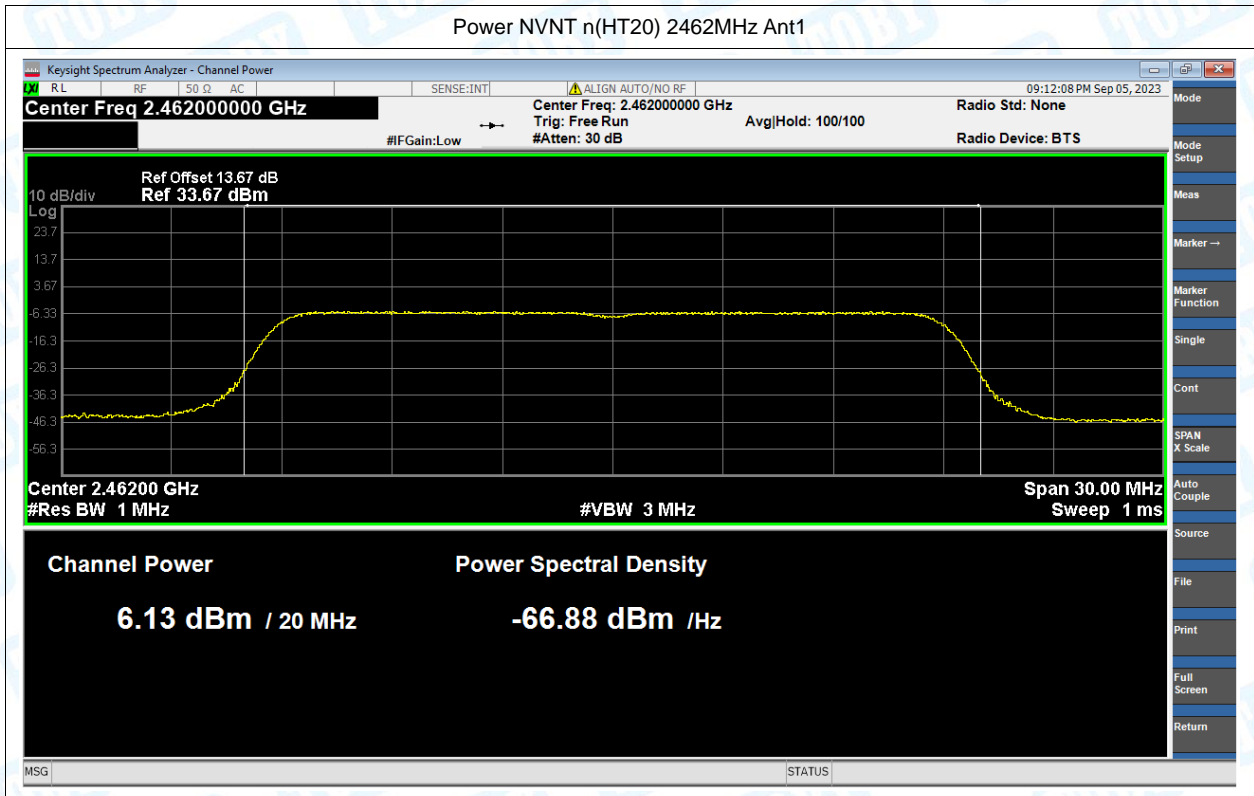


-6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|---------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT | b | 2412 | Ant1 | 10.1 | 0.5 | Pass |
| NVNT | b | 2437 | Ant1 | 10.06 | 0.5 | Pass |
| NVNT | b | 2462 | Ant1 | 10.04 | 0.5 | Pass |
| NVNT | g | 2412 | Ant1 | 16.38 | 0.5 | Pass |
| NVNT | g | 2437 | Ant1 | 16.4 | 0.5 | Pass |
| NVNT | g | 2462 | Ant1 | 16.35 | 0.5 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 17.59 | 0.5 | Pass |
| NVNT | n(HT20) | 2437 | Ant1 | 17.62 | 0.5 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 17.58 | 0.5 | Pass |

Test Graphs


-6dB Bandwidth NVNT b 2412MHz Ant1

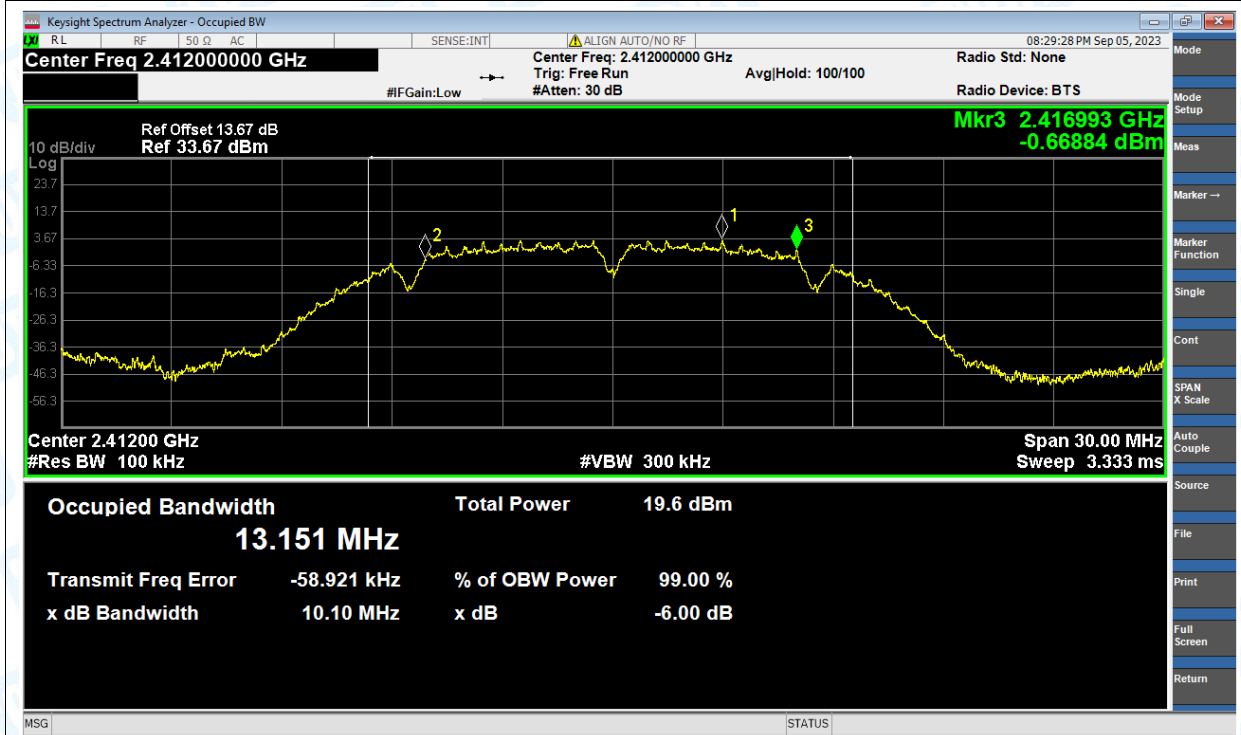


-6dB Bandwidth NVNT b 2437MHz Ant1

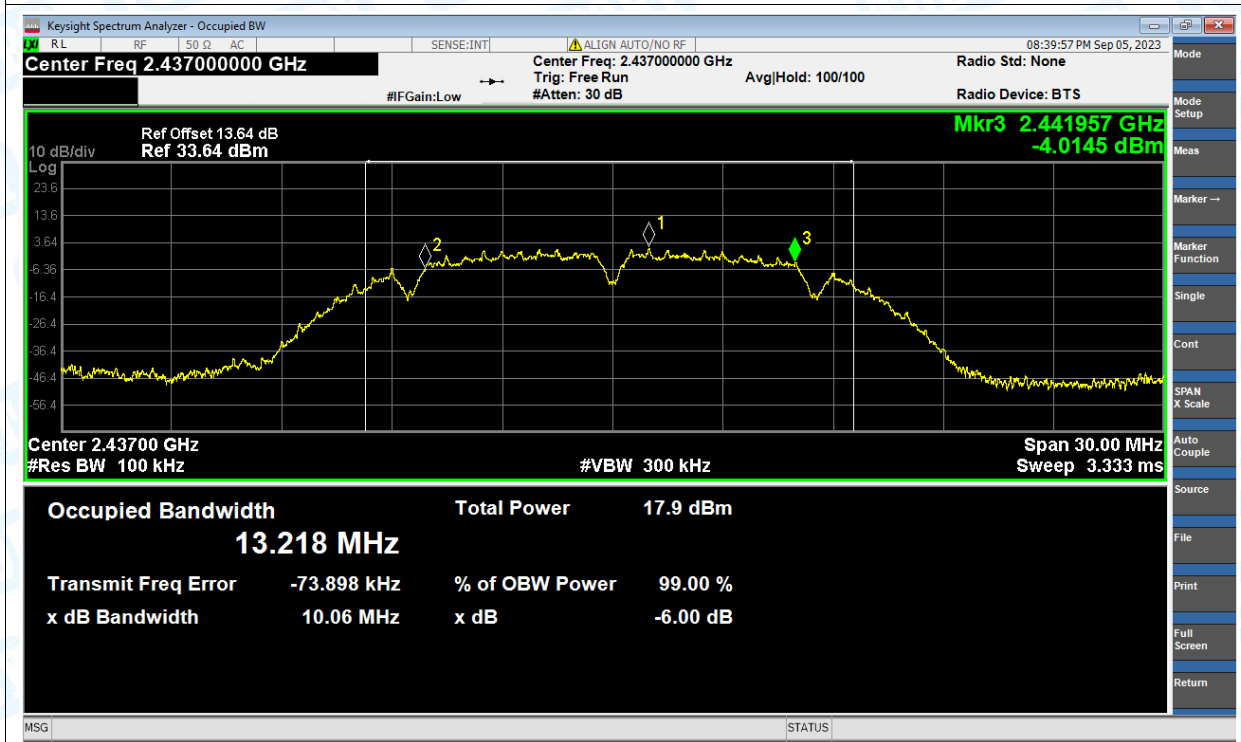


-6dB Bandwidth NVNT b 2462MHz Ant1

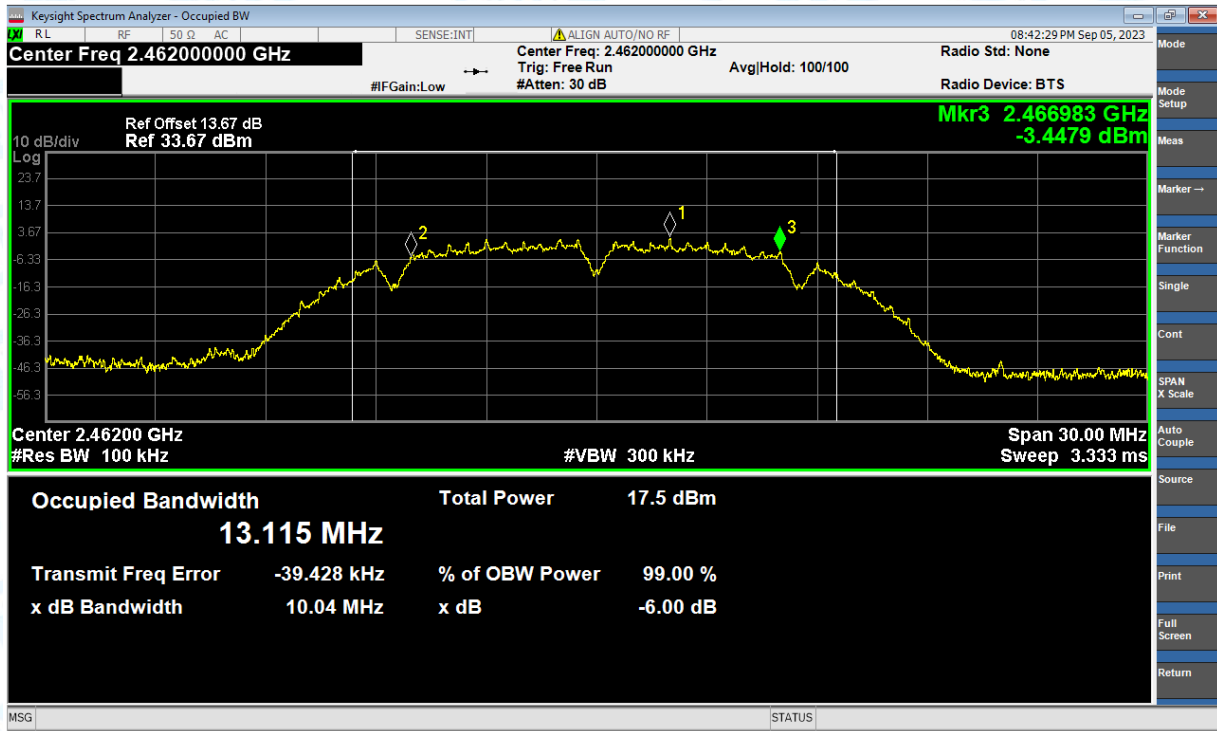


-6dB Bandwidth NVNT g 2412MHz Ant1

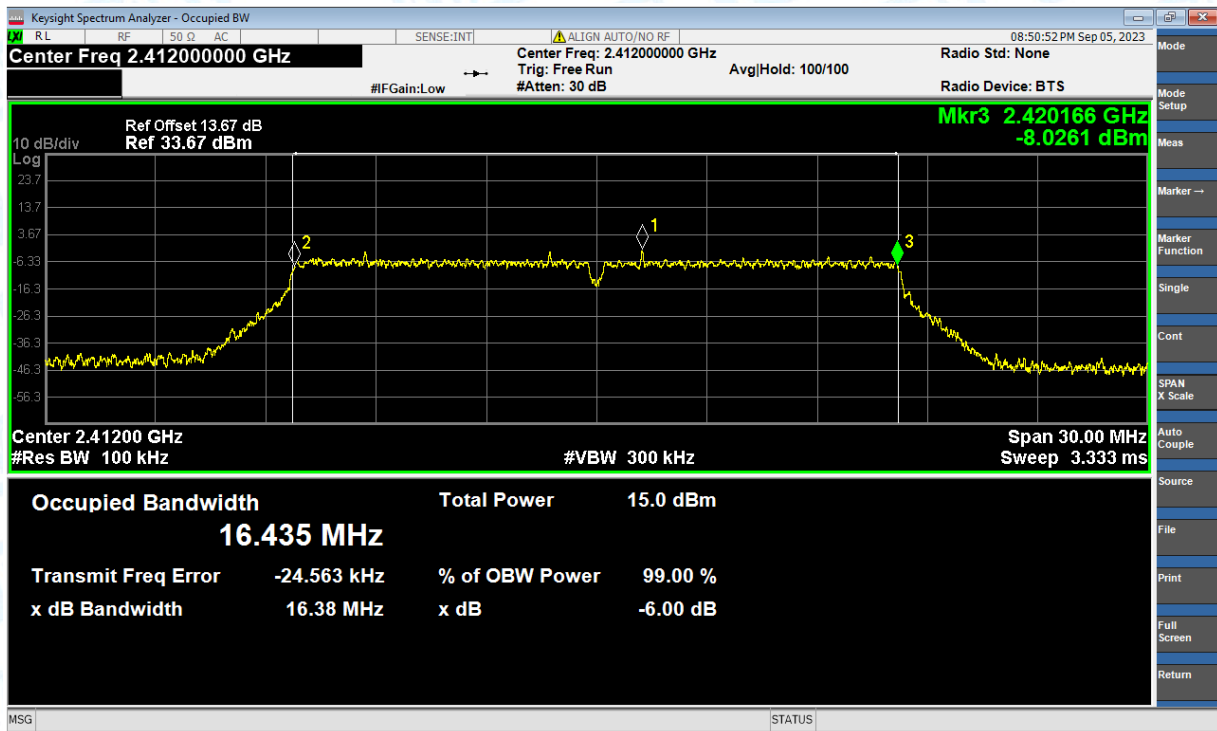


-6dB Bandwidth NVNT g 2437MHz Ant1

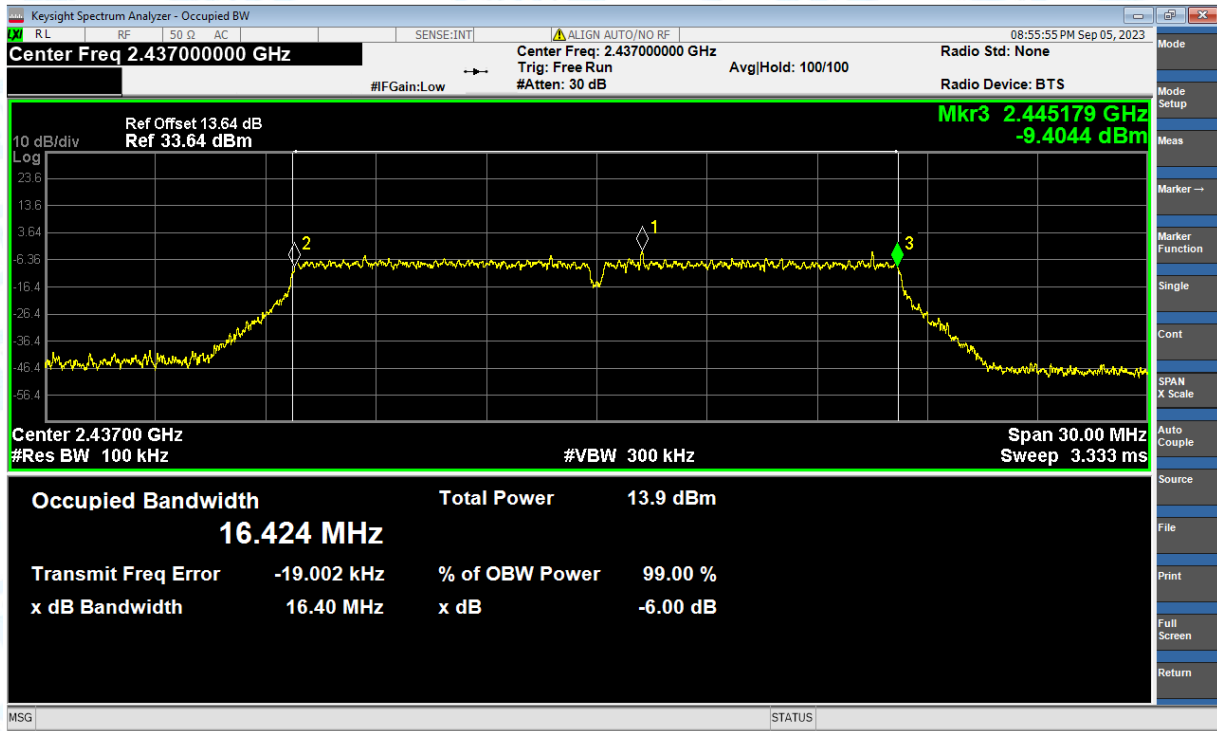


-6dB Bandwidth NVNT g 2462MHz Ant1

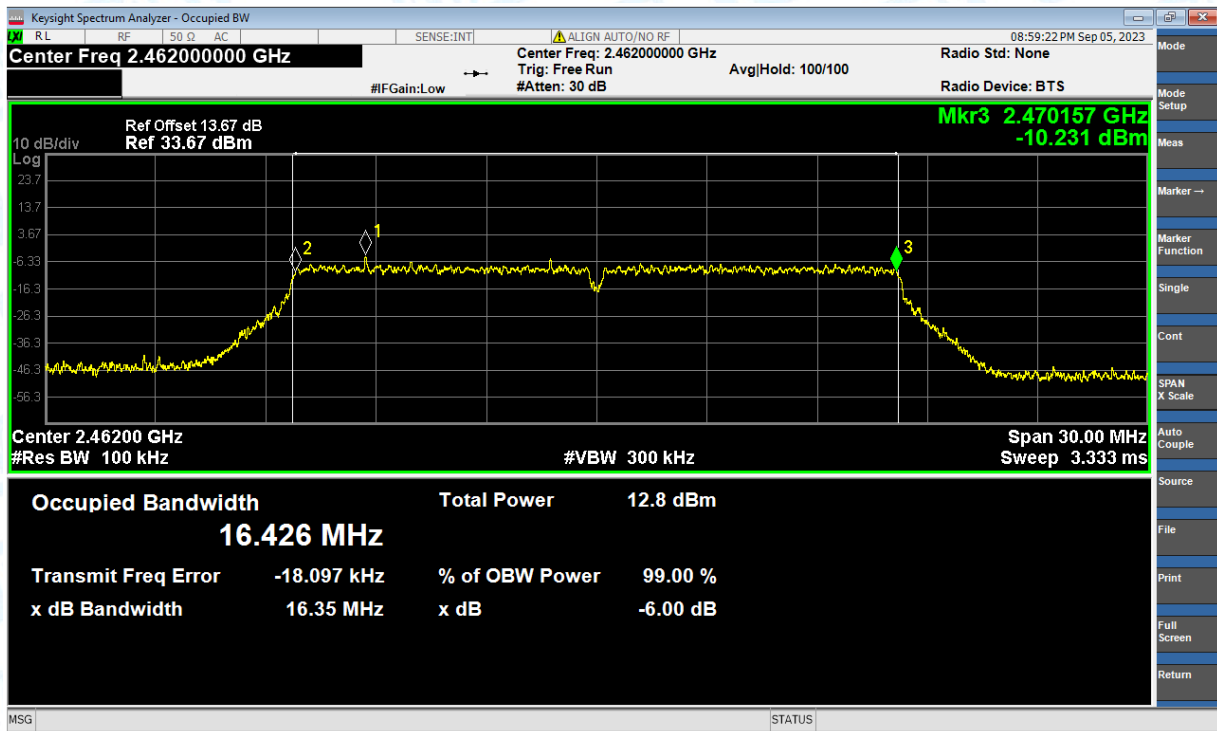


-6dB Bandwidth NVNT n(HT20) 2412MHz Ant1

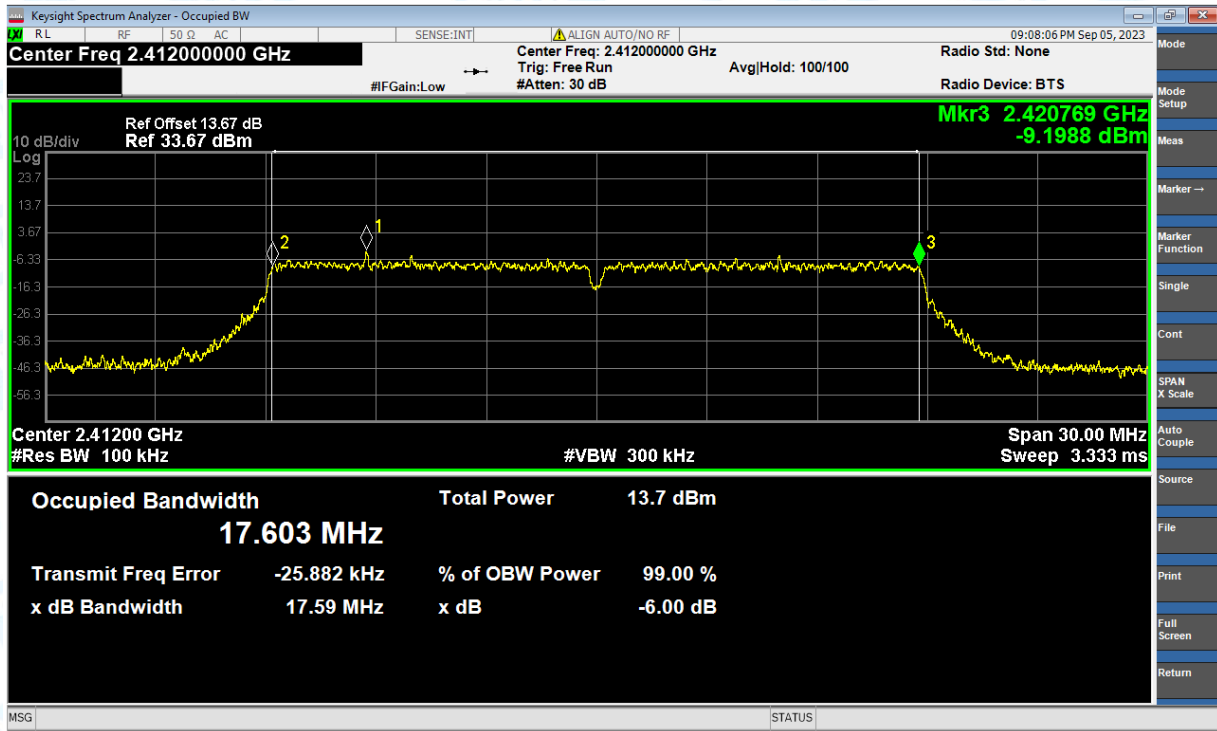

-6dB Bandwidth NVNT n(HT20) 2437MHz Ant1

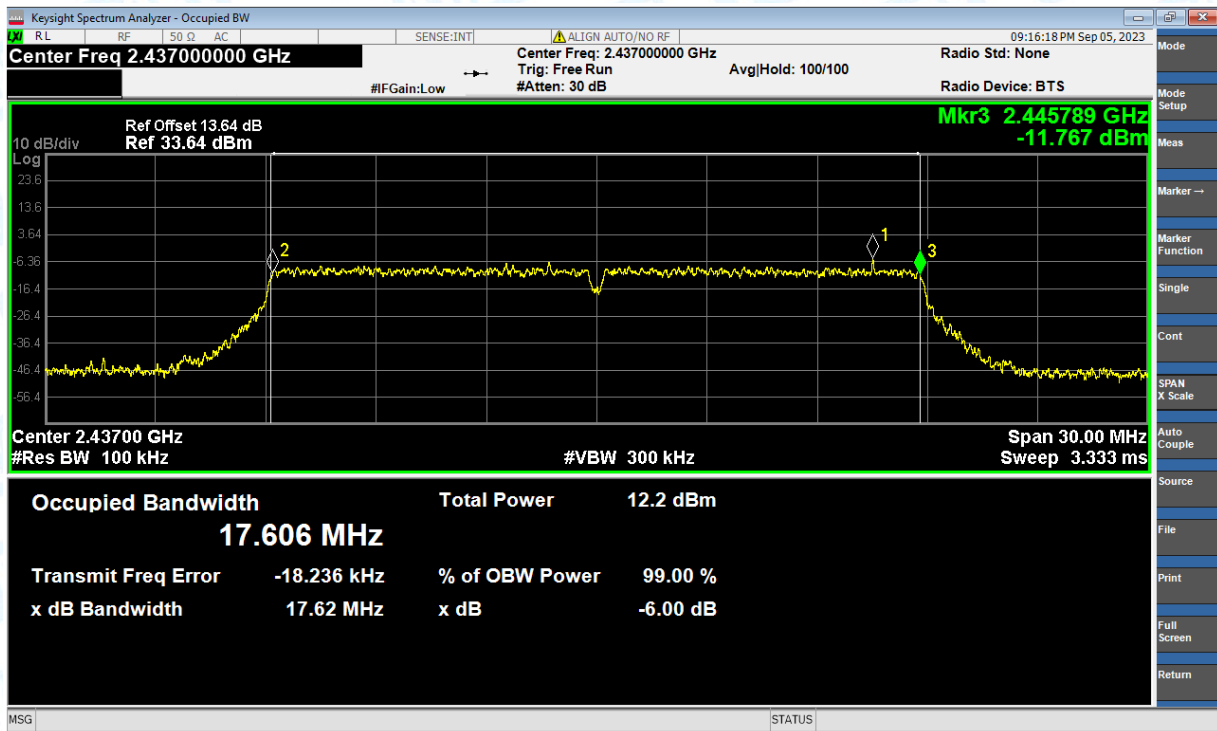

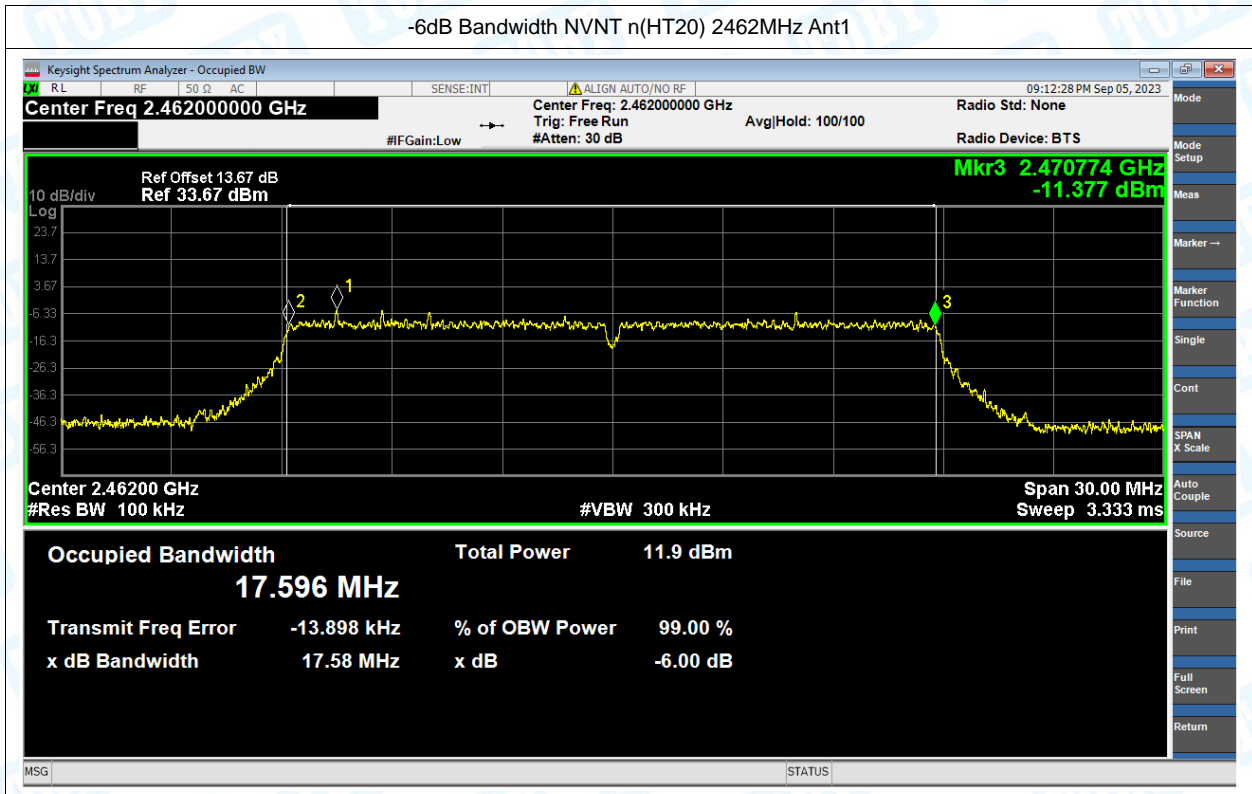


Occupied Channel Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|---------|-----------------|---------|---------------|
| NVNT | b | 2412 | Ant1 | 13.165 |
| NVNT | b | 2437 | Ant1 | 13.16 |
| NVNT | b | 2462 | Ant1 | 13.139 |
| NVNT | g | 2412 | Ant1 | 16.484 |
| NVNT | g | 2437 | Ant1 | 16.492 |
| NVNT | g | 2462 | Ant1 | 16.477 |
| NVNT | n(HT20) | 2412 | Ant1 | 17.61 |
| NVNT | n(HT20) | 2437 | Ant1 | 17.609 |
| NVNT | n(HT20) | 2462 | Ant1 | 17.623 |

Test Graphs


OBW NVNT b 2412MHz Ant1

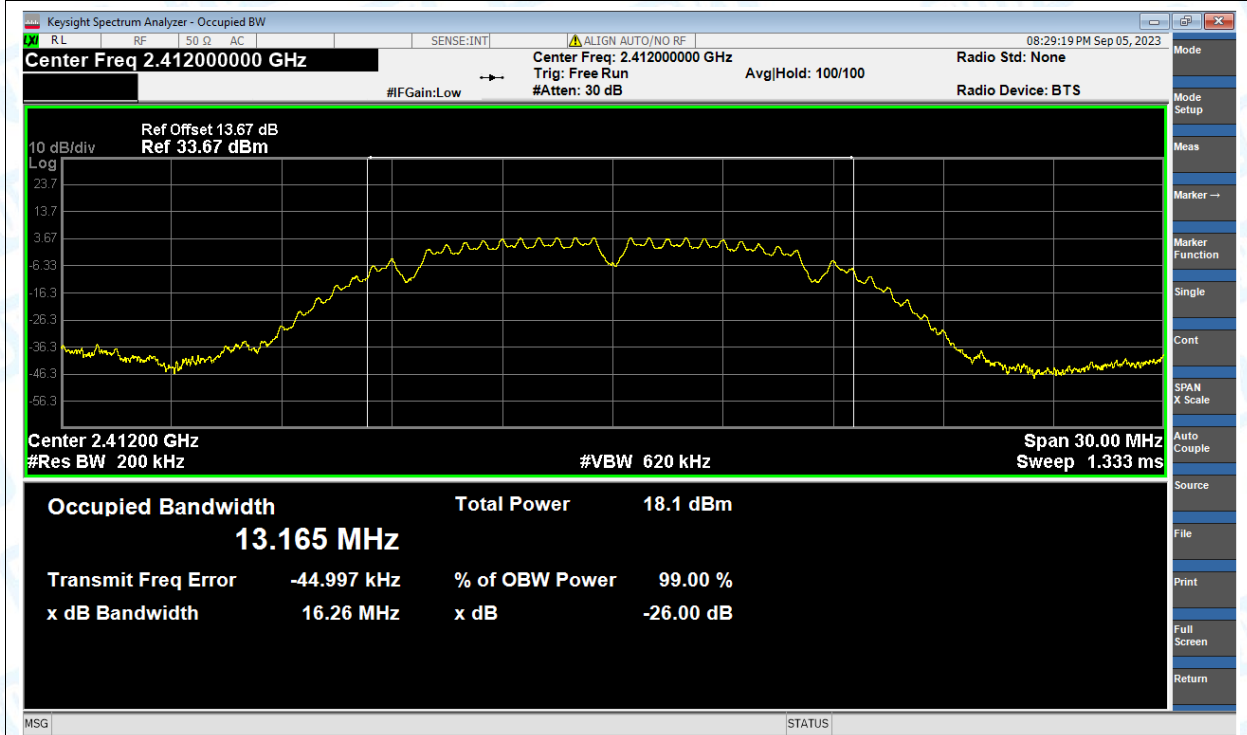


OBW NVNT b 2437MHz Ant1

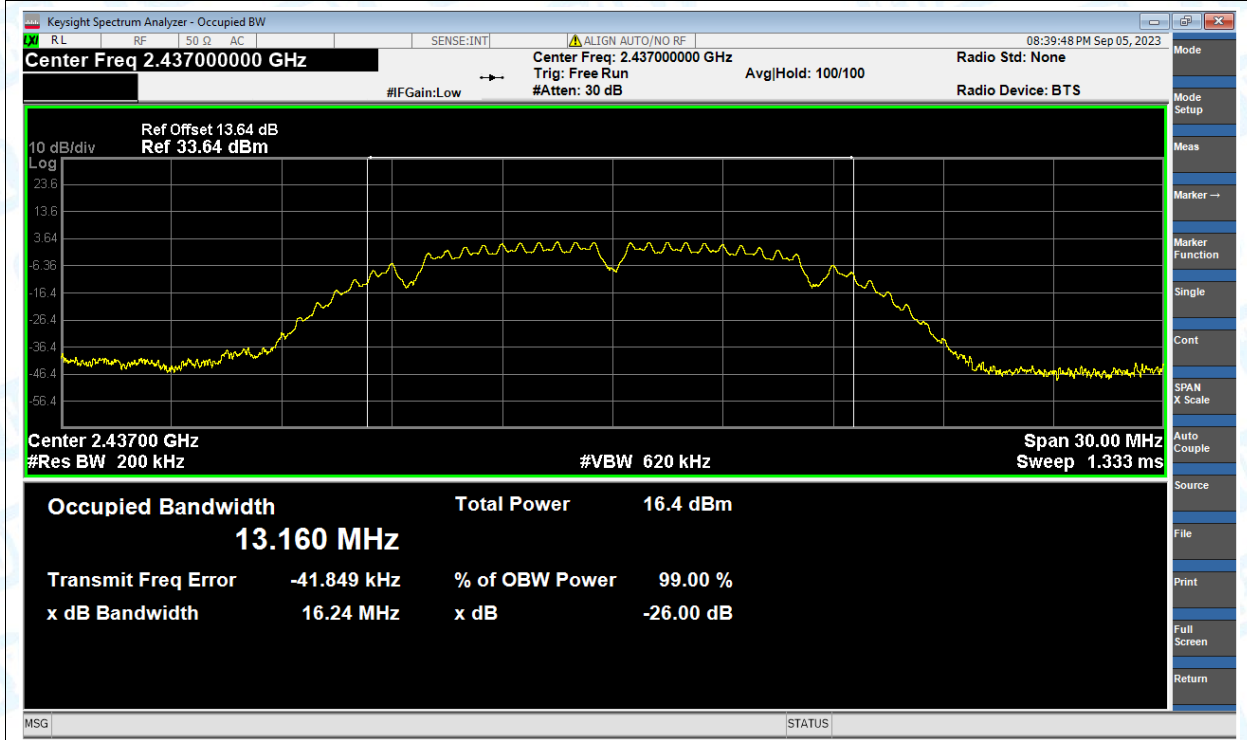


OBW NVNT b 2462MHz Ant1

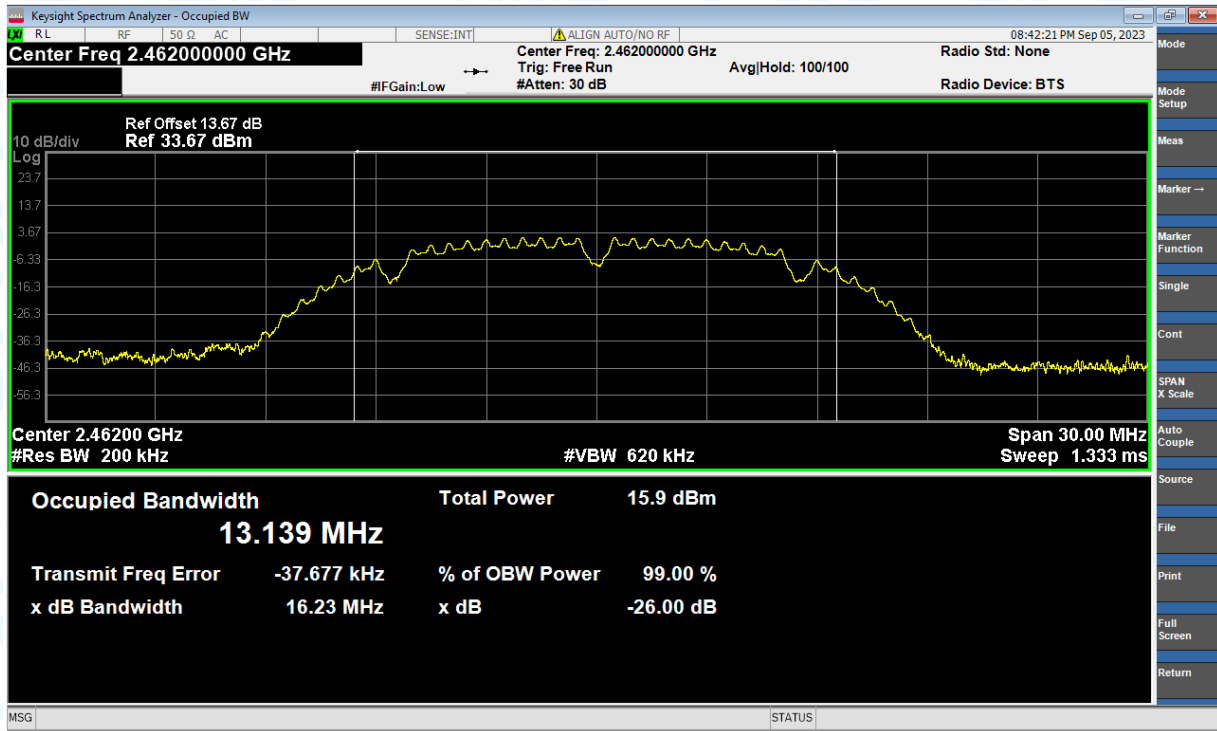


OBW NVNT g 2412MHz Ant1

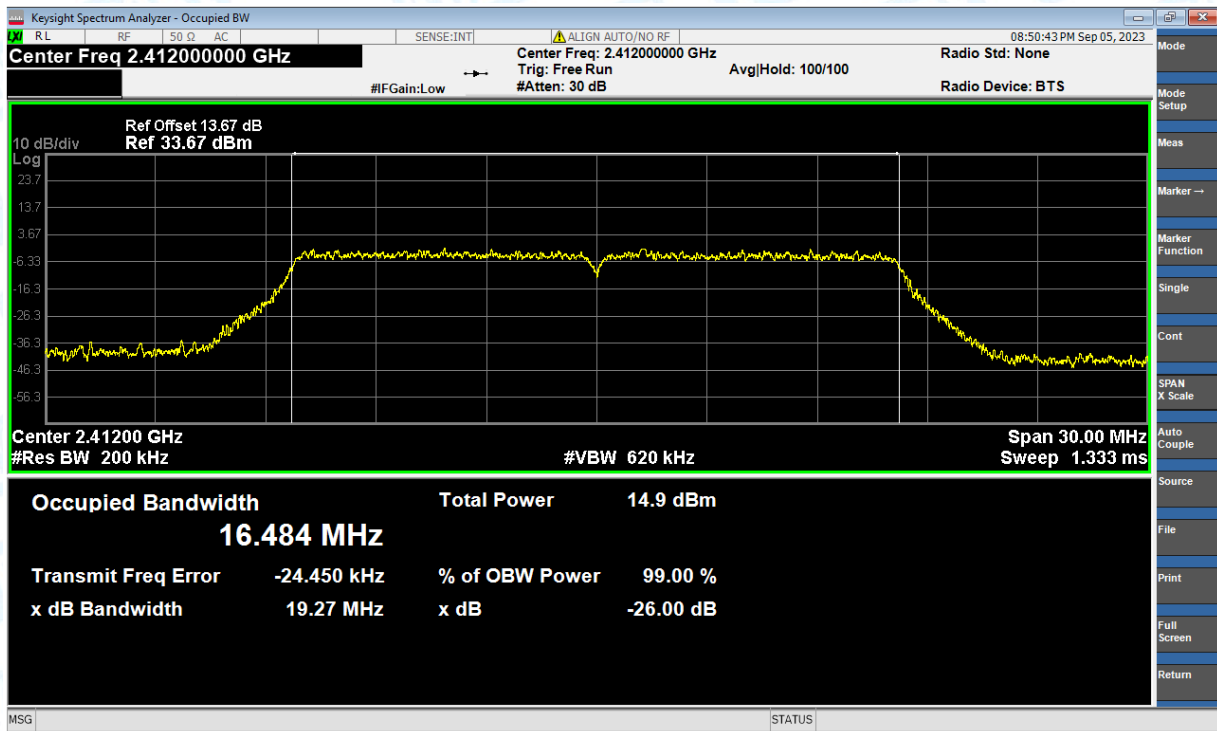


OBW NVNT g 2437MHz Ant1

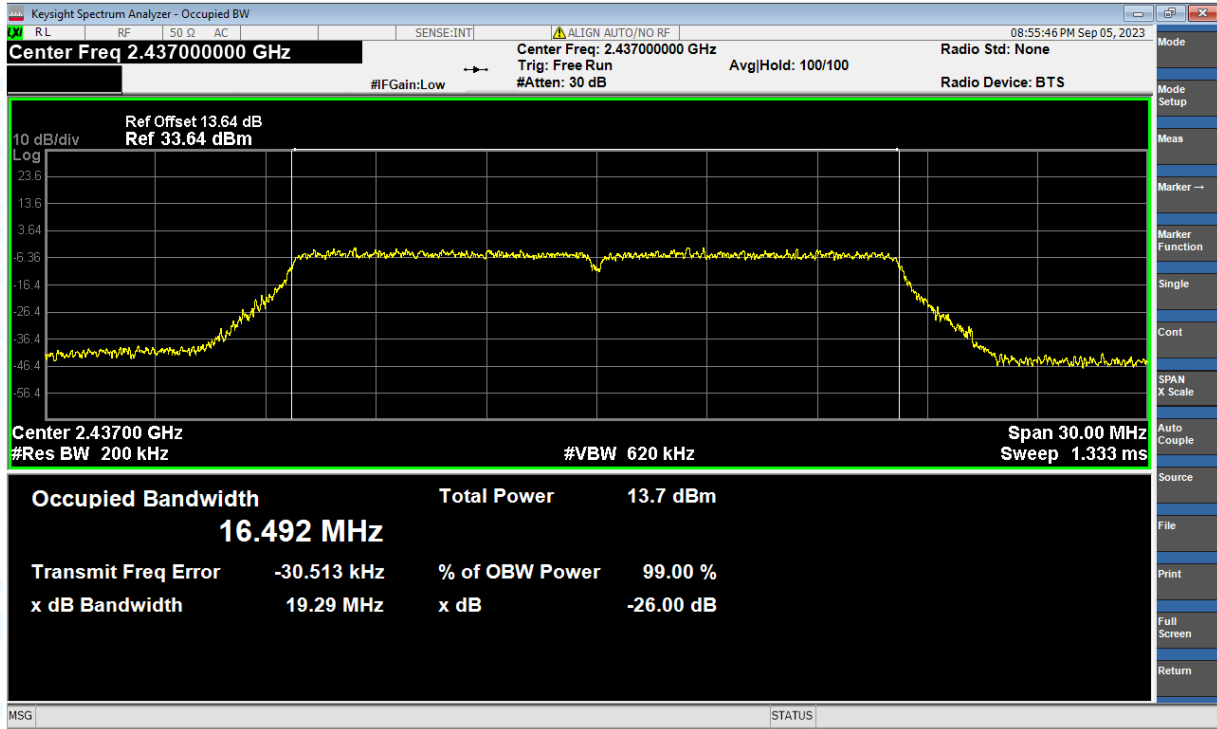


OBW NVNT g 2462MHz Ant1

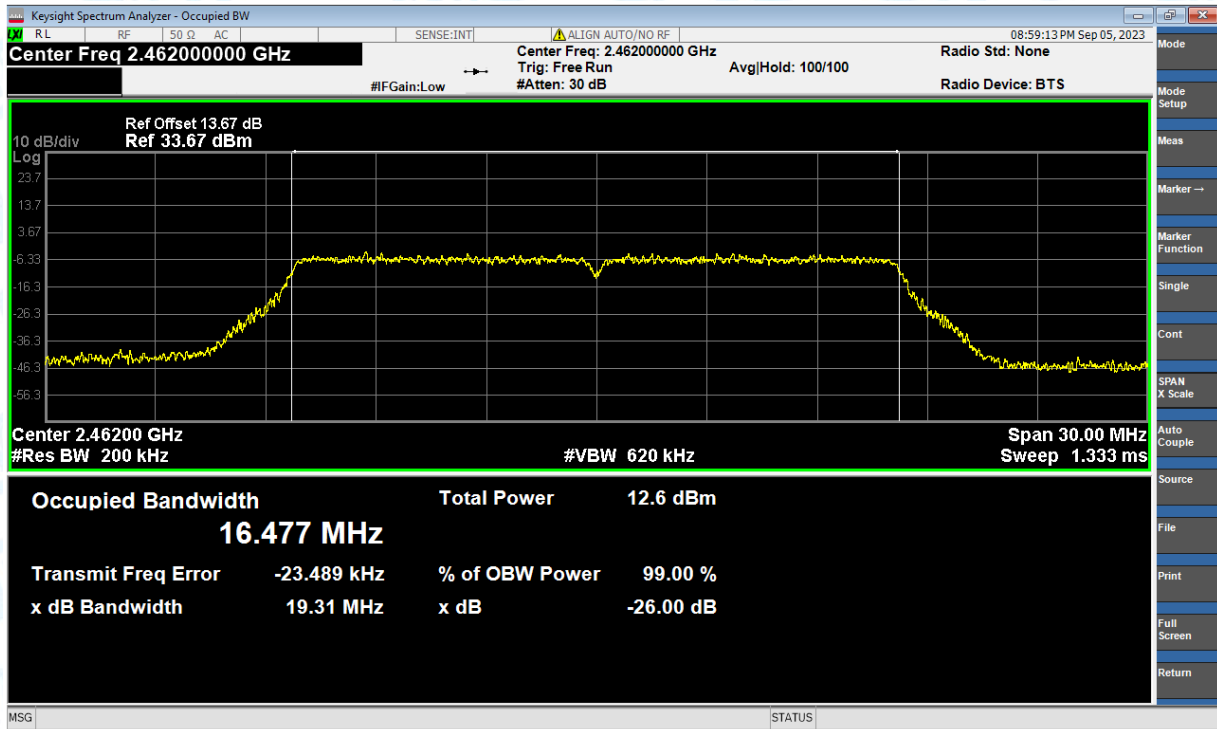


OBW NVNT n(HT20) 2412MHz Ant1

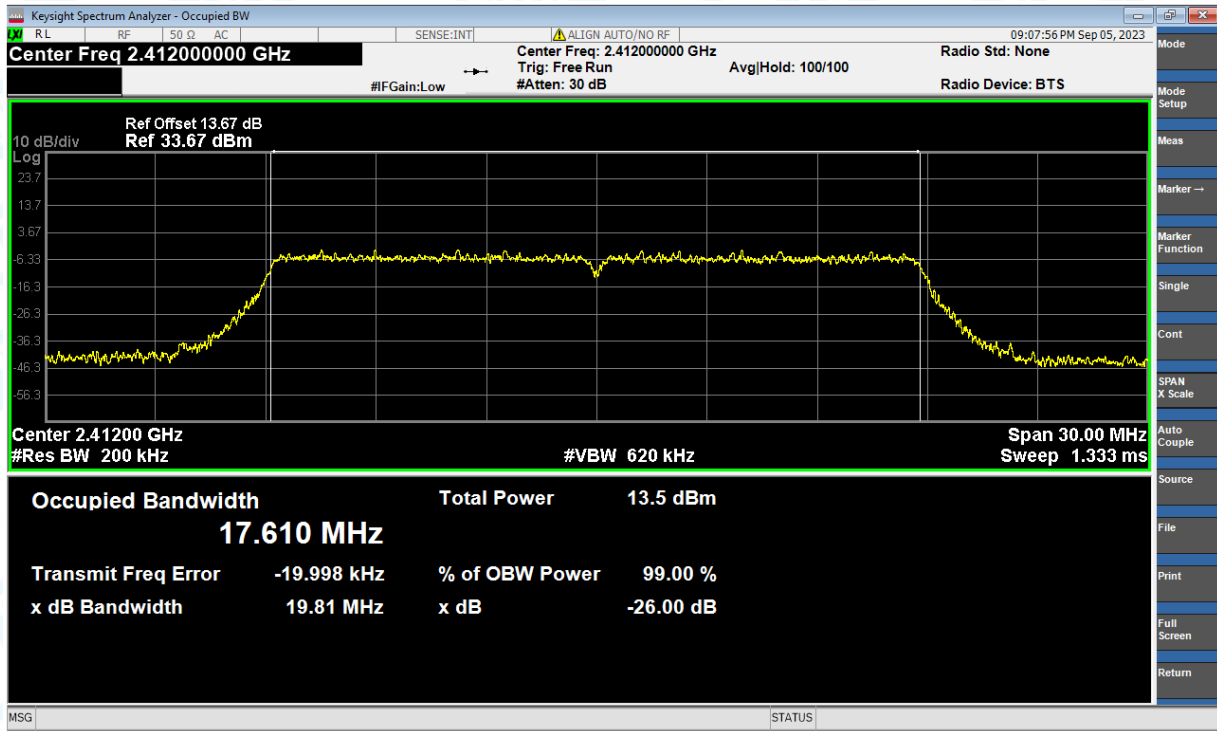

OBW NVNT n(HT20) 2437MHz Ant1

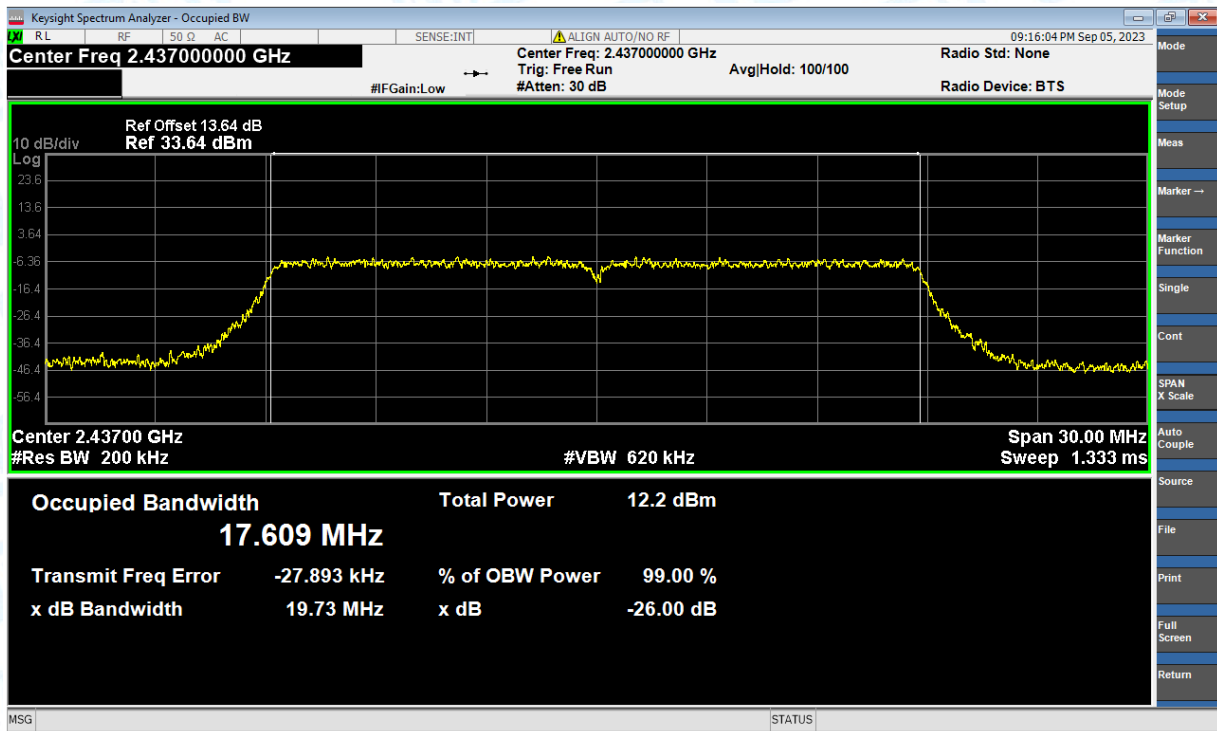

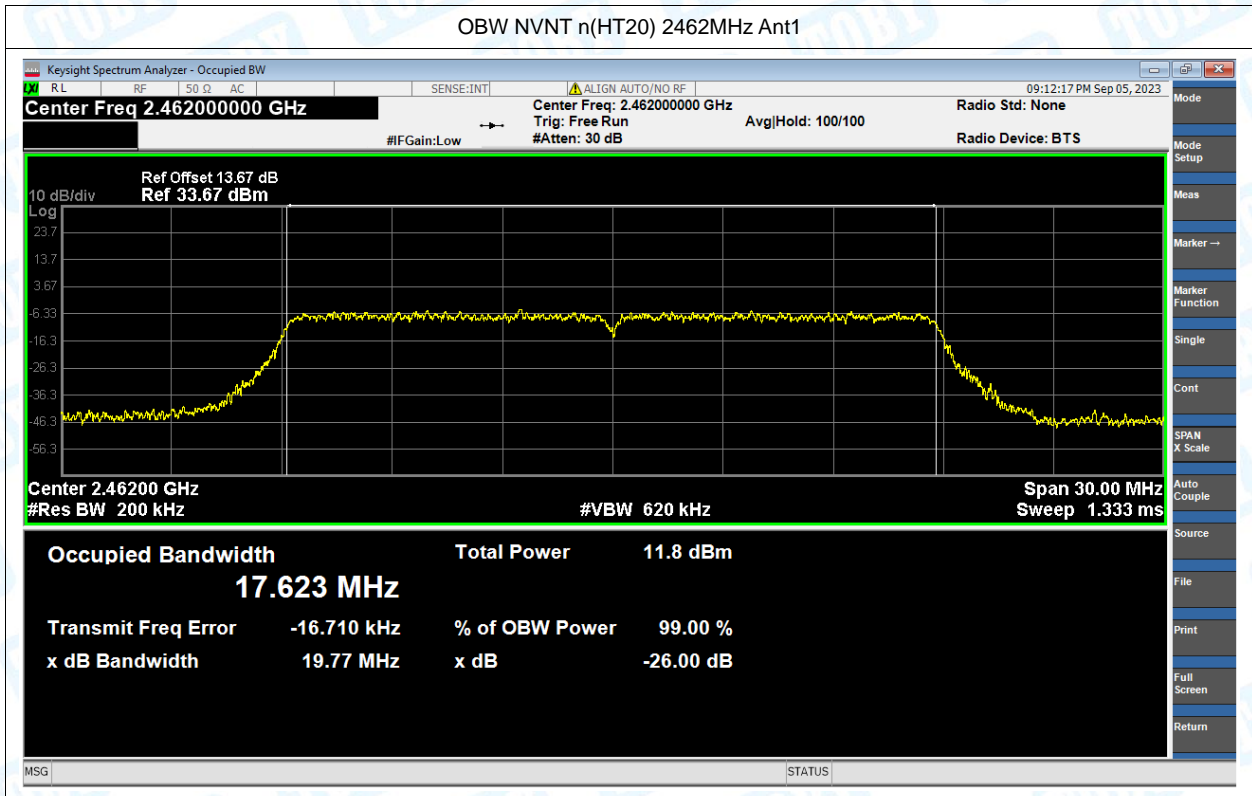


Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|---------|-----------------|---------|---------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | -10.404 | 8 | Pass |
| NVNT | b | 2437 | Ant1 | -12.073 | 8 | Pass |
| NVNT | b | 2462 | Ant1 | -12.09 | 8 | Pass |
| NVNT | g | 2412 | Ant1 | -15.143 | 8 | Pass |
| NVNT | g | 2437 | Ant1 | -16.936 | 8 | Pass |
| NVNT | g | 2462 | Ant1 | -18.182 | 8 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | -17.531 | 8 | Pass |
| NVNT | n(HT20) | 2437 | Ant1 | -16.676 | 8 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | -19.584 | 8 | Pass |



Test Graphs

PSD NVNT b 2412MHz Ant1

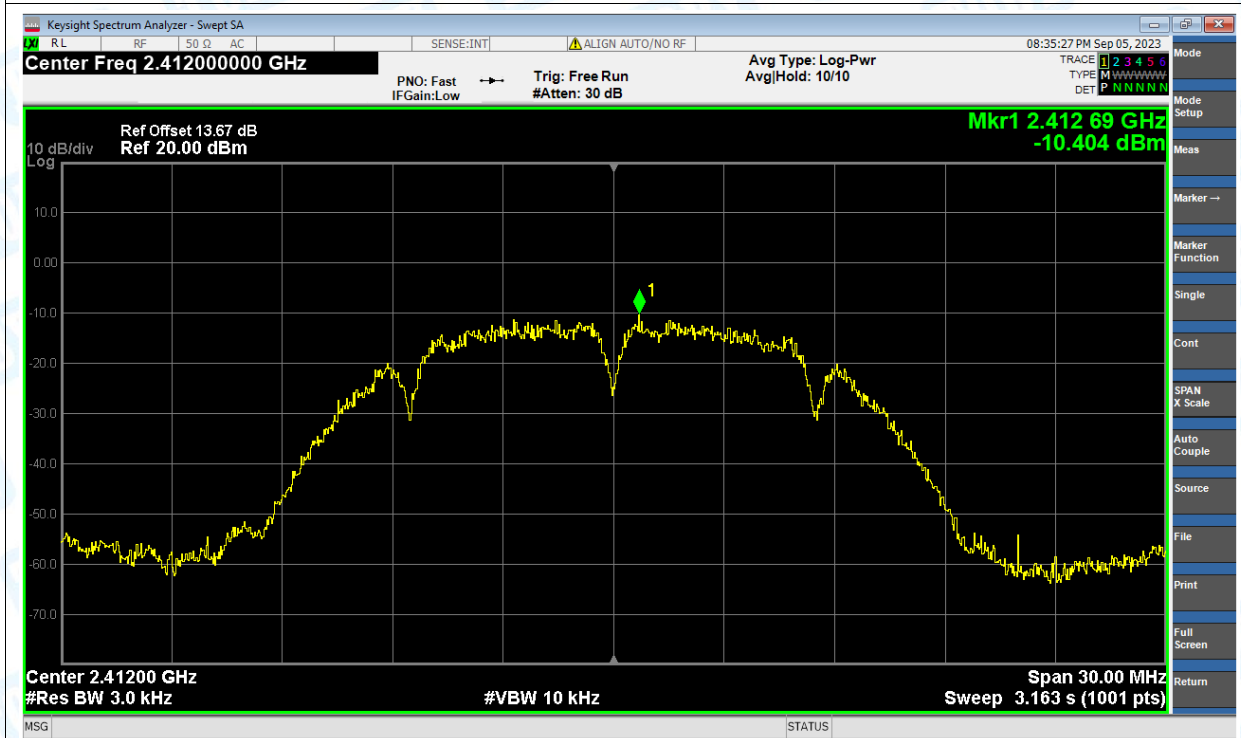


PSD NVNT b 2437MHz Ant1

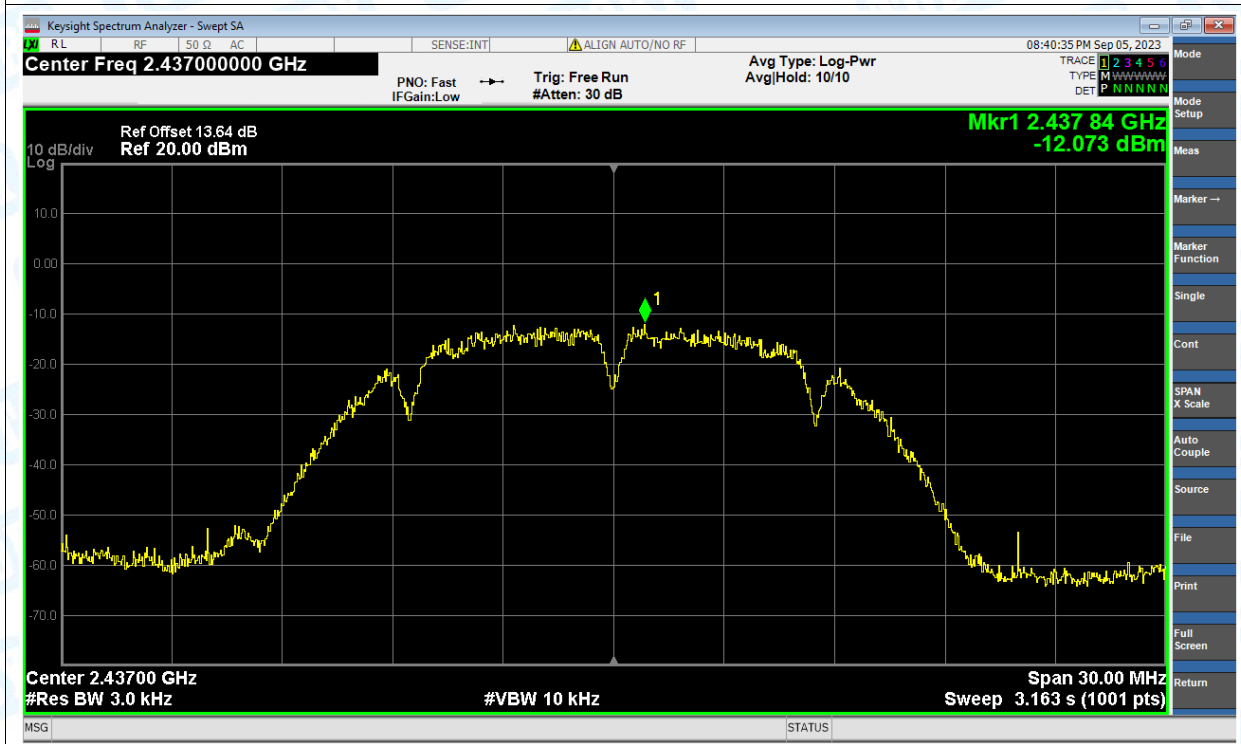


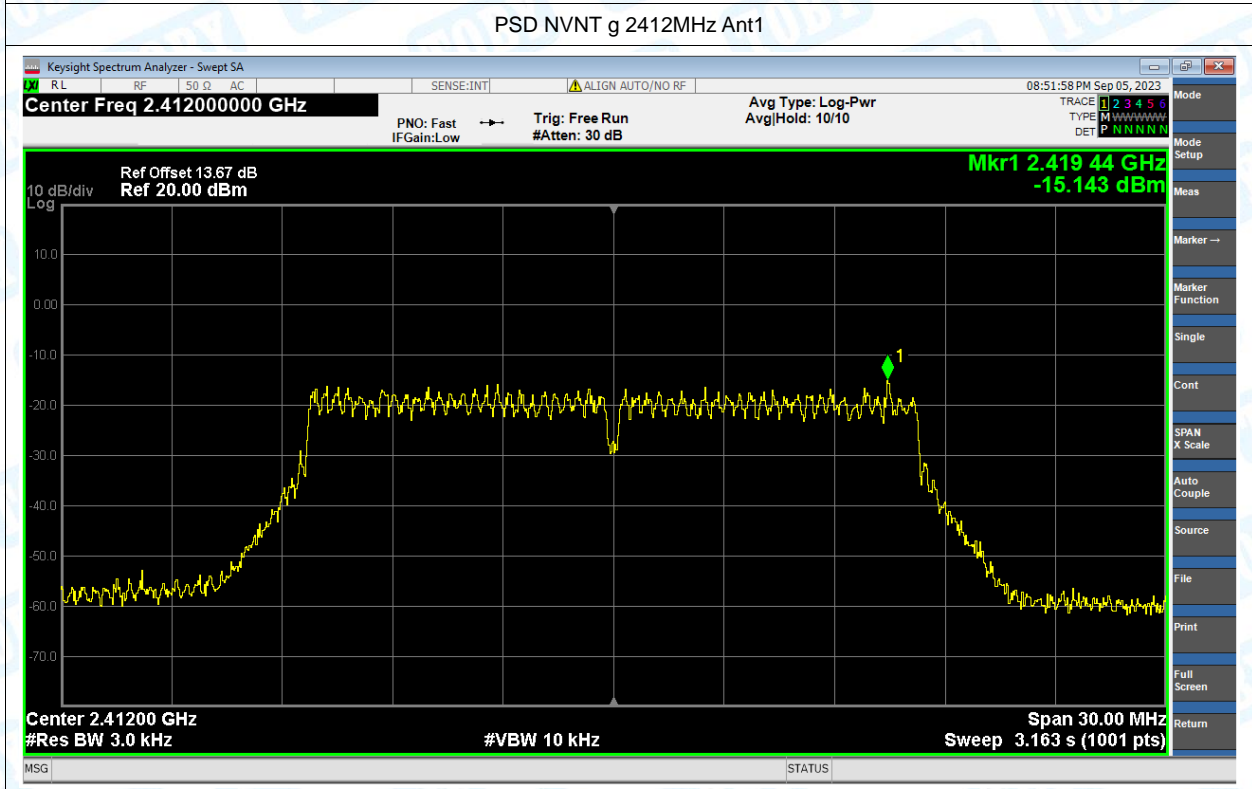
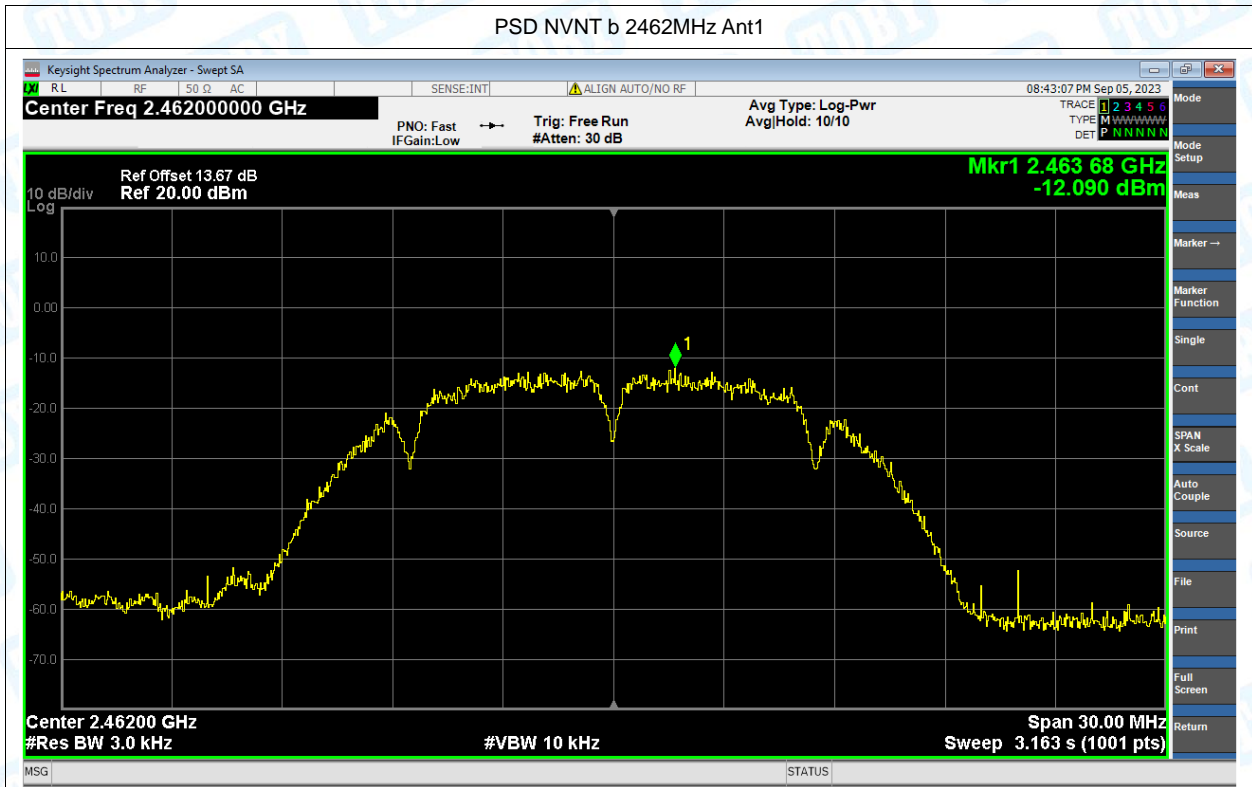



PSD NVNT g 2437MHz Ant1

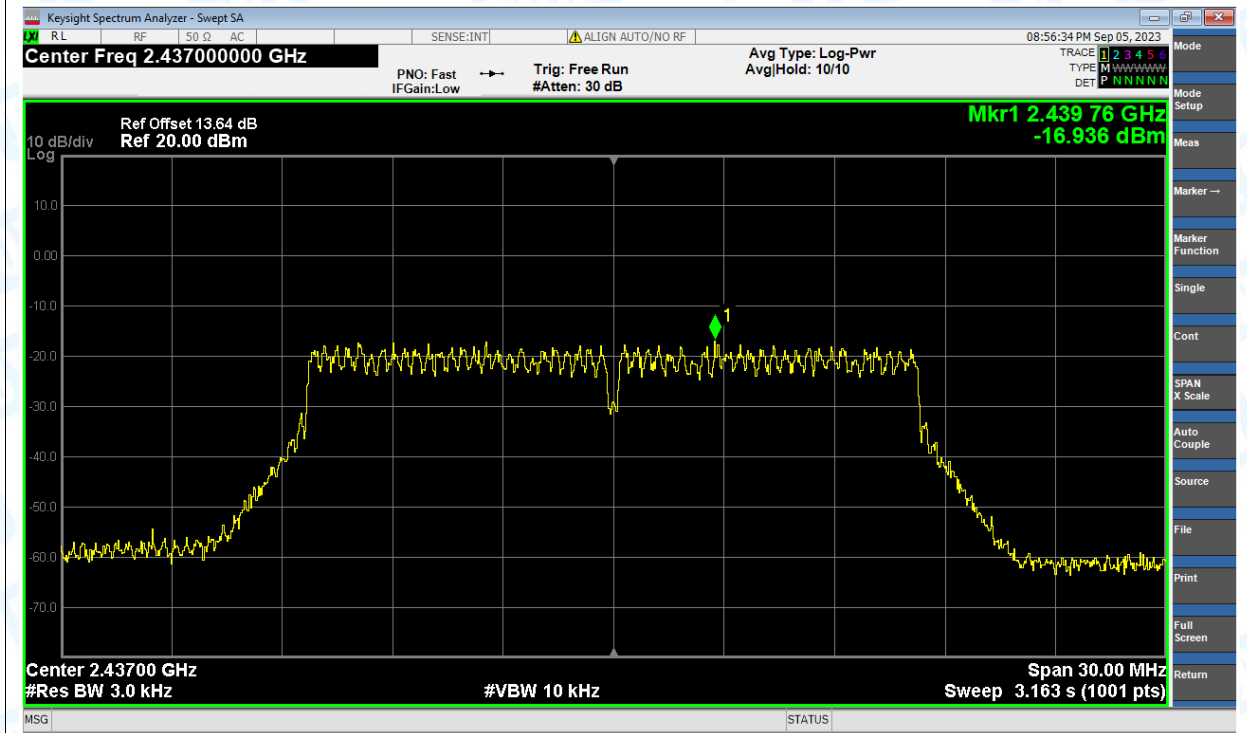

PSD NVNT g 2462MHz Ant1

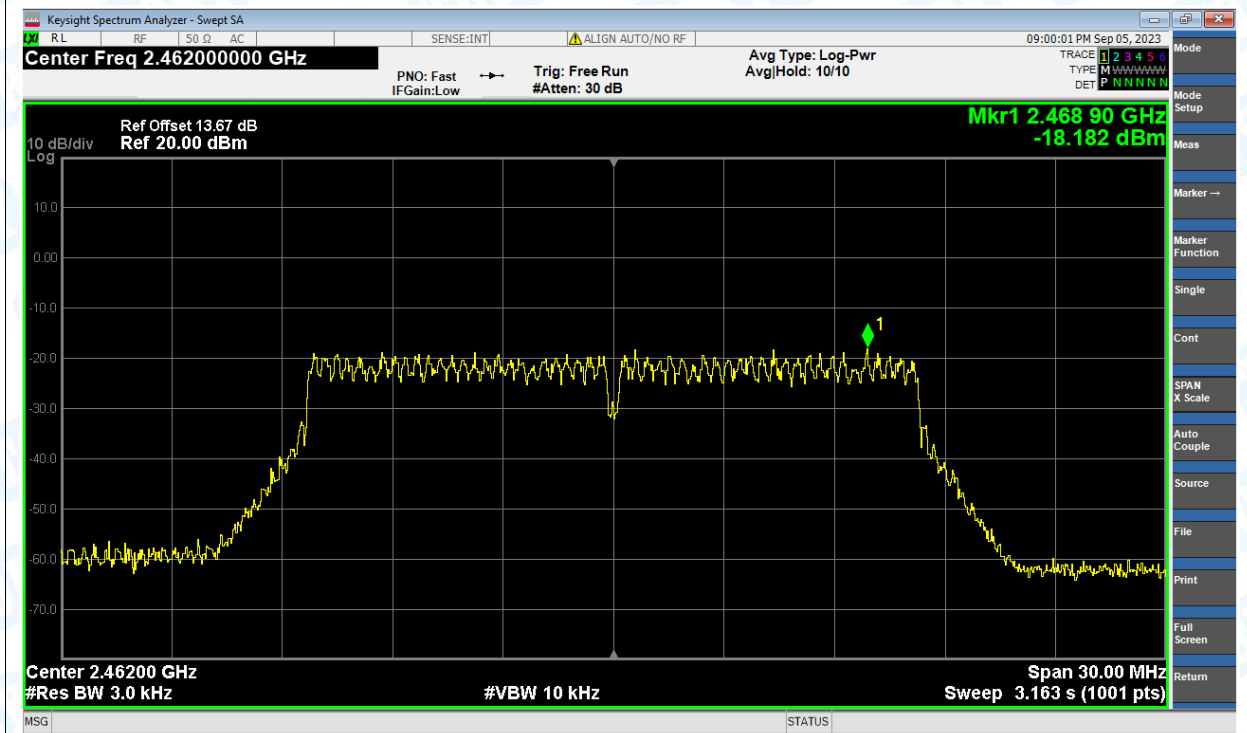

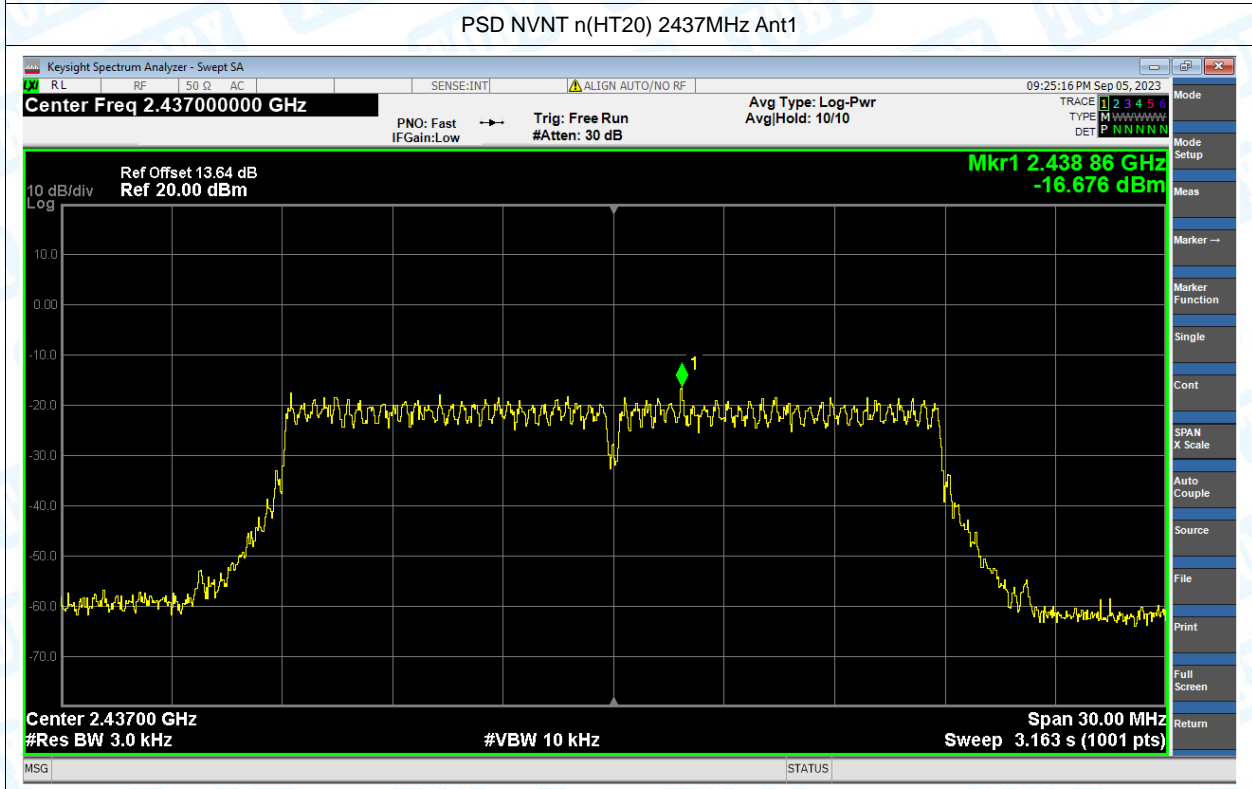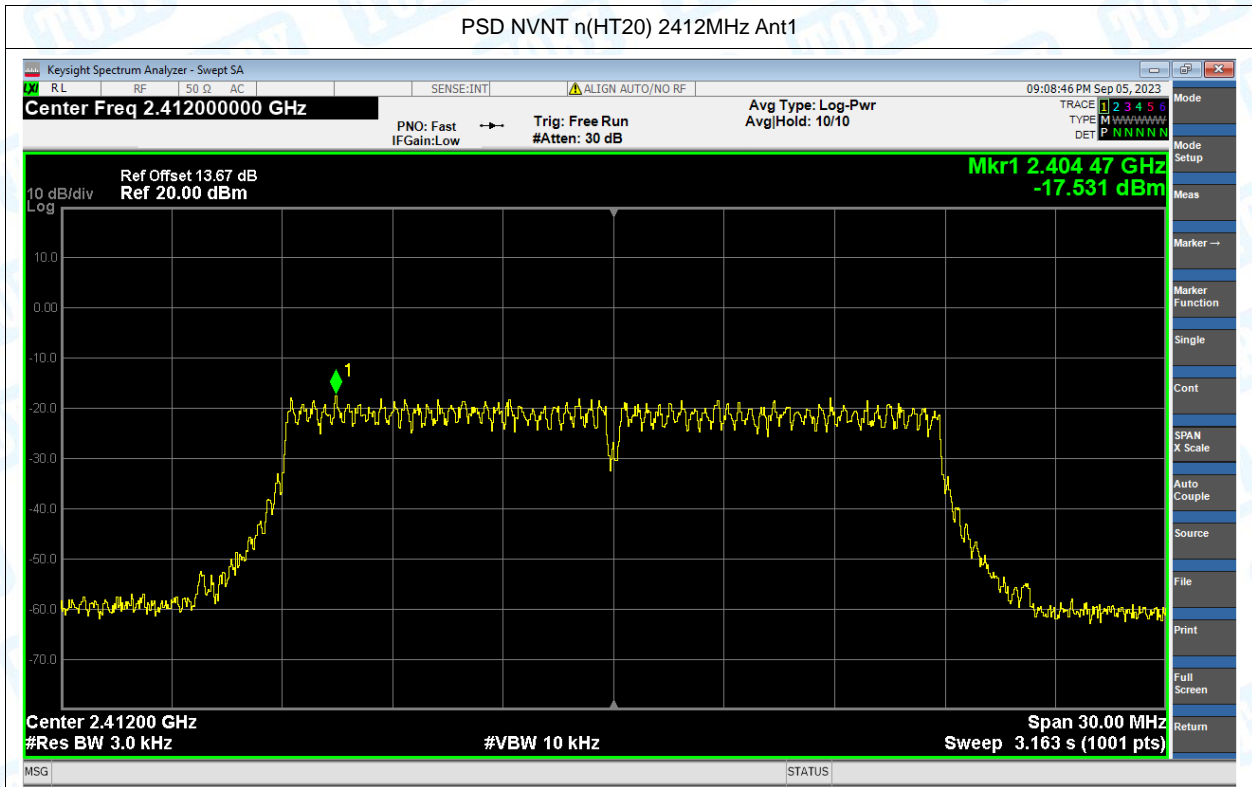

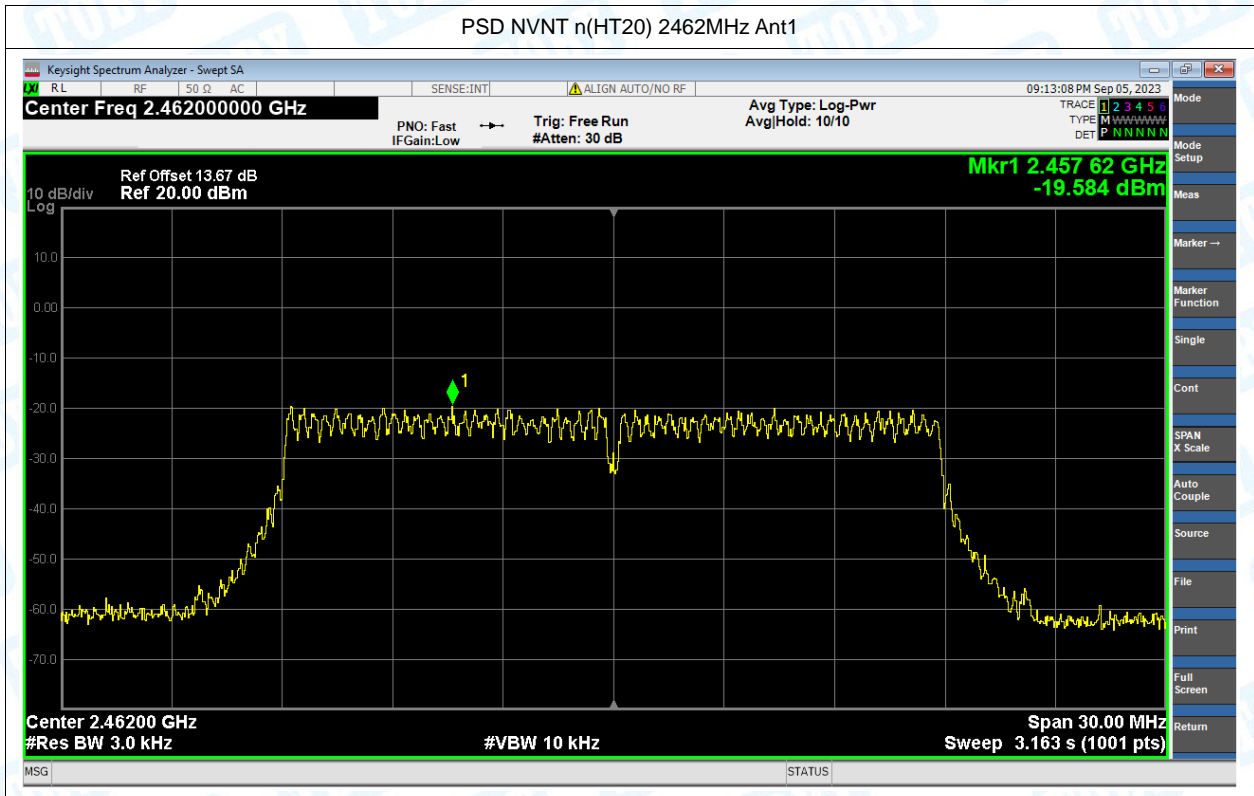


Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|---------|-----------------|---------|-----------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | -47.21 | -20 | Pass |
| NVNT | b | 2462 | Ant1 | -45.62 | -20 | Pass |
| NVNT | g | 2412 | Ant1 | -41.11 | -20 | Pass |
| NVNT | g | 2462 | Ant1 | -40.04 | -20 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | -38.98 | -20 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | -39.39 | -20 | Pass |

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

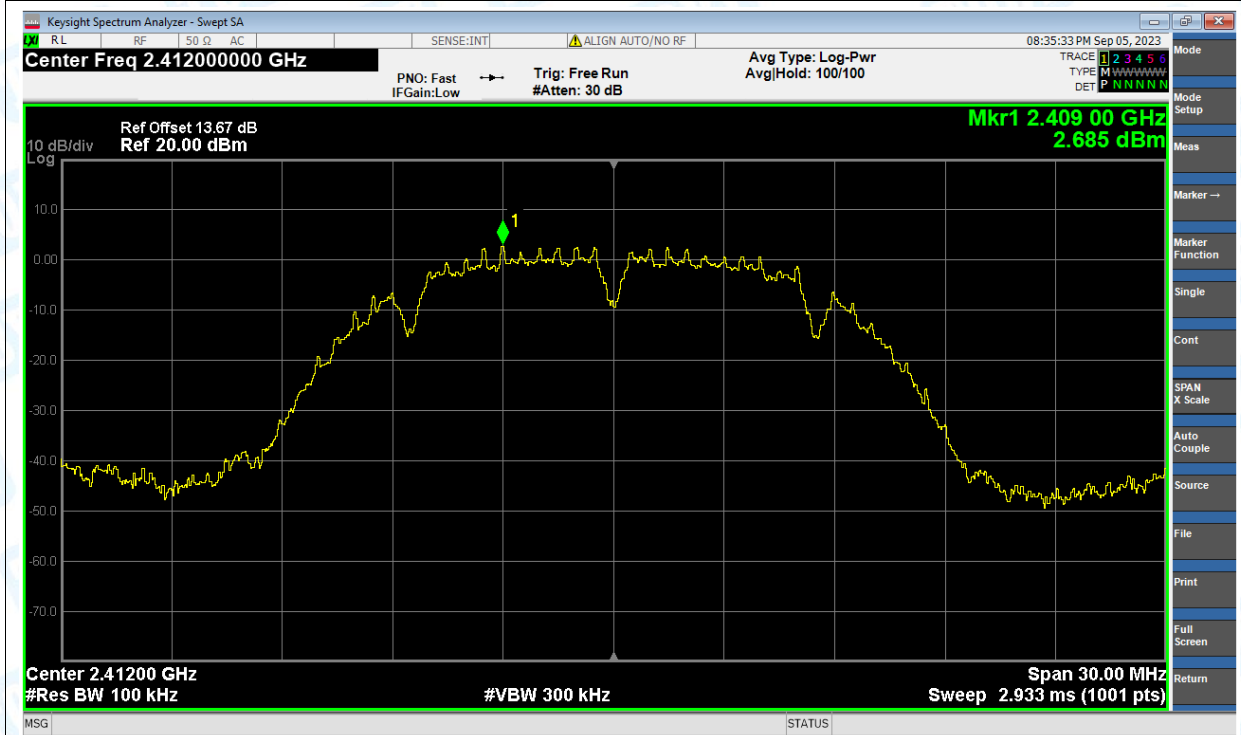


Band Edge NVNT b 2412MHz Ant1 Emission

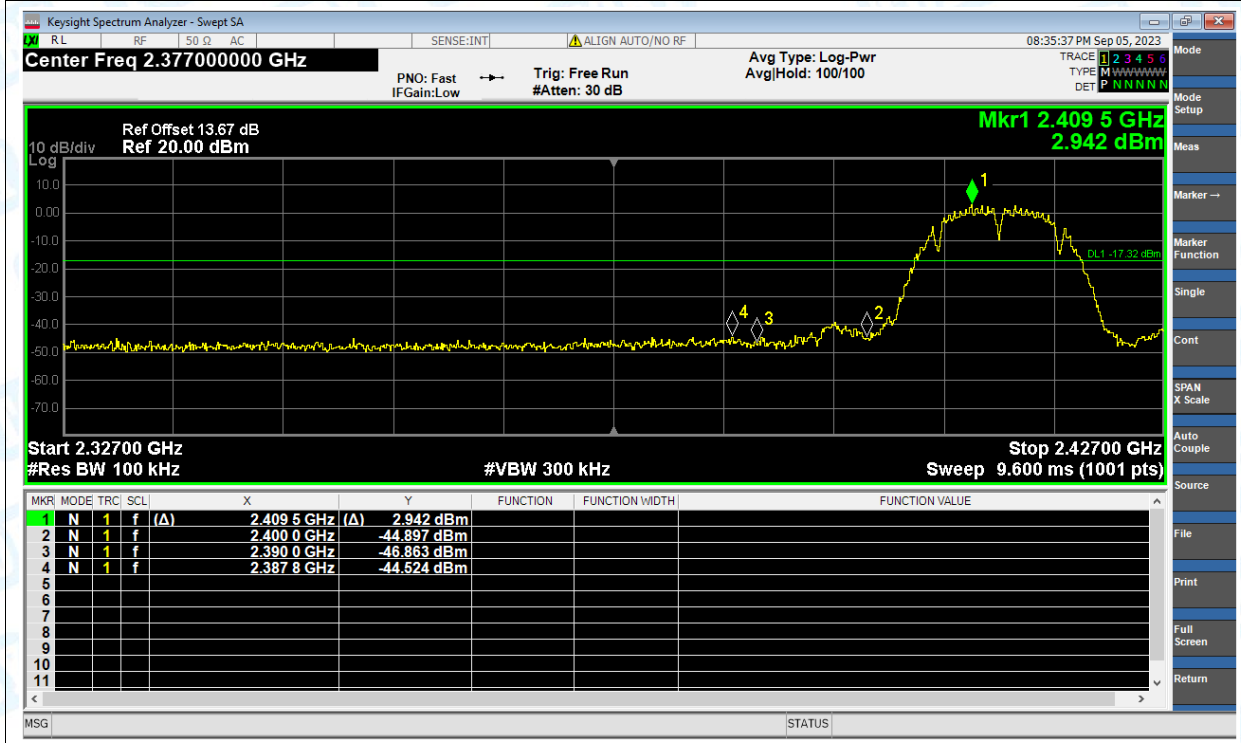


Band Edge NVNT b 2462MHz Ant1 Ref




Band Edge NVNT b 2462MHz Ant1 Emission

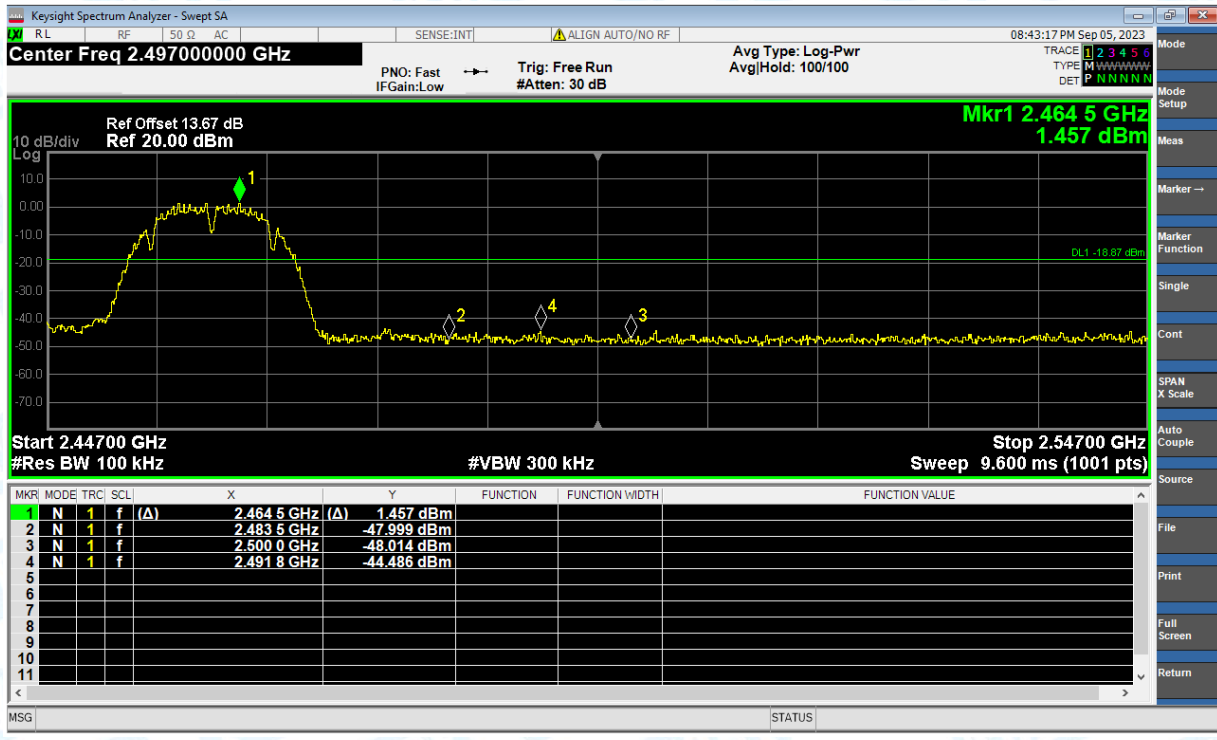


Band Edge NVNT g 2412MHz Ant1 Ref

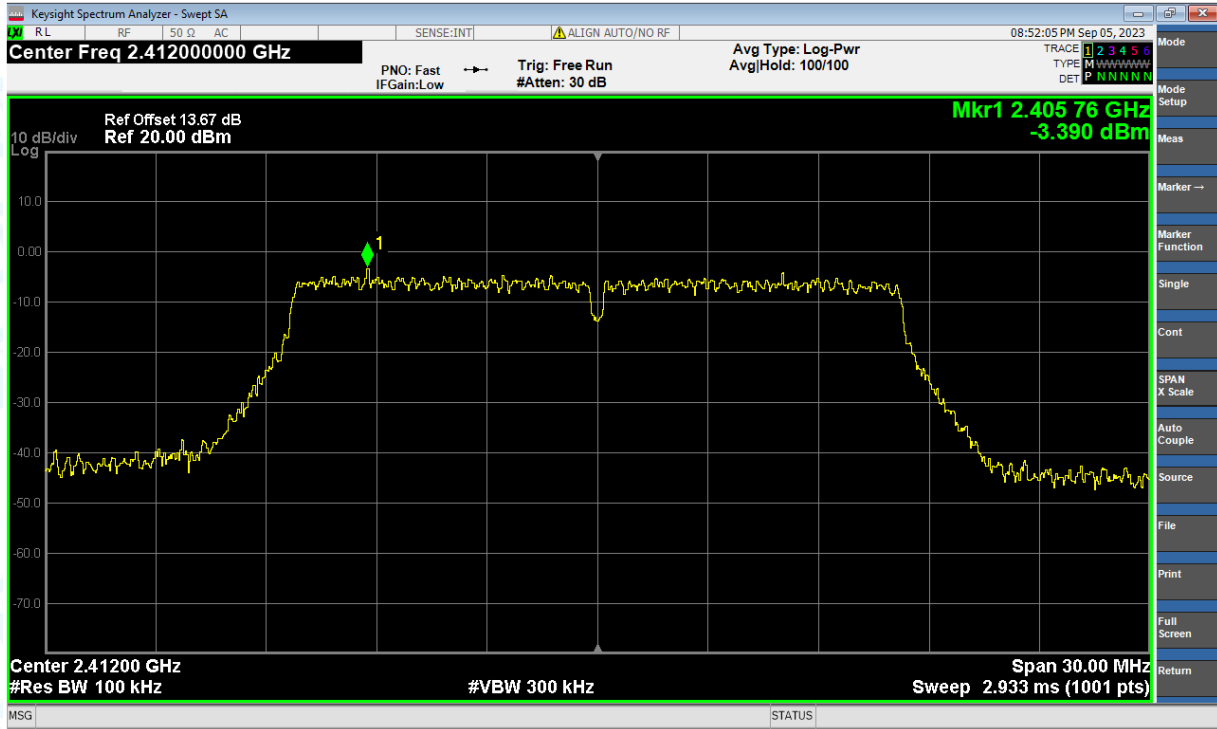


Band Edge NVNT g 2412MHz Ant1 Emission

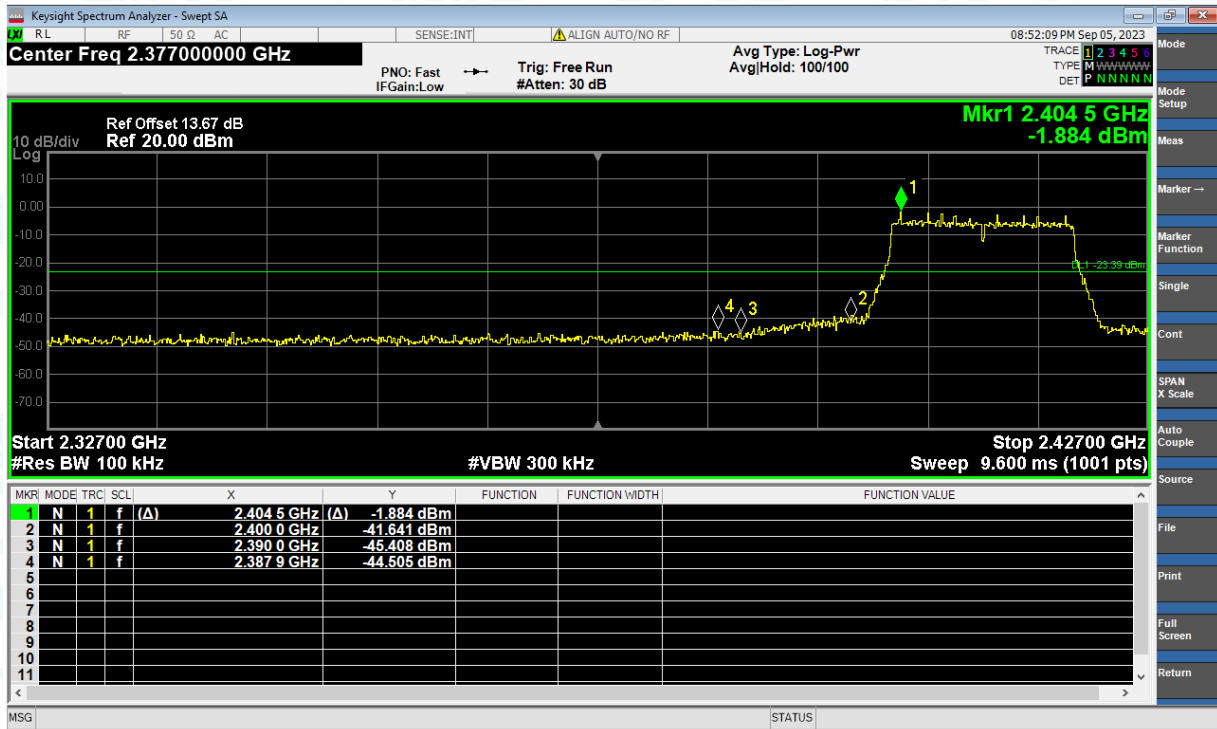


Band Edge NVNT g 2462MHz Ant1 Ref

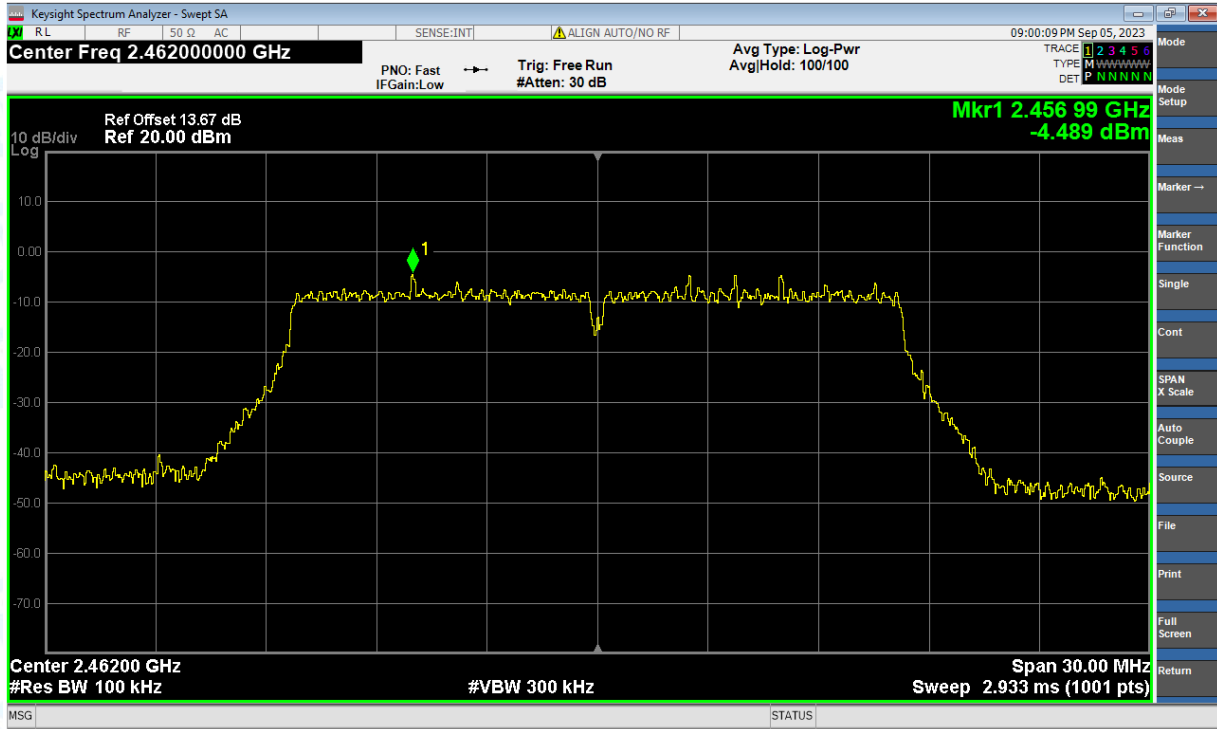


Band Edge NVNT g 2462MHz Ant1 Emission


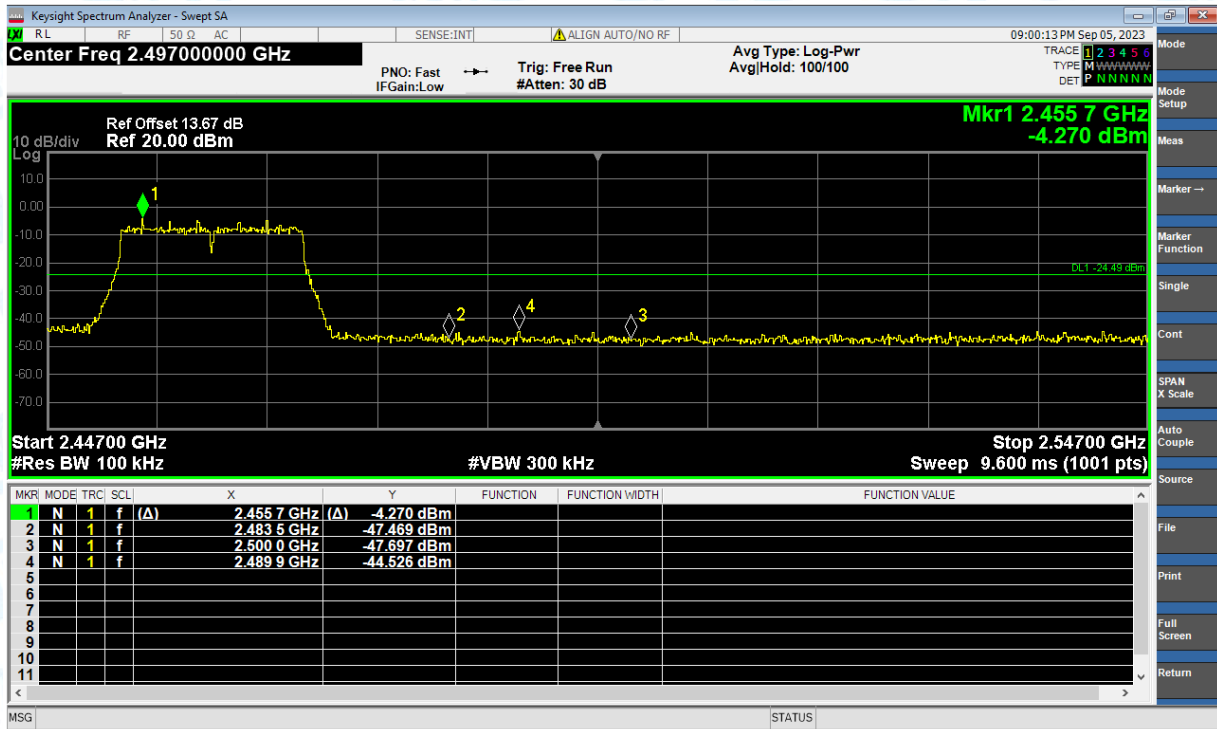


Band Edge NVNT n(HT20) 2412MHz Ant1 Ref

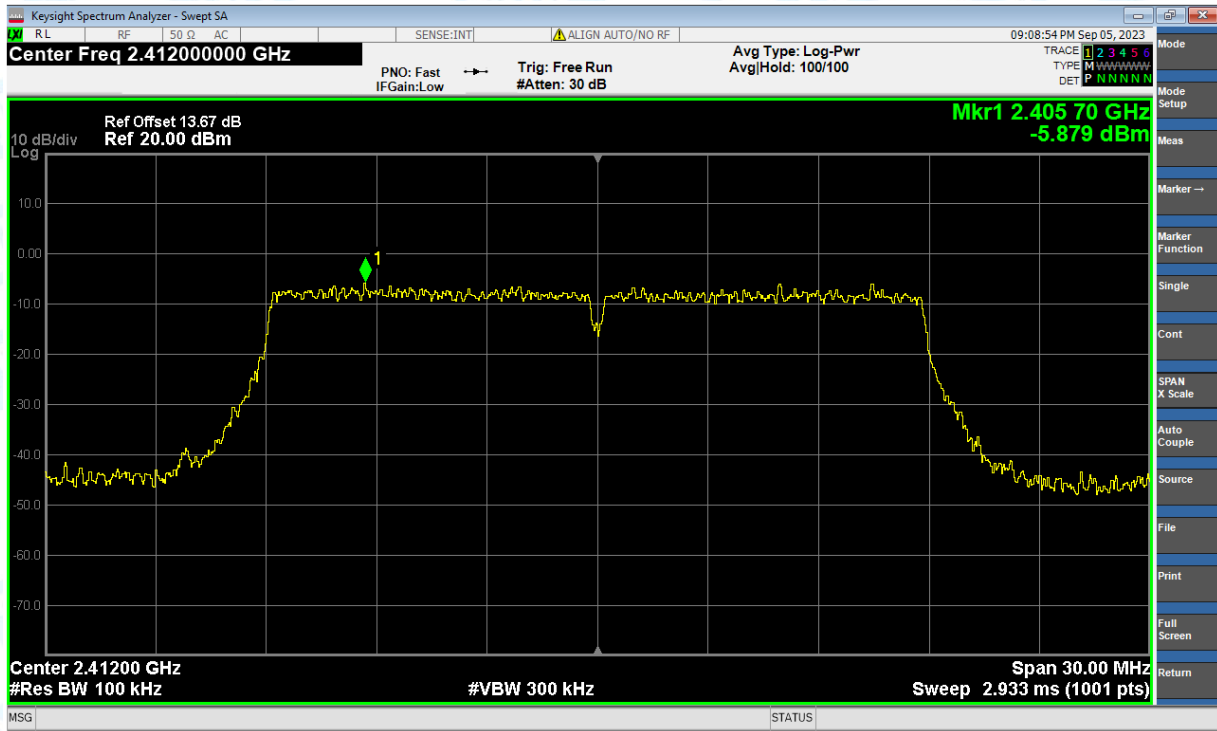

Band Edge NVNT n(HT20) 2412MHz Ant1 Emission

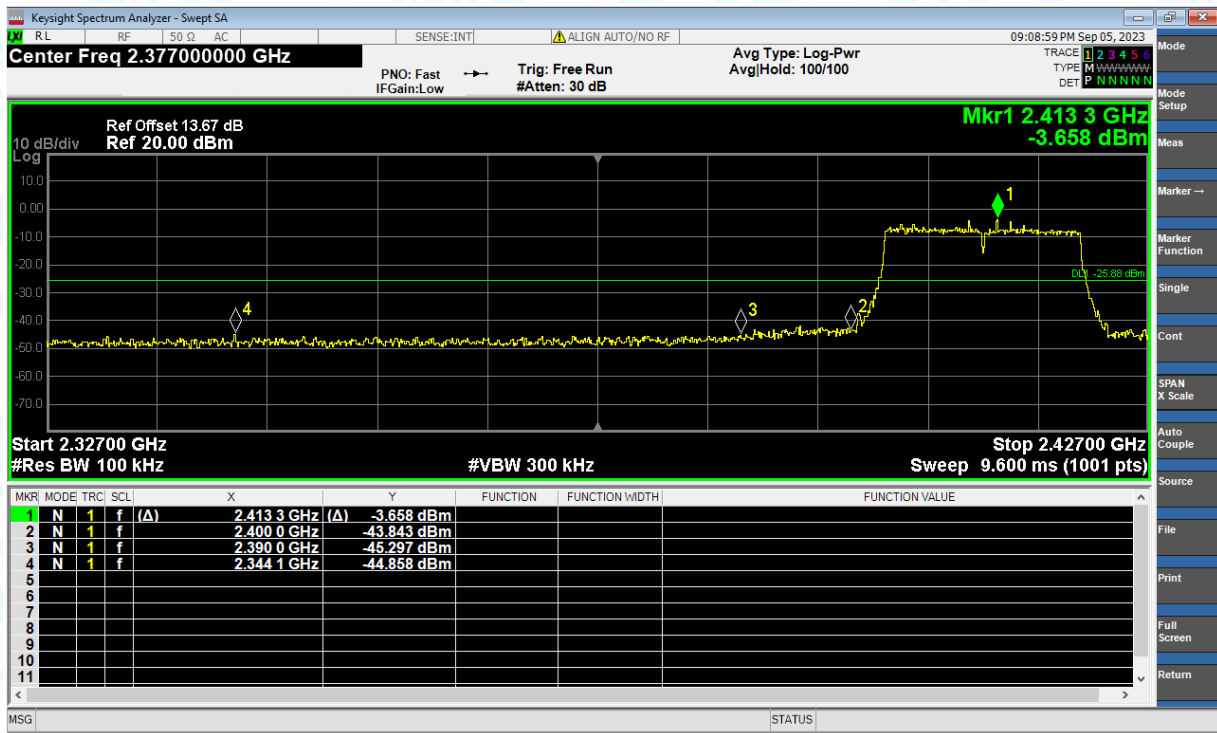

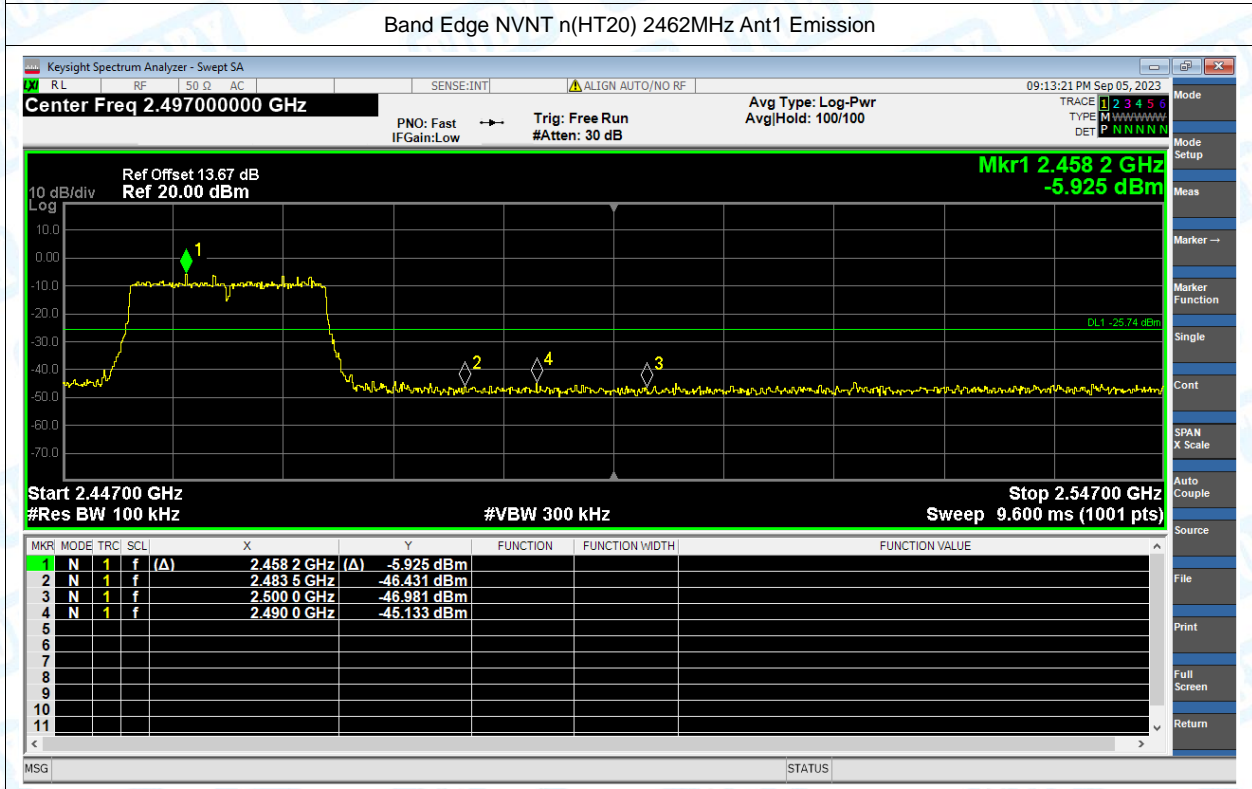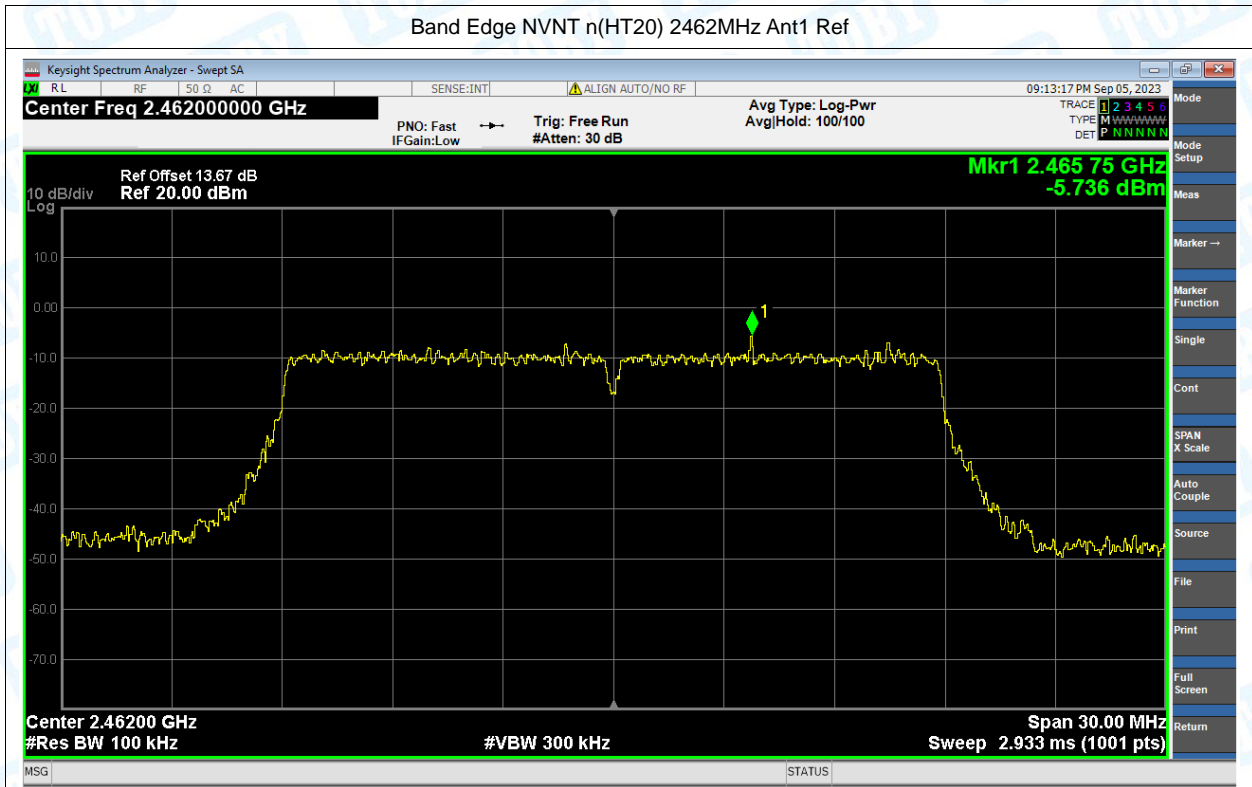


Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|---------|-----------------|---------|-----------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | -33.18 | -20 | Pass |
| NVNT | b | 2437 | Ant1 | -33.27 | -20 | Pass |
| NVNT | b | 2462 | Ant1 | -32.86 | -20 | Pass |
| NVNT | g | 2412 | Ant1 | -29.03 | -20 | Pass |
| NVNT | g | 2437 | Ant1 | -27.26 | -20 | Pass |
| NVNT | g | 2462 | Ant1 | -26.61 | -20 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | -27.79 | -20 | Pass |
| NVNT | n(HT20) | 2437 | Ant1 | -27.12 | -20 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | -25.11 | -20 | Pass |

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

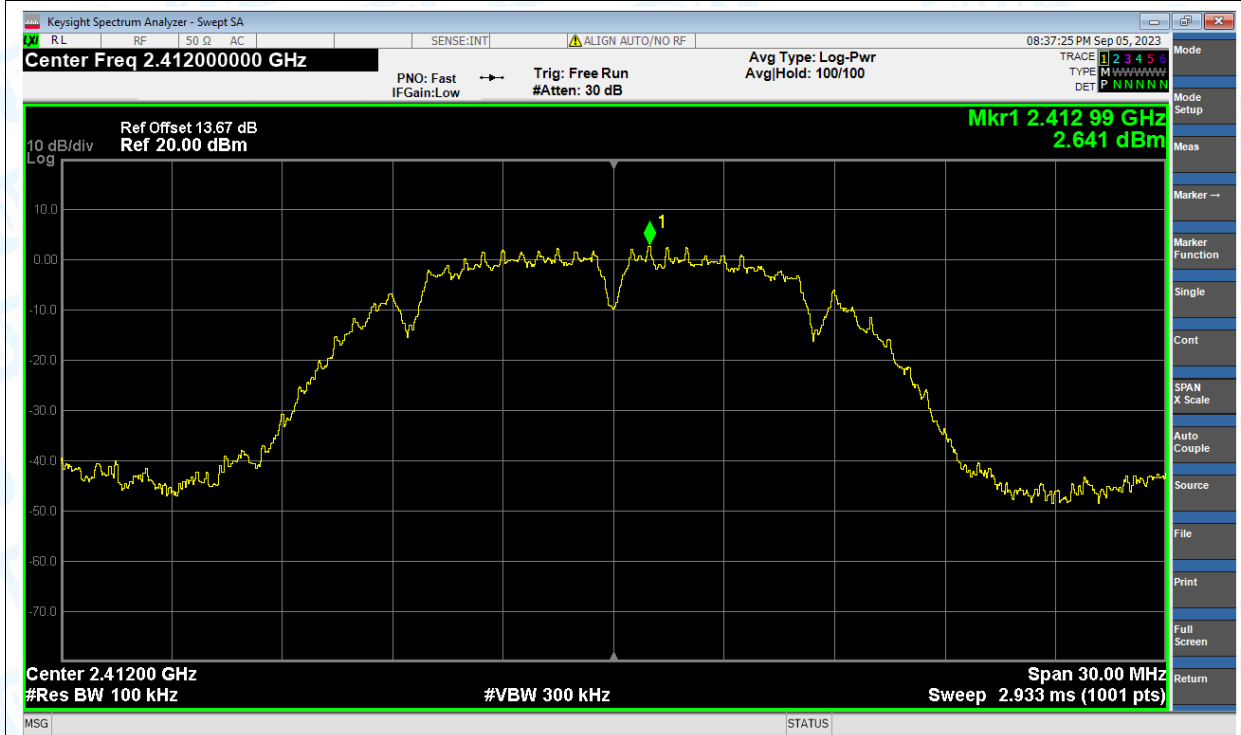


Tx. Spurious NVNT b 2412MHz Ant1 Emission

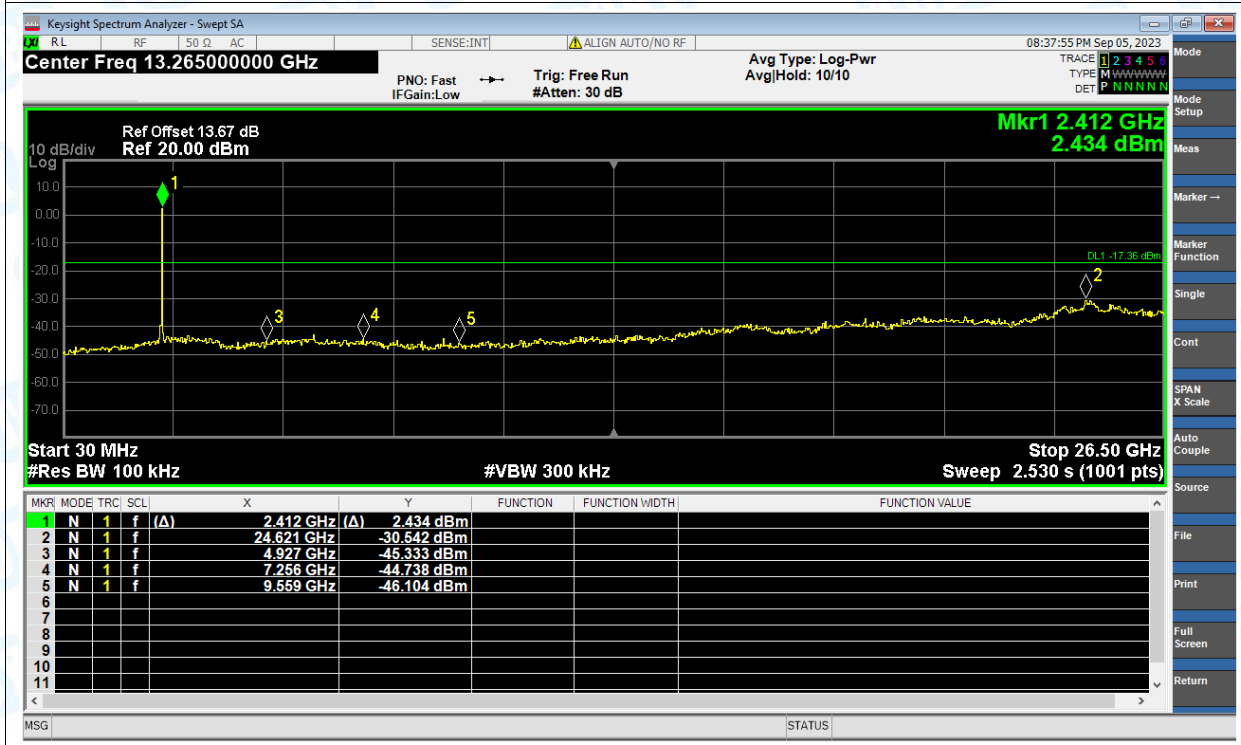

Tx. Spurious NVNT b 2437MHz Ant1 Ref




Tx. Spurious NVNT b 2437MHz Ant1 Emission

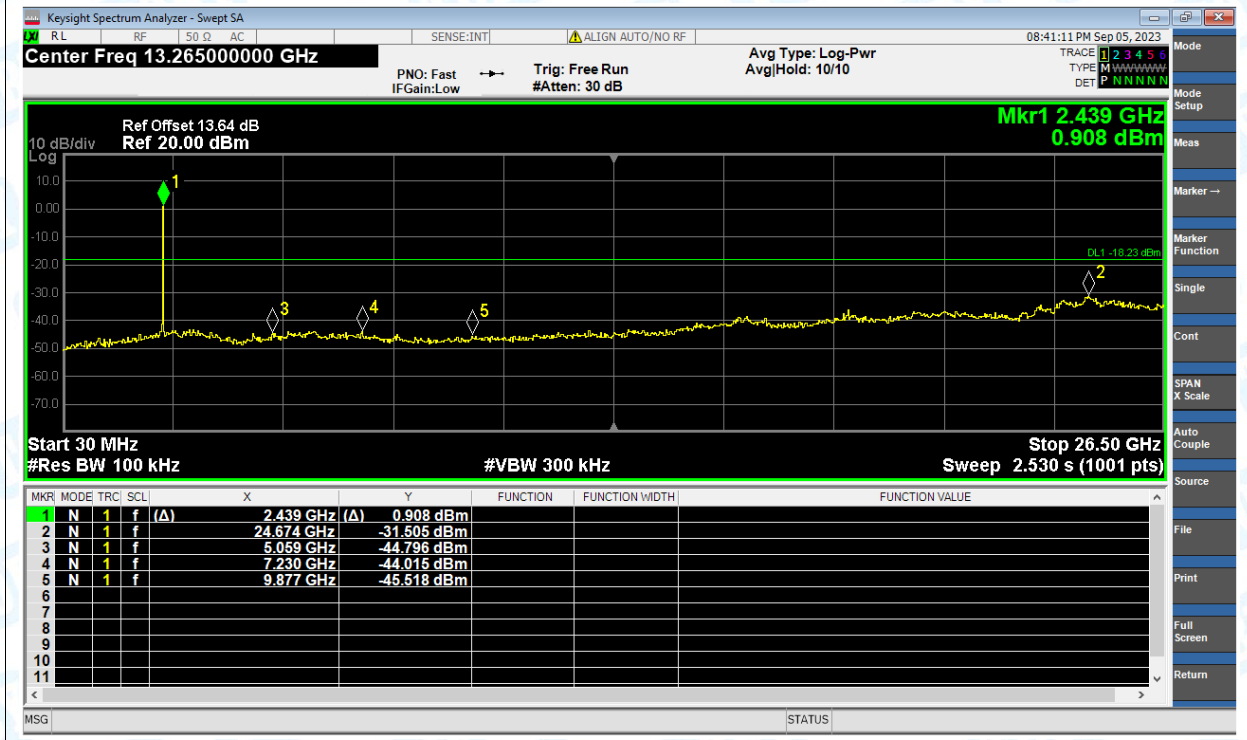


Tx. Spurious NVNT b 2462MHz Ant1 Ref




Tx. Spurious NVNT b 2462MHz Ant1 Emission

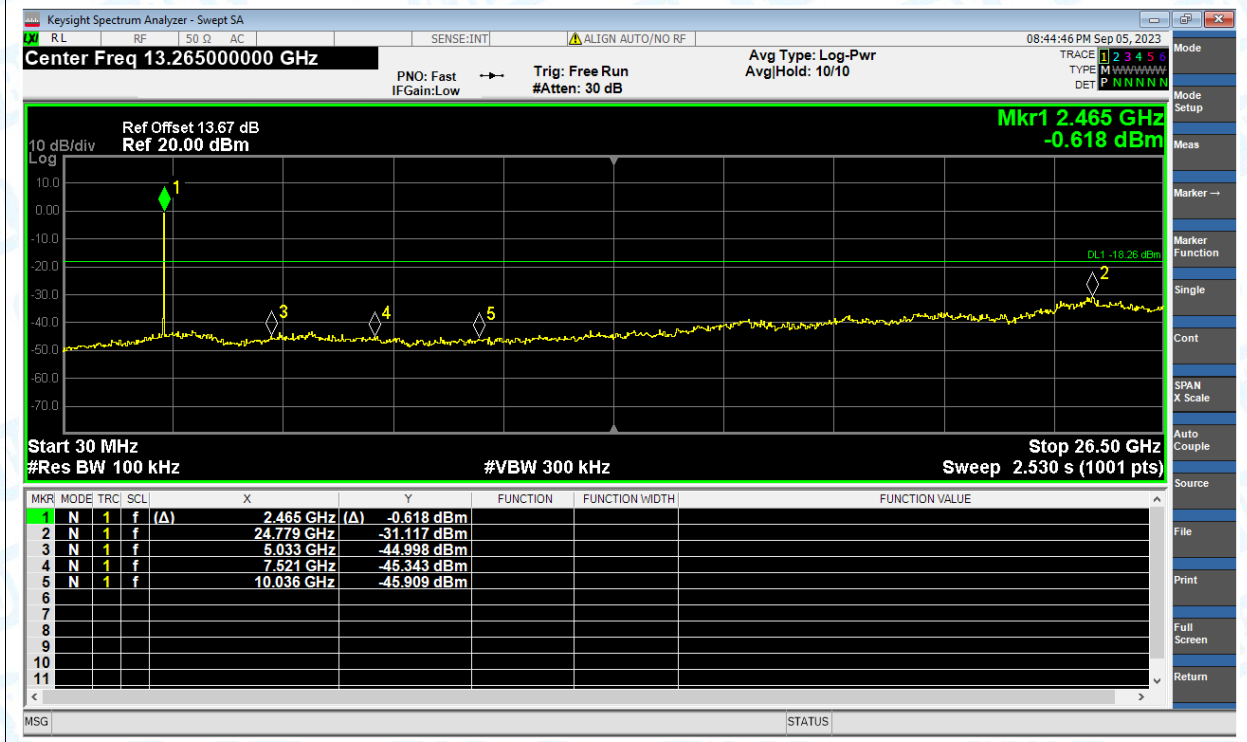


Tx. Spurious NVNT g 2412MHz Ant1 Ref

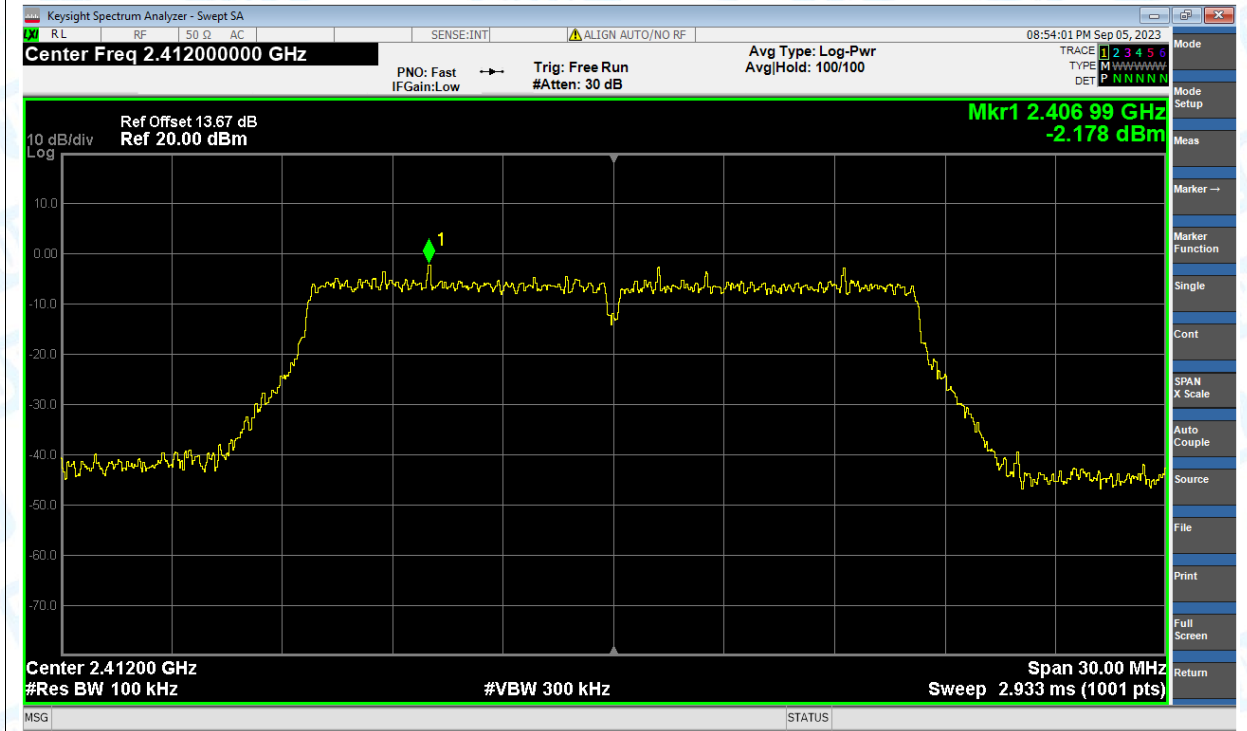


Tx. Spurious NVNT g 2412MHz Ant1 Emission

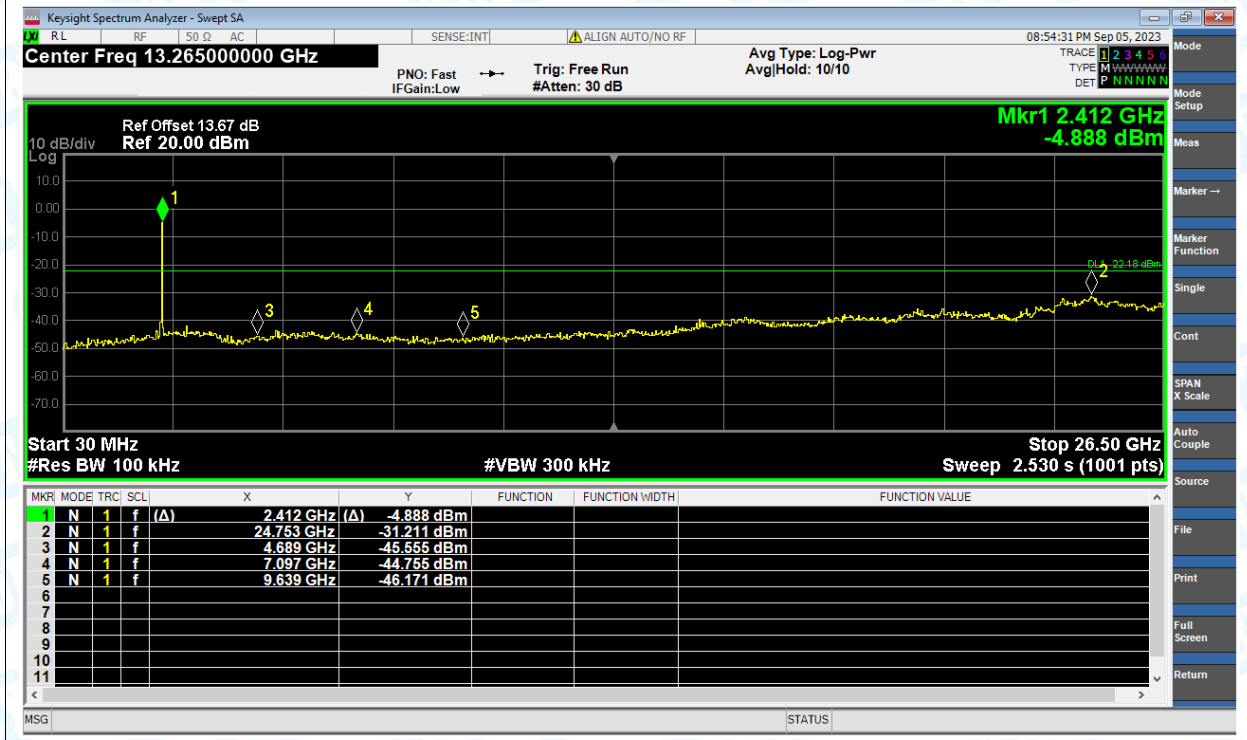


Tx. Spurious NVNT g 2437MHz Ant1 Ref

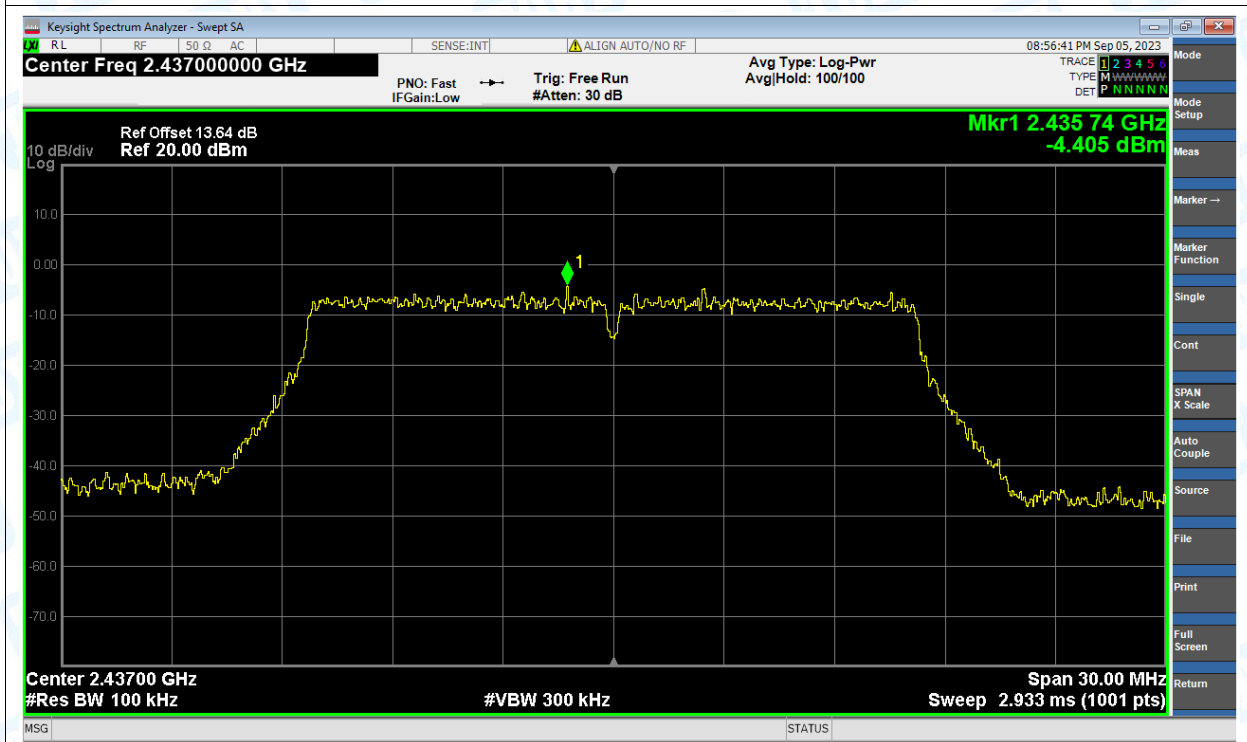


Tx. Spurious NVNT g 2437MHz Ant1 Emission

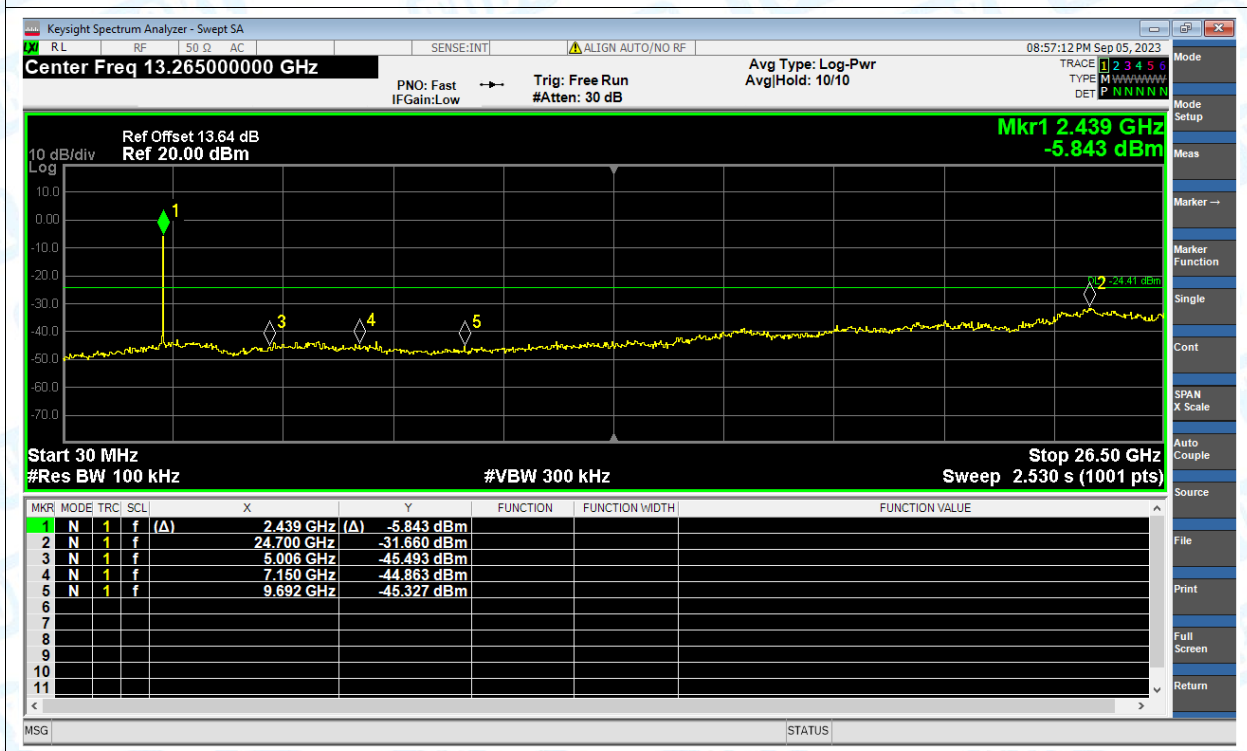


Tx. Spurious NVNT g 2462MHz Ant1 Ref

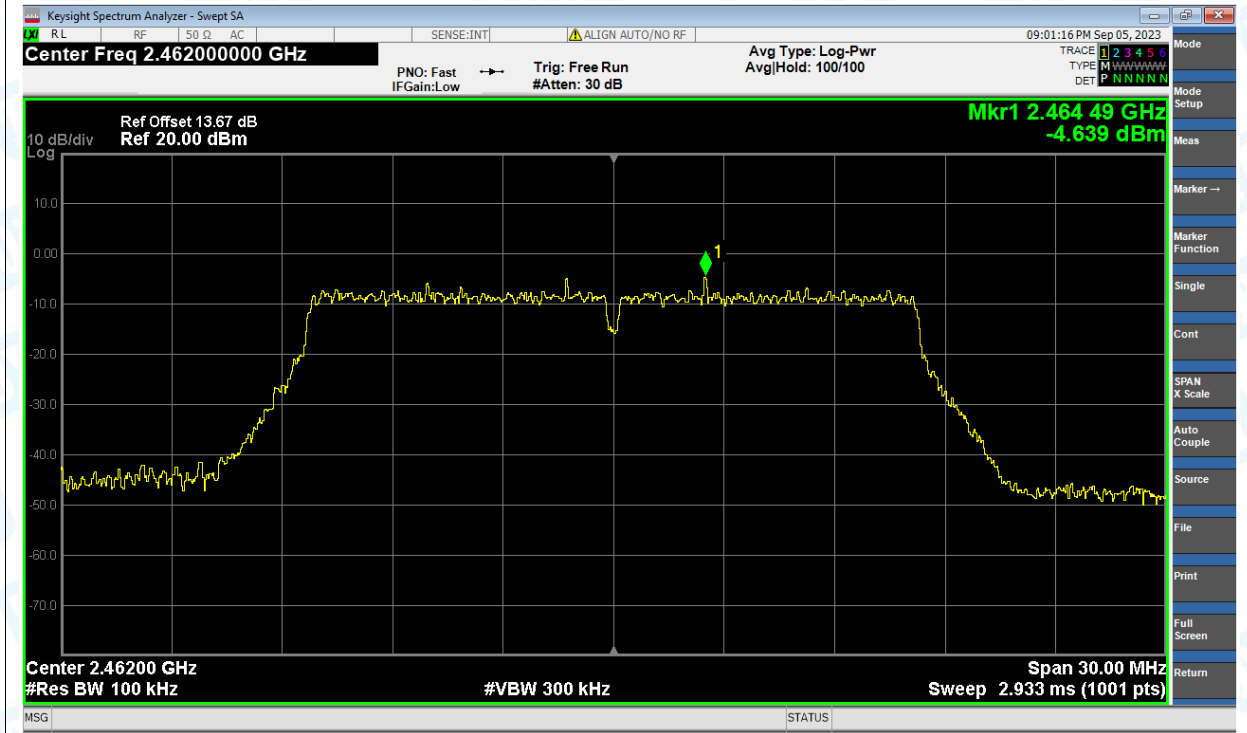


Tx. Spurious NVNT g 2462MHz Ant1 Emission


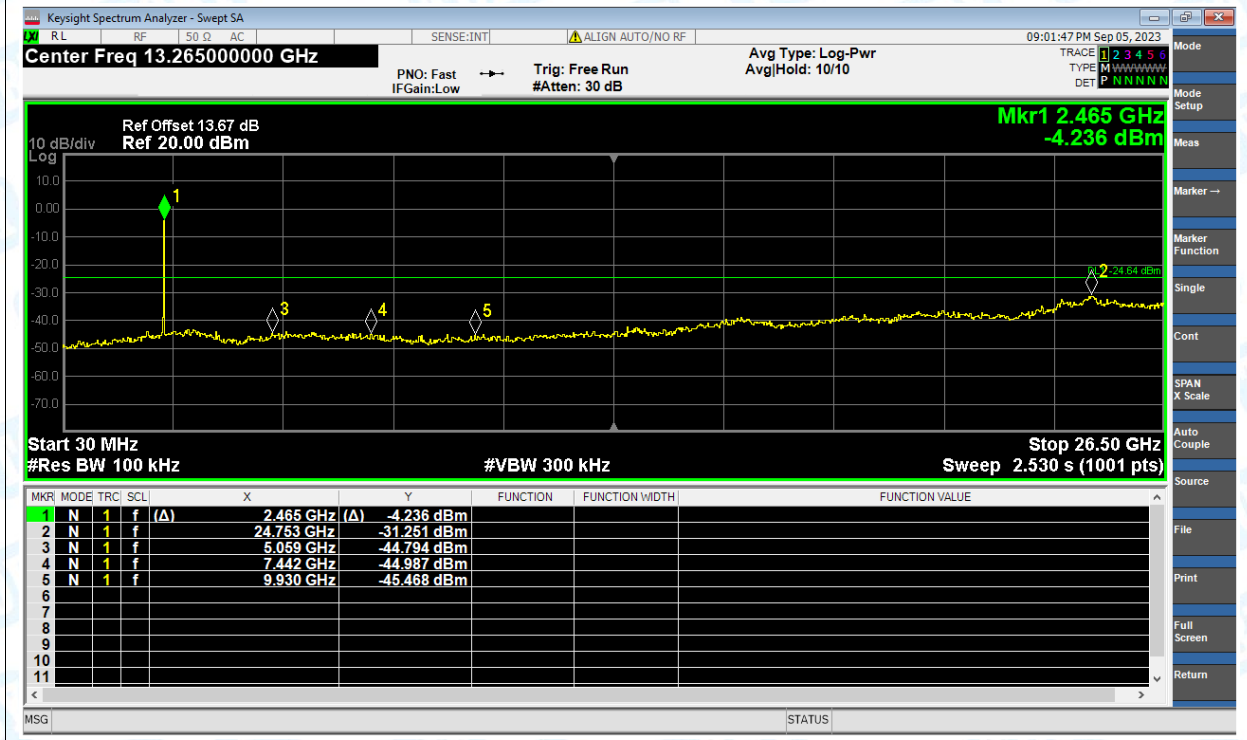




Tx. Spurious NVNT n(HT20) 2412MHz Ant1 Ref

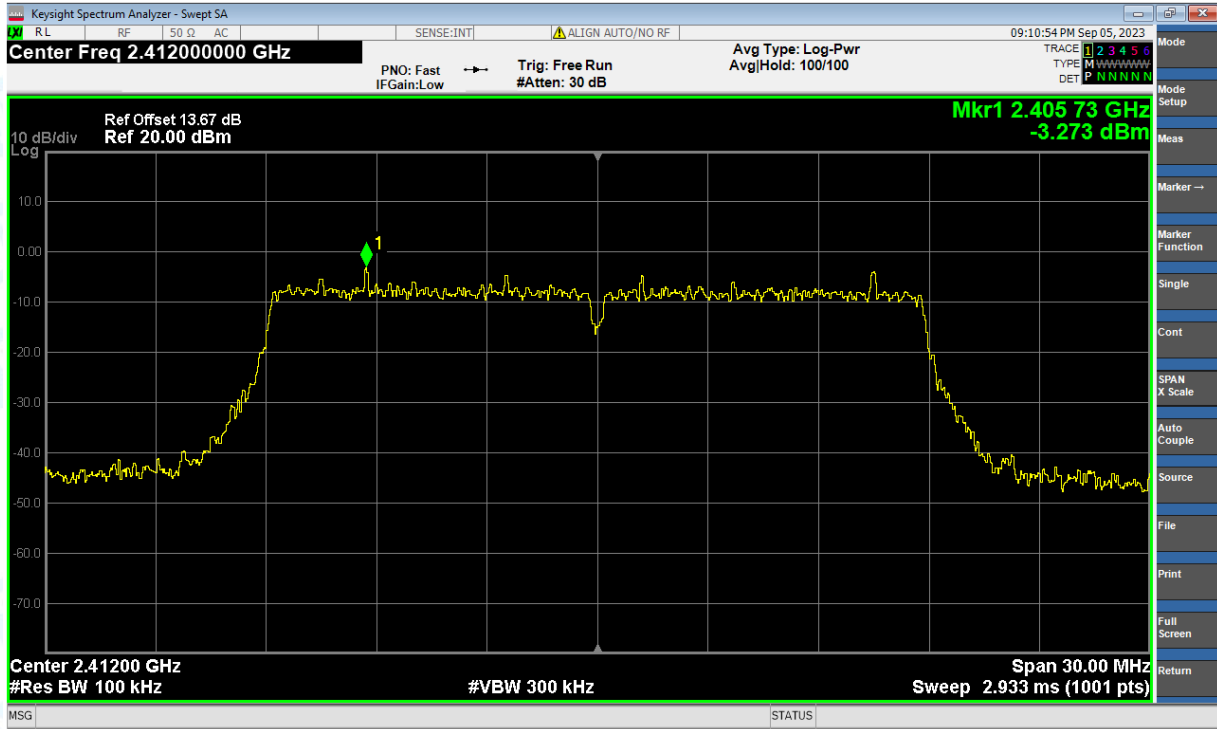

Tx. Spurious NVNT n(HT20) 2412MHz Ant1 Emission

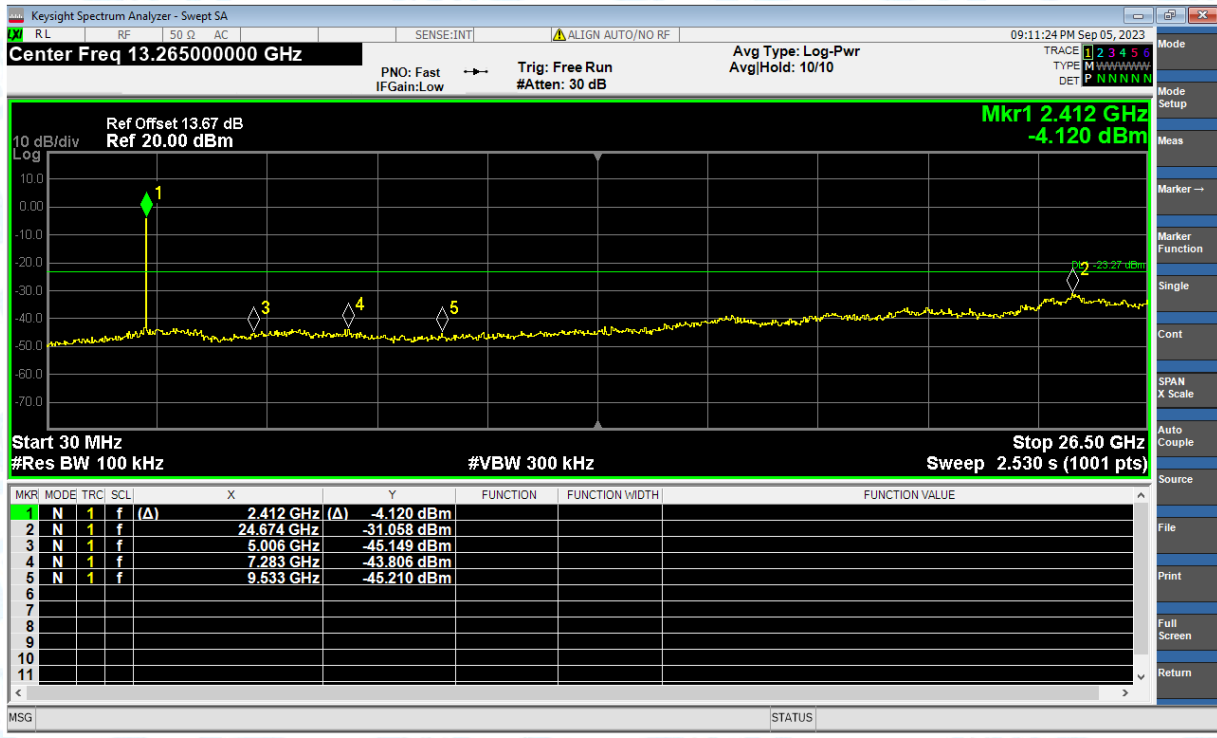

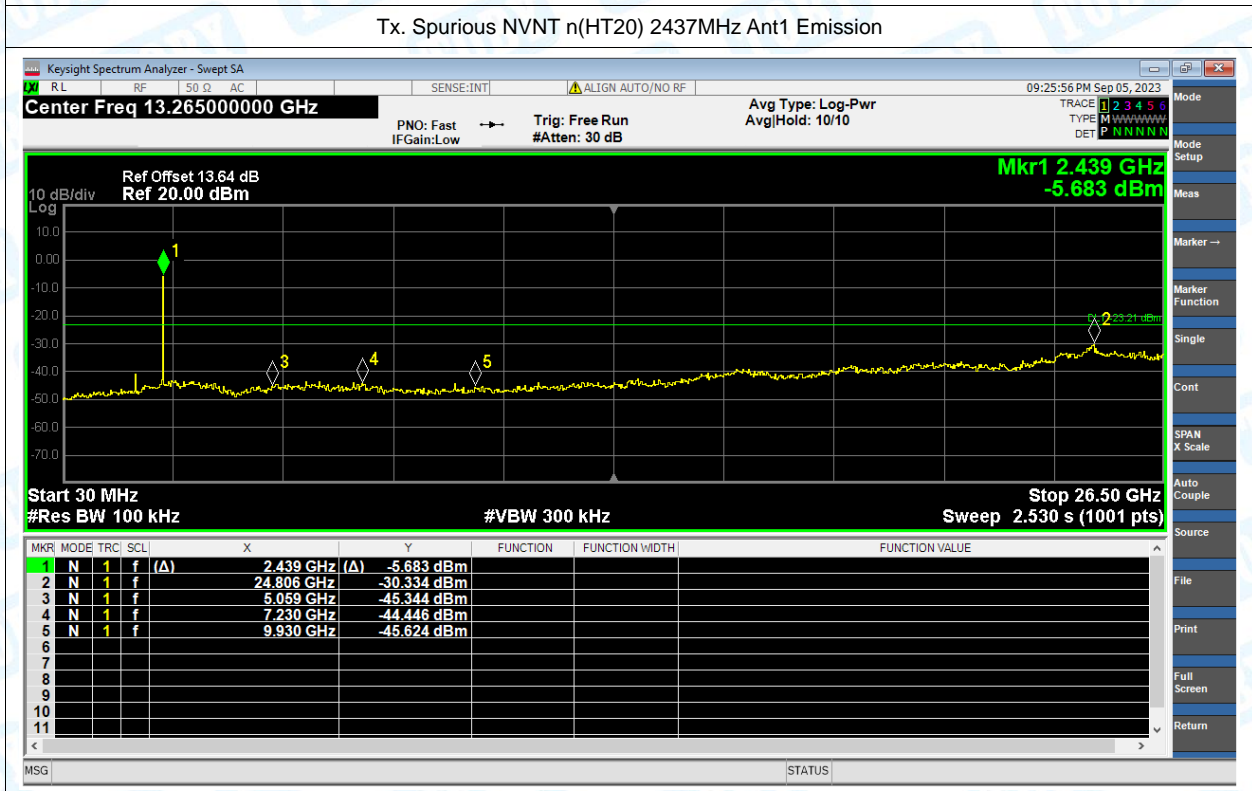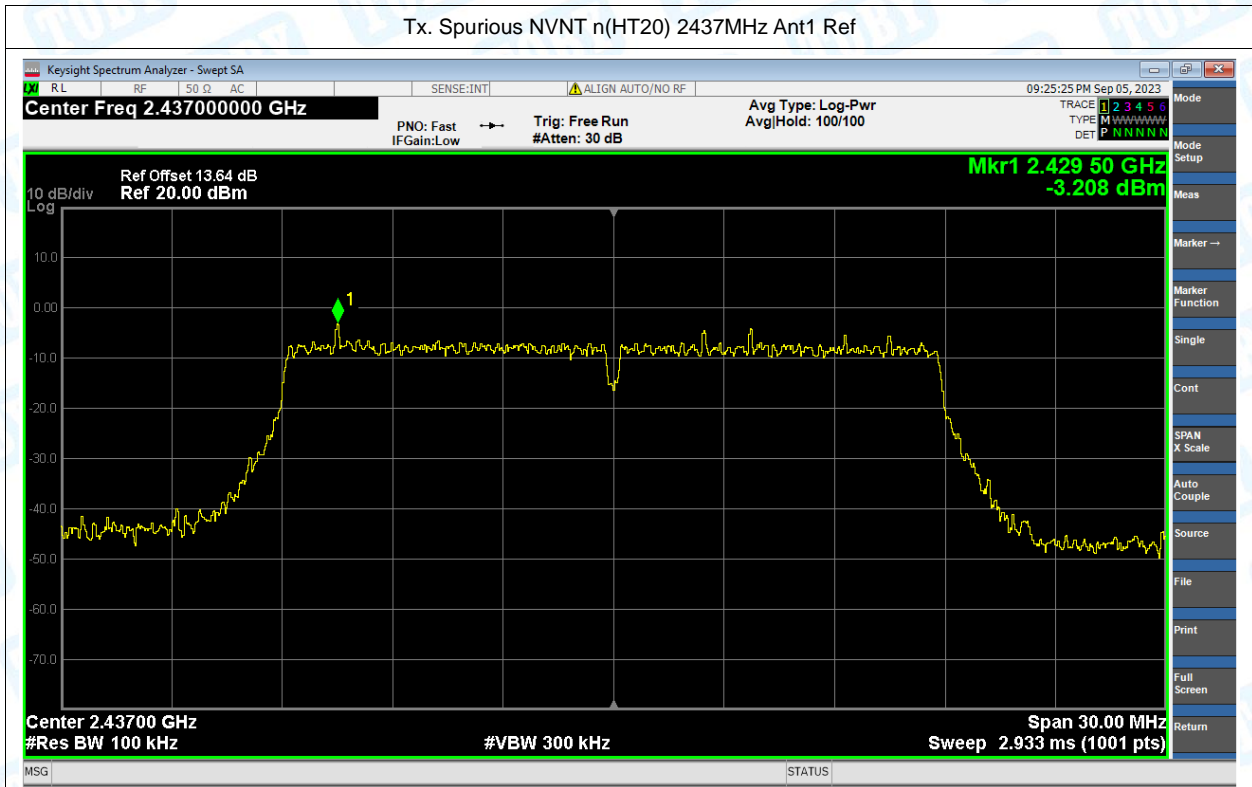

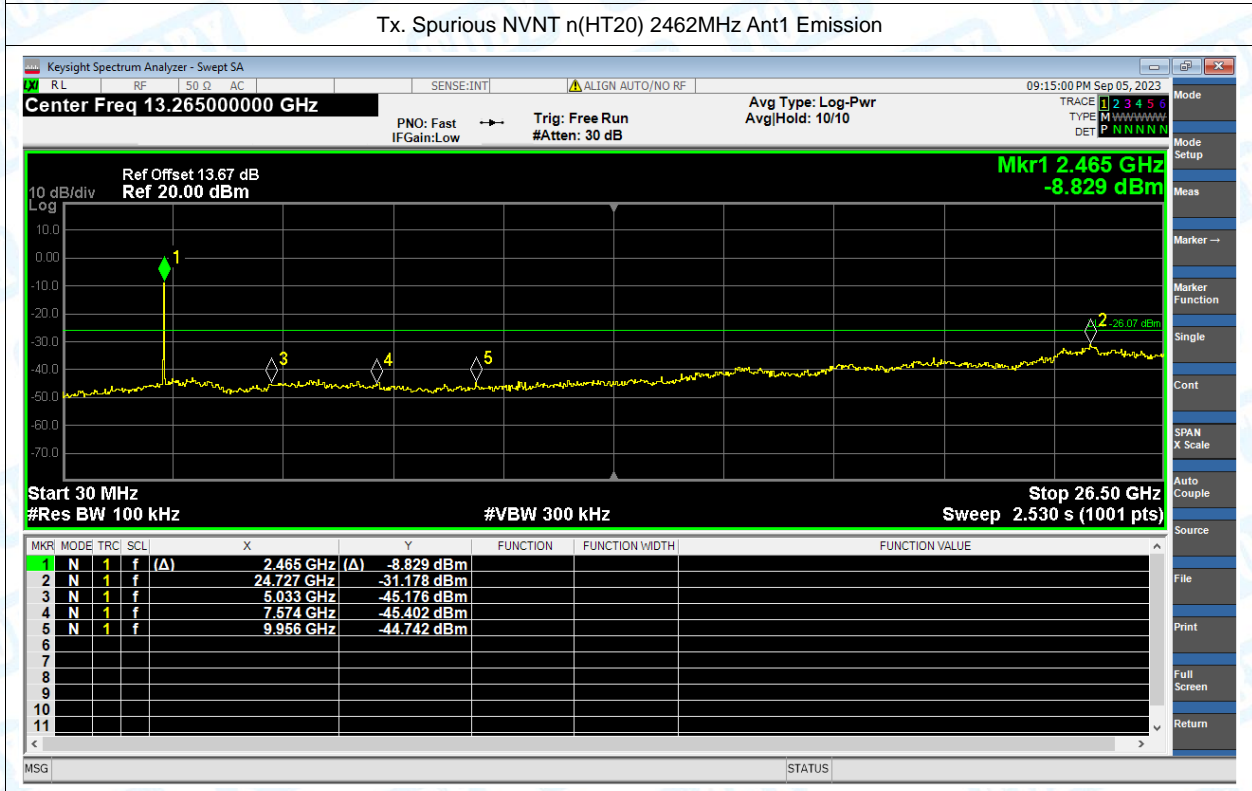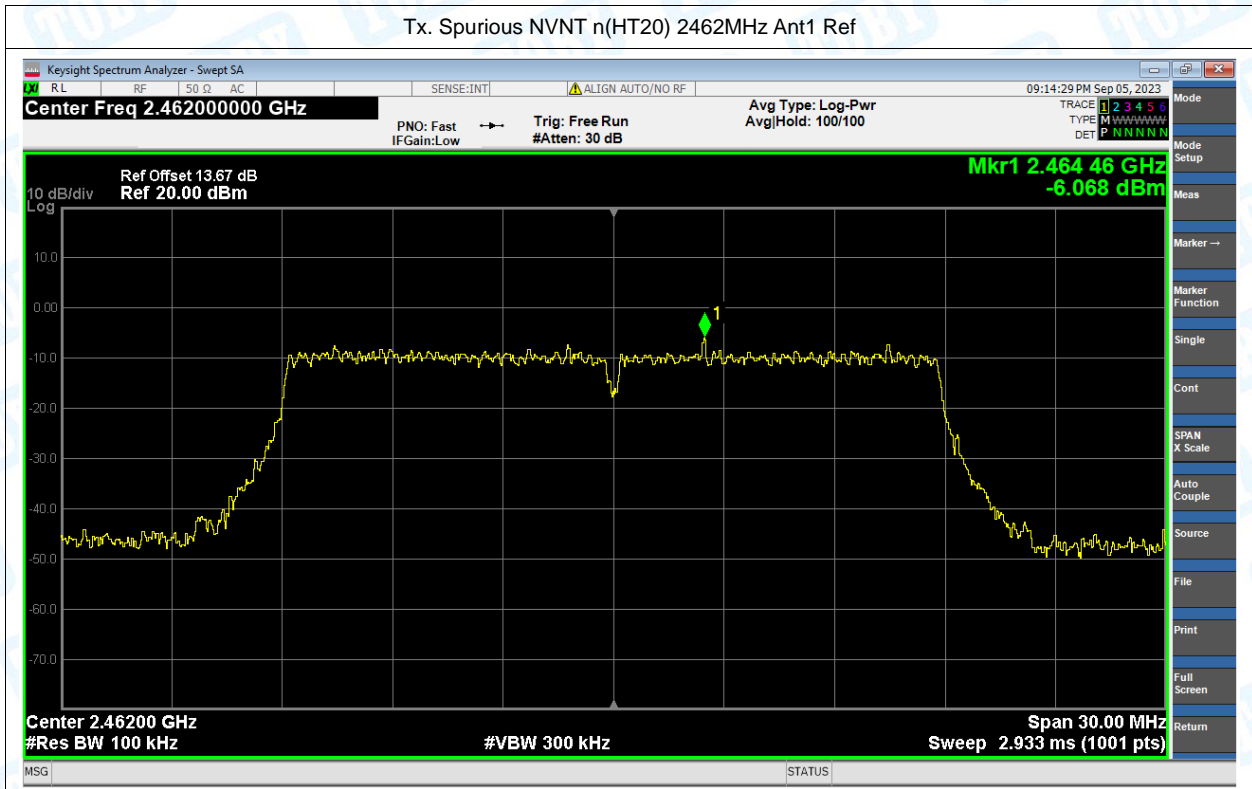


Restrict Band


| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|---------|-----------------|---------|-----------------|-------------|------------|------------|----------|----------------|---------|
| NVNT | b | 2412 | Ant1 | 2310 | -34.44 | 2.55 | 63.37 | Peak | 74 | Pass |
| NVNT | b | 2412 | Ant1 | 2310 | -45.99 | 2.55 | 51.82 | Average | 54 | Pass |
| NVNT | b | 2412 | Ant1 | 2379.264 | -32.57 | 2.55 | 65.24 | Peak | 74 | Pass |
| NVNT | b | 2412 | Ant1 | 2385.816 | -44.31 | 2.55 | 53.5 | Average | 54 | Pass |
| NVNT | b | 2412 | Ant1 | 2390 | -35.24 | 2.55 | 62.57 | Peak | 74 | Pass |
| NVNT | b | 2412 | Ant1 | 2390 | -44.78 | 2.55 | 53.03 | Average | 54 | Pass |
| NVNT | b | 2462 | Ant1 | 2483.5 | -35.47 | 2.55 | 62.34 | Peak | 74 | Pass |
| NVNT | b | 2462 | Ant1 | 2483.5 | -45.21 | 2.55 | 52.6 | Average | 54 | Pass |
| NVNT | b | 2462 | Ant1 | 2495.23 | -31.86 | 2.55 | 65.95 | Peak | 74 | Pass |
| NVNT | b | 2462 | Ant1 | 2487.545 | -45.08 | 2.55 | 52.73 | Average | 54 | Pass |
| NVNT | b | 2462 | Ant1 | 2500 | -36.44 | 2.55 | 61.37 | Peak | 74 | Pass |
| NVNT | b | 2462 | Ant1 | 2500 | -45.31 | 2.55 | 52.5 | Average | 54 | Pass |
| NVNT | g | 2412 | Ant1 | 2310 | -37.54 | 2.55 | 60.27 | Peak | 74 | Pass |
| NVNT | g | 2412 | Ant1 | 2310 | -45.97 | 2.55 | 51.84 | Average | 54 | Pass |
| NVNT | g | 2412 | Ant1 | 2388.858 | -29.92 | 2.55 | 67.89 | Peak | 74 | Pass |
| NVNT | g | 2412 | Ant1 | 2389.911 | -43.91 | 2.55 | 53.9 | Average | 54 | Pass |
| NVNT | g | 2412 | Ant1 | 2390 | -31.09 | 2.55 | 66.72 | Peak | 74 | Pass |
| NVNT | g | 2412 | Ant1 | 2390 | -43.87 | 2.55 | 53.94 | Average | 54 | Pass |
| NVNT | g | 2462 | Ant1 | 2483.5 | -34.32 | 2.55 | 63.49 | Peak | 74 | Pass |
| NVNT | g | 2462 | Ant1 | 2483.5 | -45.29 | 2.55 | 52.52 | Average | 54 | Pass |
| NVNT | g | 2462 | Ant1 | 2486.061 | -32.36 | 2.55 | 65.45 | Peak | 74 | Pass |
| NVNT | g | 2462 | Ant1 | 2483.623 | -45.27 | 2.55 | 52.54 | Average | 54 | Pass |
| NVNT | g | 2462 | Ant1 | 2500 | -35.39 | 2.55 | 62.42 | Peak | 74 | Pass |
| NVNT | g | 2462 | Ant1 | 2500 | -45.63 | 2.55 | 52.18 | Average | 54 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 2310 | -36.85 | 2.55 | 60.96 | Peak | 74 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 2310 | -45.99 | 2.55 | 51.82 | Average | 54 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 2389.911 | -31.62 | 2.55 | 66.19 | Peak | 74 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 2389.911 | -44.22 | 2.55 | 53.59 | Average | 54 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 2390 | -33.76 | 2.55 | 64.05 | Peak | 74 | Pass |
| NVNT | n(HT20) | 2412 | Ant1 | 2390 | -44.18 | 2.55 | 53.63 | Average | 54 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 2483.5 | -34.02 | 2.55 | 63.79 | Peak | 74 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 2483.5 | -45.28 | 2.55 | 52.53 | Average | 54 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 2487.333 | -32.84 | 2.55 | 64.97 | Peak | 74 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 2483.517 | -45.28 | 2.55 | 52.53 | Average | 54 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 2500 | -33.82 | 2.55 | 63.99 | Peak | 74 | Pass |
| NVNT | n(HT20) | 2462 | Ant1 | 2500 | -45.61 | 2.55 | 52.2 | Average | 54 | Pass |

Test Graphs

Restrict Band NVNT b 2412MHz Ant1 Peak

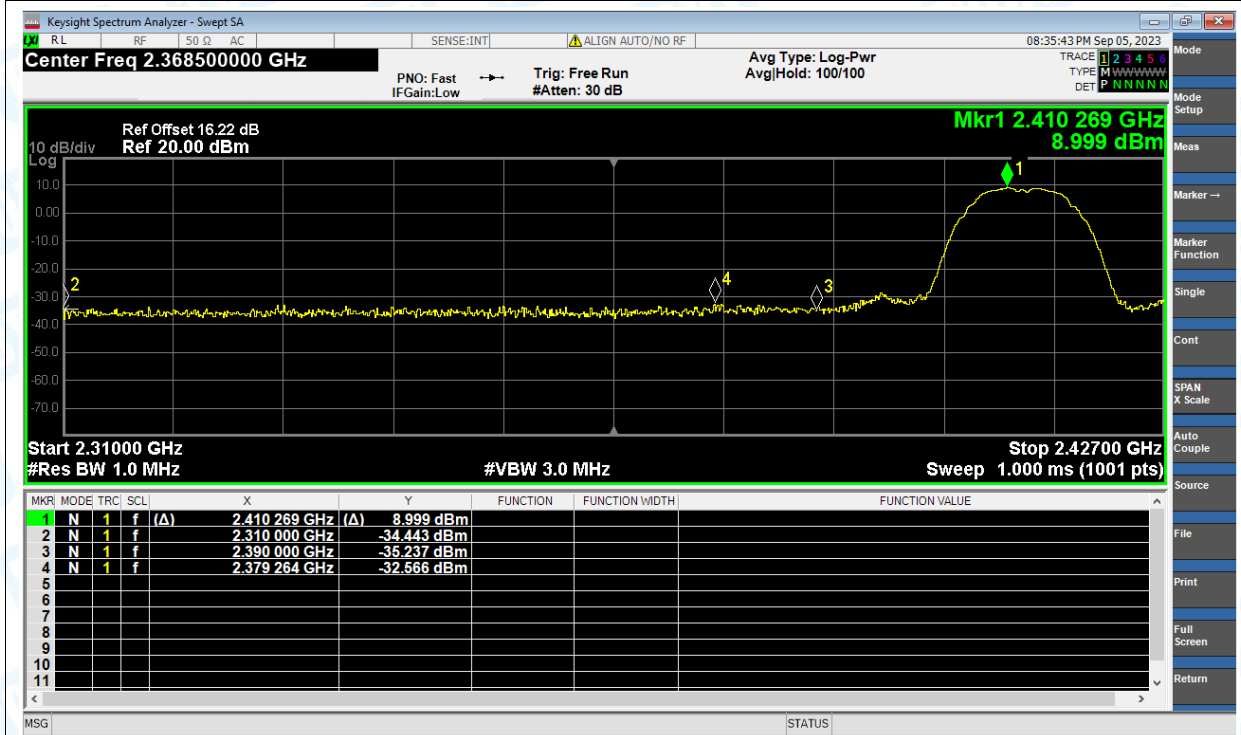

Restrict Band NVNT b 2412MHz Ant1 Average


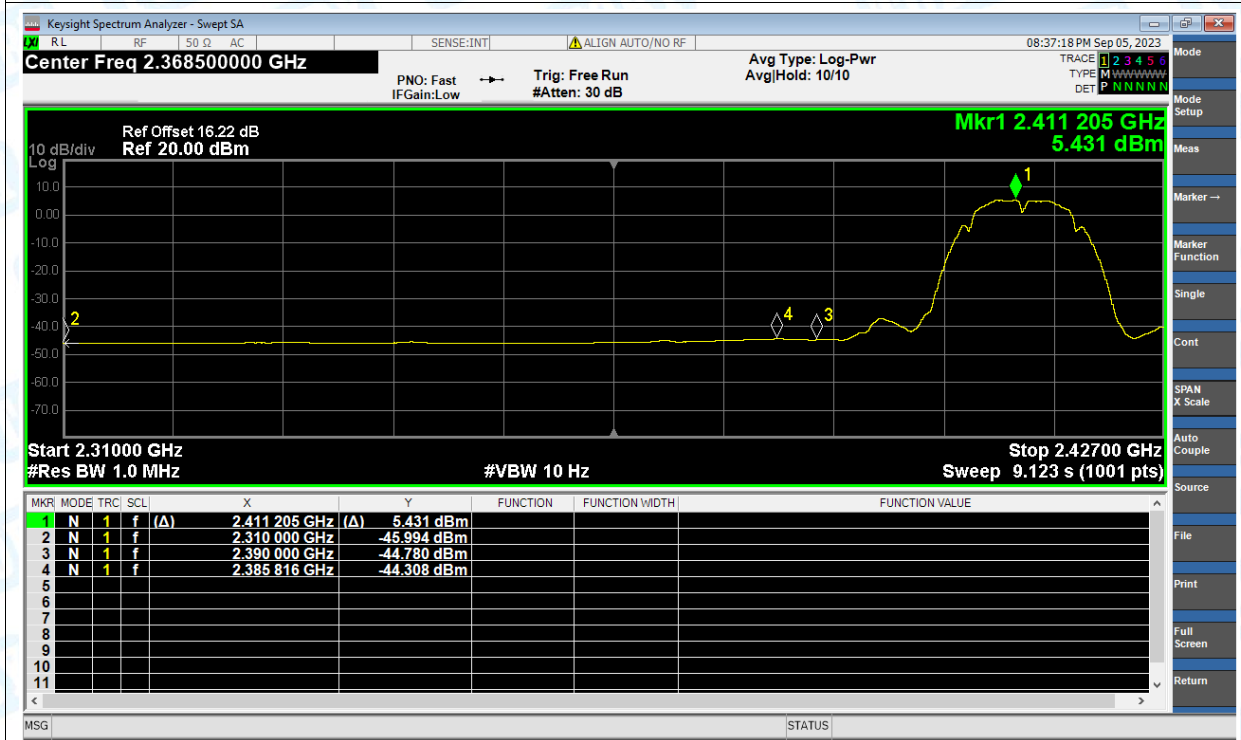


Restrict Band NVNT b 2462MHz Ant1 Peak



Restrict Band NVNT b 2462MHz Ant1 Average




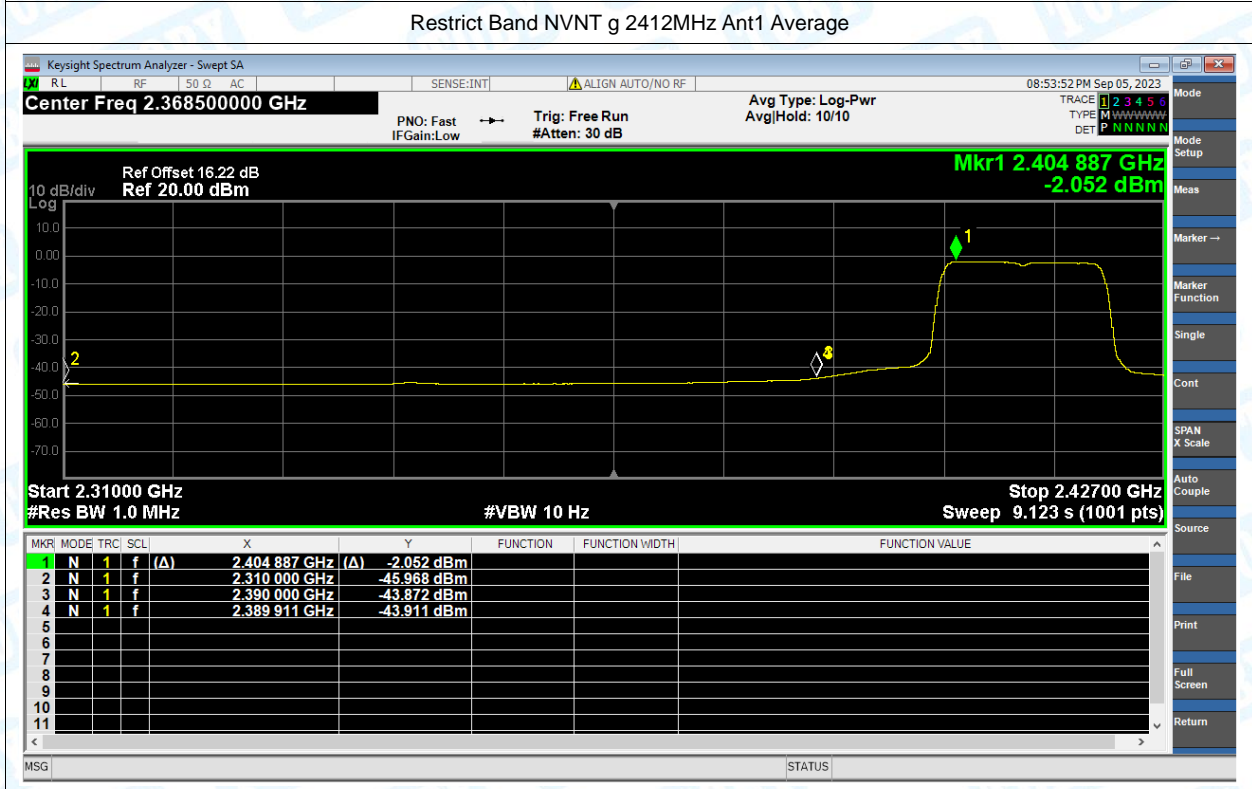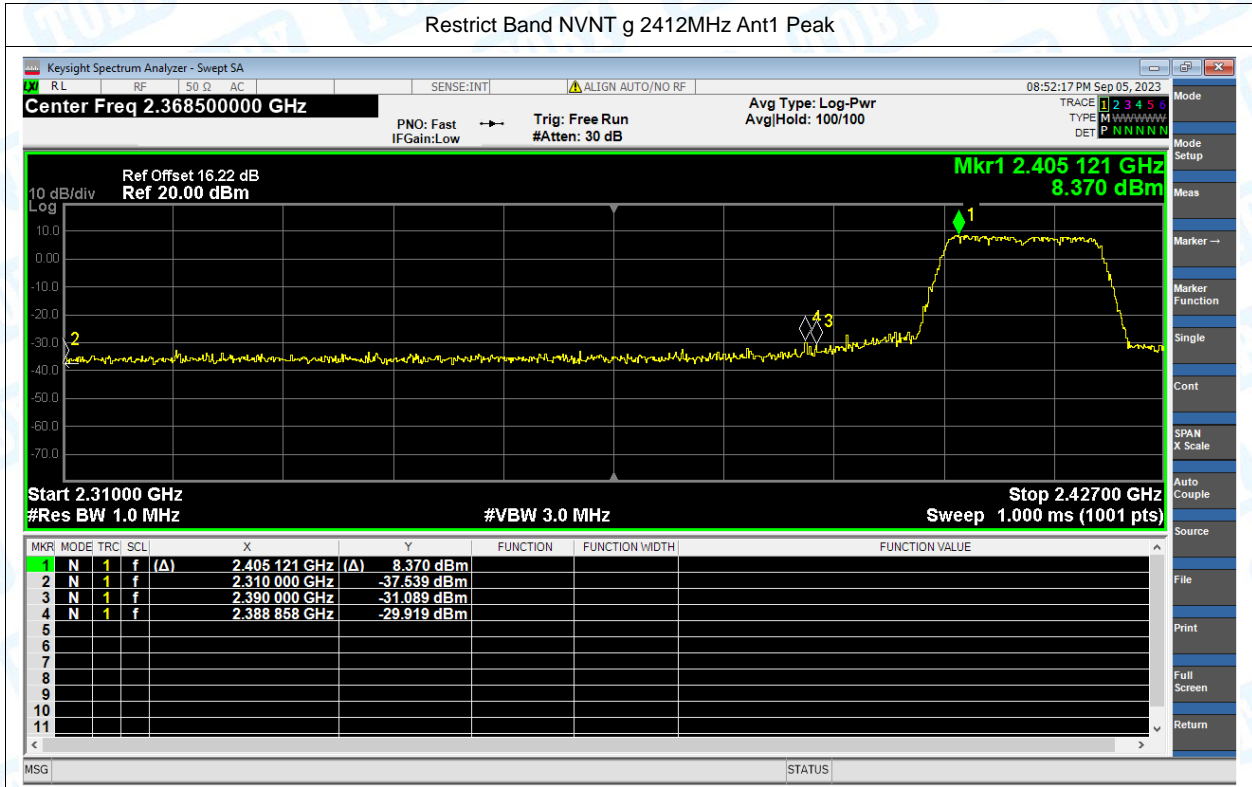


Restrict Band NVNT g 2462MHz Ant1 Peak




Restrict Band NVNT g 2462MHz Ant1 Average

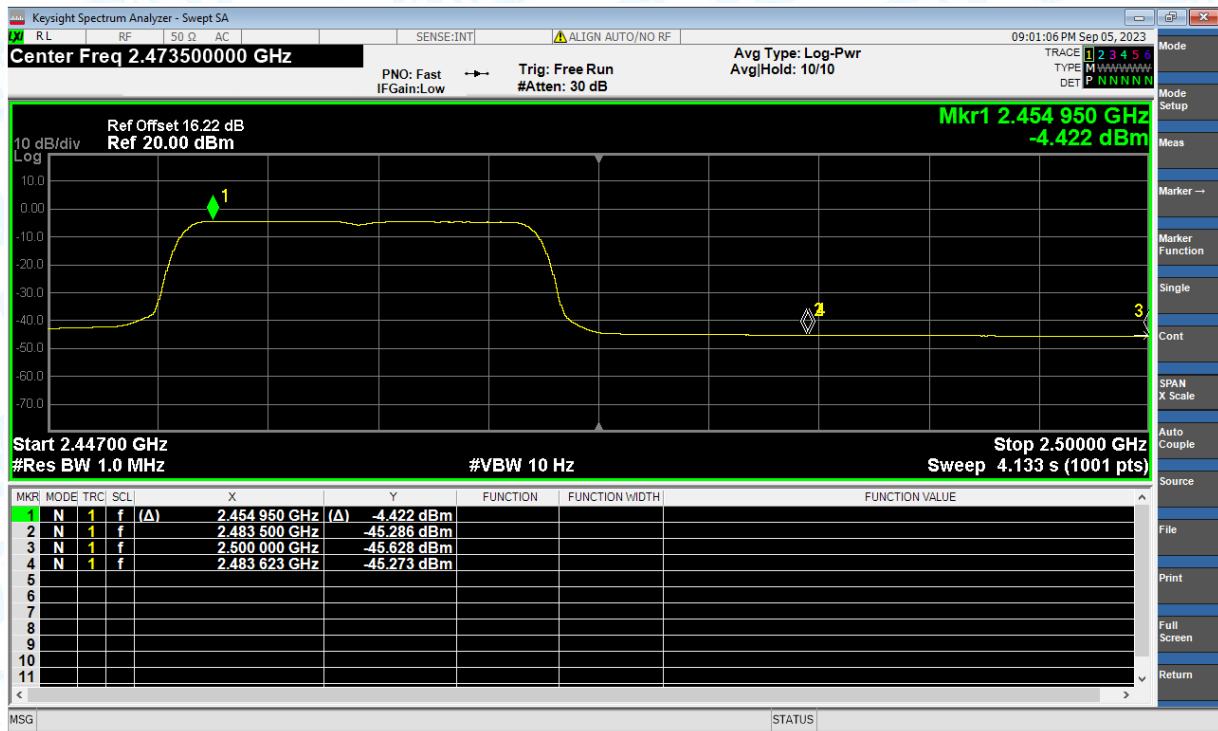

Restrict Band NVNT n(HT20) 2412MHz Ant1 Peak

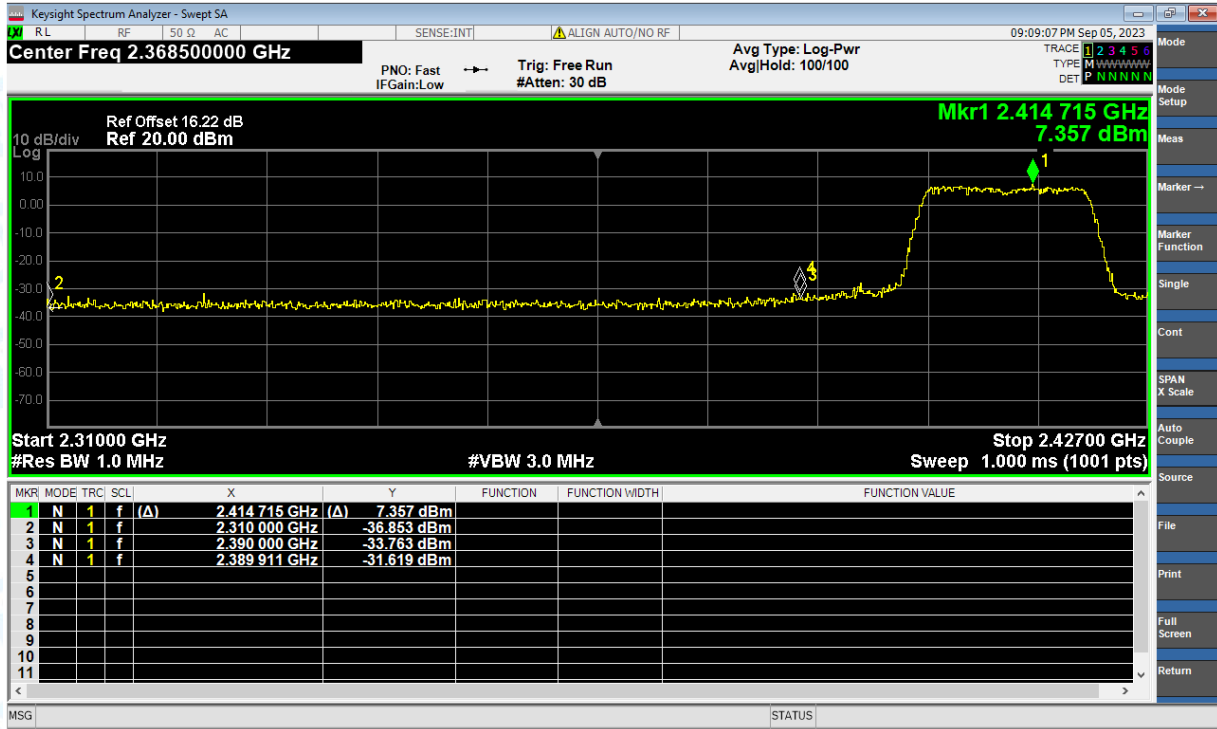

Restrict Band NVNT n(HT20) 2412MHz Ant1 Average

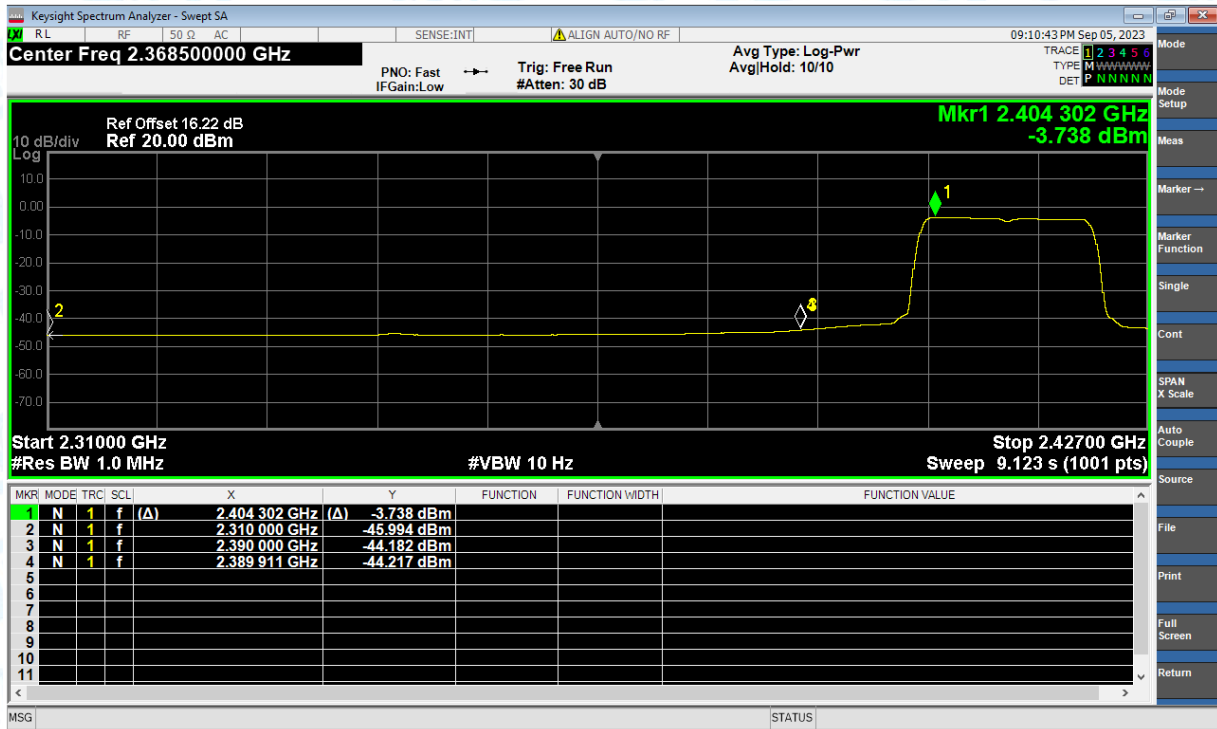

Restrict Band NVNT n(HT20) 2462MHz Ant1 Peak



Restrict Band NVNT n(HT20) 2462MHz Ant1 Average

