

Appendix A

RF Test Data for BT V5.0(BDR/EDR) (Conducted Measurement)

Product Name: Wireless Audio Receiver

Trade Mark: 1Mii

Test Model: ML101

Environmental Conditions


| | |
|--------------------|-----------|
| Temperature: | 24.6° C |
| Relative Humidity: | 54.1% |
| ATM Pressure: | 100.0 kPa |
| Test Engineer: | Jay Li |
| Supervised by: | Li Huan |

A.1 Maxmum Conducted Peak Output Power


| Mode | Channel. | Maximum Peak Output Power [dBm] | Limit [dBm] | Verdict |
|---------------|----------|---------------------------------|-------------|---------|
| GFSK | LCH | 0.168 | 21 | PASS |
| | MCH | 0.353 | 21 | PASS |
| | HCH | 0.414 | 21 | PASS |
| $\pi/4$ DQPSK | LCH | 2.244 | 21 | PASS |
| | MCH | 2.468 | 21 | PASS |
| | HCH | 2.490 | 21 | PASS |
| 8DPSK | LCH | 2.780 | 21 | PASS |
| | MCH | 2.992 | 21 | PASS |
| | HCH | 3.028 | 21 | PASS |


Test Graphs

GFSK/LCH

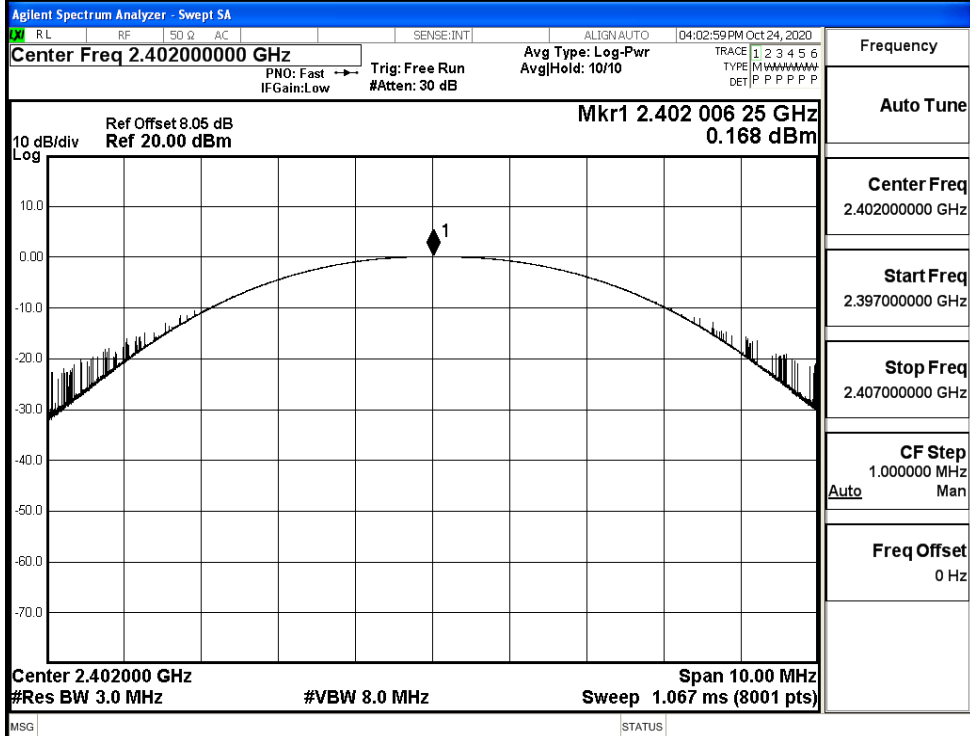


GFSK/MCH

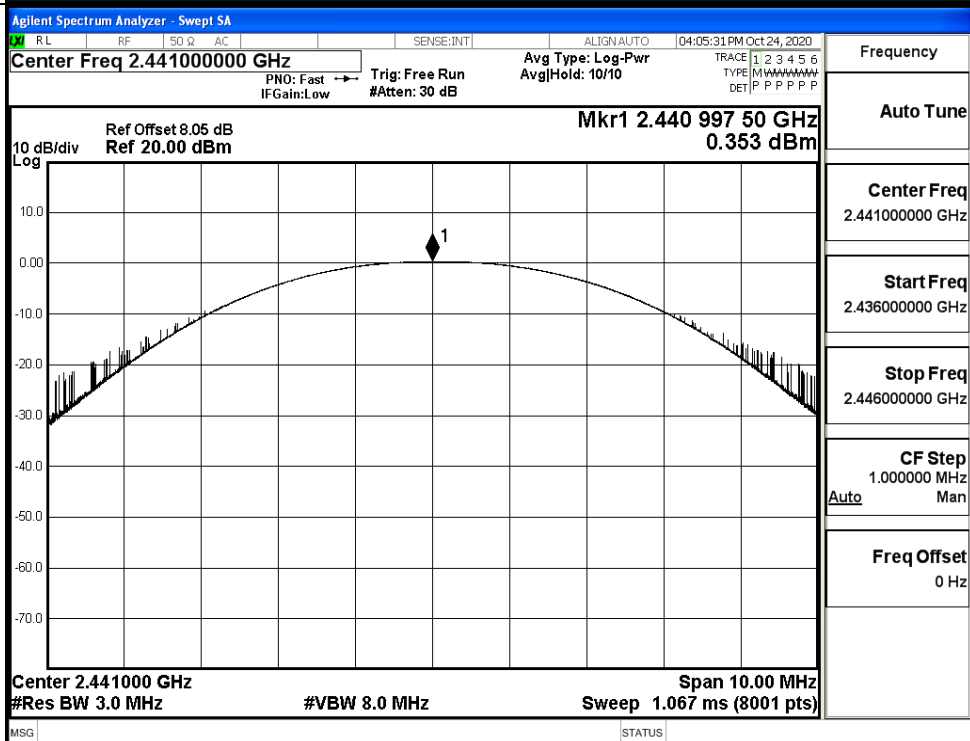


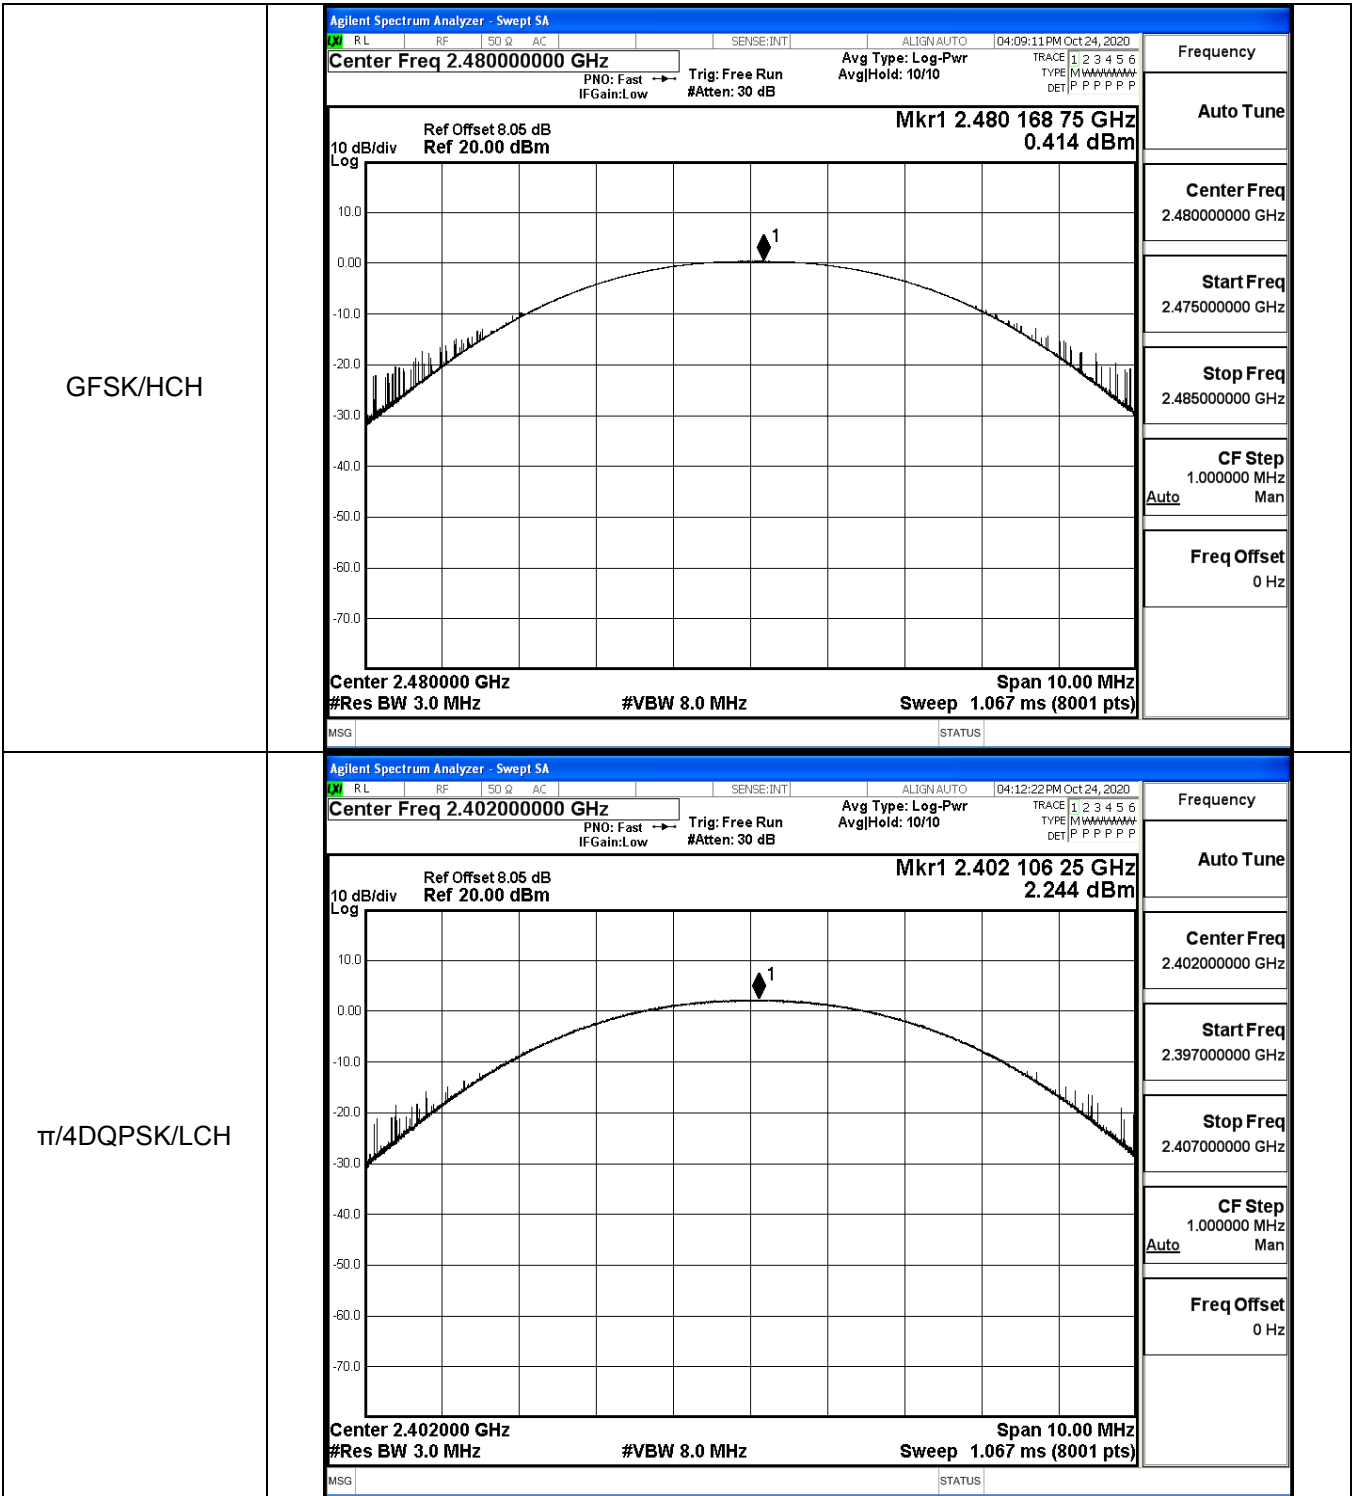


$\pi/4$ DQPSK/MCH

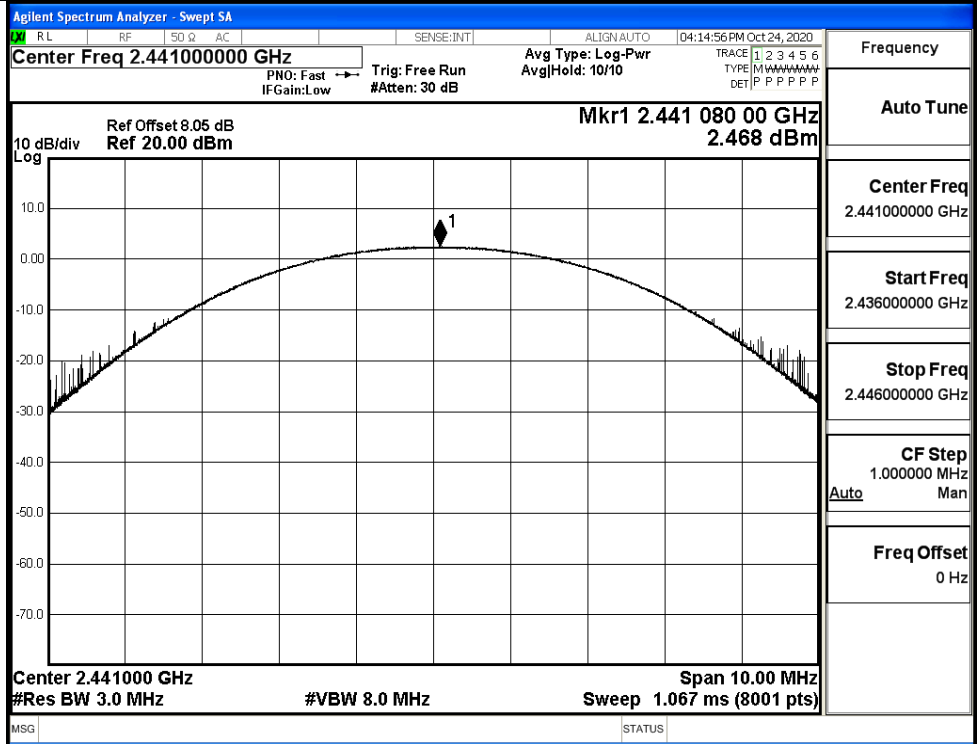


$\pi/4$ DQPSK/HCH

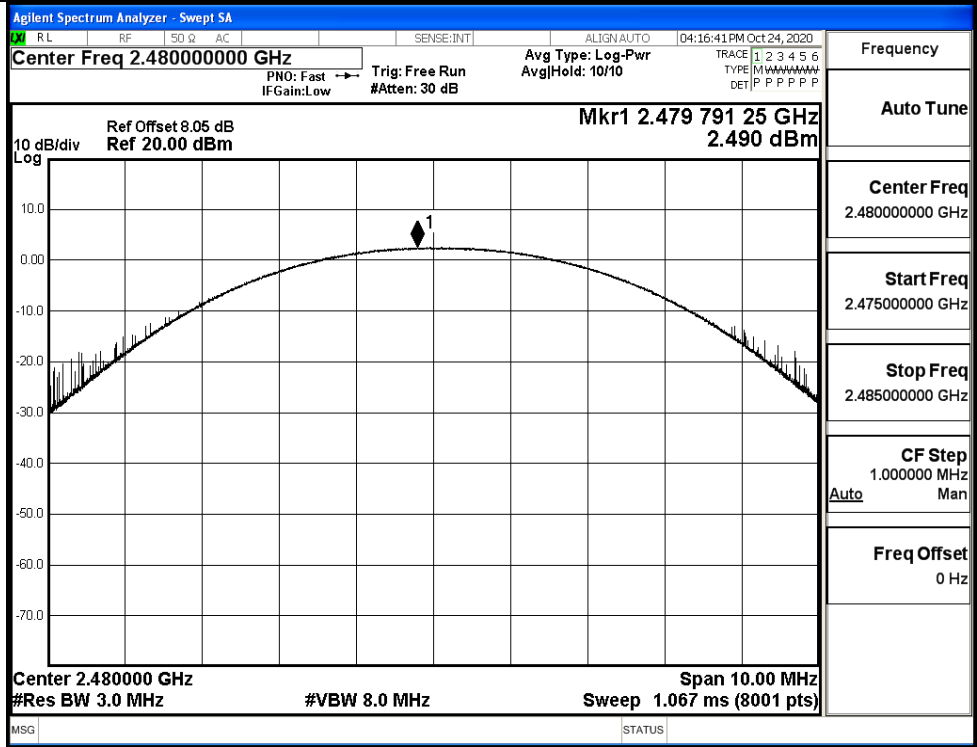


8DPSK/LCH

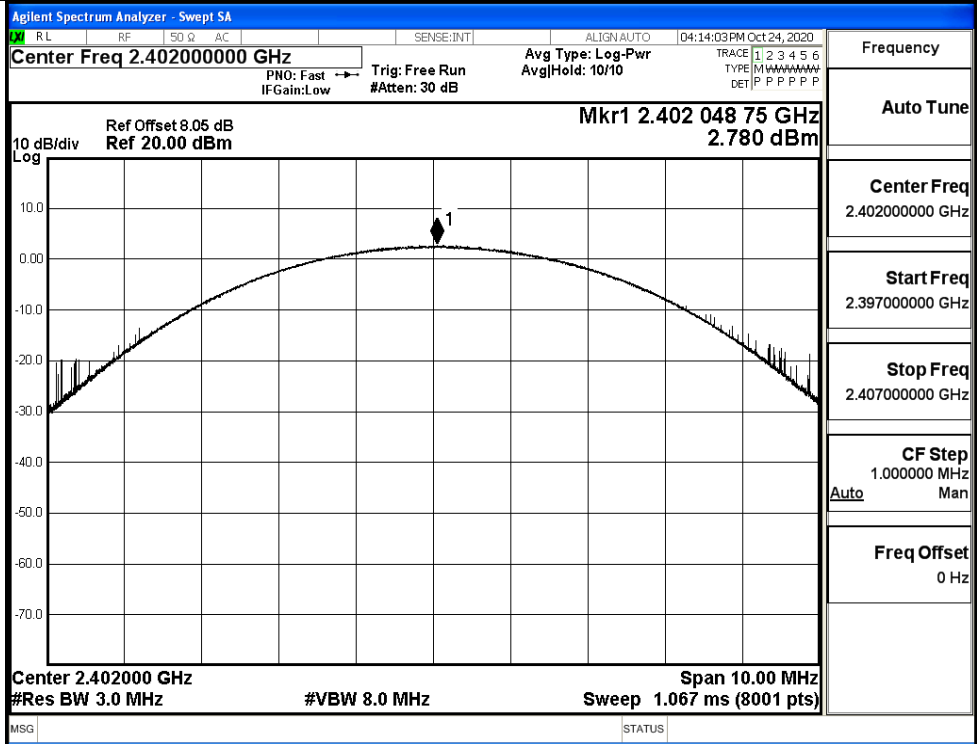

8DPSK/MCH

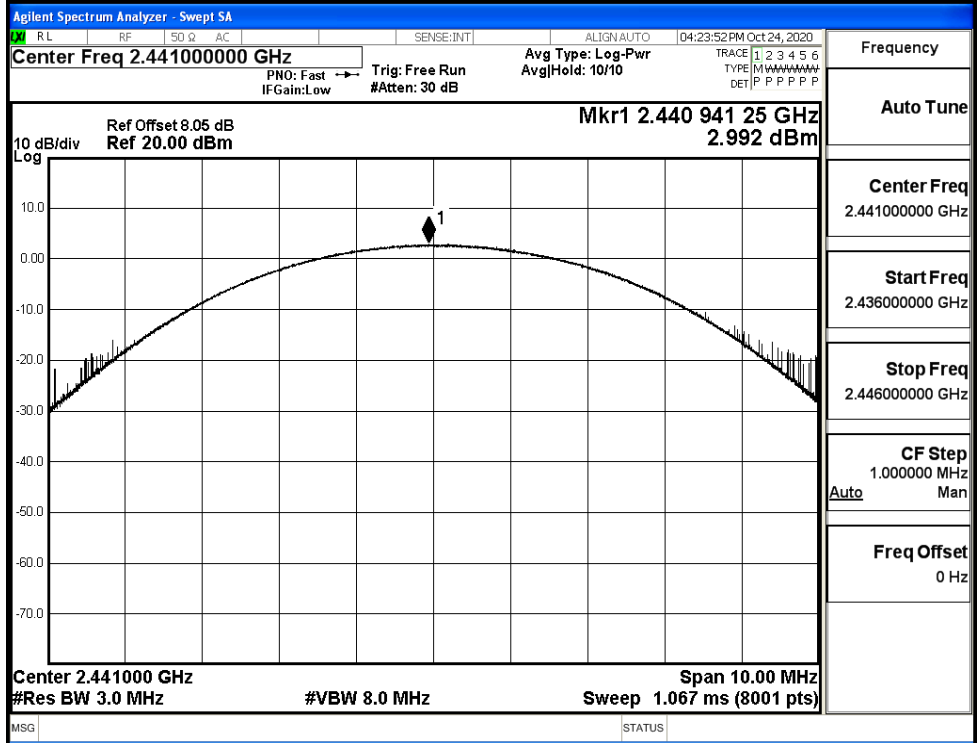


8DPSK/HCH

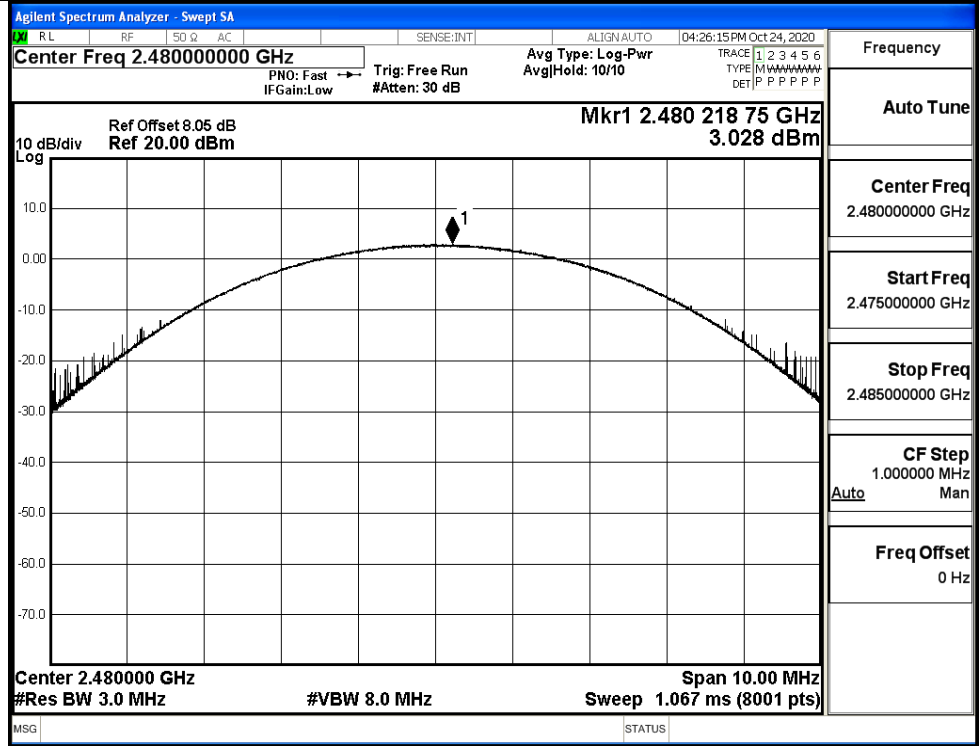


A.2 20dB Bandwidth

| Mode | Channel. | 20dB Bandwidth [MHz] | Limit [MHz] | Verdict |
|---------------|----------|----------------------|---------------|---------|
| GFSK | LCH | 1.031 | Not Specified | PASS |
| | MCH | 1.034 | Not Specified | PASS |
| | HCH | 1.029 | Not Specified | PASS |
| $\pi/4$ DQPSK | LCH | 1.366 | Not Specified | PASS |
| | MCH | 1.365 | Not Specified | PASS |
| | HCH | 1.365 | Not Specified | PASS |
| 8DPSK | LCH | 1.348 | Not Specified | PASS |
| | MCH | 1.350 | Not Specified | PASS |
| | HCH | 1.347 | Not Specified | PASS |

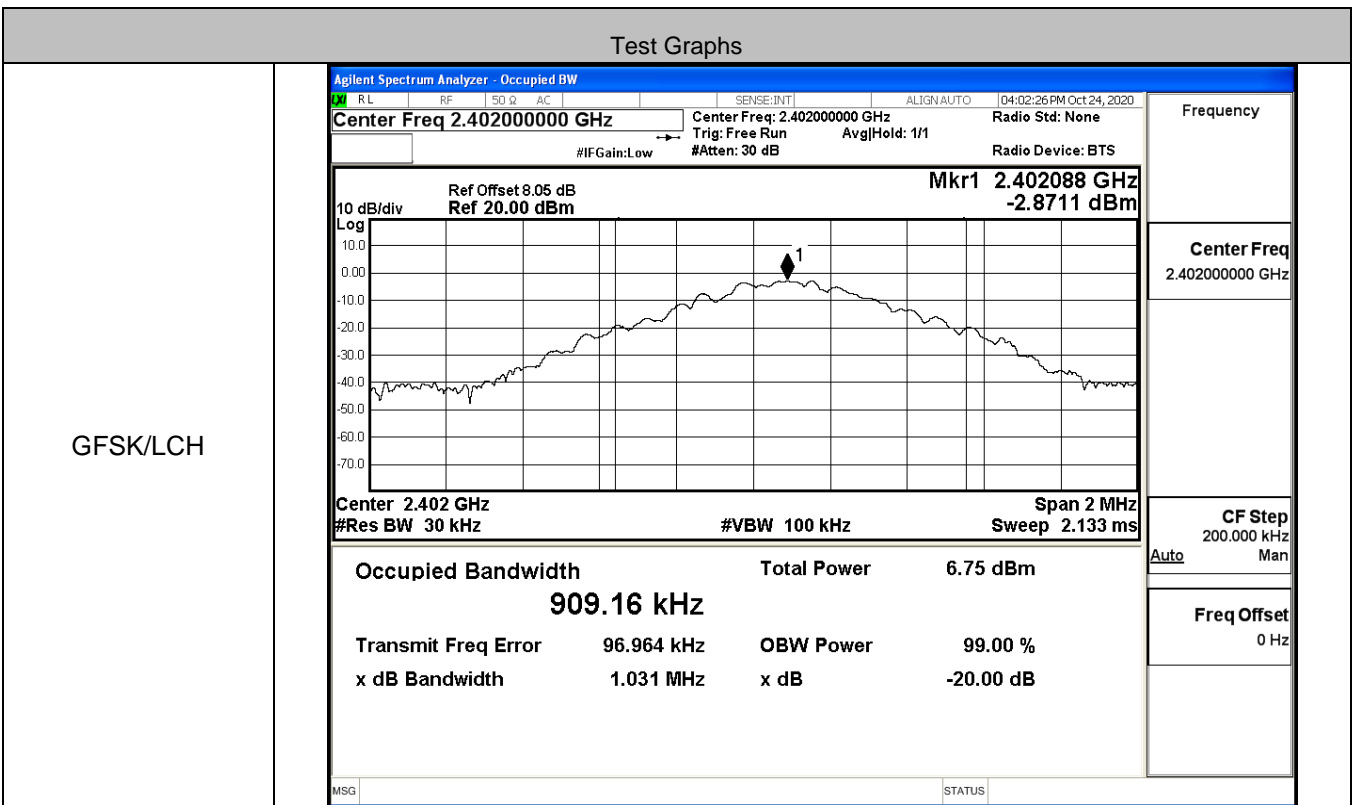

GFSK/MCH

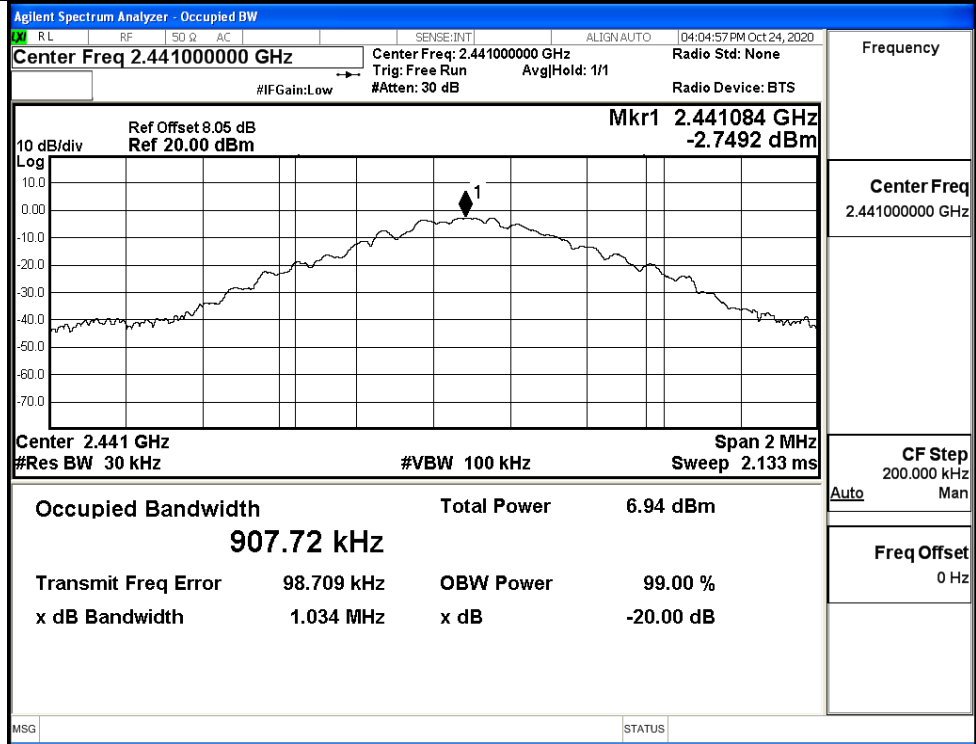


| | |
|-------------|----------------|
| Frequency | 2.44100000 GHz |
| Center Freq | 2.44100000 GHz |
| CF Step | 200.000 kHz |
| Auto | Man |
| Freq Offset | 0 Hz |

GFSK/HCH




| | |
|-------------|----------------|
| Frequency | 2.48000000 GHz |
| Center Freq | 2.48000000 GHz |
| CF Step | 200.000 kHz |
| Auto | Man |
| Freq Offset | 0 Hz |


$\pi/4$ DQPSK/LCH

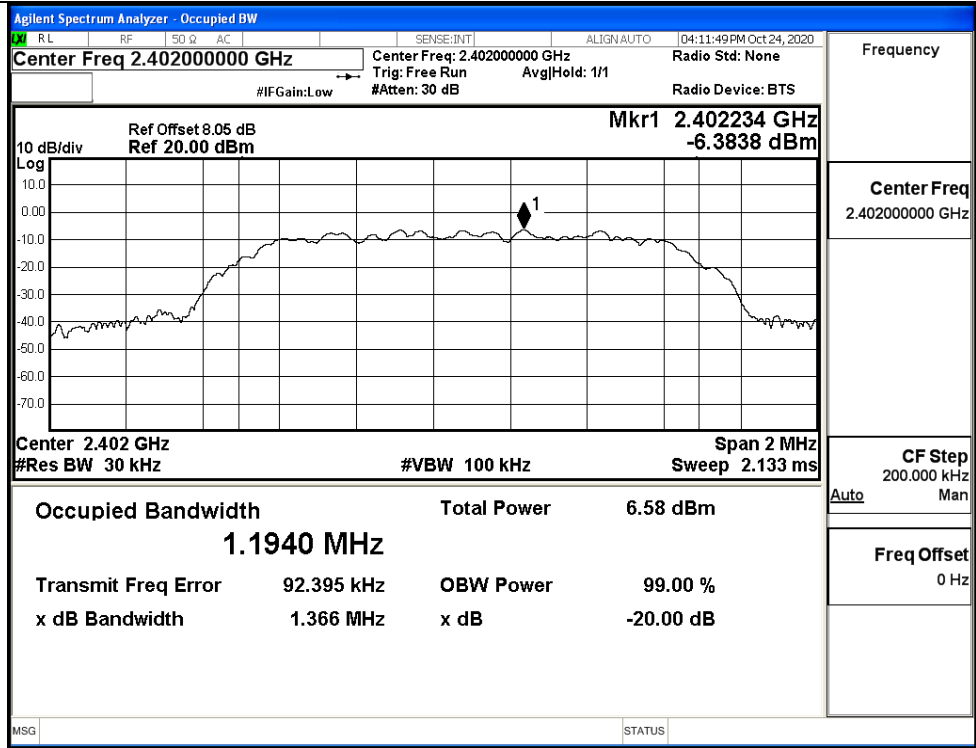


$\pi/4$ DQPSK/MCH

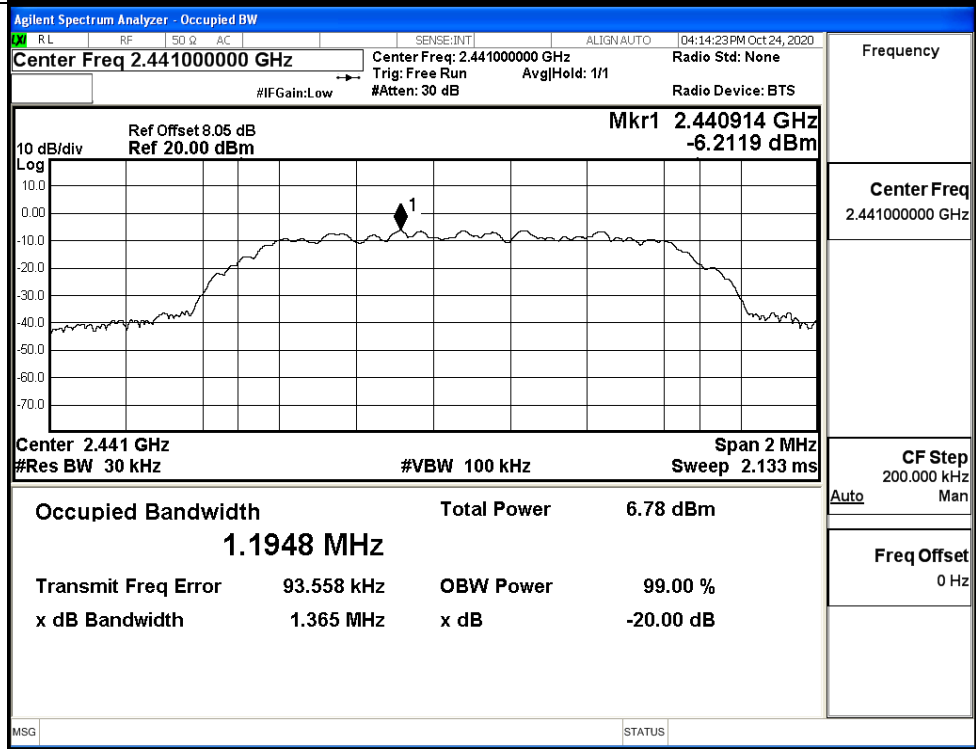


$\pi/4$ DQPSK/HCH

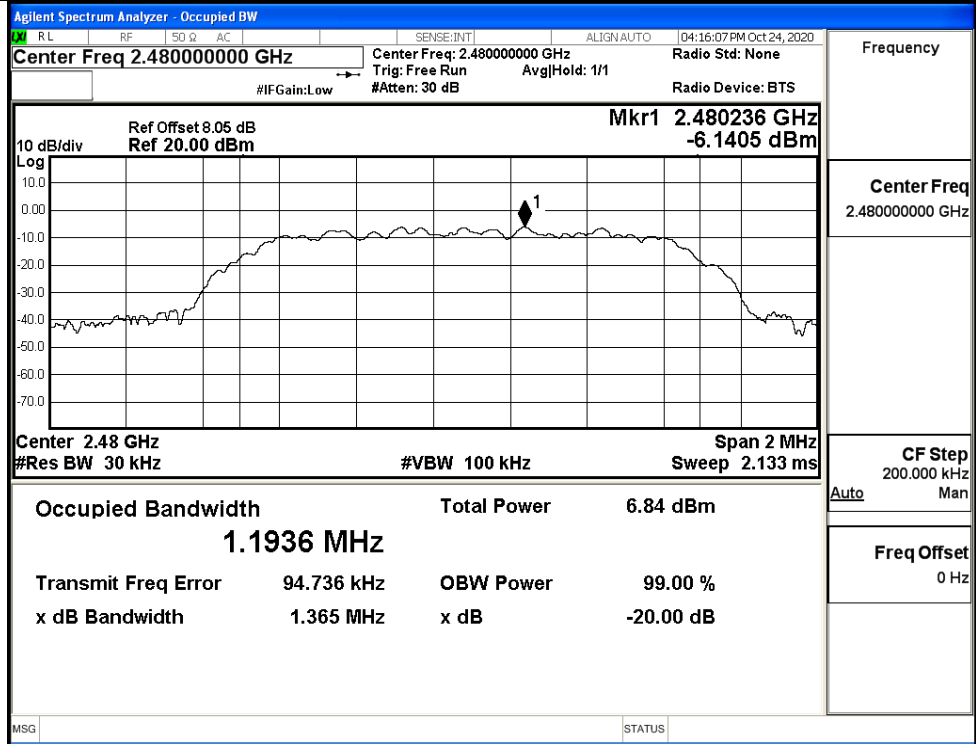


8DPSK/LCH

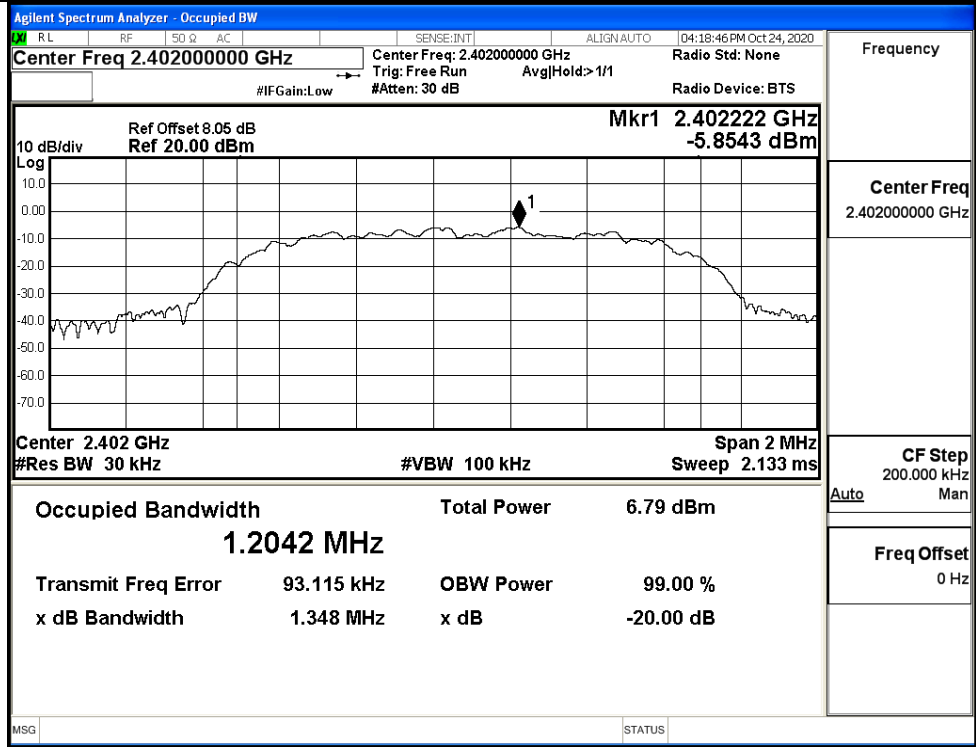

8DPSK/MCH

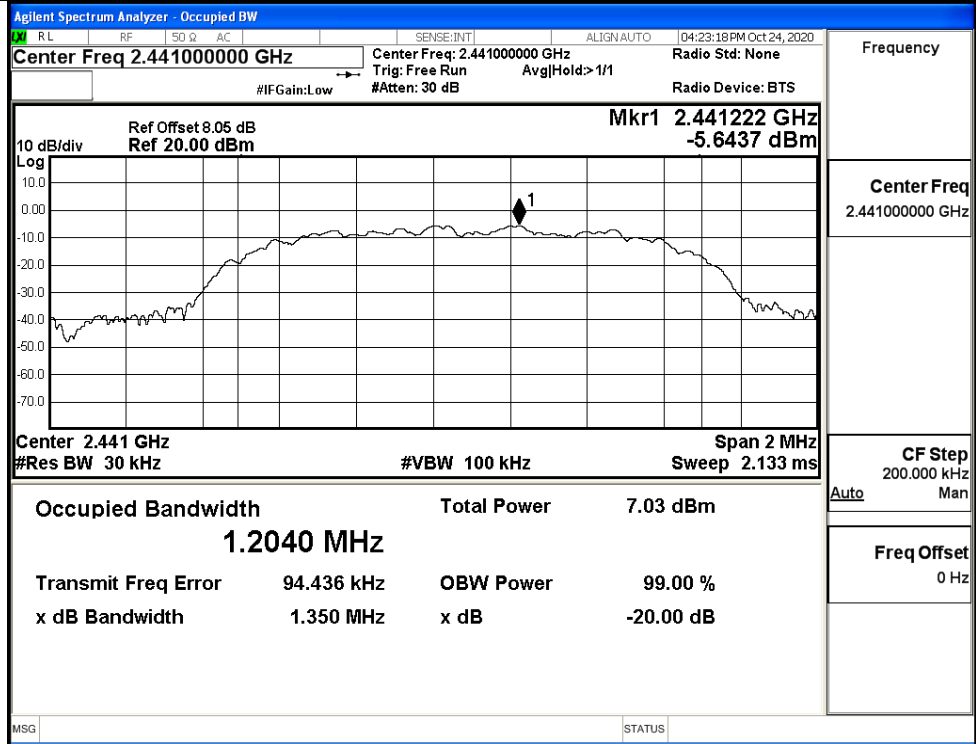


8DPSK/HCH

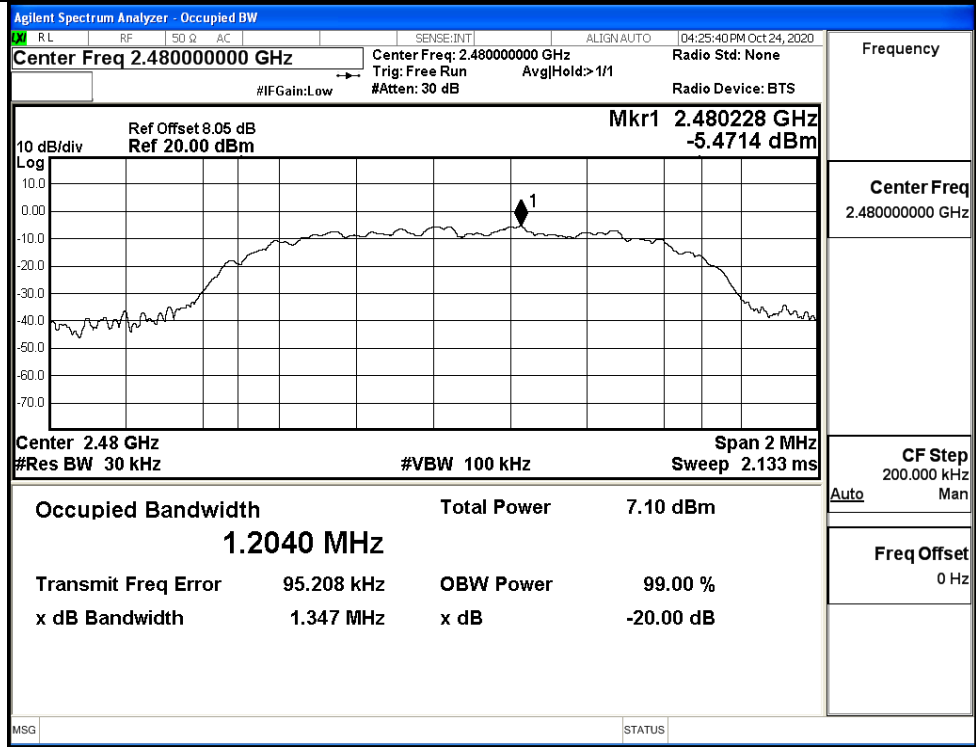


A.3 Carrier Frequency Separation


| Mode | Channel | Carrier Frequency Separation [MHz] | Limit [MHz] | Verdict |
|----------|---------|------------------------------------|-------------|---------|
| GFSK | LCH | 1.067 | 0.689 | PASS |
| | MCH | 0.816 | 0.689 | PASS |
| | HCH | 1.008 | 0.689 | PASS |
| π/4DQPSK | LCH | 1.034 | 0.911 | PASS |
| | MCH | 1.014 | 0.911 | PASS |
| | HCH | 1.004 | 0.911 | PASS |
| 8DPSK | LCH | 1.150 | 0.900 | PASS |
| | MCH | 0.984 | 0.900 | PASS |
| | HCH | 1.004 | 0.900 | PASS |

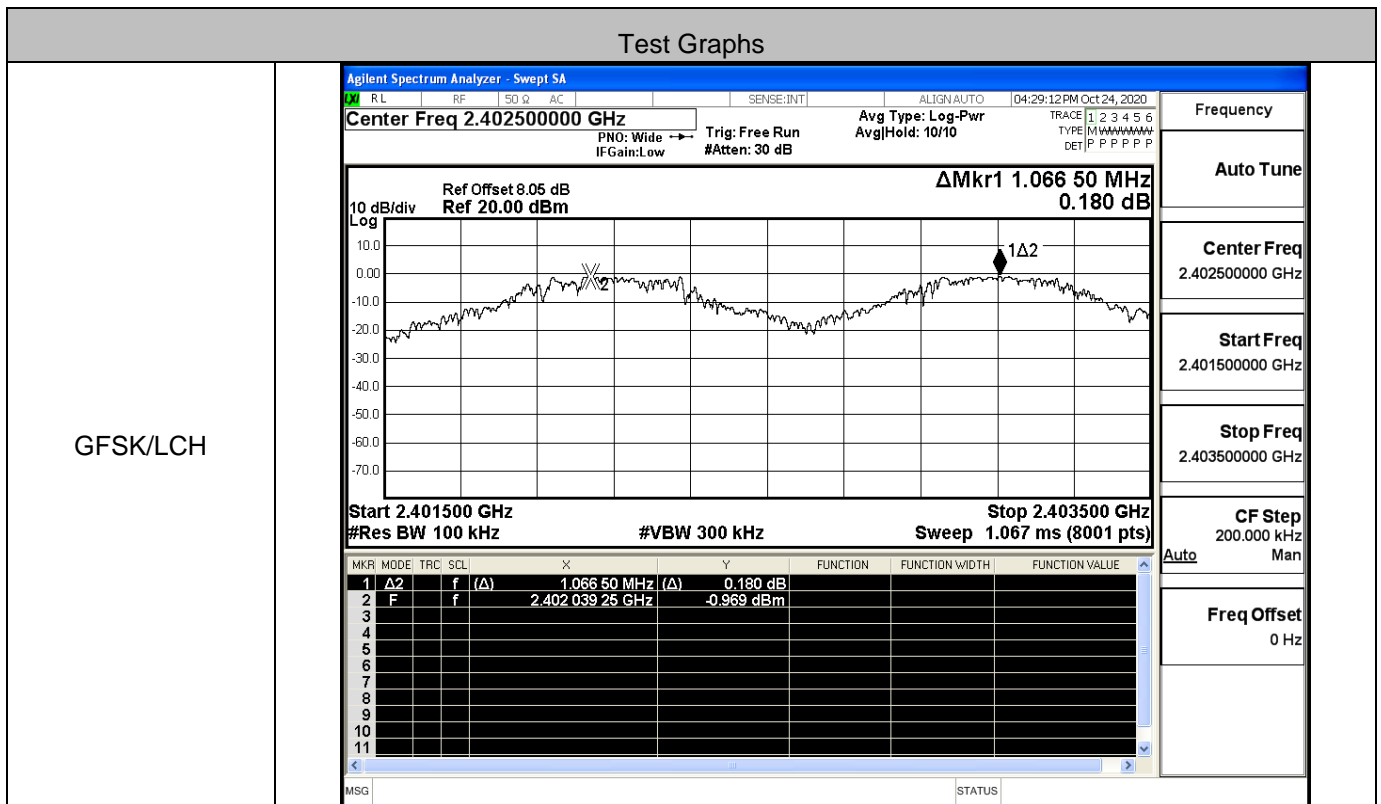


GFSK/MCH

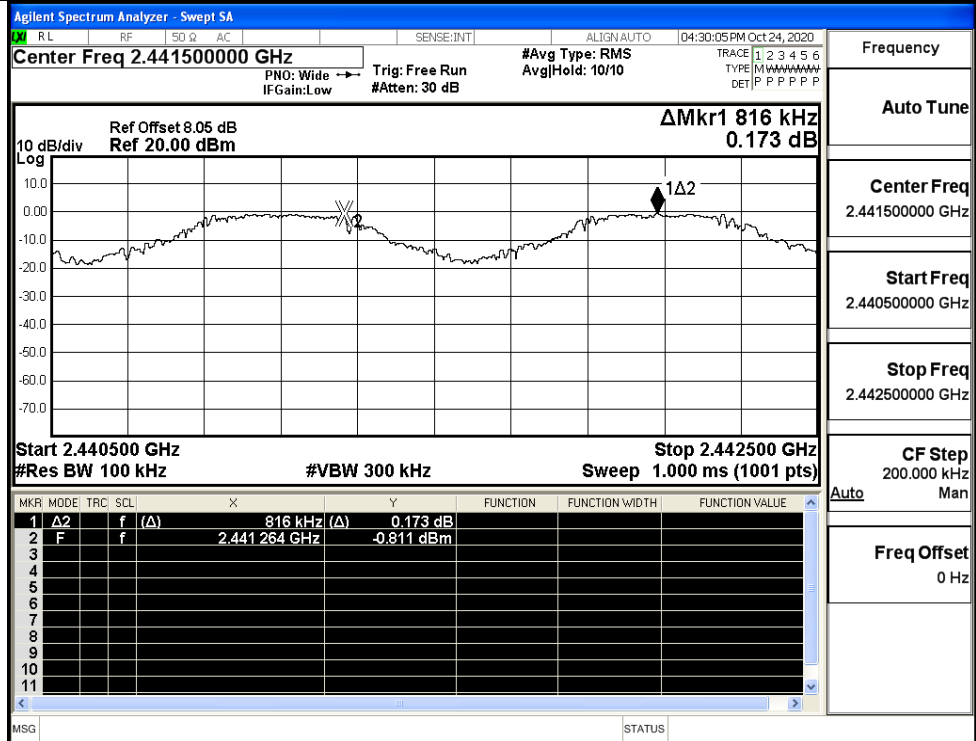


GFSK/HCH

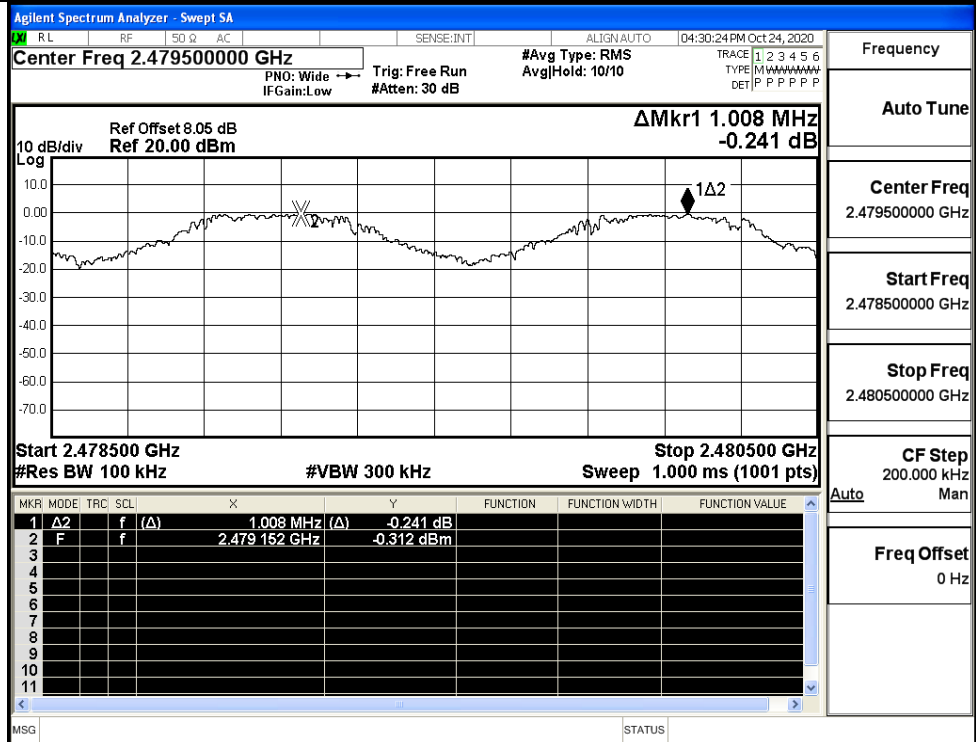


$\pi/4$ DQPSK/LCH

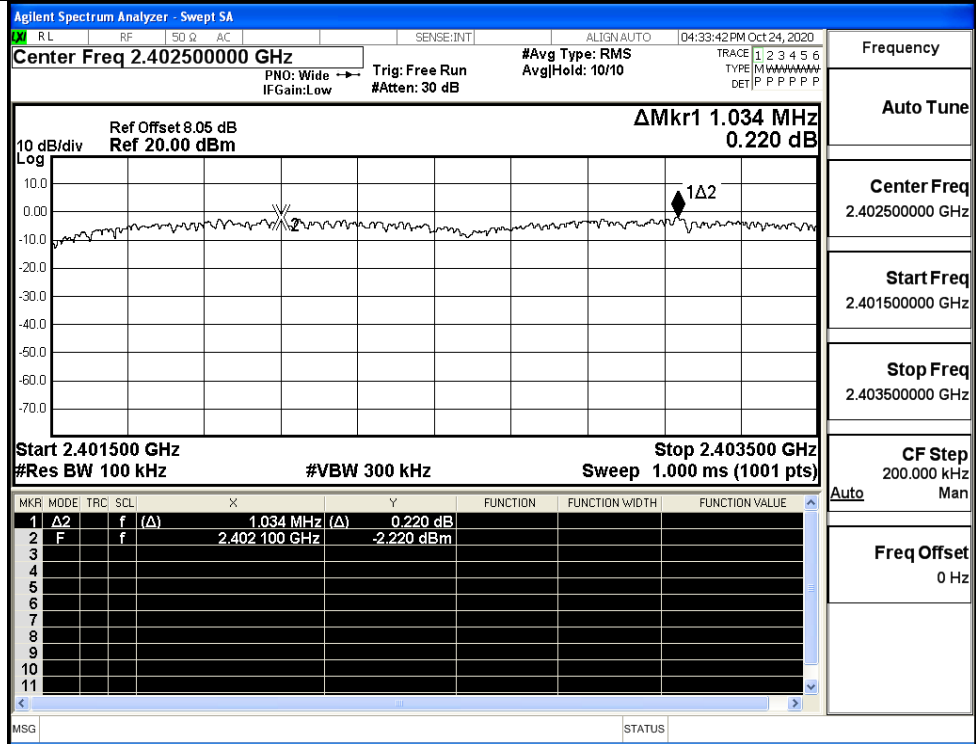

$\pi/4$ DQPSK/MCH

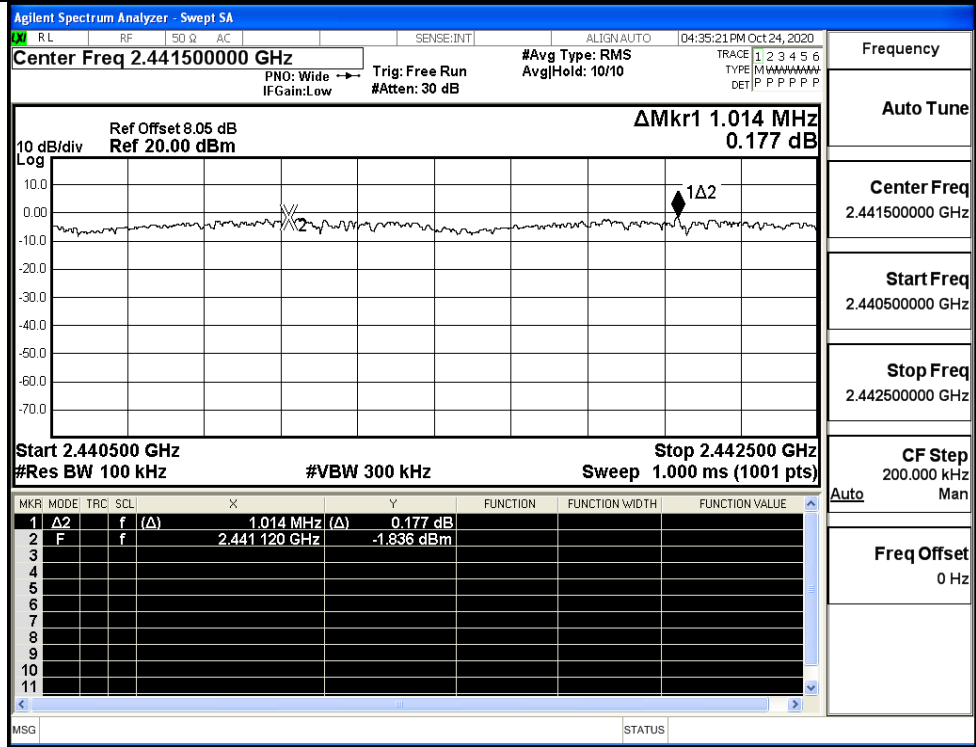

π/4DQPSK/HCH

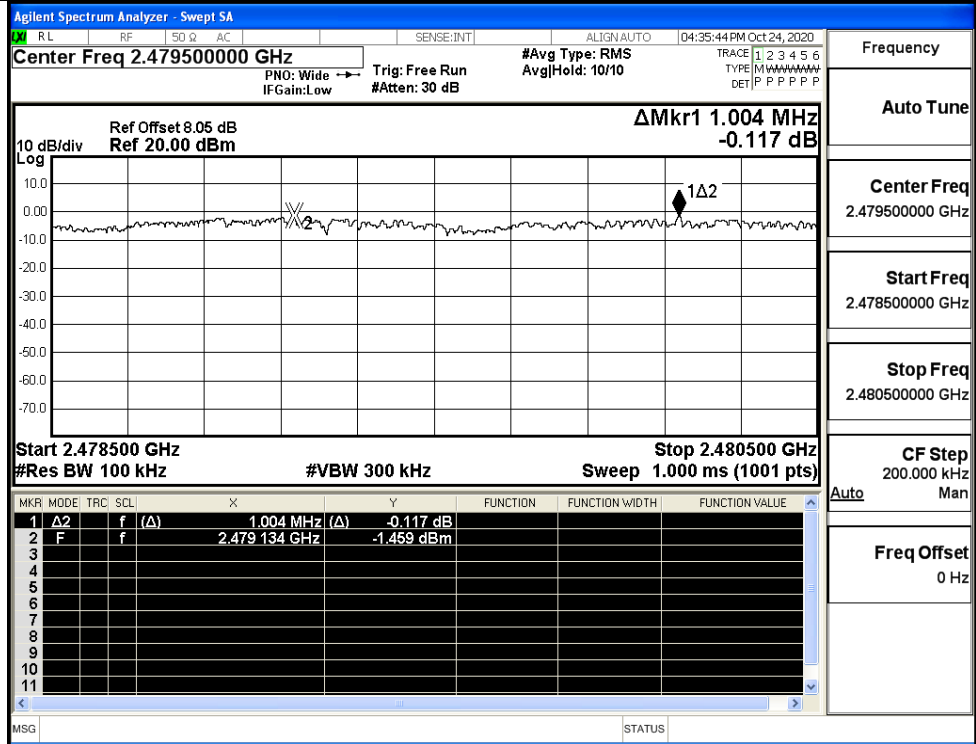

Frequency

Auto Tune

Center Freq
2.479500000 GHz


Start Freq
2.478500000 GHz

Stop Freq
2.480500000 GHz

CF Step
200.000 kHz
Auto Man

Freq Offset
0 Hz

8DPSK/LCH

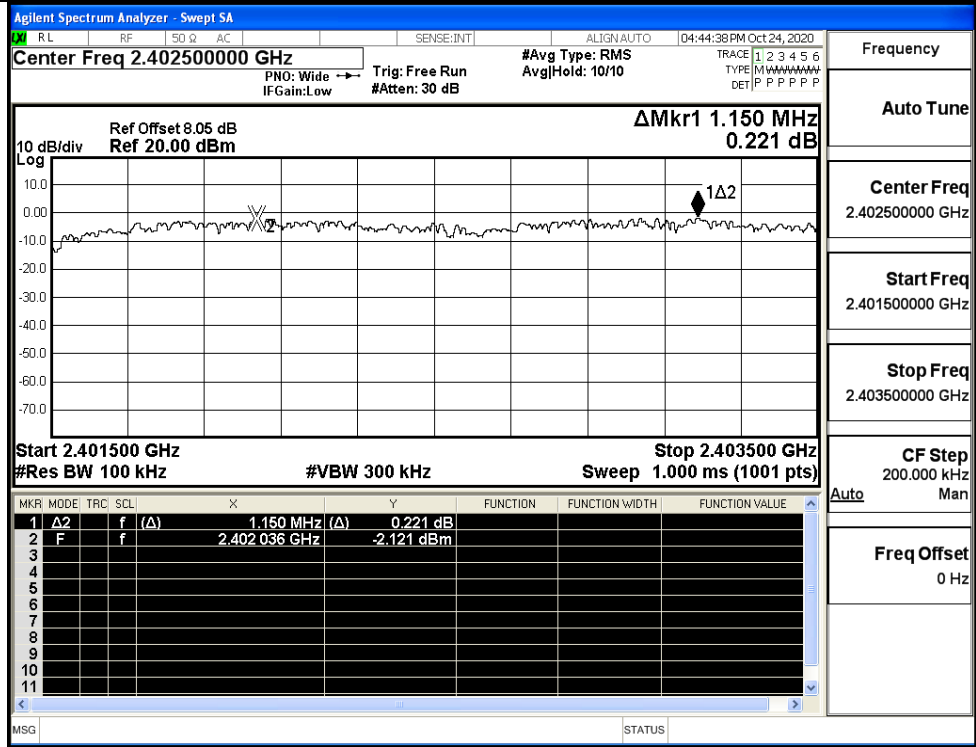

Frequency

Auto Tune

Center Freq
2.402500000 GHz


Start Freq
2.401500000 GHz

Stop Freq
2.403500000 GHz


CF Step
200.000 kHz
Auto Man

Freq Offset
0 Hz

8DPSK/MCH

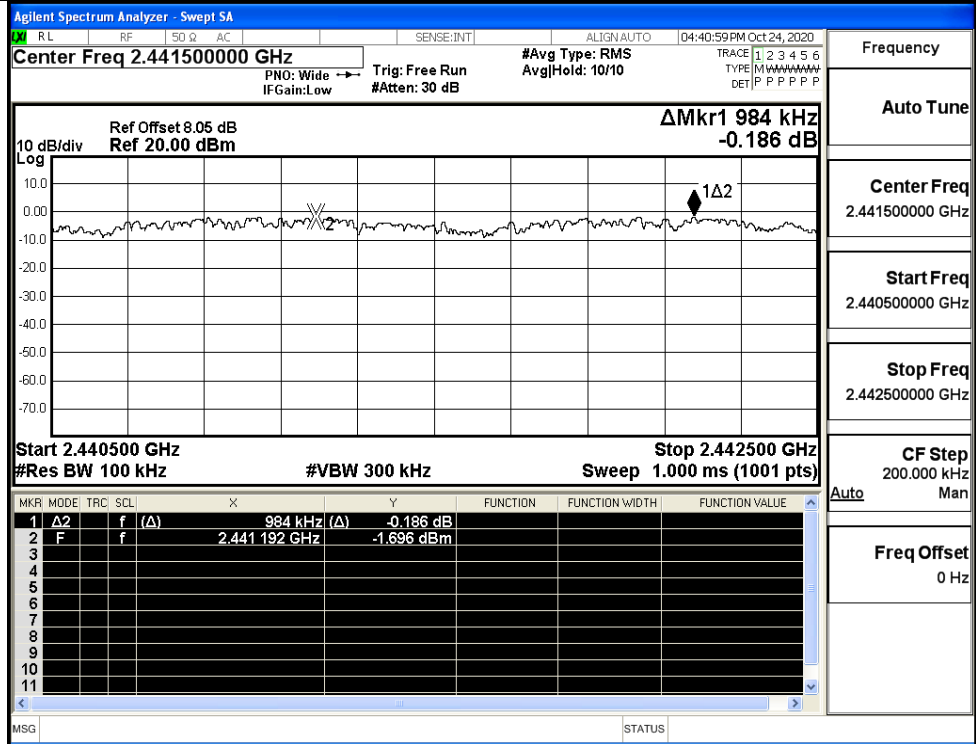



8DPSK/HCH

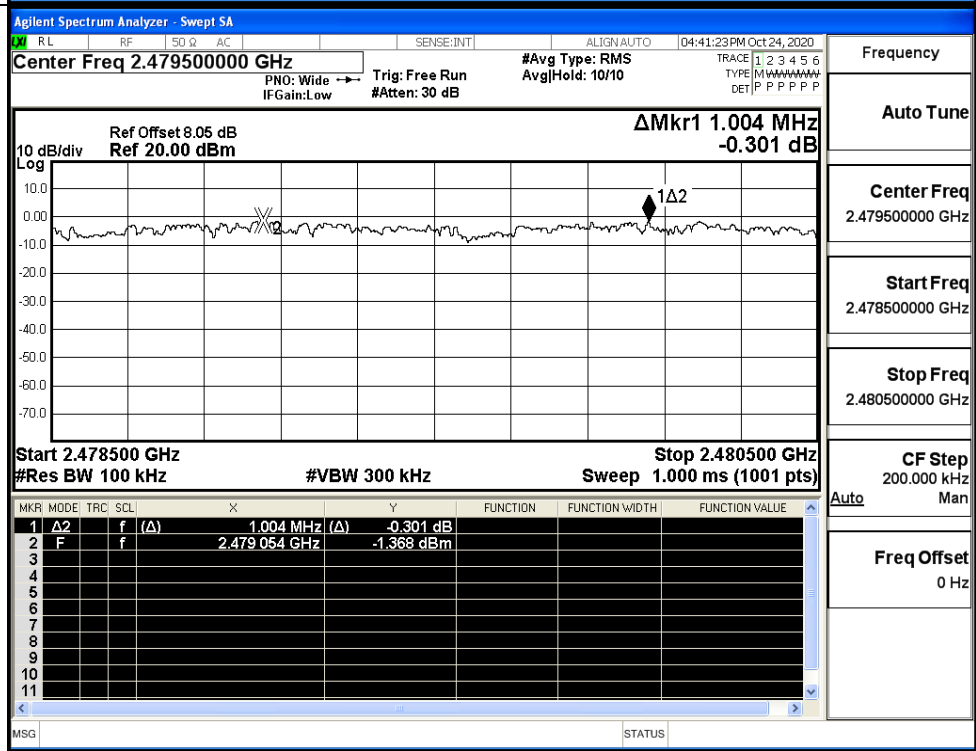


A.4 Hopping Channel Number

| Mode | Channel. | Number of Hopping Channel [N] | Limit [N] | Verdict |
|---------------|----------|-------------------------------|-----------|---------|
| GFSK | Hop | 79 | >=15 | PASS |
| $\pi/4$ DQPSK | Hop | 79 | >=15 | PASS |
| 8DPSK | Hop | 79 | >=15 | PASS |

Test Graphs

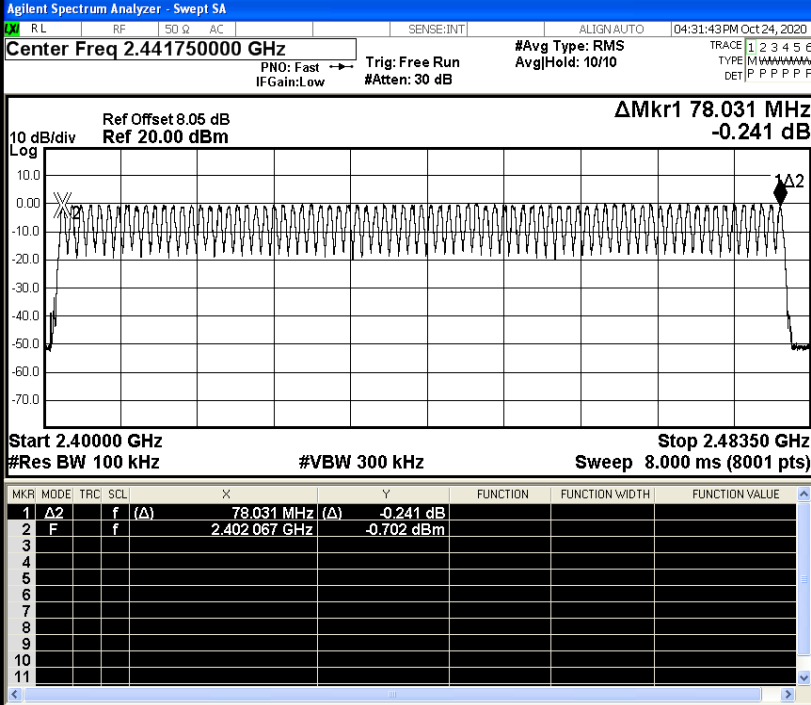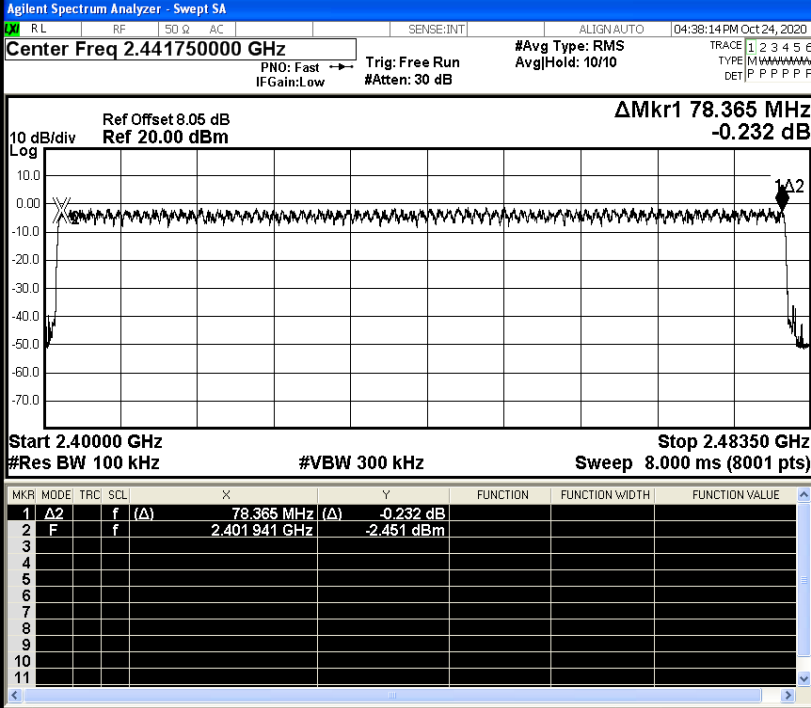
| | | |
|------------------------------------|--|--|
| <p>GFSK/Hop</p> |  | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441750000 GHz</p> <p>Start Freq 2.400000000 GHz</p> <p>Stop Freq 2.483500000 GHz</p> <p>CF Step 8.350000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> |
| <p>$\pi/4$DQPSK/Hop</p> |  | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441750000 GHz</p> <p>Start Freq 2.400000000 GHz</p> <p>Stop Freq 2.483500000 GHz</p> <p>CF Step 8.350000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> |

8DPSK/Hop

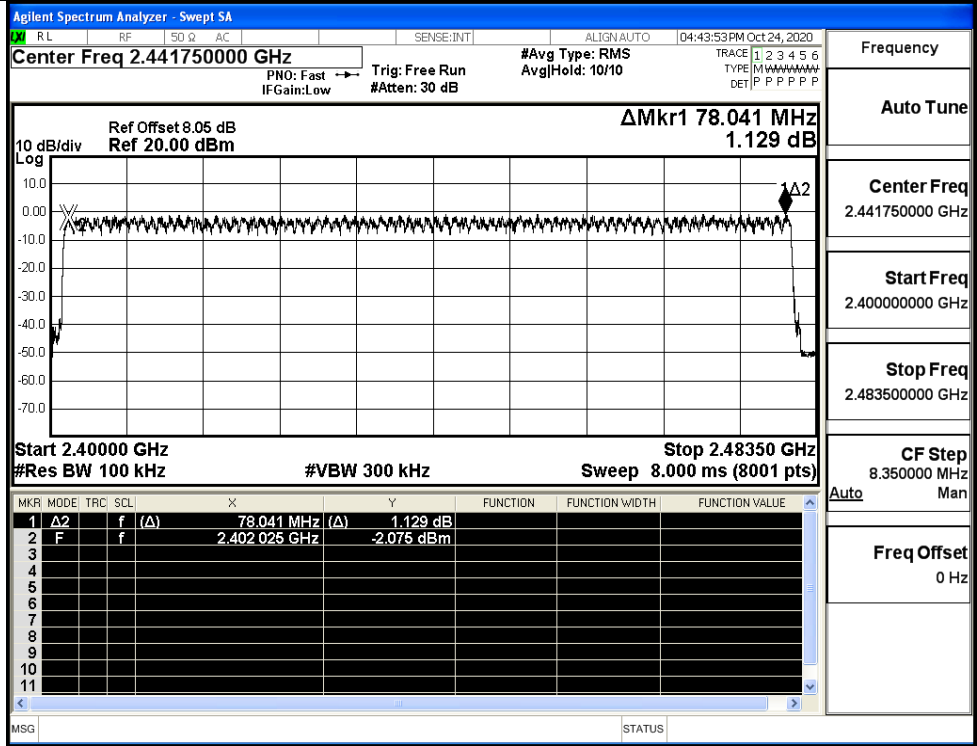


A.5 Dwell Time


| Mode | Packet | Channel | Burst Width [ms/hop/ch] | Total Hops[hop*ch] | Dwell Time[s] | Limit [s] | Verdict |
|----------|--------|---------|-------------------------|--------------------|---------------|-----------|---------|
| GFSK | DH5 | LCH | 2.94 | 106.7 | 0.314 | 0.4 | PASS |
| | DH5 | MCH | 2.92 | 106.7 | 0.312 | 0.4 | PASS |
| | DH5 | HCH | 2.92 | 106.7 | 0.312 | 0.4 | PASS |
| π/4DQPSK | 2DH5 | LCH | 2.94 | 106.7 | 0.313 | 0.4 | PASS |
| | 2DH5 | MCH | 2.92 | 106.7 | 0.313 | 0.4 | PASS |
| | 2DH5 | HCH | 2.92 | 106.7 | 0.312 | 0.4 | PASS |
| 8DPSK | 3DH5 | LCH | 2.94 | 106.7 | 0.314 | 0.4 | PASS |
| | 3DH5 | MCH | 2.92 | 106.7 | 0.312 | 0.4 | PASS |
| | 3DH5 | HCH | 2.92 | 106.7 | 0.312 | 0.4 | PASS |

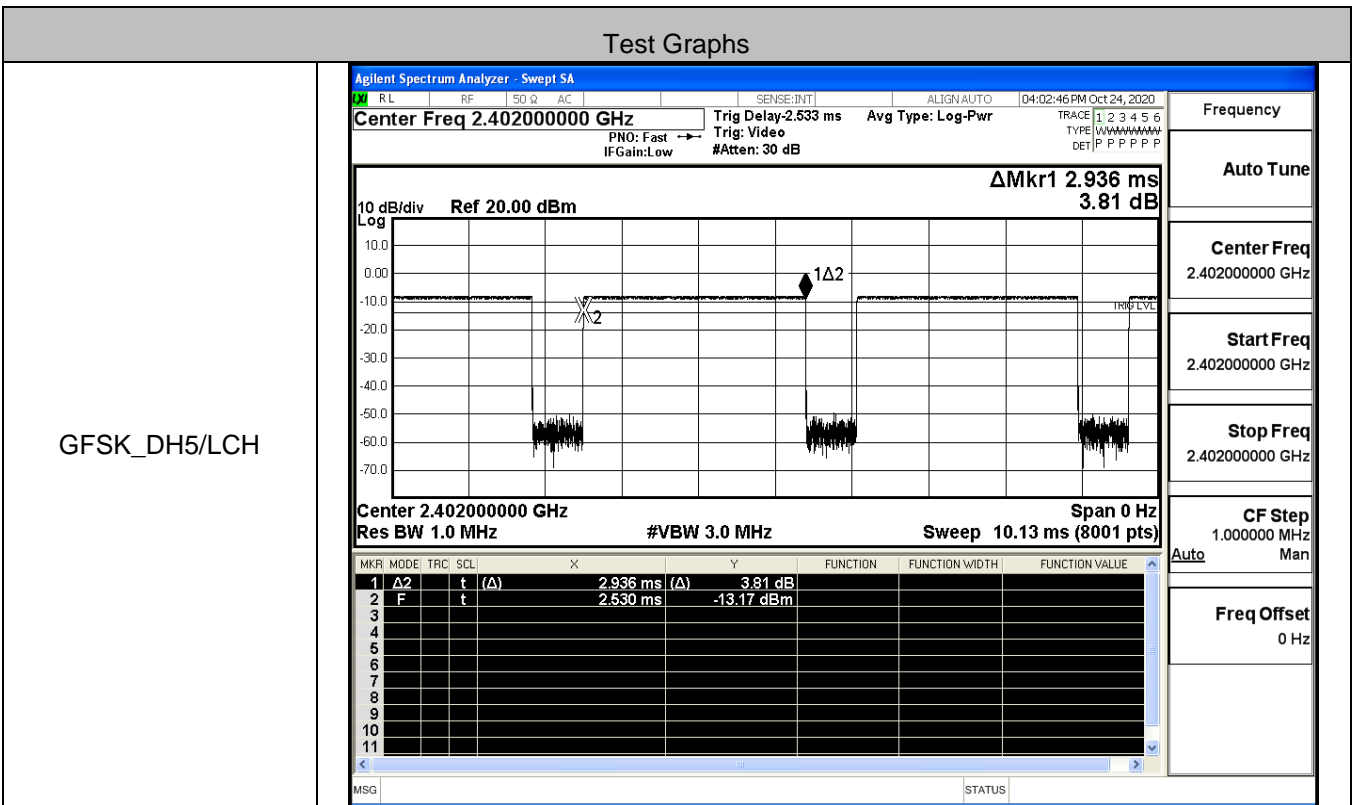


GFSK_DH5/MCH

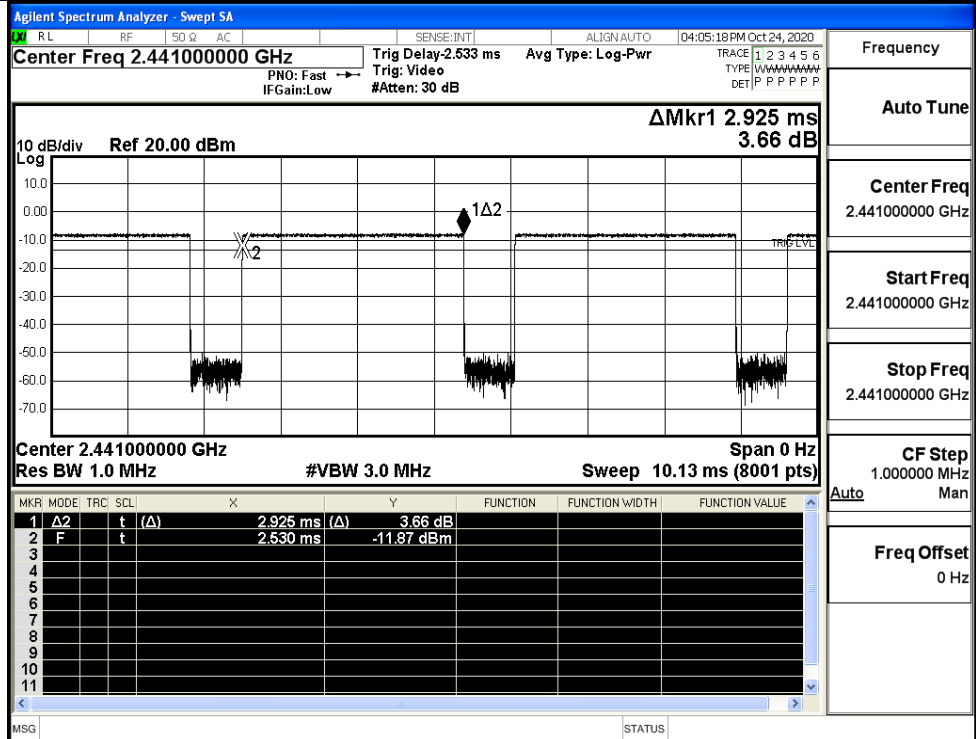

GFSK_DH5/HCH

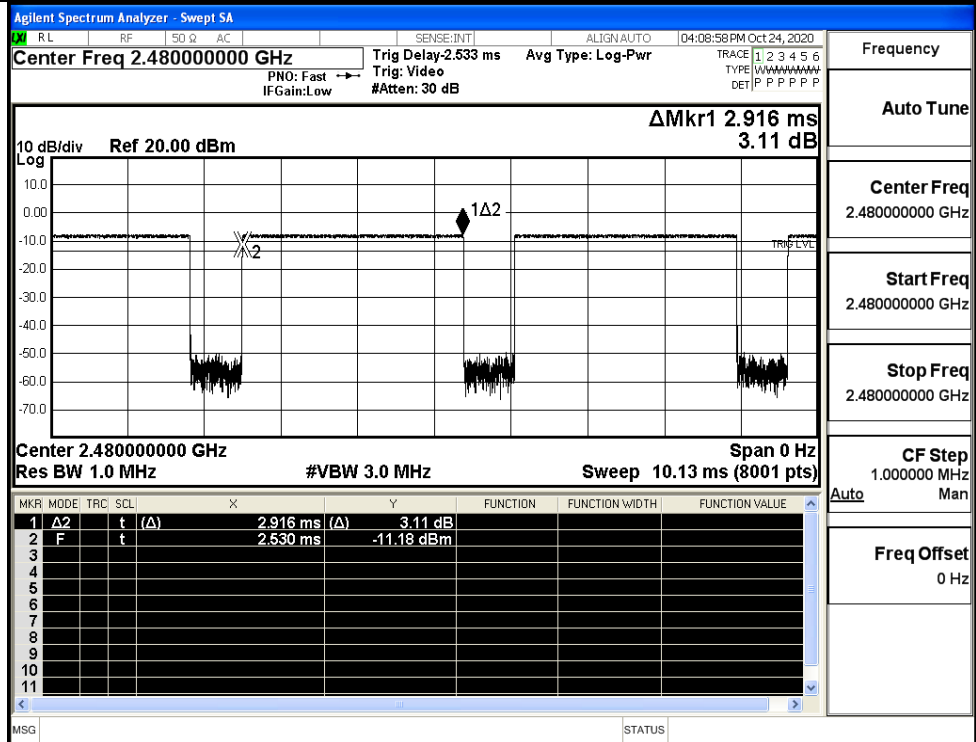


$\pi/4$ DQPSK
_2DH5/LCH

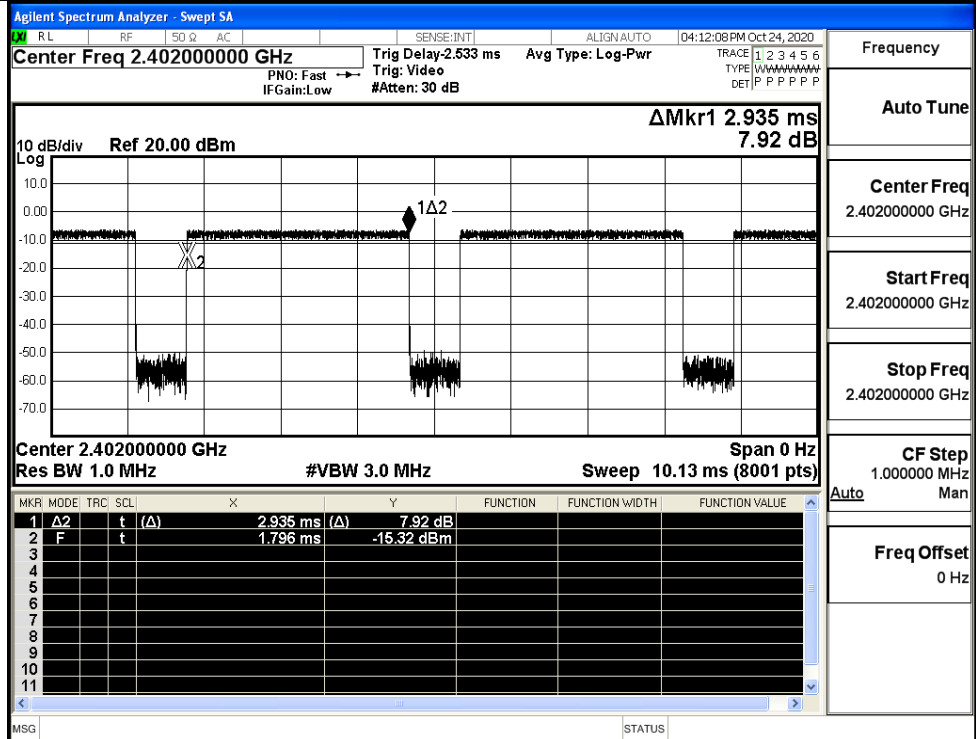


| | |
|-------------|-----------------|
| Frequency | 2.402000000 GHz |
| Auto Tune | |
| Center Freq | 2.402000000 GHz |
| Start Freq | 2.402000000 GHz |
| Stop Freq | 2.402000000 GHz |
| CF Step | 1.000000 MHz |
| Auto | Man |
| Freq Offset | 0 Hz |

$\pi/4$ DQPSK
_2DH5/MCH

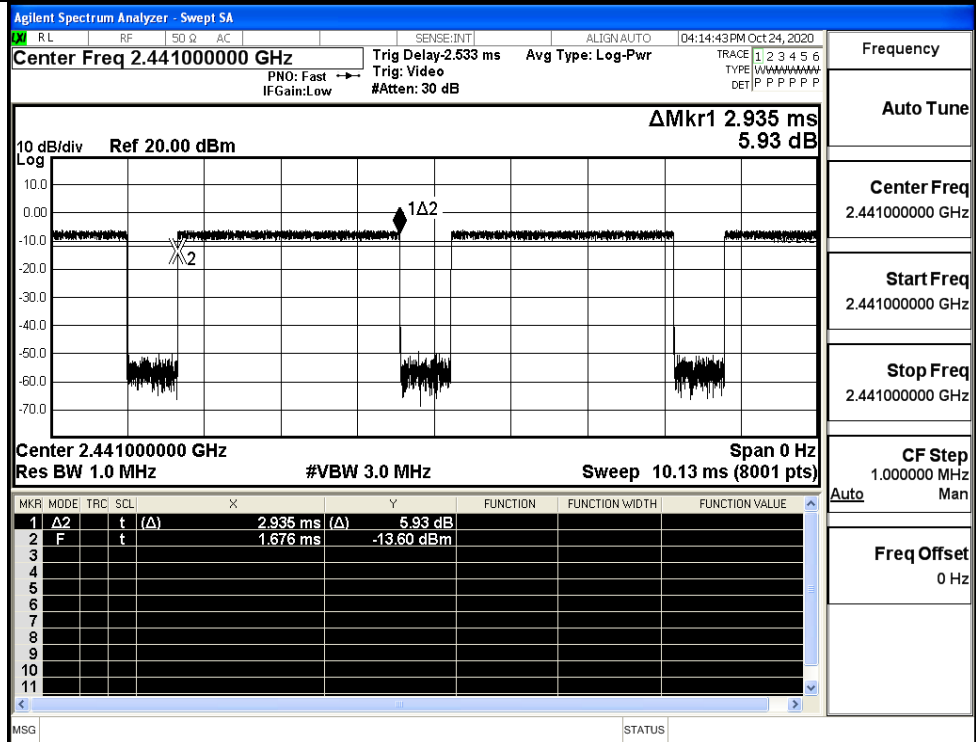


| | |
|-------------|-----------------|
| Frequency | 2.441000000 GHz |
| Auto Tune | |
| Center Freq | 2.441000000 GHz |
| Start Freq | 2.441000000 GHz |
| Stop Freq | 2.441000000 GHz |
| CF Step | 1.000000 MHz |
| Auto | Man |
| Freq Offset | 0 Hz |


$\pi/4$ DQPSK
_2DH5/HCH

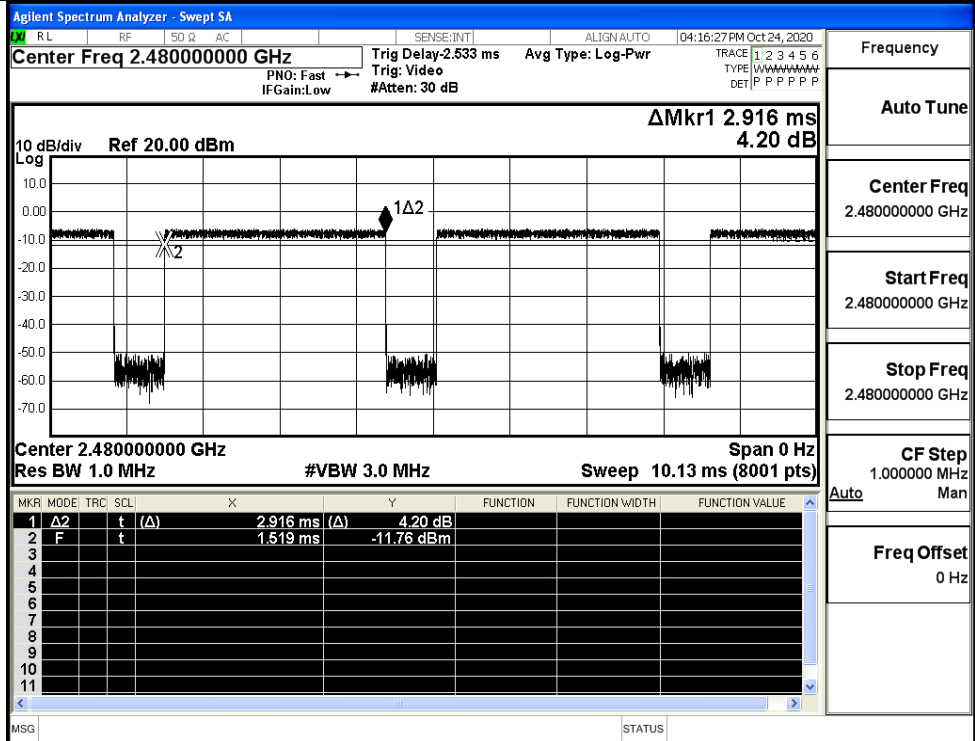

8DPSK_3DH5/LCH

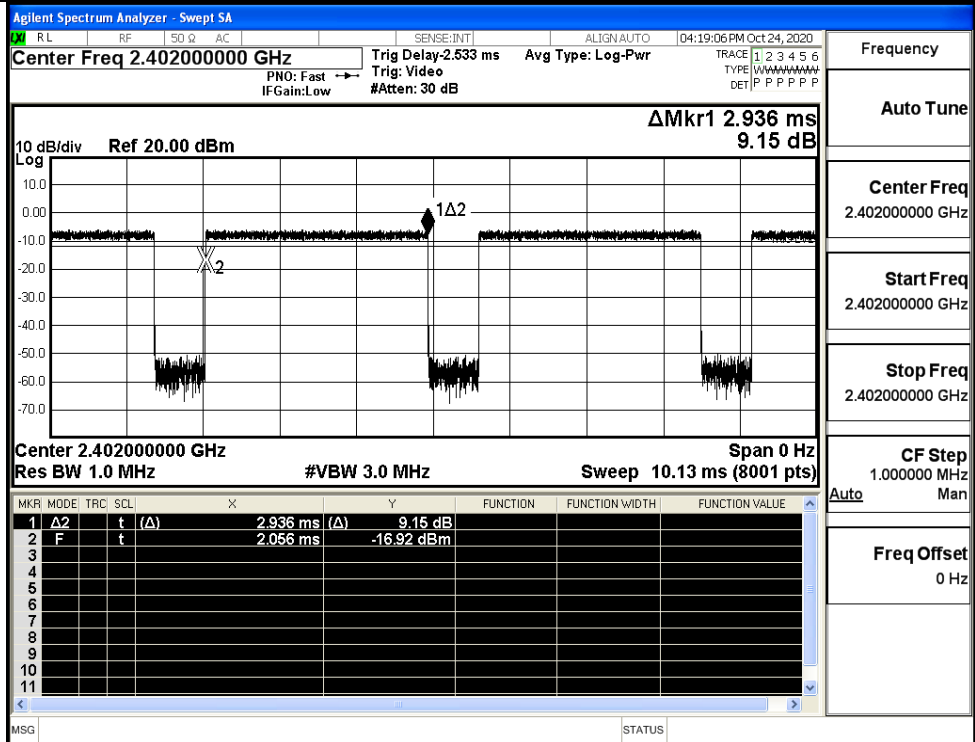

8DPSK_3DH5/MCH

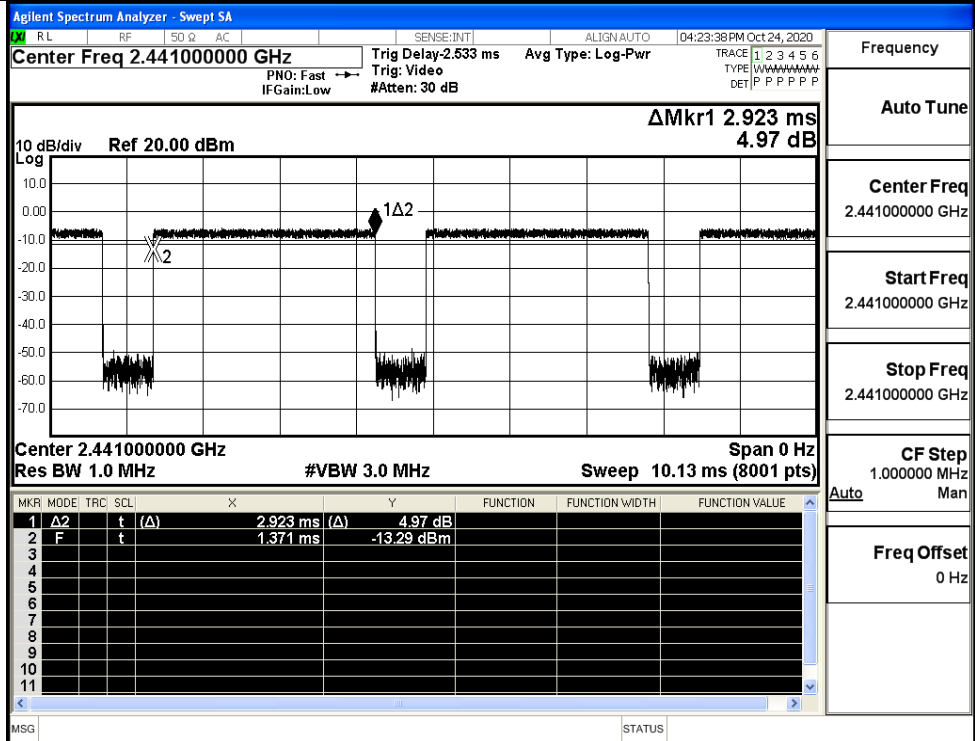

Frequency

Auto Tune

Center Freq 2.441000000 GHz


Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

8DPSK_3DH5/HCH

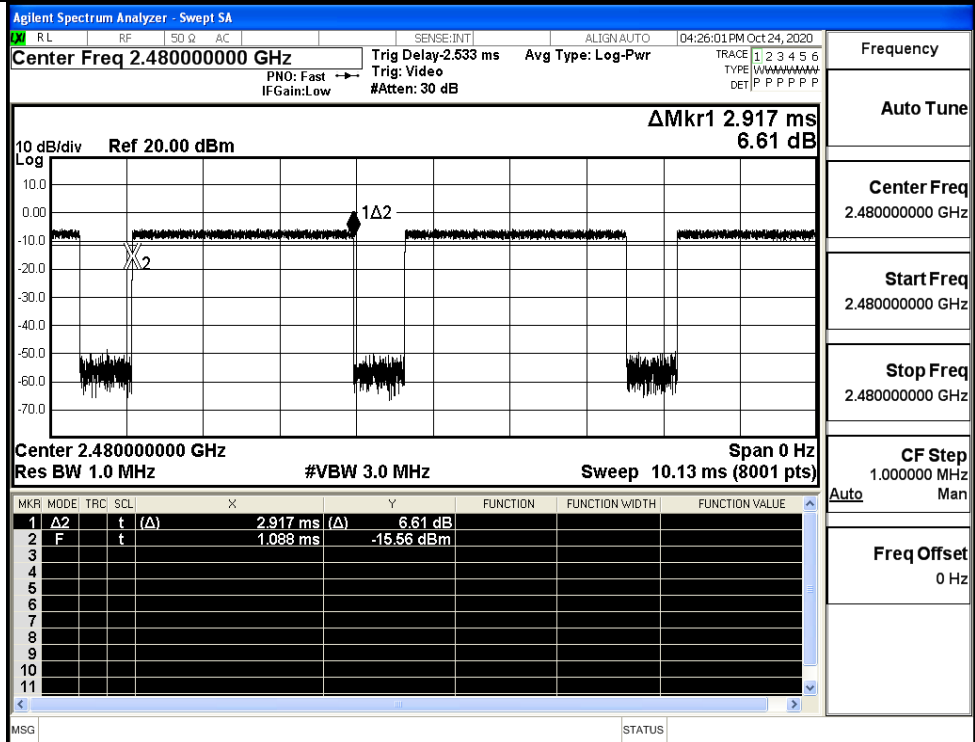

Frequency

Auto Tune

Center Freq 2.480000000 GHz

Start Freq 2.480000000 GHz

Stop Freq 2.480000000 GHz


CF Step 1.000000 MHz

Freq Offset 0 Hz


A.6 RF Conducted Spurious Emissions

| Mode | Channel | Pref [dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|---------------|---------|------------|------------------|-------------|---------|
| GFSK | LCH | -0.755 | -35.941 | -20.755 | PASS |
| | MCH | -0.504 | -36.646 | -20.504 | PASS |
| | HCH | -0.435 | -37.487 | -20.435 | PASS |
| π /4DQPSK | LCH | -1.808 | -37.235 | -21.808 | PASS |
| | MCH | -1.615 | -36.634 | -21.615 | PASS |
| | HCH | -1.741 | -37.363 | -21.741 | PASS |
| 8DPSK | LCH | -1.908 | -36.193 | -21.908 | PASS |
| | MCH | -1.56 | -37.376 | -21.560 | PASS |
| | HCH | -1.595 | -36.837 | -21.595 | PASS |


GFSK_LCH_Graphs

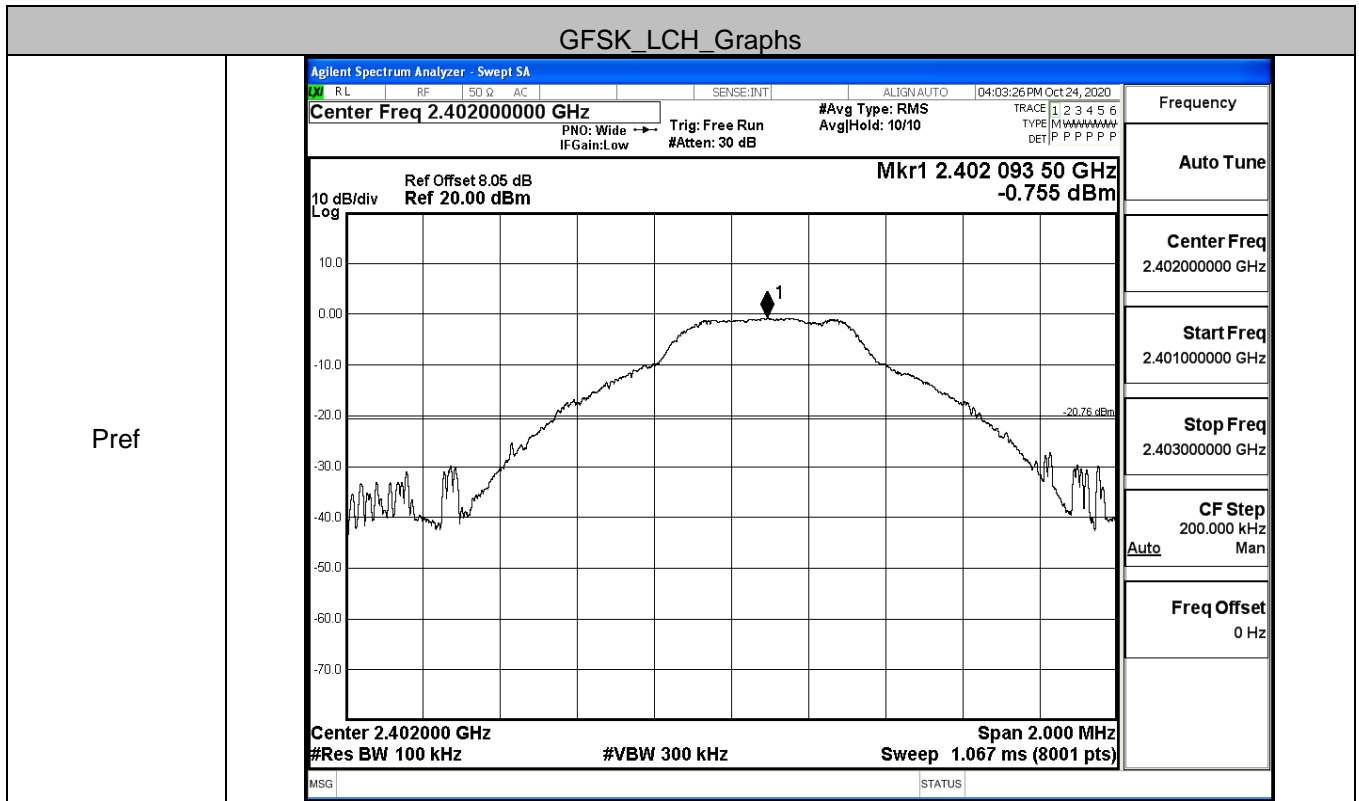

Pref

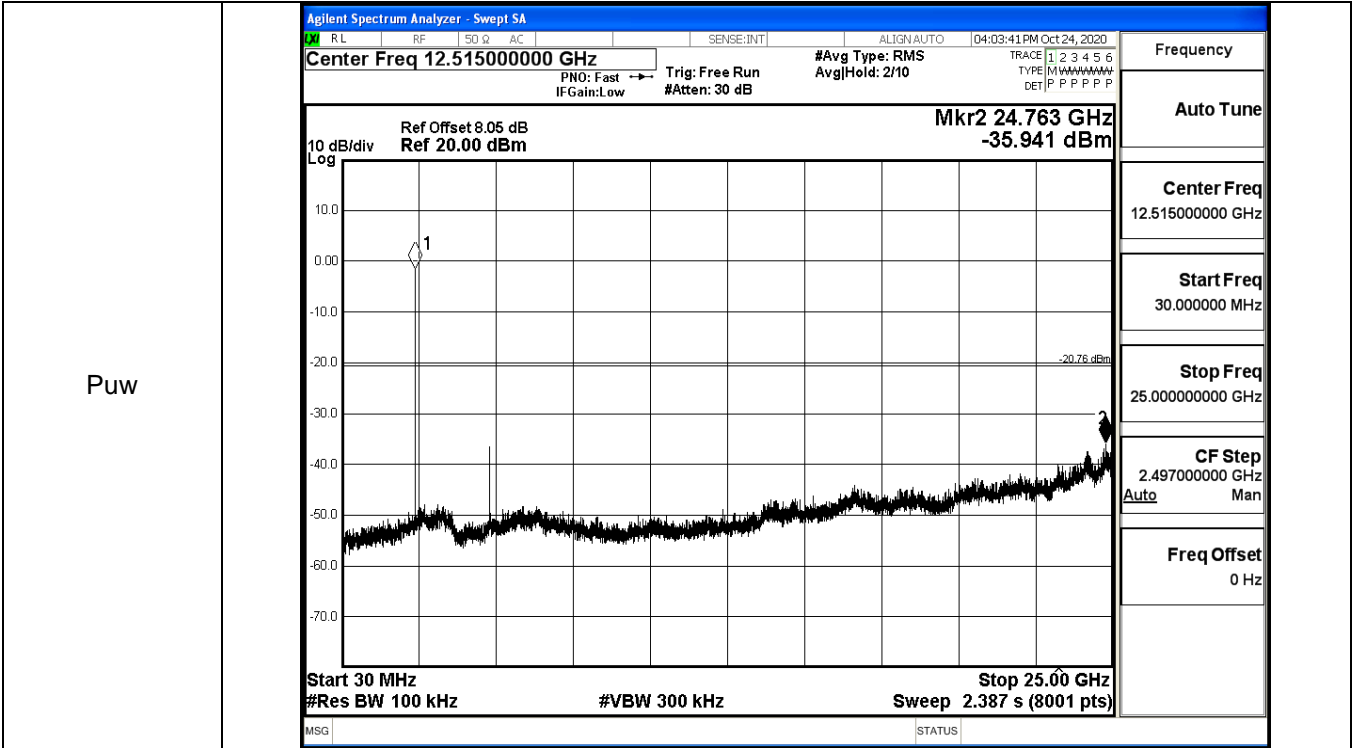


GFSK_MCH_Graphs

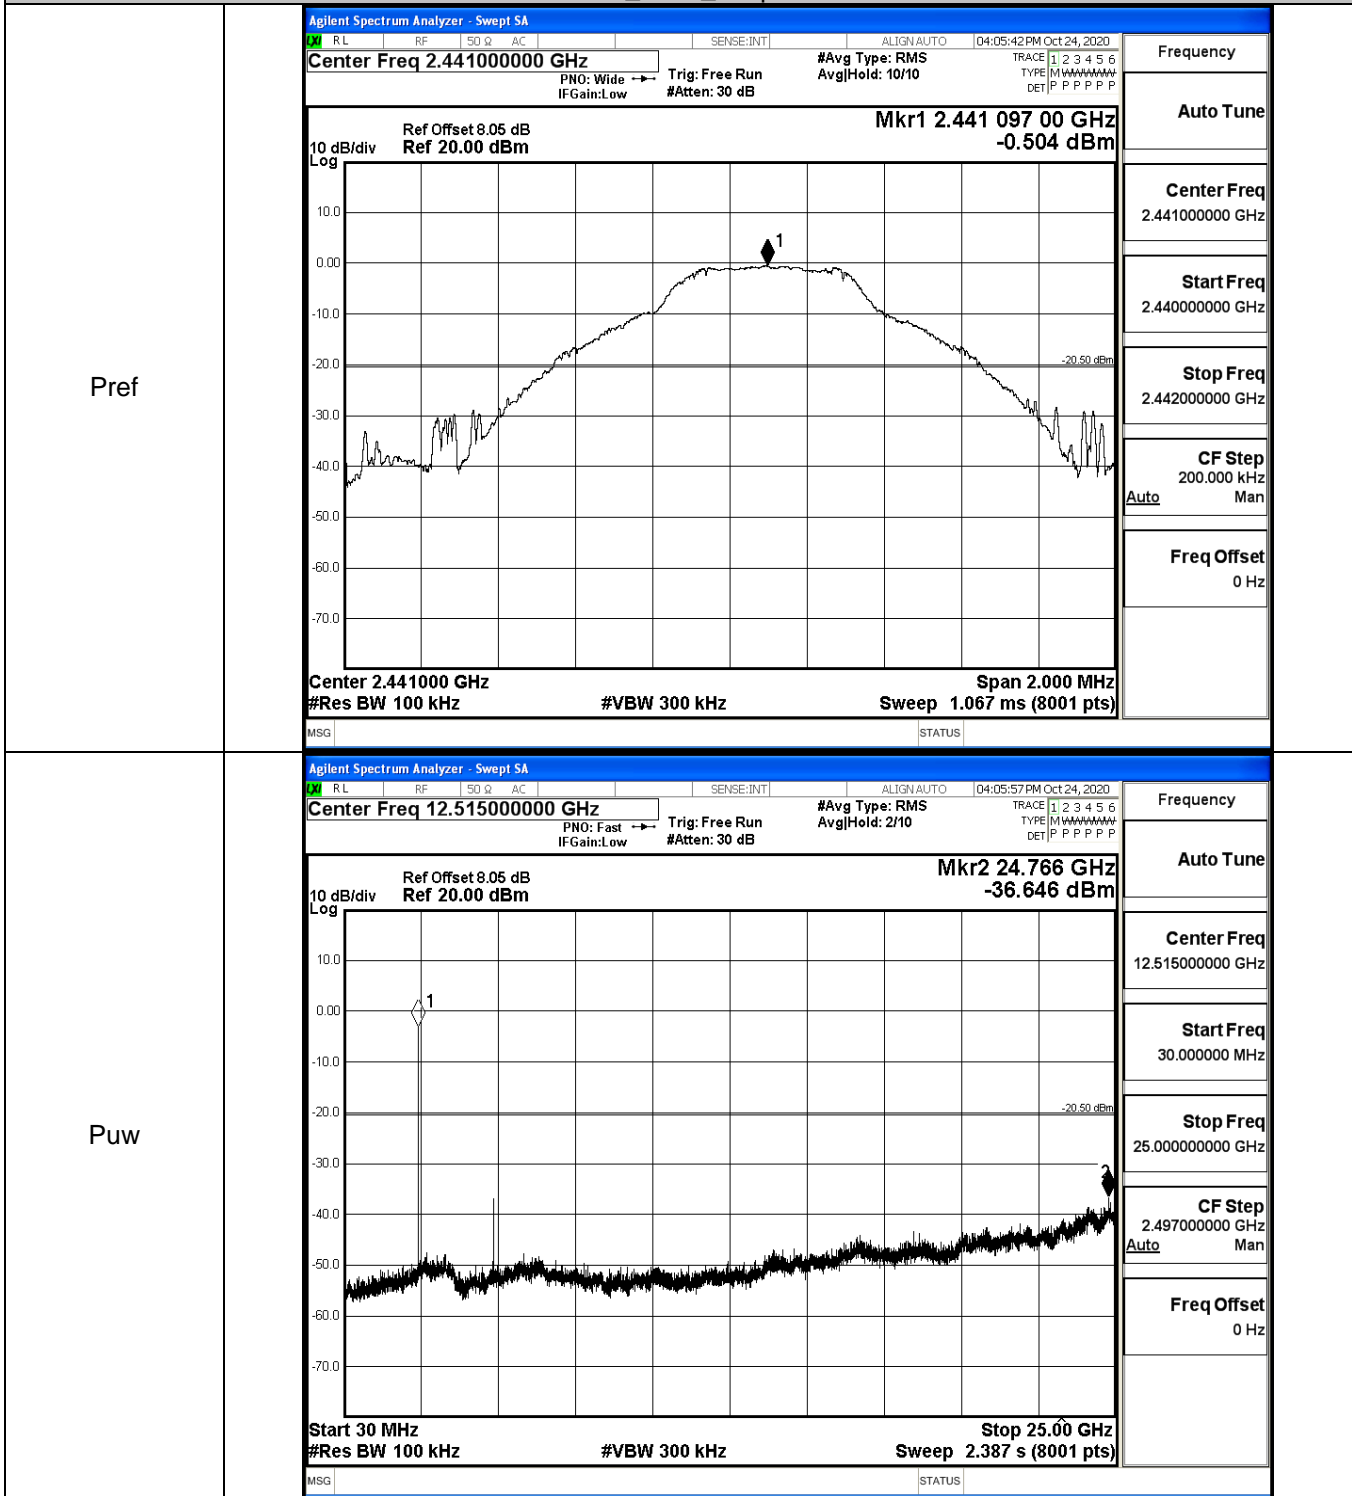


GFSK_HCH_Graphs


Pref

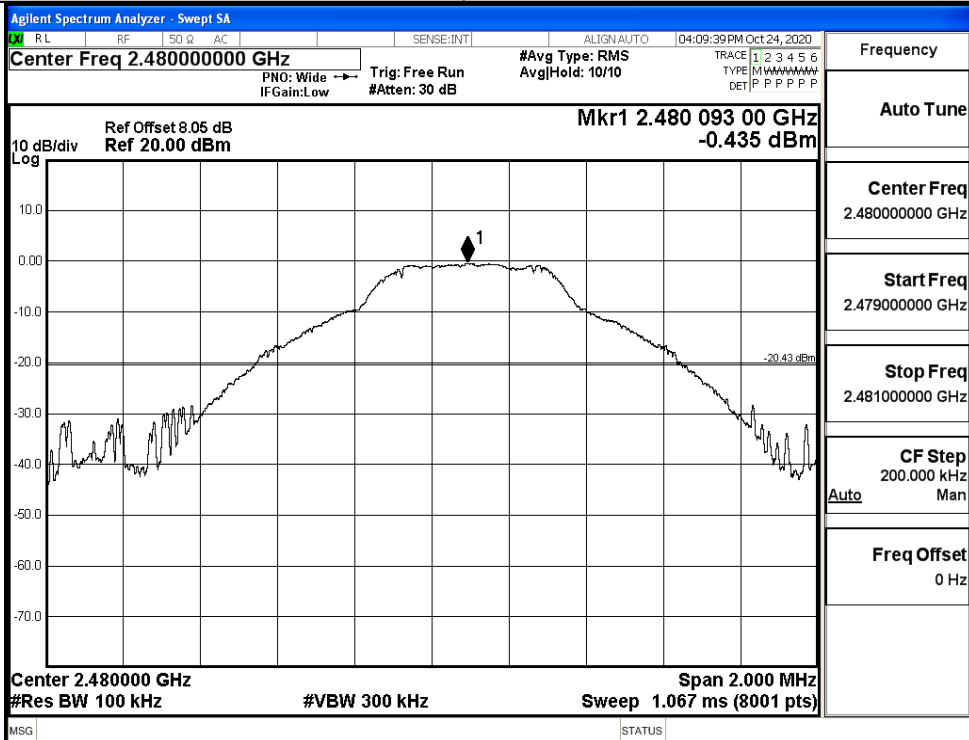


Puw

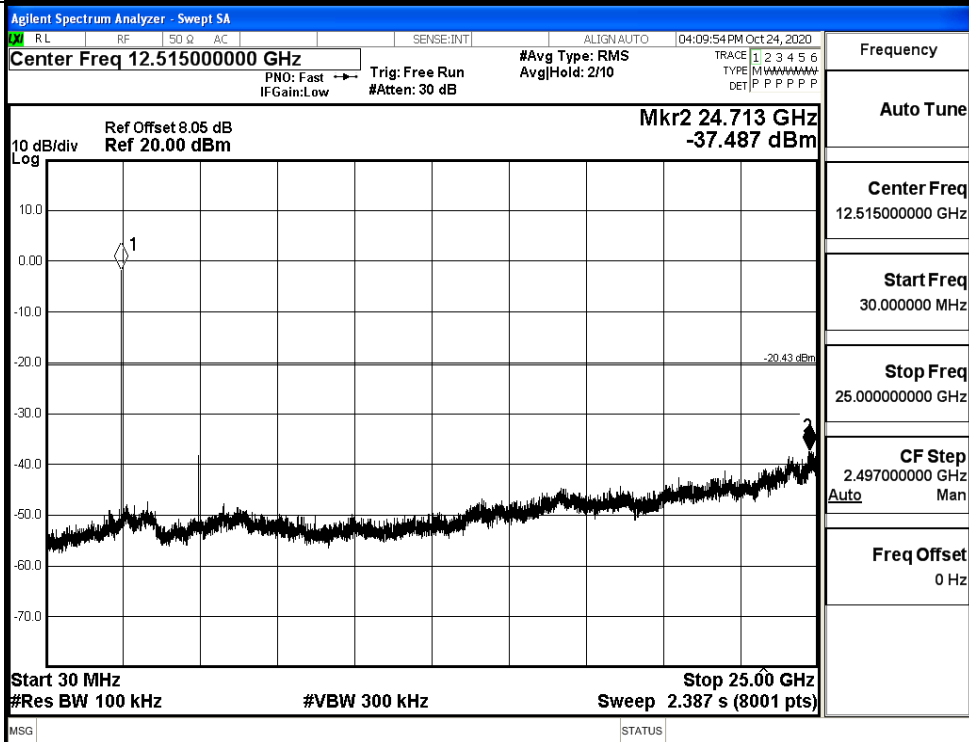


$\pi/4$ DQPSK_LCH_Graphs

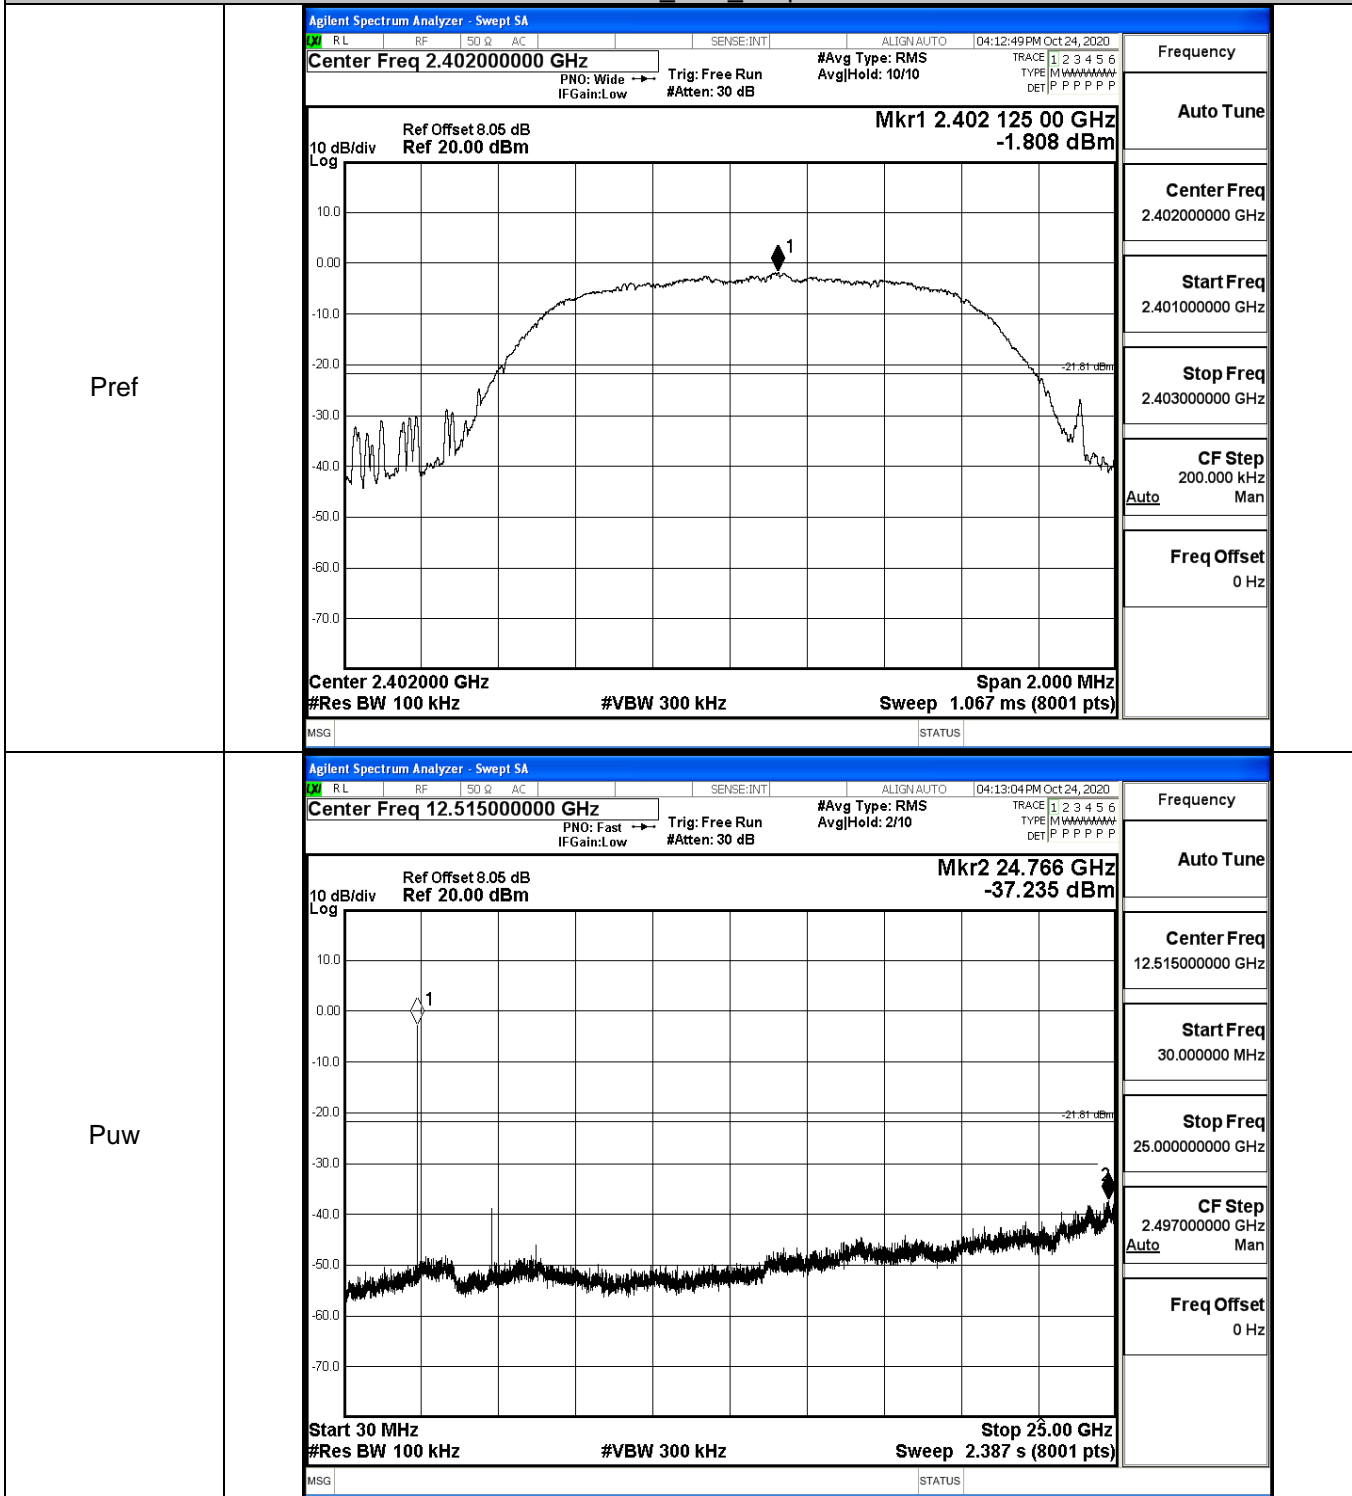

$\pi/4$ DQPSK_MCH_Graphs

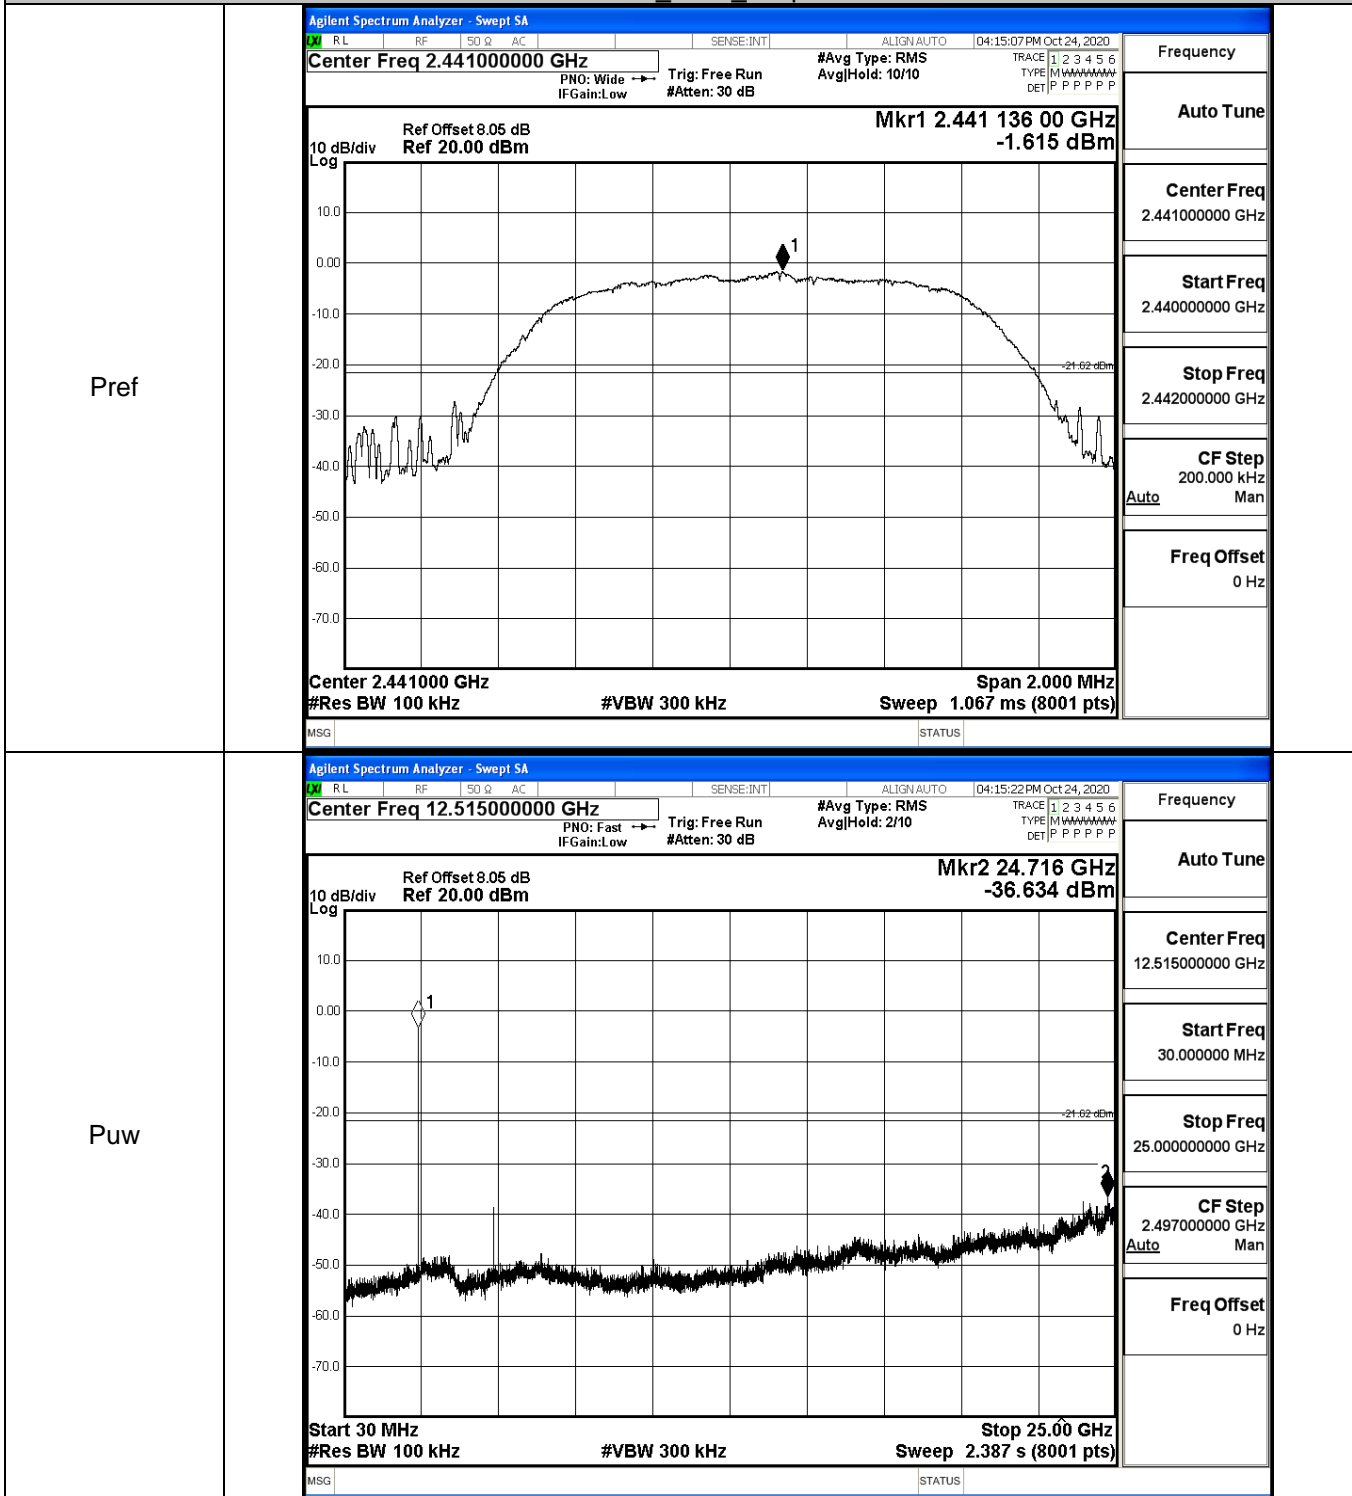


$\pi/4$ DQPSK_HCH_Graphs

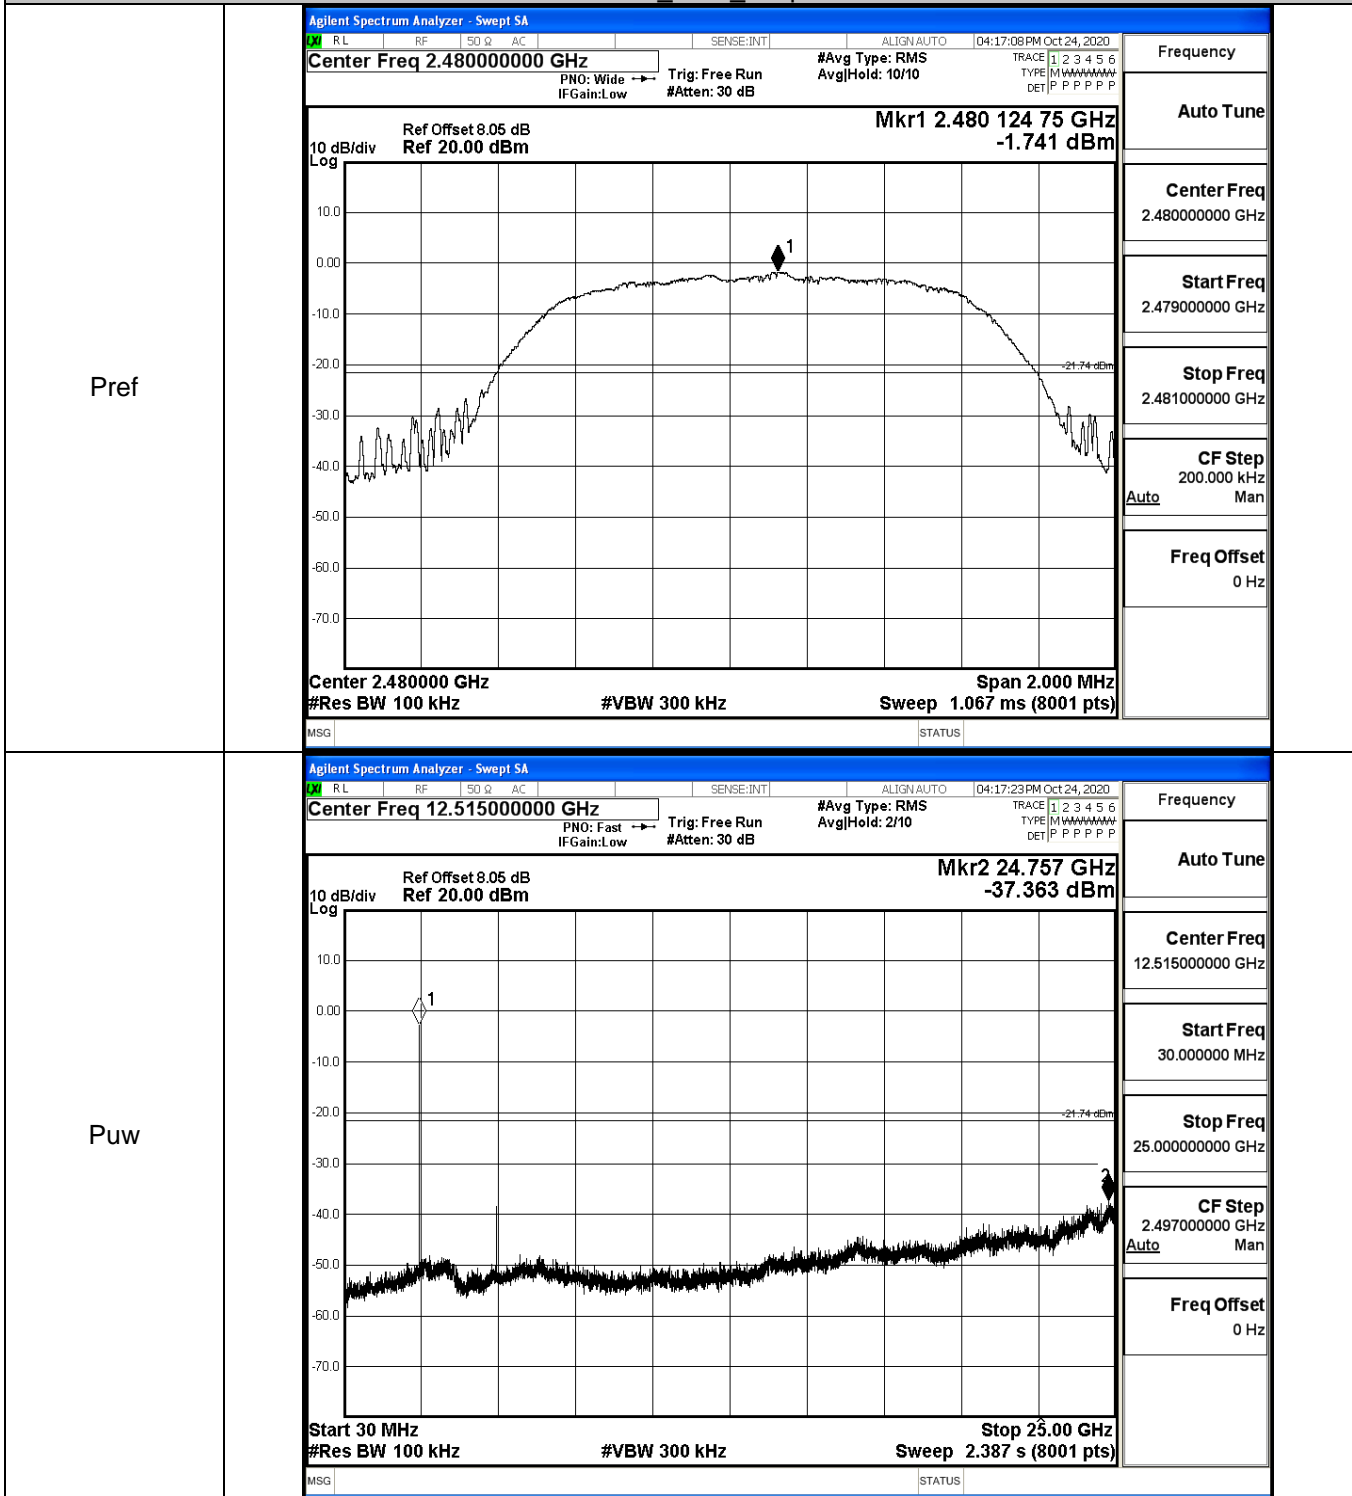


8DPSK_LCH_Graphs

Pref

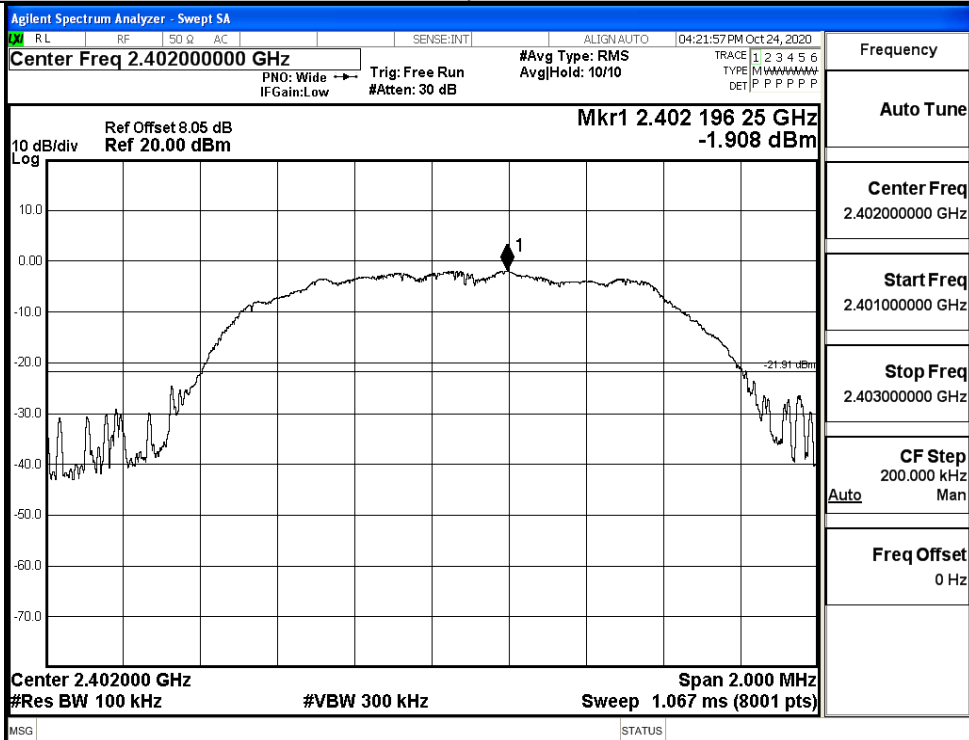


Puw

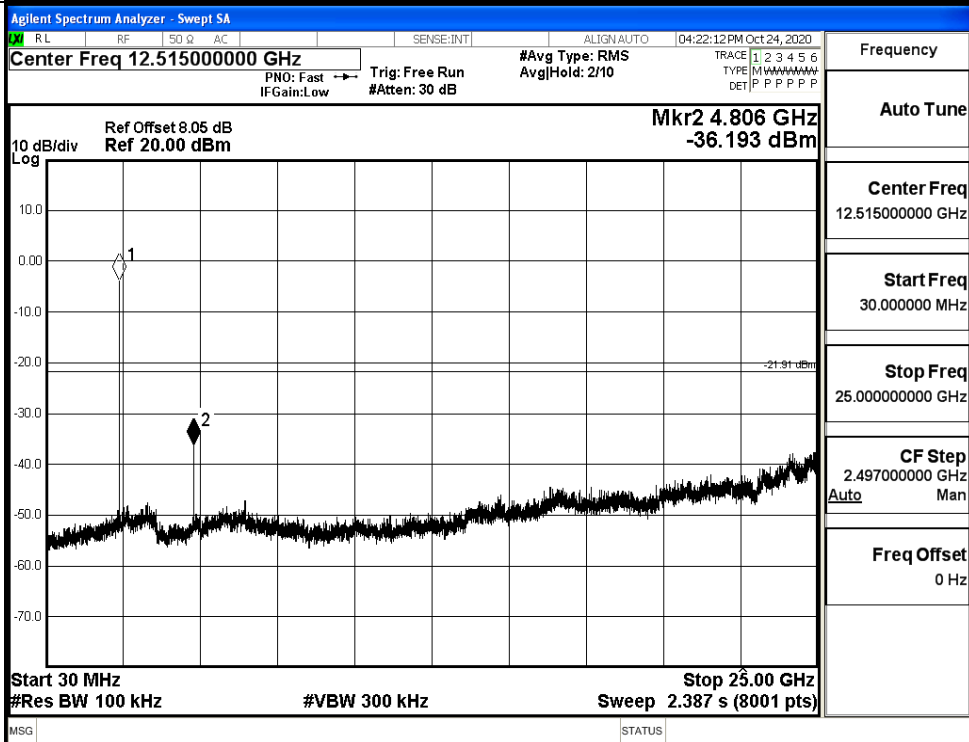


8DPSK_MCH_Graphs

Pref

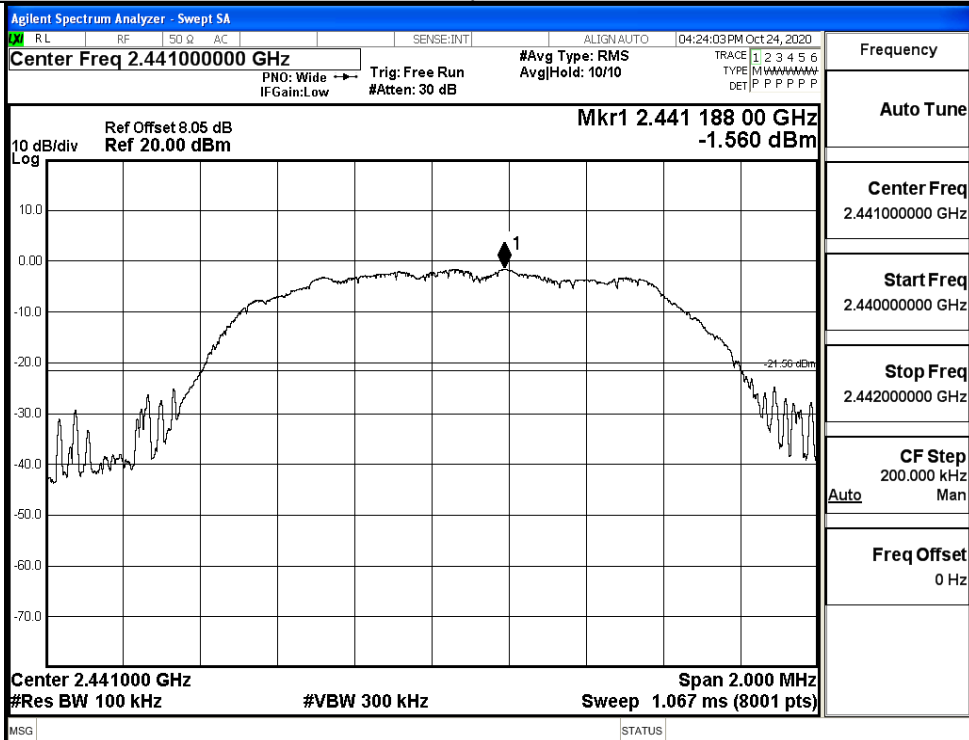


Puw

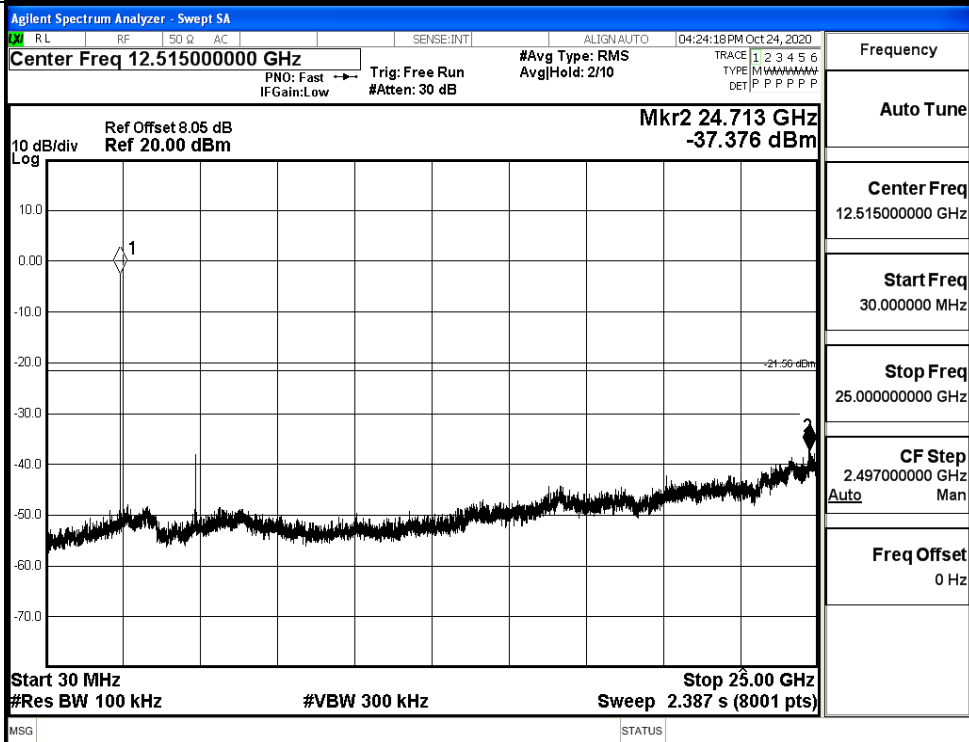


8DPSK_HCH_Graphs

Pref

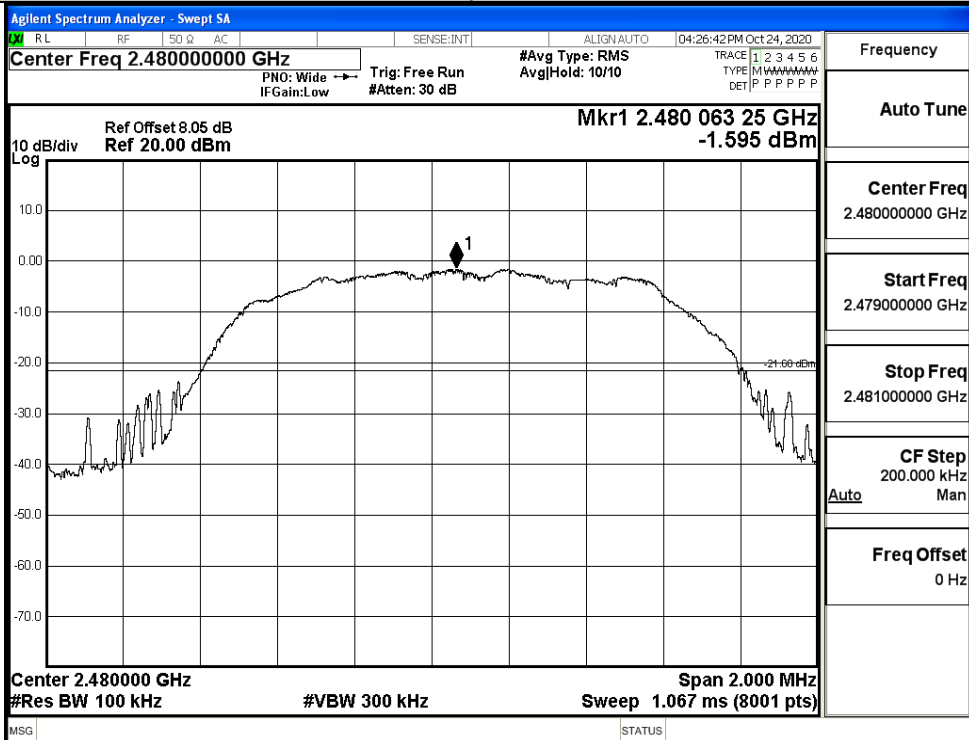

Puw

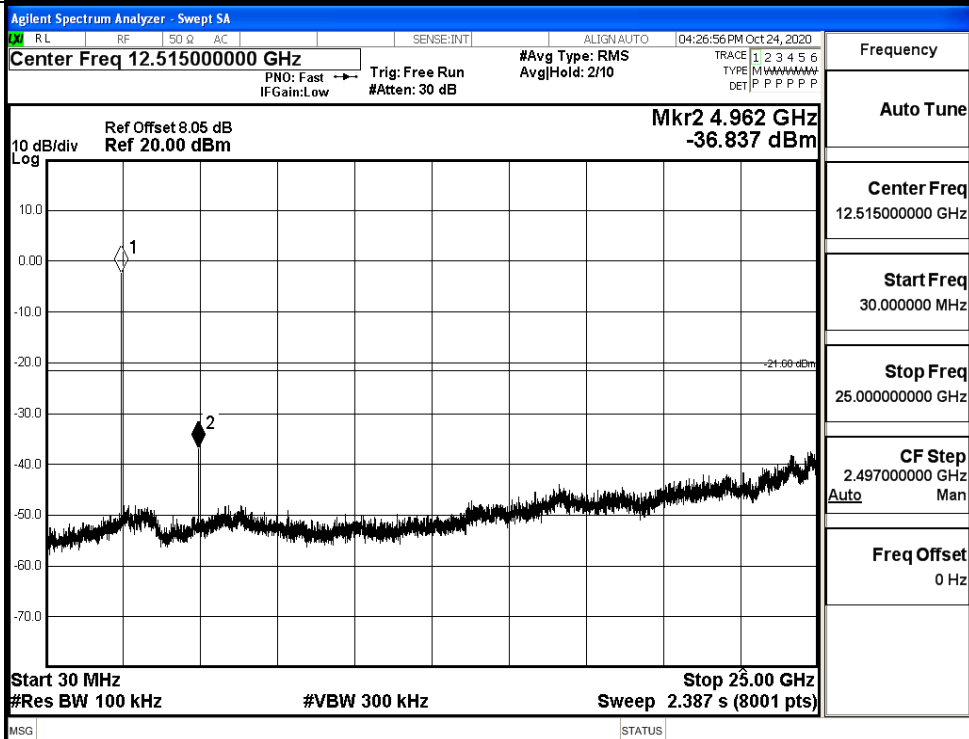


A.7 Band-edge for RF Conducted Emissions


| Mode | Channel | Carrier Frequency [MHz] | Carrier Power [dBm] | Frequency Hopping | Max Spurious Level [dBm] | Limit [dBm] | Verdict |
|---------------|---------|-------------------------|---------------------|-------------------|--------------------------|-------------|---------|
| GFSK | LCH | 2402 | -0.485 | Off | -49.066 | -20.49 | PASS |
| | | | -0.096 | On | -48.913 | -20.1 | PASS |
| | HCH | 2480 | -0.118 | Off | -47.669 | -20.12 | PASS |
| | | | -0.047 | On | -48.213 | -20.05 | PASS |
| $\pi/4$ DQPSK | LCH | 2402 | -1.600 | Off | -48.430 | -21.6 | PASS |
| | | | -1.410 | On | -48.815 | -21.41 | PASS |
| | HCH | 2480 | -1.453 | Off | -46.220 | -21.45 | PASS |
| | | | -1.190 | On | -48.120 | -21.19 | PASS |
| 8DPSK | LCH | 2402 | -1.312 | Off | -48.542 | -21.31 | PASS |
| | | | -1.111 | On | -48.879 | -21.11 | PASS |
| | HCH | 2480 | -1.052 | Off | -47.370 | -21.05 | PASS |
| | | | -0.982 | On | -48.362 | -20.98 | PASS |

Test Graphs


GFSK/LCH/No Hop

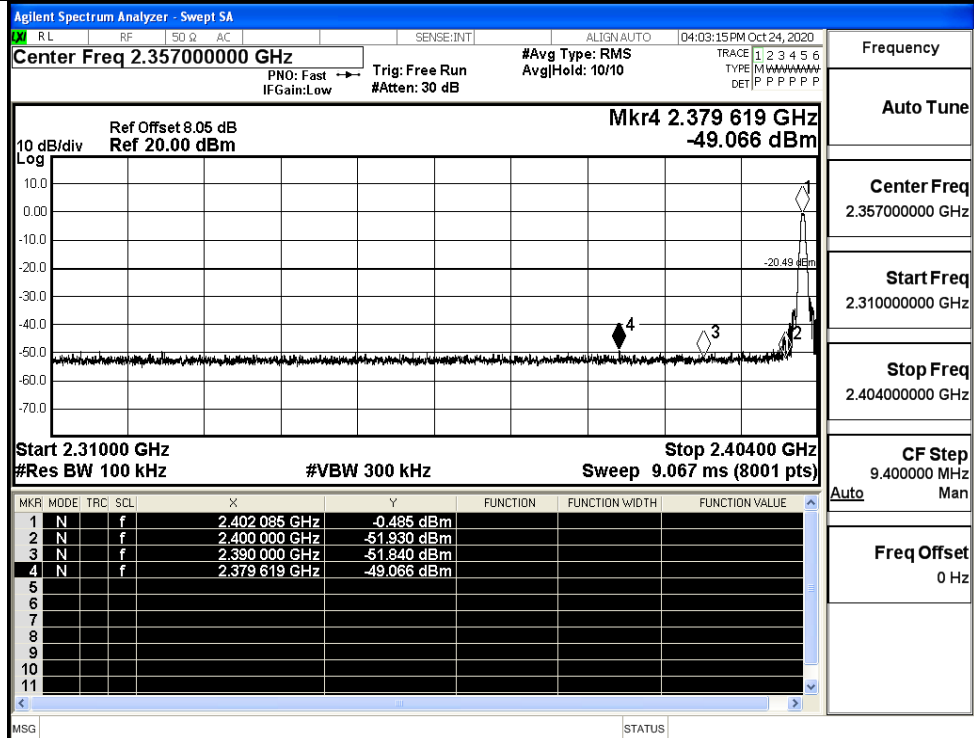


GFSK/LCH/Hop

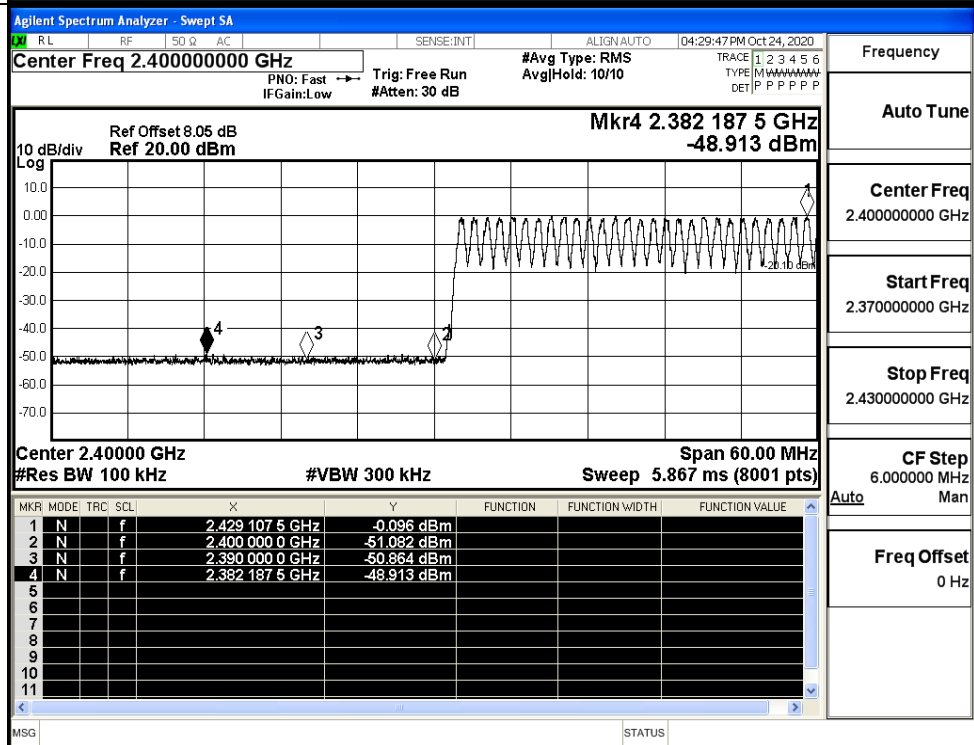


GFSK/HCH/No Hop

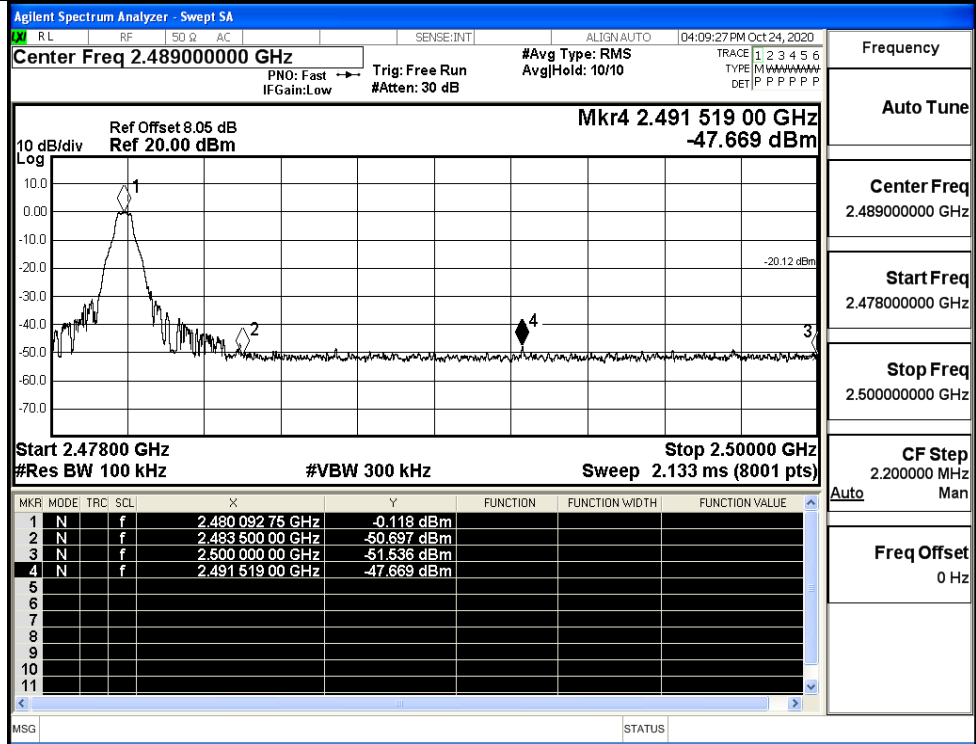


GFSK/HCH/Hop

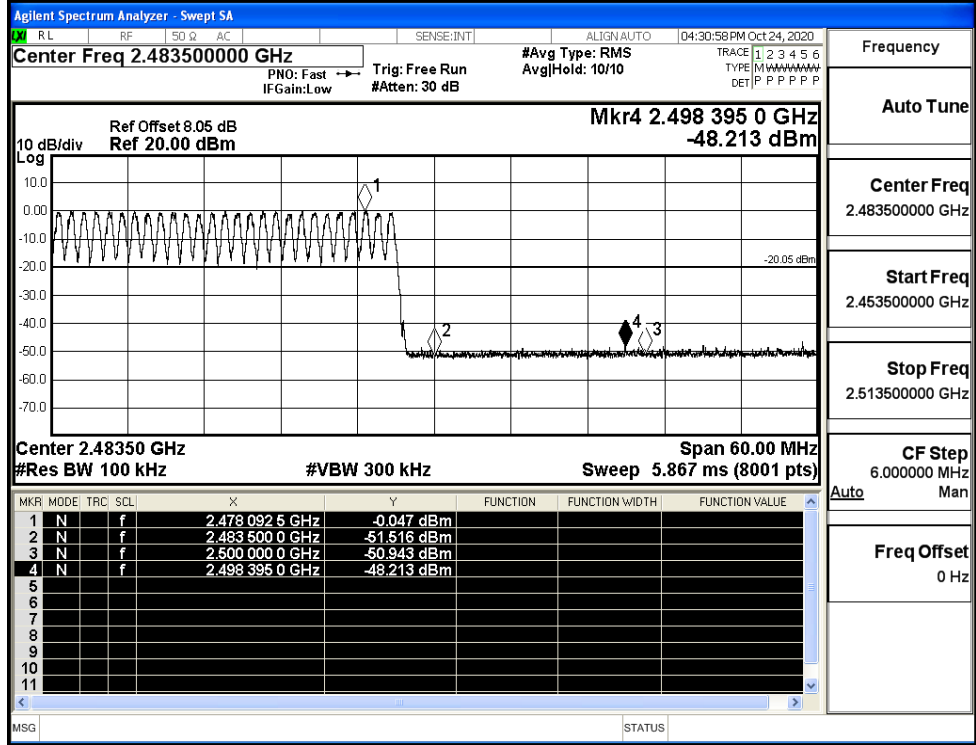


$\pi/4$ DQPSK/LCH/No Hop

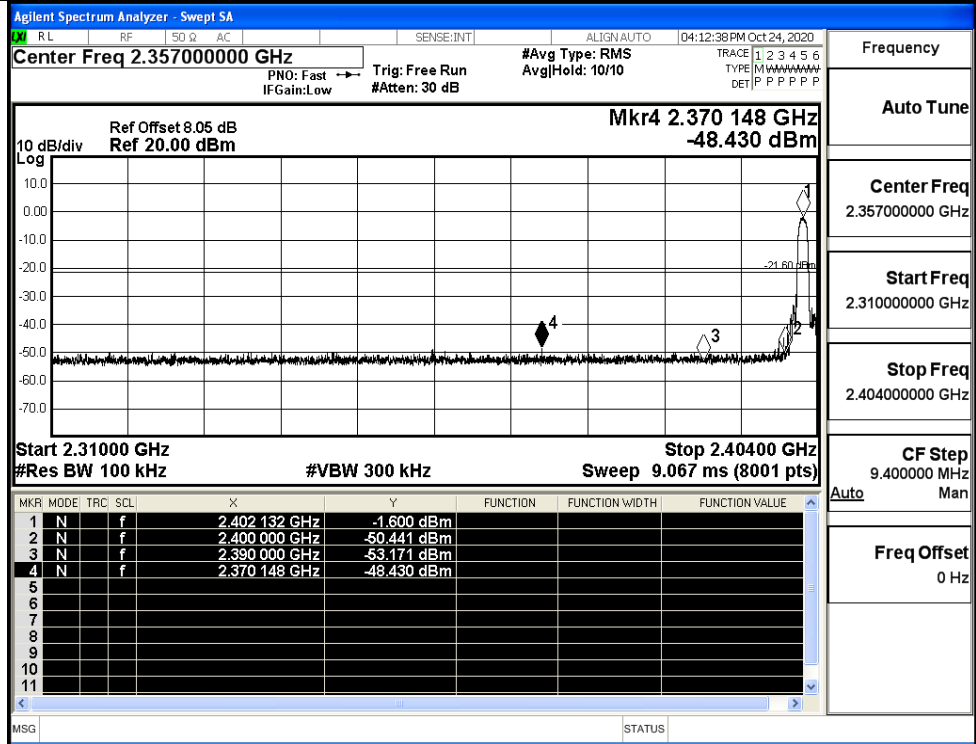


$\pi/4$ DQPSK/LCH/Hop

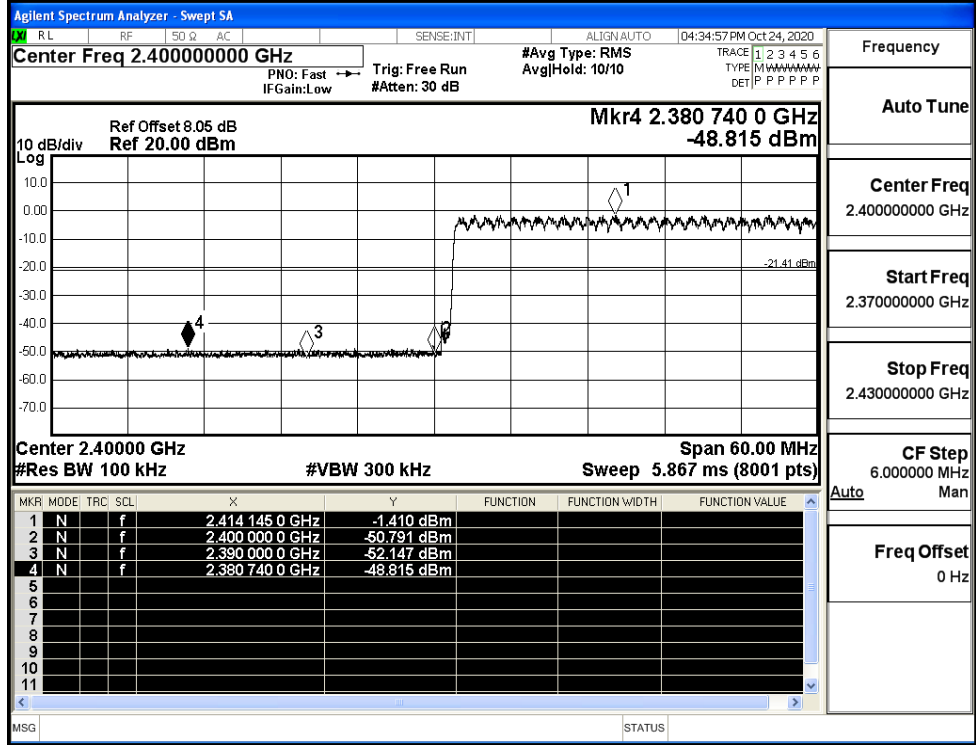


π /4DQPSK/HCH/No
Hop

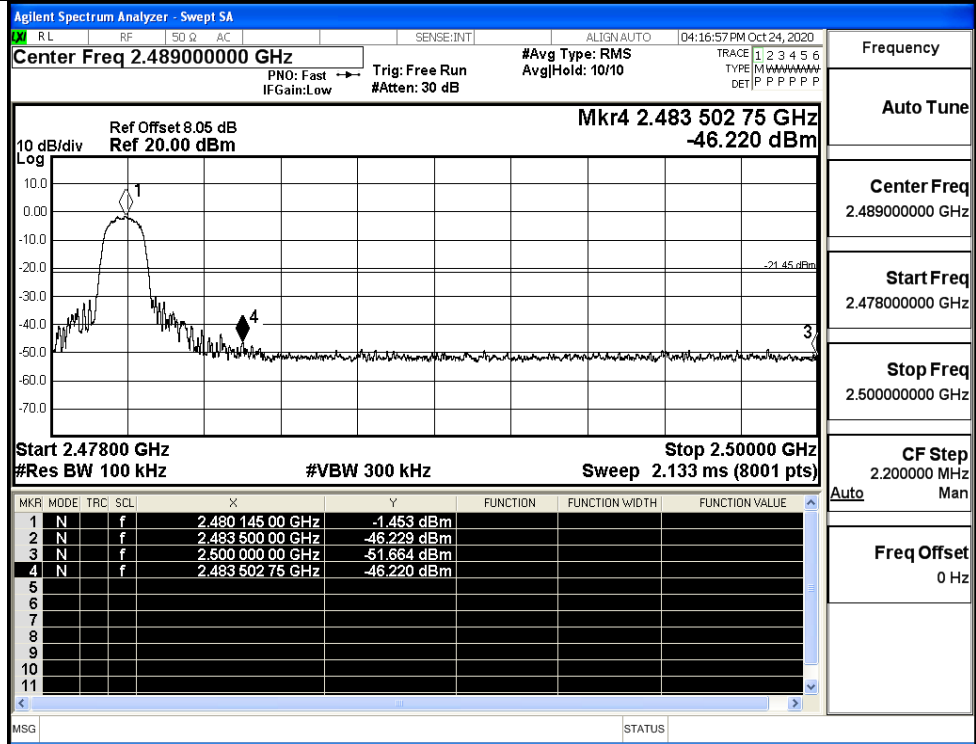

π /4DQPSK/HCH/Hop

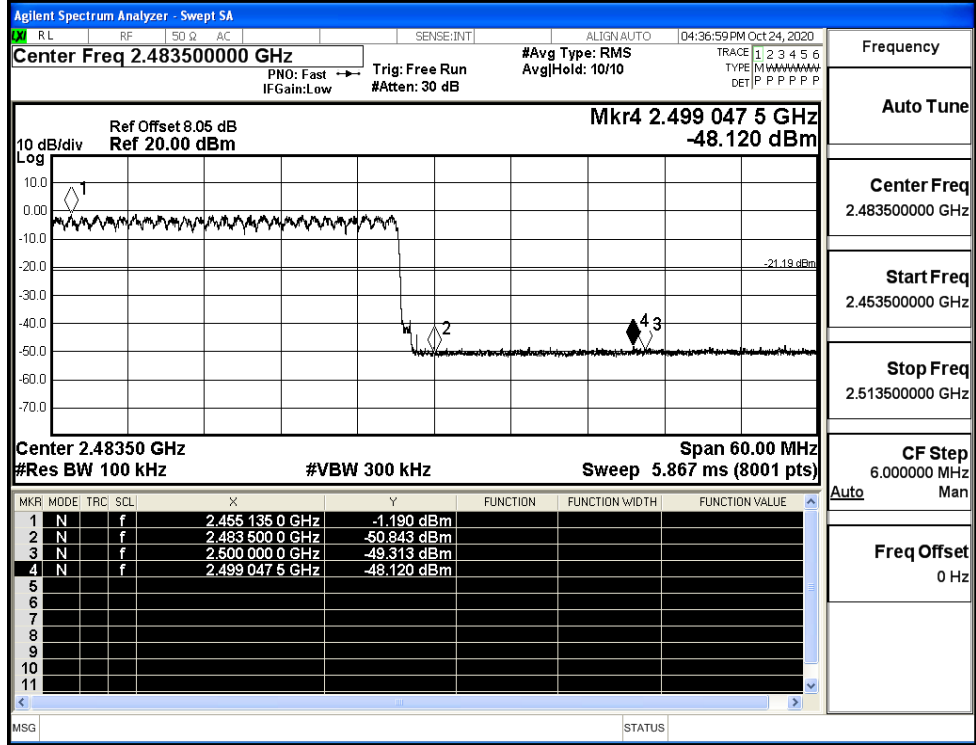


8DPSK/LCH/No Hop

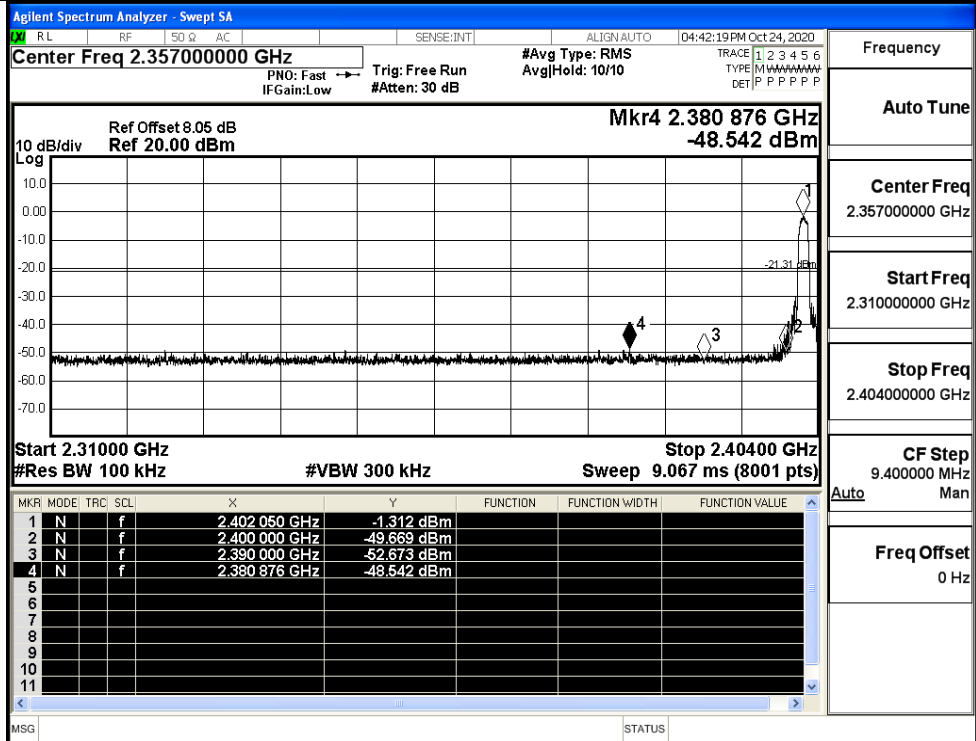


Frequency
Auto Tune
Center Freq
2.357000000 GHz
Start Freq
2.310000000 GHz
Stop Freq
2.404000000 GHz
CF Step
9.400000 MHz
Auto Man
Freq Offset
0 Hz

8DPSK/LCH/Hop

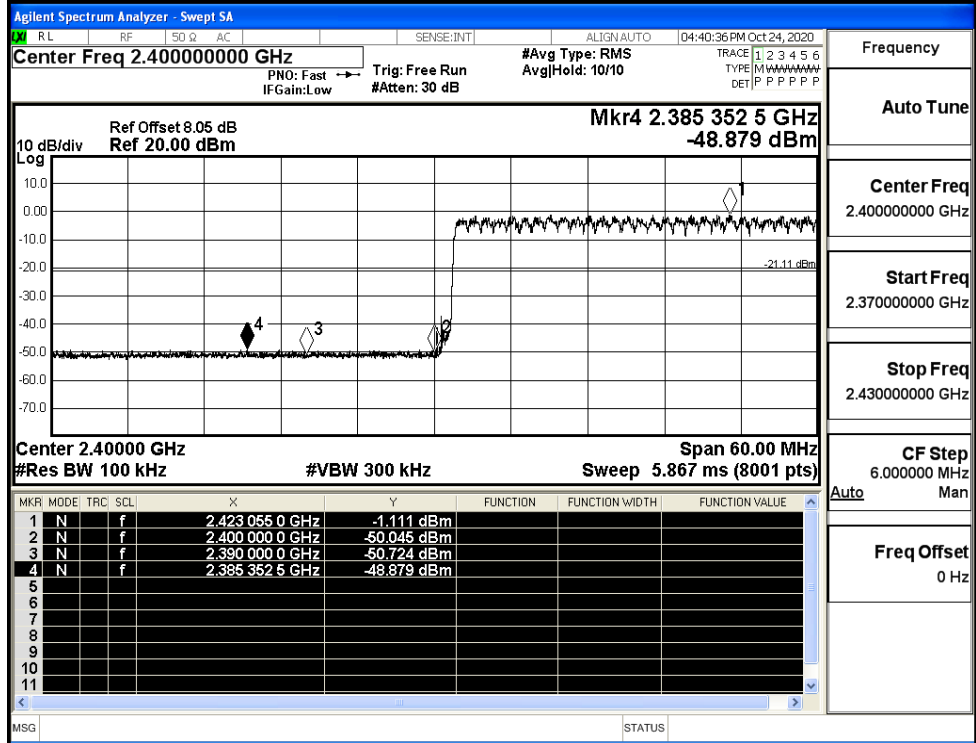


Frequency
Auto Tune
Center Freq
2.400000000 GHz
Start Freq
2.370000000 GHz
Stop Freq
2.430000000 GHz
CF Step
6.000000 MHz
Auto Man
Freq Offset
0 Hz

8DPSK/HCH/No Hop

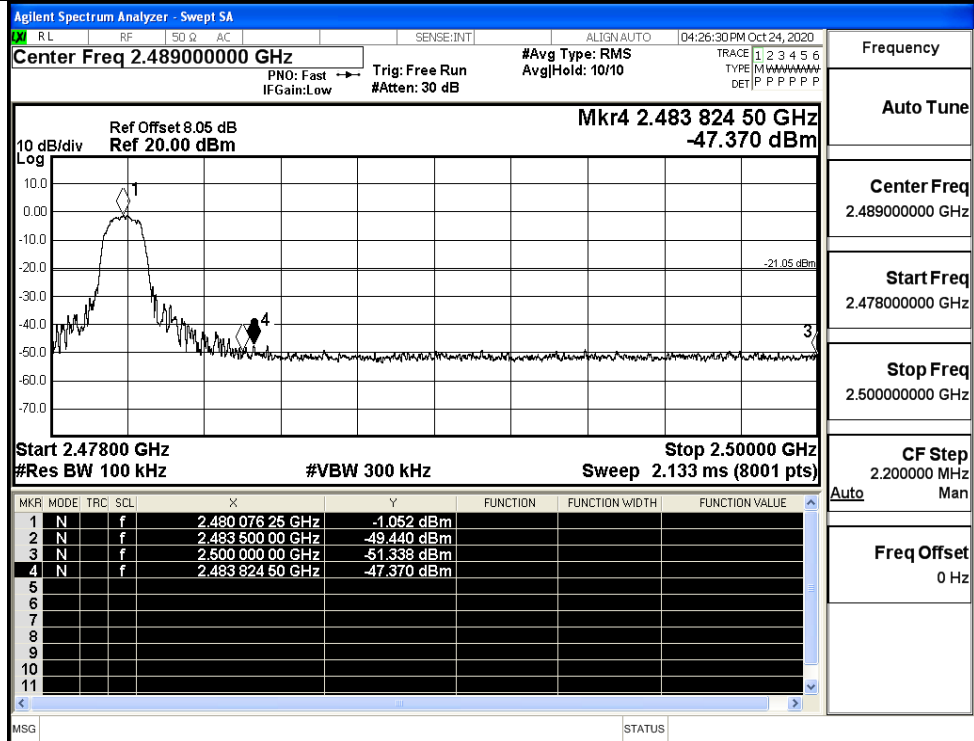

Frequency
Auto Tune
Center Freq
2.489000000 GHz
Start Freq
2.478000000 GHz
Stop Freq
2.500000000 GHz
CF Step
2.200000 MHz
Auto Man
Freq Offset
0 Hz

8DPSK/HCH/Hop

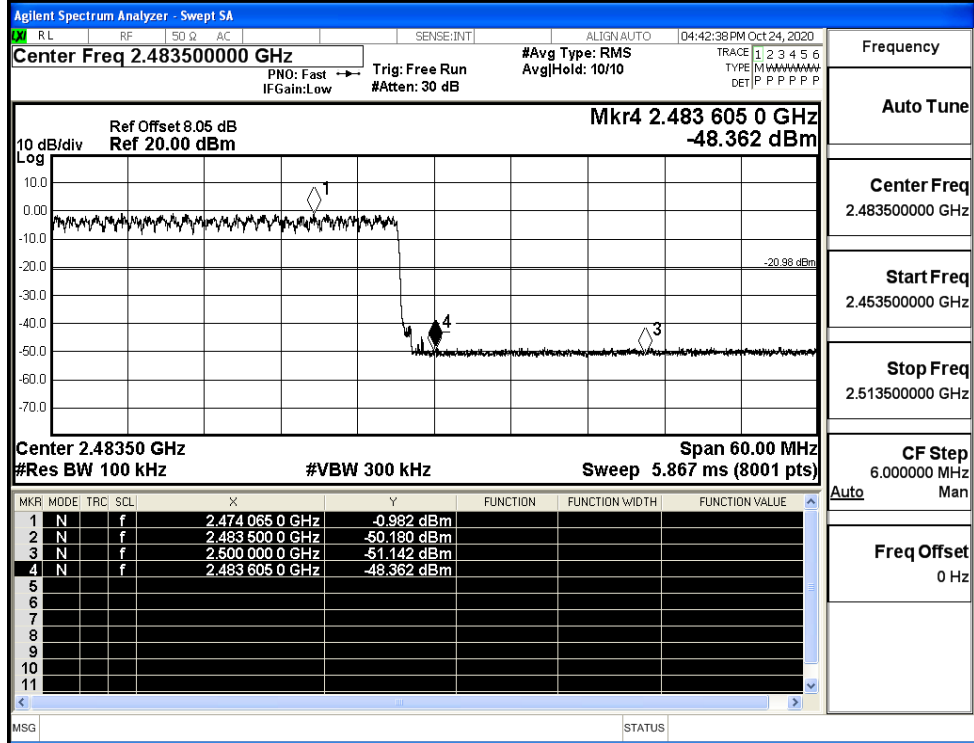


Frequency
Auto Tune
Center Freq
2.483500000 GHz
Start Freq
2.453500000 GHz
Stop Freq
2.513500000 GHz
CF Step
6.000000 MHz
Auto Man
Freq Offset
0 Hz


A.8 Restrict-band band-edge measurements

| Test Mode | Hopping | Freq. | Power [dBm] | Gain | Ground Factor | E [dBuV/m] | Detector | Limit [dBuV/m] | Verdict |
|---------------|---------|--------|-------------|------|---------------|------------|----------|----------------|---------|
| GFSK | Off | 2310.0 | -43.33 | 2.0 | 0 | 51.93 | PEAK | 74 | PASS |
| | Off | 2310.0 | -53.13 | 2.0 | 0 | 42.13 | AV | 54 | PASS |
| | Off | 2390.0 | -43.29 | 2.0 | 0 | 51.96 | PEAK | 74 | PASS |
| | Off | 2390.0 | -52.71 | 2.0 | 0 | 42.54 | AV | 54 | PASS |
| | Off | 2483.5 | -42.20 | 2.0 | 0 | 53.06 | PEAK | 74 | PASS |
| | Off | 2483.5 | -51.95 | 2.0 | 0 | 43.31 | AV | 54 | PASS |
| | Off | 2500.0 | -42.52 | 2.0 | 0 | 52.73 | PEAK | 74 | PASS |
| | Off | 2500.0 | -52.10 | 2.0 | 0 | 43.16 | AV | 54 | PASS |
| $\pi/4$ DQPSK | Off | 2310.0 | -43.34 | 2.0 | 0 | 51.92 | PEAK | 74 | PASS |
| | Off | 2310.0 | -53.18 | 2.0 | 0 | 42.08 | AV | 54 | PASS |
| | Off | 2390.0 | -43.33 | 2.0 | 0 | 51.93 | PEAK | 74 | PASS |
| | Off | 2390.0 | -52.65 | 2.0 | 0 | 42.61 | AV | 54 | PASS |
| | Off | 2483.5 | -41.38 | 2.0 | 0 | 53.88 | PEAK | 74 | PASS |
| | Off | 2483.5 | -51.82 | 2.0 | 0 | 43.44 | AV | 54 | PASS |
| | Off | 2500.0 | -42.56 | 2.0 | 0 | 52.70 | PEAK | 74 | PASS |
| | Off | 2500.0 | -52.15 | 2.0 | 0 | 43.10 | AV | 54 | PASS |
| 8DPSK | Off | 2310.0 | -42.84 | 2.0 | 0 | 52.42 | PEAK | 74 | PASS |
| | Off | 2310.0 | -53.00 | 2.0 | 0 | 42.26 | AV | 54 | PASS |
| | Off | 2390.0 | -41.10 | 2.0 | 0 | 54.16 | PEAK | 74 | PASS |
| | Off | 2390.0 | -52.65 | 2.0 | 0 | 42.61 | AV | 54 | PASS |
| | Off | 2483.5 | -41.87 | 2.0 | 0 | 53.39 | PEAK | 74 | PASS |
| | Off | 2483.5 | -51.72 | 2.0 | 0 | 43.54 | AV | 54 | PASS |
| | Off | 2500.0 | -42.74 | 2.0 | 0 | 52.52 | PEAK | 74 | PASS |
| | Off | 2500.0 | -52.11 | 2.0 | 0 | 43.15 | AV | 54 | PASS |


Restrict-band band-edge measurements_Hopping Off_GFSK_PEAK (Low Channel)

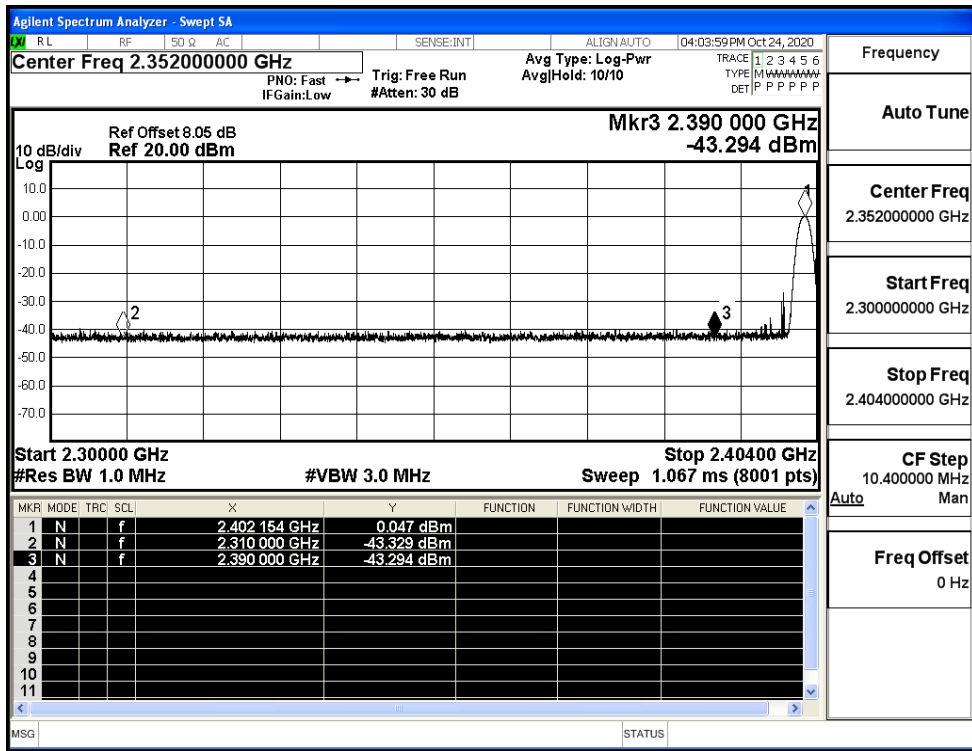


Restrict-band band-edge measurements_Hopping Off_GFSK_Average (Low Channel)

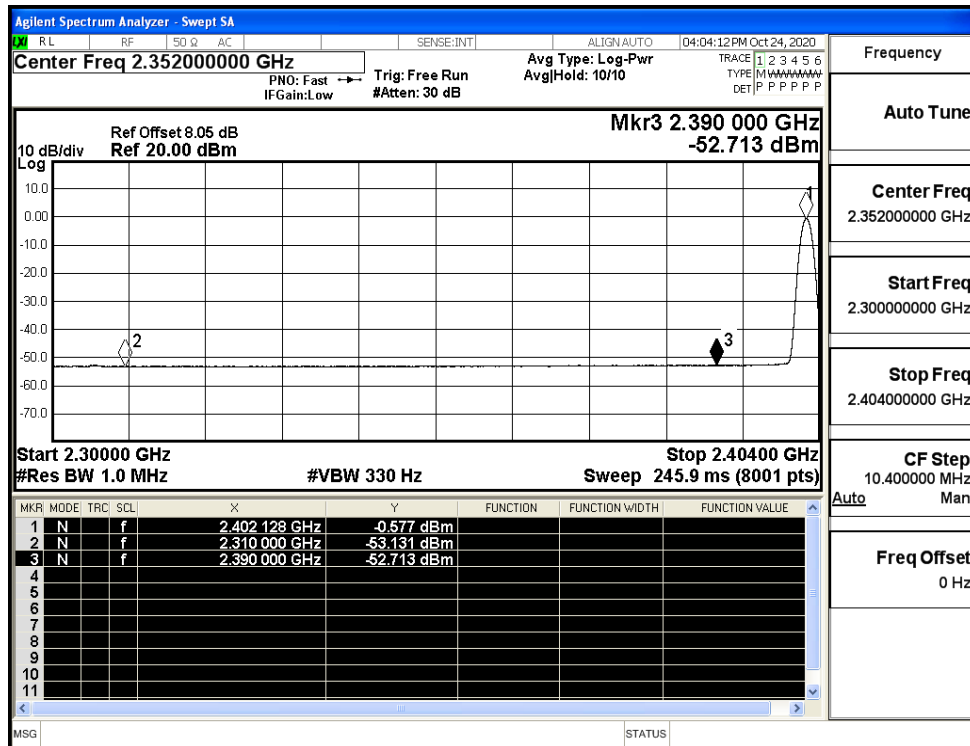


Restrict-band band-edge measurements_Hopping Off_GFSK_PEAK (High Channel)

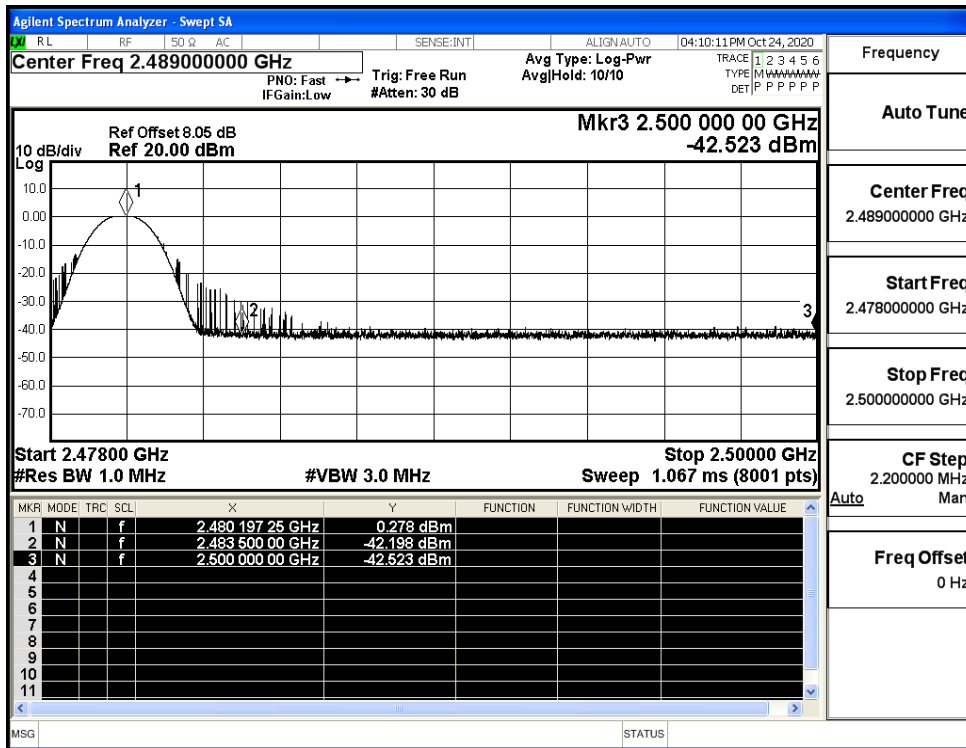


Restrict-band band-edge measurements_Hopping Off_GFSK_Average (High Channel)

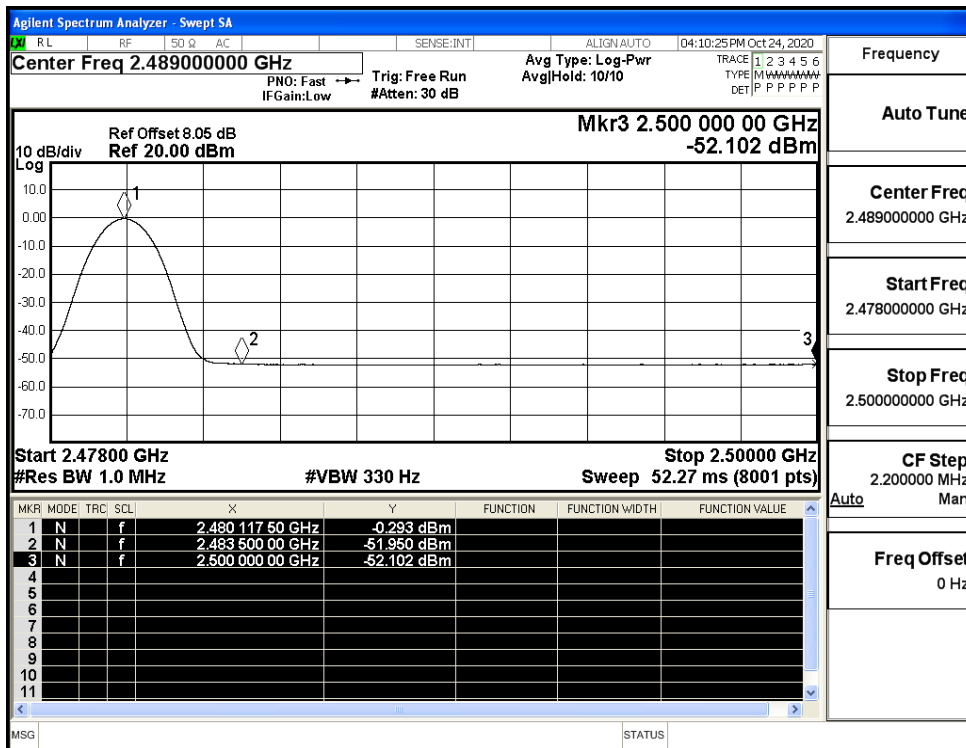


Restrict-band band-edge measurements_Hopping Off $\pi/4$ -DQPSK_PEAK (Low Channel)

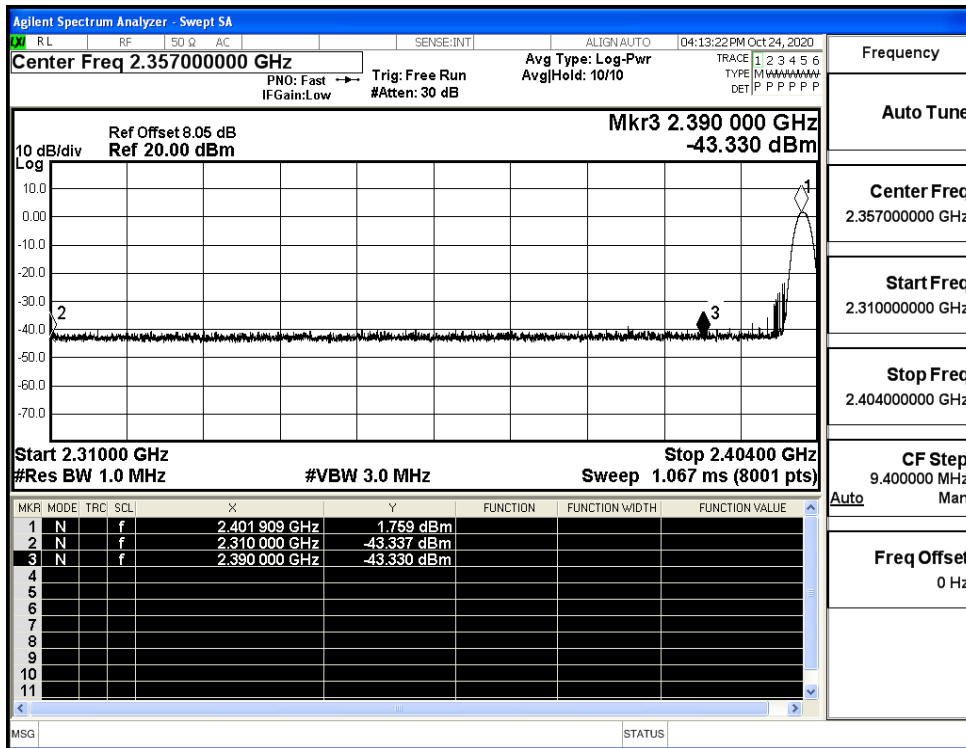


Restrict-band band-edge measurements_Hopping Off $\pi/4$ -DQPSK_Average (Low Channel)

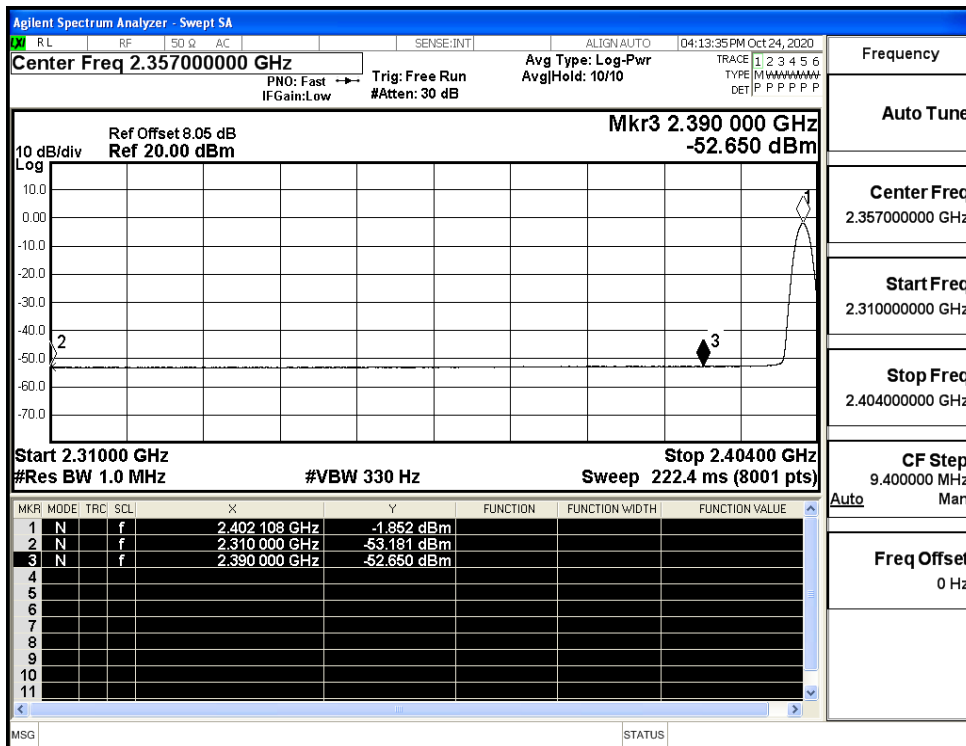


Restrict-band band-edge measurements_Hopping Off_π/4-DQPSK_PEAK (High Channel)

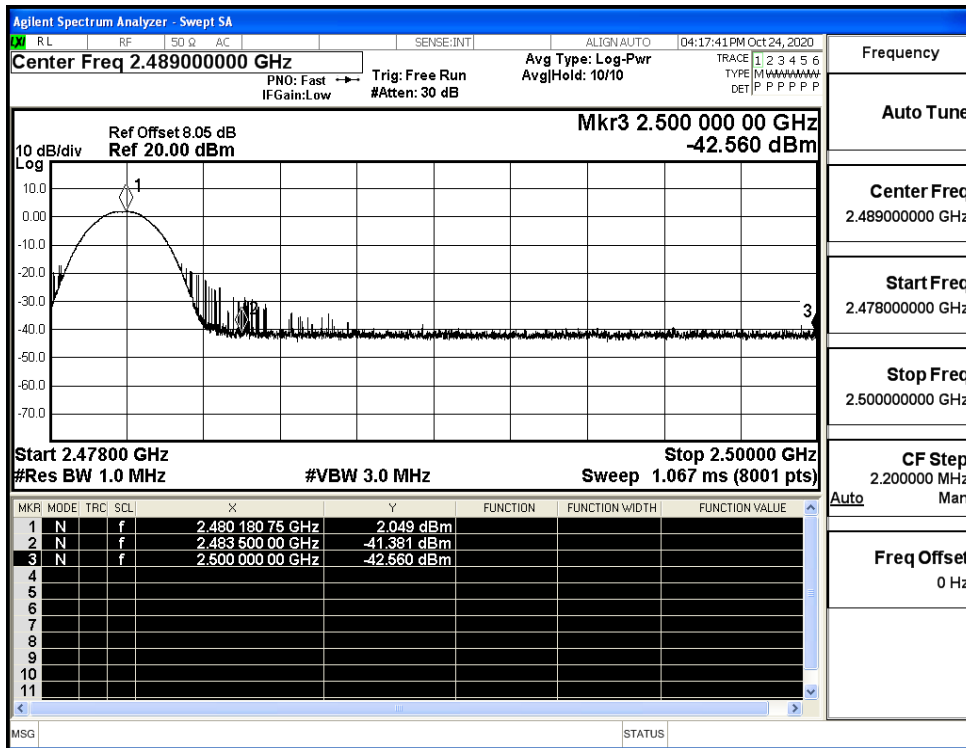


Restrict-band band-edge measurements_Hopping Off_π/4-DQPSK_Average (High Channel)

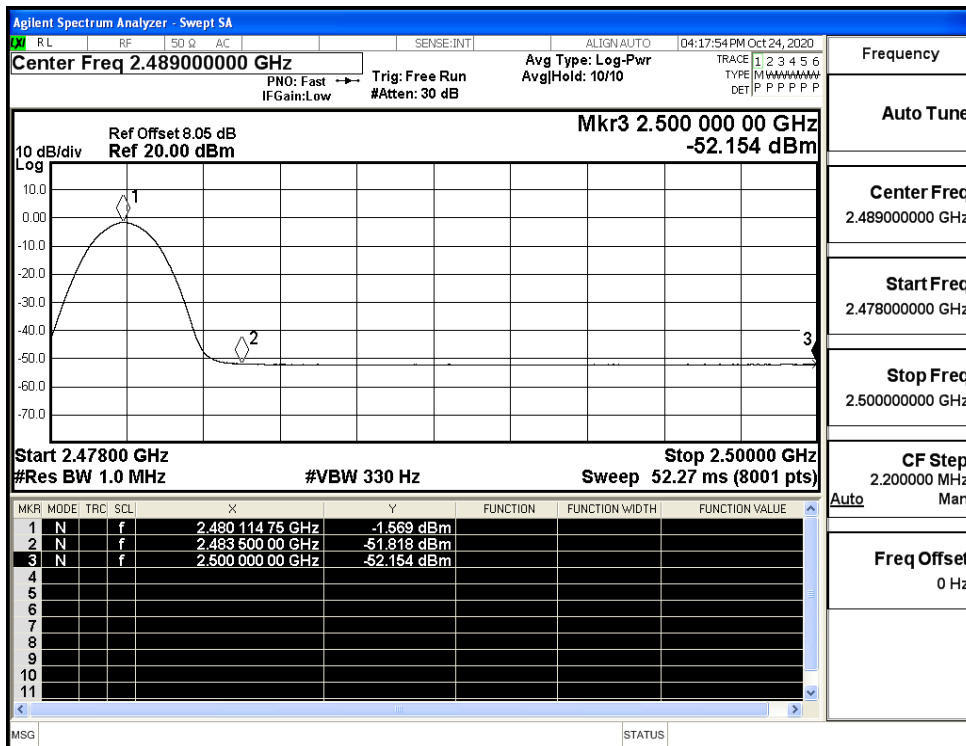


Restrict-band band-edge measurements_Hopping Off_8DPSK_PEAK (Low Channel)

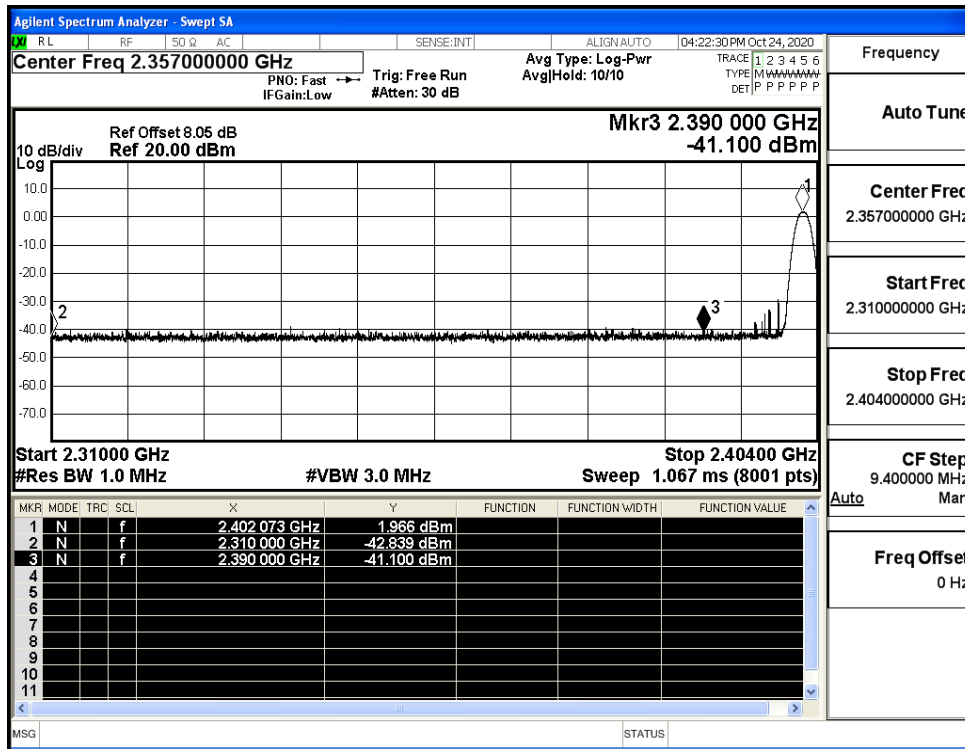

Restrict-band band-edge measurements_Hopping Off_8DPSK_Average (Low Channel)

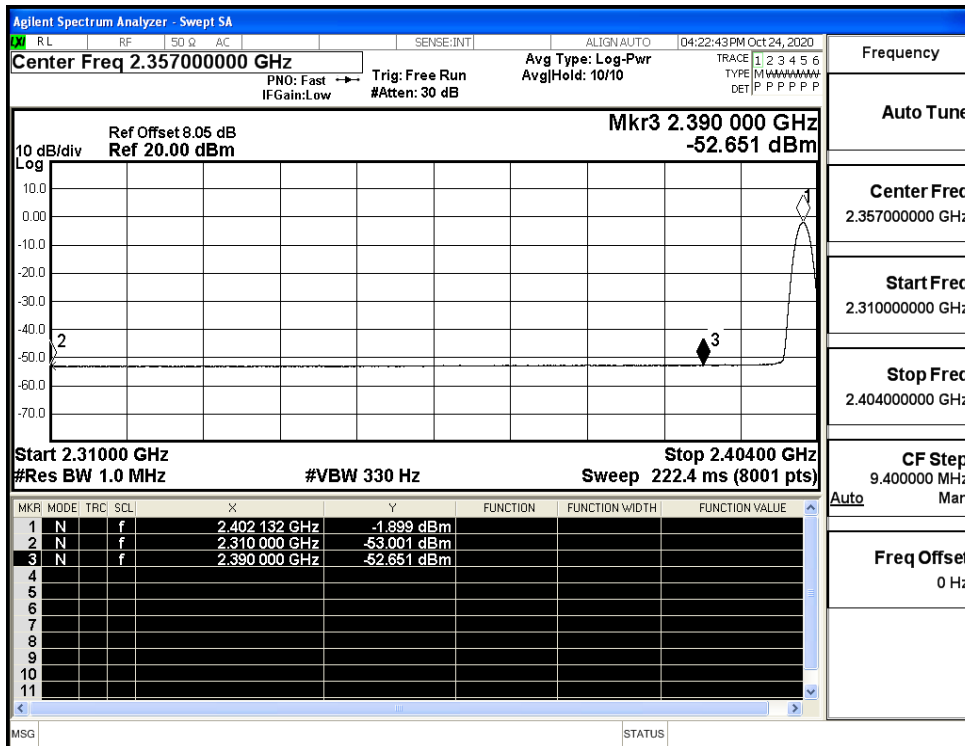

Restrict-band band-edge measurements_Hopping Off_8DPSK_PEAK (High Channel)

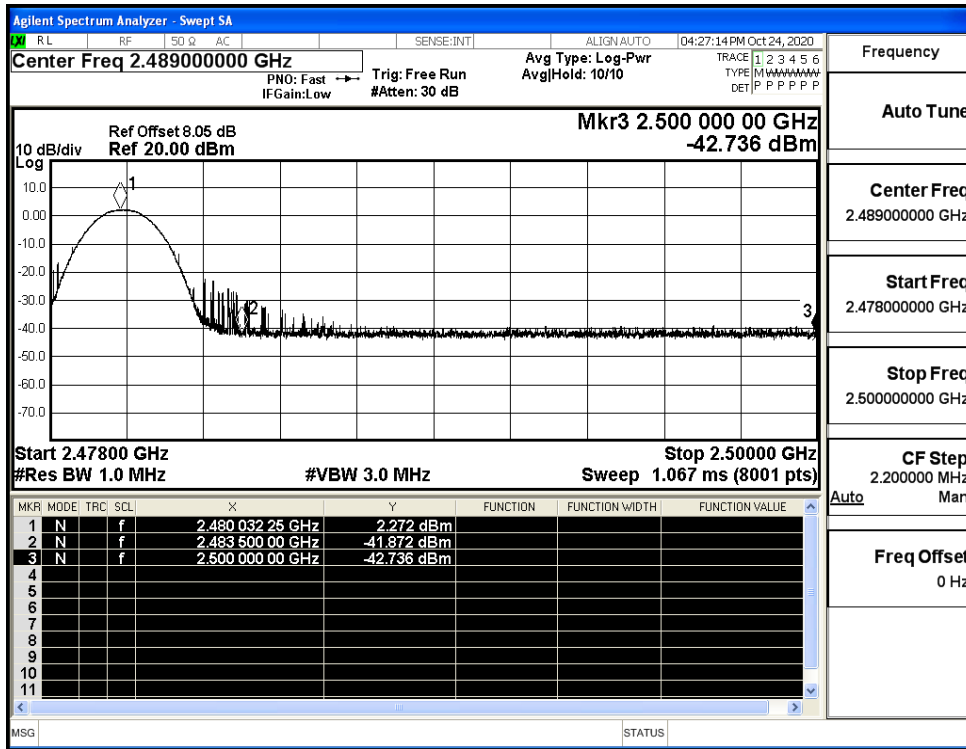

Restrict-band band-edge measurements_Hopping Off_8DPSK_Average (High Channel)

