





Integrated LED Panel Light Installation Manual

WARNING:



- * Indoor usage only
- * Operating temperature: $-20-40^{\circ}\text{C}$
- * Pls cut off the power before installation or maintenance
- * The environment where exceeding rated operating temperature may damage lamp's lifespan
- * Pls contact the manufacturer or service agent directly if you encounter any problems during installation.

Dimension

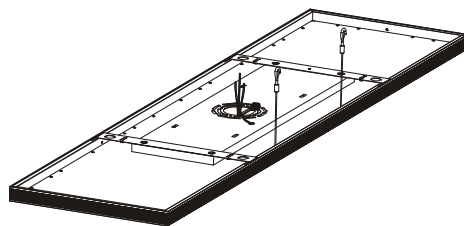

Specification in	A mm	B mm	C mm
1*1	302	302	26
1*2	302	602	26
1*4	302	1211	26
2*2	602	602	26
◇ ◇ ◇	◇ ◇ ◇	◇ ◇ ◇	26

Standard Accessories



plastic nail

X3



2x100 zip tie

X2



TM4x20 screw

X2



wire nuts

X3



plastic screw

X4



washer

X4




TA4X30 screw

X4


Mounted Instructions

Step 1

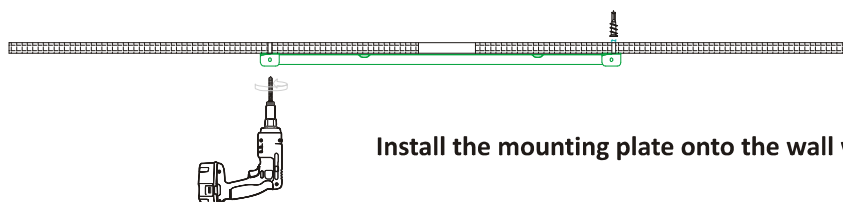


Install the mounting plate onto the wall with screws.


Step 2

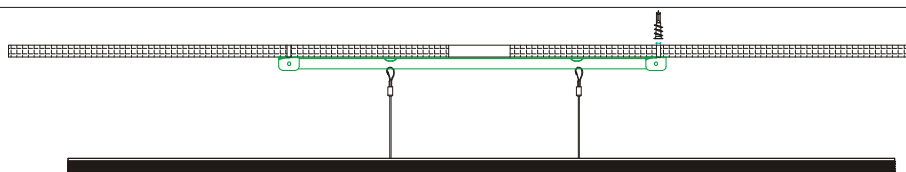


Fasten the safety rope, the panel will hang on the mounting plate.

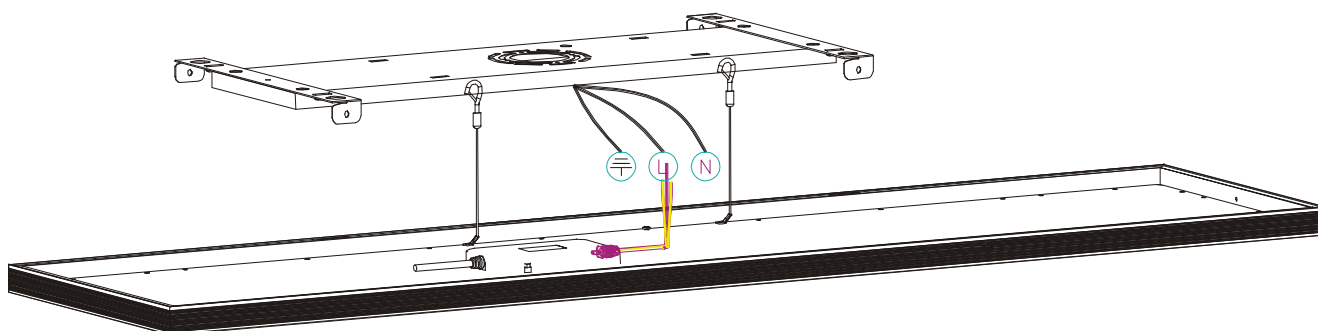


Step 3

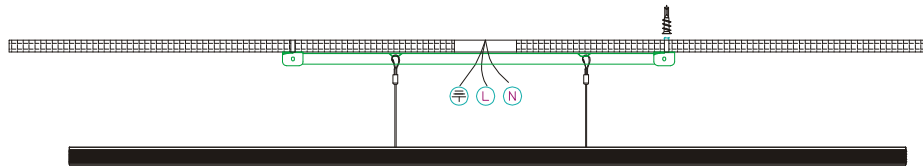

Connect the L,N,Earth wires between panels and junction box with wire nuts.

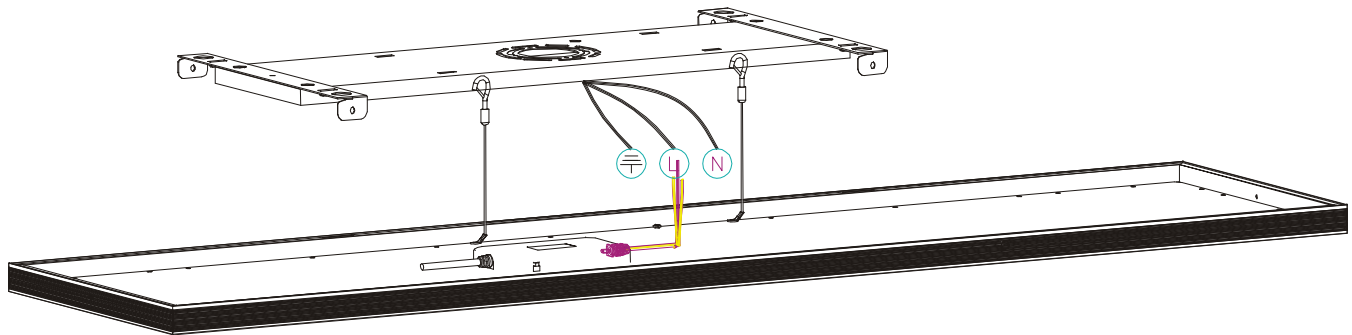


Step 4





Install the panels through the direction of slot and push the plastic nail into the holes.

After installing the panels, fix the panels with the plastic nail.

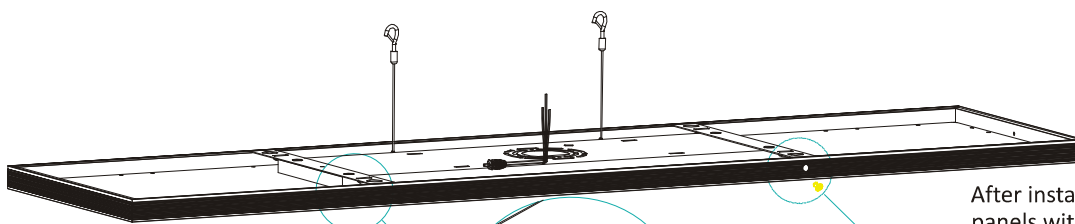


After installing the panels, fix the panels with the plastic nail.



Step 5

1. Connect the product to AC side.
2. Continuously switch 3 times to get the light become flashing status.
3. Connect the mobile phone with Wifi, and turn on Tuya smart APP.
4. Click add - all devices - lighting for connecting.
5. Device connected successfully.

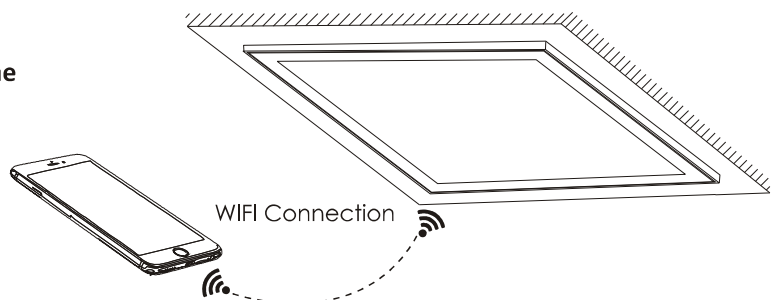

FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

FCC ID:2AUI9-GESMRT