



# FCC TEST REPORT

Test report  
On Behalf of  
**Shenzhen Vitek Electronics Co., Ltd**

For

**10 inch Tablet PC**

**Model No.: VK100W, VK101W, VK102W, VK103W, VK104W, VK105W,  
VK106W, VK107W, VK108W VK10XX , VK10XXY ( X stands for 0 to 9,  
Y stands for A to Z)**

**FCC ID: 2AUIK-VK100W**

**Prepared for :** Shenzhen Vitek Electronics Co., Ltd  
Room 402-408, Building 8, He Tang Zhi Yuan, Huan Cheng Nan Road, Bantian,  
Shenzhen, China

**Prepared By :** Shenzhen HUAK Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Nov. 20, 2020 ~ Nov. 28, 2020

**Date of Report:** Nov. 28, 2020

**Report Number:** HK2011233522-1E



## TEST RESULT CERTIFICATION

**Applicant's name** ..... Shenzhen Vitek Electronics Co., Ltd  
Address ..... Room 402-408, Building 8, He Tang Zhi Yuan, Huan Cheng Nan Road, Bantian, Shenzhen, China

**Manufacturer's Name** ..... Shenzhen Vitek Electronics Co., Ltd  
Address ..... Room 402-408, Building 8, He Tang Zhi Yuan, Huan Cheng Nan Road, Bantian, Shenzhen, China

### Product description

Trade Mark: VTEX  
Product name ..... 10 inch Tablet PC  
Model and/or type reference .. VK100W, VK101W, VK102W, VK103W, VK104W, VK105W, VK106W, VK107W, VK108W, VK10XX, VK10XXY (X stands for 0 to 9, Y stands for A to Z)  
**Standards** ..... FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

### Date of Test .....

Date (s) of performance of tests ..... Nov. 20, 2020 ~ Nov. 28, 2020  
Date of Issue ..... Nov. 28, 2020  
Test Result ..... Pass

Testing Engineer : \_\_\_\_\_

(Gary Qian)

Technical Manager : \_\_\_\_\_

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



## TABLE OF CONTENTS

<b>1. Test Result Summary .....</b>	<b>5</b>
1.1. TEST PROCEDURES AND RESULTS.....	5
1.2. TEST FACILITY .....	5
1.3. MEASUREMENT UNCERTAINTY .....	6
<b>2. EUT Description .....</b>	<b>7</b>
2.1. GENERAL DESCRIPTION OF EUT .....	7
2.2. OPERATION OF EUT DURING TESTING .....	8
2.3. DESCRIPTION OF TEST SETUP .....	9
<b>3. General Information.....</b>	<b>10</b>
3.1. TEST ENVIRONMENT AND MODE .....	10
3.2. DESCRIPTION OF SUPPORT UNITS .....	11
<b>4. Test Results and Measurement Data .....</b>	<b>12</b>
4.1. CONDUCTED EMISSION .....	12
4.2. MAXIMUM CONDUCTED OUTPUT POWER .....	16
4.3. EMISSION BANDWIDTH.....	18
4.4. POWER SPECTRAL DENSITY .....	24
4.5. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT .....	30
4.6. RADIATED SPURIOUS EMISSION MEASUREMENT .....	40
4.7. ANTENNA REQUIREMENT .....	66
4.8. PHOTOGRAPH OF TEST.....	67
4.9. PHOTOS OF THE EUT .....	69

**\*\* Modified History \*\***

Revision	Description	Issued Date	Remark
Revision 1.0	Initial Test Report Release	Nov. 28, 2020	Jason Zhou



## 1. Test Result Summary

### 1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	1§5.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

**Note:**

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.71\text{dB}$
2	RF power, conducted	$\pm 0.37\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.90\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$



## 2. EUT Description

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	10 inch Tablet PC
Model Name	VK100W
Serial No.	VK101W, VK102W, VK103W, VK104W, VK105W, VK106W, VK107W, VK108W VK10XX , VK10XXY ( X stands for 0 to 9, Y stands for A to Z)
Model Difference	All model's the function, software and electric circuit are the same, only model named different. Test sample model: VK100W
FCC ID	<b>2AUIK-VK100W</b>
Antenna Type	Internal Antenna
Antenna Gain	1dBi
Operation frequency	802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n 40: 7CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Power Source	DC 3.7V from battery or DC 5V 2A from Adapter with AC100-240V 50/60Hz, 0.5A
Power Rating	DC 3.7V from battery or DC 5V 2A from Adapter with AC100-240V 50/60Hz, 0.5A



## Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List For 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
--	--	04	2427	07	2442	--	--
--	--	05	2432	08	2447	--	--
03	2422	06	2437	09	2452		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

## 2.2. Operation of EUT during testing

### Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

The mode is used: **Transmitting mode for 802.11n (HT40)**

Low Channel: 2422MHz


Middle Channel: 2437MHz

High Channel: 2452MHz



## 2.3. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and radiation below 1GHz testing:



Operation of EUT during radiation above 1GHz testing:



Adapter information

Model:JK050200-S86USU

Input: 100-240V, 50-60Hz, 0.5A

Output: 5VDC, 2A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X&Z position



### 3. General Information

#### 3.1. Test environment and mode

<b>Operating Environment:</b>	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
<b>Test Mode:</b>	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground lane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

#### **Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

#### **Final Test Mode:**

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---------------------------------------------------------

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.
2. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20), 13.5Mbps for 802.11n(H40). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.



### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### Test Specification

<b>Test Requirement:</b>	FCC Part 15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"><thead><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr></thead><tbody><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></tbody></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p style="text-align: center;"><b>Reference Plane</b></p> <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Charging + transmitting with modulation														
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li></ol>														
<b>Test Result:</b>	PASS														



## Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Jun. 17, 2021
LISN	R&S	ENV216	HKE-002	Jun. 17, 2021
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## TEST RESULTS

Test Specification: Line

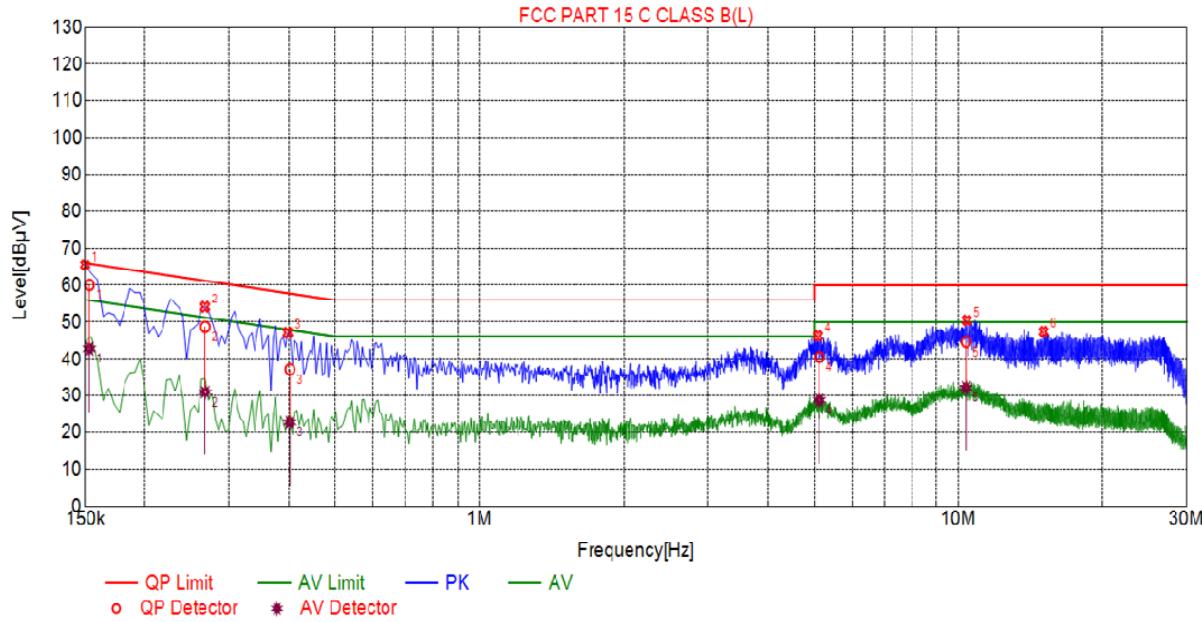

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V]	Factor [dB]	Limit [dB $\mu$ V]	Margin [dB]	Reading [dB $\mu$ V]	Detector	Type
1	0.1500	65.62	20.03	66.00	0.38	45.59	PK	L
2	0.2670	54.06	20.03	61.21	7.15	34.03	PK	L
3	0.3975	47.07	20.04	57.91	10.84	27.03	PK	L
4	5.0910	46.21	20.26	60.00	13.79	25.95	PK	L
5	10.4145	50.44	20.04	60.00	9.56	30.40	PK	L
6	15.0675	47.33	19.96	60.00	12.67	27.37	PK	L

### Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dB $\mu$ V]	QP Limit [dB $\mu$ V]	QP Margin [dB]	QP Reading [dB $\mu$ V]	AV Value [dB $\mu$ V]	AV Limit [dB $\mu$ V]	AV Margin [dB]	AV Reading [dB $\mu$ V]	Type
1	0.1530	20.03	60.12	65.84	5.72	40.09	42.85	55.84	12.99	22.82	L
2	0.2672	20.03	48.67	61.21	12.54	28.64	31.04	51.21	20.17	11.01	L
3	0.4015	20.04	37.23	57.82	20.59	17.19	22.78	47.82	25.04	2.74	L
4	5.1233	20.26	40.63	60.00	19.37	20.37	28.80	50.00	21.20	8.54	L
5	10.3822	20.05	44.63	60.00	15.37	24.58	32.30	50.00	17.70	12.25	L

Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss


Level=Test receiver reading + correction factor

#### Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
  - Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
  - Final Level = Receiver Read level + LISN Factor + Cable Loss
- If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



## Test Specification: Neutral

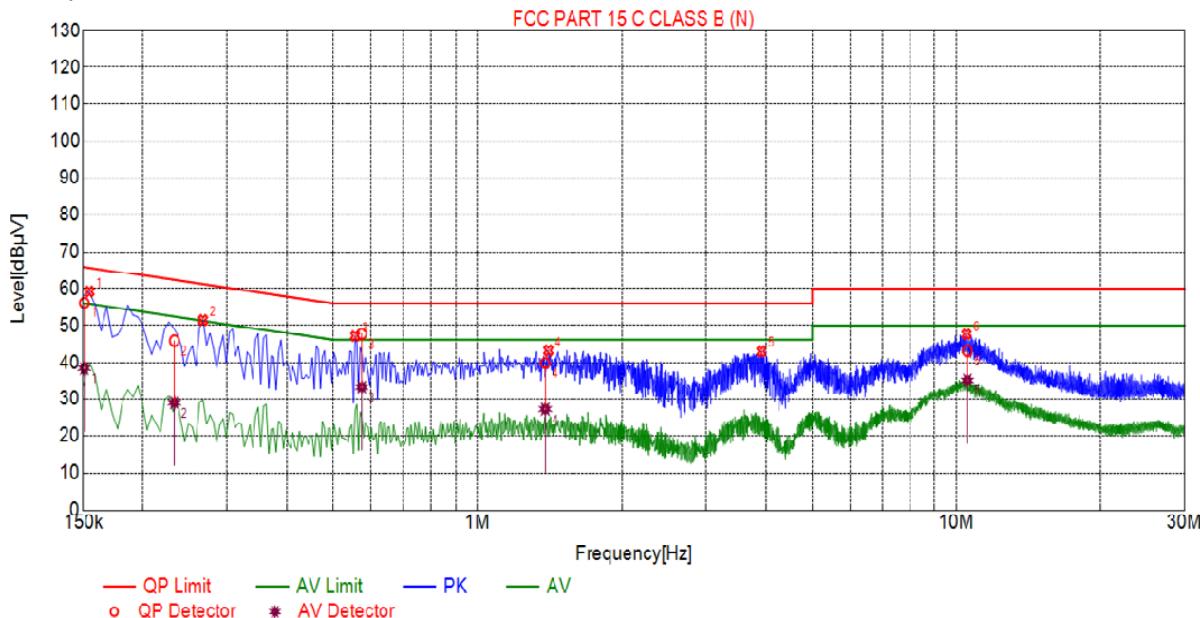

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V]	Factor [dB]	Limit [dB $\mu$ V]	Margin [dB]	Reading [dB $\mu$ V]	Detector	Type
1	0.1545	59.22	20.03	65.75	6.53	39.19	PK	N
2	0.2670	51.43	20.03	61.21	9.78	31.40	PK	N
3	0.5550	47.08	20.06	56.00	8.92	27.02	PK	N
4	1.4055	43.24	20.11	56.00	12.76	23.13	PK	N
5	3.9165	43.01	20.25	56.00	12.99	22.76	PK	N
6	10.5000	47.58	20.04	60.00	12.42	27.54	PK	N

## Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dB $\mu$ V]	QP Limit [dB $\mu$ V]	QP Margin [dB]	QP Reading [dB $\mu$ V]	AV Value [dB $\mu$ V]	AV Limit [dB $\mu$ V]	AV Margin [dB]	AV Reading [dB $\mu$ V]	Type
1	0.1508	20.03	56.09	65.96	9.87	36.06	38.42	55.96	17.54	18.39	N
2	0.2326	20.03	45.79	62.36	16.57	25.76	29.03	52.36	23.33	9.00	N
3	0.5728	20.05	47.71	56.00	8.29	27.66	33.35	46.00	12.65	13.30	N
4	1.3847	20.11	39.89	56.00	16.11	19.78	27.31	46.00	18.69	7.20	N
5	10.5459	20.04	43.17	60.00	16.83	23.13	35.21	50.00	14.79	15.17	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

**Notes:**

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level =Receiver Read level + LISN Factor + Cable Loss.  
If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



## 4.2. Maximum Conducted Output Power

### Test Specification

<b>Test Requirement:</b>	FCC Part 15 C Section 15.247 (b)(3)
<b>Test Method:</b>	KDB 558074
<b>Limit:</b>	30dBm
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. A green rectangular box labeled "Power meter" is connected to a yellow rectangular box labeled "EUT" via a grey horizontal line representing an RF cable. A small white square component is placed between the two boxes, likely representing an attenuator or connector.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows the Measurement Procedure of FCC KDB No.558074 D01 15.247 Meas Guidance v05r02.</li><li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Measure the Peak output power and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power meter	Agilent	E4417B	HKE-107	Jun. 17, 2021
Power Sensor	Agilent	E9327A	HKE-113	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 17, 2021

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test Data**

<b>TX 802.11b Mode</b>			
Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	6.8	30
CH06	2437	6.41	30
CH11	2462	5.91	30

<b>TX 802.11g Mode</b>			
CH01	2412	6.5	30
CH06	2437	6.38	30
CH11	2462	5.43	30

<b>TX 802.11n20 Mode</b>			
CH01	2412	5.82	30
CH06	2437	5.85	30
CH11	2462	5.52	30

<b>TX 802.11n40 Mode</b>			
CH03	2422	6.43	30
CH06	2437	6.04	30
CH09	2452	6.94	30



### 4.3. Emission Bandwidth

#### Test Specification

<b>Test Requirement:</b>	FCC Part 15 C Section 15.247 (a)(2)
<b>Test Method:</b>	KDB 558074
<b>Limit:</b>	>500kHz
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) through a grey coaxial cable. Both the analyzer and the EUT have black ground connections.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows FCC KDB Publication No.558074 D01 15.247 Meas Guidance v05r02.</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li><li>4. Measure and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

#### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 17, 2021
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 17, 2021

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**

Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	8.272	16.10	16.94	35.27
Middle	8.197	15.78	16.63	35.35
Highest	8.887	15.77	16.58	36.28
Limit:	>500KHZ			
Test Result:	PASS			

**Test plots as follows:**




## 802.11b Modulation


## Lowest channel



## Middle channel

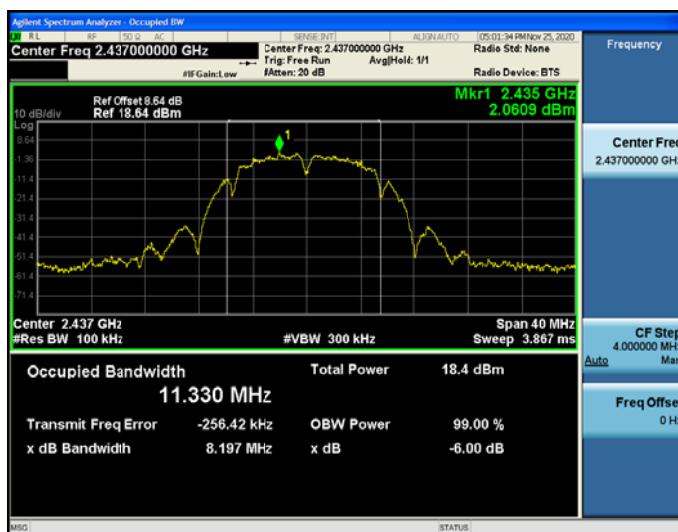


## Highest channel

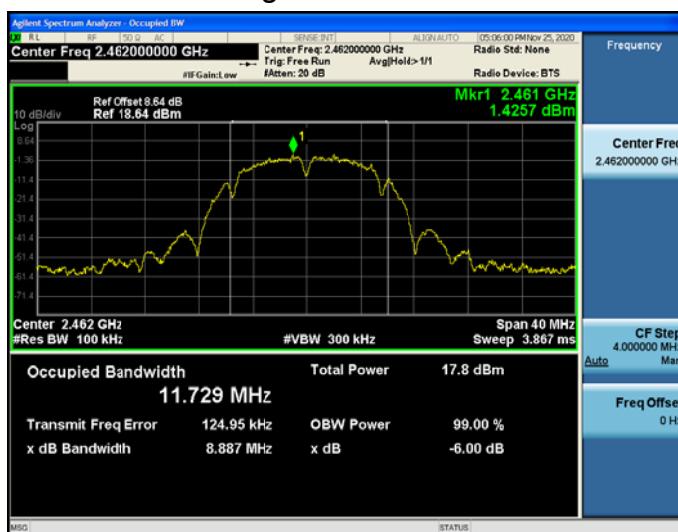




## 802.11g Modulation


## Lowest channel

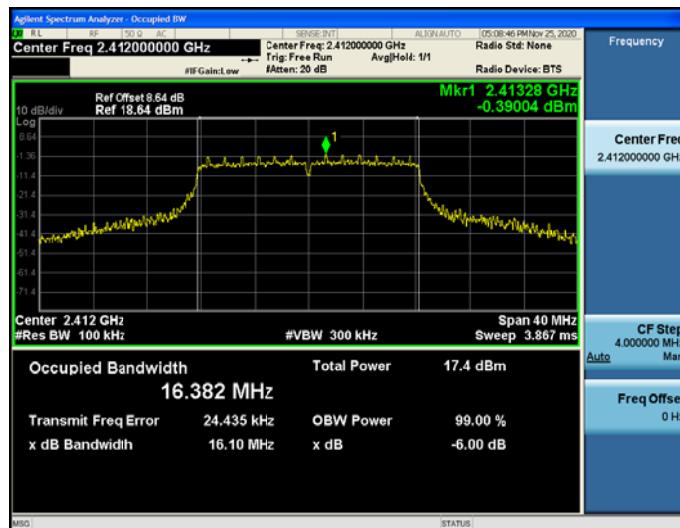

## Middle channel

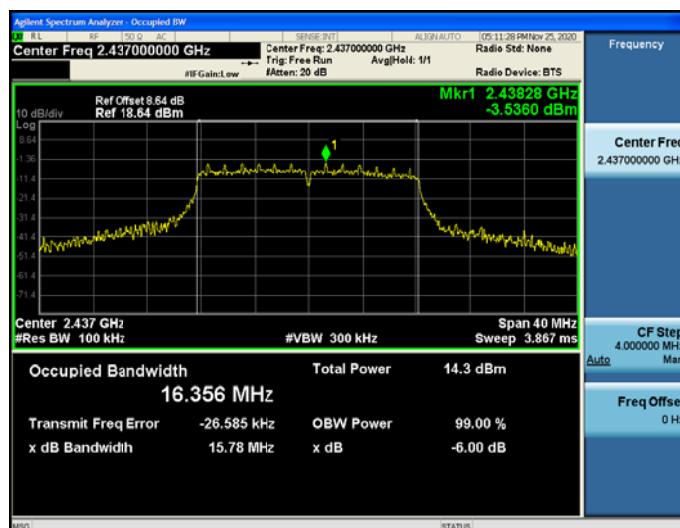


## Highest channel

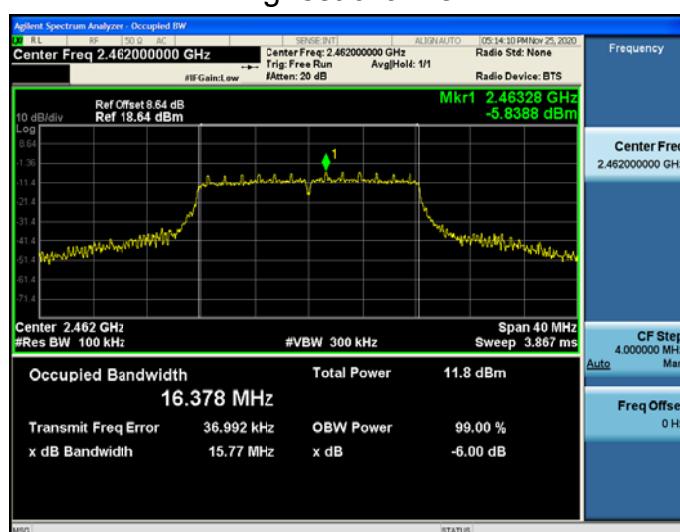




## 802.11n (HT20) Modulation

## Lowest channel

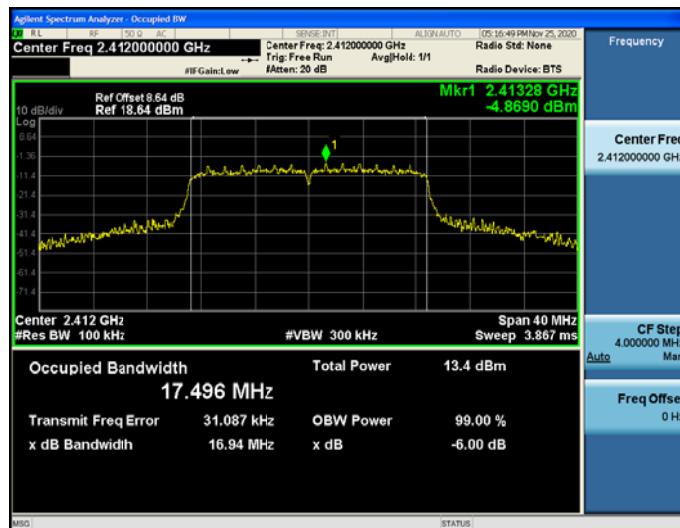

## Middle channel

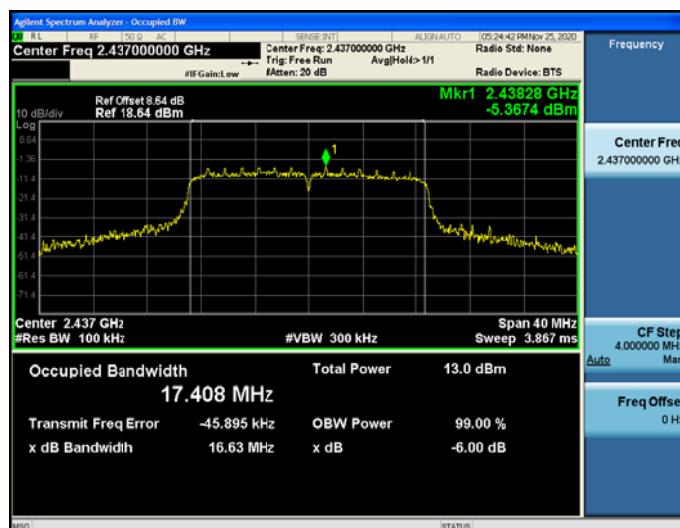


## Highest channel






## 802.11n (HT40) Modulation


## Lowest channel

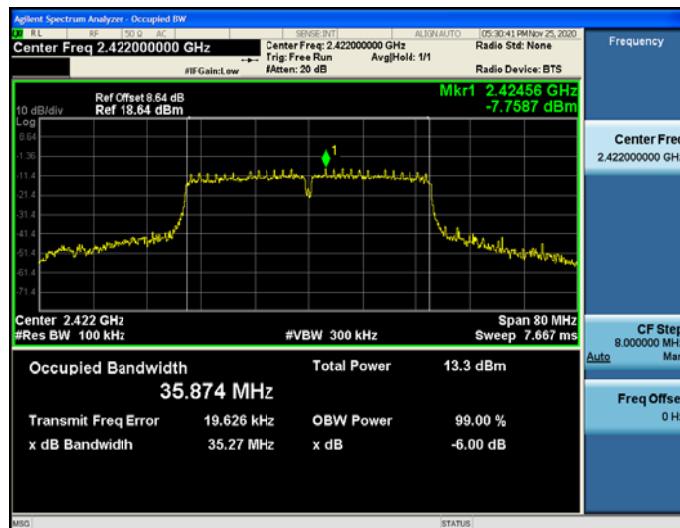

## Middle channel

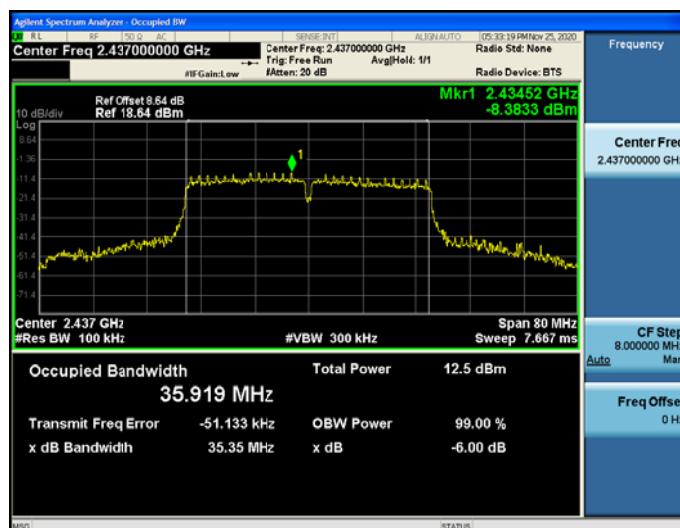


## Highest channel

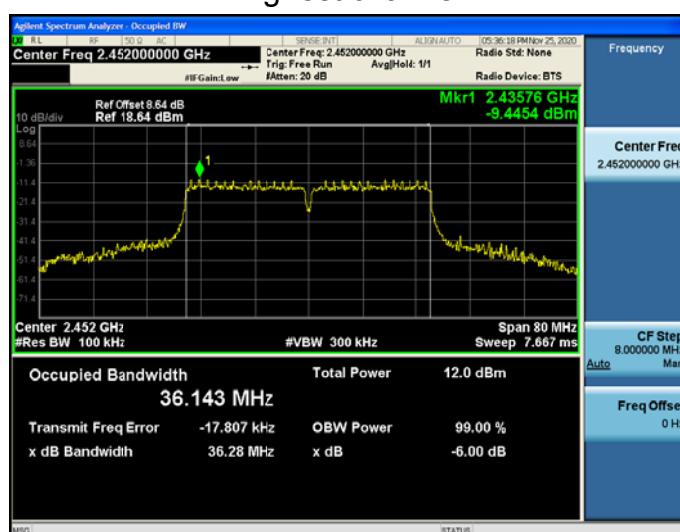



## 4.4. Power Spectral Density

## Test Specification
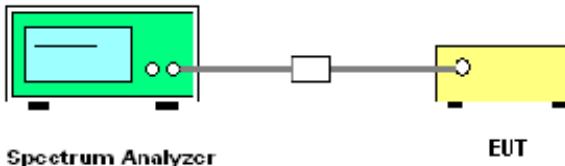
<b>Test Requirement:</b>	FCC Part 15 C Section 15.247 (e)
<b>Test Method:</b>	KDB 558074
<b>Limit:</b>	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
<b>Test Setup:</b>	 <p style="text-align: center;"><b>Spectrum Analyzer</b>                            <b>EUT</b></p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication No.558074 D01 15.247 Meas Guidance v05r02</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>. Video bandwidth VBW <math>\geq 3 \times \text{RBW}</math>. Set the span to at least 1.5 times the OBW.</li> <li>5. Detector = Peak, Sweep time = auto couple.</li> <li>6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.</li> <li>6. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

## Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 17, 2021
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 17, 2021

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**

EUT Set Mode	Channel	Result (dBm/30kHz)	Result (dBm/3kHz)
802.11b	Lowest	0.66	-9.34
	Middle	-2.05	-12.05
	Highest	-3.04	-13.04
802.11g	Lowest	-4.88	-14.88
	Middle	-7.83	-17.83
	Highest	-10.72	-20.72
802.11n(H20)	Lowest	-10.41	-20.41
	Middle	-10	-20
	Highest	-11.06	-21.06
802.11n(H40)	Lowest	-12.16	-22.16
	Middle	-13.27	-23.27
	Highest	-14.54	-24.54
PSD test result (dBm/3kHz)= PSD test result (dBm/30kHz)-10			
Limit: 8dBm/3kHz			
Test Result:		PASS	

**Test plots as follows:**



## 802.11b Modulation

### Lowest channel



### Middle channel




### Highest channel





## 802.11g Modulation


## Lowest channel

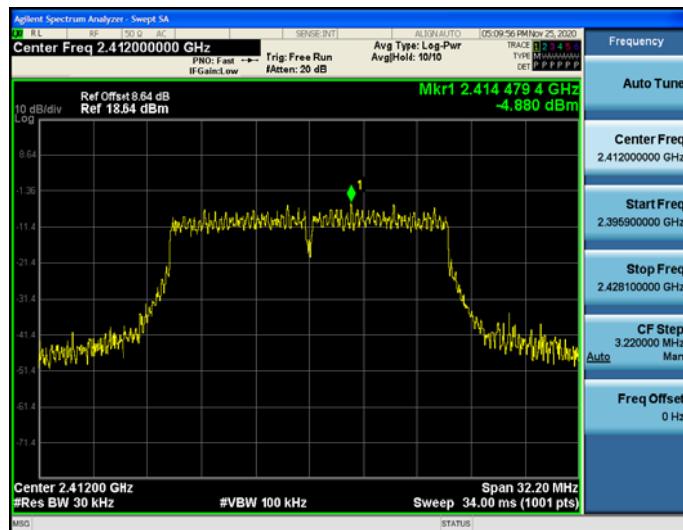

## Middle channel




## Highest channel

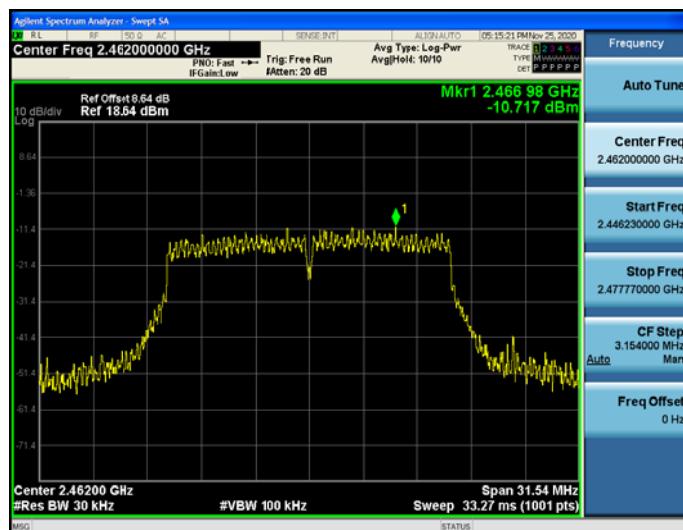




## 802.11n (HT20) Modulation

## Lowest channel

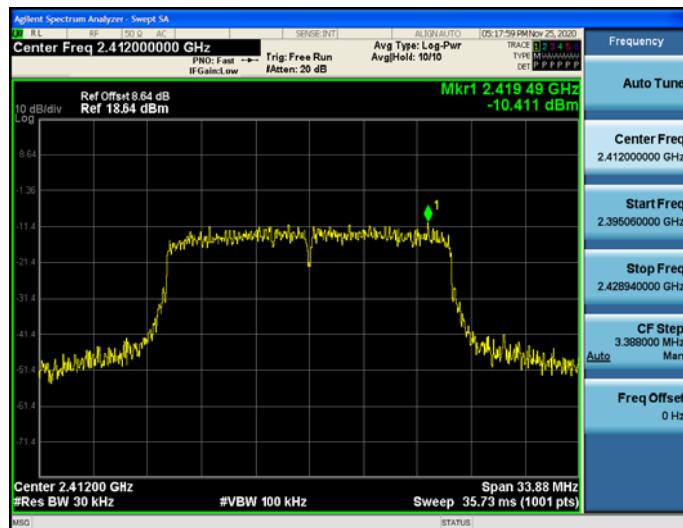

## Middle channel

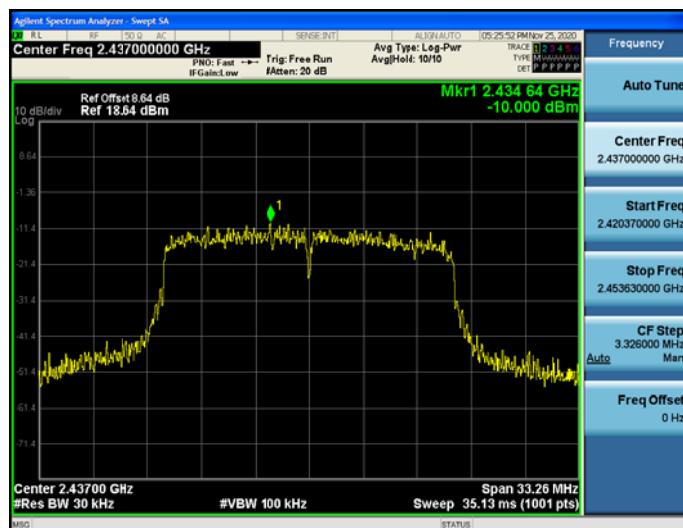


## Highest channel





## 802.11n (HT40) Modulation


## Lowest channel

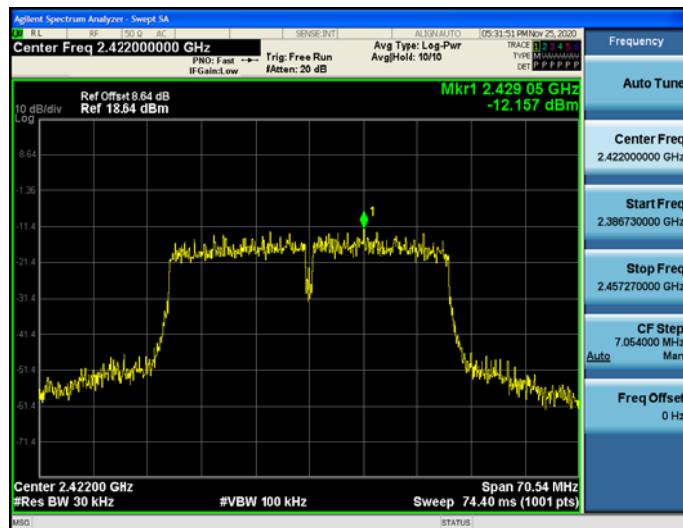

## Middle channel



## Highest channel

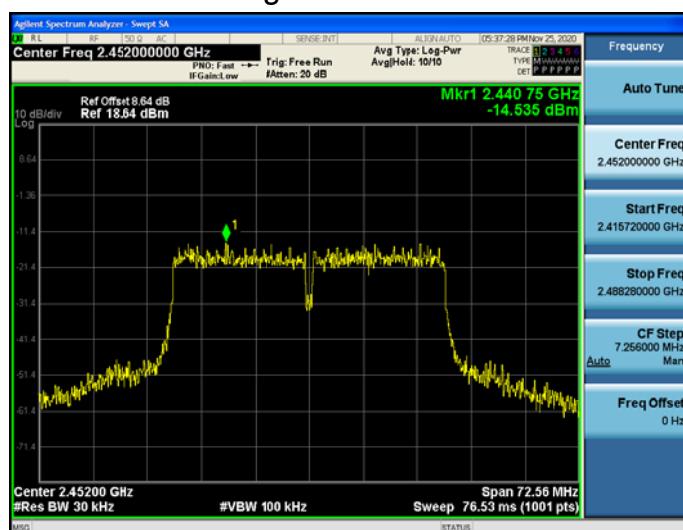



## 4.5. Conducted Band Edge and Spurious Emission Measurement

### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB558074
<b>Limit:</b>	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. On the left, a green rectangular box represents the 'Spectrum Analyzer'. It has two circular ports on its front panel. A grey line labeled 'RF cable' connects the top port of the analyzer to a small white square component labeled 'Attenuator'. Another grey line labeled 'RF cable' connects the output of the attenuator to the 'EUT' (Equipment Under Test), which is represented by a yellow rectangular box with a circular port on its right side.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows FCC KDB Publication No.558074 D01 15.247 Meas Guidance v05r02.</li><li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).</li><li>5. Measure and record the results in the test report.</li><li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li></ol>
<b>Test Result:</b>	PASS



## Test Instruments


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 17, 2021
Signal generator	Agilent	N5183A	HKE-071	Jun. 17, 2021
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 17, 2021

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## Test Data


### 802.11b Modulation

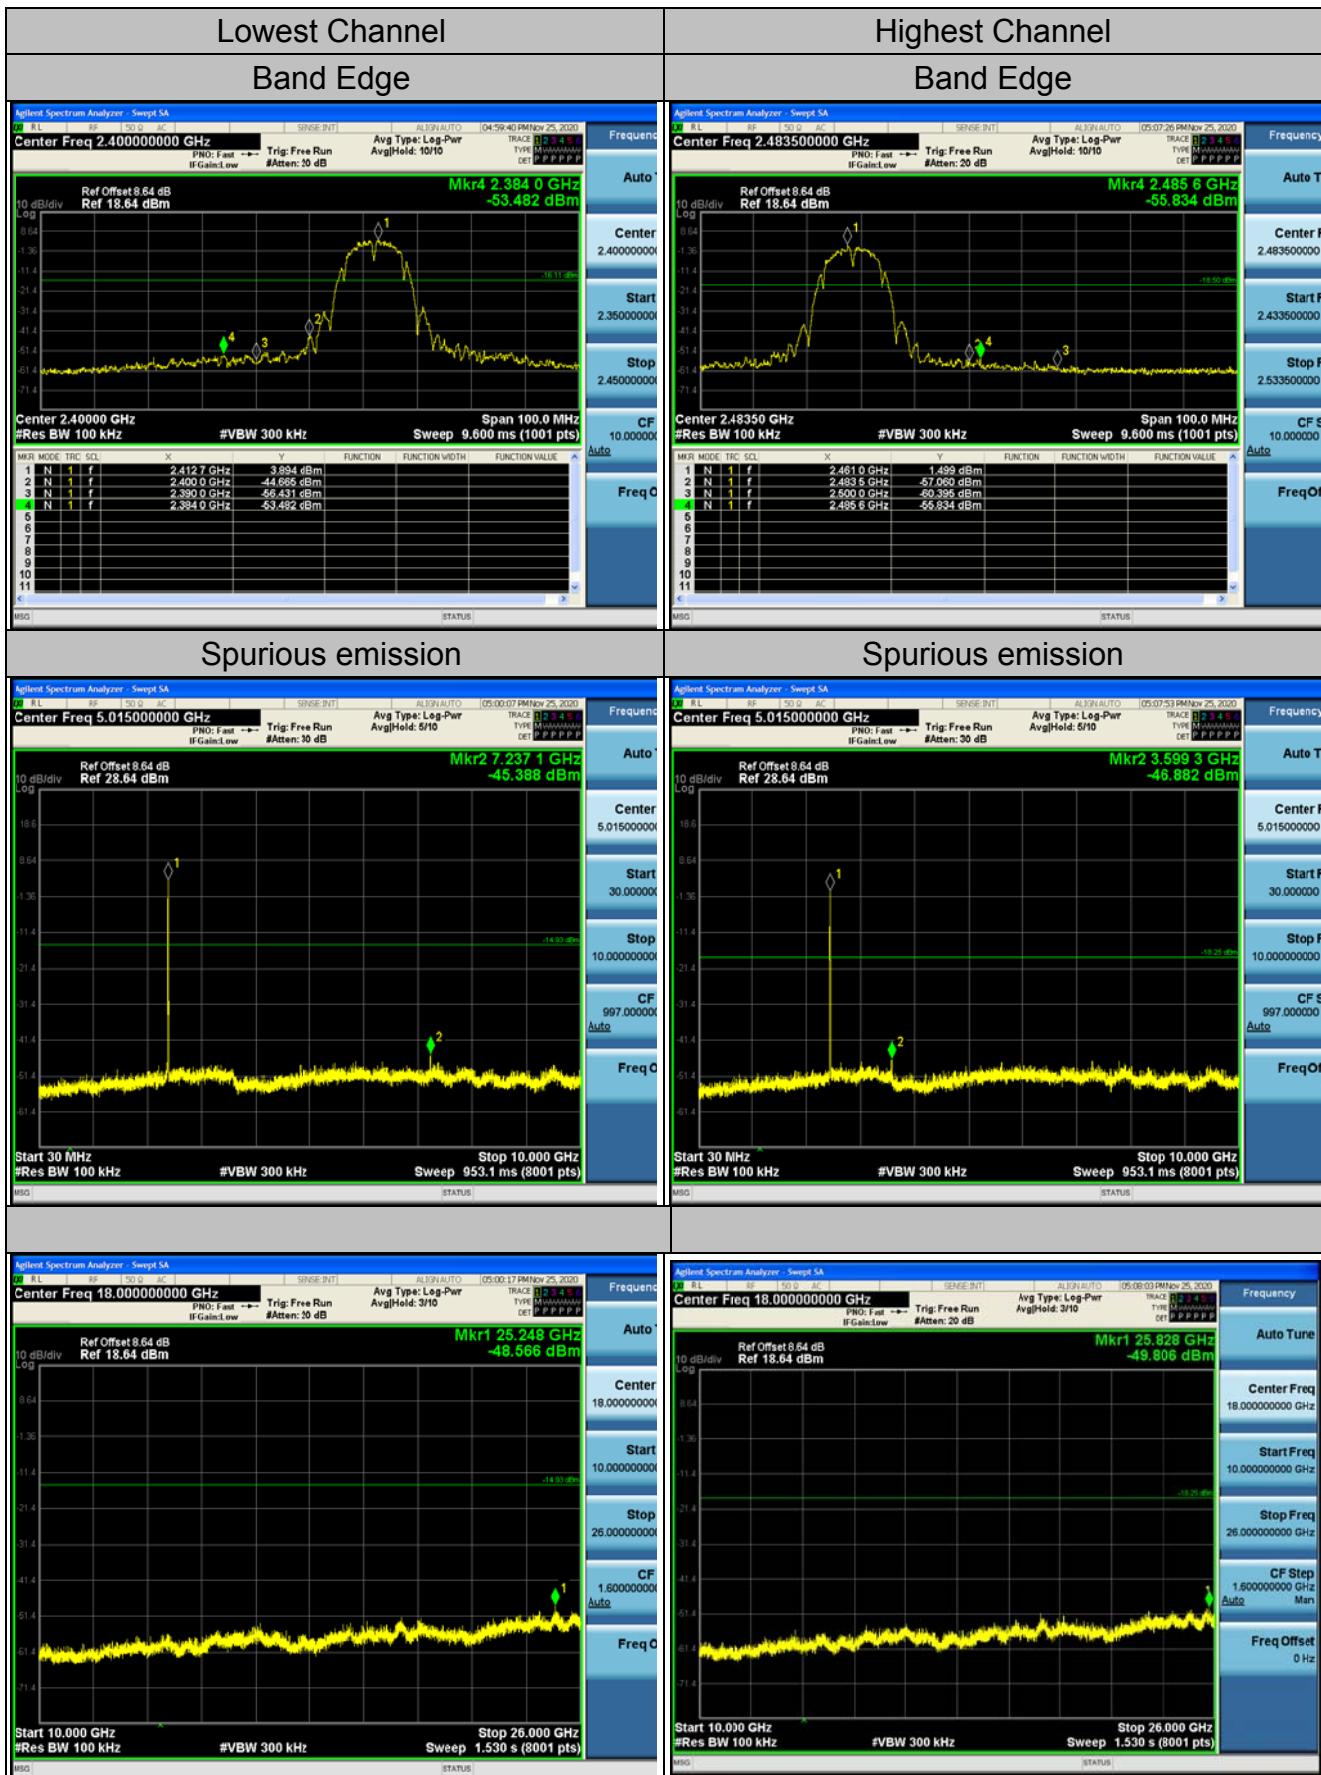




## middle Channel

## Spurious emission

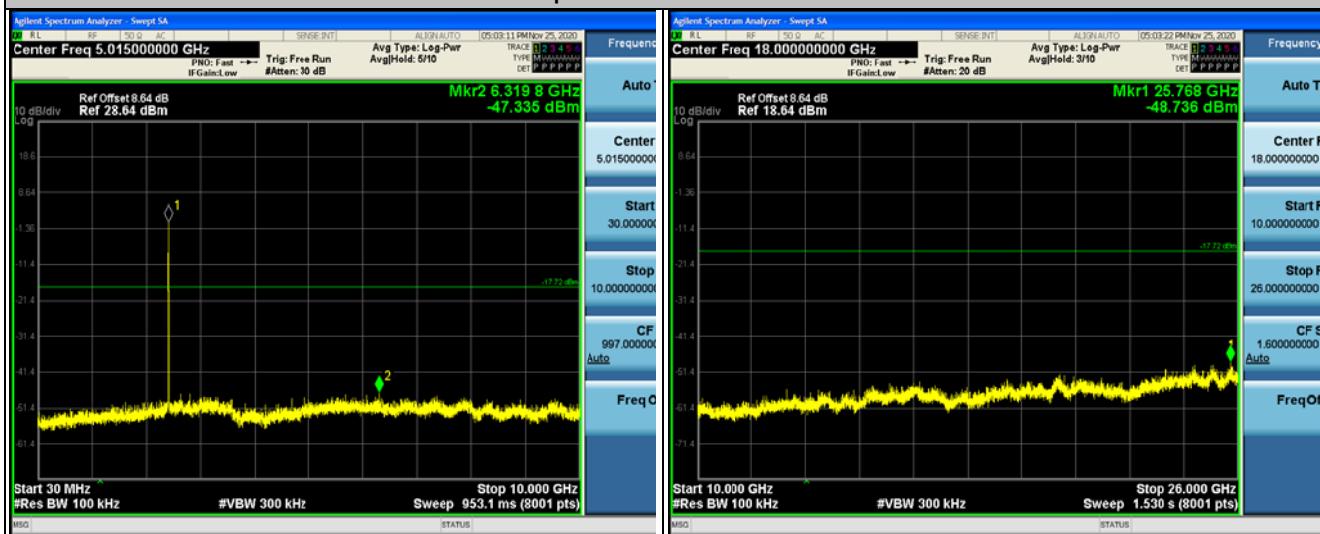




## 802.11g Modulation

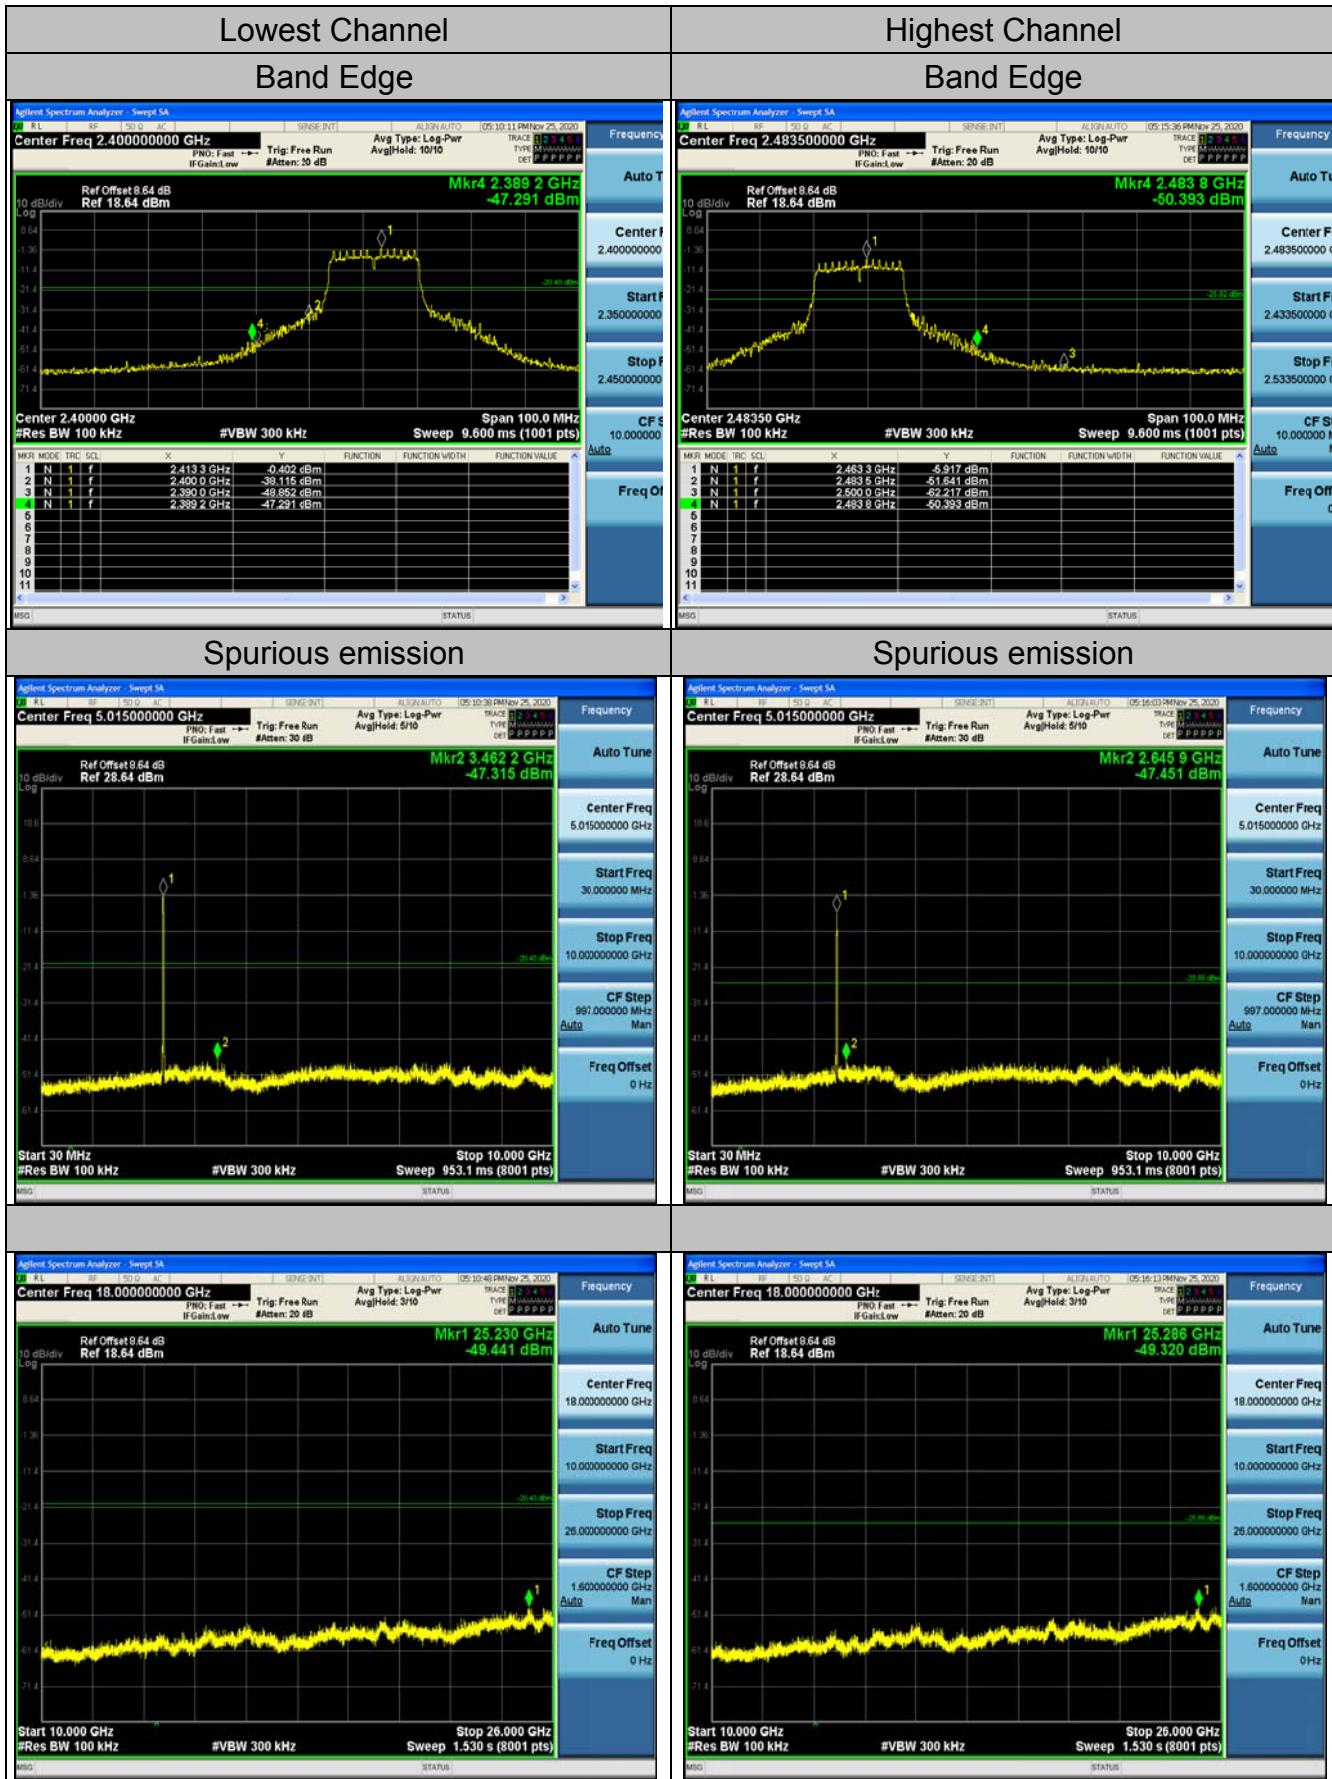




## middle Channel

## Spurious emission

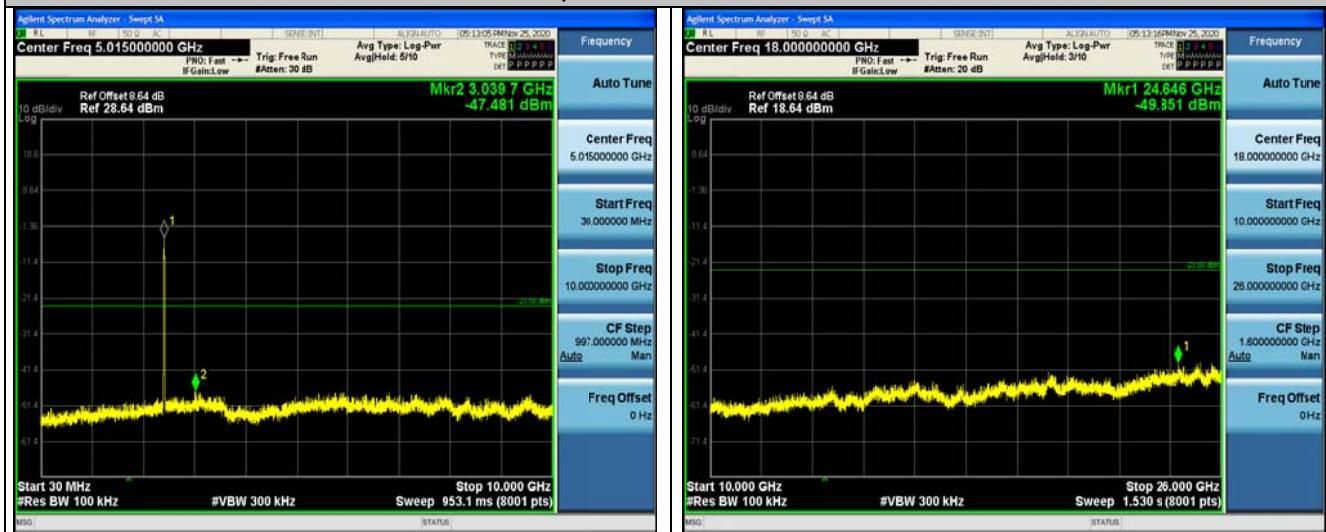




## 802.11n (HT20) Modulation

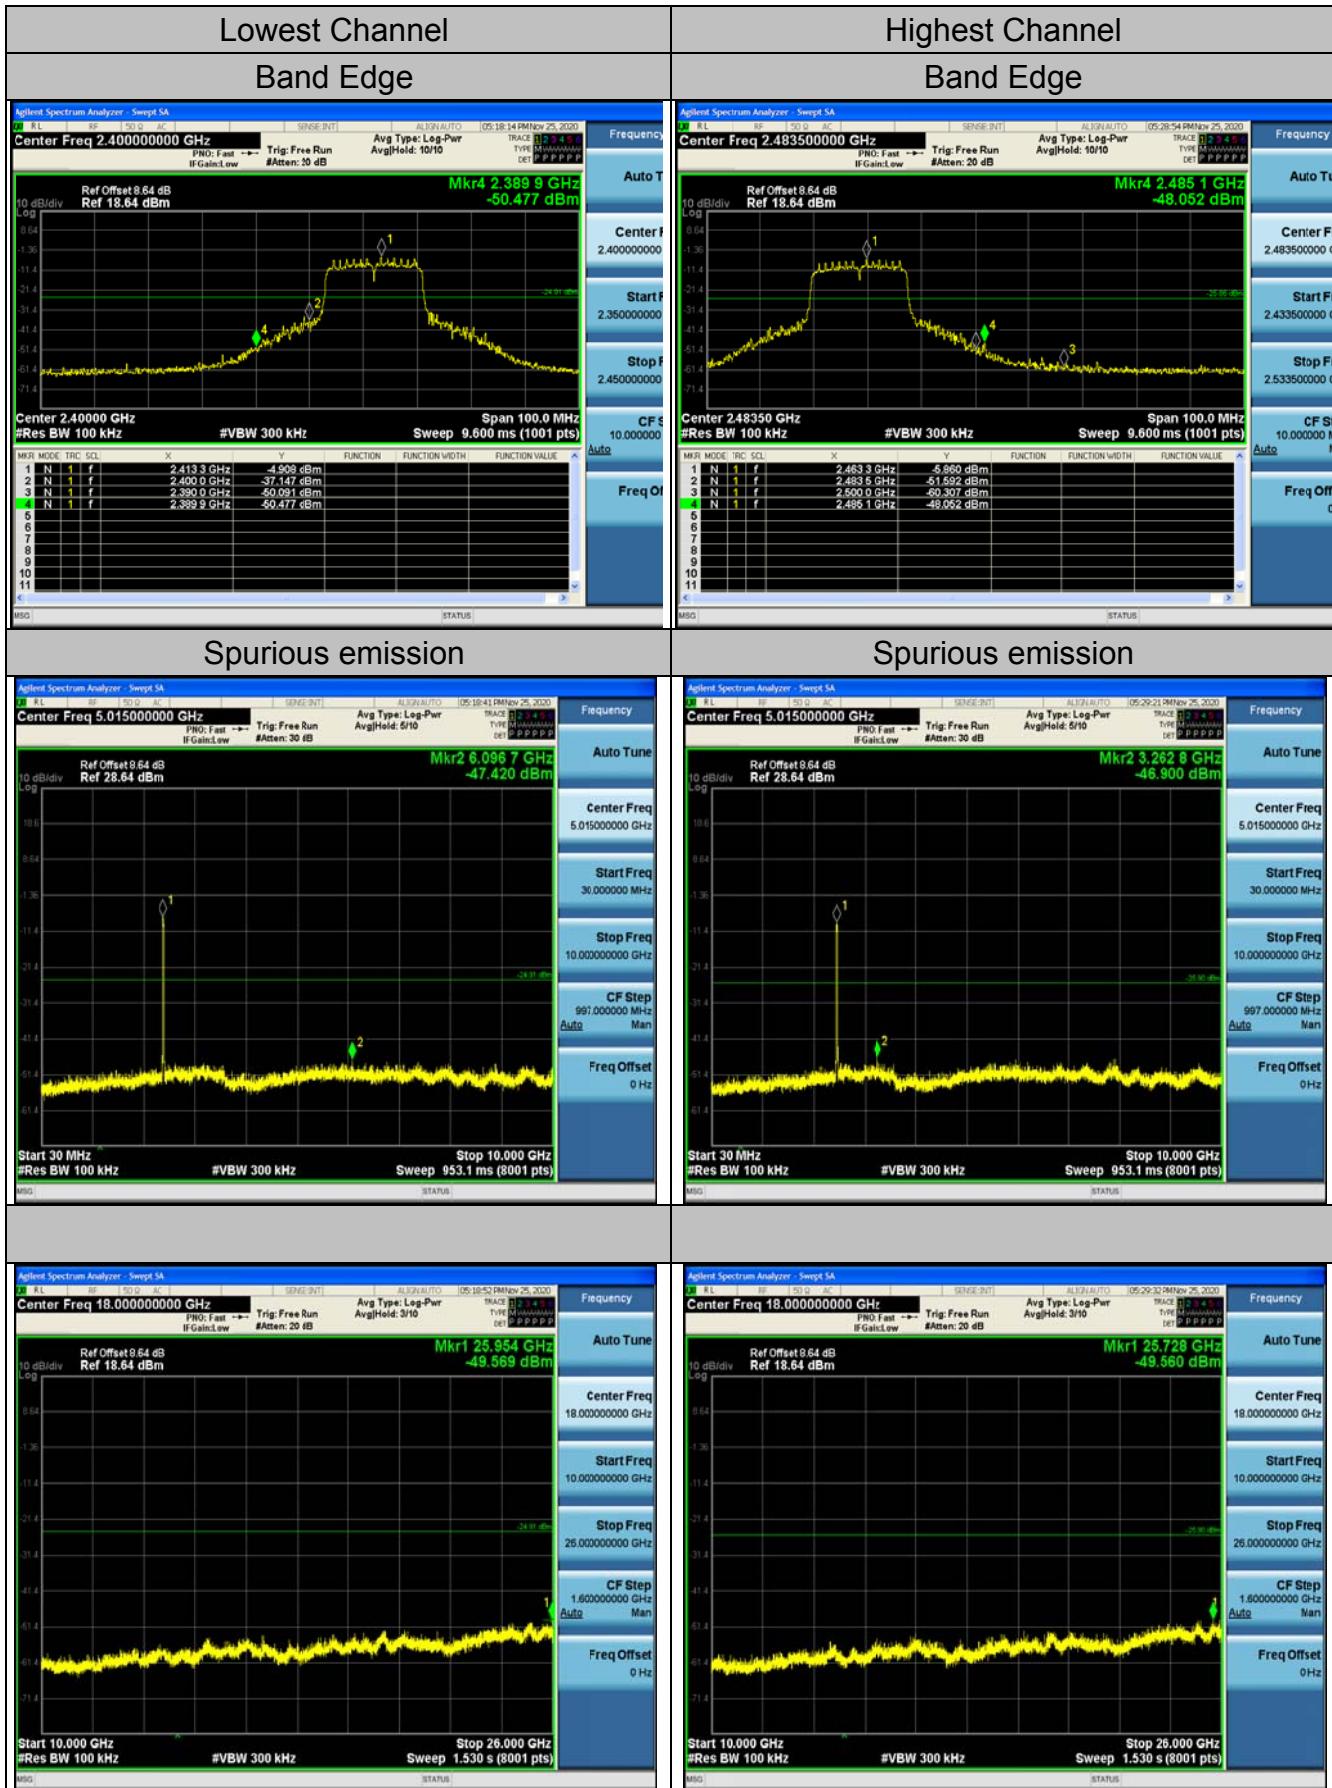




## middle Channel

## Spurious emission

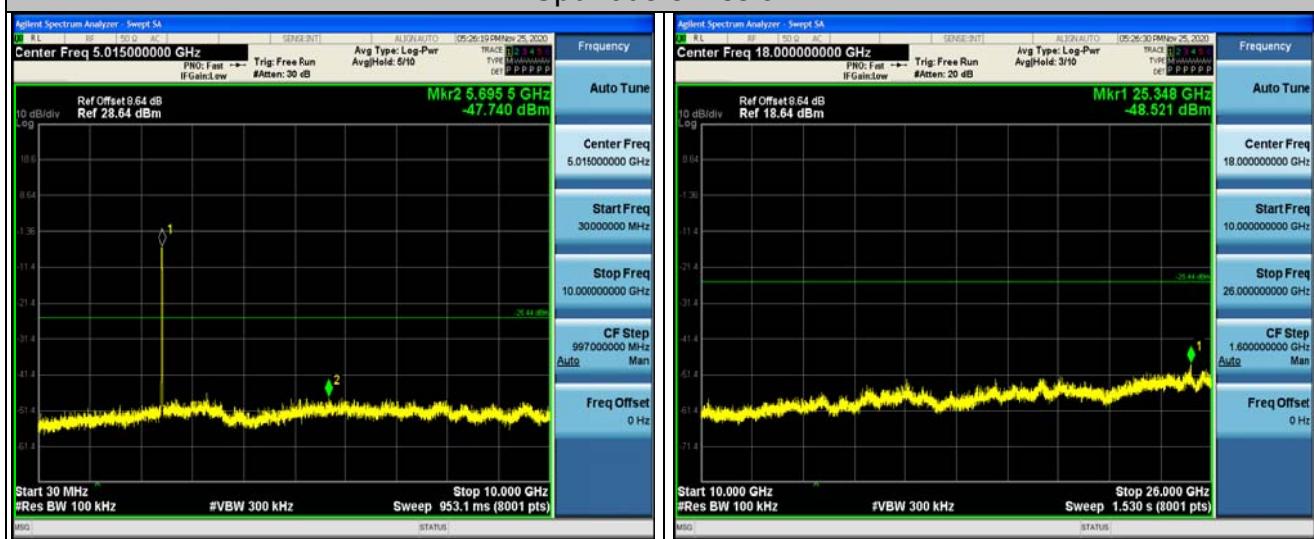




## 802.11n (HT40) Modulation

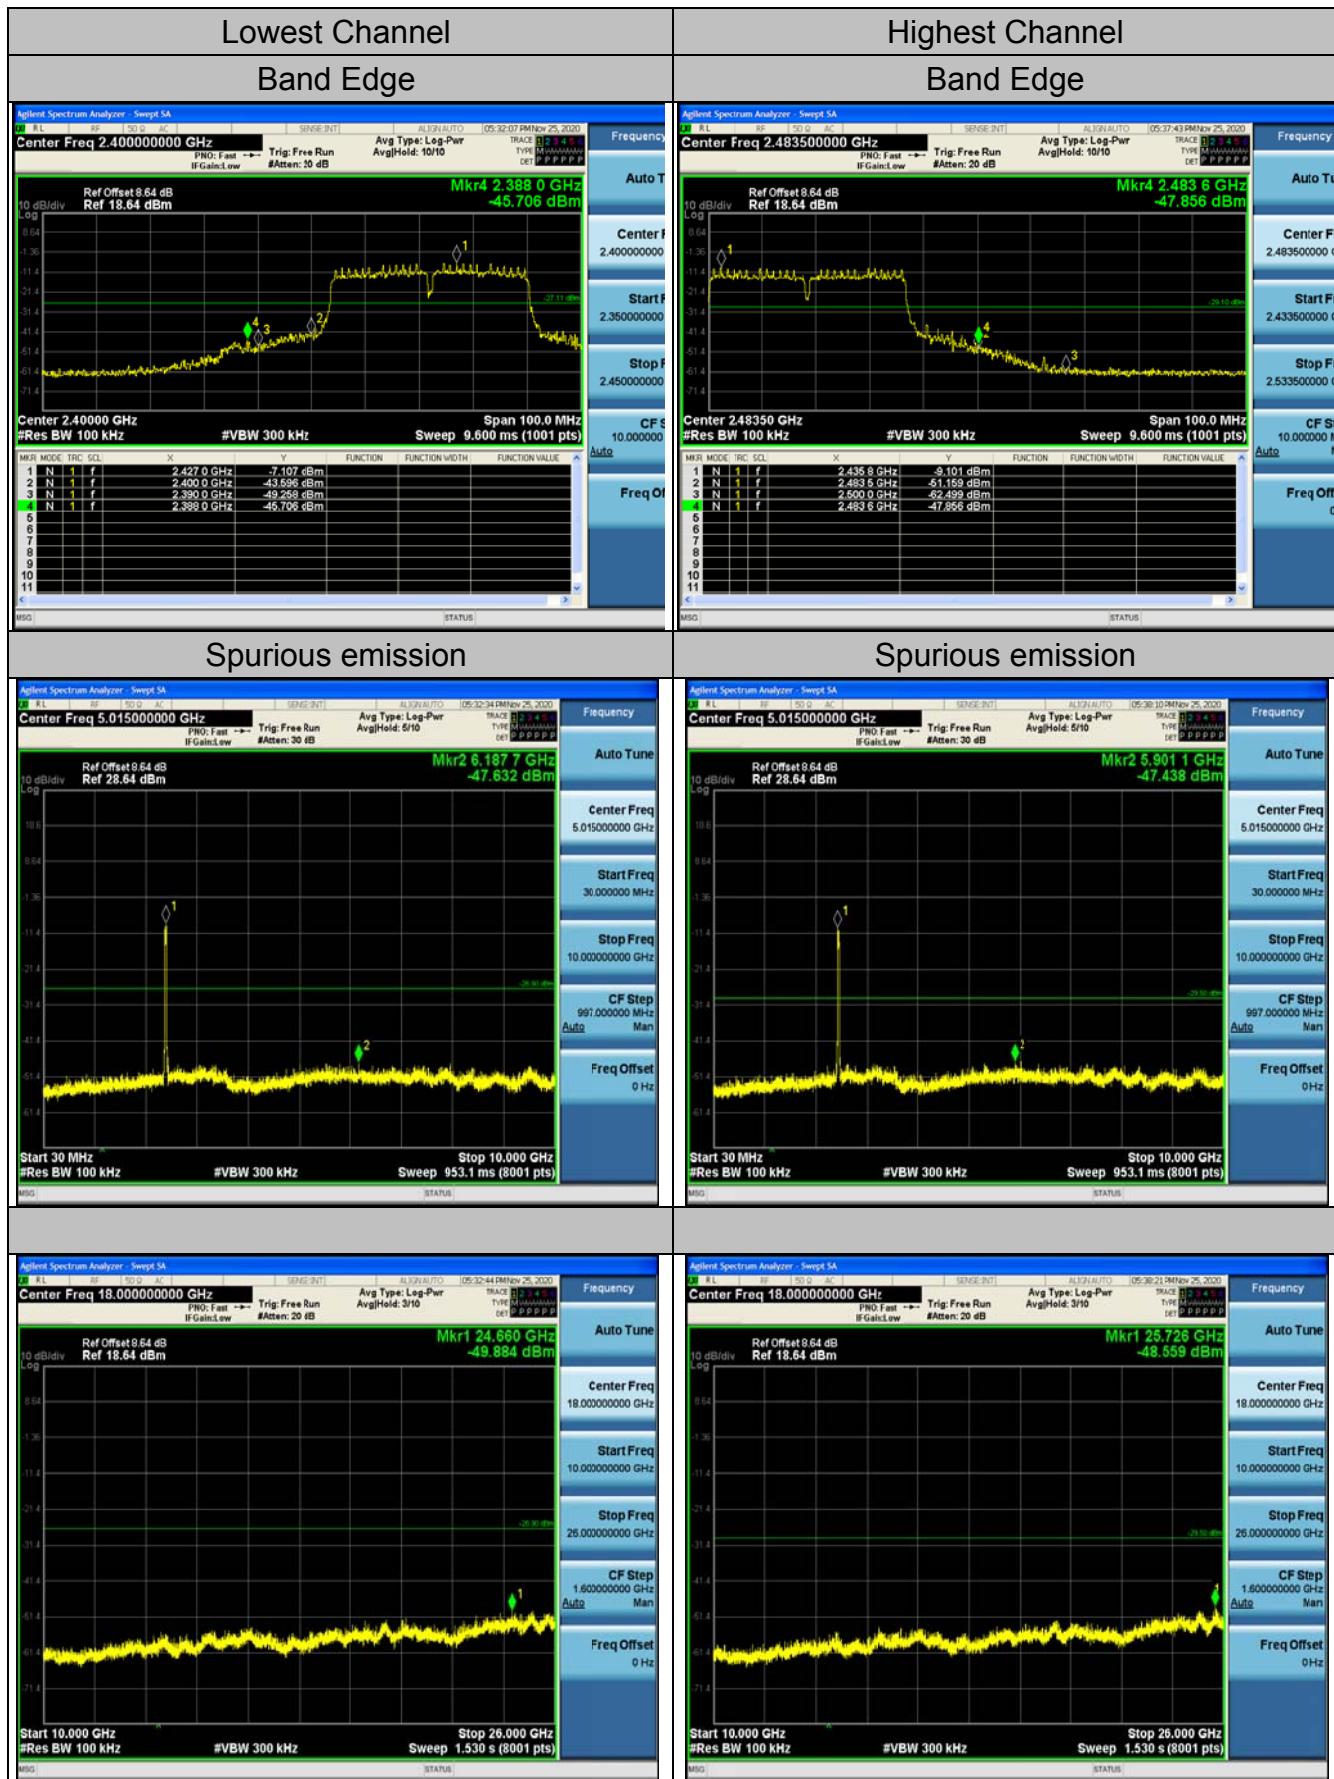



## middle Channel


## Spurious emission

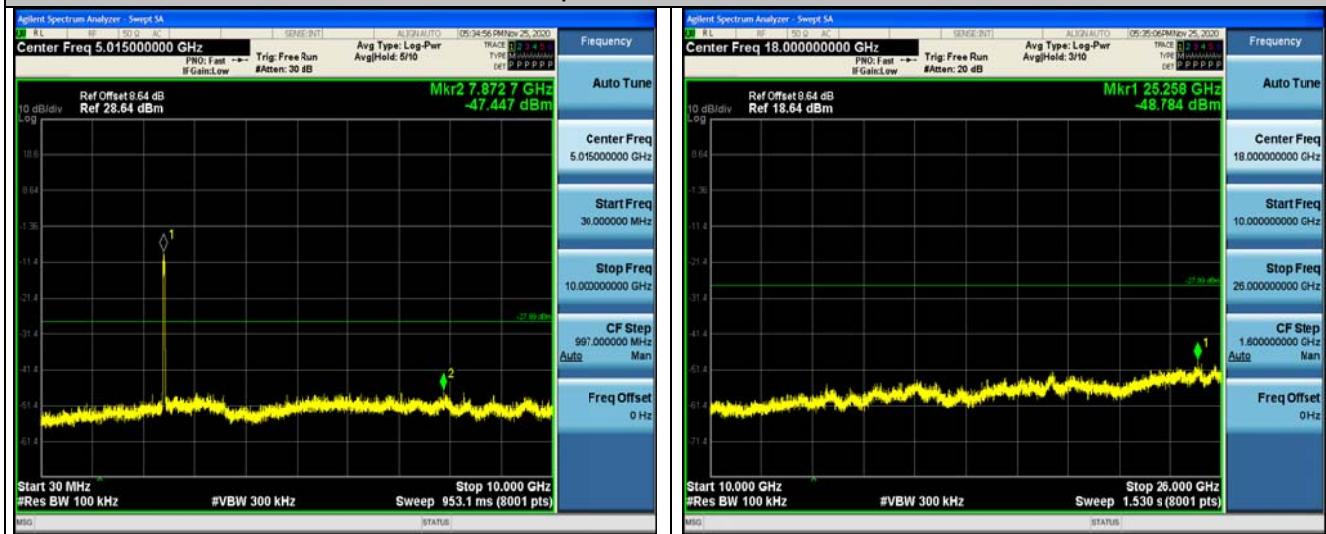


## 4.6. Radiated Spurious Emission Measurement

### Test Specification

<b>Test Requirement:</b>	FCC Part 15 C Section 15.209																																							
<b>Test Method:</b>	ANSI C63.10: 2013																																							
<b>Frequency Range:</b>	9 kHz to 25 GHz																																							
<b>Measurement Distance:</b>	3 m																																							
<b>Antenna Polarization:</b>	Horizontal & Vertical																																							
<b>Operation mode:</b>	Transmitting mode with modulation																																							
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value						
Frequency	Detector	RBW	VBW	Remark																																				
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																				
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																				
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																				
	Peak	1MHz	10Hz	Average Value																																				
<b>Limit:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>3</td> <td>Average</td> </tr> <tr> <td>5000</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	Above 1GHz	500	3	Average	5000	3	Peak
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																						
0.009-0.490	2400/F(KHz)	300																																						
0.490-1.705	24000/F(KHz)	30																																						
1.705-30	30	30																																						
30-88	100	3																																						
88-216	150	3																																						
216-960	200	3																																						
Above 960	500	3																																						
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector																																					
Above 1GHz	500	3	Average																																					
	5000	3	Peak																																					
<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p> <p>30MHz to 1GHz</p>																																							

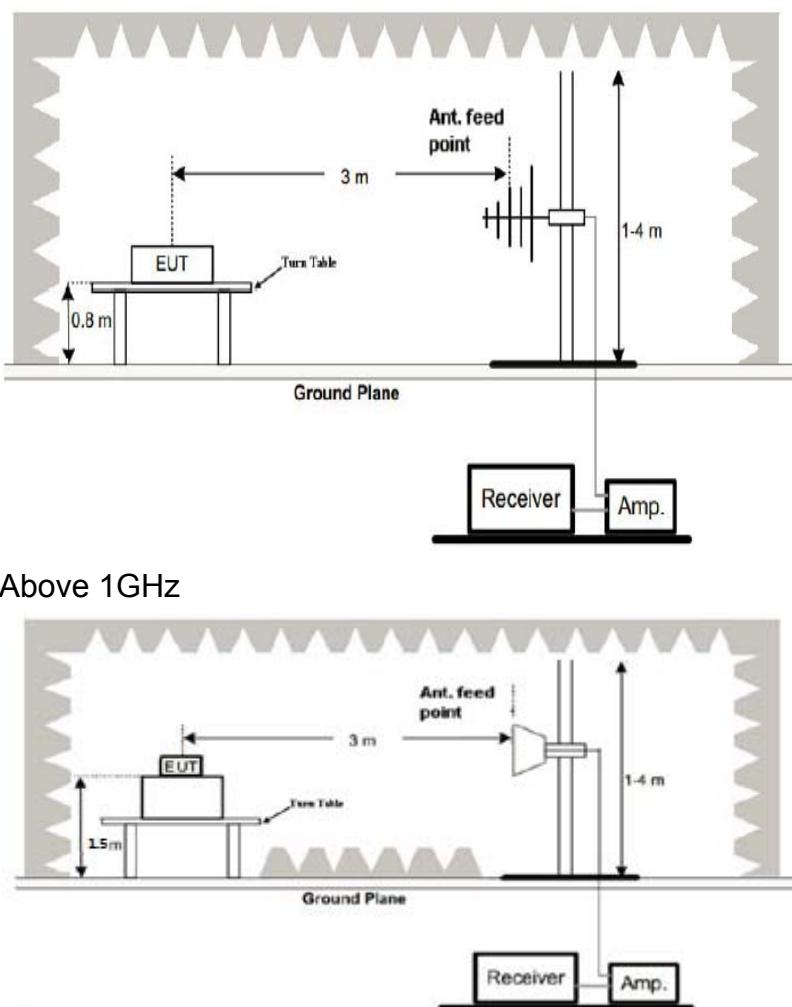

Above 1GHz

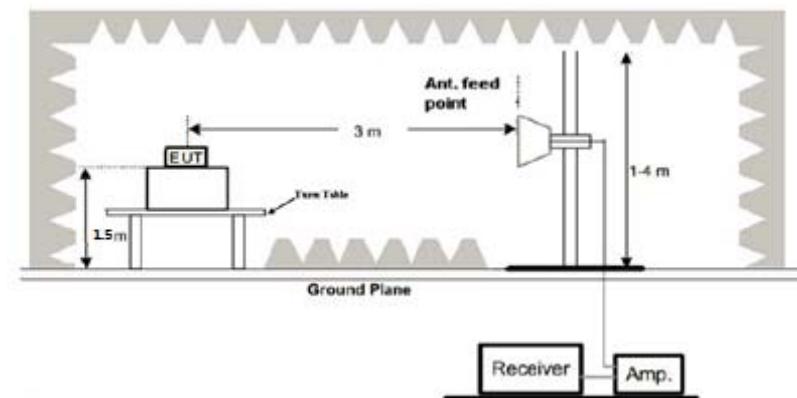**Test Procedure:**

1. For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.  
For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final



	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"><li>(1) Span shall wide enough to fully capture the emission being measured;</li><li>(2) Set RBW=120 kHz for <math>f &lt; 1</math> GHz; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold;</li><li>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement.</li></ul> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
<b>Test results:</b>	PASS



## Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI-7	HKE-010	Jun. 17, 2021
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 17, 2021
Preamplifier	EMCI	EMC051845 SE	HKE-015	Jun. 17, 2021
Preamplifier	Agilent	83051A	HKE-016	Jun. 17, 2021
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 17, 2021
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Jun. 17, 2021
Horn antenna	Schwarzbeck	9120D	HKE-013	Jun. 17, 2021
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Jun. 17, 2021
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Jun. 17, 2021
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Jun. 17, 2021

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## Test Data

All the test modes completed for test. Only the worst result of AC 240V/60Hz (802.11b at 2412MHz) was reported as below:


### Below 1GHz

#### Horizontal

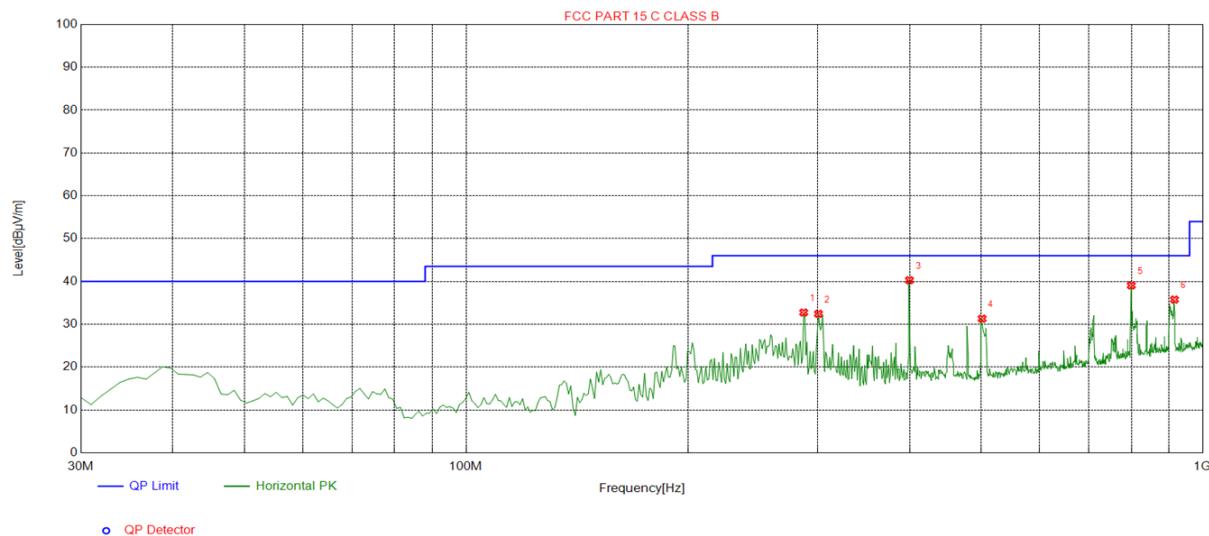

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	287.3073	-12.95	45.69	32.74	46.00	13.26	100	341	Horizontal
2	300.9009	-12.72	45.16	32.44	46.00	13.56	100	0	Horizontal
3	399.9399	-10.41	50.69	40.28	46.00	5.72	100	325	Horizontal
4	501.8919	-8.25	39.56	31.31	46.00	14.69	100	28	Horizontal
5	799.9800	-3.12	42.18	39.06	46.00	6.94	100	283	Horizontal
6	915.5255	-1.77	37.53	35.76	46.00	10.24	100	12	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

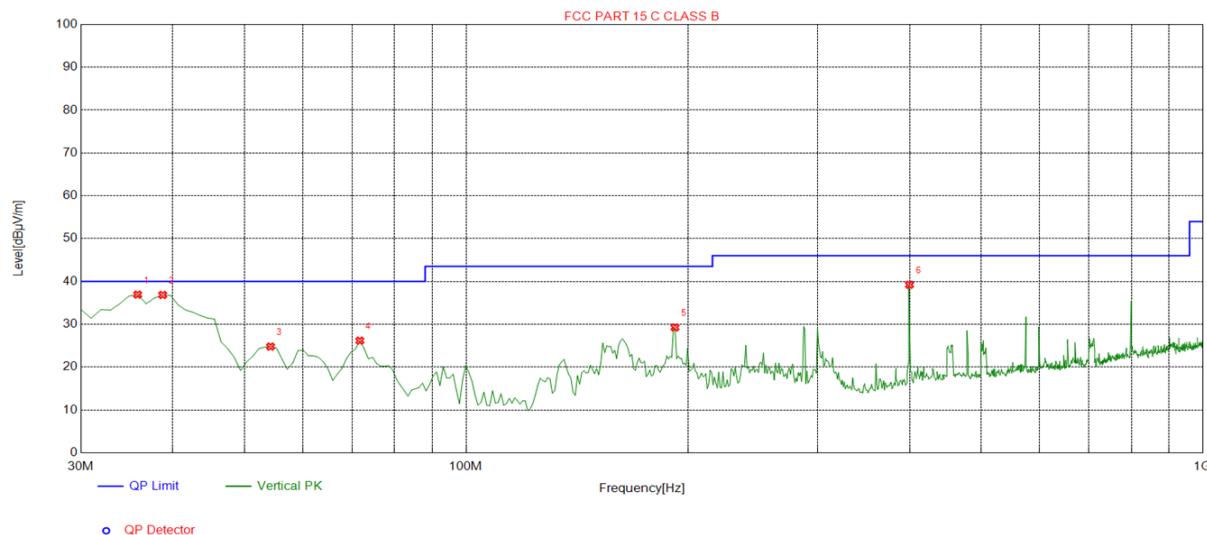**Vertical**

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.8258	-15.88	52.81	36.93	40.00	3.07	100	150	Vertical
2	38.7387	-14.95	51.79	36.84	40.00	3.16	100	153	Vertical
3	54.2743	-14.30	39.09	24.79	40.00	15.21	100	124	Vertical
4	71.7518	-17.99	44.16	26.17	40.00	13.83	100	120	Vertical
5	192.1522	-15.81	45.06	29.25	43.50	14.25	100	192	Vertical
6	399.9399	-10.41	49.63	39.22	46.00	6.78	100	110	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

**Harmonics and Spurious Emissions****Frequency Range (9 kHz-30MHz)**

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

**Above 1GHz****RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	57.69	-3.64	54.05	74	-19.95	peak
4824	44.52	-3.64	40.88	54	-13.12	AVG
7236	51.13	-0.95	50.18	74	-23.82	peak
7236	39.54	-0.95	38.59	54	-15.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	62.18	-3.64	58.54	74	-15.46	peak
4824	46.93	-3.64	43.29	54	-10.71	AVG
7236	50.9	-0.95	49.95	74	-24.05	peak
7236	40.66	-0.95	39.71	54	-14.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	59.53	-3.51	56.02	74	-17.98	peak
4874	45.64	-3.51	42.13	54	-11.87	AVG
7311	55.01	-0.82	54.19	74	-19.81	peak
7311	37.49	-0.82	36.67	54	-17.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	62.34	-3.51	58.83	74	-15.17	peak
4874	45.56	-3.51	42.05	54	-11.95	AVG
7311	56.82	-0.82	56	74	-18	peak
7311	41.11	-0.82	40.29	54	-13.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	59.38	-3.43	55.95	74	-18.05	peak
4924	38.7	-3.43	35.27	54	-18.73	Avg
7386	52	-0.75	51.25	74	-22.75	peak
7386	40.28	-0.75	39.53	54	-14.47	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	58.66	-3.43	55.23	74	-18.77	peak
4924	46.12	-3.43	42.69	54	-11.31	Avg
7386	48.11	-0.75	47.36	74	-26.64	peak
7386	39.94	-0.75	39.19	54	-14.81	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



## LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	58.66	-3.64	55.02	74	-18.98	peak
4824	45.37	-3.64	41.73	54	-12.27	AVG
7236	51.2	-0.95	50.25	74	-23.75	peak
7236	39.81	-0.95	38.86	54	-15.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	53.12	-3.64	49.48	74	-24.52	peak
4824	41.58	-3.64	37.94	54	-16.06	AVG
7236	55.36	-0.95	54.41	74	-19.59	peak
7236	41.71	-0.95	40.76	54	-13.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	56.77	-3.51	53.26	74	-20.74	peak
4874	42.04	-3.51	38.53	54	-15.47	AVG
7311	50.78	-0.82	49.96	74	-24.04	peak
7311	39.13	-0.82	38.31	54	-15.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	56.49	-3.51	52.98	74	-21.02	peak
4874	43.58	-3.51	40.07	54	-13.93	AVG
7311	54.94	-0.82	54.12	74	-19.88	peak
7311	38.65	-0.82	37.83	54	-16.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	60.34	-3.43	56.91	74	-17.09	peak
4924	44.24	-3.43	40.81	54	-13.19	AVG
7386	53.33	-0.75	52.58	74	-21.42	peak
7386	40.03	-0.75	39.28	54	-14.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	52.36	-3.43	48.93	74	-25.07	peak
4924	41.96	-3.43	38.53	54	-15.47	AVG
7386	48.2	-0.75	47.45	74	-26.55	peak
7386	36.5	-0.75	35.75	54	-18.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	59.54	-3.64	55.9	74	-18.1	peak
4824	39.49	-3.64	35.85	54	-18.15	AVG
7236	54.26	-0.95	53.31	74	-20.69	peak
7236	38.01	-0.95	37.06	54	-16.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	58.6	-3.64	54.96	74	-19.04	peak
4824	43.7	-3.64	40.06	54	-13.94	AVG
7236	49.32	-0.95	48.37	74	-25.63	peak
7236	41.01	-0.95	40.06	54	-13.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	55.13	-3.51	51.62	74.00	-22.38	peak
4874	44.28	-3.51	40.77	54.00	-13.23	AVG
7311	50.66	-0.82	49.84	74.00	-24.16	peak
7311	42.88	-0.82	42.06	54.00	-11.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	60.09	-3.51	56.58	74.00	-17.42	peak
4874	43.16	-3.51	39.65	54.00	-14.35	AVG
7311	50.67	-0.82	49.85	74.00	-24.15	peak
7311	33.53	-0.82	32.71	54.00	-21.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	57.58	-3.43	54.15	74	-19.85	peak
4924	43.47	-3.43	40.04	54	-13.96	AVG
7386	51.3	-0.75	50.55	74	-23.45	peak
7386	36.41	-0.75	35.66	54	-18.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	59.4	-3.43	55.97	74	-18.03	peak
4924	42.1	-3.43	38.67	54	-15.33	AVG
7386	54.38	-0.75	53.63	74	-20.37	peak
7386	38.98	-0.75	38.23	54	-15.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4844	61.32	-3.63	57.69	74	-16.31	peak
4844	40.81	-3.63	37.18	54	-16.82	Avg
7266	54.8	-0.94	53.86	74	-20.14	peak
7266	37.36	-0.94	36.42	54	-17.58	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4844	60.91	-3.63	57.28	74	-16.72	peak
4844	40.65	-3.63	37.02	54	-16.98	Avg
7266	54.22	-0.94	53.28	74	-20.72	peak
7266	33.77	-0.94	32.83	54	-21.17	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	58.3	-3.51	54.79	74	-19.21	peak
4874	38.38	-3.51	34.87	54	-19.13	Avg
7311	54.29	-0.82	53.47	74	-20.53	peak
7311	35.17	-0.82	34.35	54	-19.65	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	61.07	-3.51	57.56	74	-16.44	peak
4874	44.52	-3.51	41.01	54	-12.99	Avg
7311	50.07	-0.82	49.25	74	-24.75	peak
7311	42.13	-0.82	41.31	54	-12.69	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4904	58.54	-3.43	55.11	74	-18.89	peak
4904	43.62	-3.43	40.19	54	-13.81	Avg
7356	50.38	-0.75	49.63	74	-24.37	peak
7356	38.79	-0.75	38.04	54	-15.96	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4904	59.17	-3.43	55.74	74	-18.26	peak
4904	37.04	-3.43	33.61	54	-20.39	Avg
7356	52.3	-0.75	51.55	74	-22.45	peak
7356	41.91	-0.75	41.16	54	-12.84	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) )The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	58.15	-5.81	52.34	74	-21.66	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	63.25	-5.84	57.41	74	-16.59	peak
2390.00	46.58	-5.84	40.74	54	-13.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	59.33	-5.81	53.52	74	-20.48	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	67.45	-5.84	61.61	74	-12.39	peak
2390.00	46.21	-5.84	40.37	54	-13.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	59.78	-5.81	53.97	74	-20.03	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	58.46	-6.06	52.4	74	-21.6	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	58.02	-5.81	52.21	74	-21.79	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	59.31	-6.06	53.25	74	-20.75	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.17	-5.81	51.36	74	-22.64	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	65.89	-5.84	60.05	74	-13.95	peak
2390.00	49.86	-5.84	44.02	54	-9.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	59.77	-5.81	53.96	74	-20.04	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	64.22	-5.84	58.38	74	-15.62	peak
2390.00	49.86	-5.84	44.02	54	-9.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	58.43	-5.65	52.78	74	-21.22	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	58.22	-5.65	52.57	74	-21.43	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	58.14	-5.65	52.49	74	-21.51	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	59.66	-5.65	54.01	74	-19.99	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.06	-5.81	51.25	74	-22.75	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	66.39	-5.84	60.55	74	-13.45	peak
2390.00	46.85	-5.84	41.01	54	-12.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	59.55	-5.81	53.74	74	-20.26	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	65.32	-5.84	59.48	74	-14.52	peak
2390.00	47.85	-5.84	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	59.55	-5.65	53.9	74	-20.1	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	57.69	-5.65	52.04	74	-21.96	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.54	-5.65	51.89	74	-22.11	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	58.66	-5.65	53.01	74	-20.99	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.23	-5.81	51.42	74	-22.58	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	63.24	-5.84	57.4	74	-16.6	peak
2390.00	49.77	-5.84	43.93	54	-10.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	56.43	-5.81	50.62	74	-23.38	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	64.55	-5.84	58.71	74	-15.29	peak
2390.00	49.65	-5.84	43.81	54	-10.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.74	-5.65	52.09	74	-21.91	peak
2483.50	/	-5.65	/	54	/	Avg
2500.00	58.86	-5.65	53.21	74	-20.79	peak
2500.00	/	-5.65	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.34	-5.65	51.69	74	-22.31	peak
2483.50	/	-5.65	/	54	/	Avg
2500.00	56.63	-5.65	50.98	74	-23.02	peak
2500.00	/	-5.65	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



## 4.7. ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction



The antenna used in this product is a Internal Antenna, need professional installation, not easy to remove. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 1dBi.


### WIFI ANTENNA

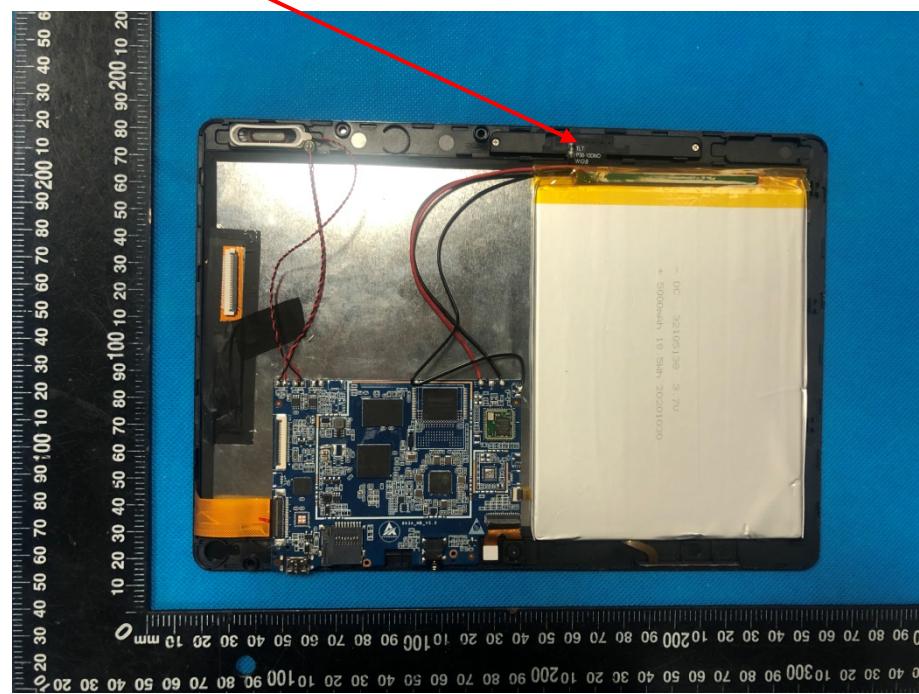

## 4.8. PHOTOGRAPH OF TEST

Radiated Emission

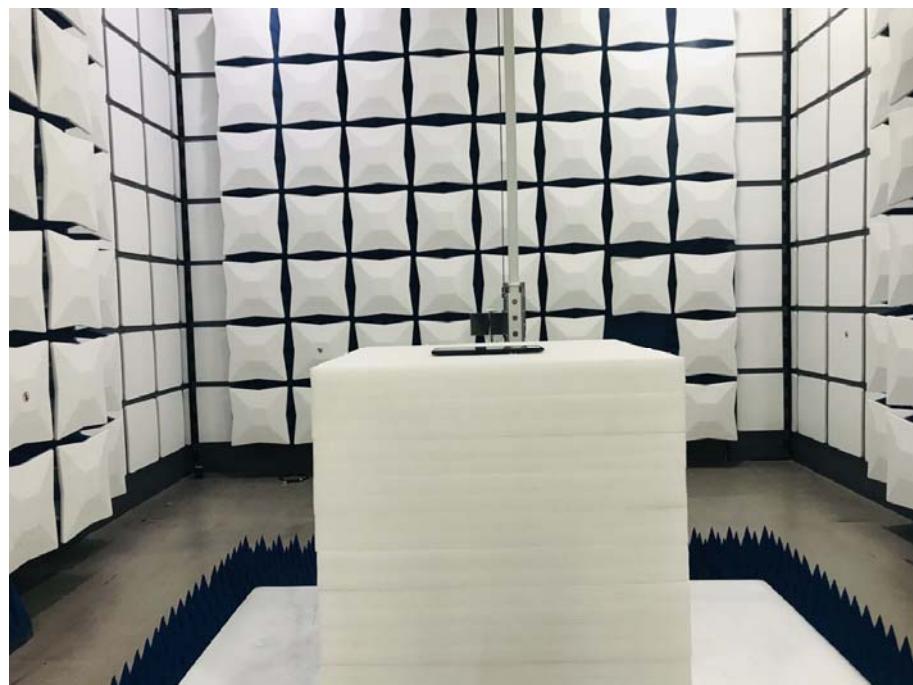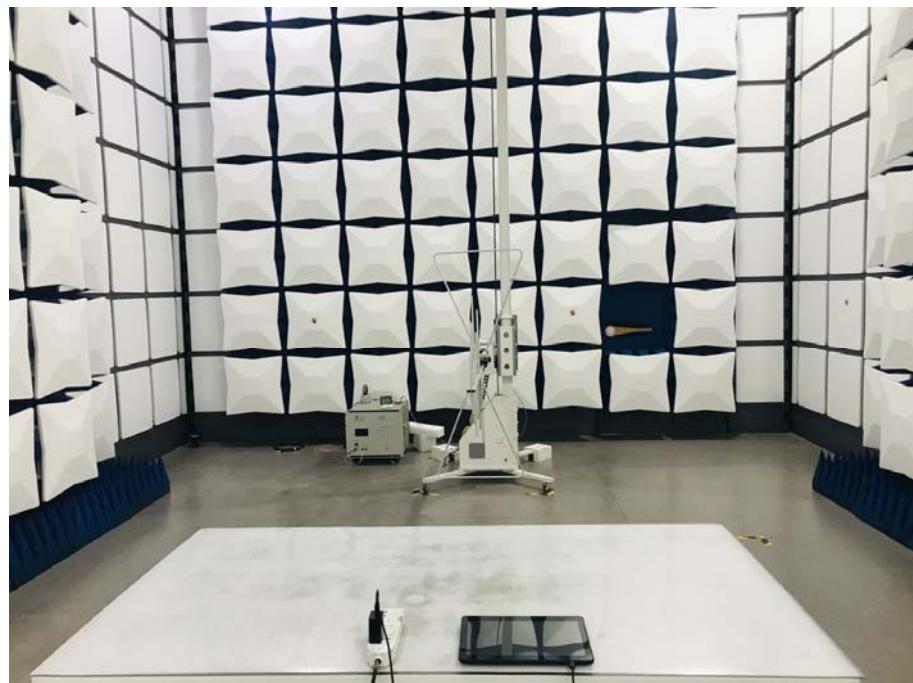

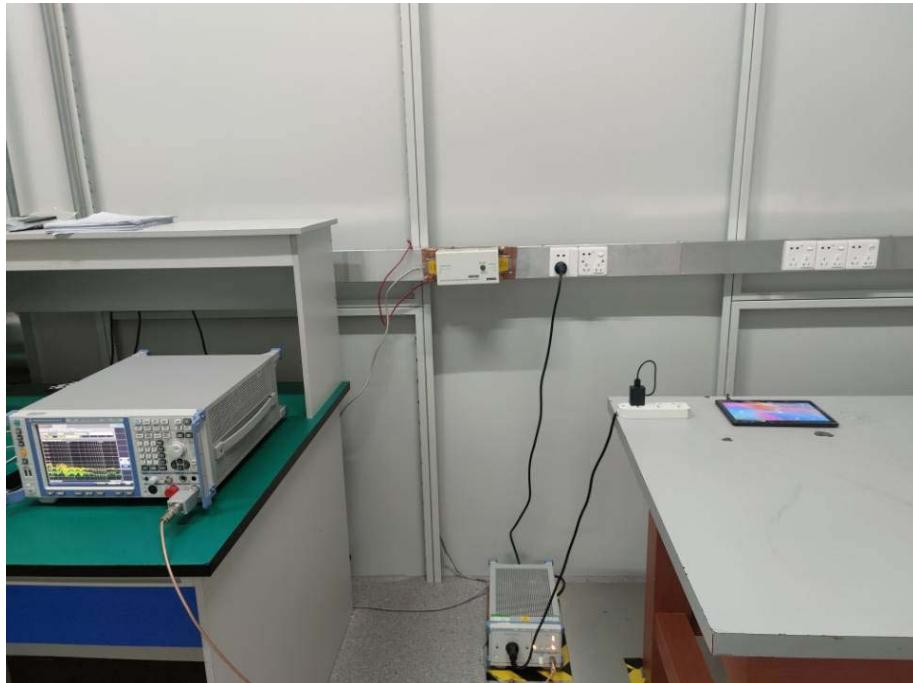



#### 4.9. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----