

Band41	5MHz	QPSK	41215	12RB#6	24.96	PASS
Band41	5MHz	QPSK	41215	12RB#0	24.77	PASS
Band41	5MHz	16QAM	40265	1RB#0	23.06	PASS
Band41	5MHz	16QAM	40265	1RB#24	23.31	PASS
Band41	5MHz	16QAM	40265	1RB#12	23.45	PASS
Band41	5MHz	16QAM	40265	12RB#6	22.30	PASS
Band41	5MHz	16QAM	40265	12RB#0	22.32	PASS
Band41	5MHz	16QAM	40265	12RB#13	22.39	PASS
Band41	5MHz	16QAM	40265	25RB#0	22.55	PASS
Band41	5MHz	16QAM	40690	1RB#24	24.91	PASS
Band41	5MHz	16QAM	40690	1RB#0	24.87	PASS
Band41	5MHz	16QAM	40690	1RB#12	25.11	PASS
Band41	5MHz	16QAM	40690	12RB#13	24.27	PASS
Band41	5MHz	16QAM	40690	12RB#6	24.23	PASS
Band41	5MHz	16QAM	40690	12RB#0	24.20	PASS
Band41	5MHz	16QAM	40690	25RB#0	24.37	PASS
Band41	5MHz	16QAM	41215	1RB#0	25.30	PASS
Band41	5MHz	16QAM	41215	1RB#12	25.23	PASS
Band41	5MHz	16QAM	41215	1RB#24	25.11	PASS
Band41	5MHz	16QAM	41215	12RB#0	25.18	PASS
Band41	10MHz	QPSK	40290	1RB#0	24.88	PASS
Band41	10MHz	QPSK	40290	1RB#24	24.84	PASS
Band41	10MHz	QPSK	40290	1RB#49	25.00	PASS
Band41	10MHz	QPSK	40290	25RB#0	23.74	PASS
Band41	10MHz	QPSK	40290	25RB#25	24.08	PASS
Band41	10MHz	QPSK	40290	25RB#12	23.83	PASS
Band41	10MHz	QPSK	40290	50RB#0	23.92	PASS
Band41	10MHz	QPSK	40690	1RB#49	24.17	PASS
Band41	10MHz	QPSK	40690	1RB#24	24.31	PASS
Band41	10MHz	QPSK	40690	1RB#0	24.62	PASS
Band41	10MHz	QPSK	40690	25RB#25	25.11	PASS
Band41	10MHz	QPSK	40690	25RB#12	25.54	PASS
Band41	10MHz	QPSK	40690	25RB#0	25.48	PASS
Band41	10MHz	QPSK	40690	50RB#0	25.08	PASS
Band41	10MHz	QPSK	41190	1RB#49	25.00	PASS
Band41	10MHz	QPSK	41190	1RB#0	25.42	PASS

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

Band41	10MHz	QPSK	41190	1RB#24	25.31	PASS
Band41	10MHz	QPSK	41190	25RB#25	24.58	PASS
Band41	10MHz	QPSK	41190	25RB#12	25.39	PASS
Band41	10MHz	QPSK	41190	25RB#0	25.37	PASS
Band41	10MHz	QPSK	41190	50RB#0	25.28	PASS
Band41	10MHz	16QAM	40290	1RB#49	24.17	PASS
Band41	10MHz	16QAM	40290	1RB#24	24.01	PASS
Band41	10MHz	16QAM	40290	1RB#0	23.89	PASS
Band41	10MHz	16QAM	40290	25RB#25	23.01	PASS
Band41	10MHz	16QAM	40290	25RB#12	22.94	PASS
Band41	10MHz	16QAM	40290	25RB#0	22.77	PASS
Band41	10MHz	16QAM	40290	50RB#0	23.00	PASS
Band41	10MHz	16QAM	40690	1RB#0	25.46	PASS
Band41	10MHz	16QAM	40690	1RB#24	25.09	PASS
Band41	10MHz	16QAM	40690	1RB#49	25.13	PASS
Band41	10MHz	16QAM	40690	25RB#25	24.92	PASS
Band41	10MHz	16QAM	40690	25RB#12	24.66	PASS
Band41	10MHz	16QAM	40690	25RB#0	24.66	PASS
Band41	10MHz	16QAM	40690	50RB#0	24.63	PASS
Band41	10MHz	16QAM	41190	1RB#49	24.54	PASS
Band41	10MHz	16QAM	41190	1RB#0	25.04	PASS
Band41	10MHz	16QAM	41190	1RB#24	24.89	PASS
Band41	10MHz	16QAM	41190	25RB#0	24.97	PASS
Band41	10MHz	16QAM	41190	25RB#12	24.97	PASS
Band41	10MHz	16QAM	41190	25RB#25	24.74	PASS
Band41	10MHz	16QAM	41190	50RB#0	24.84	PASS
Band41	15MHz	QPSK	40315	1RB#38	24.73	PASS
Band41	15MHz	QPSK	40315	1RB#0	24.10	PASS
Band41	15MHz	QPSK	40315	1RB#74	24.60	PASS
Band41	15MHz	QPSK	40315	38RB#0	23.49	PASS
Band41	15MHz	QPSK	40315	38RB#18	23.84	PASS
Band41	15MHz	QPSK	40315	38RB#37	23.98	PASS
Band41	15MHz	QPSK	40315	75RB#0	23.66	PASS
Band41	15MHz	QPSK	40690	1RB#38	23.87	PASS
Band41	15MHz	QPSK	40690	1RB#0	24.14	PASS
Band41	15MHz	QPSK	40690	1RB#74	24.99	PASS

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

Band41	15MHz	QPSK	40690	38RB#18	25.61	PASS
Band41	15MHz	QPSK	40690	38RB#37	25.27	PASS
Band41	15MHz	QPSK	40690	38RB#0	25.38	PASS
Band41	15MHz	QPSK	40690	75RB#0	25.46	PASS
Band41	15MHz	QPSK	41165	1RB#0	25.23	PASS
Band41	15MHz	QPSK	41165	1RB#38	25.54	PASS
Band41	15MHz	QPSK	41165	1RB#74	25.20	PASS
Band41	15MHz	QPSK	41165	38RB#18	25.13	PASS
Band41	15MHz	QPSK	41165	38RB#37	24.74	PASS
Band41	15MHz	QPSK	41165	38RB#0	24.95	PASS
Band41	15MHz	QPSK	41165	75RB#0	25.43	PASS
Band41	15MHz	16QAM	40315	1RB#0	23.58	PASS
Band41	15MHz	16QAM	40315	1RB#74	23.57	PASS
Band41	15MHz	16QAM	40315	1RB#38	24.01	PASS
Band41	15MHz	16QAM	40315	38RB#0	23.76	PASS
Band41	15MHz	16QAM	40315	38RB#18	23.84	PASS
Band41	15MHz	16QAM	40315	38RB#37	23.98	PASS
Band41	15MHz	16QAM	40315	75RB#0	22.83	PASS
Band41	15MHz	16QAM	40690	1RB#0	25.40	PASS
Band41	15MHz	16QAM	40690	1RB#38	25.59	PASS
Band41	15MHz	16QAM	40690	1RB#74	25.03	PASS
Band41	15MHz	16QAM	40690	38RB#0	25.40	PASS
Band41	15MHz	16QAM	40690	38RB#18	25.63	PASS
Band41	15MHz	16QAM	40690	38RB#37	24.86	PASS
Band41	15MHz	16QAM	40690	75RB#0	24.55	PASS
Band41	15MHz	16QAM	41165	1RB#0	24.63	PASS
Band41	15MHz	16QAM	41165	1RB#38	25.14	PASS
Band41	15MHz	16QAM	41165	1RB#74	24.75	PASS
Band41	15MHz	16QAM	41165	38RB#0	24.94	PASS
Band41	15MHz	16QAM	41165	38RB#18	25.09	PASS
Band41	15MHz	16QAM	41165	38RB#37	24.73	PASS
Band41	15MHz	16QAM	41165	75RB#0	25.03	PASS
Band41	20MHz	QPSK	40340	1RB#99	21.88	PASS
Band41	20MHz	QPSK	40340	1RB#0	21.59	PASS
Band41	20MHz	QPSK	40340	1RB#49	22.22	PASS
Band41	20MHz	QPSK	40340	50RB#0	20.77	PASS

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

Band41	20MHz	QPSK	40340	50RB#25	20.71	PASS
Band41	20MHz	QPSK	40340	50RB#50	20.93	PASS
Band41	20MHz	QPSK	40340	100RB#0	20.72	PASS
Band41	20MHz	QPSK	40690	1RB#99	22.43	PASS
Band41	20MHz	QPSK	40690	1RB#49	22.77	PASS
Band41	20MHz	QPSK	40690	1RB#0	22.34	PASS
Band41	20MHz	QPSK	40690	50RB#50	21.60	PASS
Band41	20MHz	QPSK	40690	50RB#0	21.49	PASS
Band41	20MHz	QPSK	40690	50RB#25	21.48	PASS
Band41	20MHz	QPSK	40690	100RB#0	21.54	PASS
Band41	20MHz	QPSK	41140	1RB#99	23.98	PASS
Band41	20MHz	QPSK	41140	1RB#49	23.82	PASS
Band41	20MHz	QPSK	41140	1RB#0	23.56	PASS
Band41	20MHz	QPSK	41140	50RB#25	22.70	PASS
Band41	20MHz	QPSK	41140	50RB#50	22.89	PASS
Band41	20MHz	QPSK	41140	50RB#0	22.69	PASS
Band41	20MHz	QPSK	41140	100RB#0	22.82	PASS
Band41	20MHz	16QAM	40340	1RB#0	21.05	PASS
Band41	20MHz	16QAM	40340	1RB#99	21.39	PASS
Band41	20MHz	16QAM	40340	1RB#49	21.43	PASS
Band41	20MHz	16QAM	40340	50RB#0	21.63	PASS
Band41	20MHz	16QAM	40340	50RB#25	21.66	PASS
Band41	20MHz	16QAM	40340	50RB#50	21.47	PASS
Band41	20MHz	16QAM	40340	100RB#0	21.52	PASS
Band41	20MHz	16QAM	40690	1RB#0	20.98	PASS
Band41	20MHz	16QAM	40690	1RB#49	21.38	PASS
Band41	20MHz	16QAM	40690	1RB#99	21.25	PASS
Band41	20MHz	16QAM	40690	50RB#25	20.73	PASS
Band41	20MHz	16QAM	40690	50RB#0	20.62	PASS
Band41	20MHz	16QAM	40690	50RB#50	20.72	PASS
Band41	20MHz	16QAM	40690	100RB#0	20.64	PASS
Band41	20MHz	16QAM	41140	1RB#0	22.72	PASS
Band41	20MHz	16QAM	41140	1RB#49	23.09	PASS
Band41	20MHz	16QAM	41140	1RB#99	23.30	PASS
Band41	20MHz	16QAM	41140	50RB#0	21.71	PASS
Band41	20MHz	16QAM	41140	50RB#25	21.68	PASS

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

Band41	20MHz	16QAM	41140	50RB#50	21.90	PASS
Band41	20MHz	16QAM	41140	100RB#0	21.80	PASS

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Radiated Output power:

ERP & EIRP

ERP for Cellular Band (Part 22H)

GPRS Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	23.40	V	6.8	0.53	29.67	38.45
824.2	23.42	H	6.8	0.53	29.69	38.45
836.6	23.69	V	6.8	0.53	29.96	38.45
836.6	23.65	H	6.8	0.53	29.92	38.45
848.8	22.84	V	6.9	0.53	29.21	38.45
848.8	21.56	H	6.9	0.53	27.93	38.45

EGPRS Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	23.13	V	6.8	0.53	29.40	38.45
824.2	23.99	H	6.8	0.53	30.26	38.45
836.6	23.18	V	6.8	0.53	29.45	38.45
836.6	22.57	H	6.8	0.53	28.84	38.45
848.8	22.51	V	6.9	0.53	28.88	38.45
848.8	22.52	H	6.9	0.53	28.89	38.45

ERP for UMTS-FDD Band V (Part 22H)


WCDMA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	13.59	V	6.8	0.53	19.86	38.45
826.4	15.56	H	6.8	0.53	21.83	38.45
836.4	14.61	V	6.8	0.53	20.88	38.45
836.4	13.04	H	6.8	0.53	19.31	38.45
846.6	13.41	V	6.9	0.53	19.78	38.45
846.6	14.80	H	6.9	0.53	21.17	38.45

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
 400-003-0500
www.anbotek.com

HSDPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.61	V	6.8	0.53	20.88	38.45
826.4	13.98	H	6.8	0.53	20.25	38.45
836.4	14.22	V	6.8	0.53	20.49	38.45
836.4	14.43	H	6.8	0.53	20.70	38.45
846.6	14.02	V	6.9	0.53	20.39	38.45
846.6	14.31	H	6.9	0.53	20.68	38.45

HSUPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.30	V	6.8	0.53	20.57	38.45
826.4	14.34	H	6.8	0.53	20.61	38.45
836.4	14.94	V	6.8	0.53	21.21	38.45
836.4	13.26	H	6.8	0.53	19.53	38.45
846.6	14.93	V	6.9	0.53	21.30	38.45
846.6	14.26	H	6.9	0.53	20.63	38.45

EIRP for PCS Band (Part 24E)

GRS Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	21.52	V	7.88	0.85	28.55	33
1850.2	22.51	H	7.88	0.85	29.54	33
1880	21.76	V	7.88	0.85	28.79	33
1880	22.55	H	7.88	0.85	29.58	33
1909.8	20.34	V	7.86	0.85	27.35	33
1909.8	22.02	H	7.86	0.85	29.03	33

EGPRS Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	20.04	V	7.88	0.85	27.07	33
1850.2	20.78	H	7.88	0.85	27.81	33
1880	19.77	V	7.88	0.85	26.80	33
1880	20.69	H	7.88	0.85	27.72	33
1909.8	20.54	V	7.86	0.85	27.55	33
1909.8	20.08	H	7.86	0.85	27.09	33

EIRP for UMTS-FDD Band II (Part 24E)**WCDMA Mode**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	13.92	V	7.88	0.85	20.95	33
1852.4	12.85	H	7.88	0.85	19.88	33
1880	14.87	V	7.88	0.85	21.90	33
1880	13.90	H	7.88	0.85	20.93	33
1907.6	14.48	V	7.86	0.85	21.49	33
1907.6	15.35	H	7.86	0.85	22.36	33

HSDPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	13.30	V	7.88	0.85	20.33	33
1852.4	12.86	H	7.88	0.85	19.89	33
1880	12.46	V	7.88	0.85	19.49	33
1880	12.78	H	7.88	0.85	19.81	33

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

1907.6	13.11	V	7.86	0.85	20.12	33
1907.6	12.42	H	7.86	0.85	19.43	33

HSUPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	13.43	V	7.88	0.85	20.46	33
1852.4	11.76	H	7.88	0.85	18.79	33
1880	12.32	V	7.88	0.85	19.35	33
1880	12.39	H	7.88	0.85	19.42	33
1907.6	12.24	V	7.86	0.85	19.25	33
1907.6	12.77	H	7.86	0.85	19.78	33

EIRP for LTE Band 2 (Part 24E)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.7	1.4	QPSK	1/0	10.12	V	7.88	0.85	17.15	33
1880	1.4	QPSK	1/0	10.14	V	7.88	0.85	17.17	33
1909.3	1.4	QPSK	1/0	9.51	V	7.88	0.85	16.54	33
1850.7	1.4	QPSK	1/0	10.47	H	7.88	0.85	17.50	33

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

1880	1.4	QPSK	1/0	9.84	H	7.88	0.85	16.87	33
1909.3	1.4	QPSK	1/0	9.88	H	7.88	0.85	16.91	33
1850.7	1.4	16-QAM	1/0	9.58	V	7.88	0.85	16.61	33
1880	1.4	16-QAM	1/0	9.34	V	7.88	0.85	16.37	33
1909.3	1.4	16-QAM	1/0	9.92	V	7.88	0.85	16.95	33
1850.7	1.4	16-QAM	1/0	10.67	H	7.88	0.85	17.70	33
1880	1.4	16-QAM	1/0	9.32	H	7.88	0.85	16.35	33
1909.3	1.4	16-QAM	1/0	9.21	H	7.88	0.85	16.24	33
1851.5	3	QPSK	1/0	9.99	V	7.88	0.85	17.02	33
1880	3	QPSK	1/0	9.95	V	7.88	0.85	16.98	33
1908.5	3	QPSK	1/0	9.58	V	7.88	0.85	16.61	33
1851.5	3	QPSK	1/0	10.90	H	7.88	0.85	17.93	33
1880	3	QPSK	1/0	11.03	H	7.88	0.85	18.06	33
1908.5	3	QPSK	1/0	8.99	H	7.88	0.85	16.02	33
1851.5	3	16-QAM	1/0	11.27	V	7.88	0.85	18.30	33
1880	3	16-QAM	1/0	10.63	V	7.88	0.85	17.66	33
1908.5	3	16-QAM	1/0	9.74	V	7.88	0.85	16.77	33
1851.5	3	16-QAM	1/0	10.55	H	7.88	0.85	17.58	33
1880	3	16-QAM	1/0	9.54	H	7.88	0.85	16.57	33
1908.5	3	16-QAM	1/0	10.99	H	7.88	0.85	18.02	33
1852.5	5	QPSK	1/24	10.21	V	7.88	0.85	17.24	33
1880	5	QPSK	1/0	10.26	V	7.88	0.85	17.29	33
1907.5	5	QPSK	1/24	9.42	V	7.88	0.85	16.45	33
1852.5	5	QPSK	1/24	9.93	H	7.88	0.85	16.96	33
1880	5	QPSK	1/0	10.83	H	7.88	0.85	17.86	33
1907.5	5	QPSK	1/24	10.81	H	7.88	0.85	17.84	33
1852.5	5	16-QAM	1/24	9.76	V	7.88	0.85	16.79	33
1880	5	16-QAM	1/0	9.45	V	7.88	0.85	16.48	33
1907.5	5	16-QAM	1/24	10.59	V	7.88	0.85	17.62	33
1852.5	5	16-QAM	1/24	9.63	H	7.88	0.85	16.66	33
1880	5	16-QAM	1/0	9.72	H	7.88	0.85	16.75	33
1907.5	5	16-QAM	1/24	10.55	H	7.88	0.85	17.58	33
1855	10	QPSK	1/0	10.14	V	7.88	0.85	17.17	33
1880	10	QPSK	1/0	9.71	V	7.88	0.85	16.74	33
1905	10	QPSK	1/49	10.22	V	7.88	0.85	17.25	33
1855	10	QPSK	1/0	9.81	H	7.88	0.85	16.84	33
1880	10	QPSK	1/0	10.12	H	7.88	0.85	17.15	33
1905	10	QPSK	1/49	9.62	H	7.88	0.85	16.65	33
1855	10	16-QAM	1/0	9.60	V	7.88	0.85	16.63	33
1880	10	16-QAM	1/0	9.78	V	7.88	0.85	16.81	33
1905	10	16-QAM	1/49	9.59	V	7.88	0.85	16.62	33

1855	10	16-QAM	1/0	10.27	H	7.88	0.85	17.30	33
1880	10	16-QAM	1/0	10.27	H	7.88	0.85	17.30	33
1905	10	16-QAM	1/49	10.21	H	7.88	0.85	17.24	33
1857.5	15	QPSK	1/0	10.47	V	7.88	0.85	17.50	33
1880	15	QPSK	1/0	10.00	V	7.88	0.85	17.03	33
1902.5	15	QPSK	1/0	8.90	V	7.88	0.85	15.93	33
1857.5	15	QPSK	1/0	9.86	H	7.88	0.85	16.89	33
1880	15	QPSK	1/0	10.16	H	7.88	0.85	17.19	33
1902.5	15	QPSK	1/0	9.57	H	7.88	0.85	16.60	33
1857.5	15	16-QAM	1/0	9.71	V	7.88	0.85	16.74	33
1880	15	16-QAM	1/0	10.48	V	7.88	0.85	17.51	33
1902.5	15	16-QAM	1/0	10.35	V	7.88	0.85	17.38	33
1857.5	15	16-QAM	1/0	10.80	H	7.88	0.85	17.83	33
1880	15	16-QAM	1/0	10.19	H	7.88	0.85	17.22	33
1902.5	15	16-QAM	1/0	10.46	H	7.88	0.85	17.49	33
1860	20	QPSK	1/0	9.18	V	7.88	0.85	16.21	33
1880	20	QPSK	1/0	10.75	V	7.88	0.85	17.78	33
1900	20	QPSK	1/0	8.66	V	7.88	0.85	15.69	33
1860	20	QPSK	1/0	10.36	H	7.88	0.85	17.39	33
1880	20	QPSK	1/0	9.64	H	7.88	0.85	16.67	33
1900	20	QPSK	1/0	10.27	H	7.88	0.85	17.30	33
1860	20	16-QAM	1/0	9.97	V	7.88	0.85	17.00	33
1880	20	16-QAM	1/0	9.51	V	7.88	0.85	16.54	33
1900	20	16-QAM	1/0	10.06	V	7.88	0.85	17.09	33
1860	20	16-QAM	1/0	9.91	H	7.88	0.85	16.94	33
1880	20	16-QAM	1/0	10.49	H	7.88	0.85	17.52	33
1900	20	16-QAM	1/0	9.79	H	7.88	0.85	16.82	33

EIRP for LTE Band 4 (Part 27)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1710.7	1.4	QPSK	1/0	10.81	V	7.95	0.79	17.97	30
1732.5	1.4	QPSK	1/0	10.69	V	7.95	0.79	17.85	30
1754.3	1.4	QPSK	1/0	10.00	V	7.95	0.79	17.16	30
1710.7	1.4	QPSK	1/0	9.60	H	7.95	0.79	16.76	30
1732.5	1.4	QPSK	1/0	10.40	H	7.95	0.79	17.56	30
1754.3	1.4	QPSK	1/0	9.99	H	7.95	0.79	17.15	30
1710.7	1.4	16-QAM	1/5	10.00	V	7.95	0.79	17.16	30

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

1732.5	1.4	16-QAM	1/0	10.32	V	7.95	0.79	17.48	30
1754.3	1.4	16-QAM	1/0	10.93	V	7.95	0.79	18.09	30
1710.7	1.4	16-QAM	1/5	9.98	H	7.95	0.79	17.14	30
1732.5	1.4	16-QAM	1/0	9.42	H	7.95	0.79	16.58	30
1754.3	1.4	16-QAM	1/0	9.95	H	7.95	0.79	17.11	30
1711.5	3	QPSK	1/0	9.74	V	7.95	0.79	16.90	30
1732.5	3	QPSK	1/0	9.83	V	7.95	0.79	16.99	30
1753.5	3	QPSK	1/0	9.73	V	7.95	0.79	16.89	30
1711.5	3	QPSK	1/0	10.51	H	7.95	0.79	17.67	30
1732.5	3	QPSK	1/0	9.80	H	7.95	0.79	16.96	30
1753.5	3	QPSK	1/0	10.21	H	7.95	0.79	17.37	30
1711.5	3	16-QAM	1/0	9.08	V	7.95	0.79	16.24	30
1732.5	3	16-QAM	1/0	10.35	V	7.95	0.79	17.51	30
1753.5	3	16-QAM	1/0	10.45	V	7.95	0.79	17.61	30
1711.5	3	16-QAM	1/0	9.61	H	7.95	0.79	16.77	30
1732.5	3	16-QAM	1/0	9.40	H	7.95	0.79	16.56	30
1753.5	3	16-QAM	1/0	10.20	H	7.95	0.79	17.36	30
1712.5	5	QPSK	1/0	10.45	V	7.95	0.79	17.61	30
1732.5	5	QPSK	1/0	9.65	V	7.95	0.79	16.81	30
1752.5	5	QPSK	1/24	10.37	V	7.95	0.79	17.53	30
1712.5	5	QPSK	1/0	9.61	H	7.95	0.79	16.77	30
1732.5	5	QPSK	1/0	9.55	H	7.95	0.79	16.71	30
1752.5	5	QPSK	1/24	9.26	H	7.95	0.79	16.42	30
1712.5	5	16-QAM	1/0	10.29	V	7.95	0.79	17.45	30
1732.5	5	16-QAM	1/0	10.34	V	7.95	0.79	17.50	30
1752.5	5	16-QAM	1/24	10.58	V	7.95	0.79	17.74	30
1712.5	5	16-QAM	1/0	10.31	H	7.95	0.79	17.47	30
1732.5	5	16-QAM	1/0	8.86	H	7.95	0.79	16.02	30
1752.5	5	16-QAM	1/24	10.27	H	7.95	0.79	17.43	30
1715	10	QPSK	1/0	10.63	V	7.95	0.79	17.79	30
1732.5	10	QPSK	1/49	10.51	V	7.95	0.79	17.67	30
1750	10	QPSK	1/0	9.91	V	7.95	0.79	17.07	30
1715	10	QPSK	1/0	9.82	H	7.95	0.79	16.98	30
1732.5	10	QPSK	1/49	10.30	H	7.95	0.79	17.46	30
1750	10	QPSK	1/0	10.14	H	7.95	0.79	17.30	30
1715	10	16-QAM	1/0	10.00	V	7.95	0.79	17.16	30
1732.5	10	16-QAM	1/49	10.24	V	7.95	0.79	17.40	30
1750	10	16-QAM	1/0	10.03	V	7.95	0.79	17.19	30
1715	10	16-QAM	1/0	9.57	H	7.95	0.79	16.73	30
1732.5	10	16-QAM	1/49	10.33	H	7.95	0.79	17.49	30
1750	10	16-QAM	1/0	10.46	H	7.95	0.79	17.62	30

1717.5	15	QPSK	1/0	10.70	V	7.95	0.79	17.86	30
1732.5	15	QPSK	1/74	9.08	V	7.95	0.79	16.24	30
1747.5	15	QPSK	1/0	10.09	V	7.95	0.79	17.25	30
1717.5	15	QPSK	1/0	10.20	H	7.95	0.79	17.36	30
1732.5	15	QPSK	1/74	9.69	H	7.95	0.79	16.85	30
1747.5	15	QPSK	1/0	9.60	H	7.95	0.79	16.76	30
1717.5	15	16-QAM	1/0	10.07	V	7.95	0.79	17.23	30
1732.5	15	16-QAM	1/74	9.64	V	7.95	0.79	16.80	30
1747.5	15	16-QAM	1/0	9.98	V	7.95	0.79	17.14	30
1717.5	15	16-QAM	1/0	10.66	H	7.95	0.79	17.82	30
1732.5	15	16-QAM	1/74	9.60	H	7.95	0.79	16.76	30
1747.5	15	16-QAM	1/0	9.84	H	7.95	0.79	17.00	30
1720	20	QPSK	1/99	10.06	V	7.95	0.79	17.22	30
1732.5	20	QPSK	1/99	8.88	V	7.95	0.79	16.04	30
1745	20	QPSK	1/0	9.69	V	7.95	0.79	16.85	30
1720	20	QPSK	1/99	10.22	H	7.95	0.79	17.38	30
1732.5	20	QPSK	1/99	9.94	H	7.95	0.79	17.10	30
1745	20	QPSK	1/0	9.95	H	7.95	0.79	17.11	30
1720	20	16-QAM	1/99	10.59	V	7.95	0.79	17.75	30
1732.5	20	16-QAM	1/99	10.60	V	7.95	0.79	17.76	30
1745	20	16-QAM	1/0	9.53	V	7.95	0.79	16.69	30
1720	20	16-QAM	1/99	10.39	H	7.95	0.79	17.55	30
1732.5	20	16-QAM	1/99	9.44	H	7.95	0.79	16.60	30
1745	20	16-QAM	1/0	9.55	H	7.95	0.79	16.71	30

EIRP for LTE Band 5 (Part 22H)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.7	1.4	QPSK	1/0	10.25	V	6.8	0.53	16.52	38.45
836.5	1.4	QPSK	1/0	10.67	V	6.8	0.53	16.94	38.45
848.3	1.4	QPSK	1/0	9.38	V	6.9	0.53	15.75	38.45
824.7	1.4	QPSK	1/0	10.66	H	6.8	0.53	16.93	38.45
836.5	1.4	QPSK	1/0	10.01	H	6.8	0.53	16.28	38.45
848.3	1.4	QPSK	1/0	10.32	H	6.9	0.53	16.69	38.45
824.7	1.4	16-QAM	1/0	10.17	V	6.8	0.53	16.44	38.45
836.5	1.4	16-QAM	1/0	9.77	V	6.8	0.53	16.04	38.45
848.3	1.4	16-QAM	1/0	10.03	V	6.9	0.53	16.40	38.45
824.7	1.4	16-QAM	1/0	9.97	H	6.8	0.53	16.24	38.45

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

836.5	1.4	16-QAM	1/0	9.44	H	6.8	0.53	15.71	38.45
848.3	1.4	16-QAM	1/0	9.17	H	6.9	0.53	15.54	38.45
825.5	3	QPSK	1/0	9.45	V	6.8	0.53	15.72	38.45
836.5	3	QPSK	1/0	10.30	V	6.8	0.53	16.57	38.45
847.5	3	QPSK	1/0	9.45	V	6.9	0.53	15.82	38.45
825.5	3	QPSK	1/0	10.60	H	6.8	0.53	16.87	38.45
836.5	3	QPSK	1/0	10.26	H	6.8	0.53	16.53	38.45
847.5	3	QPSK	1/0	9.29	H	6.9	0.53	15.66	38.45
825.5	3	16-QAM	1/0	10.58	V	6.8	0.53	16.85	38.45
836.5	3	16-QAM	1/0	10.70	V	6.8	0.53	16.97	38.45
847.5	3	16-QAM	1/0	9.63	V	6.9	0.53	16.00	38.45
825.5	3	16-QAM	1/0	10.06	H	6.8	0.53	16.33	38.45
836.5	3	16-QAM	1/0	9.43	H	6.8	0.53	15.70	38.45
847.5	3	16-QAM	1/0	10.17	H	6.9	0.53	16.54	38.45
826.5	5	QPSK	1/24	10.16	V	6.8	0.53	16.43	38.45
836.5	5	QPSK	1/0	10.36	V	6.8	0.53	16.63	38.45
846.5	5	QPSK	1/24	9.45	V	6.9	0.53	15.82	38.45
826.5	5	QPSK	1/24	10.25	H	6.8	0.53	16.52	38.45
836.5	5	QPSK	1/0	10.08	H	6.8	0.53	16.35	38.45
846.5	5	QPSK	1/24	10.88	H	6.9	0.53	17.25	38.45
826.5	5	16-QAM	1/24	9.51	V	6.8	0.53	15.78	38.45
836.5	5	16-QAM	1/0	10.32	V	6.8	0.53	16.59	38.45
846.5	5	16-QAM	1/24	10.80	V	6.9	0.53	17.17	38.45
826.5	5	16-QAM	1/24	9.63	H	6.8	0.53	15.90	38.45
836.5	5	16-QAM	1/0	9.93	H	6.8	0.53	16.20	38.45
846.5	5	16-QAM	1/24	10.22	H	6.9	0.53	16.59	38.45
829	10	QPSK	1/0	10.04	V	6.8	0.53	16.31	38.45
836.5	10	QPSK	1/0	10.22	V	6.8	0.53	16.49	38.45
844	10	QPSK	1/49	9.69	V	6.9	0.53	16.06	38.45
829	10	QPSK	1/0	9.67	H	6.8	0.53	15.94	38.45
836.5	10	QPSK	1/0	10.50	H	6.8	0.53	16.77	38.45
844	10	QPSK	1/49	10.22	H	6.9	0.53	16.59	38.45
829	10	16-QAM	1/0	10.29	V	6.8	0.53	16.56	38.45
836.5	10	16-QAM	1/0	9.87	V	6.8	0.53	16.14	38.45
844	10	16-QAM	1/49	10.40	V	6.9	0.53	16.77	38.45
824.7	10	16-QAM	1/0	10.51	H	6.8	0.53	16.78	38.45
836.5	10	16-QAM	1/0	9.80	H	6.8	0.53	16.07	38.45
848.3	10	16-QAM	1/49	9.98	H	6.9	0.53	16.35	38.45

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

EIRP for LTE Band 7 (Part 24E)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
2502.5	5	QPSK	1/24	10.41	V	8.24	0.96	17.69	33
2535	5	QPSK	1/0	9.73	V	8.24	0.96	17.01	33
2567.5	5	QPSK	1/24	9.29	V	8.24	0.96	16.57	33
2502.5	5	QPSK	1/24	10.83	H	8.24	0.96	18.11	33
2535	5	QPSK	1/0	10.04	H	8.24	0.96	17.32	33
2567.5	5	QPSK	1/24	10.92	H	8.24	0.96	18.20	33
2502.5	5	16-QAM	1/24	9.29	V	8.24	0.96	16.57	33
2535	5	16-QAM	1/0	10.07	V	8.24	0.96	17.35	33
2567.5	5	16-QAM	1/24	10.22	V	8.24	0.96	17.50	33
2502.5	5	16-QAM	1/24	9.96	H	8.24	0.96	17.24	33
2535	5	16-QAM	1/0	10.55	H	8.24	0.96	17.83	33
2567.5	5	16-QAM	1/24	9.82	H	8.24	0.96	17.10	33
2505	10	QPSK	1/0	10.37	V	8.24	0.96	17.65	33
2535	10	QPSK	1/0	9.61	V	8.24	0.96	16.89	33
2565	10	QPSK	1/49	9.48	V	8.24	0.96	16.76	33
2505	10	QPSK	1/0	9.91	H	8.24	0.96	17.19	33
2535	10	QPSK	1/0	9.83	H	8.24	0.96	17.11	33
2565	10	QPSK	1/49	10.32	H	8.24	0.96	17.60	33
2505	10	16-QAM	1/0	10.34	V	8.24	0.96	17.62	33
2535	10	16-QAM	1/0	10.31	V	8.24	0.96	17.59	33
2565	10	16-QAM	1/49	9.47	V	8.24	0.96	16.75	33
2505	10	16-QAM	1/0	10.83	H	8.24	0.96	18.11	33
2535	10	16-QAM	1/0	9.54	H	8.24	0.96	16.82	33
2565	10	16-QAM	1/49	9.62	H	8.24	0.96	16.90	33
2507.5	15	QPSK	1/0	9.89	V	8.24	0.96	17.17	33
2535	15	QPSK	1/0	9.43	V	8.24	0.96	16.71	33
2562.5	15	QPSK	1/0	9.64	V	8.24	0.96	16.92	33
2507.5	15	QPSK	1/0	10.01	H	8.24	0.96	17.29	33
2535	15	QPSK	1/0	9.96	H	8.24	0.96	17.24	33
2562.5	15	QPSK	1/0	8.84	H	8.24	0.96	16.12	33
2507.5	15	16-QAM	1/0	10.28	V	8.24	0.96	17.56	33
2535	15	16-QAM	1/0	10.72	V	8.24	0.96	18.00	33
2562.5	15	16-QAM	1/0	10.15	V	8.24	0.96	17.43	33
2507.5	15	16-QAM	1/0	10.81	H	8.24	0.96	18.09	33
2535	15	16-QAM	1/0	9.92	H	8.24	0.96	17.20	33
2562.5	15	16-QAM	1/0	10.20	H	8.24	0.96	17.48	33

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com


2510	20	QPSK	1/0	9.43	V	8.24	0.96	16.71	33
2535	20	QPSK	1/0	10.96	V	8.24	0.96	18.24	33
2560	20	QPSK	1/0	9.38	V	8.24	0.96	16.66	33
2510	20	QPSK	1/0	10.38	H	8.24	0.96	17.66	33
2535	20	QPSK	1/0	9.86	H	8.24	0.96	17.14	33
2560	20	QPSK	1/0	10.24	H	8.24	0.96	17.52	33
2510	20	16-QAM	1/0	10.57	V	8.24	0.96	17.85	33
2535	20	16-QAM	1/0	10.38	V	8.24	0.96	17.66	33
2560	20	16-QAM	1/0	9.75	V	8.24	0.96	17.03	33
2510	20	16-QAM	1/0	9.34	H	8.24	0.96	16.62	33
2535	20	16-QAM	1/0	10.57	H	8.24	0.96	17.85	33
2560	20	16-QAM	1/0	10.08	H	8.24	0.96	17.36	33

EIRP for LTE Band 12 (Part 27)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
699.7	1.4	QPSK	1/0	9.99	V	6.8	0.42	16.37	34.77
707.5	1.4	QPSK	1/0	9.93	V	6.8	0.42	16.31	34.77
715.3	1.4	QPSK	1/0	9.86	V	6.8	0.42	16.24	34.77
699.7	1.4	QPSK	1/0	10.22	H	6.8	0.42	16.60	34.77
707.5	1.4	QPSK	1/0	10.48	H	6.8	0.42	16.86	34.77
715.3	1.4	QPSK	1/0	10.34	H	6.8	0.42	16.72	34.77
699.7	1.4	16-QAM	1/0	9.66	V	6.8	0.42	16.04	34.77
707.5	1.4	16-QAM	1/0	9.49	V	6.8	0.42	15.87	34.77
715.3	1.4	16-QAM	1/0	10.03	V	6.8	0.42	16.41	34.77
699.7	1.4	16-QAM	1/0	10.47	H	6.8	0.42	16.85	34.77
707.5	1.4	16-QAM	1/0	10.13	H	6.8	0.42	16.51	34.77
715.3	1.4	16-QAM	1/0	9.53	H	6.8	0.42	15.91	34.77
700.5	3	QPSK	1/0	9.12	V	6.8	0.42	15.50	34.77
707.5	3	QPSK	1/0	9.57	V	6.8	0.42	15.95	34.77
714.5	3	QPSK	1/0	8.98	V	6.8	0.42	15.36	34.77
700.5	3	QPSK	1/0	10.68	H	6.8	0.42	17.06	34.77
707.5	3	QPSK	1/0	11.15	H	6.8	0.42	17.53	34.77
714.5	3	QPSK	1/0	9.11	H	6.8	0.42	15.49	34.77
700.5	3	16-QAM	1/0	11.14	V	6.8	0.42	17.52	34.77
707.5	3	16-QAM	1/0	10.09	V	6.8	0.42	16.47	34.77

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

714.5	3	16-QAM	1/0	9.35	V	6.8	0.42	15.73	34.77
700.5	3	16-QAM	1/0	10.58	H	6.8	0.42	16.96	34.77
707.5	3	16-QAM	1/0	9.20	H	6.8	0.42	15.58	34.77
714.5	3	16-QAM	1/0	10.78	H	6.8	0.42	17.16	34.77
701.5	5	QPSK	1/24	10.49	V	6.8	0.42	16.87	34.77
707.5	5	QPSK	1/0	9.88	V	6.8	0.42	16.26	34.77
713.5	5	QPSK	1/24	9.27	V	6.8	0.42	15.65	34.77
701.5	5	QPSK	1/24	10.80	H	6.8	0.42	17.18	34.77
707.5	5	QPSK	1/0	10.04	H	6.8	0.42	16.42	34.77
713.5	5	QPSK	1/24	10.77	H	6.8	0.42	17.15	34.77
701.5	5	16-QAM	1/24	9.81	V	6.8	0.42	16.19	34.77
707.5	5	16-QAM	1/0	9.44	V	6.8	0.42	15.82	34.77
713.5	5	16-QAM	1/24	10.77	V	6.8	0.42	17.15	34.77
701.5	5	16-QAM	1/24	10.59	H	6.8	0.42	16.97	34.77
707.5	5	16-QAM	1/0	9.89	H	6.8	0.42	16.27	34.77
713.5	5	16-QAM	1/24	10.13	H	6.8	0.42	16.51	34.77
704	10	QPSK	1/0	10.07	V	6.8	0.42	16.45	34.77
707.5	10	QPSK	1/0	9.40	V	6.8	0.42	15.78	34.77
711	10	QPSK	1/49	9.56	V	6.8	0.42	15.94	34.77
704	10	QPSK	1/0	9.37	H	6.8	0.42	15.75	34.77
707.5	10	QPSK	1/0	10.30	H	6.8	0.42	16.68	34.77
711	10	QPSK	1/49	9.48	H	6.8	0.42	15.86	34.77
704	10	16-QAM	1/0	10.51	V	6.8	0.42	16.89	34.77
707.5	10	16-QAM	1/0	9.83	V	6.8	0.42	16.21	34.77
711	10	16-QAM	1/49	10.20	V	6.8	0.42	16.58	34.77
704	10	16-QAM	1/0	10.74	H	6.8	0.42	17.12	34.77
707.5	10	16-QAM	1/0	9.78	H	6.8	0.42	16.16	34.77
711	10	16-QAM	1/49	9.90	H	6.8	0.42	16.28	34.77

EIRP for LTE Band 17 (Part 27)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
706.5	5	QPSK	1/24	10.48	V	6.8	0.42	16.86	34.77
710	5	QPSK	1/0	9.59	V	6.8	0.42	15.97	34.77
713.5	5	QPSK	1/24	9.48	V	6.8	0.42	15.86	34.77
706.5	5	QPSK	1/24	10.31	H	6.8	0.42	16.69	34.77
710	5	QPSK	1/0	10.29	H	6.8	0.42	16.67	34.77
713.5	5	QPSK	1/24	11.16	H	6.8	0.42	17.54	34.77

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

706.5	5	16-QAM	1/24	9.91	V	6.8	0.42	16.29	34.77
710	5	16-QAM	1/0	10.25	V	6.8	0.42	16.63	34.77
713.5	5	16-QAM	1/24	10.20	V	6.8	0.42	16.58	34.77
706.5	5	16-QAM	1/24	10.54	H	6.8	0.42	16.92	34.77
710	5	16-QAM	1/0	9.83	H	6.8	0.42	16.21	34.77
713.5	5	16-QAM	1/24	10.50	H	6.8	0.42	16.88	34.77
709	10	QPSK	1/0	9.63	V	6.8	0.42	16.01	34.77
710	10	QPSK	1/0	9.71	V	6.8	0.42	16.09	34.77
711	10	QPSK	1/49	9.73	V	6.8	0.42	16.11	34.77
709	10	QPSK	1/0	9.90	H	6.8	0.42	16.28	34.77
710	10	QPSK	1/0	9.69	H	6.8	0.42	16.07	34.77
711	10	QPSK	1/49	10.17	H	6.8	0.42	16.55	34.77
709	10	16-QAM	1/0	10.20	V	6.8	0.42	16.58	34.77
710	10	16-QAM	1/0	9.94	V	6.8	0.42	16.32	34.77
711	10	16-QAM	1/49	10.51	V	6.8	0.42	16.89	34.77
709	10	16-QAM	1/0	11.05	H	6.8	0.42	17.43	34.77
710	10	16-QAM	1/0	9.93	H	6.8	0.42	16.31	34.77
711	10	16-QAM	1/49	10.34	H	6.8	0.42	16.72	34.77

EIRP for LTE Band 41 (Part 27)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
2557.5	5	QPSK	1/24	10.06	V	8.24	0.96	17.34	33
2600	5	QPSK	1/0	10.16	V	8.24	0.96	17.44	33
2652.5	5	QPSK	1/24	9.91	V	8.24	0.96	17.19	33
2557.5	5	QPSK	1/24	10.07	H	8.24	0.96	17.35	33
2600	5	QPSK	1/0	10.72	H	8.24	0.96	18.00	33
2652.5	5	QPSK	1/24	10.71	H	8.24	0.96	17.99	33
2557.5	5	16-QAM	1/24	9.57	V	8.24	0.96	16.85	33
2600	5	16-QAM	1/0	9.61	V	8.24	0.96	16.89	33
2652.5	5	16-QAM	1/24	10.48	V	8.24	0.96	17.76	33
2557.5	5	16-QAM	1/24	10.35	H	8.24	0.96	17.63	33
2600	5	16-QAM	1/0	10.09	H	8.24	0.96	17.37	33
2652.5	5	16-QAM	1/24	10.33	H	8.24	0.96	17.61	33
2560	10	QPSK	1/0	9.88	V	8.24	0.96	17.16	33
2600	10	QPSK	1/0	9.94	V	8.24	0.96	17.22	33
2650	10	QPSK	1/49	9.67	V	8.24	0.96	16.95	33
2560	10	QPSK	1/0	10.07	H	8.24	0.96	17.35	33
2600	10	QPSK	1/0	9.91	H	8.24	0.96	17.19	33

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

2650	10	QPSK	1/49	10.00	H	8.24	0.96	17.28	33
2560	10	16-QAM	1/0	9.83	V	8.24	0.96	17.11	33
2600	10	16-QAM	1/0	9.77	V	8.24	0.96	17.05	33
2650	10	16-QAM	1/49	10.11	V	8.24	0.96	17.39	33
2560	10	16-QAM	1/0	10.95	H	8.24	0.96	18.23	33
2600	10	16-QAM	1/0	10.08	H	8.24	0.96	17.36	33
2650	10	16-QAM	1/49	10.03	H	8.24	0.96	17.31	33
2562.5	15	QPSK	1/0	9.91	V	8.24	0.96	17.19	33
2600	15	QPSK	1/0	10.00	V	8.24	0.96	17.28	33
2647.5	15	QPSK	1/0	9.12	V	8.24	0.96	16.40	33
2562.5	15	QPSK	1/0	10.19	H	8.24	0.96	17.47	33
2600	15	QPSK	1/0	9.78	H	8.24	0.96	17.06	33
2647.5	15	QPSK	1/0	9.42	H	8.24	0.96	16.70	33
2562.5	15	16-QAM	1/0	10.20	V	8.24	0.96	17.48	33
2600	15	16-QAM	1/0	9.80	V	8.24	0.96	17.08	33
2647.5	15	16-QAM	1/0	10.42	V	8.24	0.96	17.70	33
2562.5	15	16-QAM	1/0	10.68	H	8.24	0.96	17.96	33
2600	15	16-QAM	1/0	9.62	H	8.24	0.96	16.90	33
2647.5	15	16-QAM	1/0	10.68	H	8.24	0.96	17.96	33
2565	20	QPSK	1/0	9.17	V	8.24	0.96	16.45	33
2600	20	QPSK	1/0	11.02	V	8.24	0.96	18.30	33
2645	20	QPSK	1/0	8.97	V	8.24	0.96	16.25	33
2565	20	QPSK	1/0	10.08	H	8.24	0.96	17.36	33
2600	20	QPSK	1/0	9.49	H	8.24	0.96	16.77	33
2645	20	QPSK	1/0	10.44	H	8.24	0.96	17.72	33
2565	20	16-QAM	1/0	9.93	V	8.24	0.96	17.21	33
2600	20	16-QAM	1/0	10.03	V	8.24	0.96	17.31	33
2645	20	16-QAM	1/0	10.61	V	8.24	0.96	17.89	33
2565	20	16-QAM	1/0	9.32	H	8.24	0.96	16.60	33
2600	20	16-QAM	1/0	9.97	H	8.24	0.96	17.25	33
2645	20	16-QAM	1/0	9.85	H	8.24	0.96	17.13	33

Note:


Absolute level=Substituted Level-Cable loss+Antenna Gain

Margin=Limit -Absolute Level

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
400-003-0500
www.anbotek.com

4. Peak-Average Ratio

4.1. Test Standard and Limit

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2. Test Setup

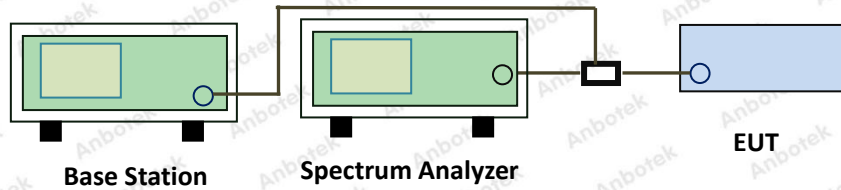

4.3. Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.4. Test Data

GSM Mode:

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
GPRS850	128	0.14	13	PASS
GPRS850	190	0.14	13	PASS
GPRS850	251	0.11	13	PASS
EGPRS850	128	3.18	13	PASS
EGPRS850	190	3.19	13	PASS
EGPRS850	251	3.12	13	PASS
GPRS1900	512	0.17	13	PASS
GPRS1900	661	0.17	13	PASS
GPRS1900	810	0.17	13	PASS
EGPRS1900	512	3.12	13	PASS
EGPRS1900	661	3.07	13	PASS
EGPRS1900	810	3.22	13	PASS

WCDMA Mode:

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band II	9262	3.02	13	PASS
Band II	9400	2.95	13	PASS
Band II	9538	2.70	13	PASS
Band V	4132	2.95	13	PASS
Band V	4182	3.10	13	PASS
Band V	4233	3.06	13	PASS

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Mode:

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	3.78	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	4.64	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	3.71	13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	4.45	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	3.42	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	3.67	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	4.70	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	5.52	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	4.54	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	5.19	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	4.14	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	4.50	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	4.26	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	5.02	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	3.93	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	4.77	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	3.54	13	PASS
Band2	3MHz	QPSK	19185	15RB#0	4.25	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	5.05	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	5.99	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	5.05	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	5.79	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	4.33	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	5.18	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	3.91	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.56	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	3.68	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.43	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	3.06	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	3.82	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	4.91	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	5.45	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	4.56	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	5.37	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	4.03	13	PASS
Band2	5MHz	16QAM	19175	25RB#0	4.72	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	3.89	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	4.77	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	3.68	13	PASS

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

Band2	10MHz	QPSK	18900	50RB#0	4.53	13	PASS
Band2	10MHz	QPSK	19150	1RB#0	2.61	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	3.70	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	4.73	13	PASS
Band2	10MHz	16QAM	18650	50RB#0	5.60	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	4.57	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	5.39	13	PASS
Band2	10MHz	16QAM	19150	1RB#0	3.45	13	PASS
Band2	10MHz	16QAM	19150	50RB#0	4.55	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	3.85	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	8.44	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	3.51	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	4.74	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	2.92	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	3.97	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	4.72	13	PASS
Band2	15MHz	16QAM	18675	75RB#0	4.81	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	4.69	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	5.56	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	3.75	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	4.71	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	4.03	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	4.94	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	3.77	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	8.49	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	3.90	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	4.47	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	4.75	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	5.80	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	4.60	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	5.96	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	4.64	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	5.37	13	PASS
Band4	1.4MHz	QPSK	19957	1RB#0	3.28	13	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	4.10	13	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	8.50	13	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	4.89	13	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	4.18	13	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	4.95	13	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	4.50	13	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	7.64	13	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	5.22	13	PASS

Band4	1.4MHz	16QAM	20175	6RB#0	5.83	13	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	5.20	13	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	5.79	13	PASS
Band4	3MHz	QPSK	19965	1RB#0	3.94	13	PASS
Band4	3MHz	QPSK	19965	15RB#0	4.71	13	PASS
Band4	3MHz	QPSK	20175	1RB#0	4.13	13	PASS
Band4	3MHz	QPSK	20175	15RB#0	4.87	13	PASS
Band4	3MHz	QPSK	20385	1RB#0	4.20	13	PASS
Band4	3MHz	QPSK	20385	15RB#0	4.97	13	PASS
Band4	3MHz	16QAM	19965	1RB#0	4.81	13	PASS
Band4	3MHz	16QAM	19965	15RB#0	5.60	13	PASS
Band4	3MHz	16QAM	20175	1RB#0	5.22	13	PASS
Band4	3MHz	16QAM	20175	15RB#0	5.77	13	PASS
Band4	3MHz	16QAM	20385	1RB#0	5.24	13	PASS
Band4	3MHz	16QAM	20385	15RB#0	5.79	13	PASS
Band4	5MHz	QPSK	19975	1RB#0	4.00	13	PASS
Band4	5MHz	QPSK	19975	25RB#0	4.76	13	PASS
Band4	5MHz	QPSK	20175	1RB#0	4.24	13	PASS
Band4	5MHz	QPSK	20175	25RB#0	4.95	13	PASS
Band4	5MHz	QPSK	20375	1RB#0	4.17	13	PASS
Band4	5MHz	QPSK	20375	25RB#0	4.93	13	PASS
Band4	5MHz	16QAM	19975	1RB#0	4.91	13	PASS
Band4	5MHz	16QAM	19975	25RB#0	5.56	13	PASS
Band4	5MHz	16QAM	20175	1RB#0	5.35	13	PASS
Band4	5MHz	16QAM	20175	25RB#0	5.78	13	PASS
Band4	5MHz	16QAM	20375	1RB#0	4.85	13	PASS
Band4	5MHz	16QAM	20375	25RB#0	5.77	13	PASS
Band4	10MHz	QPSK	20000	1RB#0	4.17	13	PASS
Band4	10MHz	QPSK	20000	50RB#0	5.03	13	PASS
Band4	10MHz	QPSK	20175	1RB#0	3.70	13	PASS
Band4	10MHz	QPSK	20175	50RB#0	4.66	13	PASS
Band4	10MHz	QPSK	20350	1RB#0	4.13	13	PASS
Band4	10MHz	QPSK	20350	50RB#0	5.00	13	PASS
Band4	10MHz	16QAM	20000	1RB#0	5.03	13	PASS
Band4	10MHz	16QAM	20000	50RB#0	5.77	13	PASS
Band4	10MHz	16QAM	20175	1RB#0	4.72	13	PASS
Band4	10MHz	16QAM	20175	50RB#0	5.44	13	PASS
Band4	10MHz	16QAM	20350	1RB#0	4.90	13	PASS
Band4	10MHz	16QAM	20350	50RB#0	5.78	13	PASS
Band4	15MHz	QPSK	20025	1RB#0	4.15	13	PASS
Band4	15MHz	QPSK	20025	75RB#0	5.31	13	PASS
Band4	15MHz	QPSK	20175	1RB#0	3.79	13	PASS

Band4	15MHz	QPSK	20175	75RB#0	5.02	13	PASS
Band4	15MHz	QPSK	20325	1RB#0	3.95	13	PASS
Band4	15MHz	QPSK	20325	75RB#0	5.31	13	PASS
Band4	15MHz	16QAM	20025	1RB#0	4.98	13	PASS
Band4	15MHz	16QAM	20025	75RB#0	5.86	13	PASS
Band4	15MHz	16QAM	20175	1RB#0	4.61	13	PASS
Band4	15MHz	16QAM	20175	75RB#0	5.67	13	PASS
Band4	15MHz	16QAM	20325	1RB#0	4.91	13	PASS
Band4	15MHz	16QAM	20325	75RB#0	5.92	13	PASS
Band4	20MHz	QPSK	20050	1RB#0	4.08	13	PASS
Band4	20MHz	QPSK	20050	100RB#0	5.07	13	PASS
Band4	20MHz	QPSK	20175	1RB#0	4.03	13	PASS
Band4	20MHz	QPSK	20175	100RB#0	5.12	13	PASS
Band4	20MHz	QPSK	20300	1RB#0	3.68	13	PASS
Band4	20MHz	QPSK	20300	100RB#0	5.27	13	PASS
Band4	20MHz	16QAM	20050	1RB#0	4.65	13	PASS
Band4	20MHz	16QAM	20050	100RB#0	5.83	13	PASS
Band4	20MHz	16QAM	20175	1RB#0	5.16	13	PASS
Band4	20MHz	16QAM	20175	100RB#0	5.81	13	PASS
Band4	20MHz	16QAM	20300	1RB#0	4.50	13	PASS
Band4	20MHz	16QAM	20300	100RB#0	5.97	13	PASS
Band5	1.4MHz	QPSK	20407	1RB#0	5.08	13	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	5.38	13	PASS
Band5	1.4MHz	QPSK	20525	1RB#0	5.05	13	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	5.45	13	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	3.95	13	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	4.70	13	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	5.90	13	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	6.09	13	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	5.88	13	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	6.04	13	PASS
Band5	1.4MHz	16QAM	20643	1RB#0	4.77	13	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	5.54	13	PASS
Band5	3MHz	QPSK	20415	1RB#0	4.95	13	PASS
Band5	3MHz	QPSK	20415	15RB#0	5.46	13	PASS
Band5	3MHz	QPSK	20525	1RB#0	4.89	13	PASS
Band5	3MHz	QPSK	20525	15RB#0	5.46	13	PASS
Band5	3MHz	QPSK	20635	1RB#0	4.28	13	PASS
Band5	3MHz	QPSK	20635	15RB#0	4.90	13	PASS
Band5	3MHz	16QAM	20415	1RB#0	5.77	13	PASS
Band5	3MHz	16QAM	20415	15RB#0	6.26	13	PASS
Band5	3MHz	16QAM	20525	1RB#0	5.80	13	PASS

Band5	3MHz	16QAM	20525	15RB#0	6.21	13	PASS
Band5	3MHz	16QAM	20635	1RB#0	4.96	13	PASS
Band5	3MHz	16QAM	20635	15RB#0	5.72	13	PASS
Band5	5MHz	QPSK	20425	1RB#0	5.19	13	PASS
Band5	5MHz	QPSK	20425	25RB#0	5.52	13	PASS
Band5	5MHz	QPSK	20525	1RB#0	5.06	13	PASS
Band5	5MHz	QPSK	20525	25RB#0	5.50	13	PASS
Band5	5MHz	QPSK	20625	1RB#0	4.88	13	PASS
Band5	5MHz	QPSK	20625	25RB#0	5.10	13	PASS
Band5	5MHz	16QAM	20425	1RB#0	5.68	13	PASS
Band5	5MHz	16QAM	20425	25RB#0	6.17	13	PASS
Band5	5MHz	16QAM	20525	1RB#0	5.61	13	PASS
Band5	5MHz	16QAM	20525	25RB#0	6.15	13	PASS
Band5	5MHz	16QAM	20625	1RB#0	5.39	13	PASS
Band5	5MHz	16QAM	20625	25RB#0	5.88	13	PASS
Band5	10MHz	QPSK	20450	1RB#0	4.99	13	PASS
Band5	10MHz	QPSK	20450	50RB#0	5.45	13	PASS
Band5	10MHz	QPSK	20525	1RB#0	4.70	13	PASS
Band5	10MHz	QPSK	20525	50RB#0	5.38	13	PASS
Band5	10MHz	QPSK	20600	1RB#0	4.80	13	PASS
Band5	10MHz	QPSK	20600	50RB#0	5.33	13	PASS
Band5	10MHz	16QAM	20450	1RB#0	5.90	13	PASS
Band5	10MHz	16QAM	20450	50RB#0	6.19	13	PASS
Band5	10MHz	16QAM	20525	1RB#0	5.68	13	PASS
Band5	10MHz	16QAM	20525	50RB#0	6.11	13	PASS
Band5	10MHz	16QAM	20600	1RB#0	5.54	13	PASS
Band5	10MHz	16QAM	20600	50RB#0	6.12	13	PASS
Band7	5MHz	QPSK	20775	1RB#0	4.79	13	PASS
Band7	5MHz	QPSK	20775	25RB#0	5.21	13	PASS
Band7	5MHz	QPSK	21100	1RB#0	5.19	13	PASS
Band7	5MHz	QPSK	21100	25RB#0	5.46	13	PASS
Band7	5MHz	QPSK	21425	1RB#0	4.42	13	PASS
Band7	5MHz	QPSK	21425	25RB#0	5.15	13	PASS
Band7	5MHz	16QAM	20775	1RB#0	5.66	13	PASS
Band7	5MHz	16QAM	20775	25RB#0	5.99	13	PASS
Band7	5MHz	16QAM	21100	1RB#0	6.05	13	PASS
Band7	5MHz	16QAM	21100	25RB#0	6.28	13	PASS
Band7	5MHz	16QAM	21425	1RB#0	5.31	13	PASS
Band7	5MHz	16QAM	21425	25RB#0	5.98	13	PASS
Band7	10MHz	QPSK	20800	1RB#0	4.34	13	PASS
Band7	10MHz	QPSK	20800	50RB#0	4.94	13	PASS
Band7	10MHz	QPSK	21100	1RB#0	5.29	13	PASS

Band7	10MHz	QPSK	21100	50RB#0	5.35	13	PASS
Band7	10MHz	QPSK	21400	1RB#0	4.14	13	PASS
Band7	10MHz	QPSK	21400	50RB#0	5.11	13	PASS
Band7	10MHz	16QAM	20800	1RB#0	5.32	13	PASS
Band7	10MHz	16QAM	20800	50RB#0	5.85	13	PASS
Band7	10MHz	16QAM	21100	1RB#0	5.68	13	PASS
Band7	10MHz	16QAM	21100	50RB#0	6.23	13	PASS
Band7	10MHz	16QAM	21400	1RB#0	5.21	13	PASS
Band7	10MHz	16QAM	21400	50RB#0	5.86	13	PASS
Band7	15MHz	QPSK	20825	1RB#0	4.63	13	PASS
Band7	15MHz	QPSK	20825	75RB#0	5.24	13	PASS
Band7	15MHz	QPSK	21100	1RB#0	5.35	13	PASS
Band7	15MHz	QPSK	21100	75RB#0	5.60	13	PASS
Band7	15MHz	QPSK	21375	1RB#0	4.11	13	PASS
Band7	15MHz	QPSK	21375	75RB#0	5.22	13	PASS
Band7	15MHz	16QAM	20825	1RB#0	5.59	13	PASS
Band7	15MHz	16QAM	20825	75RB#0	5.92	13	PASS
Band7	15MHz	16QAM	21100	1RB#0	6.18	13	PASS
Band7	15MHz	16QAM	21100	75RB#0	6.27	13	PASS
Band7	15MHz	16QAM	21375	1RB#0	4.92	13	PASS
Band7	15MHz	16QAM	21375	75RB#0	5.87	13	PASS
Band7	20MHz	QPSK	20850	1RB#0	4.59	13	PASS
Band7	20MHz	QPSK	20850	100RB#0	5.09	13	PASS
Band7	20MHz	QPSK	21100	1RB#0	5.09	13	PASS
Band7	20MHz	QPSK	21100	100RB#0	5.34	13	PASS
Band7	20MHz	QPSK	21350	1RB#0	4.06	13	PASS
Band7	20MHz	QPSK	21350	100RB#0	5.07	13	PASS
Band7	20MHz	16QAM	20850	1RB#0	5.33	13	PASS
Band7	20MHz	16QAM	20850	100RB#0	5.91	13	PASS
Band7	20MHz	16QAM	21100	1RB#0	5.78	13	PASS
Band7	20MHz	16QAM	21100	100RB#0	6.20	13	PASS
Band7	20MHz	16QAM	21350	1RB#0	5.01	13	PASS
Band7	20MHz	16QAM	21350	100RB#0	5.83	13	PASS
Band12	1.4MHz	QPSK	23017	1RB#0	4.25	13	PASS
Band12	1.4MHz	QPSK	23017	6RB#0	4.82	13	PASS
Band12	1.4MHz	QPSK	23095	1RB#0	4.11	13	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	4.68	13	PASS
Band12	1.4MHz	QPSK	23173	1RB#0	4.01	13	PASS
Band12	1.4MHz	QPSK	23173	6RB#0	4.60	13	PASS
Band12	1.4MHz	16QAM	23017	1RB#0	5.13	13	PASS
Band12	1.4MHz	16QAM	23017	6RB#0	5.60	13	PASS
Band12	1.4MHz	16QAM	23095	1RB#0	4.89	13	PASS

Band12	1.4MHz	16QAM	23095	6RB#0	5.54	13	PASS
Band12	1.4MHz	16QAM	23173	1RB#0	4.88	13	PASS
Band12	1.4MHz	16QAM	23173	6RB#0	5.37	13	PASS
Band12	3MHz	QPSK	23025	1RB#0	4.61	13	PASS
Band12	3MHz	QPSK	23025	15RB#0	4.71	13	PASS
Band12	3MHz	QPSK	23095	1RB#0	4.53	13	PASS
Band12	3MHz	QPSK	23095	15RB#0	4.60	13	PASS
Band12	3MHz	QPSK	23165	1RB#0	3.94	13	PASS
Band12	3MHz	QPSK	23165	15RB#0	4.59	13	PASS
Band12	3MHz	16QAM	23025	1RB#0	5.43	13	PASS
Band12	3MHz	16QAM	23025	15RB#0	5.57	13	PASS
Band12	3MHz	16QAM	23095	1RB#0	5.34	13	PASS
Band12	3MHz	16QAM	23095	15RB#0	5.44	13	PASS
Band12	3MHz	16QAM	23165	1RB#0	4.73	13	PASS
Band12	3MHz	16QAM	23165	15RB#0	5.39	13	PASS
Band12	5MHz	QPSK	23035	1RB#0	4.56	13	PASS
Band12	5MHz	QPSK	23035	25RB#0	4.63	13	PASS
Band12	5MHz	QPSK	23095	1RB#0	4.42	13	PASS
Band12	5MHz	QPSK	23095	25RB#0	5.18	13	PASS
Band12	5MHz	QPSK	23155	1RB#0	4.45	13	PASS
Band12	5MHz	QPSK	23155	25RB#0	4.56	13	PASS
Band12	5MHz	16QAM	23035	1RB#0	5.40	13	PASS
Band12	5MHz	16QAM	23035	25RB#0	5.42	13	PASS
Band12	5MHz	16QAM	23095	1RB#0	5.12	13	PASS
Band12	5MHz	16QAM	23095	25RB#0	5.92	13	PASS
Band12	5MHz	16QAM	23155	1RB#0	5.23	13	PASS
Band12	5MHz	16QAM	23155	25RB#0	5.40	13	PASS
Band12	10MHz	QPSK	23060	1RB#0	4.50	13	PASS
Band12	10MHz	QPSK	23060	50RB#0	4.50	13	PASS
Band12	10MHz	QPSK	23095	1RB#0	4.22	13	PASS
Band12	10MHz	QPSK	23095	50RB#0	5.18	13	PASS
Band12	10MHz	QPSK	23130	1RB#0	4.47	13	PASS
Band12	10MHz	QPSK	23130	50RB#0	4.60	13	PASS
Band12	10MHz	16QAM	23060	1RB#0	5.31	13	PASS
Band12	10MHz	16QAM	23060	50RB#0	5.36	13	PASS
Band12	10MHz	16QAM	23095	1RB#0	5.05	13	PASS
Band12	10MHz	16QAM	23095	50RB#0	5.43	13	PASS
Band12	10MHz	16QAM	23130	1RB#0	5.34	13	PASS
Band12	10MHz	16QAM	23130	50RB#0	5.46	13	PASS
Band17	5MHz	QPSK	23755	1RB#0	4.35	13	PASS
Band17	5MHz	QPSK	23755	25RB#0	5.14	13	PASS
Band17	5MHz	QPSK	23790	1RB#0	4.53	13	PASS

Band17	5MHz	QPSK	23790	25RB#0	5.16	13	PASS
Band17	5MHz	QPSK	23825	1RB#0	4.49	13	PASS
Band17	5MHz	QPSK	23825	25RB#0	4.89	13	PASS
Band17	5MHz	16QAM	23755	1RB#0	5.13	13	PASS
Band17	5MHz	16QAM	23755	25RB#0	5.86	13	PASS
Band17	5MHz	16QAM	23790	1RB#0	5.23	13	PASS
Band17	5MHz	16QAM	23790	25RB#0	5.91	13	PASS
Band17	5MHz	16QAM	23825	1RB#0	5.19	13	PASS
Band17	5MHz	16QAM	23825	25RB#0	5.65	13	PASS
Band17	10MHz	QPSK	23780	1RB#0	4.28	13	PASS
Band17	10MHz	QPSK	23780	50RB#0	5.16	13	PASS
Band17	10MHz	QPSK	23790	1RB#0	4.36	13	PASS
Band17	10MHz	QPSK	23790	50RB#0	5.06	13	PASS
Band17	10MHz	QPSK	23800	1RB#0	4.42	13	PASS
Band17	10MHz	QPSK	23800	50RB#0	4.97	13	PASS
Band17	10MHz	16QAM	23780	1RB#0	5.17	13	PASS
Band17	10MHz	16QAM	23780	50RB#0	5.88	13	PASS
Band17	10MHz	16QAM	23790	1RB#0	5.20	13	PASS
Band17	10MHz	16QAM	23790	50RB#0	5.84	13	PASS
Band17	10MHz	16QAM	23800	1RB#0	5.32	13	PASS
Band17	10MHz	16QAM	23800	50RB#0	5.78	13	PASS
Band41	5MHz	QPSK	40265	1RB#0	1.42	13	PASS
Band41	5MHz	QPSK	40265	25RB#0	2.17	13	PASS
Band41	5MHz	QPSK	40690	1RB#0	1.10	13	PASS
Band41	5MHz	QPSK	40690	25RB#0	1.75	13	PASS
Band41	5MHz	QPSK	41215	1RB#0	1.59	13	PASS
Band41	5MHz	QPSK	41215	25RB#0	1.44	13	PASS
Band41	5MHz	16QAM	40265	1RB#0	2.74	13	PASS
Band41	5MHz	16QAM	40265	25RB#0	3.13	13	PASS
Band41	5MHz	16QAM	40690	1RB#0	2.26	13	PASS
Band41	5MHz	16QAM	40690	25RB#0	2.69	13	PASS
Band41	5MHz	16QAM	41215	1RB#0	2.08	13	PASS
Band41	5MHz	16QAM	41215	25RB#0	1.96	13	PASS
Band41	10MHz	QPSK	40290	1RB#0	2.84	13	PASS
Band41	10MHz	QPSK	40290	50RB#0	2.77	13	PASS
Band41	10MHz	QPSK	40690	1RB#0	2.13	13	PASS
Band41	10MHz	QPSK	40690	50RB#0	2.18	13	PASS
Band41	10MHz	QPSK	41190	1RB#0	1.12	13	PASS
Band41	10MHz	QPSK	41190	50RB#0	1.45	13	PASS
Band41	10MHz	16QAM	40290	1RB#0	2.72	13	PASS
Band41	10MHz	16QAM	40290	50RB#0	3.59	13	PASS
Band41	10MHz	16QAM	40690	1RB#0	3.27	13	PASS

Band41	10MHz	16QAM	40690	50RB#0	3.07	13	PASS
Band41	10MHz	16QAM	41190	1RB#0	1.97	13	PASS
Band41	10MHz	16QAM	41190	50RB#0	2.03	13	PASS
Band41	15MHz	QPSK	40315	1RB#0	3.63	13	PASS
Band41	15MHz	QPSK	40315	75RB#0	5.02	13	PASS
Band41	15MHz	QPSK	40690	1RB#0	4.78	13	PASS
Band41	15MHz	QPSK	40690	75RB#0	5.82	13	PASS
Band41	15MHz	QPSK	41165	1RB#0	4.51	13	PASS
Band41	15MHz	QPSK	41165	75RB#0	4.91	13	PASS
Band41	15MHz	16QAM	40315	1RB#0	5.48	13	PASS
Band41	15MHz	16QAM	40315	75RB#0	5.81	13	PASS
Band41	15MHz	16QAM	40690	1RB#0	5.50	13	PASS
Band41	15MHz	16QAM	40690	75RB#0	6.04	13	PASS
Band41	15MHz	16QAM	41165	1RB#0	5.32	13	PASS
Band41	15MHz	16QAM	41165	75RB#0	5.68	13	PASS
Band41	20MHz	QPSK	40340	1RB#0	3.77	13	PASS
Band41	20MHz	QPSK	40340	100RB#0	4.76	13	PASS
Band41	20MHz	QPSK	40690	1RB#0	4.40	13	PASS
Band41	20MHz	QPSK	40690	100RB#0	4.94	13	PASS
Band41	20MHz	QPSK	41140	1RB#0	4.38	13	PASS
Band41	20MHz	QPSK	41140	100RB#0	4.66	13	PASS
Band41	20MHz	16QAM	40340	1RB#0	4.17	13	PASS
Band41	20MHz	16QAM	40340	100RB#0	5.62	13	PASS
Band41	20MHz	16QAM	40690	1RB#0	5.10	13	PASS
Band41	20MHz	16QAM	40690	100RB#0	5.79	13	PASS
Band41	20MHz	16QAM	41140	1RB#0	5.20	13	PASS
Band41	20MHz	16QAM	41140	100RB#0	5.60	13	PASS

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com




Hotline
400-003-0500
www.anbotek.com


Band2-1.4MHz-QPSK-18607-1RB#0

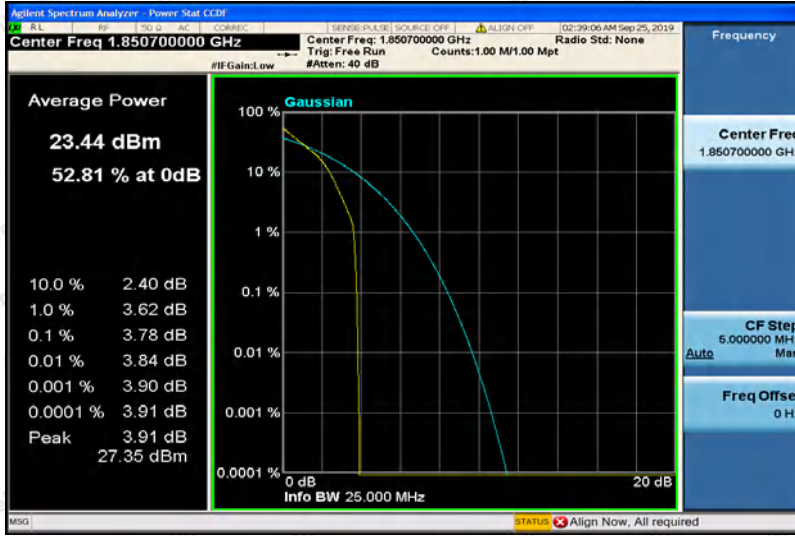

Band2-1.4MHz-QPSK-18607-6RB#0

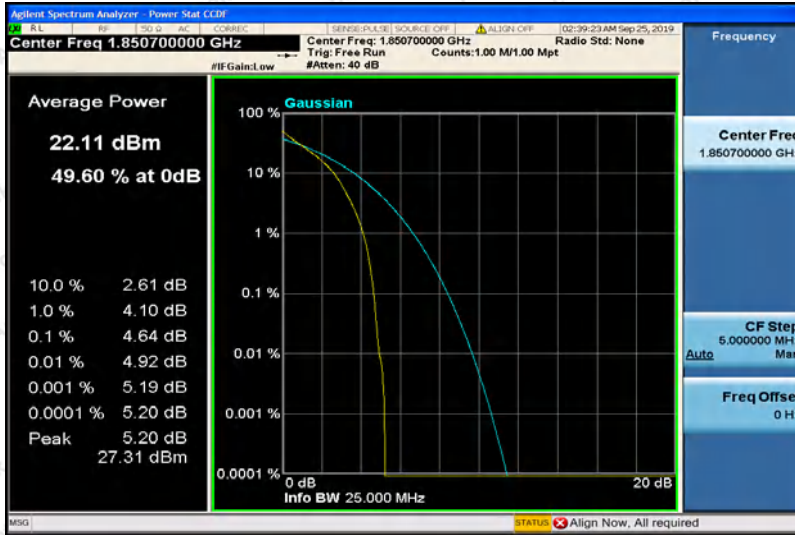

Band2-1.4MHz-QPSK-18900-1RB#0

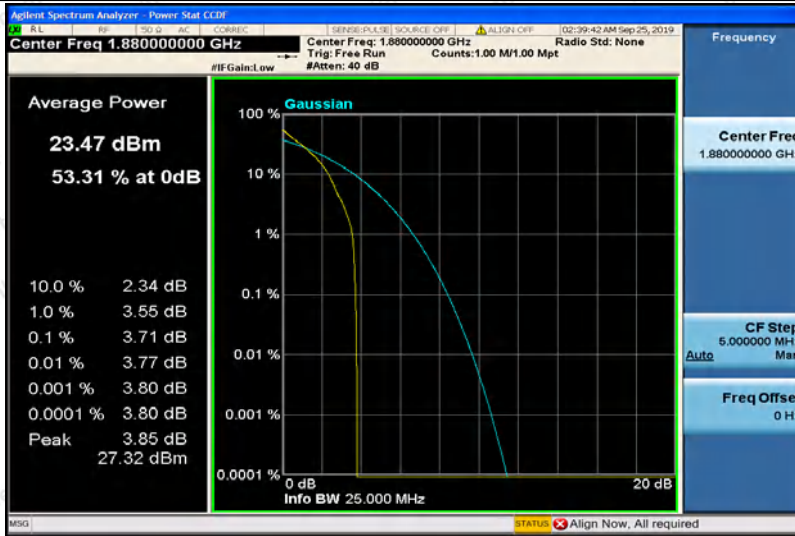


Band2-1.4MHz-QPSK-18900-6RB#0


Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline 400-003-0500
 www.anbotek.com

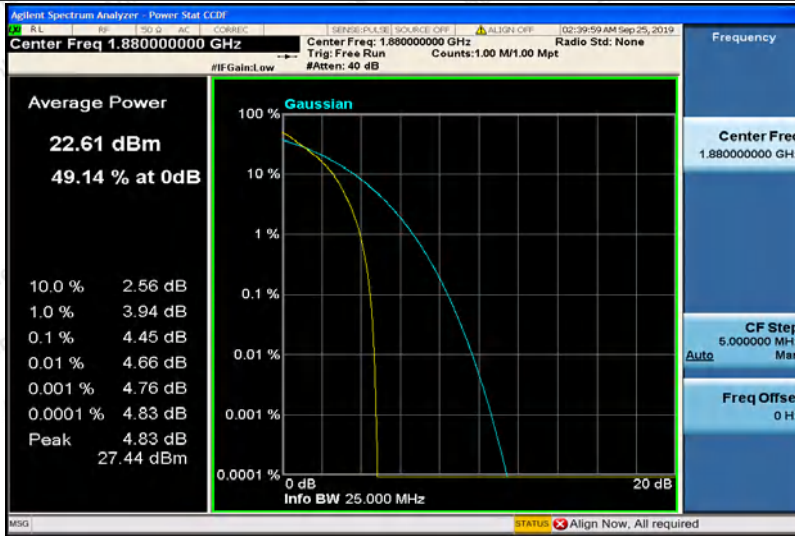

Band2-1.4MHz-QPSK-19193-1RB#0

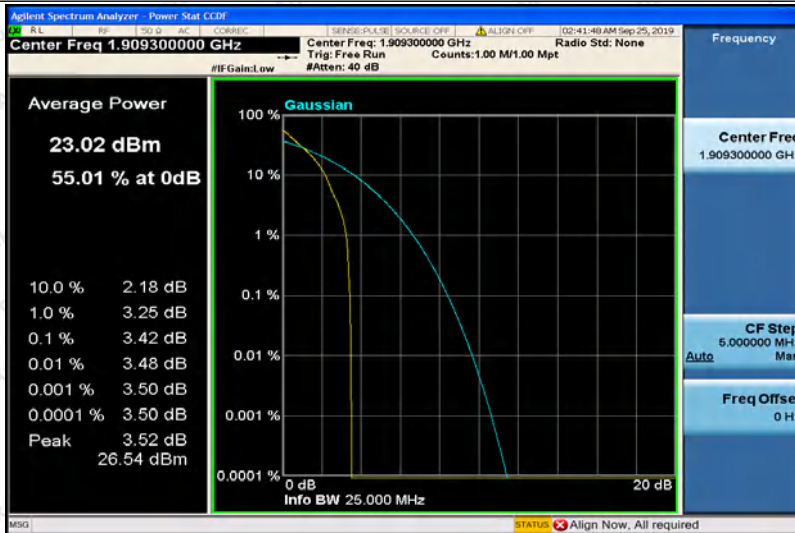

Band2-1.4MHz-QPSK-19193-6RB#0

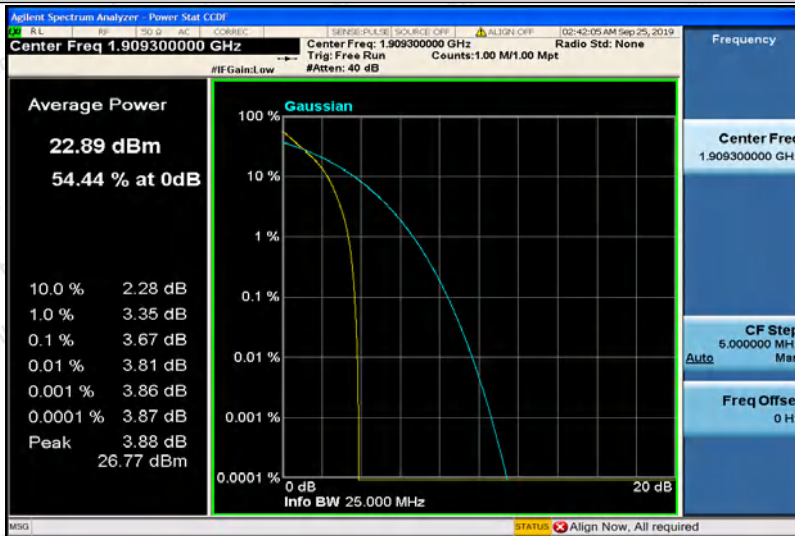


Band2-1.4MHz-16QAM-18607-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

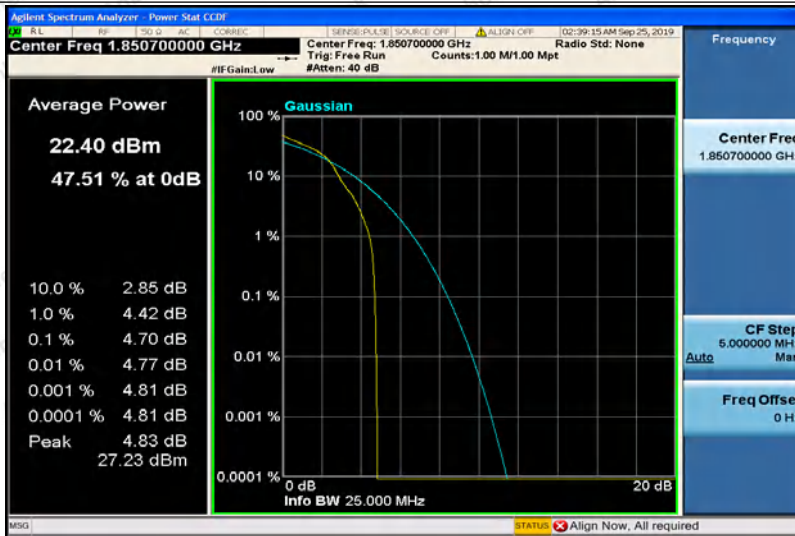

Band2-1.4MHz-16QAM-18607-6RB#0

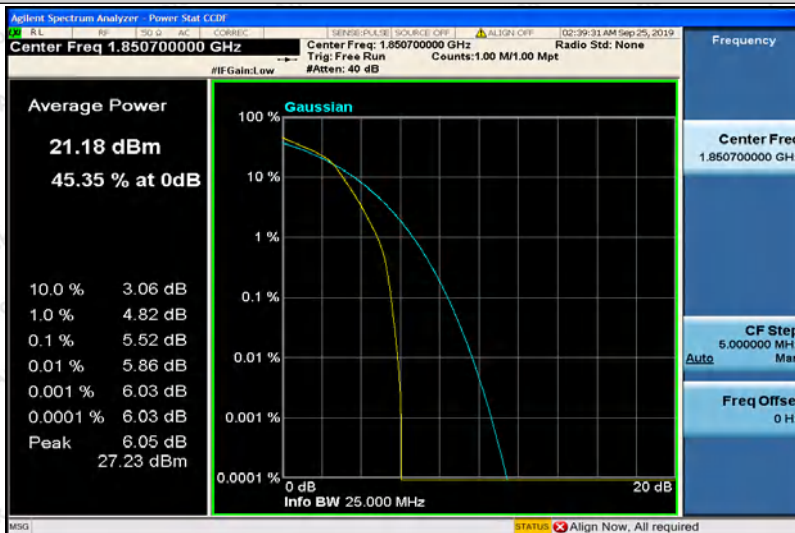

Band2-1.4MHz-16QAM-18900-1RB#0

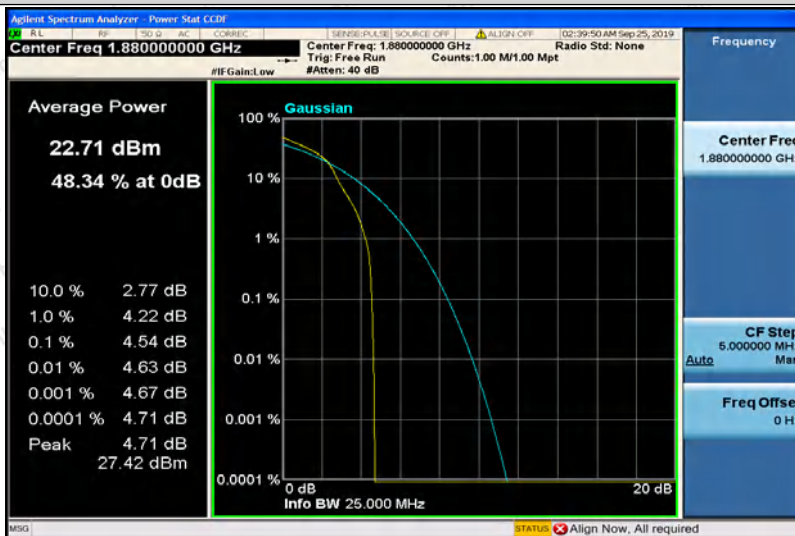


Band2-1.4MHz-16QAM-18900-6RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
www.anbotek.com

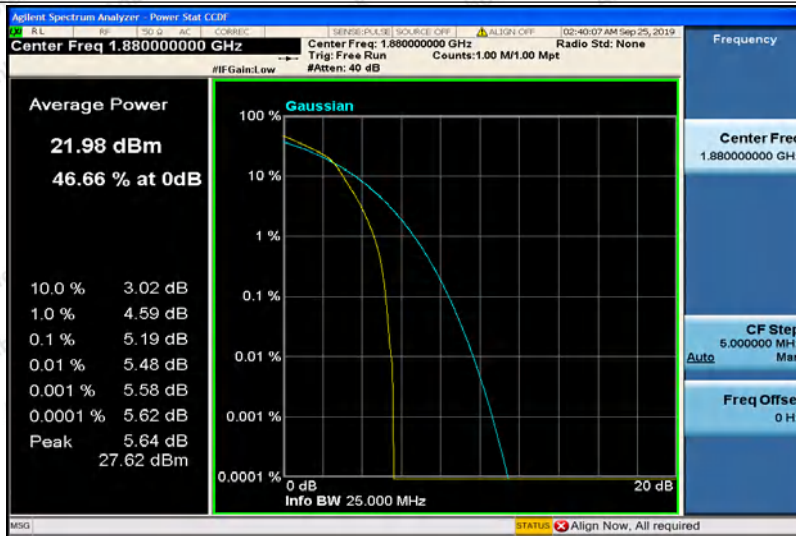

Band2-1.4MHz-16QAM-19193-1RB#0

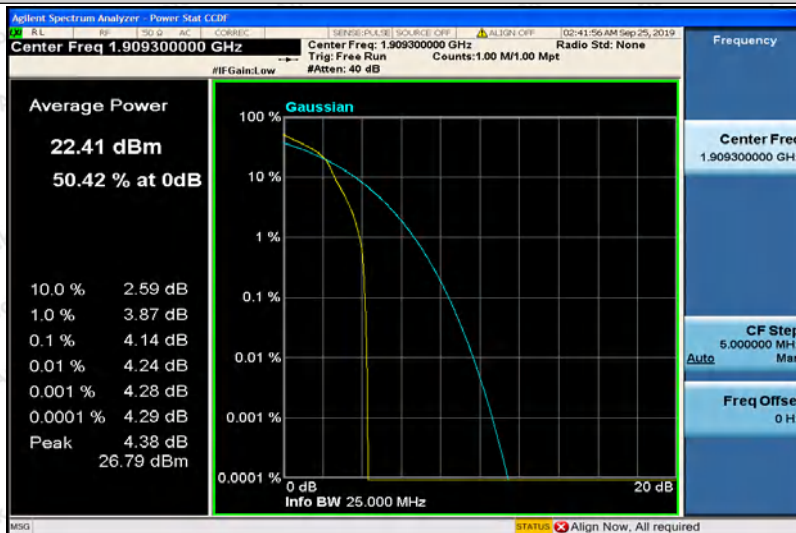

Band2-1.4MHz-16QAM-19193-6RB#0

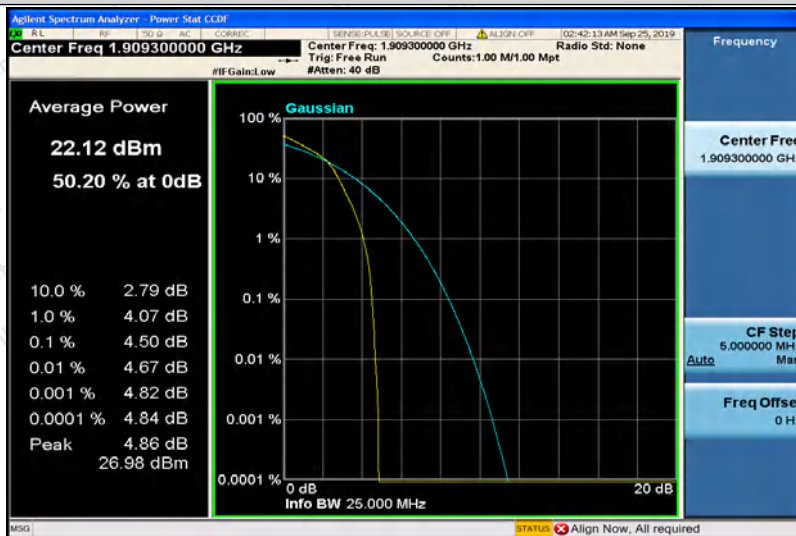


Band2-3MHz-QPSK-18615-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

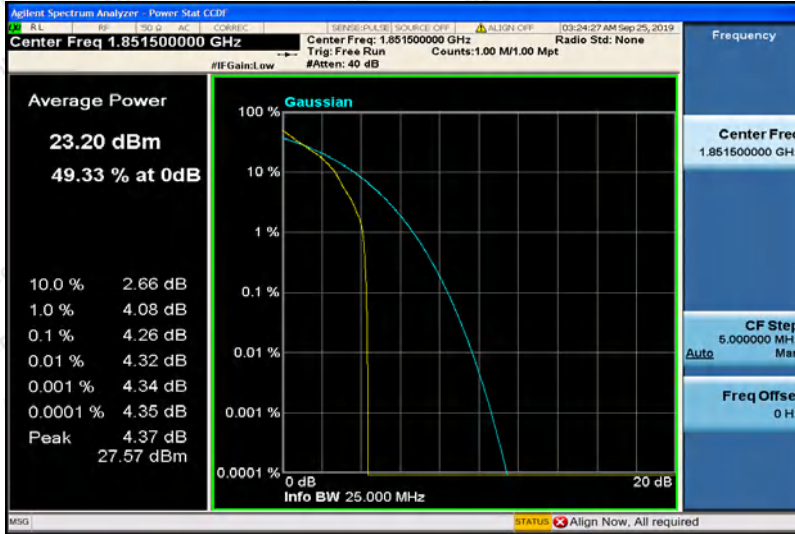

Band2-3MHz-QPSK-18615-15RB#0

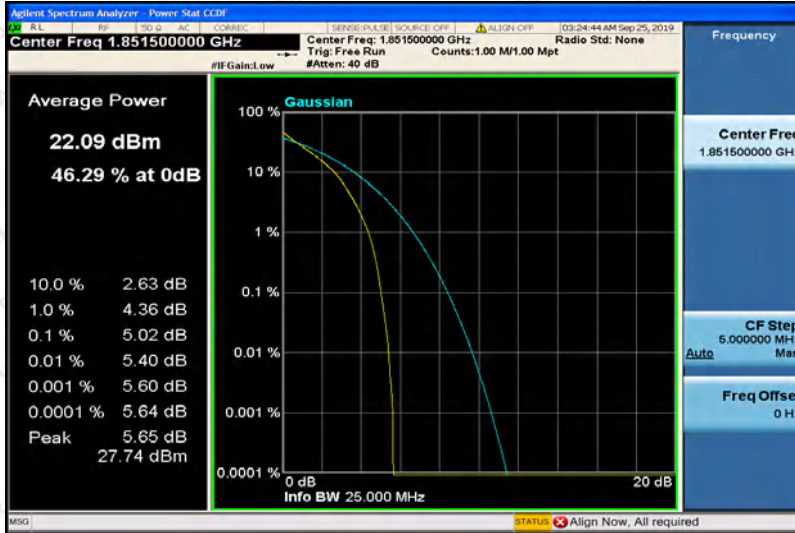

Band2-3MHz-QPSK-18900-1RB#0

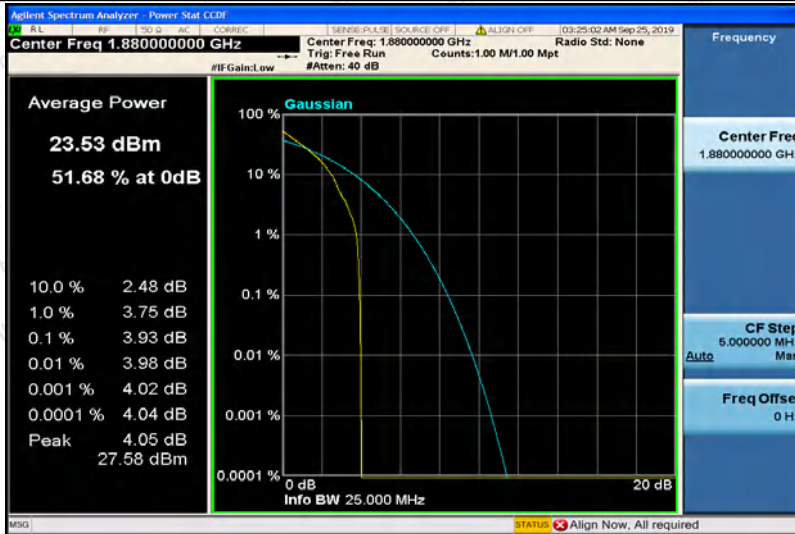


Band2-3MHz-QPSK-18900-15RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

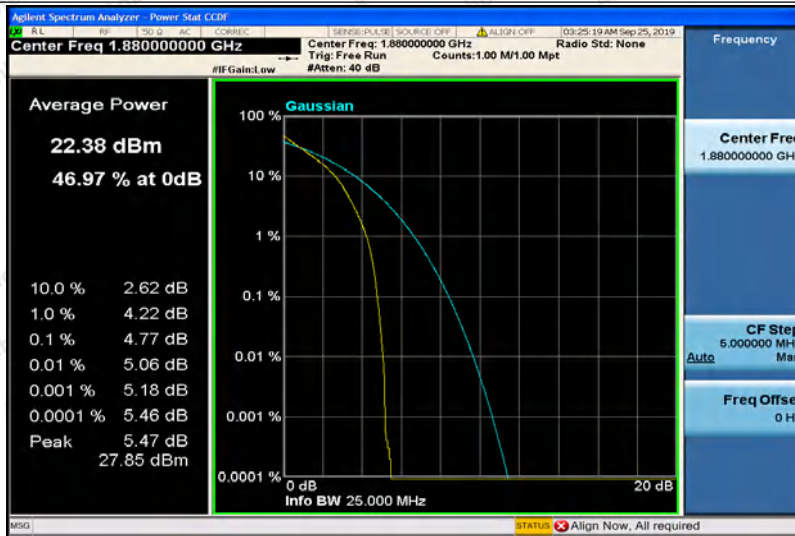

Band2-3MHz-QPSK-19185-1RB#0

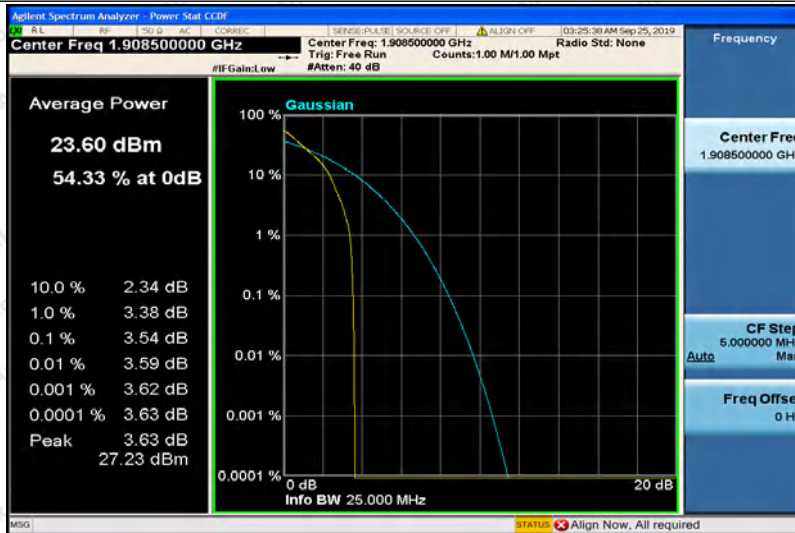

Band2-3MHz-QPSK-19185-15RB#0

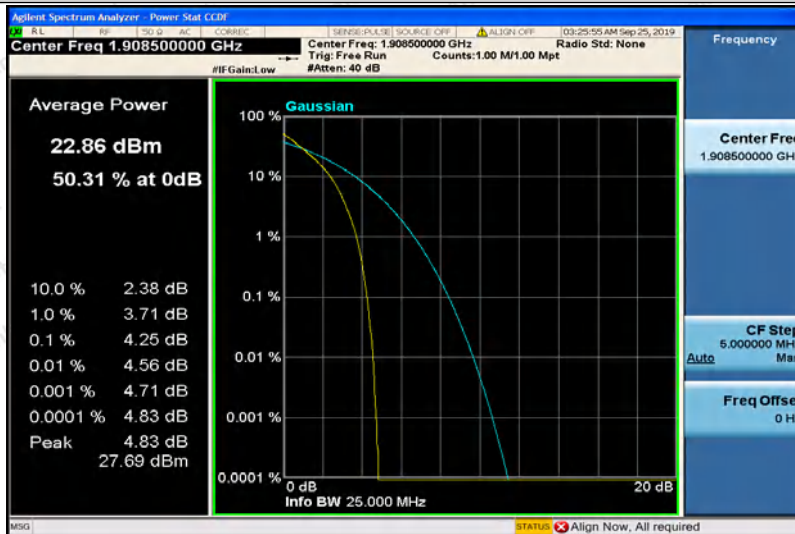


Band2-3MHz-16QAM-18615-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

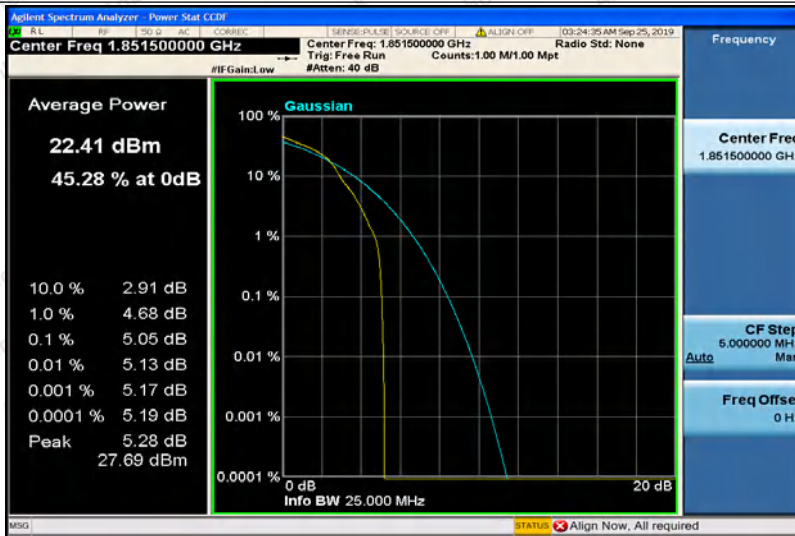

Band2-3MHz-16QAM-18615-15RB#0

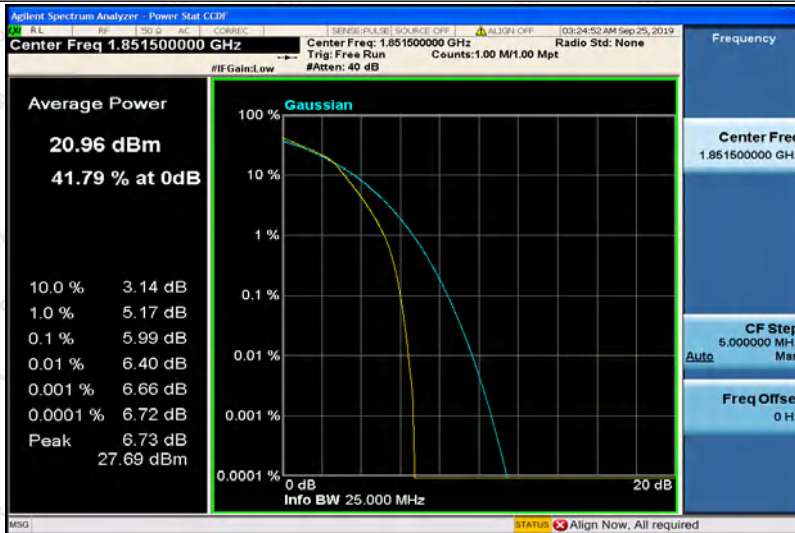

Band2-3MHz-16QAM-18900-1RB#0

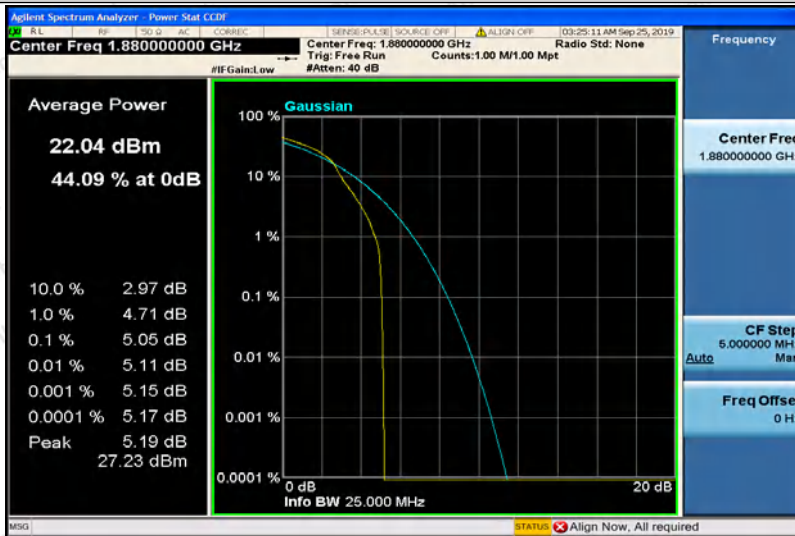


Band2-3MHz-16QAM-18900-15RB#0

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
400-003-0500
www.anbotek.com

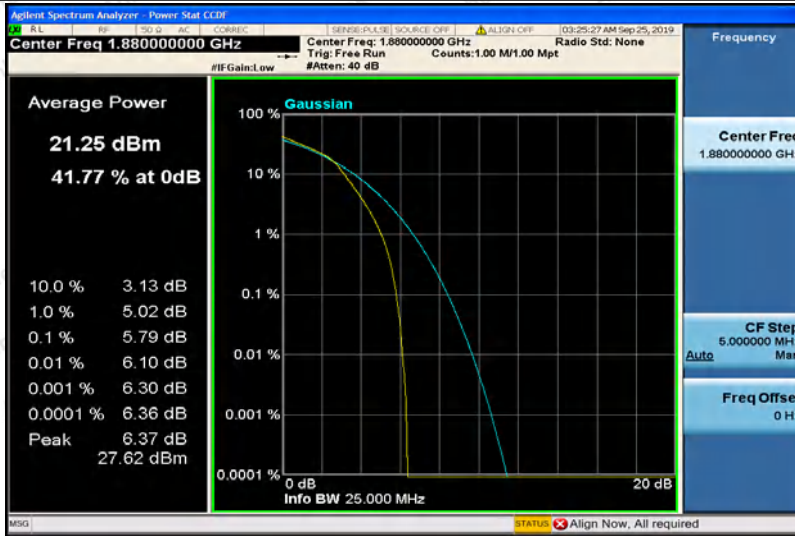

Band2-3MHz-16QAM-19185-1RB#0



Band2-3MHz-16QAM-19185-15RB#0

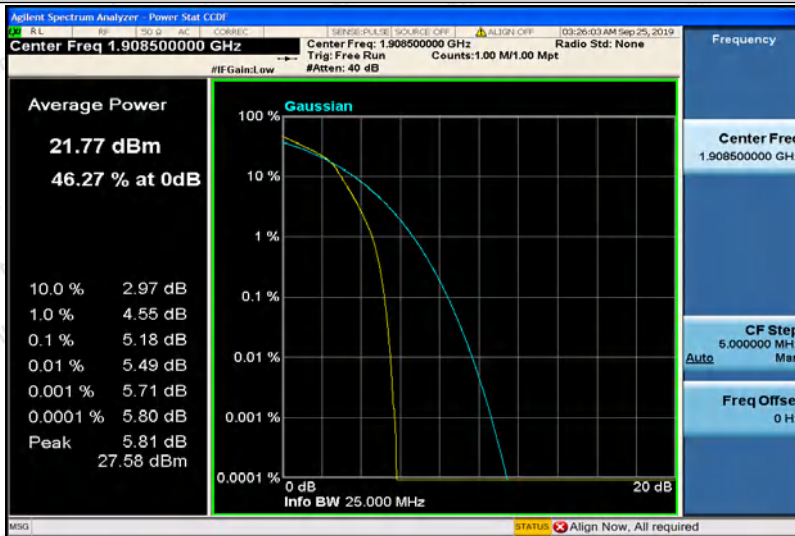


Band2-5MHz-QPSK-18625-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
www.anbotek.com

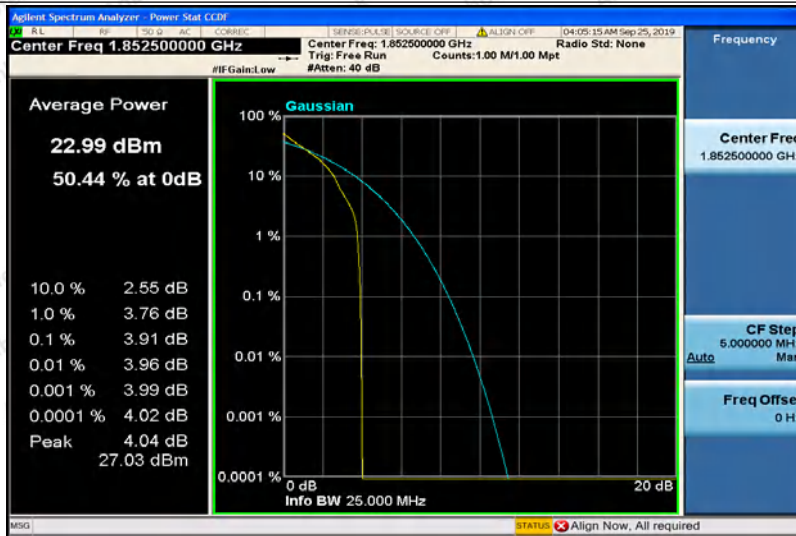

Band2-5MHz-QPSK-18625-25RB#0

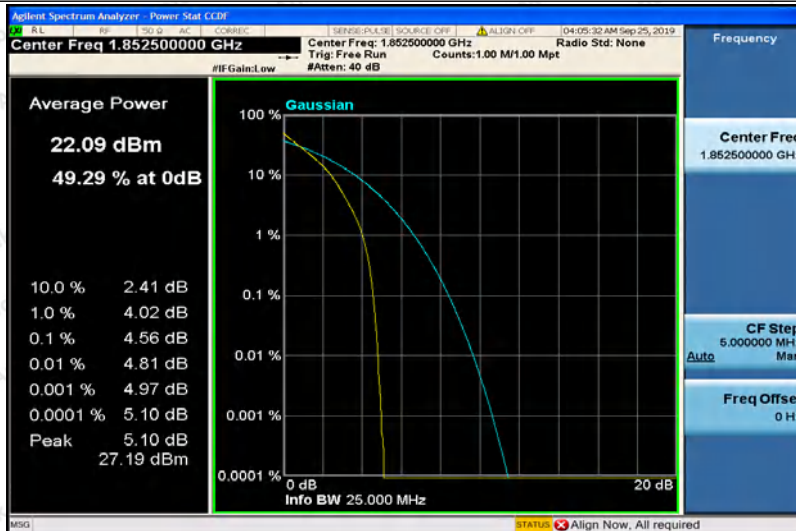

Band2-5MHz-QPSK-18900-1RB#0

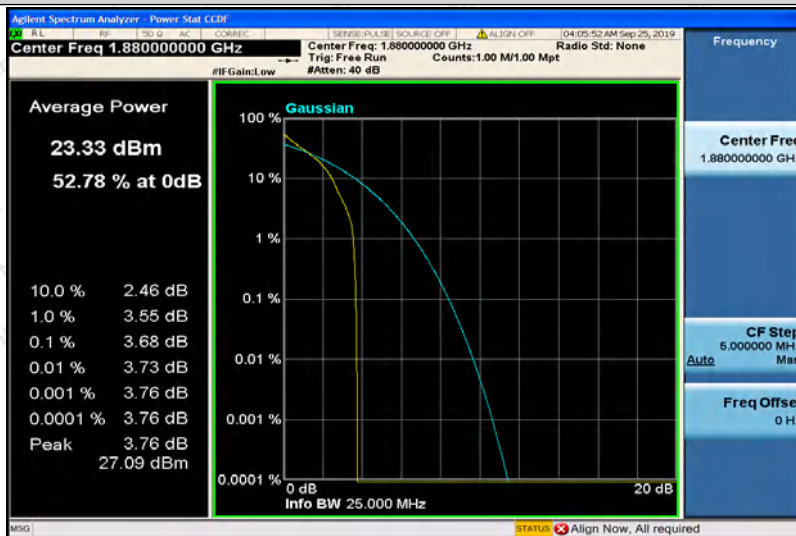


Band2-5MHz-QPSK-18900-25RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
400-003-0500
www.anbotek.com

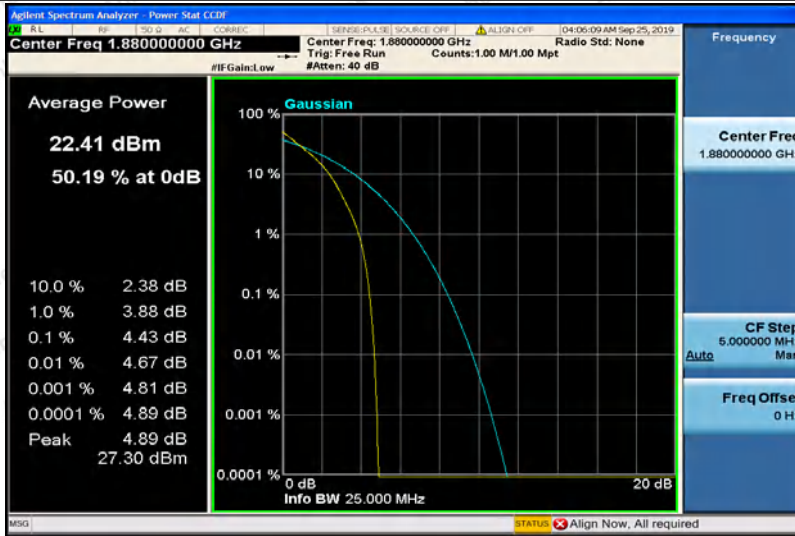

Band2-5MHz-QPSK-19175-1RB#0

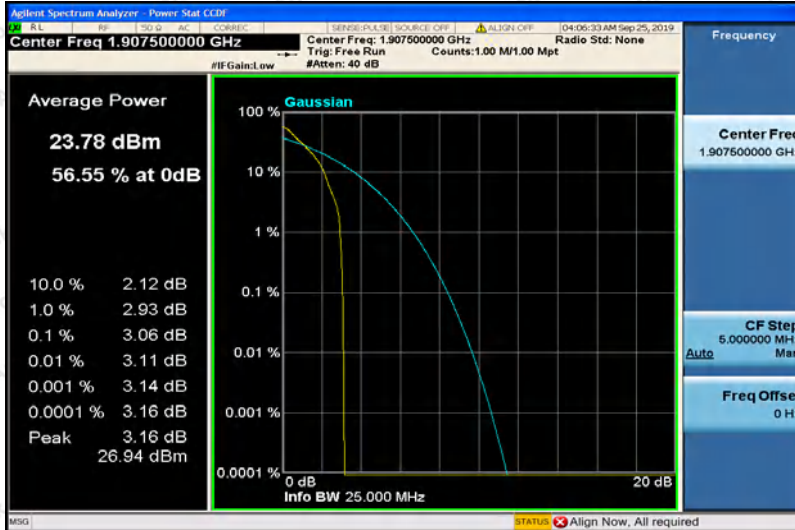

Band2-5MHz-QPSK-19175-25RB#0

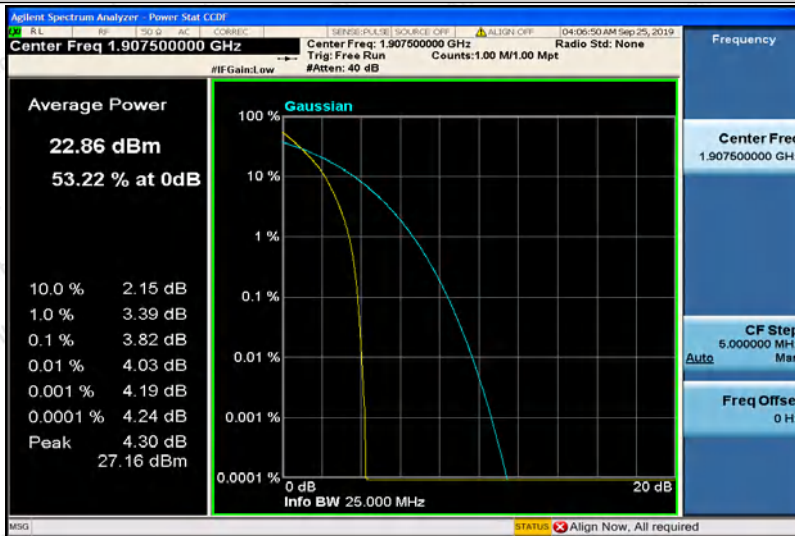


Band2-5MHz-16QAM-18625-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

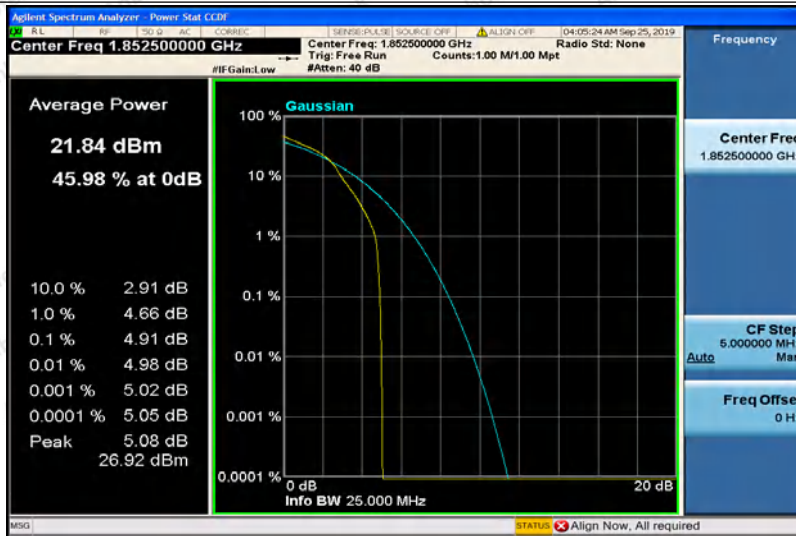

Band2-5MHz-16QAM-18625-25RB#0

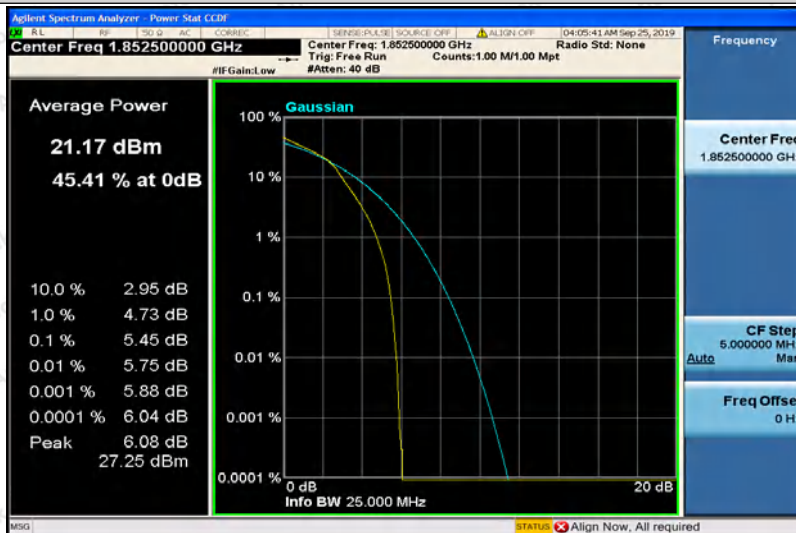

Band2-5MHz-16QAM-18900-1RB#0

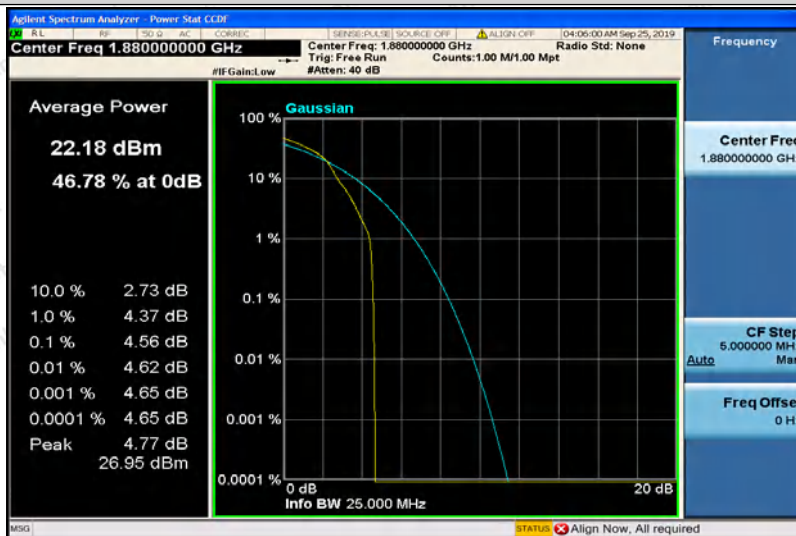


Band2-5MHz-16QAM-18900-25RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
400-003-0500
www.anbotek.com

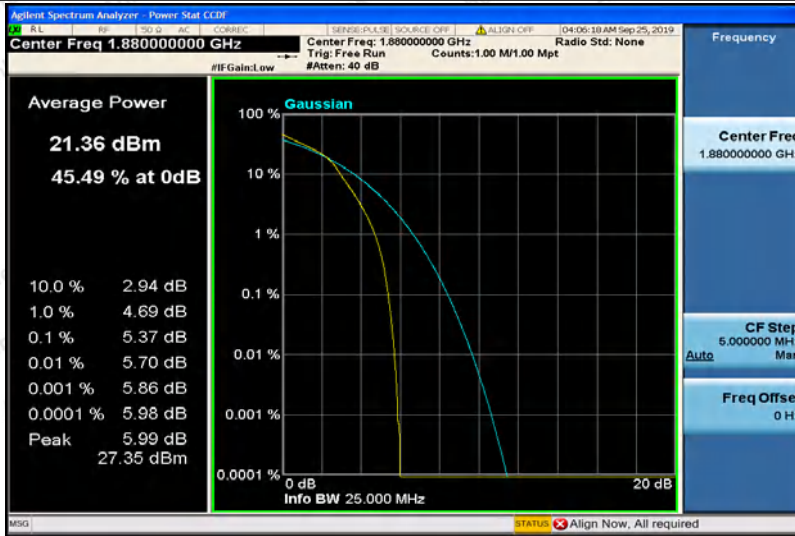

Band2-5MHz-16QAM-19175-1RB#0

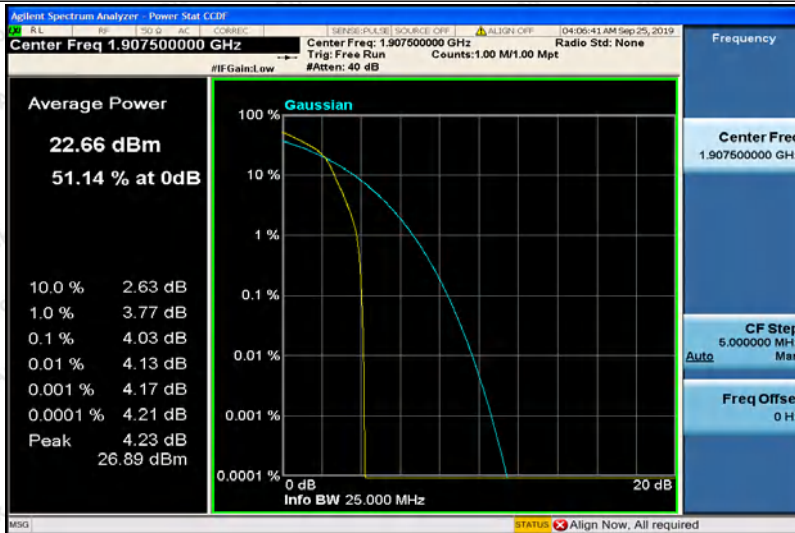

Band2-5MHz-16QAM-19175-25RB#0

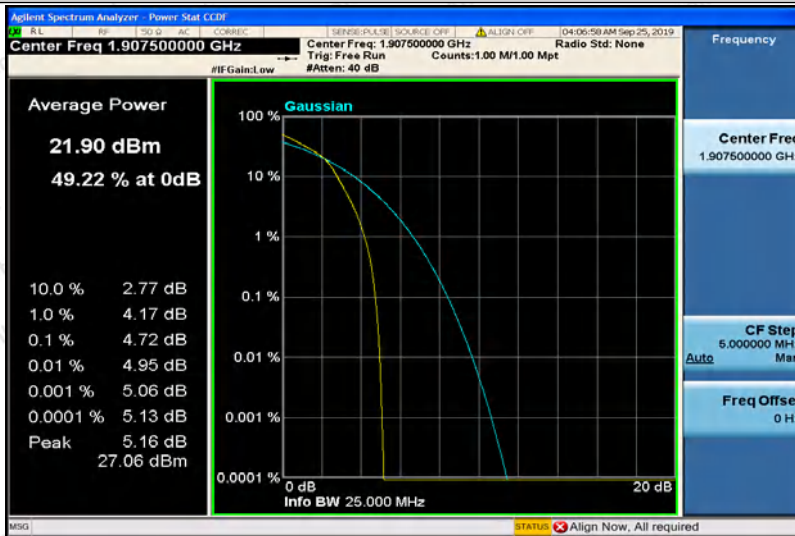


Band2-10MHz-QPSK-18650-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

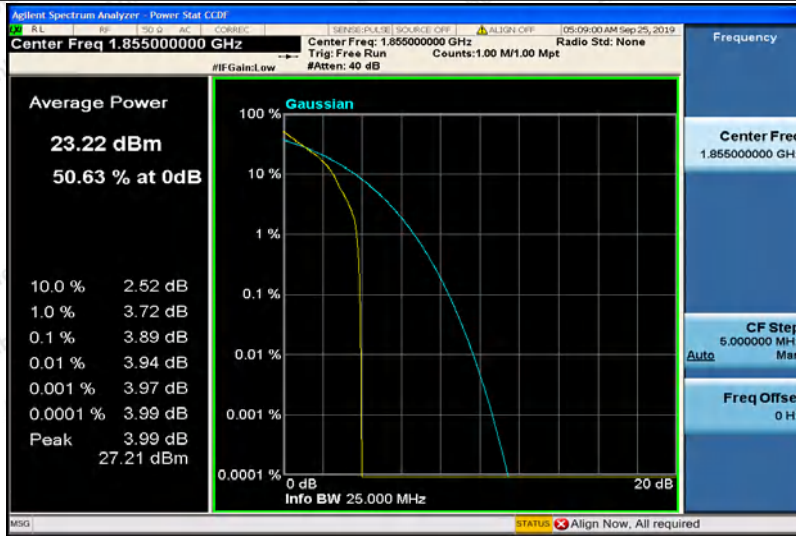

Band2-10MHz-QPSK-18650-50RB#0

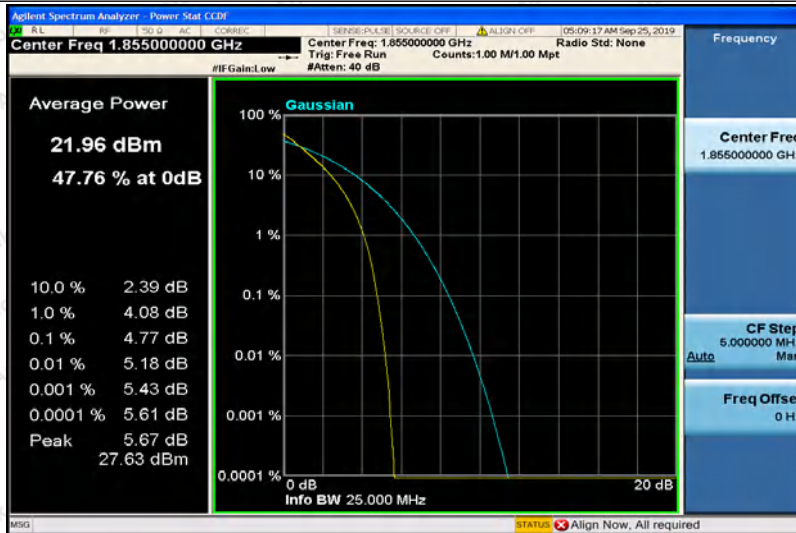

Band2-10MHz-QPSK-18900-1RB#0

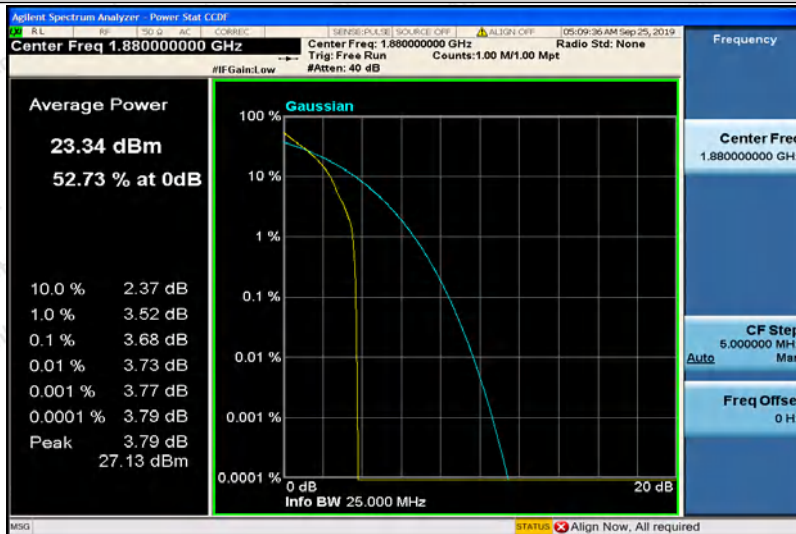


Band2-10MHz-QPSK-18900-50RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

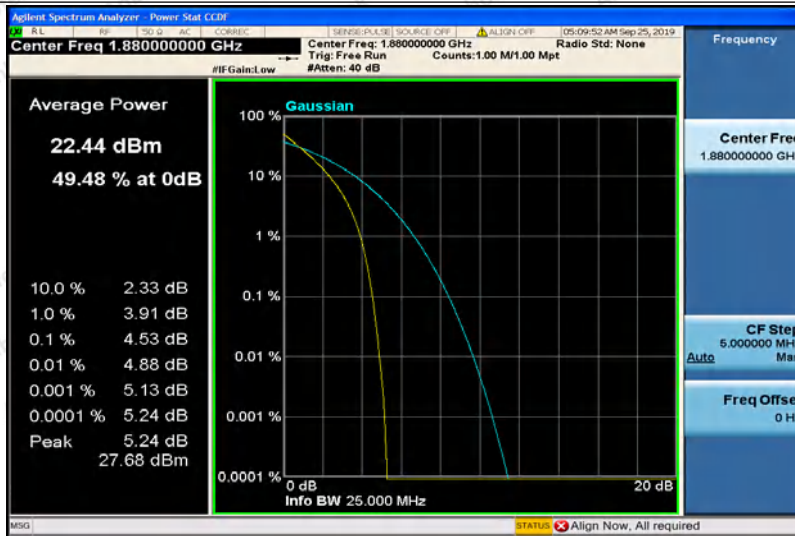

Band2-10MHz-QPSK-19150-1RB#0

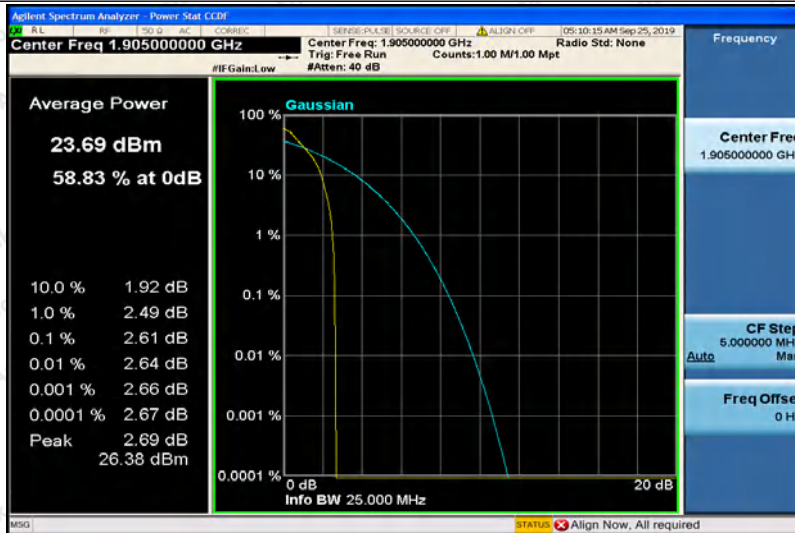

Band2-10MHz-QPSK-19150-50RB#0




Band2-10MHz-16QAM-18650-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline 400-003-0500
 www.anbotek.com

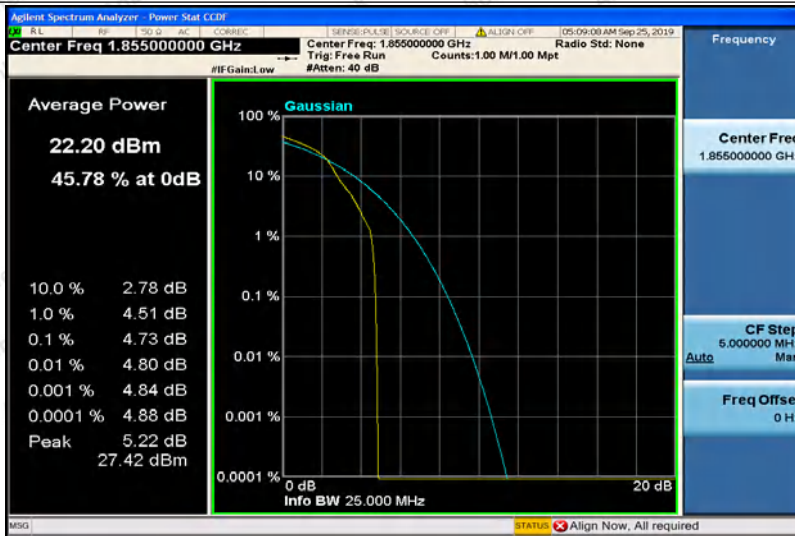

Band2-10MHz-16QAM-18650-50RB#0

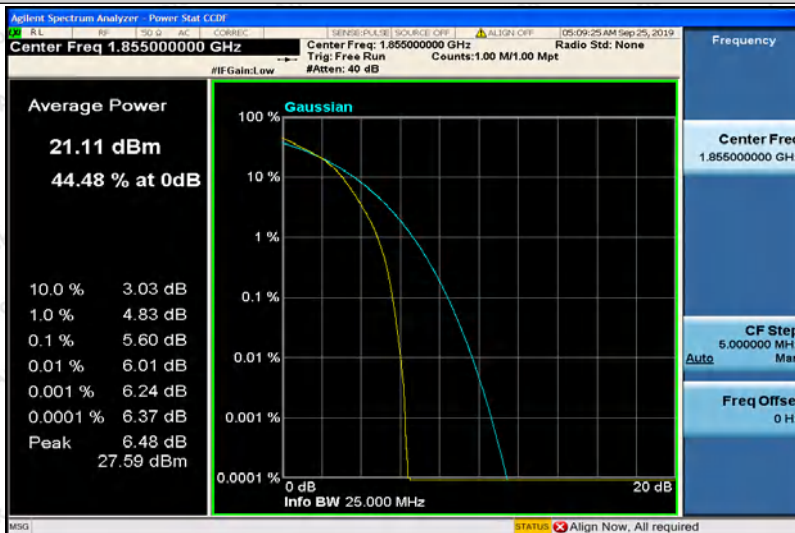

Band2-10MHz-16QAM-18900-1RB#0

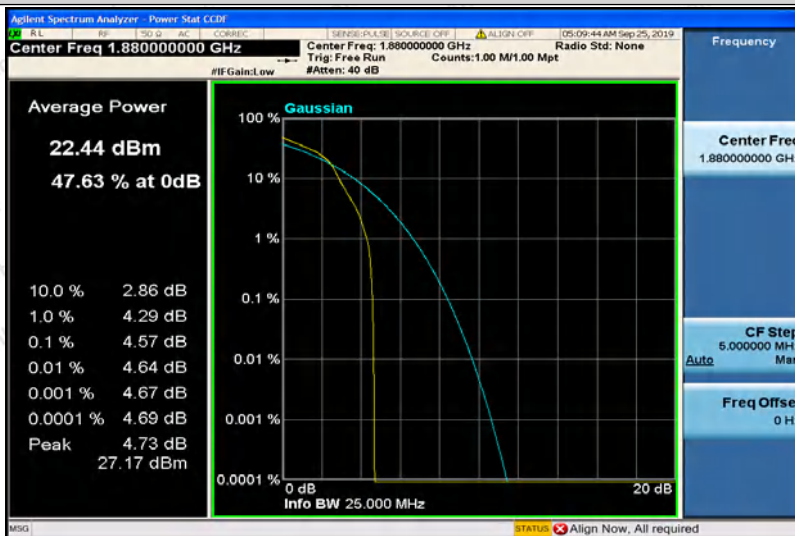


Band2-10MHz-16QAM-18900-50RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

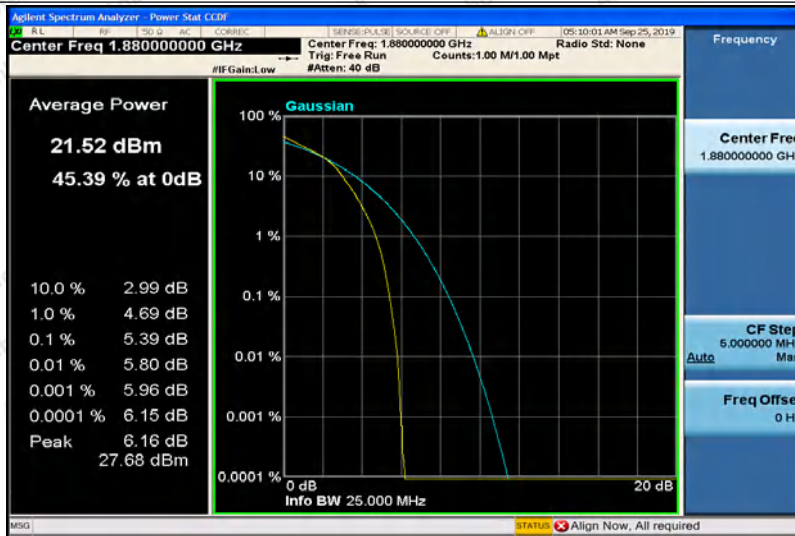

Band2-10MHz-16QAM-19150-1RB#0

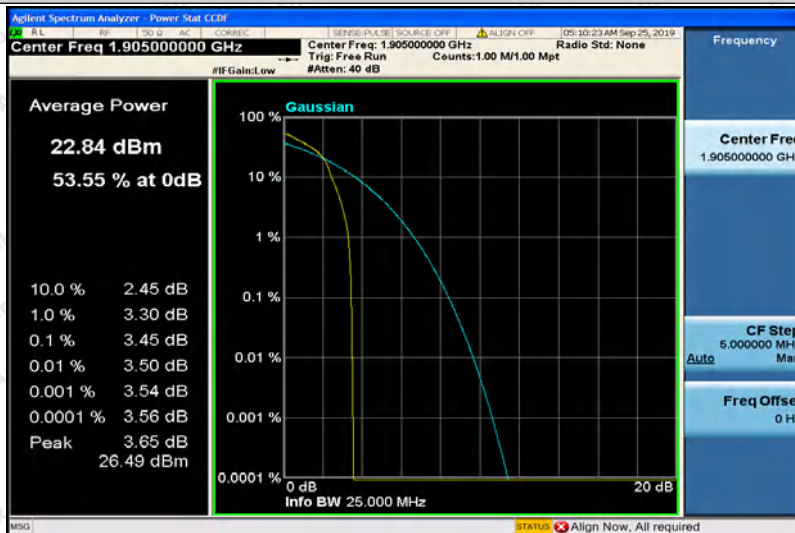

Band2-10MHz-16QAM-19150-50RB#0

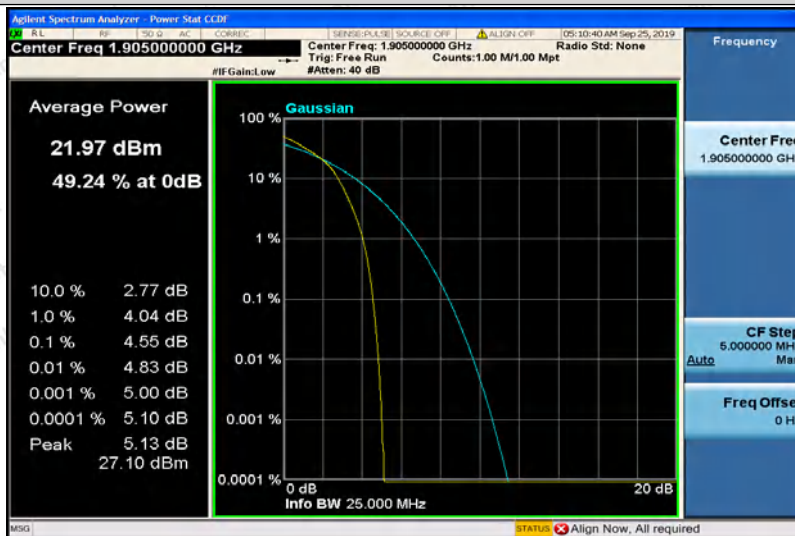


Band2-15MHz-QPSK-18675-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
 400-003-0500
 www.anbotek.com

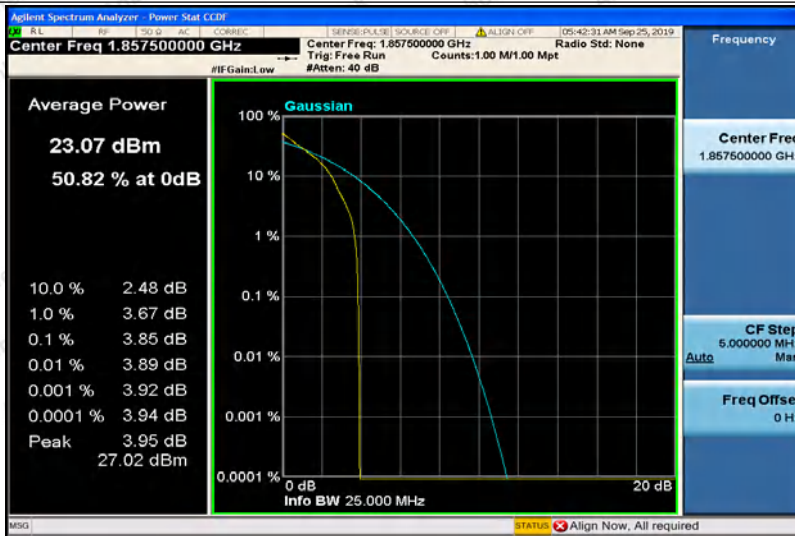


Band2-15MHz-QPSK-18675-75RB#0

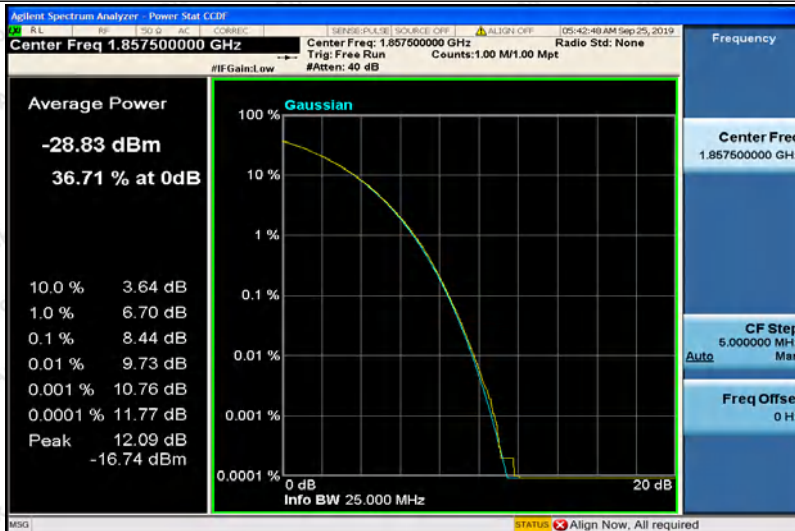


Band2-15MHz-QPSK-18900-1RB#0

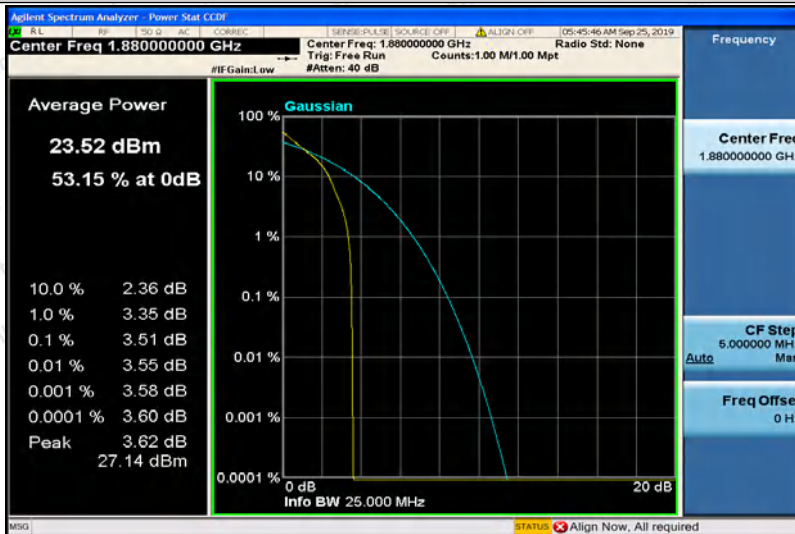


Band2-15MHz-QPSK-18900-75RB#0

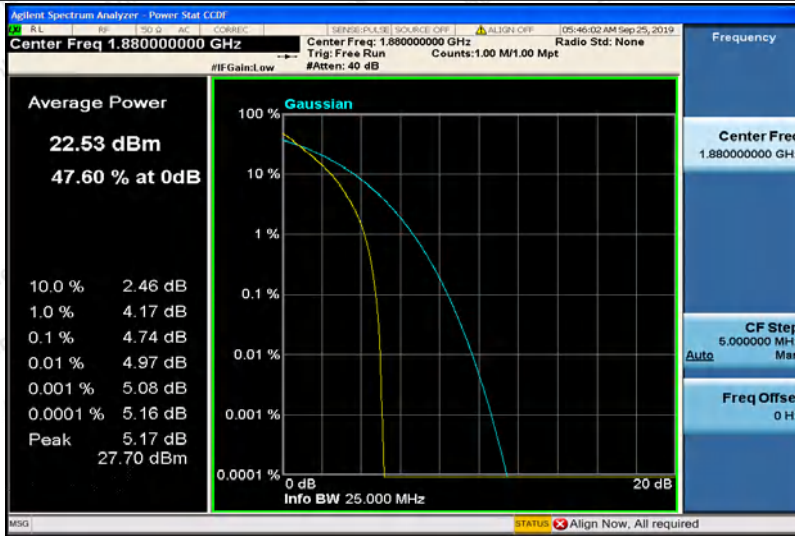

Band2-15MHz-QPSK-19125-1RB#0

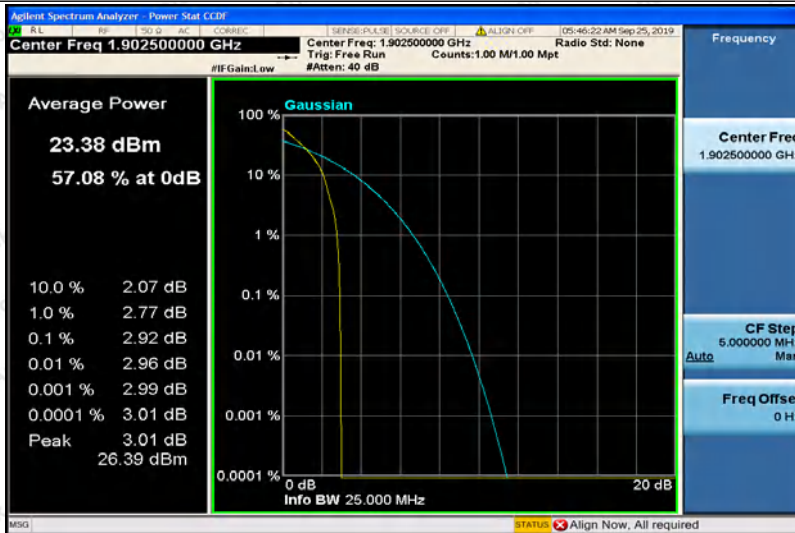

Band2-15MHz-QPSK-19125-75RB#0

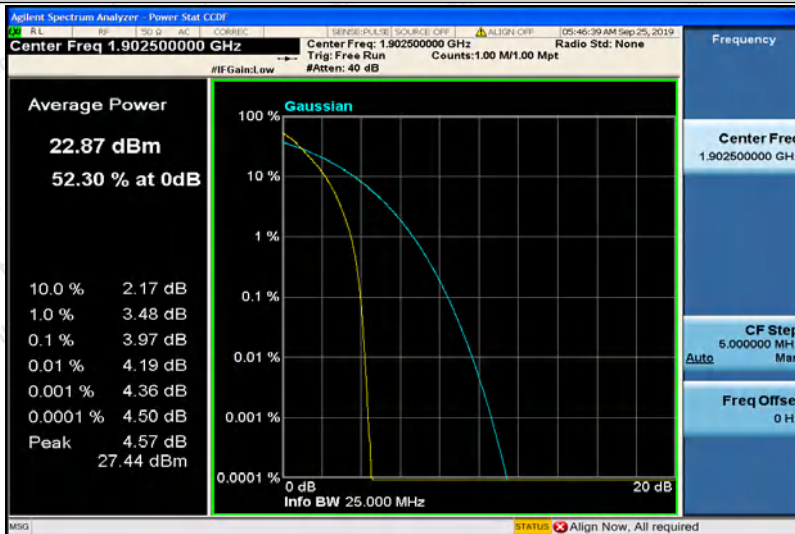


Band2-15MHz-16QAM-18675-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
400-003-0500
www.anbotek.com

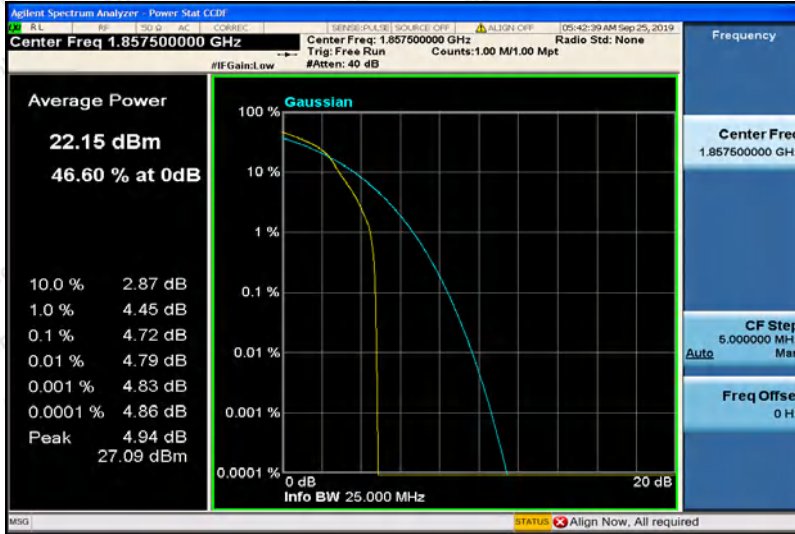

Band2-15MHz-16QAM-18675-75RB#0

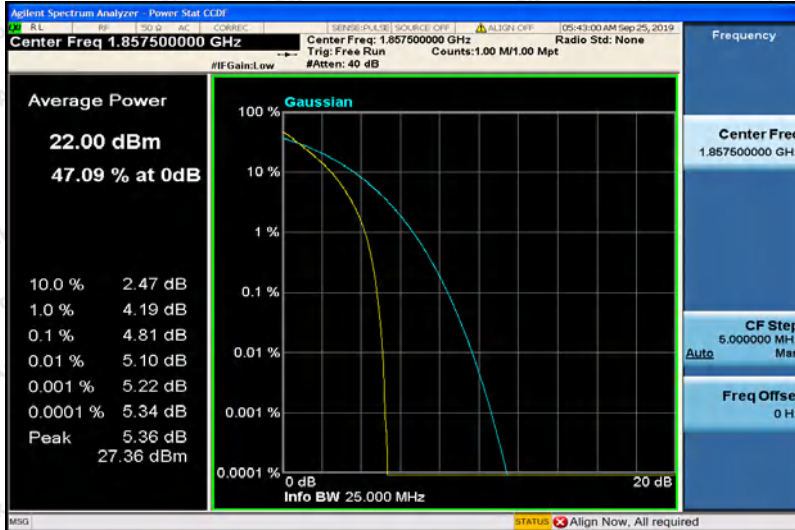

Band2-15MHz-16QAM-18900-1RB#0

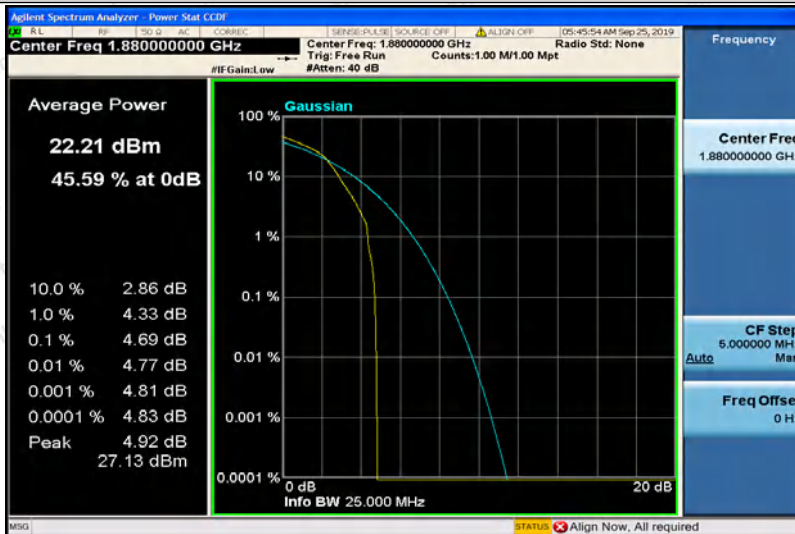


Band2-15MHz-16QAM-18900-75RB#0

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


Hotline
400-003-0500
www.anbotek.com

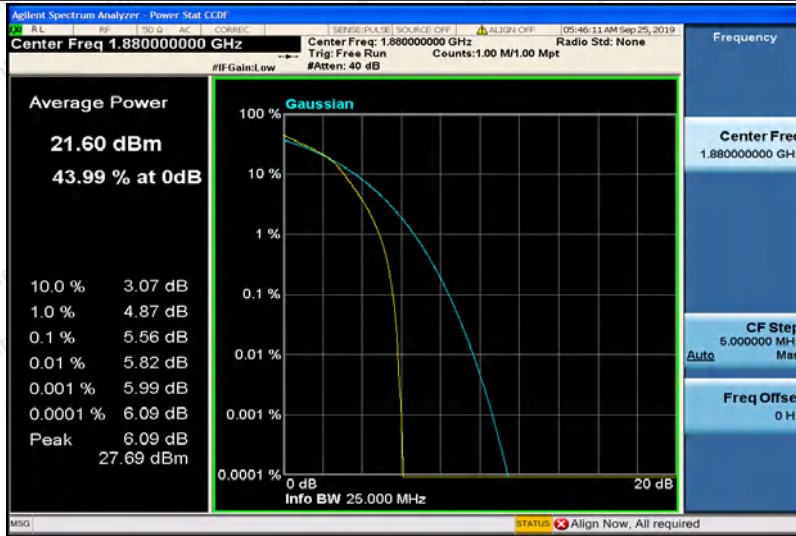

Band2-15MHz-16QAM-19125-1RB#0

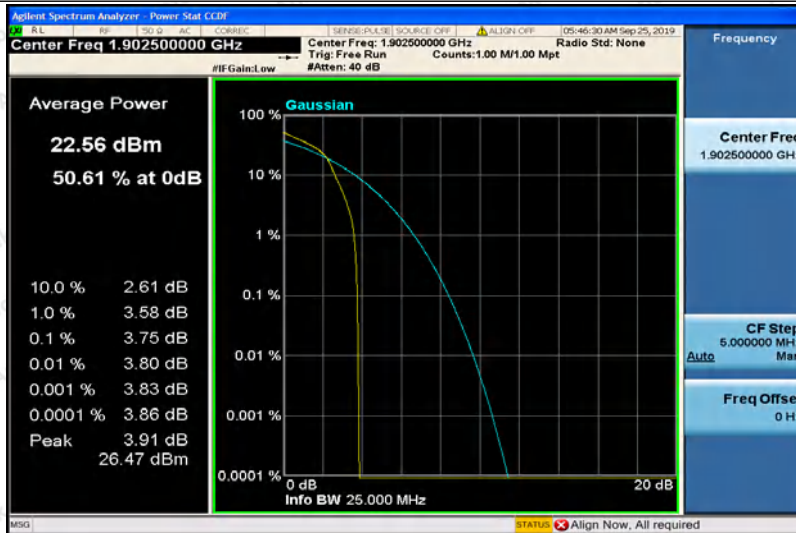

Band2-15MHz-16QAM-19125-75RB#0

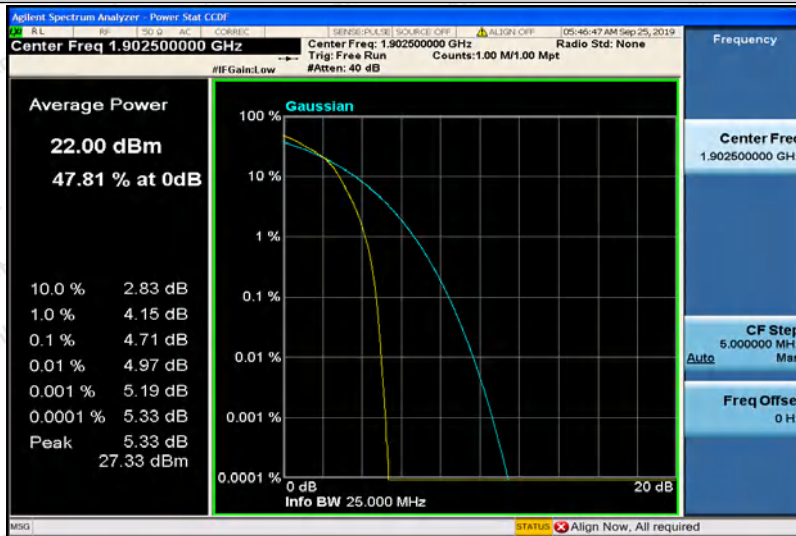

Band2-20MHz-QPSK-18700-1RB#0

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com