


**New Upgrade**

**Hands Free, Ears Free, Sports Free**  
DolTech BBH-929s Bluetooth Wearable Neckband Speaker  
Bluetoothウェアラブルネックスピーカー

**User Manual**  
ユーザーマニュアル  
用户说明书

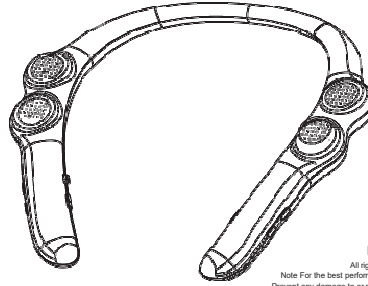

ENGLISH

JAPANESE

中文版

BBH-929s

**Rev 1.0**  
All rights reserved  
Note For the best performance and to  
prevent any damage to or misuse of the  
DolTech BBH929s Please read all of the  
information carefully prior to using the BBH929s  
Any modifications or changes to this manual due to  
Typographical errors or inaccuracies of stated information  
Shall only be made by Shenzhen Duowei Technology Inc.

## CONTENTS

ENGLISH

Features & Benefits.....	1
Specifications .....	1
Product Applications.....	1
Description of parts. ....	2
Package Contents. ....	2
Specifications .....	3
Power On/Power Off .....	3
Charging.....	3
Automatically Shutdown.....	4
Battery Status Alert.....	4
Pairing. ....	4
Multi-connection.....	5
Auto Reconnect .....	5
Calling.....	6
Voice Assistant Active (Siri, Alexa, Bixby, Google) .....	6
Volume control.....	6
Audio streaming controls.....	6
Important safety information .....	7
Voice prompt.....	7
LED Indicator .....	8
Troubleshooting .....	8

### Features & Benefits

- Latest HD aptX And Bluetooth 5.0 Chipside
- Using Active Noise Cancelling Technology
- Theater Surround Sound With 4 Speakers
- Flexible and Wearable Neckband Design
- IPX4 Sweatproof & Water Resistant
- Multi-connection Up to 2 devices

### Specifications

- Bluetooth Version: 5.0
- Wireless Distance: 10m
- Speaker Sensitivity: 102 +/-3DB
- Frequency Response: 20-20KHZ

### Product Applications


Play audio file from a mobile phone,laptop or other wireless Bluetooth device connected with it, (AV Dongle:General Bluetooth Dongle)

Play audio files from a PC after connected with its Bluetooth Dongle,and also support wireless internet voice chat through MSN, SKYPE and QQ.

ENGLISH

Description of parts

ENGLISH



1. Sound Producing Unit
2. Microphone
3. LED Sign: Means the working status of the device
4. Last Song
5. Next Song
6. Charger Port :  
Connect power supply that above 5v, 200mah
7. MFB: Play/Pause the music
8. Power: Turn on/off
9. MFB: Answer/Hang up the phone
10. Volume-: Volume down
11. Volume+: Volume up

Package Contents



USB Charging Cable



User Manual



Warranty Card

Specifications

Item	Description
Wireless specification	5.0(Headset/Hands-Free/A2DP Profiles)
Battery	Battery 3.7V/900 mAh Li-Polymer
Standby time/Talk Time	Up to 500 hours/Up to 15 hours
Music play time	Up to 15 hours
Charging time	Less than 3.5 hours
Charging rated input	DC 5.0V, 500mA
Operation temperature	-15 °C~60°C
Dimension/weight	196mm(W)x180mm(L)x26mm(H)/85g

How to Use

Power On/Power Off

- Push the Power switch to the ON or OFF position

Charging

- When the charger is connected (with the power on or off) the speaker will turn off automatically.
- While charging, the LED indicator will show a solid red light and then change to Violet color, which means the battery has been charged to 80% and above.
- When charging is completed, the LED indicator will show a solid blue light  
Recommend to use a DC5V 1A USB charger to charge the Speaker.

ENGLISH

**Automatically Shutdown**

The speaker will be shut down automatically 5 minutes later once the speaker is out of range(33 ft)

**Battery Status Alert**

There are 3 levels of battery power

Battery Status	High	Medium	Low
Voice Prompt	Battery High	Battery Medium	Battery Low
LED Indicator	Blinking	Blinking	Blinking
	Blue 3 times	Violet 3 times	Red 3 times

**Pairing**

**Easy Pairing (First Time Pairing)**

1. Before using the speaker for the first time, you must pair it with a bluetooth-enabled device(Cellphone,Pad,Laptop, eg).
2. Turn on the bluetooth function on the device.
3. Push the Power button to the ON position on the BBH-929s,Then the speaker enters Pairing Mode, the LED indicator will blink with the red and blue light,you will also hear a voice prompting "Power on".
4. Search bluetooth device and Select BBH-929s from the list of devices and pair it with your device.Enter 0000(4 Zeros) if needed.
5. Once the pairing has been completed successfully, you will hear the voice prompting connected. The BBH-929s Speaker will automatically turn off if not finish pairing within 3 minutes.
6. Pairing Failed:Please turn off your speaker and repeat the steps above.
7. Automatic Connect: It will connect to the last connected device automatically when it turns on

**Multi-connection**

**Advanced Multipoint**

The BBH-929s is capable of having two devices connected to the speaker at the same time. This will give you the freedom of using call waiting between calls on both of your connected phones.

**Connect Steps:**

- 1.Connect with device 'A',then disconnect it.
- 2.Connect with device 'B',
- 3.Connect with device 'A' again.

Then you will have them connected at the same time.

**Calling Function**

Last Number Redial:Double Click the call button,then your cellphone will redial the last number you dialed.

**Auto Reconnect**

The BBH-929s Speaker will connect to the last connected device automatically when it turns on.

**Outrange**

If the paired devices are separated by a range of 10 meters(33 feet) or more the speaker and bluetooth device will disconnect.It will automatically reconnect

when the BBH-929s gets back in range(33 ft)

#### Calling

- Answering a call /Ending a call
- Short press the call button to answer and end a call.
- Rejecting a call
- Long Press the call button

#### Voice Assistant Active (Siri, Alexa, Bixby, Google)

- Long Press the call button

#### Volume control

- Press the VOLUME button to the + or - position

#### Audio streaming controls

- PLAY Short press the PLAY/PAUSE button
- PAUSE Short press the PLAY/PAUSE button
- NEXT SONG Short press the Track Forward button
- PREVIOUS SONG Short press the Track Rewind button

#### Voice prompt

- Ⓞ You will hear "power on" when the Speaker is powered on.
- Ⓞ You will hear "power off" when the Speaker is powered off.
- Ⓞ You will hear "connected" when the Speaker is paired.
- Ⓞ You will hear "battery low " when the Speaker is in low power status.

#### Important safety information

##### WARNINGS & CAUTIONS

- Do NOT use the speaker at a high volume for any extended period.
- To avoid hearing damage, use your speaker at a comfortable, moderate volume level.
- Turn the volume down on your device before wearing the speaker or placing it near your ears, then turn the volume up gradually until you reach a comfortable listening level.
- Use caution while driving and follow applicable laws regarding use of a mobile phone and personal speaker.
- Focus on your safety and that of others if you use the personal speaker while engaging in any activity requiring your attention, e.g. while riding a bicycle or walking in or near traffic, a construction site or railroad, etc. Remove the personal speaker.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.