




5.8G:

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	97.57	0.11	0.72
NVNT	a	5785	Ant1	97.6	0.11	0.72
NVNT	a	5825	Ant1	97.58	0.11	0.72
NVNT	n20	5745	Ant1	97.41	0.11	0.77
NVNT	n20	5785	Ant1	97.4	0.11	0.77
NVNT	n20	5825	Ant1	97.44	0.11	0.77
NVNT	n40	5755	Ant1	95.08	0.22	1.54
NVNT	n40	5795	Ant1	95.05	0.22	1.54
NVNT	ac20	5745	Ant1	97.44	0.11	0.76
NVNT	ac20	5785	Ant1	97.48	0.11	0.76
NVNT	ac20	5825	Ant1	97.5	0.11	0.76
NVNT	ac40	5755	Ant1	95.11	0.22	1.54
NVNT	ac40	5795	Ant1	95.09	0.22	1.54
NVNT	ac80	5775	Ant1	90.65	0.43	3.03

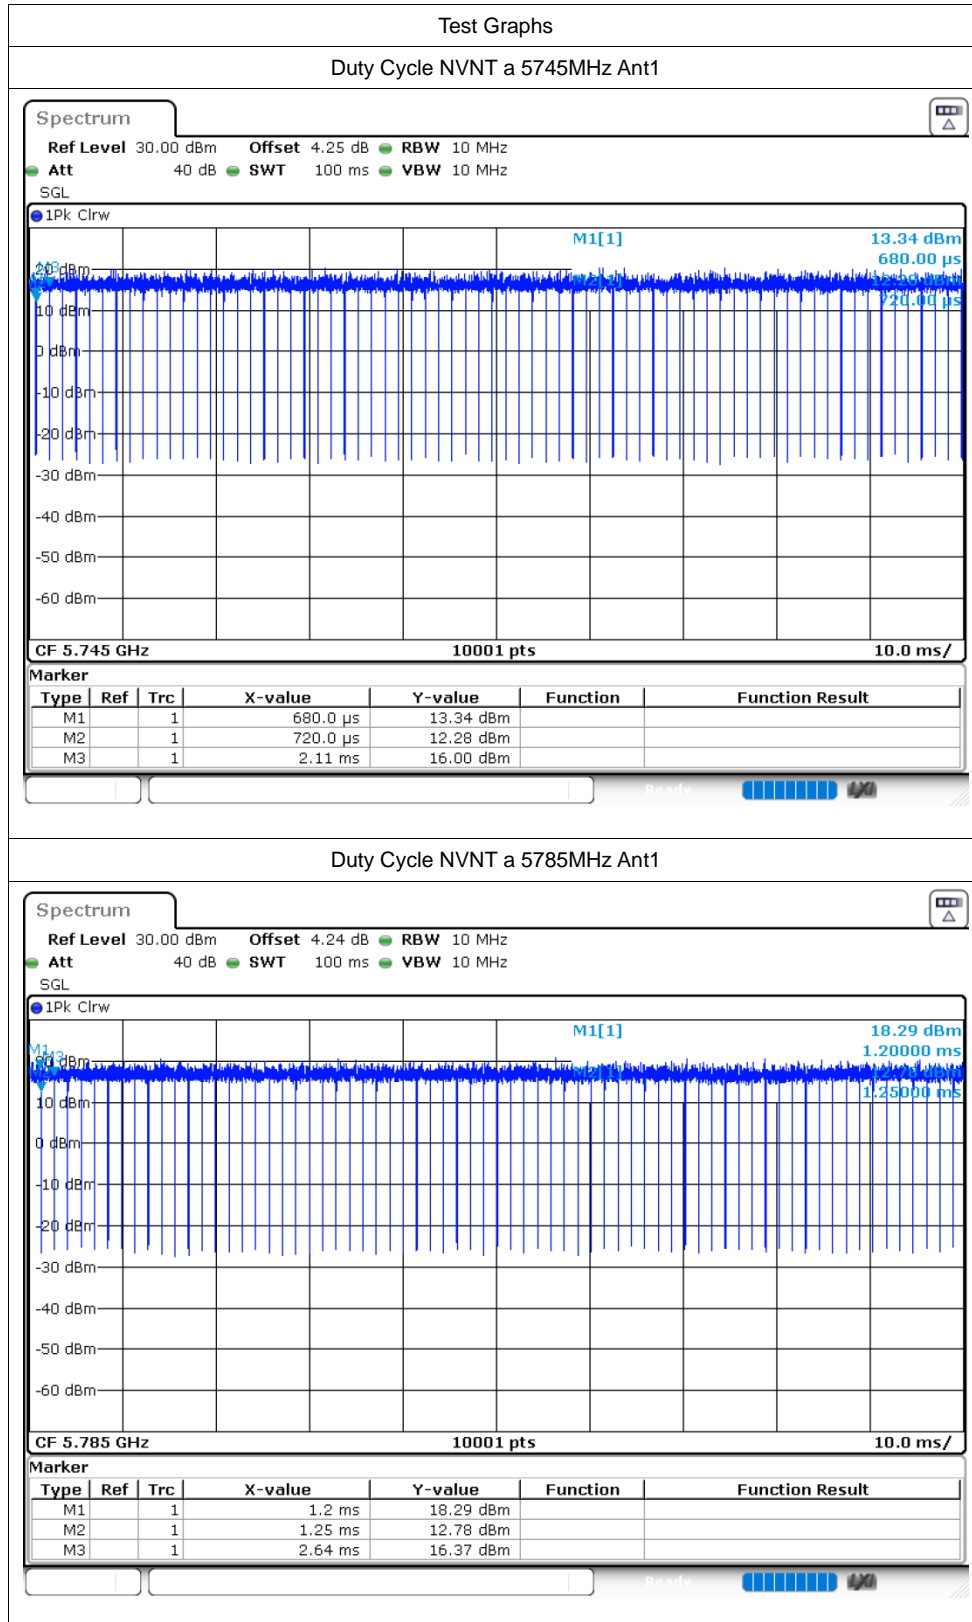

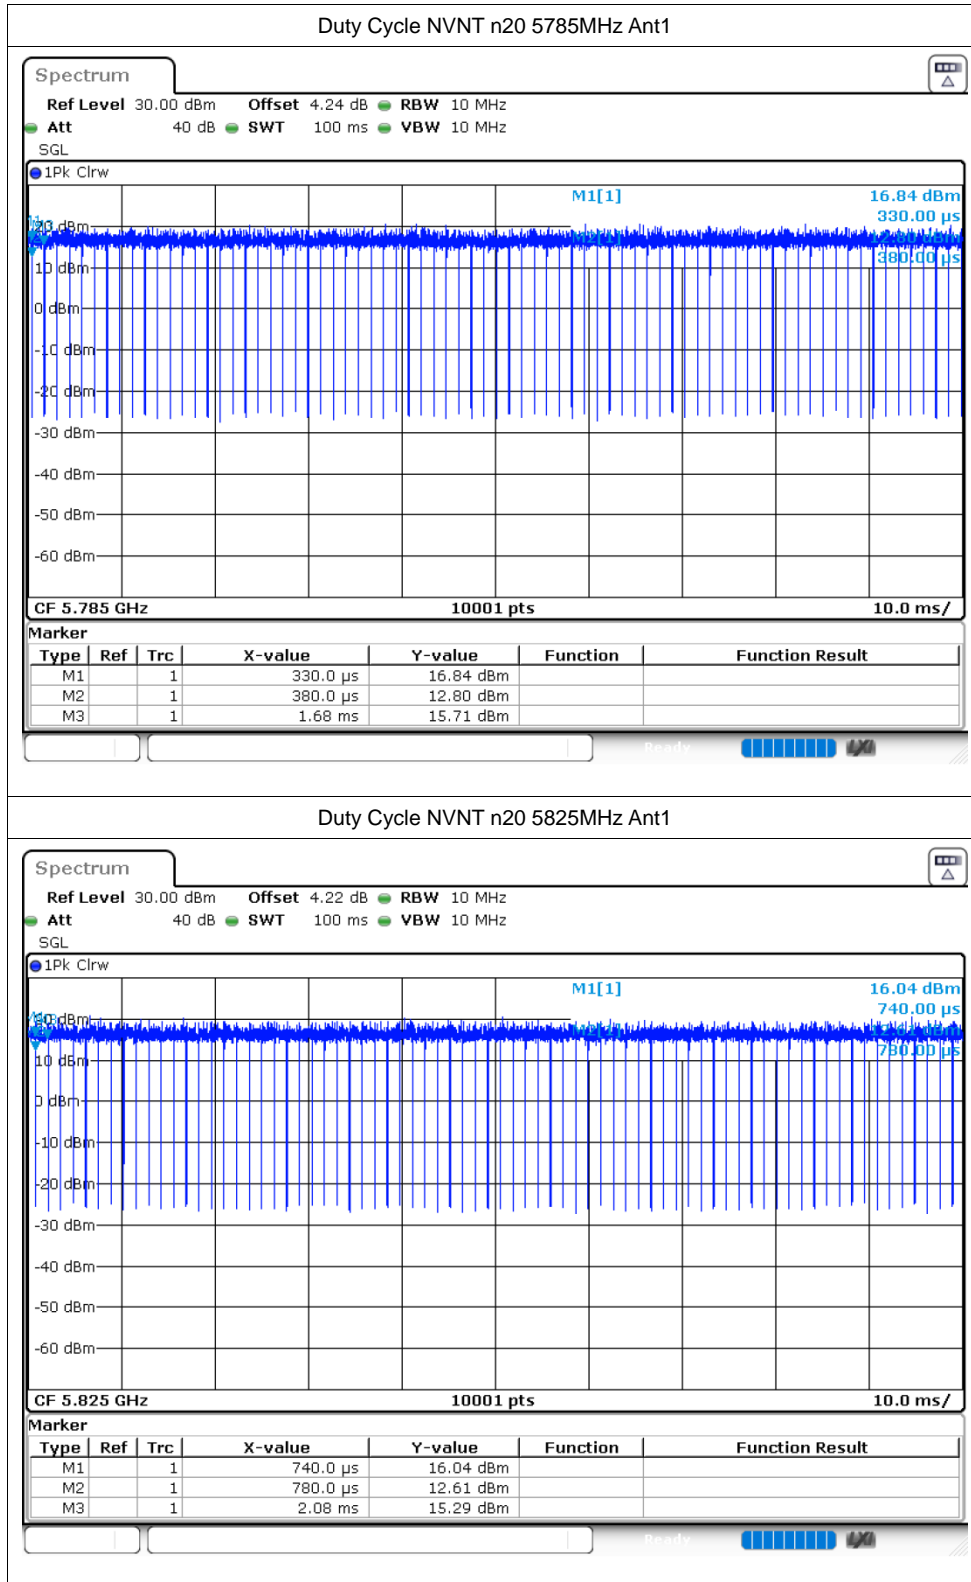

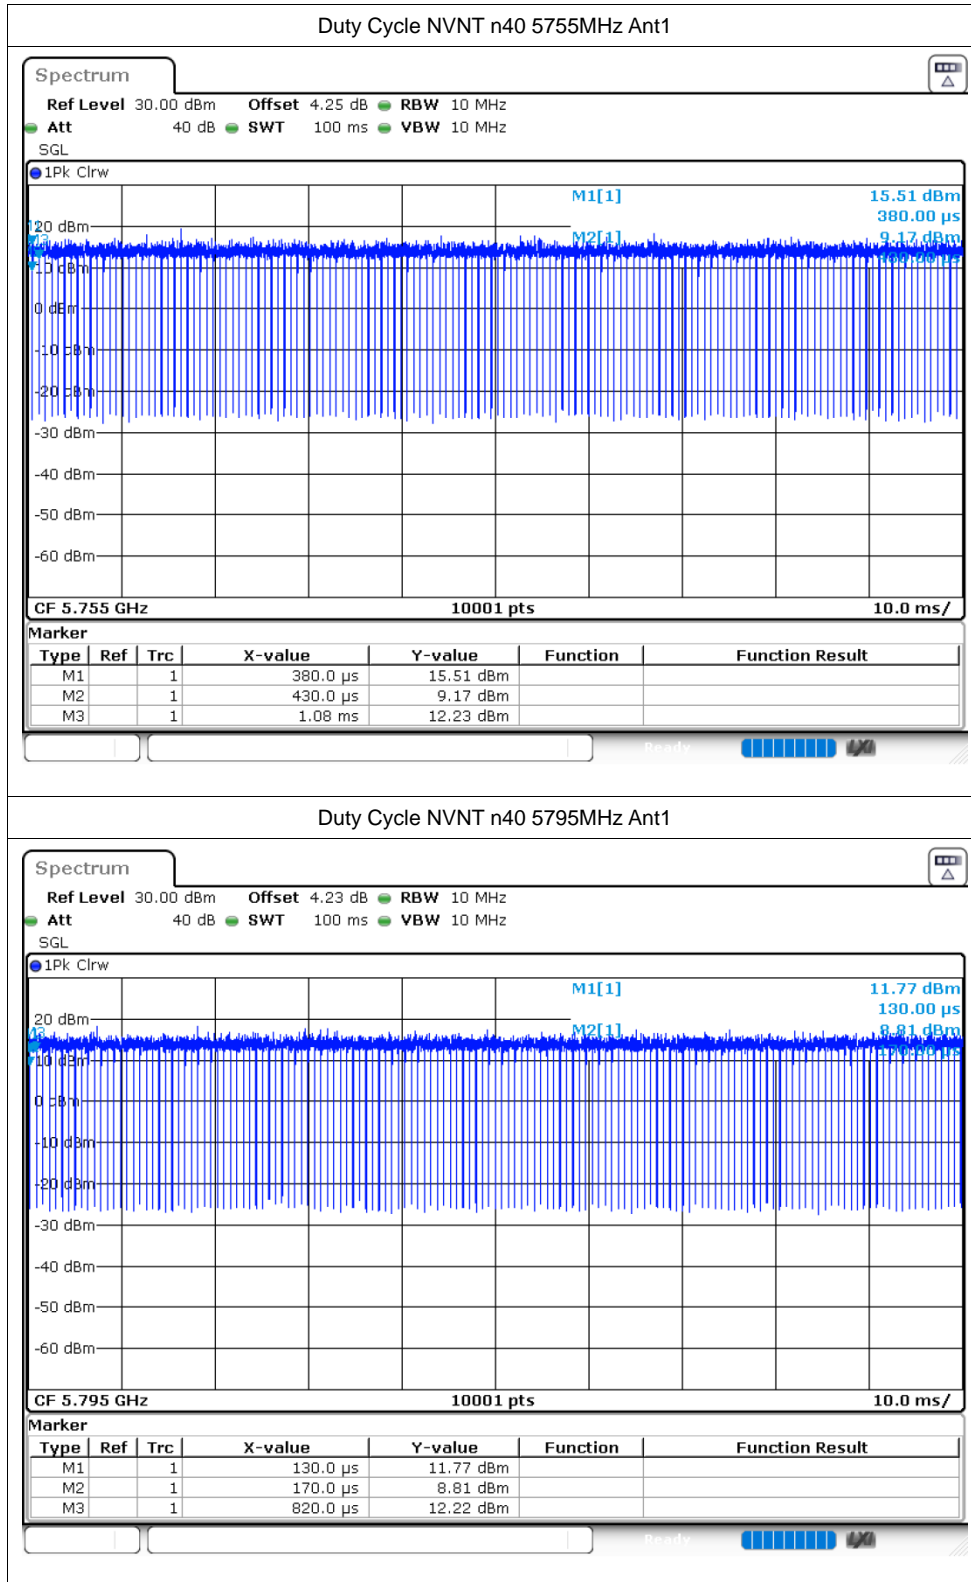




Maximum Conducted Output Power



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.81	0.11	11.92	30	Pass
NVNT	a	5785	Ant1	12.23	0.11	12.34	30	Pass
NVNT	a	5825	Ant1	12.15	0.11	12.26	30	Pass
NVNT	n20	5745	Ant1	11.71	0.11	11.82	30	Pass
NVNT	n20	5785	Ant1	12.04	0.11	12.15	30	Pass
NVNT	n20	5825	Ant1	12.01	0.11	12.12	30	Pass
NVNT	n40	5755	Ant1	11.84	0.22	12.06	30	Pass
NVNT	n40	5795	Ant1	11.98	0.22	12.2	30	Pass
NVNT	ac20	5745	Ant1	12.38	0.11	12.49	30	Pass
NVNT	ac20	5785	Ant1	12.47	0.11	12.58	30	Pass
NVNT	ac20	5825	Ant1	12.53	0.11	12.64	30	Pass
NVNT	ac40	5755	Ant1	12.36	0.22	12.58	30	Pass
NVNT	ac40	5795	Ant1	12.55	0.22	12.77	30	Pass
NVNT	ac80	5775	Ant1	12.54	0.43	12.97	30	Pass



-6dB Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.302	0.5	Pass
NVNT	a	5785	Ant1	15.042	0.5	Pass
NVNT	a	5825	Ant1	16.317	0.5	Pass
NVNT	n20	5745	Ant1	13.473	0.5	Pass
NVNT	n20	5785	Ant1	13.119	0.5	Pass
NVNT	n20	5825	Ant1	17.583	0.5	Pass
NVNT	n40	5755	Ant1	30.006	0.5	Pass
NVNT	n40	5795	Ant1	30.066	0.5	Pass
NVNT	ac20	5745	Ant1	12.954	0.5	Pass
NVNT	ac20	5785	Ant1	12.645	0.5	Pass
NVNT	ac20	5825	Ant1	17.523	0.5	Pass
NVNT	ac40	5755	Ant1	35.094	0.5	Pass
NVNT	ac40	5795	Ant1	35.076	0.5	Pass
NVNT	ac80	5775	Ant1	75.06	0.5	Pass


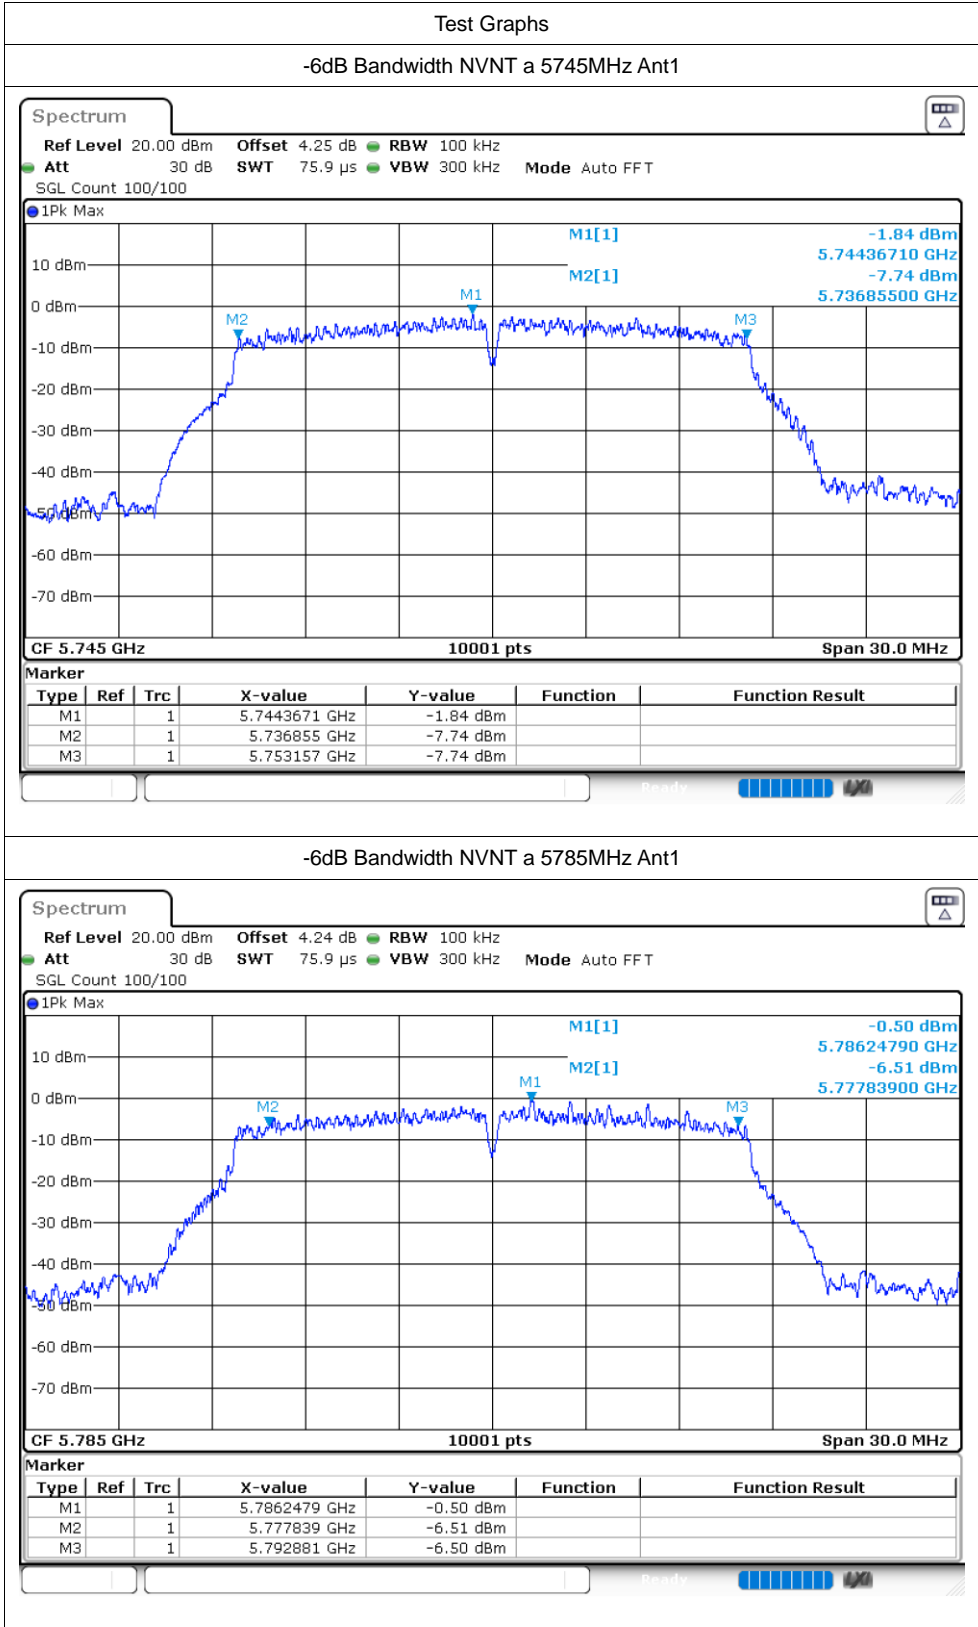


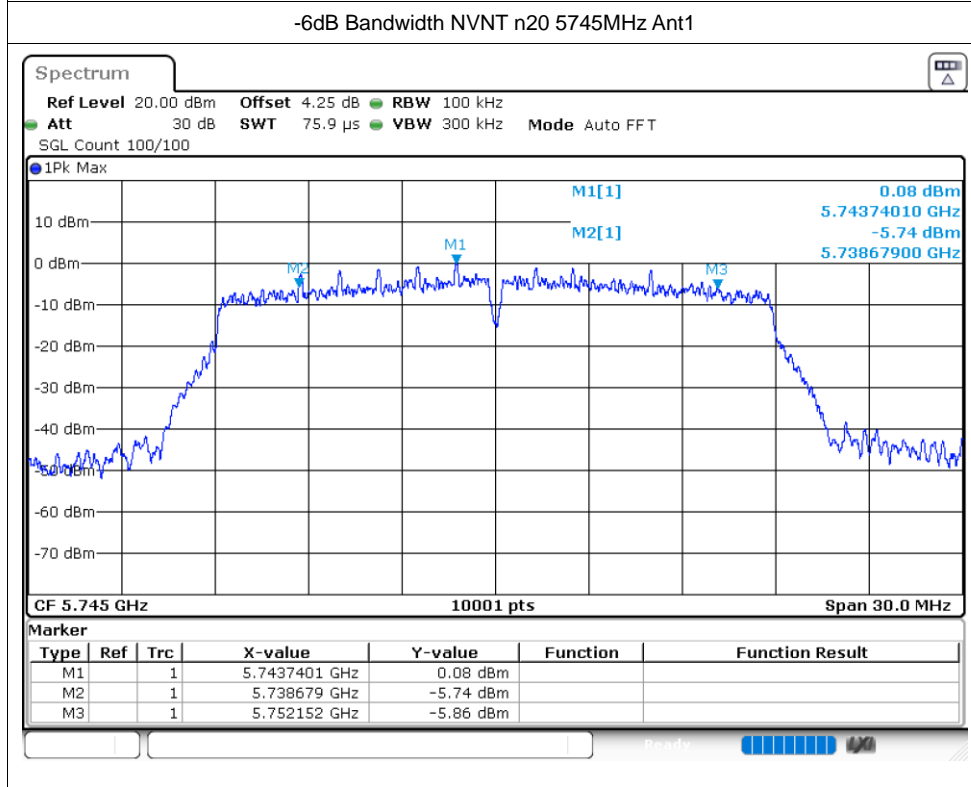
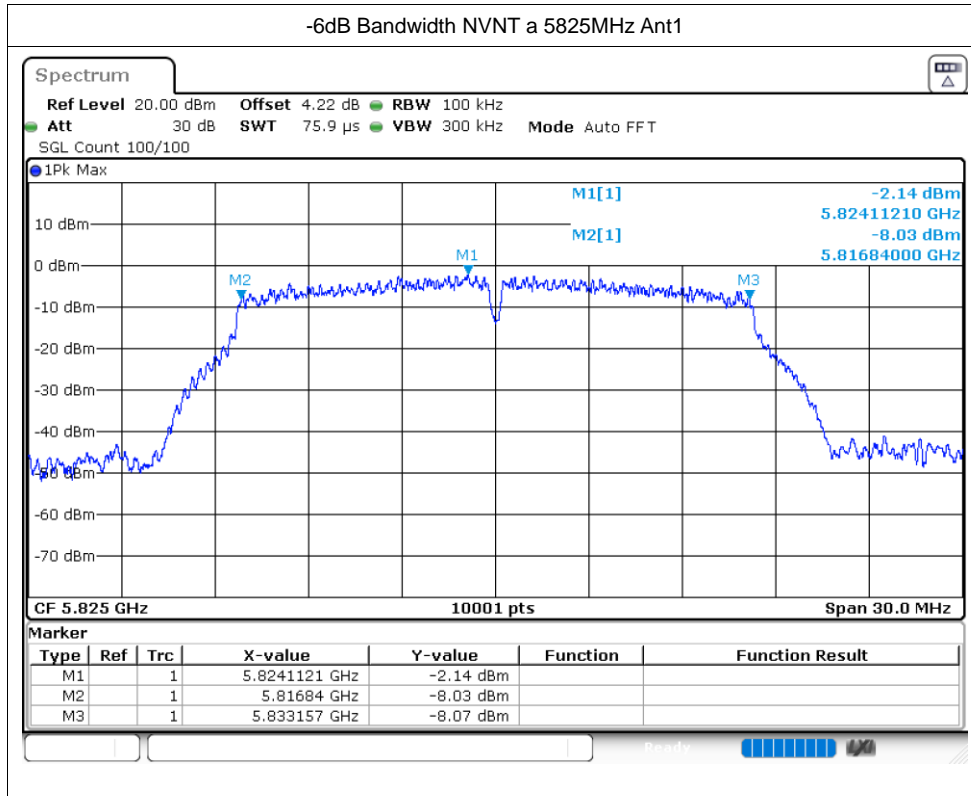


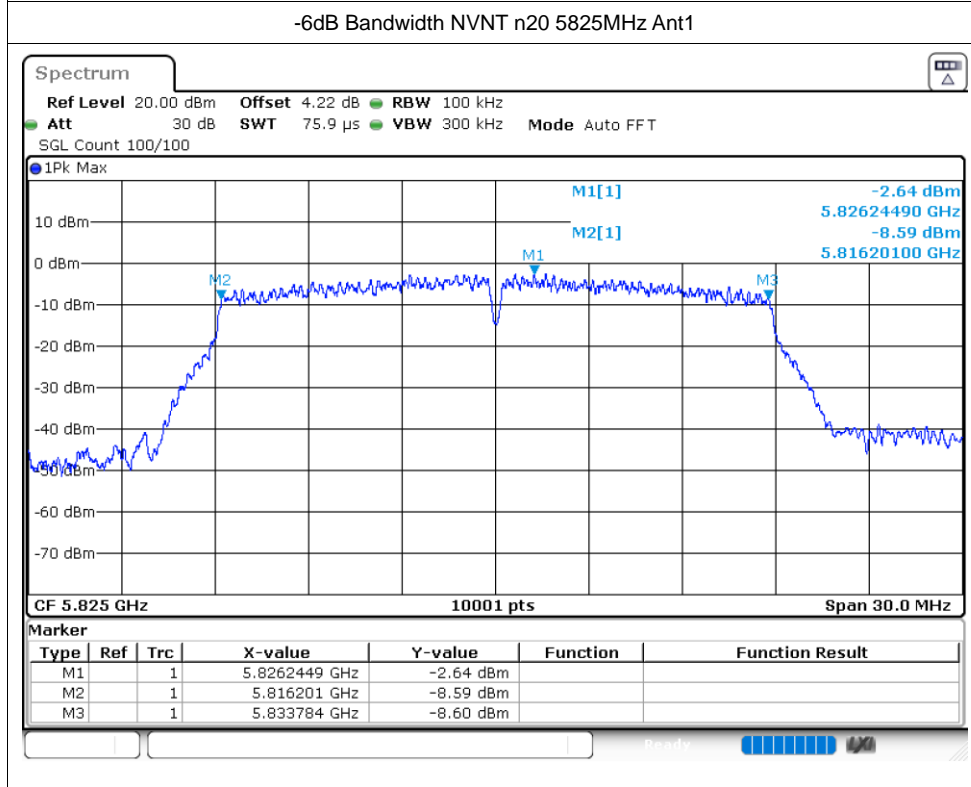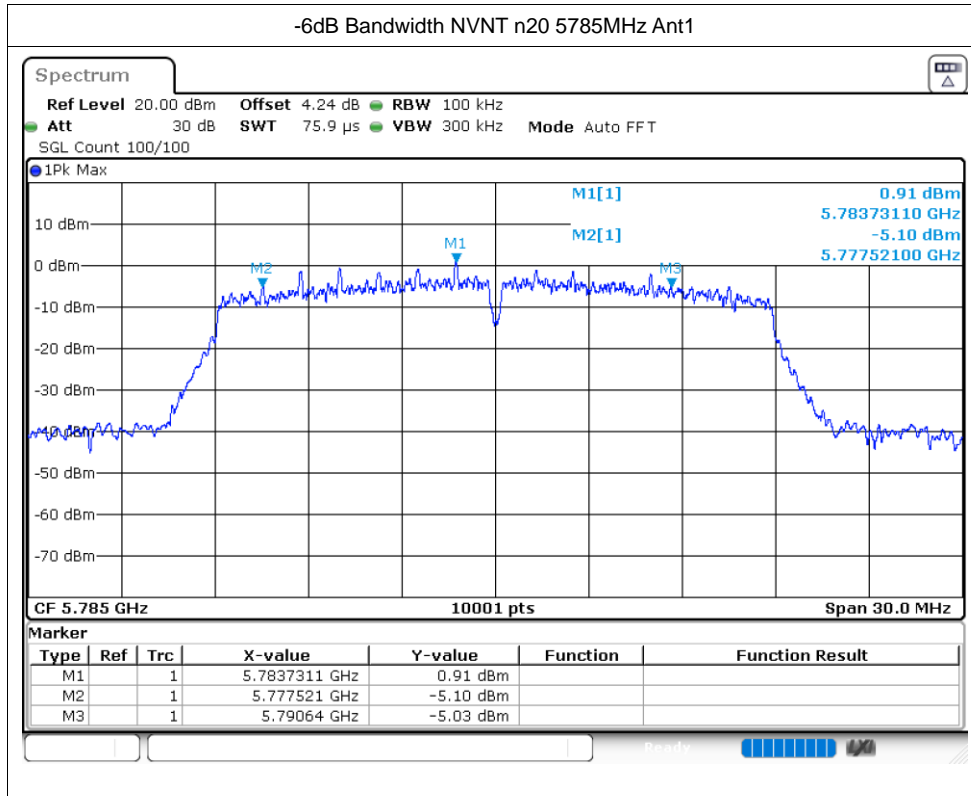

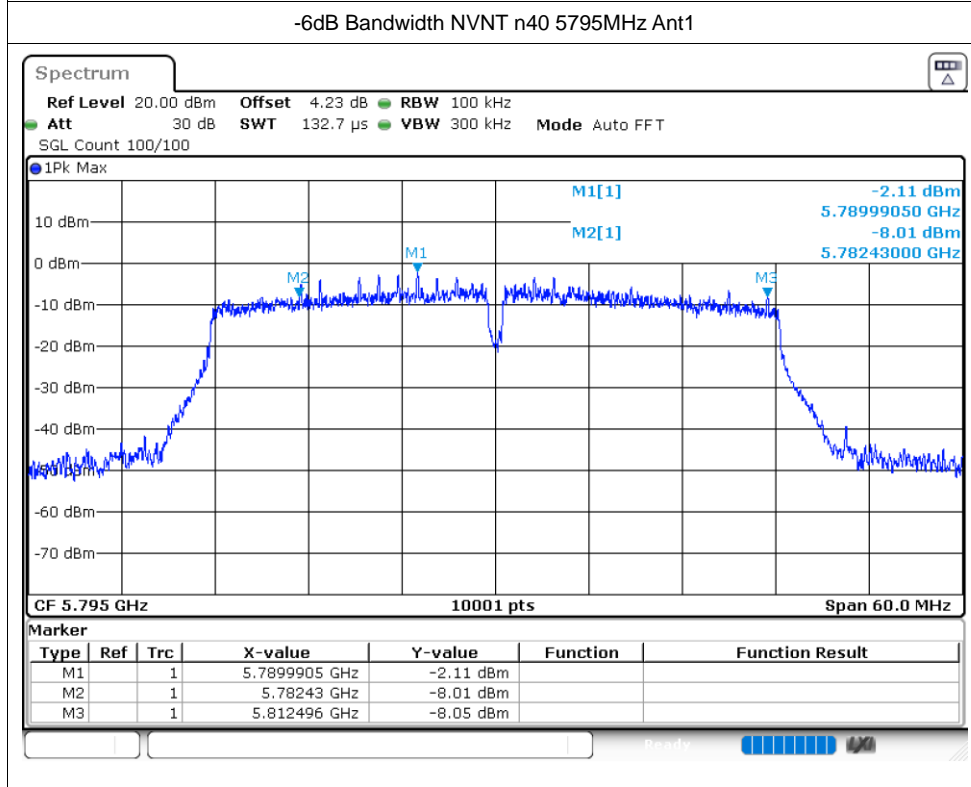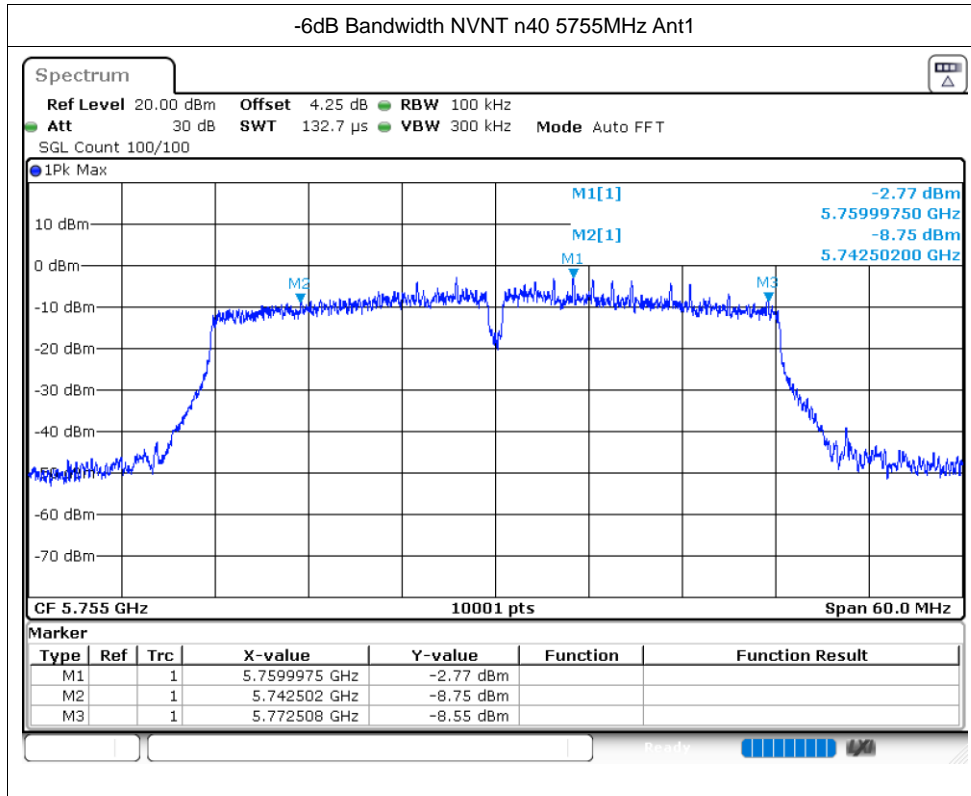

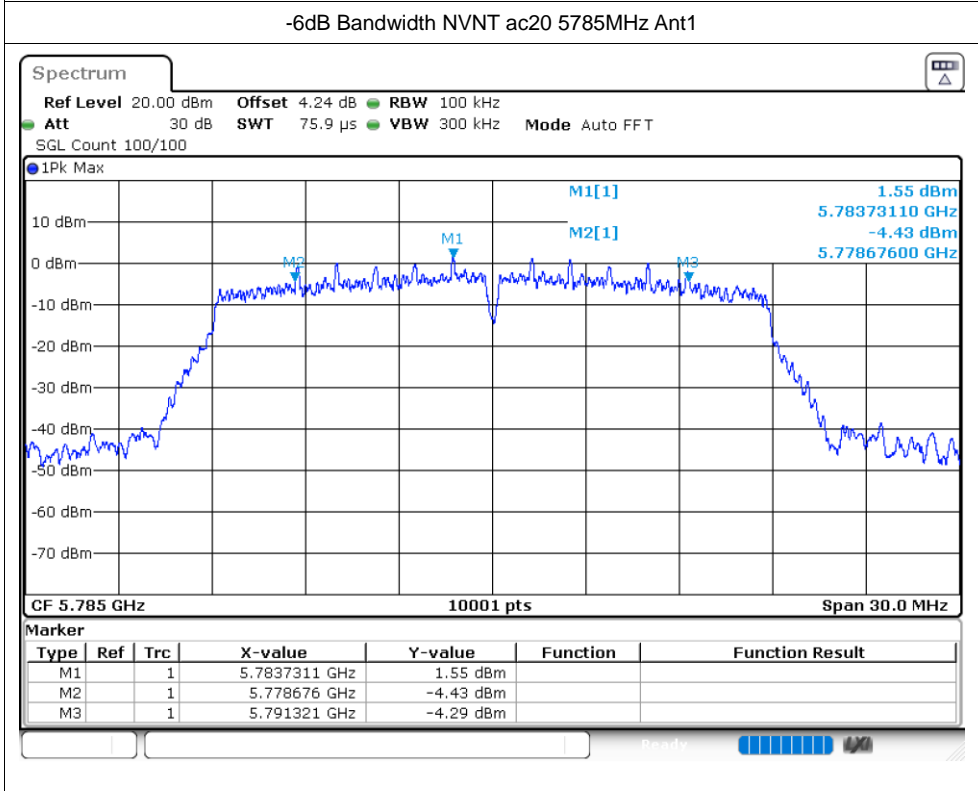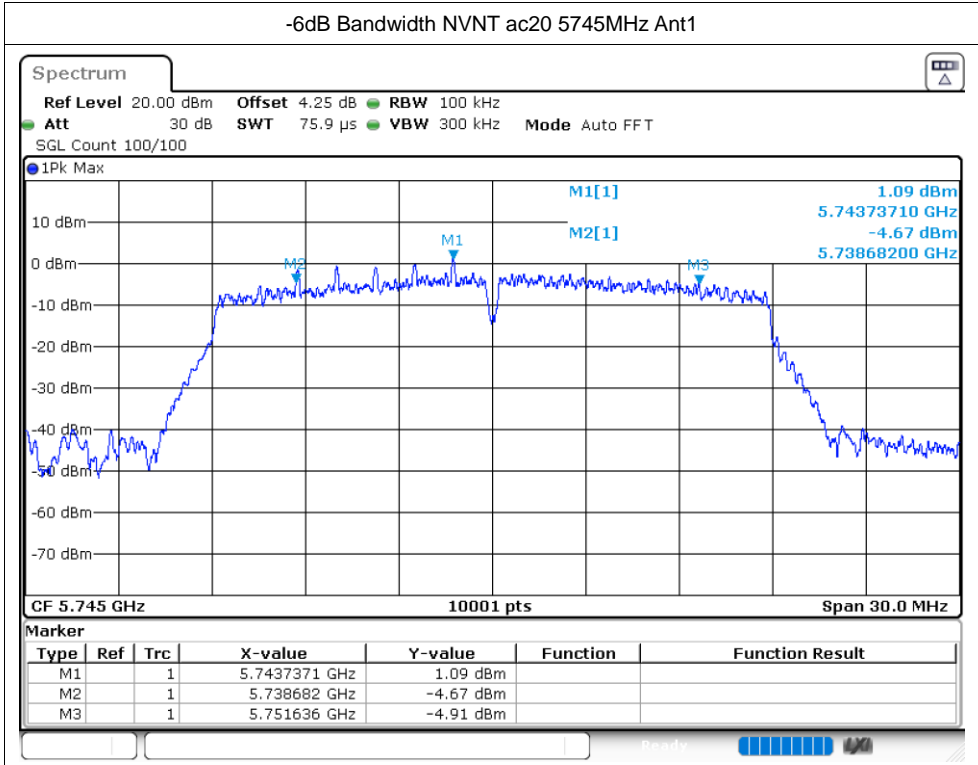


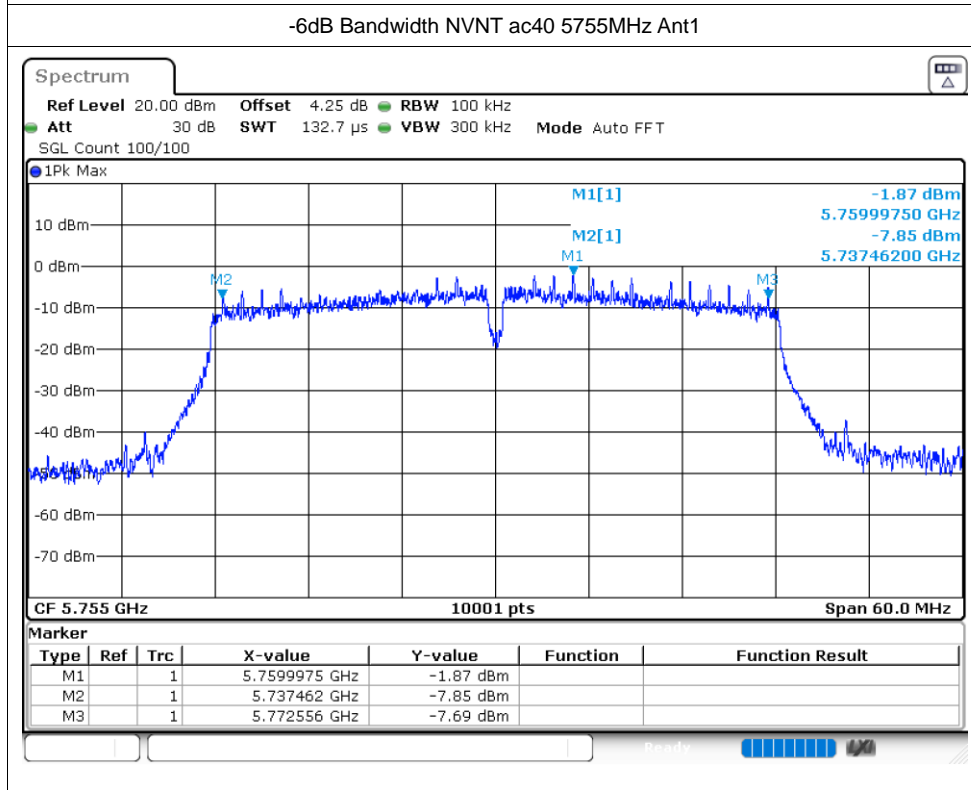
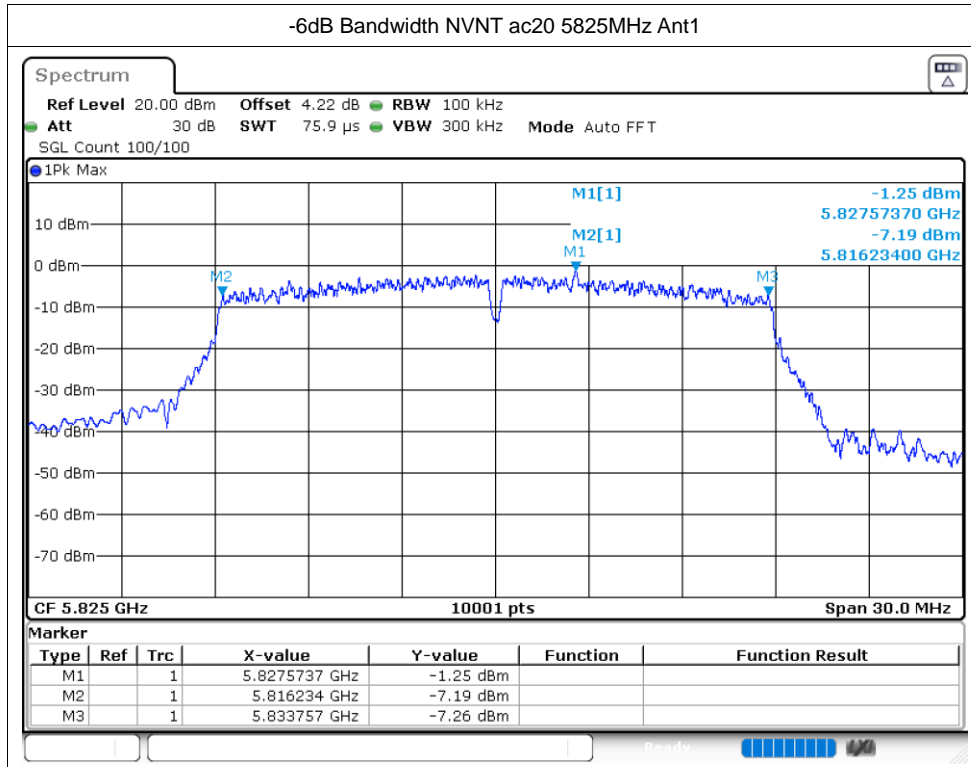


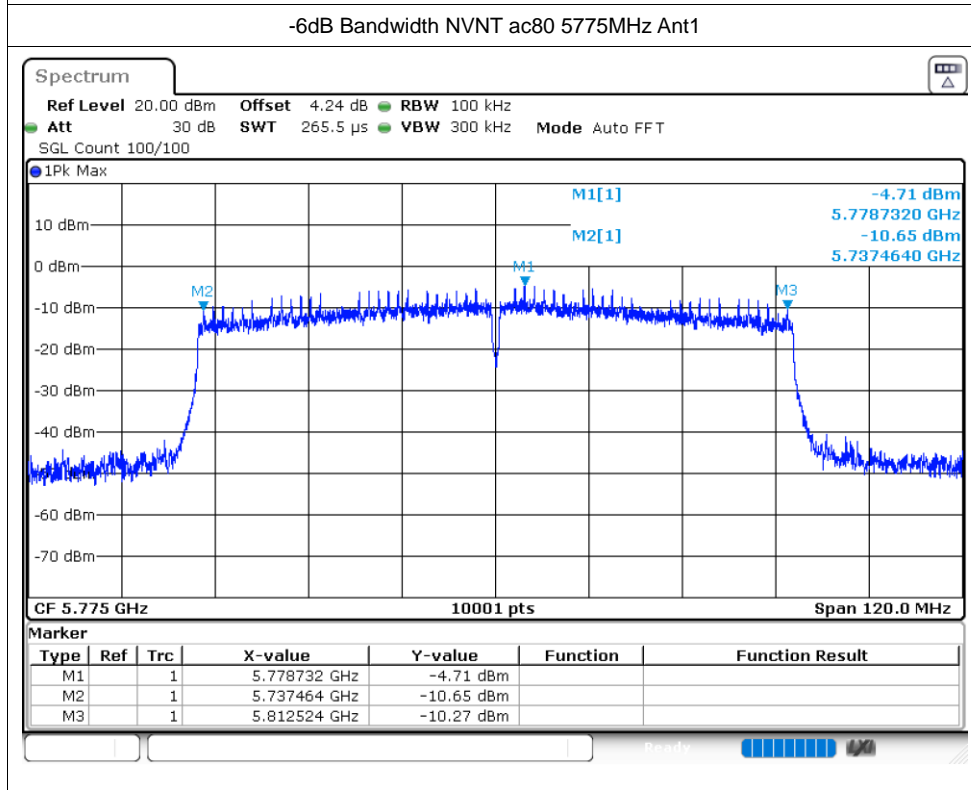
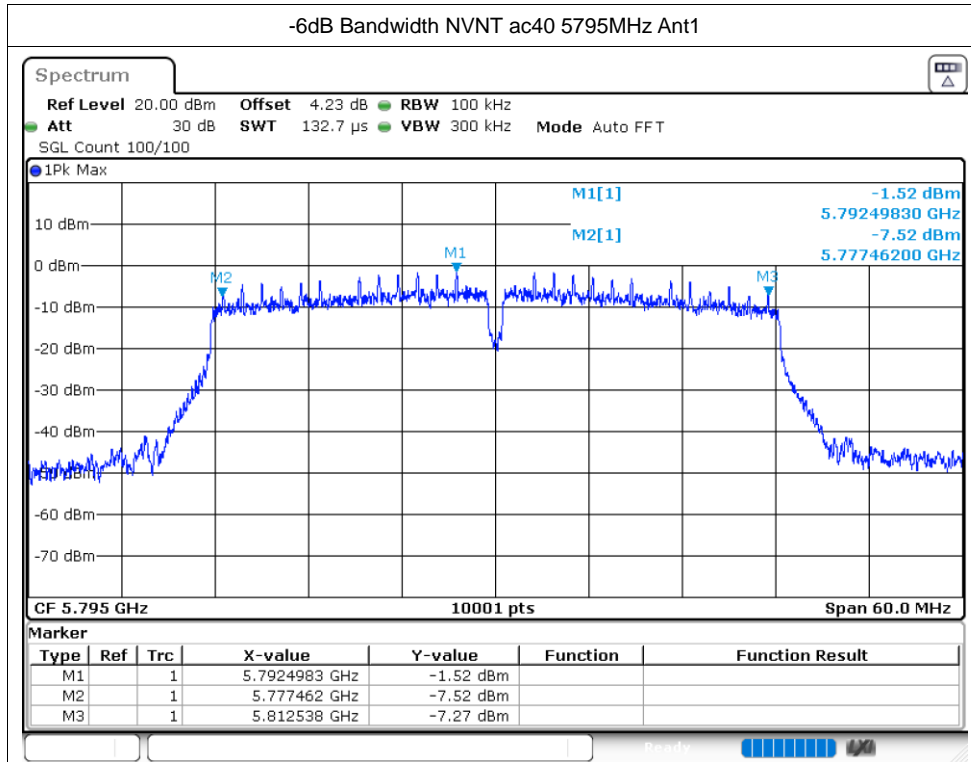




Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.462
NVNT	a	5785	Ant1	16.366
NVNT	a	5825	Ant1	16.423
NVNT	n20	5745	Ant1	17.497
NVNT	n20	5785	Ant1	17.53
NVNT	n20	5825	Ant1	17.56
NVNT	n40	5755	Ant1	35.972
NVNT	n40	5795	Ant1	36.032
NVNT	ac20	5745	Ant1	17.704
NVNT	ac20	5785	Ant1	17.551
NVNT	ac20	5825	Ant1	17.512
NVNT	ac40	5755	Ant1	35.942
NVNT	ac40	5795	Ant1	36.002
NVNT	ac80	5775	Ant1	74.993


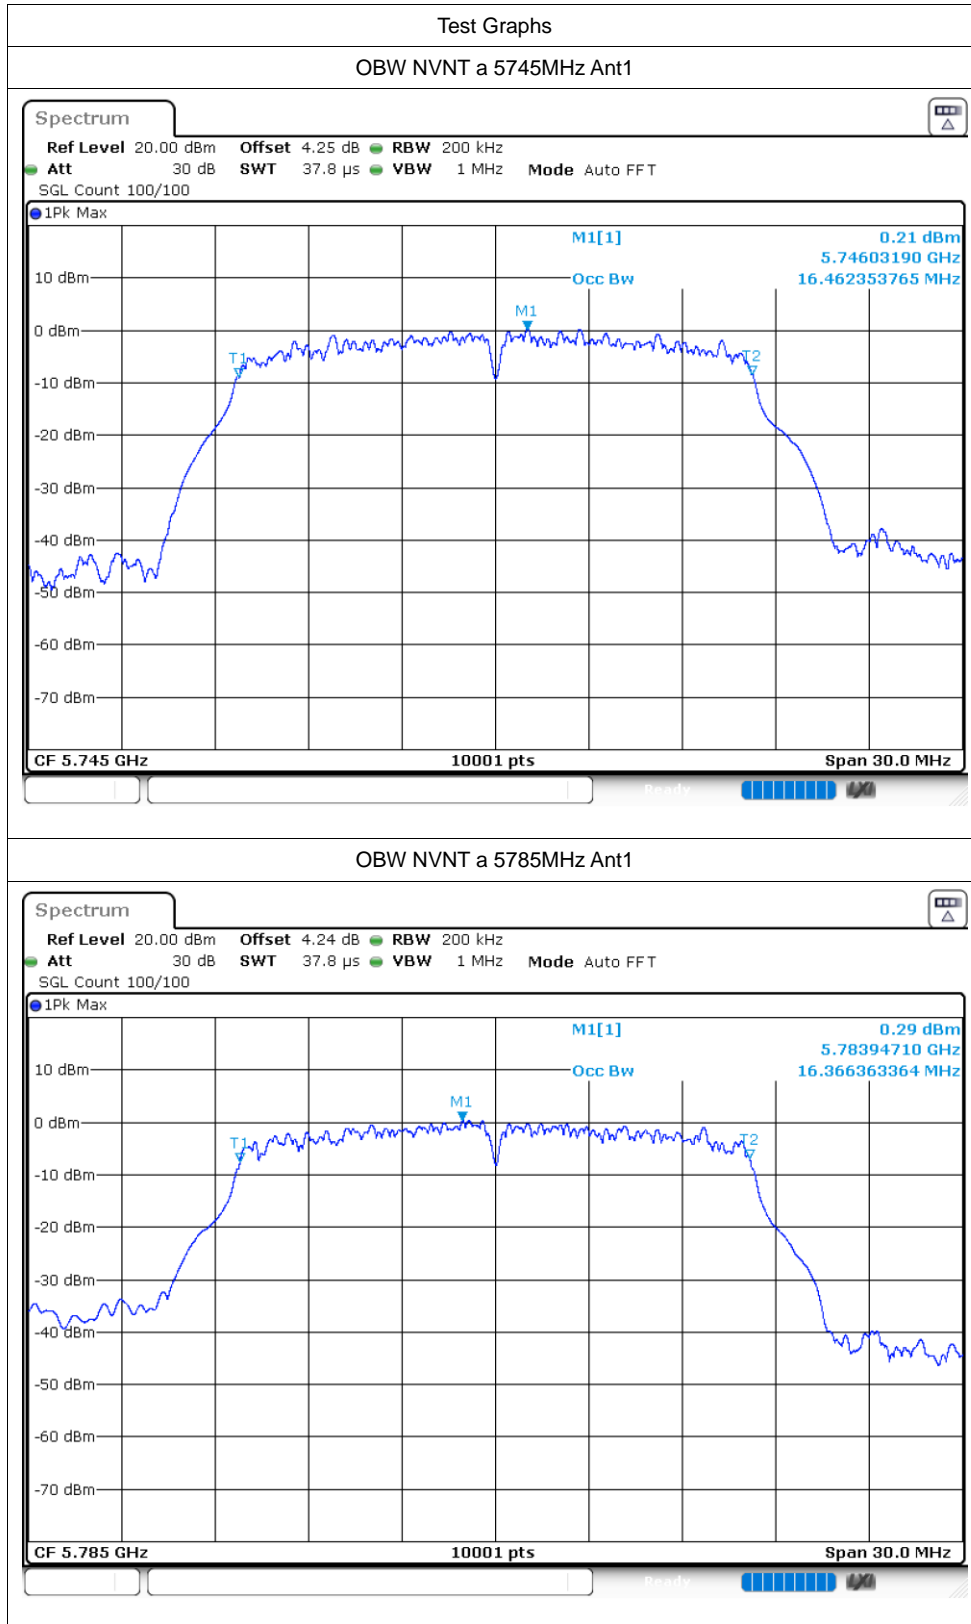


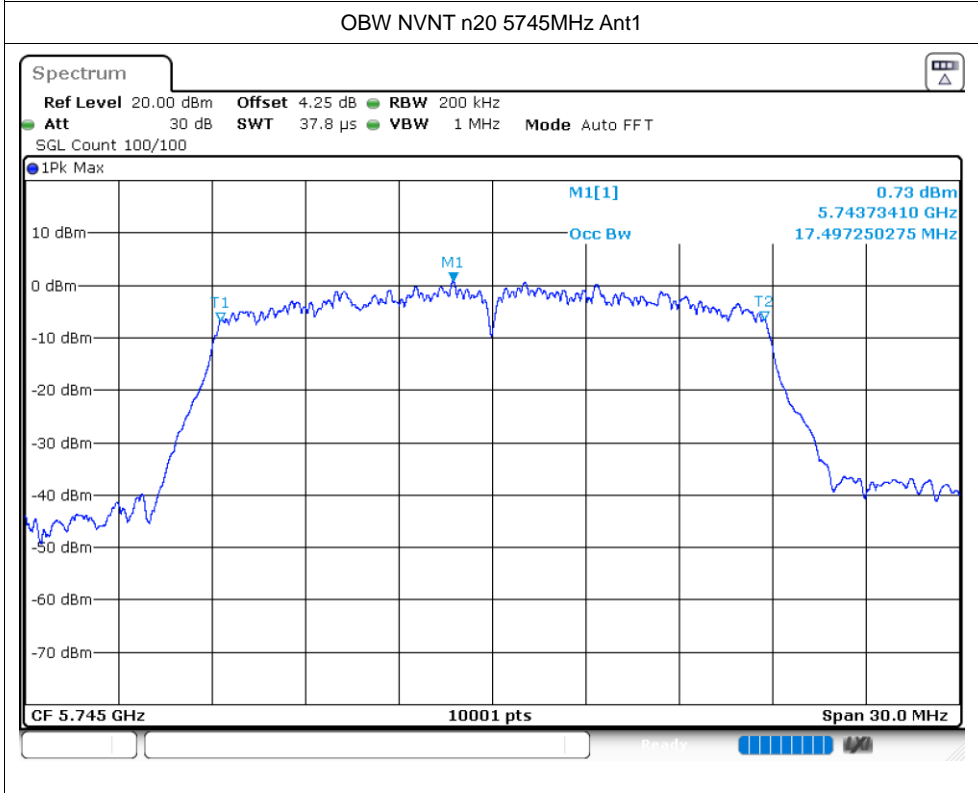
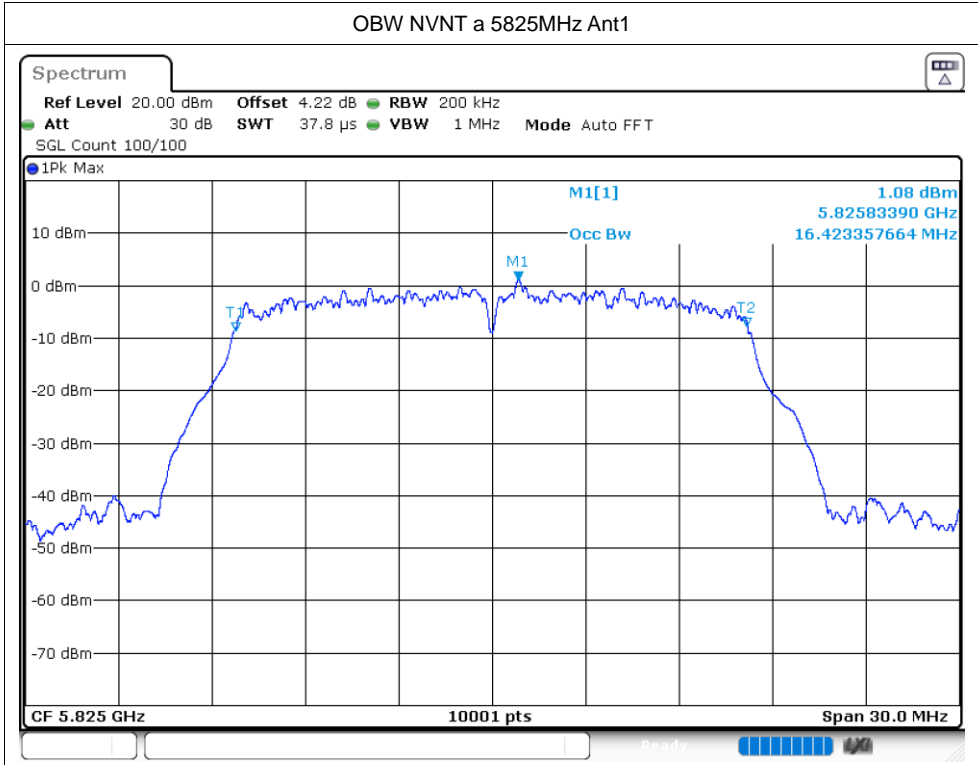


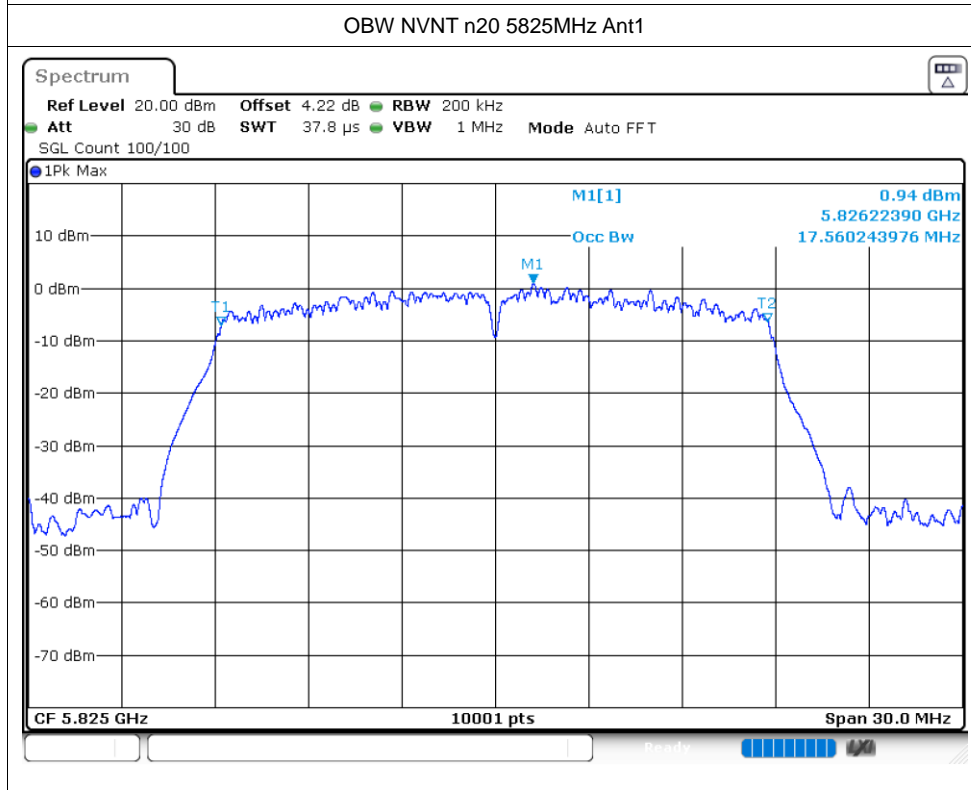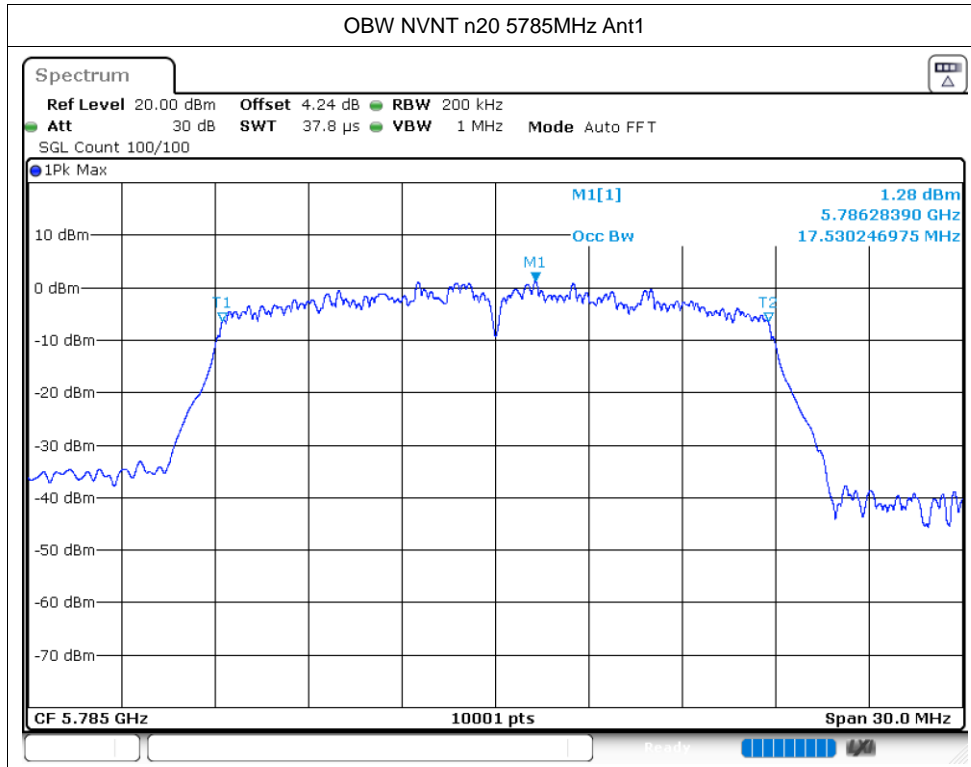

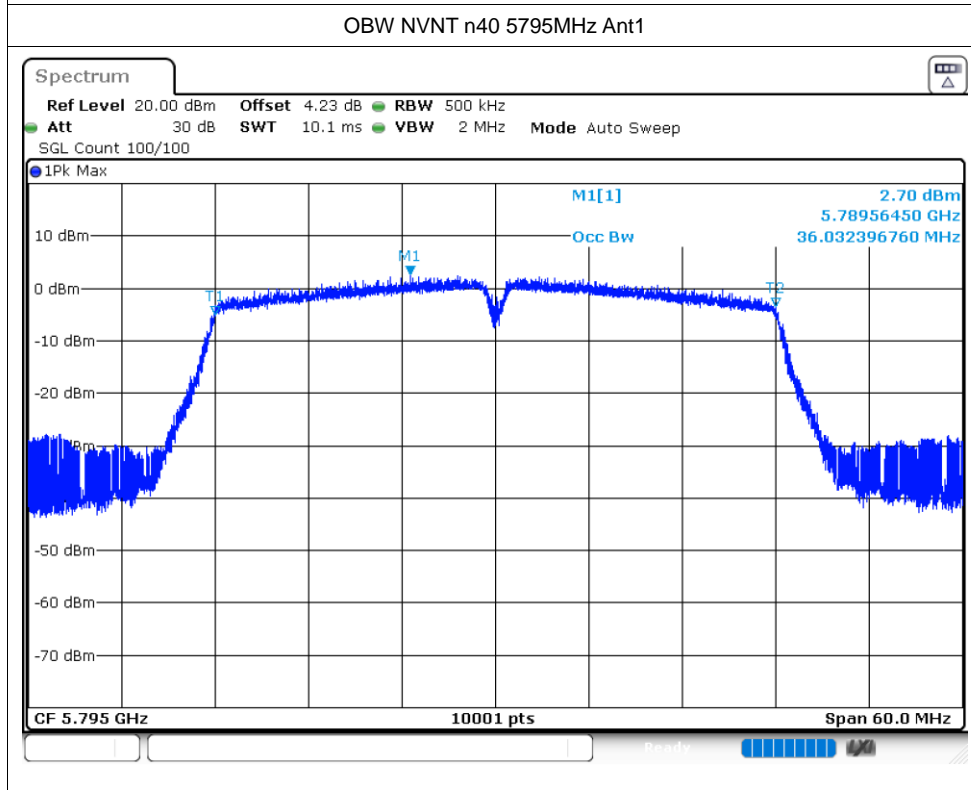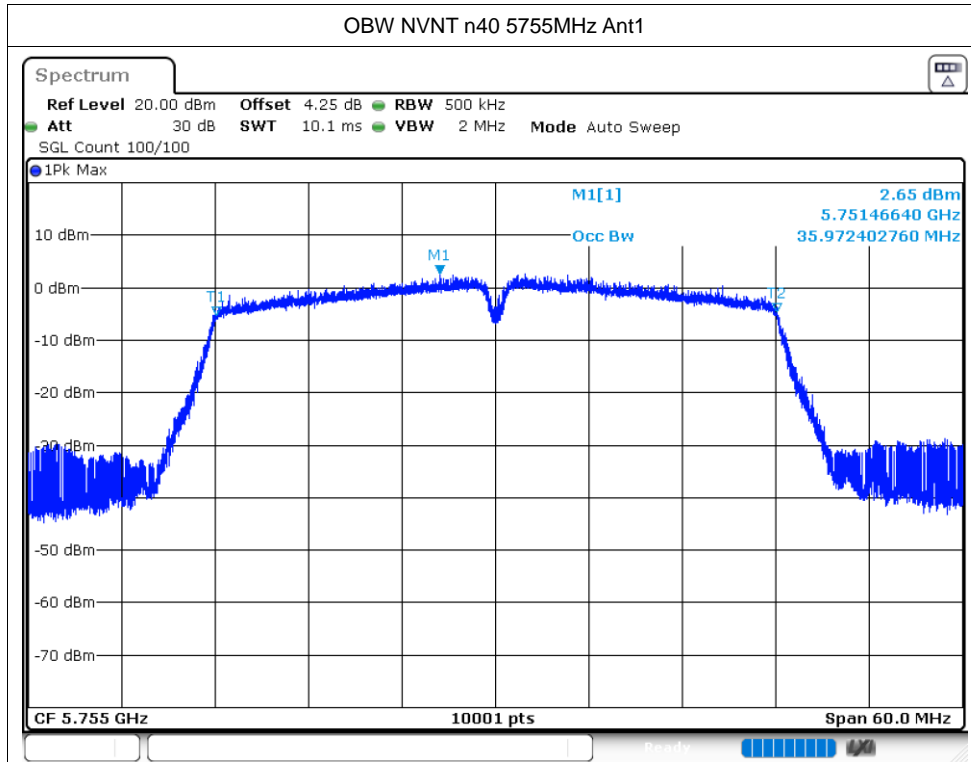

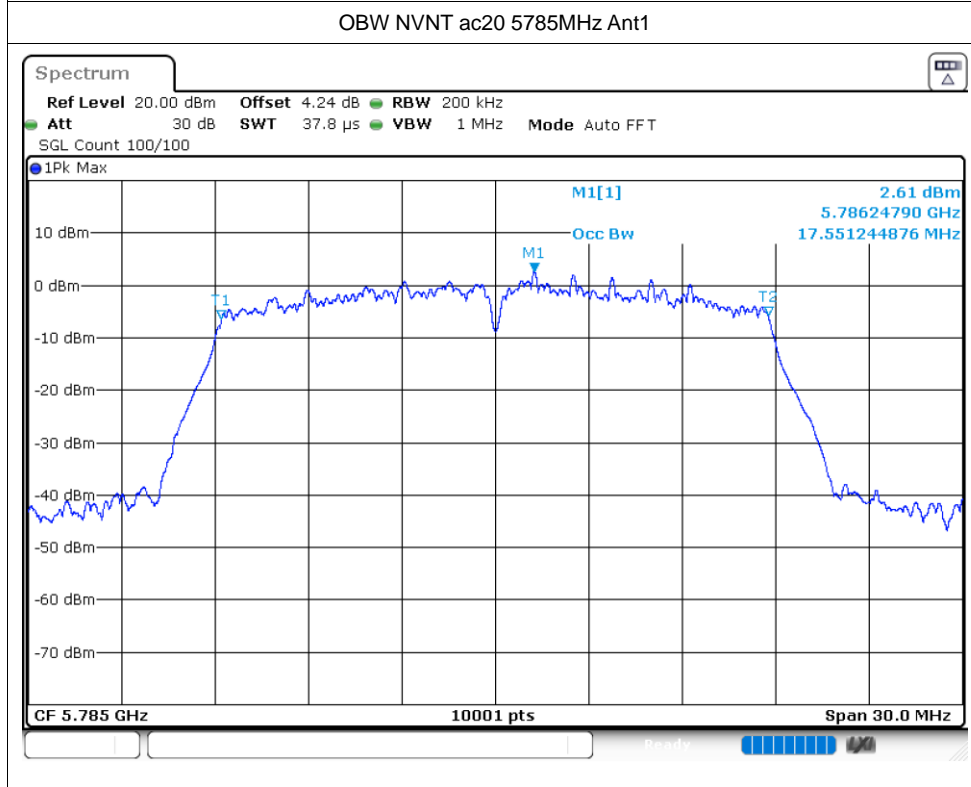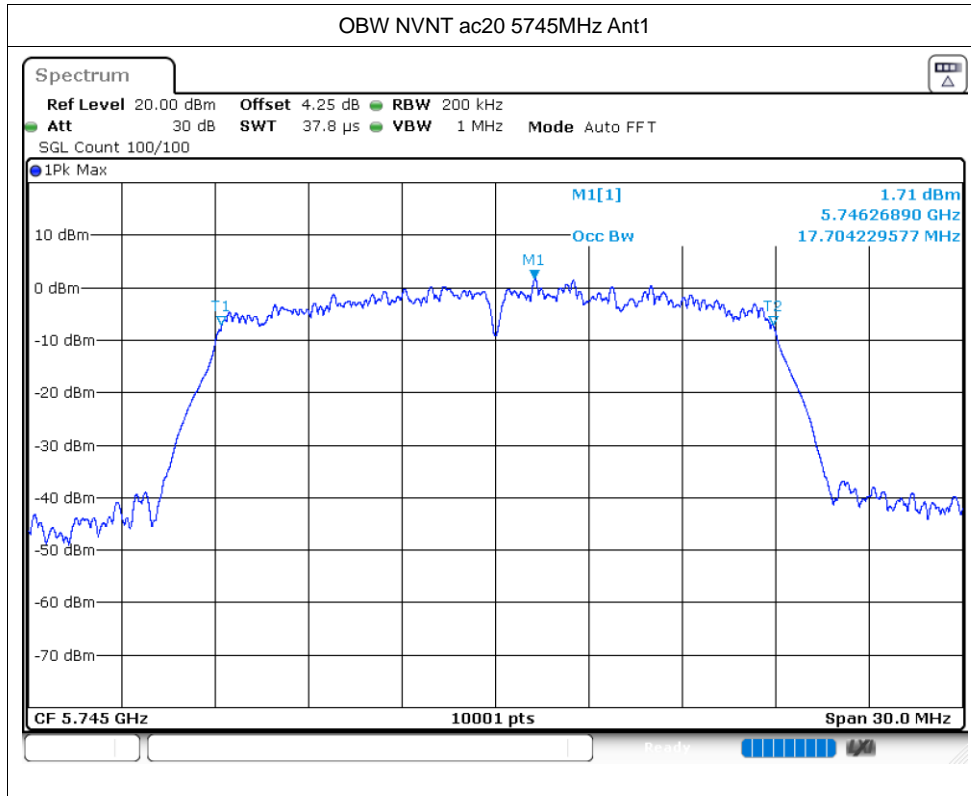

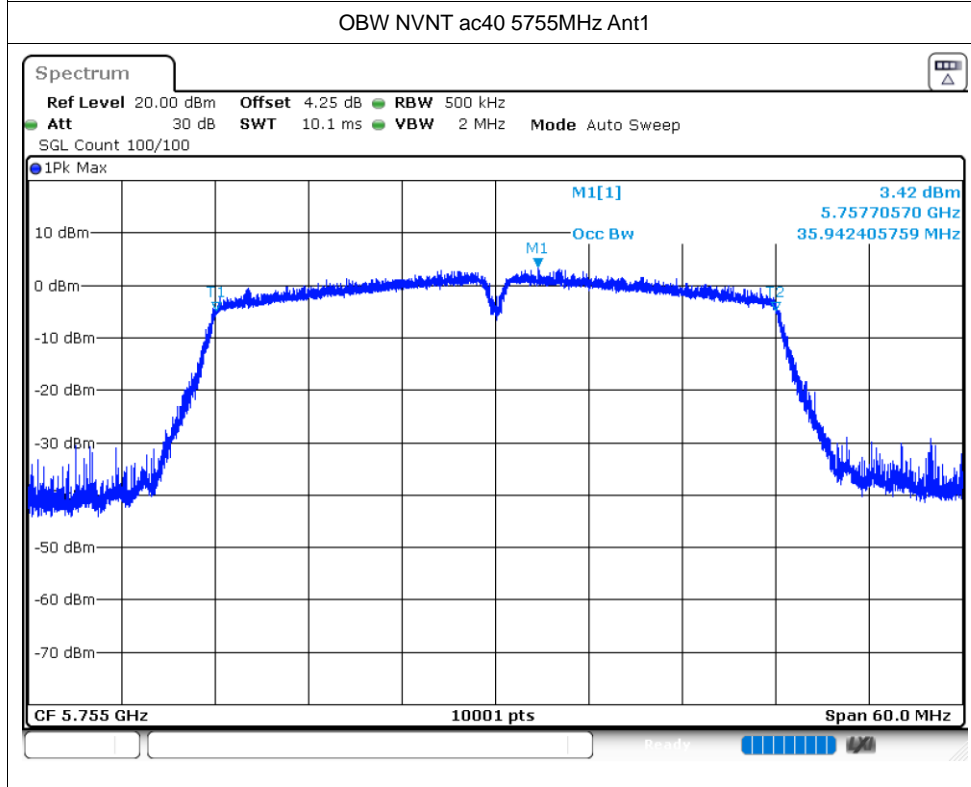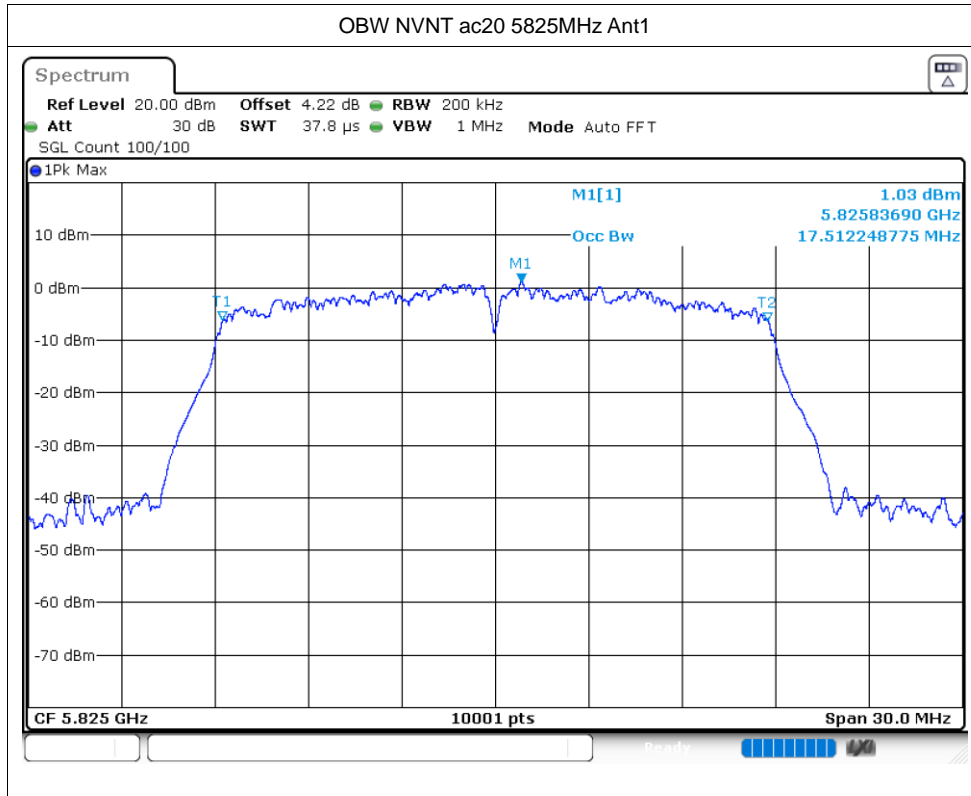

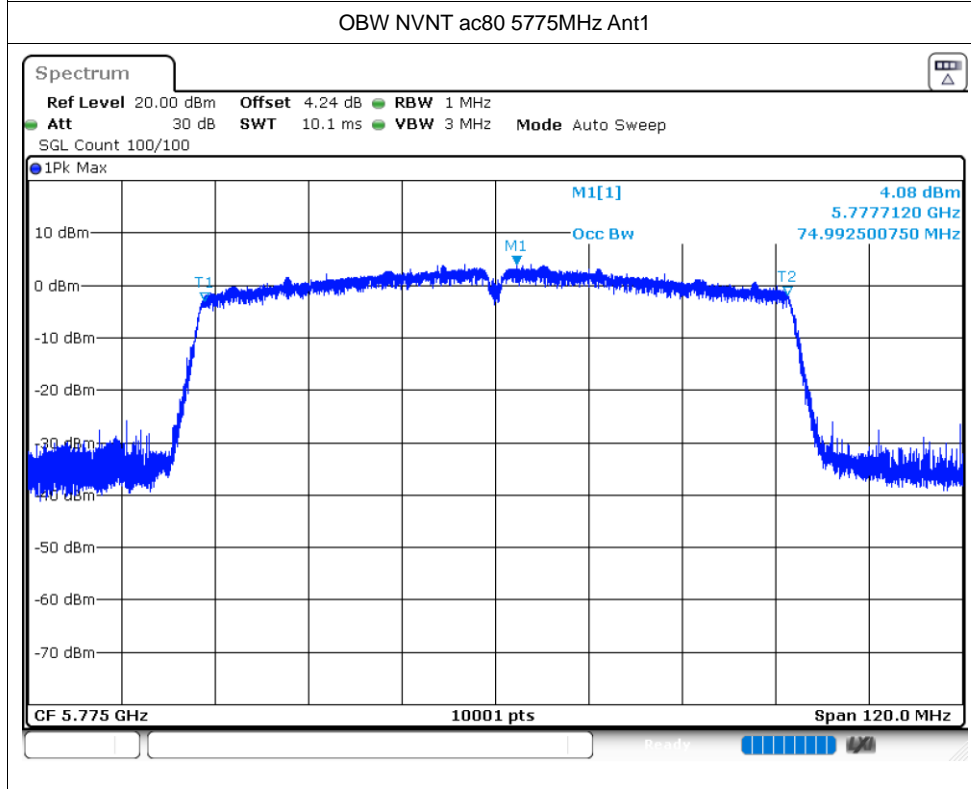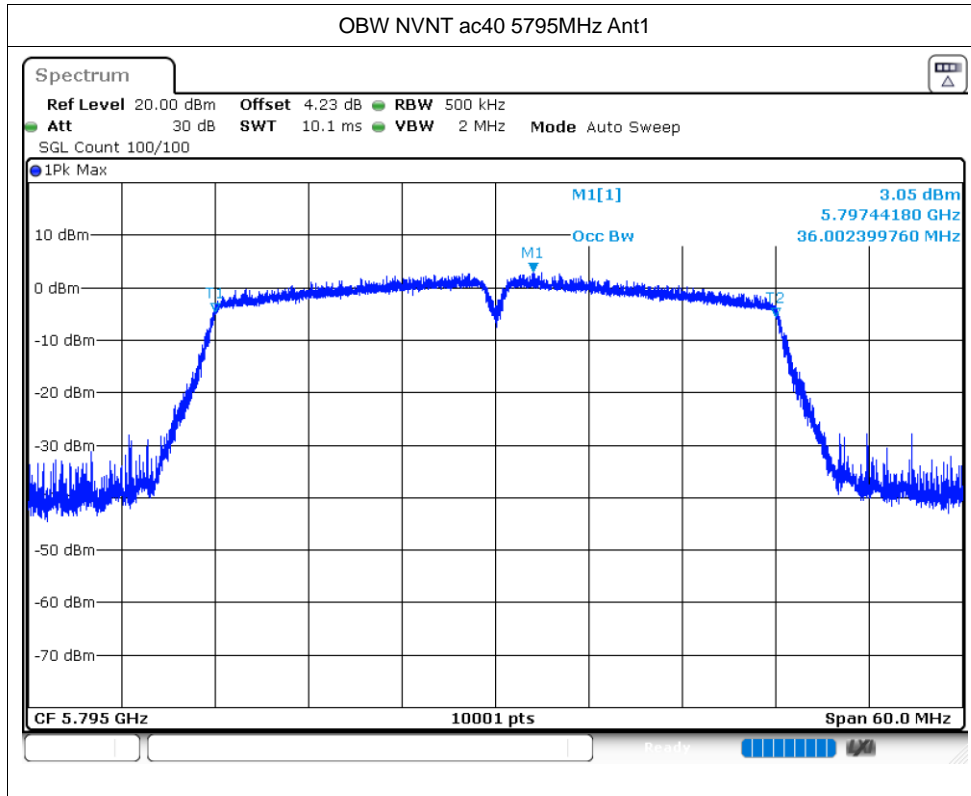


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-4.8	0.11	-4.69	30	Pass
NVNT	a	5785	Ant1	-4.31	0.11	-4.2	30	Pass
NVNT	a	5825	Ant1	-4.46	0.11	-4.35	30	Pass
NVNT	n20	5745	Ant1	-4.9	0.11	-4.79	30	Pass
NVNT	n20	5785	Ant1	-4.56	0.11	-4.45	30	Pass
NVNT	n20	5825	Ant1	-4.91	0.11	-4.8	30	Pass
NVNT	n40	5755	Ant1	-9.09	0.22	-8.87	30	Pass
NVNT	n40	5795	Ant1	-8.89	0.22	-8.67	30	Pass
NVNT	ac20	5745	Ant1	-4.83	0.11	-4.72	30	Pass
NVNT	ac20	5785	Ant1	-4.08	0.11	-3.97	30	Pass
NVNT	ac20	5825	Ant1	-4.19	0.11	-4.08	30	Pass
NVNT	ac40	5755	Ant1	-8.33	0.22	-8.11	30	Pass
NVNT	ac40	5795	Ant1	-8.66	0.22	-8.44	30	Pass
NVNT	ac80	5775	Ant1	-12.56	0.43	-12.13	30	Pass



Test Graphs



PSD NVNT a 5745MHz Ant1


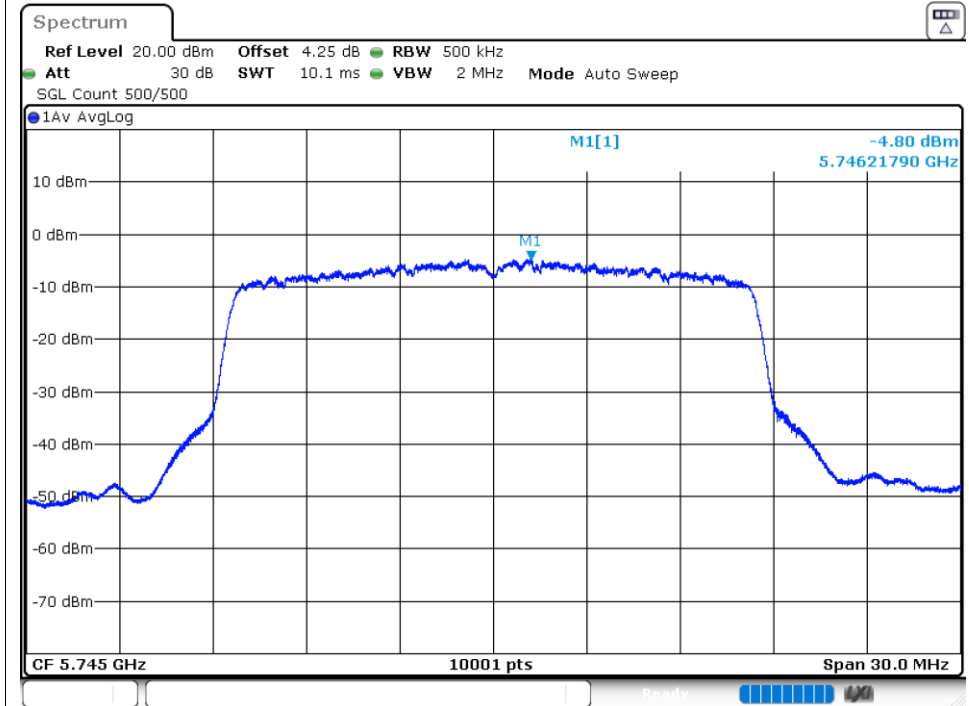




PSD NVNT a 5785MHz Ant1


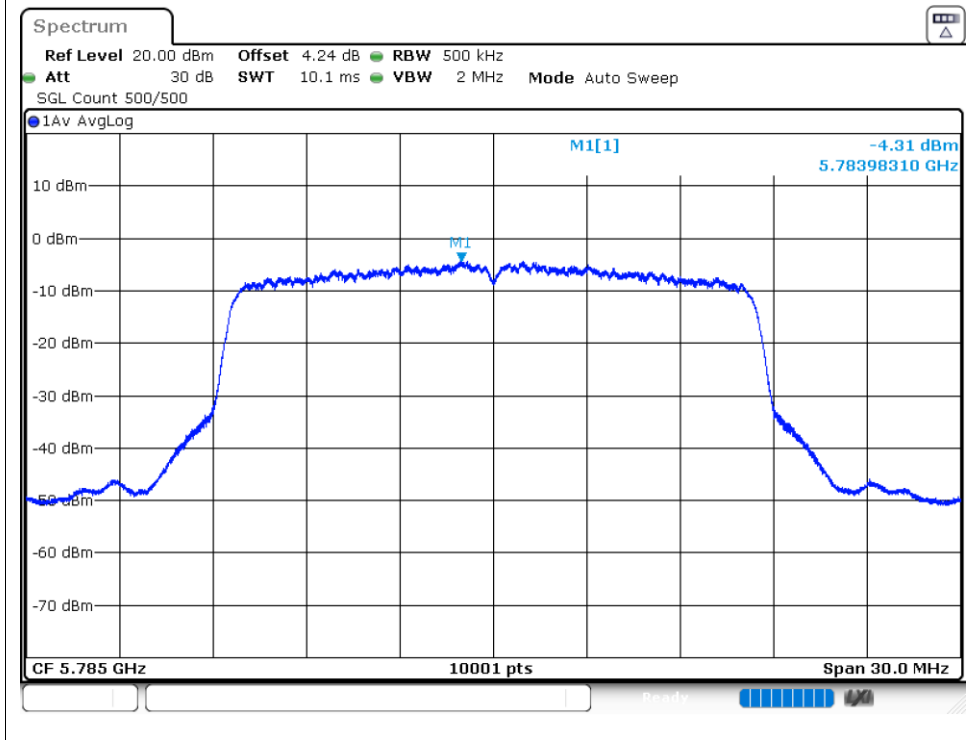


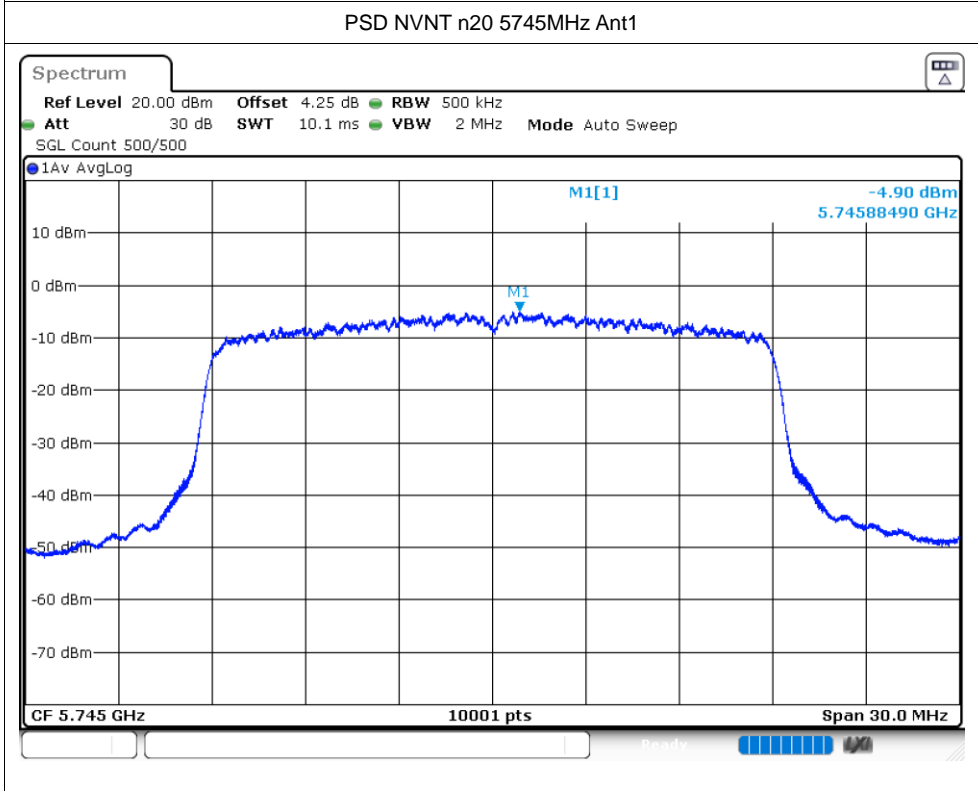
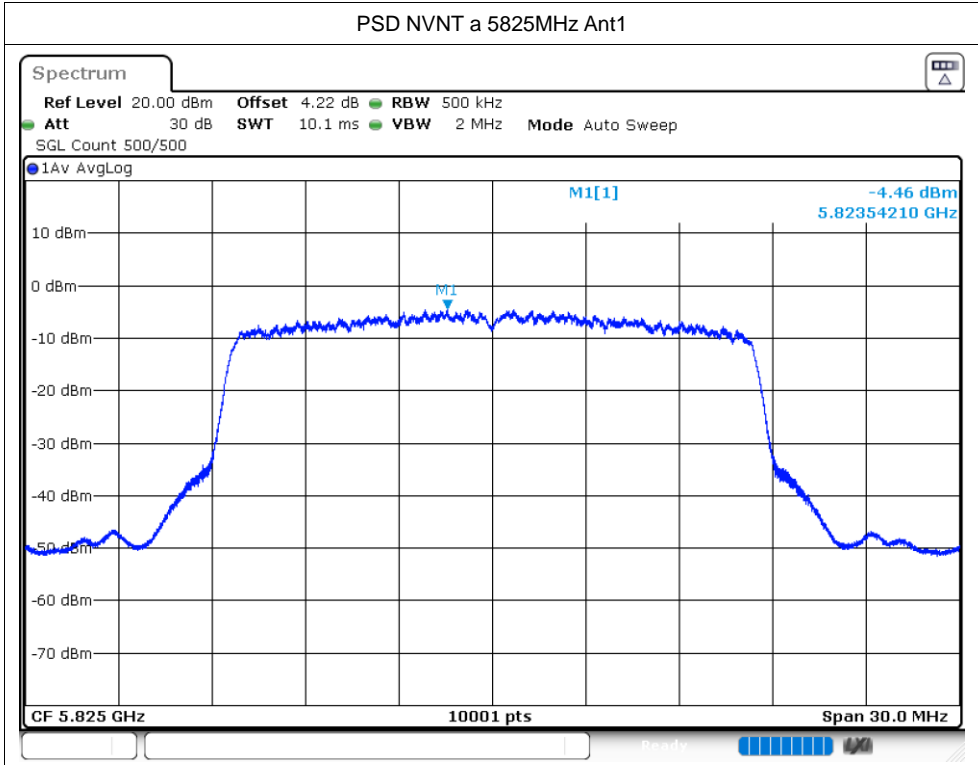


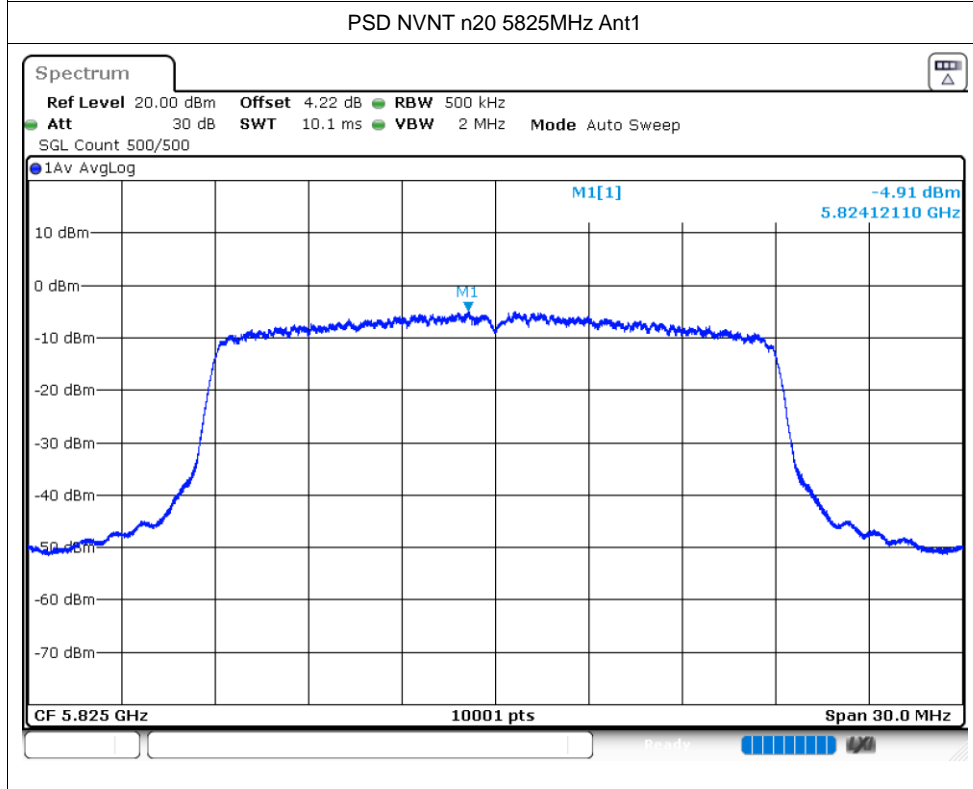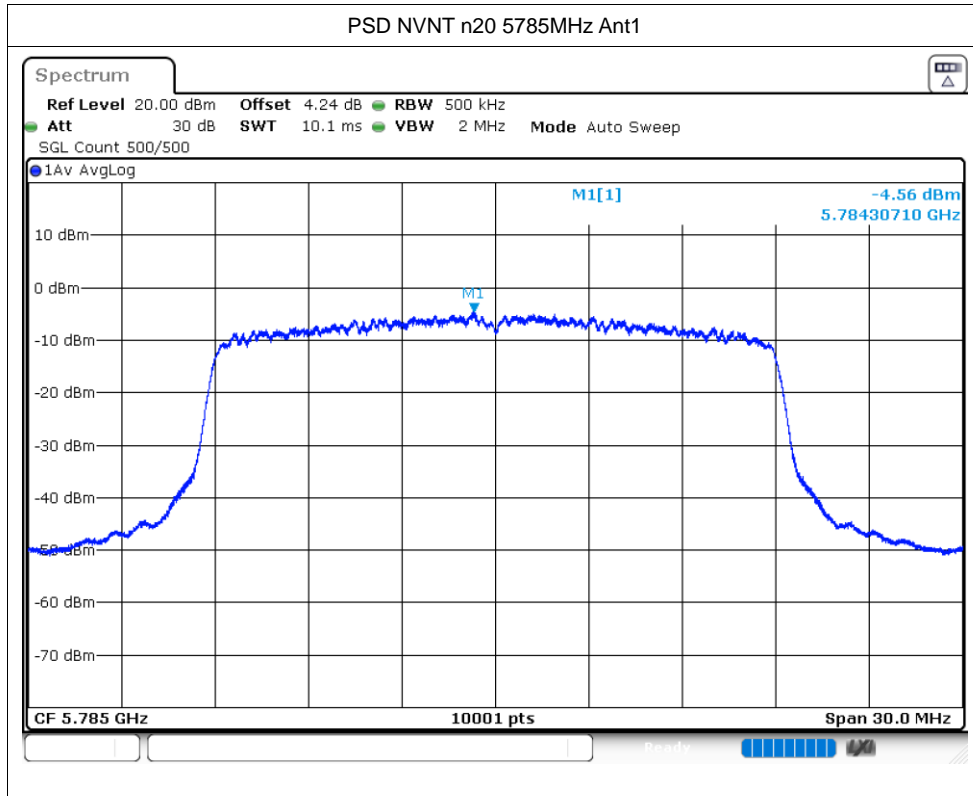

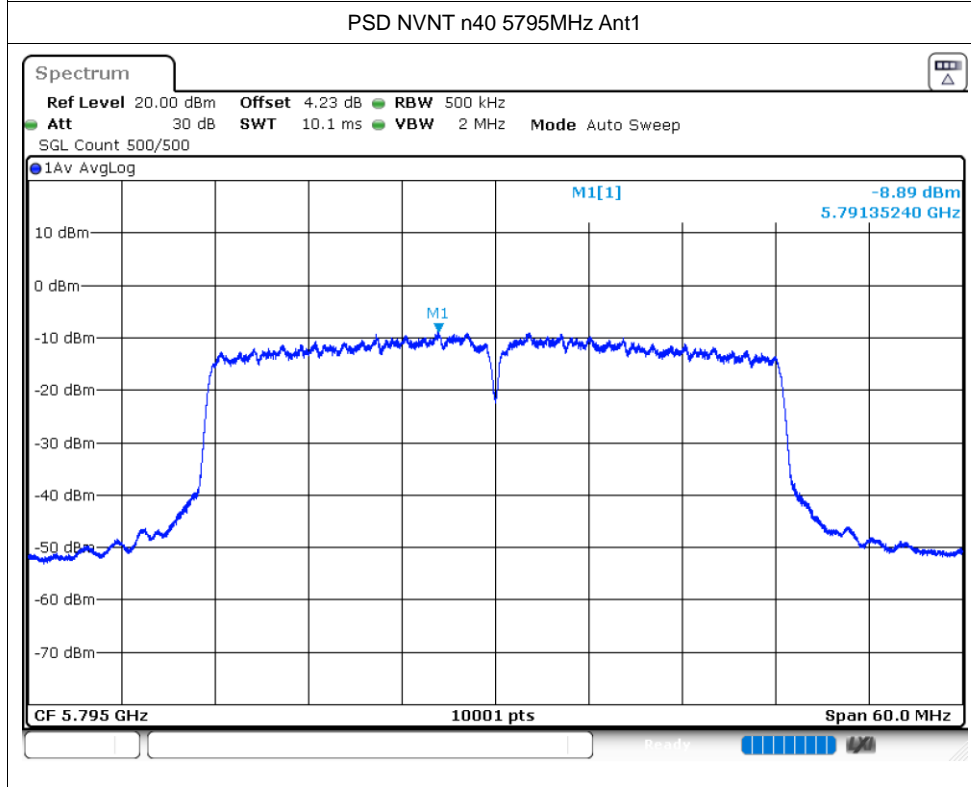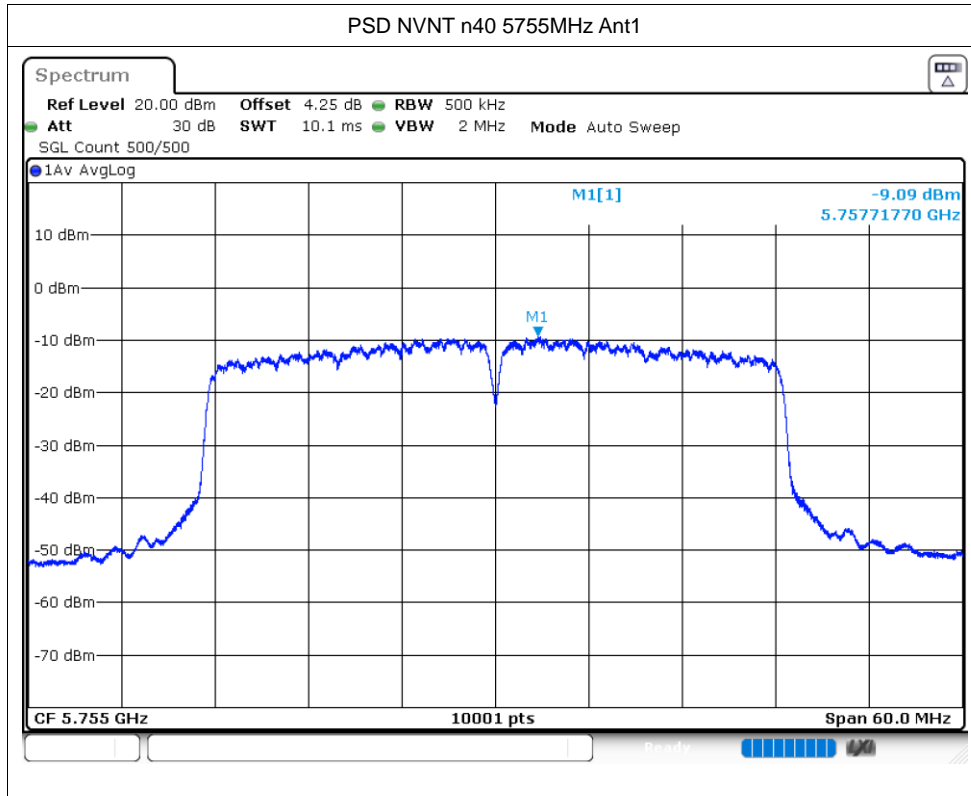

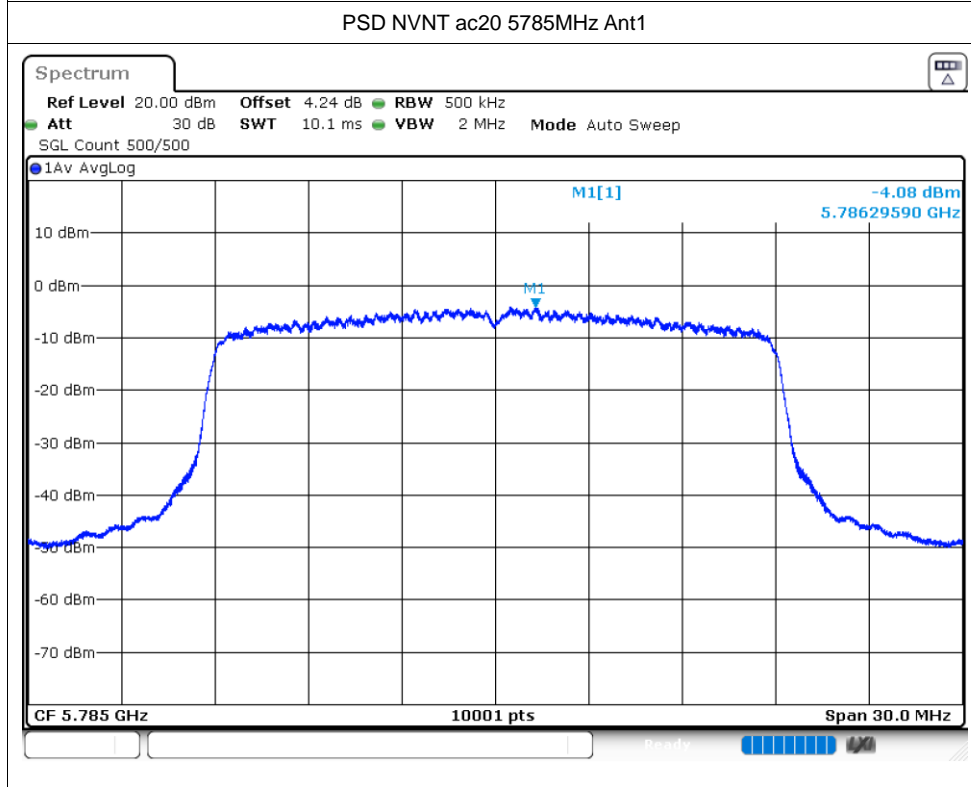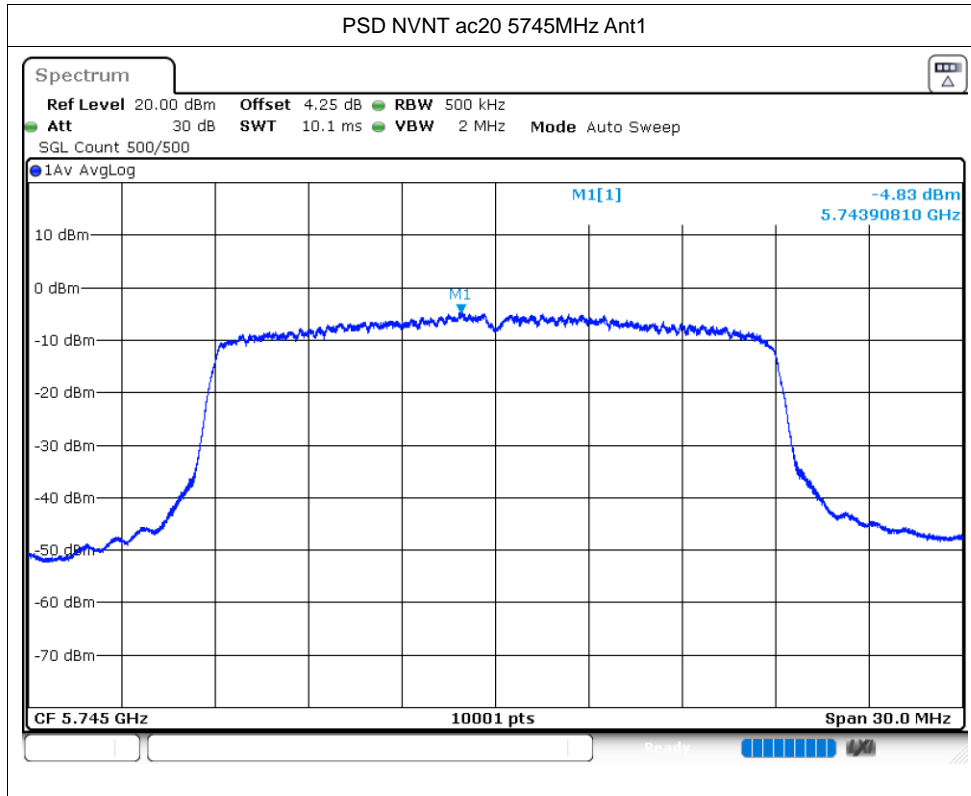

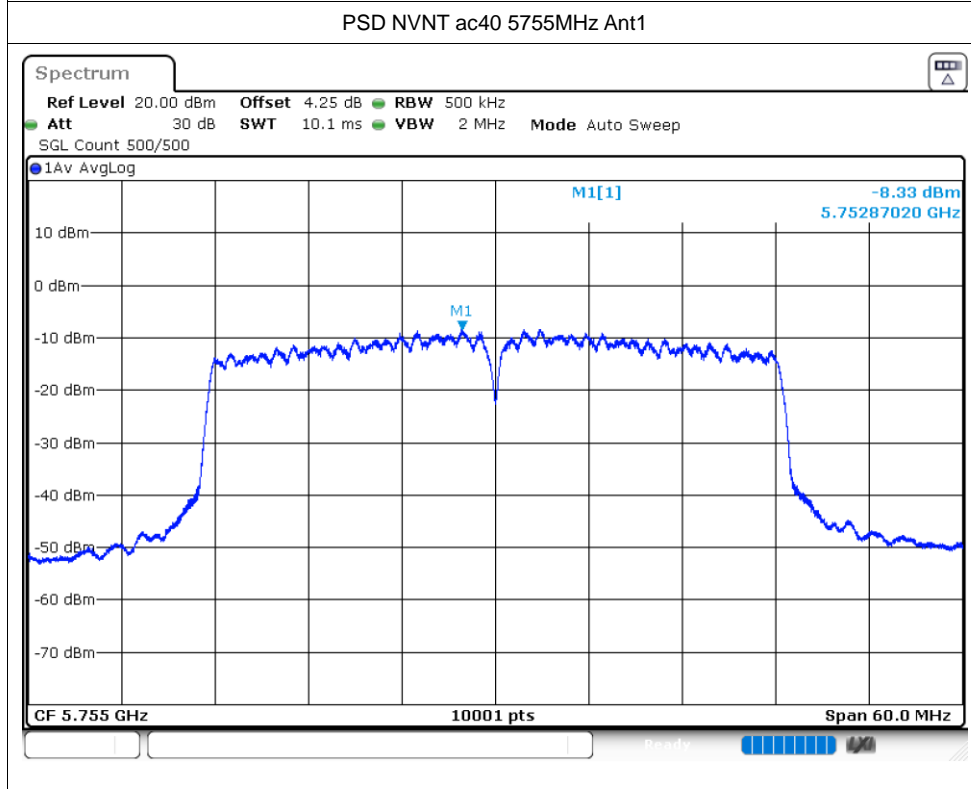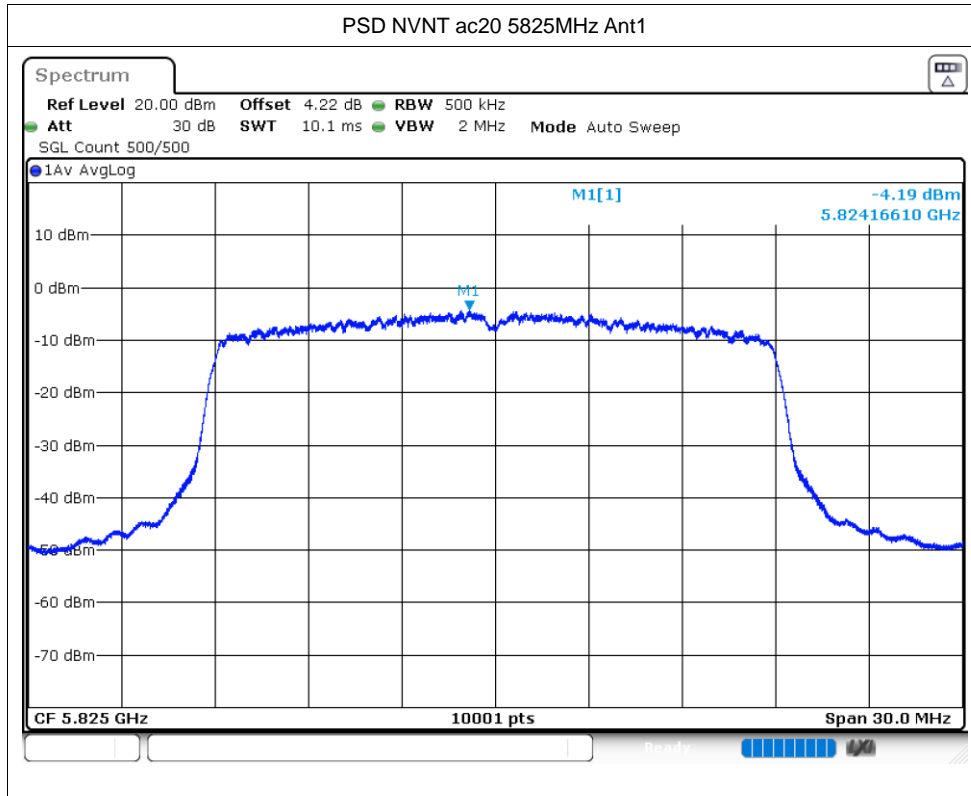

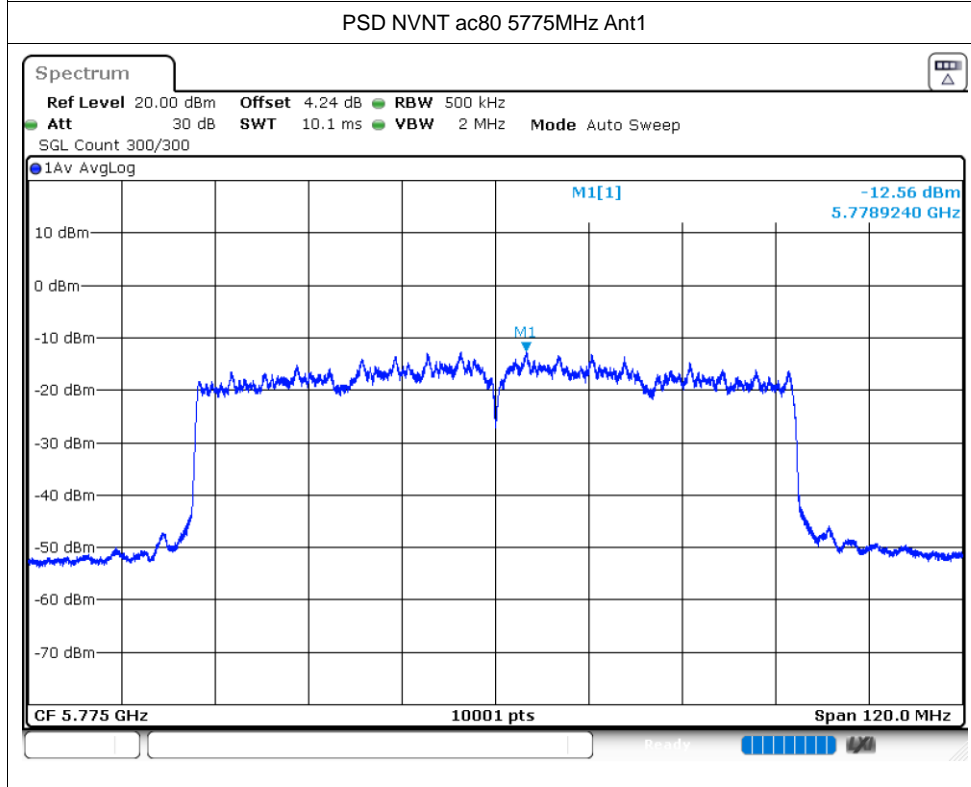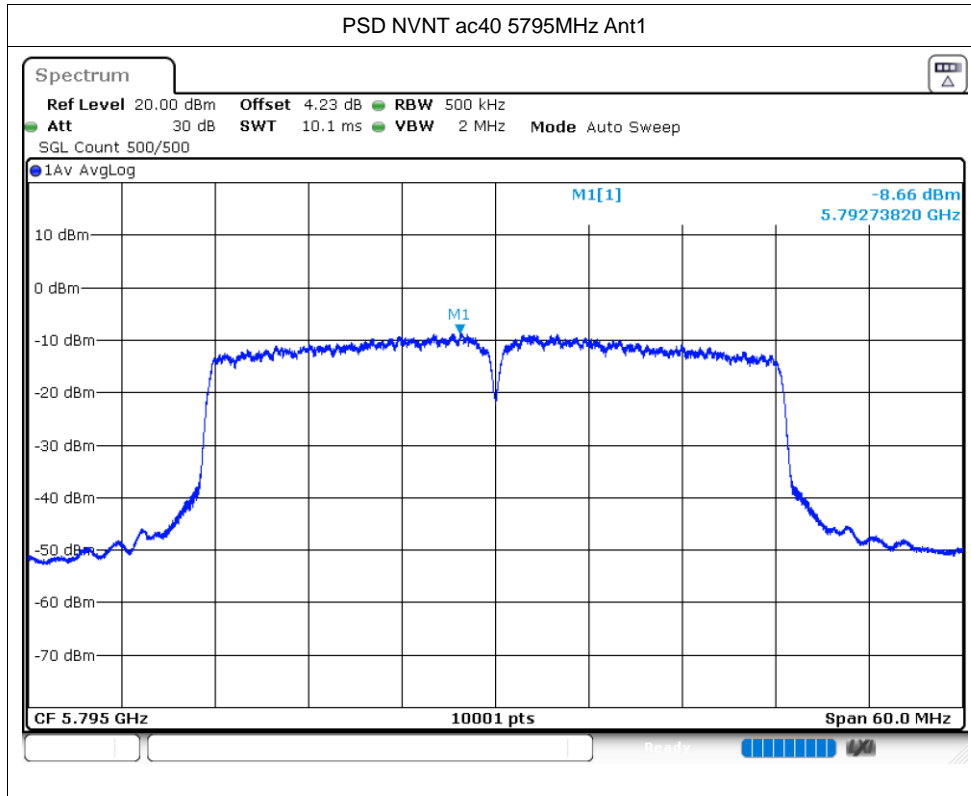

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Verdict
NVNT	a	5745	Ant1	-28.73	Pass
NVNT	a	5825	Ant1	-28.39	Pass
NVNT	n20	5745	Ant1	-28.68	Pass
NVNT	n20	5825	Ant1	-28.01	Pass
NVNT	n40	5755	Ant1	-21.47	Pass
NVNT	n40	5795	Ant1	-28.42	Pass
NVNT	ac20	5745	Ant1	-29.42	Pass
NVNT	ac20	5825	Ant1	-28.49	Pass
NVNT	ac40	5755	Ant1	-29.32	Pass
NVNT	ac40	5795	Ant1	-28.73	Pass
NVNT	ac80	5775	Ant1	-27.37	Pass

Note: This test has increased antenna gain .

