

A.18.310100-R4110

GS609说明书:128g铜版纸,单黑双面印刷,表面不处理,

展开尺寸208\*144mm,折叠成型尺寸104x144 mm。


SOMIC

快乐智造

www.somic.cn

### 操作说明

#### 按键功能说明

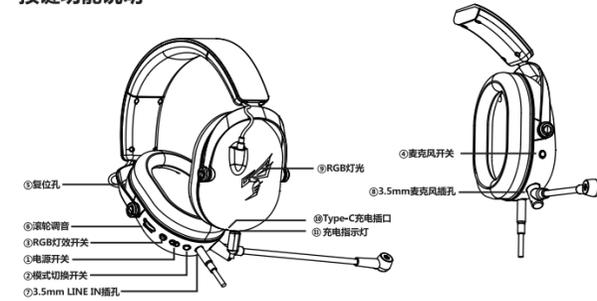

- ①电源开关 (长按3秒开机/关机)
- ②模式切换开关(开机配对成功后, 按此按钮能在3种不同模式之间切换, 即游戏模式, 直播模式, 影音模式, 开机默认游戏模式)
- ③RGB灯效开关 (点击一次关闭RGB灯光效果, 再次点击开启RGB灯光效果)
- ④麦克风开关 (点击一次关闭麦克风, 再次点击开启麦克风。麦克风关闭时有短嘟声提示音, 麦克风开启时有长嘟声提示音; 开机默认麦克风开启。)
- ⑤复位孔 (当出现死机或者关不了机时, 可用顶针插入此孔, 触发内部的按键进行复位关机)
- ⑥滚轮调音 (向上滚动为提升音量, 向下滚动为降低音量)
- ⑦3.5mm LINE IN插孔 (插上音频线, 自动切换到LINE IN有线模式)
- ⑧3.5mm麦克风插孔 (麦克风可拆卸)
- ⑨RGB灯光(开机后没配对时灯效为蓝色呼吸, 每两秒一个循环; 配对成功后进入游戏模式, 此时RGB灯效为七彩模式呼吸 红 黄 橙 绿 蓝 紫 白 (两秒一个颜色循环); 影音模式为白灯常亮, 直播模式为蓝灯常亮)
- ⑩Type-C充电接口
- ⑪ 充电指示灯 (充电时为红色, 充满电为绿色)  
注意:低电的情况下不能正常开机。

#### GS609产品特点:

1. 2.4G无线连接和3.5mm有线连接双模式;
2. 定制发声单元, 优秀调校, 提供极佳音质;
3. 可拆卸式麦克风;
4. 柔软贴肤皮质耳套, 佩戴更舒适;
5. 轻量化设计, 久戴无压力;
6. 游戏\影音双模式, 满足你的玩乐需求;
7. 炫灯加持, 型帅无疑;

#### 技术参数

咪头尺寸	Φ9.7x4.5mm
灵敏度	-38±3dB
指向性	Omnidirectional
阻抗	≤ 2.2KΩ
喇叭直径	Φ50mm
灵敏度	111±3dB
阻抗	32Ω±15%
频率响应	20Hz~20KHz
电池容量	1000mAh
续航时间	约11H
插头	3.5mm四级插头
工作频率	2.4G
净重	约320g
发射器	10g
有效距离	10m(视使用环境)

#### 注意事项(警告!)

1. 本产品充电最大输入电压5.25V。为了保障您的合法权益, 请使用正规渠道购买的充电器, 充电器标称电压5V, 充电器输出电流大于1A。
2. 当电池电量用完时, 请勿久置, 长时间不使用时, 请给耳机充满电。
3. 插入咪杆时请尝试正确的方向和力量, 以防损坏耳机咪杆接口。
4. 产品内部不包含可以自行拆卸/替换的部件  
有任何疑问请联系 SOMIC售后服务部

正面印刷


SOMIC

快乐智造

www.somic.cn

### Operation Instructions

#### Description of button functions

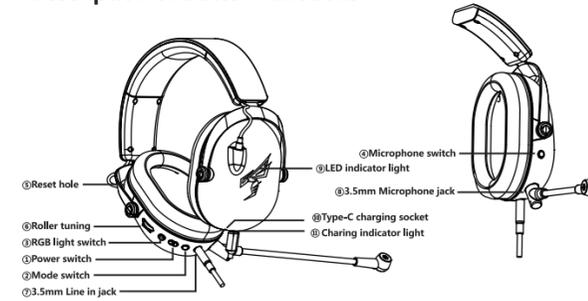

- ①Power switch(Long press for 3 seconds to turn on and off)
- ②Mode switch(Press this button can switch three kinds of sound effects of game /live streaming/audio video when it was successful paired. It was defaulted Game mode when it powers on)
- ③RGB light switch(click once to turn off the RGB LED light,and click again to turn on the RGB LED light)
- ④Microphone switch(Click once to turn off the MIC, and click again to turn on MIC.It will have a short "Du" prompt tone when MIC was turned off.On the contrary,it will have a long "Du" prompt tone when it turns on. It was defaulted turn on state when it powers on)
- ⑤Reset hole(when the headset crashes or cannot be turned off,using a thimble to insert into the hole to reset)
- ⑥Roller tuning:Scroll up to increase the volume,scroll down to decrease the volume.
- ⑦3.5mm Line in jack:Plug in the audio cable and automatic switch to LINE IN wired mode.
- ⑧3.5mm Microphone jack(The Microphone is detachable)
- ⑨LED indicator light(when the headset is turned on and not connected,the blue indicator light flashes every 2 seconds;When the headset is connected to the Dongle and enters into Game Mode,the indicator light will be colorful which is red,yellow,orange,green, blue,purple and white color every 2 seconds.The white indicator light will be always on when enters into Video Mode and the blue indicator light means Live streaming mode.
- ⑩Type-C charging socket
- ⑪ Charing indicator light ( Red when charging,green when fully charged )  
Attention : the headphone cannot power on in low battery status.

#### GS609 product features:

1. Convenient Dual Mode:2.4G wireless and 3.5mm wired connection.
2. Customized high quality sound unit to provide excellent sound performance
3. Detachable microphone
4. Skin-friendly and environmentally soft leather earmuffs supply you a comfortable wearing experience.
5. Lightweight design,zero pressure for long time wearing
6. Game/Video duel mode,satisfy your entertainment requirement
7. Cool RGB LED light design

#### Technical parameters

Mic Dimensions	Φ9.7x4.5mm
Sensitivity	-38±3dB
Directivity	Omnidirectional
Impedance	≤ 2.2KΩ
Diameter	Φ50mm
(SPL)/Sensitivity	111±3dB
Impedance	32Ω±15%
Frequency response	20Hz~20KHz
battery capacity	1000mAh
Working Ti	≈11H
plug	3.5mm level 4 plug
frequency	2.4G
Net Weight	≈320g
USB Dongle	10g
effective distance	10m(Depending on the environmen)

#### [Notess (Warning!)]

- 1.The maximum input voltage for charging is 5.25V. In order to protect your legitimate rights,pls use the charger purchased from regular channels.The nominal voltage Of the charger is 5V and the output current of the charger is greater than 1A.
- 2.Do not keep the battery drained for a long time.When not using it for a long time. Please fully charge the headset.
- 3.When inserting the microphone rod,please be careful to the correct direction and strength to prevent damage of the microphone interface.
- 4.The product cannot be disassembled/replaced by unofficial personnel.  
If you meet any problems,please contact SOMIC official After-sales Service at any time

反面印刷

使用距离小于20cm的产品：使用距离（使用产品时，与人的距离）

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

FCC ID: 2A3UU-GS609