


# FCC RF Test Report

## (DTS)

**Report No.:** JYTSZ-R12-2400169  
**Applicant:** Hangzhou Roombanker Technology Co., Ltd.  
**Address of Applicant:** A#801 Wantong center, Hangzhou, China

### Equipment Under Test (EUT)

**Product Name:** Industrial AI Edge Computing Gateway  
**Model No.:** DSGW-380, DSGW-380-1, DSGW-380-2, DSGW-380-3, DSGW-380-4, DSGW-380-X(X:1~29)  
**Trade Mark:** Roombanker  
**FCC ID:** 2AUXBDSGW-380  
**Applicable Standards:** FCC CFR Title 47 Part 15C (§15.247)  
**Date of Sample Receipt:** 26 Feb., 2024  
**Date of Test:** 27 Feb., to 29 May, 2024  
**Date of Report Issued:** 09 Aug., 2024  
**Test Result:** PASS
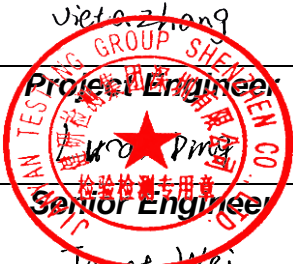
<b>Tested by:</b>	<u>Victoria Zhang</u>  Project Engineer	<b>Date:</b>	<u>09 Aug., 2024</u>
<b>Reviewed by:</b>	<u>Wang Ping</u> Senior Engineer	<b>Date:</b>	<u>09 Aug., 2024</u>
<b>Approved by:</b>	<u>Janet Wei</u> Manager	<b>Date:</b>	<u>09 Aug., 2024</u>

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 1 Version

Version No.	Date	Description
00	29 May, 2024	Original
01	09 Aug., 2024	Update Page 32

## 2 Contents

	Page
<b>Cover Page</b> .....	<b>1</b>
<b>1 Version</b> .....	<b>2</b>
<b>2 Contents</b> .....	<b>3</b>
<b>3 General Information</b> .....	<b>4</b>
3.1 Client Information .....	4
3.2 General Description of E.U.T. ....	4
3.3 Test Mode and Test Environment .....	5
3.4 Description of Test Auxiliary Equipment .....	5
3.5 Measurement Uncertainty .....	5
3.6 Additions to, Deviations, or Exclusions from the Method .....	5
3.7 Laboratory Facility .....	5
3.8 Laboratory Location .....	6
3.9 Test Instruments List .....	6
<b>4 Measurement Setup and Procedure</b> .....	<b>8</b>
4.1 Test Channel .....	8
4.2 Test Setup .....	8
4.3 Test Procedure .....	10
<b>5 Test Results</b> .....	<b>11</b>
5.1 Summary .....	11
5.1.1 Clause and Data Summary .....	11
5.1.2 Test Limit .....	12
5.2 Antenna requirement .....	13
5.3 AC Power Line Conducted Emission .....	14
5.4 Conducted Output Power .....	16
5.5 Emission Bandwidth .....	17
5.6 Power Spectral Density .....	19
5.7 Spurious Emission .....	20
5.7.1 Band-edge Emission .....	20
5.7.2 Conducted Spurious Emission .....	21
5.7.3 Emissions in Restricted Frequency Bands .....	22
5.7.4 Emissions in Non-restricted Frequency Bands .....	30

### 3 General Information

#### 3.1 Client Information

Applicant:	Hangzhou Roombanker Technology Co., Ltd.
Address:	A#801 Wantong center, Hangzhou, China
Manufacturer/ Factory:	Zhejiang Dusun Electron Co., Ltd.
Address:	No.640 Feng Qing St, DeQing Zhejiang China

#### 3.2 General Description of E.U.T.

Product Name:	Industrial AI Edge Computing Gateway
Model No.:	DSGW-380, DSGW-380-1, DSGW-380-2, DSGW-380-3, DSGW-380-4, DSGW-380-X(X:1~29)
Operation Frequency:	923 MHz - 928 MHz
Channel Numbers:	8
Channel Separation:	400KHz,600KHz,
Modulation Technology:	Lora
Antenna Type:	External Antenna
Antenna Gain:	1.31 dBi (declare by applicant)
Power Supply:	DC 12V
Remark:	Model No.: DSGW-380, DSGW-380-1, DSGW-380-2, DSGW-380-3, DSGW-380-4, DSGW-380-X(X:1~29) were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

### 3.3 Test Mode and Test Environment

<b>Test Mode:</b>	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
<i>Remark: For spurious emission of below 1GHz, pre-scan lowest, middle and highest channel, found lowest channel was worse case mode. The report only reflects the test data of worst mode.</i>	
<b>Operating Environment:</b>	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 12.0 Vdc
Test Engineer:	Vieta Zhang (Conducted measurement) Kiran Zeng , Robin Gu, Asher Zeng Zhang(Radiated measurement)

### 3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

### 3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.57 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	3.14 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	3.43 dB
Radiated Emission (1GHz ~ 6GHz) (3m FAR)	4.95 dB
Radiated Emission (6GHz ~ 18GHz) (3m FAR)	5.23 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.32 dB

*Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.*

### 3.6 Additions to, Deviations, or Exclusions from the Method

No

### 3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**  
JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- **ISED – CAB identifier.: CN0021**  
The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- **CNAS - Registration No.: CNAS L15527**  
JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.
- **A2LA - Registration No.: 4346.01**  
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.  
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

### 3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-05-2024	01-04-2025
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2024	01-08-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-05-2024	01-04-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-28-2023	12-27-2024
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-27-2023	12-26-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-27-2023	12-26-2024
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-28-2023	12-27-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	09-25-2023	09-24-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-17-2024	01-16-2025
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		
EMI Test Software	AUDIX	E3	Version: 6.110919b		

<b>Radiated Emission(3m FAR):</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Manage No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-13-2023	07-12-2024
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-02-2021	07-01-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	07-14-2023	07-13-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-28-2023	12-27-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-28-2023	12-27-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-28-2023	12-27-2024
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	05-14-2023	05-13-2024
				04-24-2024	04-23-2025
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	05-14-2023	05-13-2024
				04-24-2024	04-23-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-28-2023	12-27-2024
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ081-1	06-13-2023	06-12-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	08-01-2023	07-31-2024
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	08-01-2023	07-31-2024
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	08-01-2023	07-31-2024
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

<b>Conducted Emission:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Manage No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	07-05-2023	07-04-2024
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-27-2023	12-26-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-27-2023	12-26-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-17-2024	01-16-2025
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

<b>Conducted Method:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Manage No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-27-2023	12-26-2024
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	11-01-2023	10-31-2024
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	

## 4 Measurement Setup and Procedure


### 4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	923.3	2	923.9	3	924.5
4	925.1	5	925.7	6	926.3
7	926.9	8	927.5		

### 4.2 Test Setup


#### 1) Conducted emission measurement:

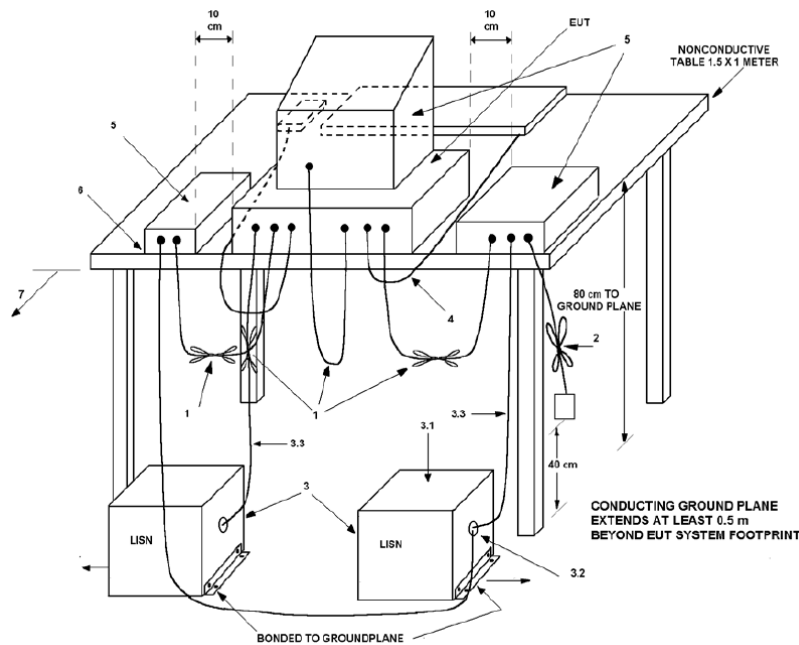


**Note:** The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

#### 2) Radiated emission measurement:

Below 1GHz (3m SAC)

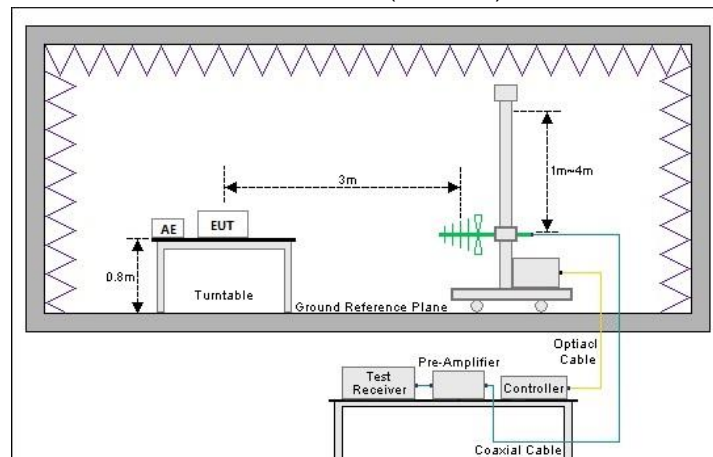



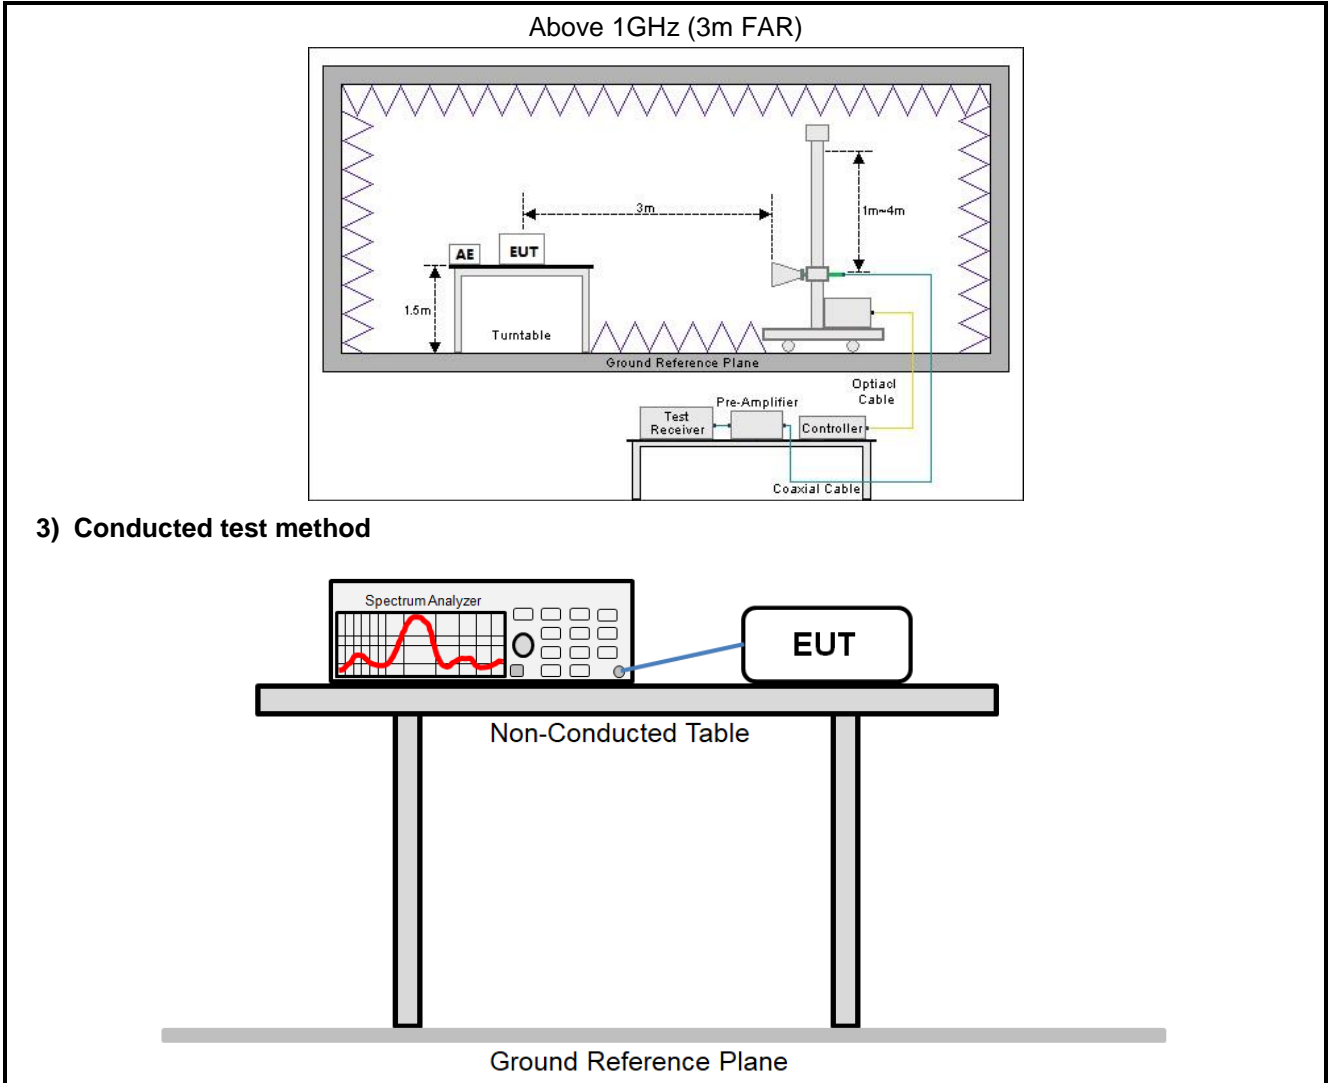

### 4.3 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>
Radiated emission	<p><b>For below 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> <p><b>For above 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol>
Conducted test method	<ol style="list-style-type: none"> <li>1. The antenna port of EUT was connected to the test port of the test system through an RF cable.</li> <li>2. The EUT is keeping in continuous transmission mode and tested in all modulation modes.</li> <li>3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.</li> </ol>

## 5 Test Results

### 5.1 Summary

#### 5.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	See Section 5.3	Pass
Conducted Output Power	15.247 (b)(3)	See Section 5.4	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	See Section 5.5	Pass
Power Spectral Density	15.247 (e)	See Section 5.6	Pass
Spurious Emission	15.205 15.209 15.247 (d)	See Section 5.7	Pass
<b>Remark:</b> 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).			
<b>Test Method:</b>	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

### 5.1.2 Test Limit


Test items	Limit																														
AC Power Line Conducted Emission	<table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-Peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 – 0.5</td> <td>66 to 56 <small>Note 1</small></td> <td>56 to 46 <small>Note 1</small></td> </tr> <tr> <td>0.5 – 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 – 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p><small>Note 1:</small> The limit level in dB<math>\mu</math>V decreases linearly with the logarithm of frequency.  <small>Note 2:</small> The more stringent limit applies at transition frequencies.</p>	Frequency (MHz)	Limit (dB $\mu$ V)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>	0.5 – 5	56	46	5 – 30	60	50																
Frequency (MHz)	Limit (dB $\mu$ V)																														
	Quasi-Peak	Average																													
0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>																													
0.5 – 5	56	46																													
5 – 30	60	50																													
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																														
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																														
99% Occupied Bandwidth	N/A																														
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																														
Spurious Emission	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V/m)</th> <th rowspan="2">Detector</th> </tr> <tr> <th>@ 3m</th> <th>@ 10m</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>40.0</td> <td>30.0</td> <td>Quasi-peak</td> </tr> <tr> <td>88 – 216</td> <td>43.5</td> <td>33.5</td> <td>Quasi-peak</td> </tr> <tr> <td>216 – 960</td> <td>46.0</td> <td>36.0</td> <td>Quasi-peak</td> </tr> <tr> <td>960 – 1000</td> <td>54.0</td> <td>44.0</td> <td>Quasi-peak</td> </tr> </tbody> </table> <p><small>Note:</small> The more stringent limit applies at transition frequencies.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency</th> <th colspan="2">Limit (dB<math>\mu</math>V/m) @ 3m</th> </tr> <tr> <th>Average</th> <th>Peake</th> </tr> </thead> <tbody> <tr> <td>Above 1 GHz</td> <td>54.0</td> <td>74.0</td> </tr> </tbody> </table> <p><small>Note:</small> The measurement bandwidth shall be 1 MHz or greater.</p>	Frequency (MHz)	Limit (dB $\mu$ V/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Frequency	Limit (dB $\mu$ V/m) @ 3m		Average	Peake	Above 1 GHz	54.0	74.0
Frequency (MHz)	Limit (dB $\mu$ V/m)		Detector																												
	@ 3m	@ 10m																													
30 – 88	40.0	30.0	Quasi-peak																												
88 – 216	43.5	33.5	Quasi-peak																												
216 – 960	46.0	36.0	Quasi-peak																												
960 – 1000	54.0	44.0	Quasi-peak																												
Frequency	Limit (dB $\mu$ V/m) @ 3m																														
	Average	Peake																													
Above 1 GHz	54.0	74.0																													

## 5.2 Antenna requirement

<b>Standard requirement:</b>	FCC Part 15 C Section 15.203 /247(b)(4)
<p>15.203 requirement:            An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:            (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>E.U.T Antenna:</b>	
<p>The EUT antenna is an external antenna which permanently attached, and the best case gain of the antenna is 1.31 dBi. See product internal photos for details.</p>	

### 5.3 AC Power Line Conducted Emission

<b>Product name:</b>	Industrial AI Edge Computing Gateway	<b>Product model:</b>	DSGW-380
<b>Test by:</b>	Asher Zeng	<b>Test mode:</b>	Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Line
<b>Test voltage:</b>	AC 120 V/60 Hz		

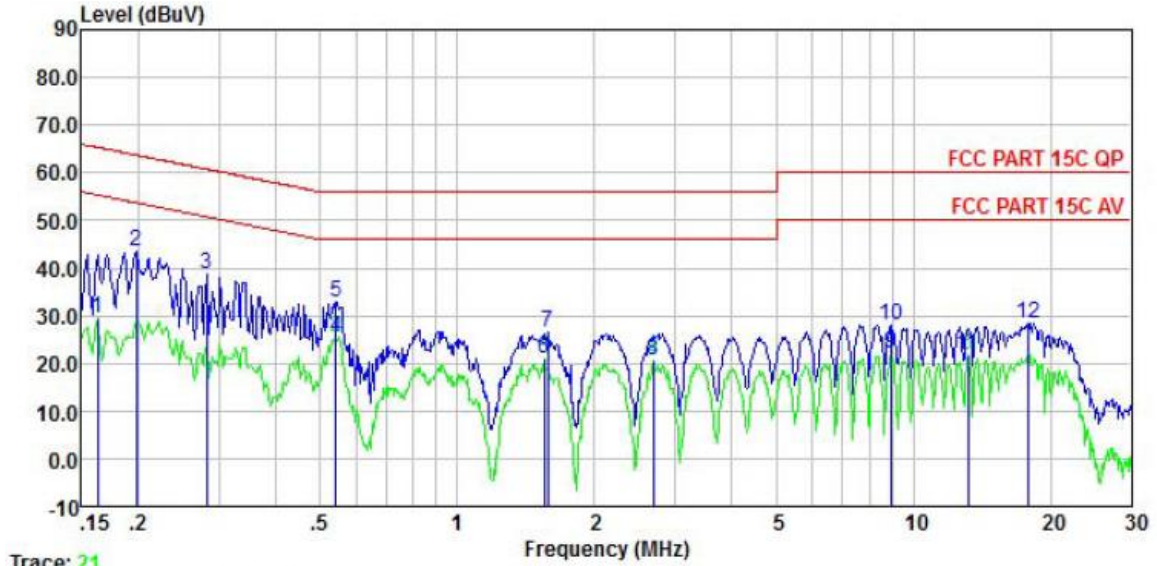

Trace: 21


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	18.81	0.20	0.00	10.50	0.01	29.52	55.34	-25.82	Average
2	0.198	32.87	0.20	0.00	10.50	0.04	43.61	63.71	-20.10	QP
3	0.282	28.15	0.20	0.00	10.50	0.02	38.87	60.76	-21.89	QP
4	0.541	14.74	0.20	0.00	10.50	0.03	25.47	46.00	-20.53	Average
5	0.541	22.16	0.20	0.00	10.50	0.03	32.89	56.00	-23.11	QP
6	1.552	10.12	0.20	0.00	10.50	0.15	20.97	46.00	-25.03	Average
7	1.577	15.50	0.20	0.00	10.50	0.16	26.36	56.00	-29.64	QP
8	2.692	9.70	0.20	0.00	10.50	0.11	20.51	46.00	-25.49	Average
9	8.916	11.13	0.20	0.00	10.50	0.11	21.94	50.00	-28.06	Average
10	8.916	17.25	0.20	0.00	10.50	0.11	28.06	60.00	-31.94	QP
11	13.197	10.80	0.27	0.00	10.50	0.11	21.68	50.00	-28.32	Average
12	17.849	17.50	0.36	0.00	10.50	0.15	28.51	60.00	-31.49	QP

**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.



<b>Product name:</b>	Industrial AI Edge Computing Gateway	<b>Product model:</b>	DSGW-380
<b>Test by:</b>	Asher Zeng	<b>Test mode:</b>	Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz		

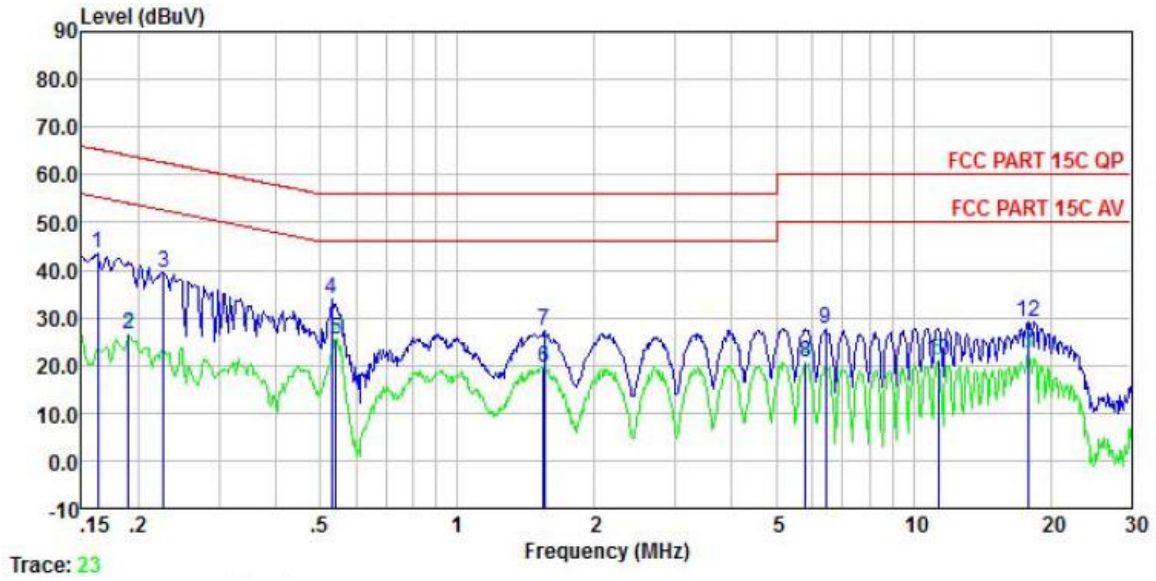

Trace: 23

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	32.67	0.20	0.00	10.50	0.01	43.38	65.34	-21.96	QP
2	0.190	15.63	0.20	0.00	10.50	0.03	26.36	54.02	-27.66	Average
3	0.227	28.68	0.20	0.00	10.50	0.02	39.40	62.57	-23.17	QP
4	0.529	23.23	0.20	0.00	10.50	0.03	33.96	56.00	-22.04	QP
5	0.541	14.68	0.20	0.00	10.50	0.03	25.41	46.00	-20.59	Average
6	1.544	8.65	0.26	0.00	10.50	0.15	19.56	46.00	-26.44	Average
7	1.552	16.31	0.26	0.00	10.50	0.15	27.22	56.00	-28.78	QP
8	5.805	9.77	0.30	0.00	10.50	0.09	20.66	50.00	-29.34	Average
9	6.420	16.82	0.30	0.00	10.50	0.09	27.71	60.00	-32.29	QP
10	11.317	9.88	0.40	0.00	10.50	0.11	20.89	50.00	-29.11	Average
11	17.849	11.34	0.40	0.00	10.50	0.15	22.39	50.00	-27.61	Average
12	17.849	18.16	0.40	0.00	10.50	0.15	29.21	60.00	-30.79	QP


**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.

### 5.4 Conducted Output Power

Test Channel	Maximum Output Power (dBm)	Limit(dBm)	Result
Lowest channel	12.77	30.00	Pass
Middle channel	11.96		
Highest channel	12.16		

Test plot as follows:

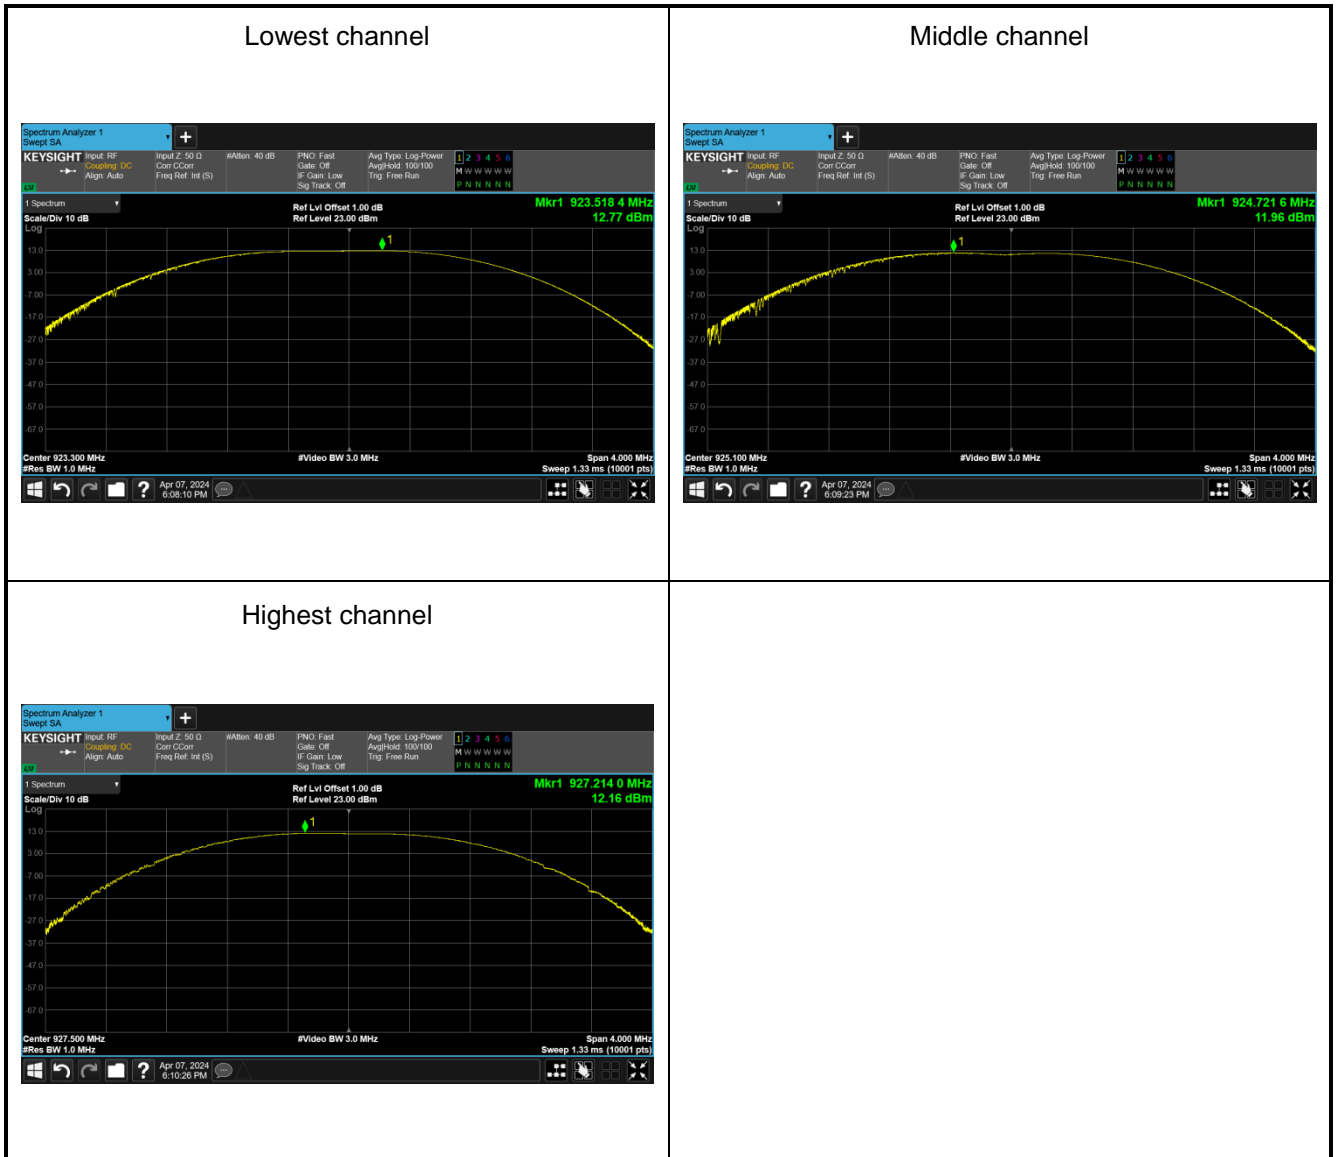




### 5.5 Emission Bandwidth

Test Channel	6dB Emission Bandwidth (kHz)	Limit (kHz)	Result
Lowest channel	592.0	>500	Pass
Middle channel	591.1		
Highest channel	593.9		
Test Channel	99% Occupy Bandwidth (kHz)	Limit (kHz)	Result
Lowest channel	629.93	N/A	N/A
Middle channel	629.09		
Highest channel	638.19		


Test plot as follows:

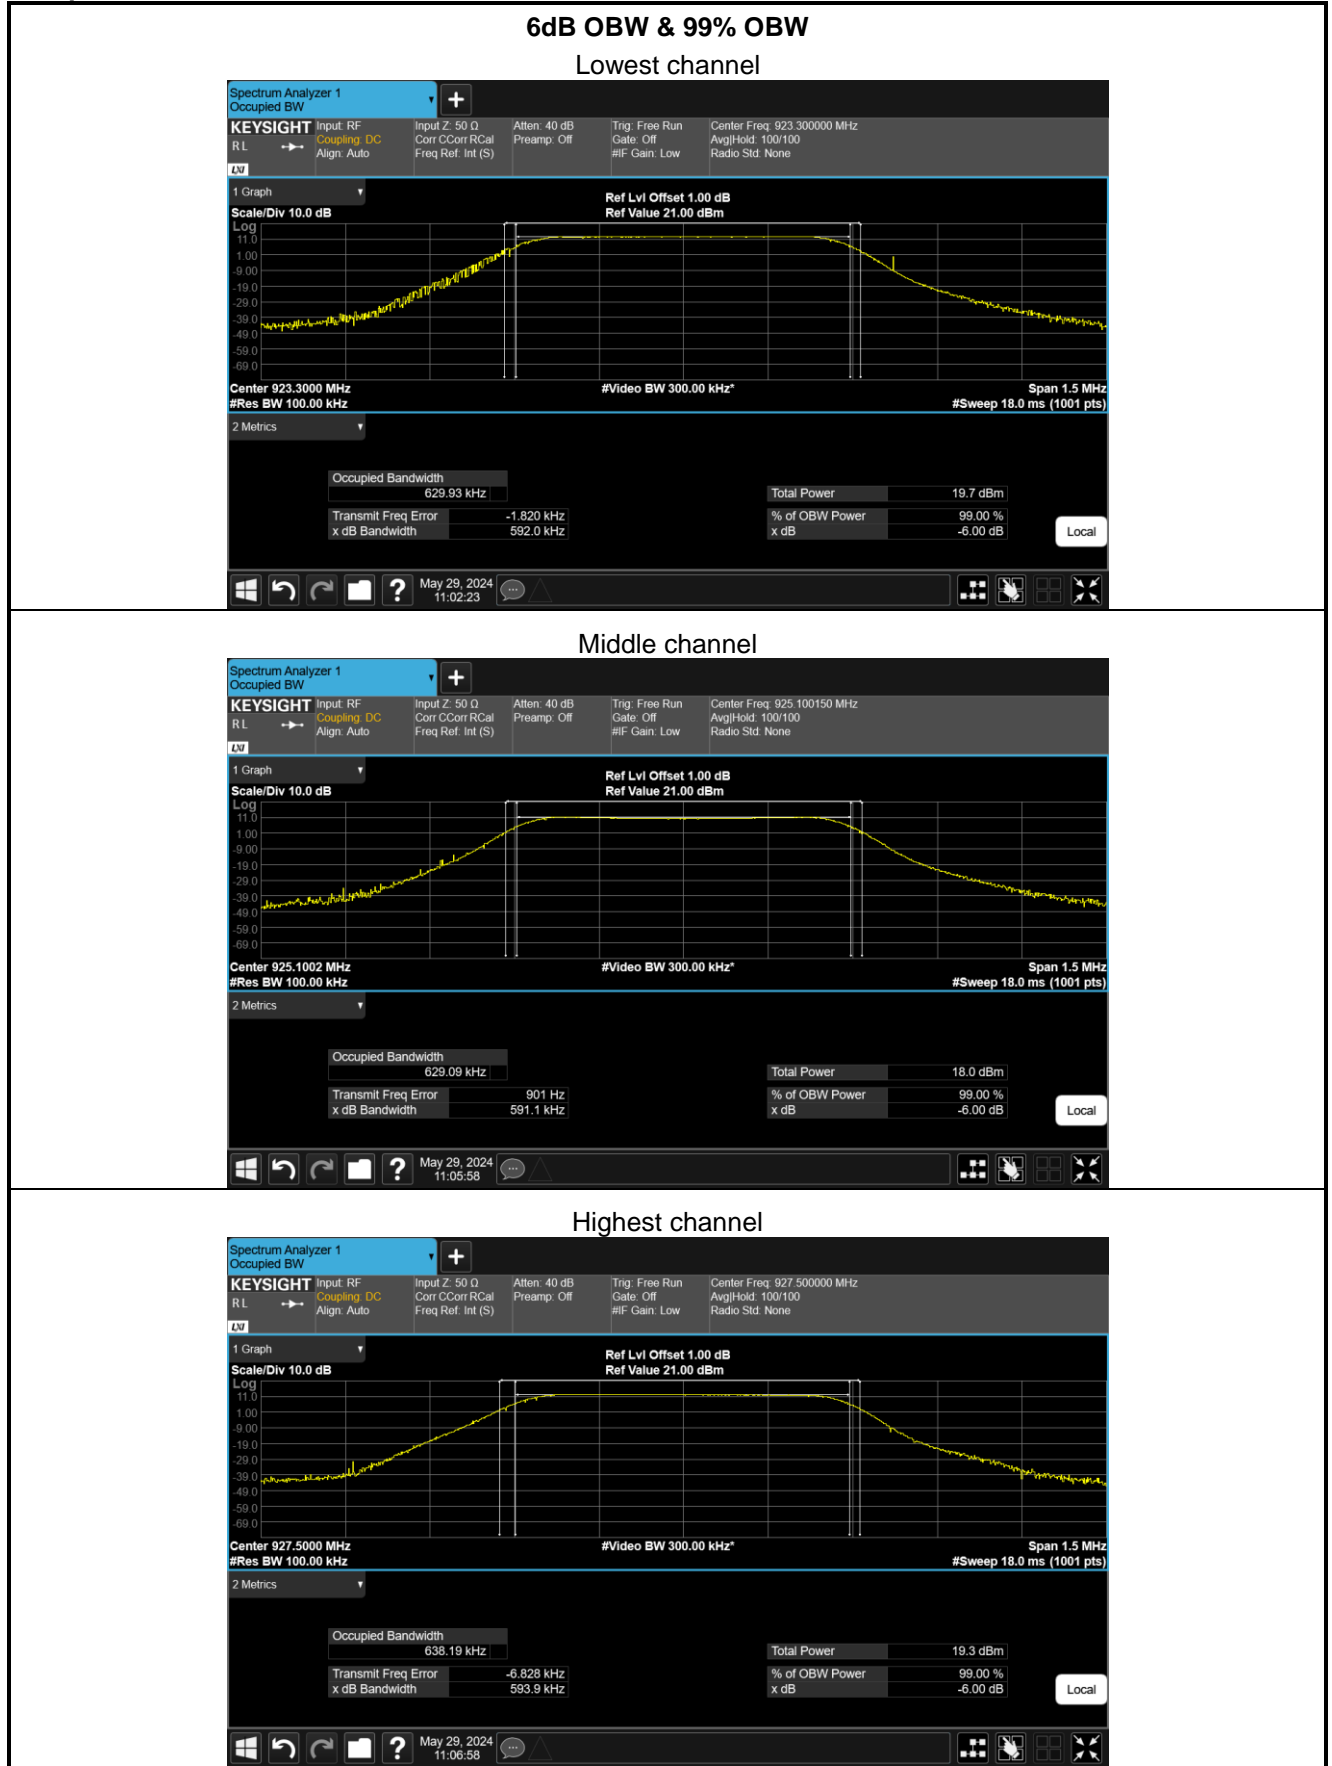

### 5.6 Power Spectral Density


Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest channel	0.95	8.00	Pass
Middle channel	2.25		
Highest channel	1.69		

Test plot as follows:

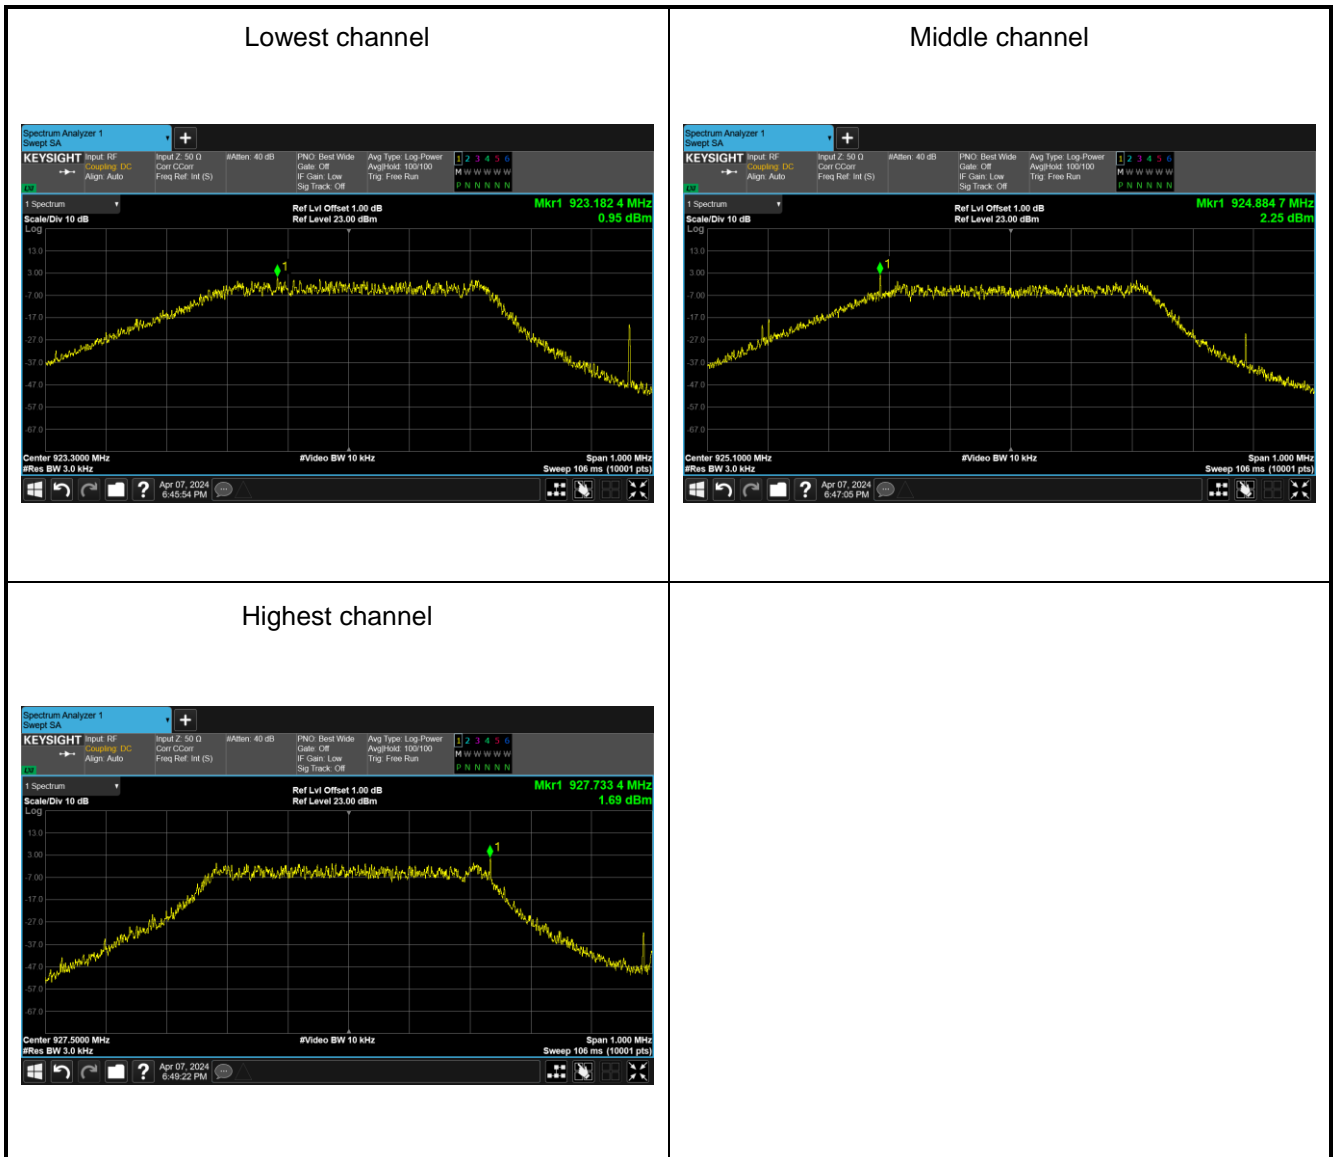


## 5.7 Spurious Emission

### 5.7.1 Band-edge Emission

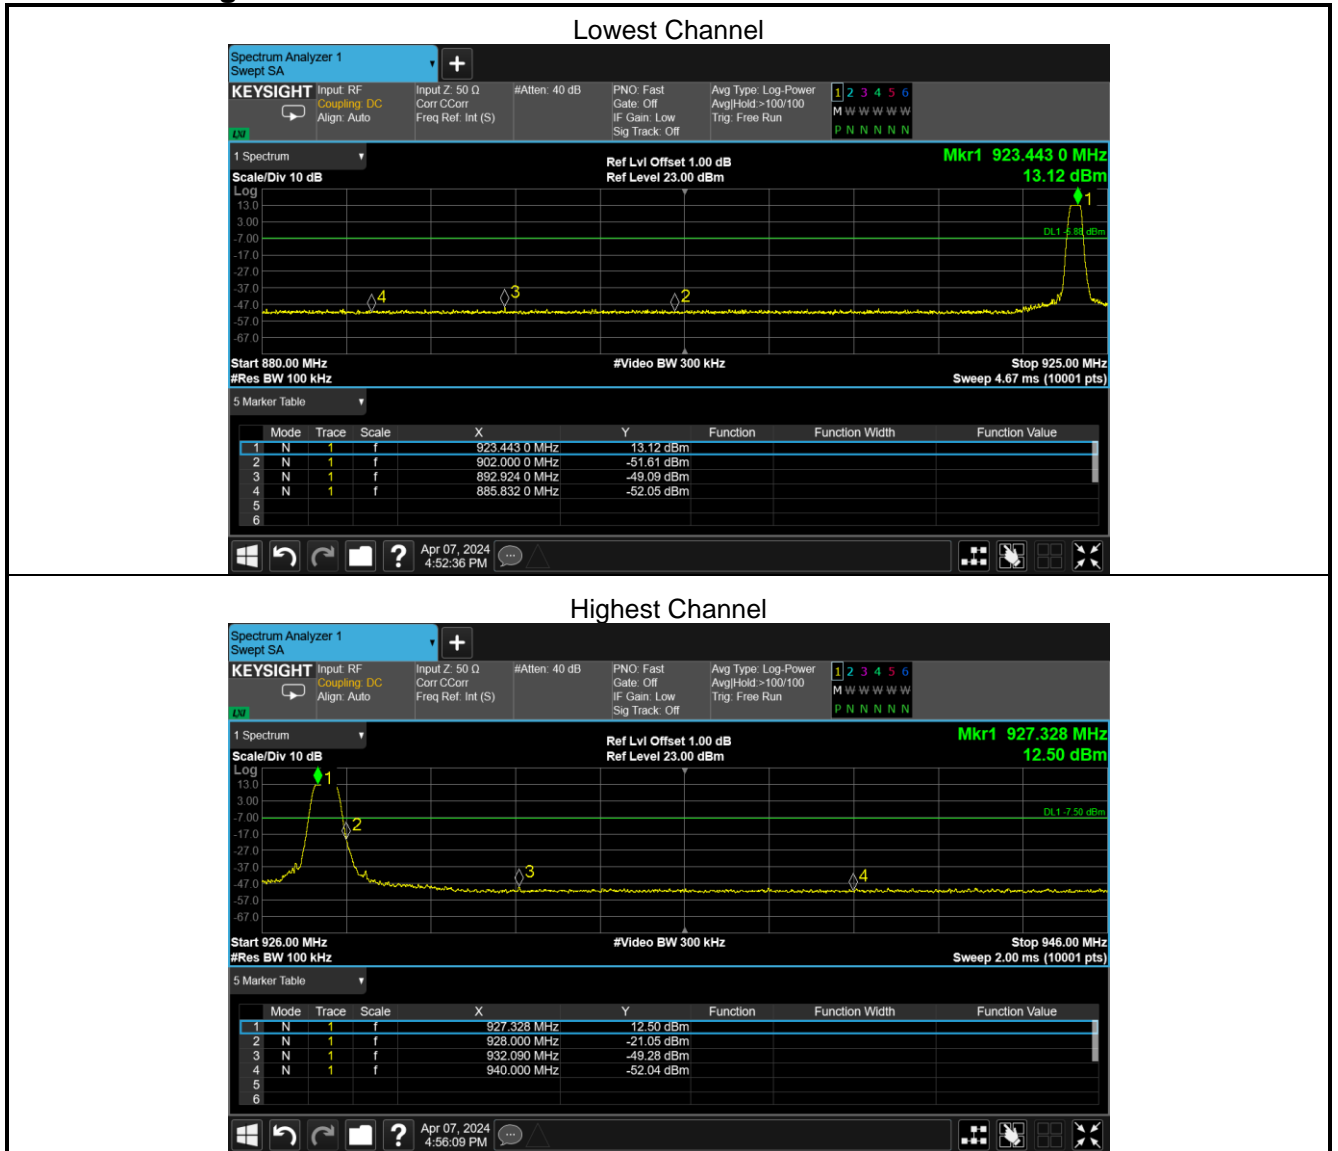


### 5.7.2 Conducted Spurious Emission


Lowest channel

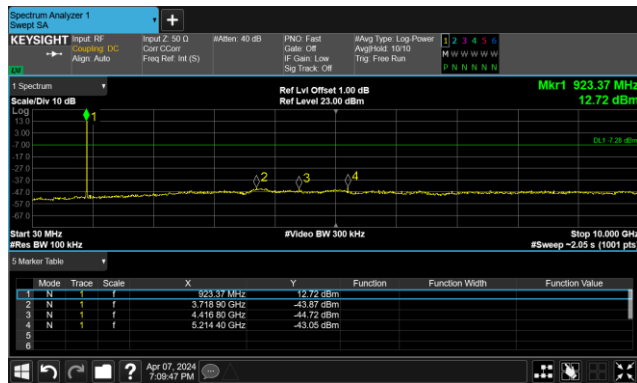

Middle channel

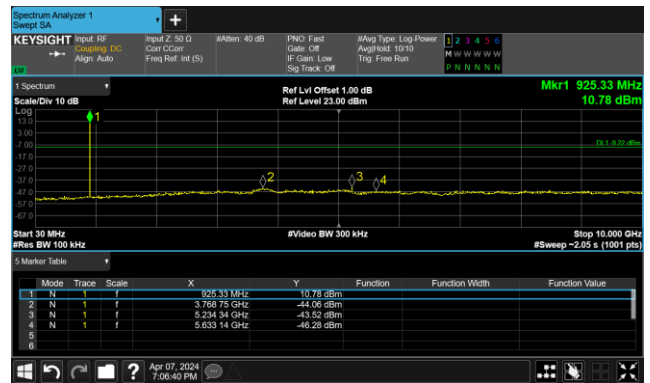


Highest channel

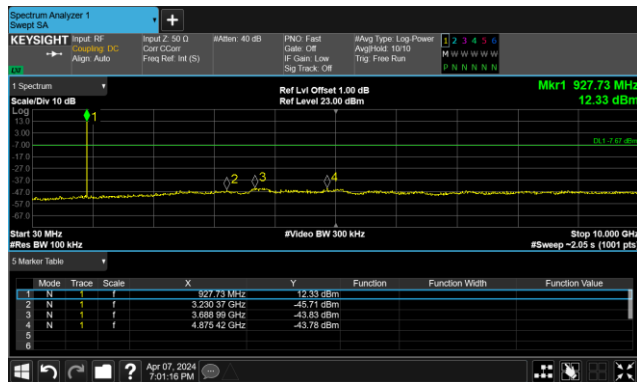

### 5.7.3 Emissions in Restricted Frequency Bands

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Robin Gu	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz		

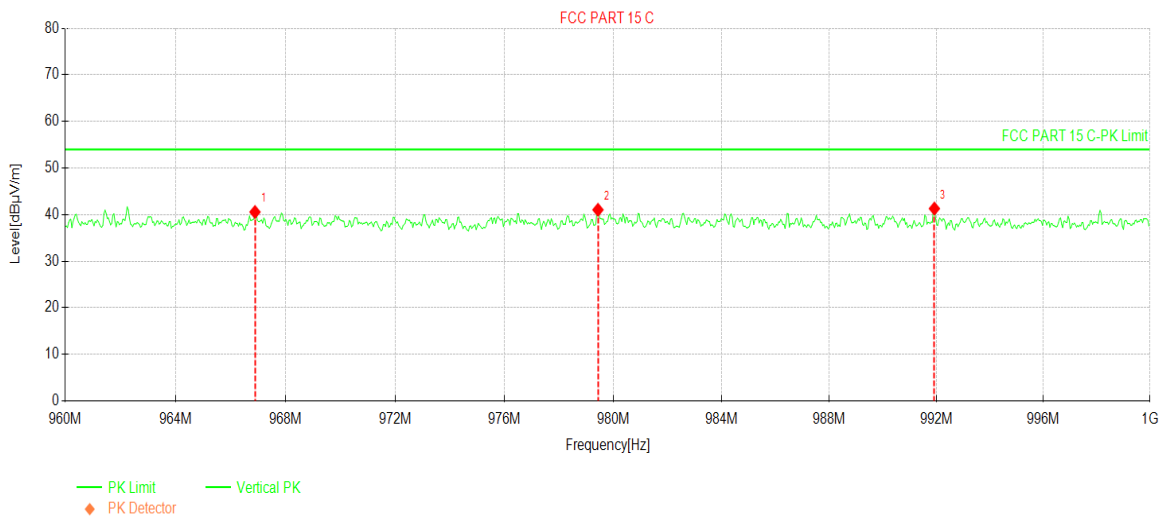


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	966.8800	13.90	40.55	26.65	54.00	13.45	PK	Vertical
2	979.4400	14.22	41.02	26.80	54.00	12.98	PK	Vertical
3	991.9200	14.42	41.28	26.86	54.00	12.72	PK	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Robin Gu	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz		

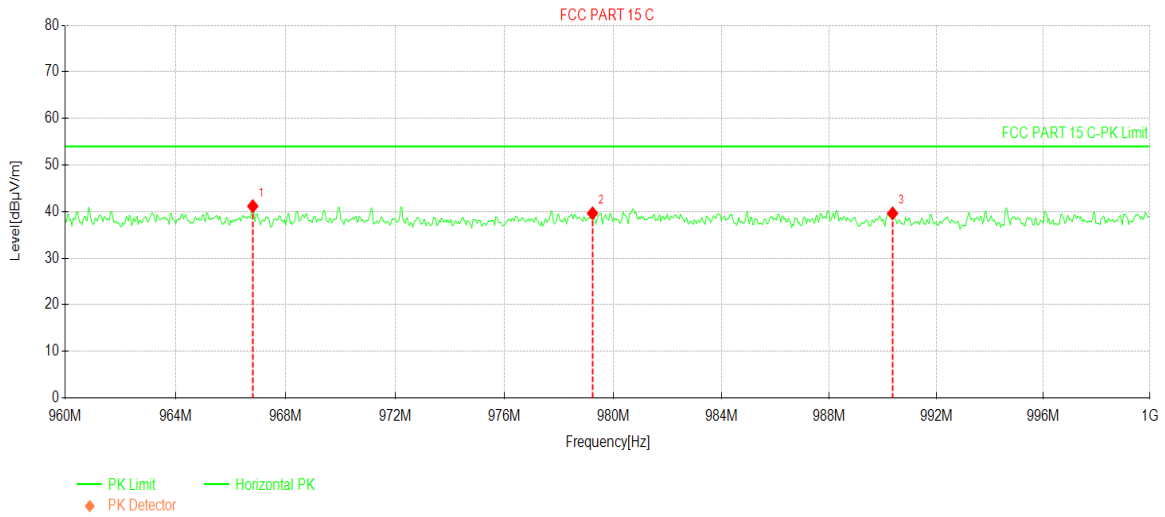


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	966.800	14.51	41.15	26.64	54.00	12.85	PK	Horizontal
2	979.240	12.83	39.63	26.80	54.00	14.37	PK	Horizontal
3	990.360	12.71	39.61	26.90	54.00	14.39	PK	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Robin Gu	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz		

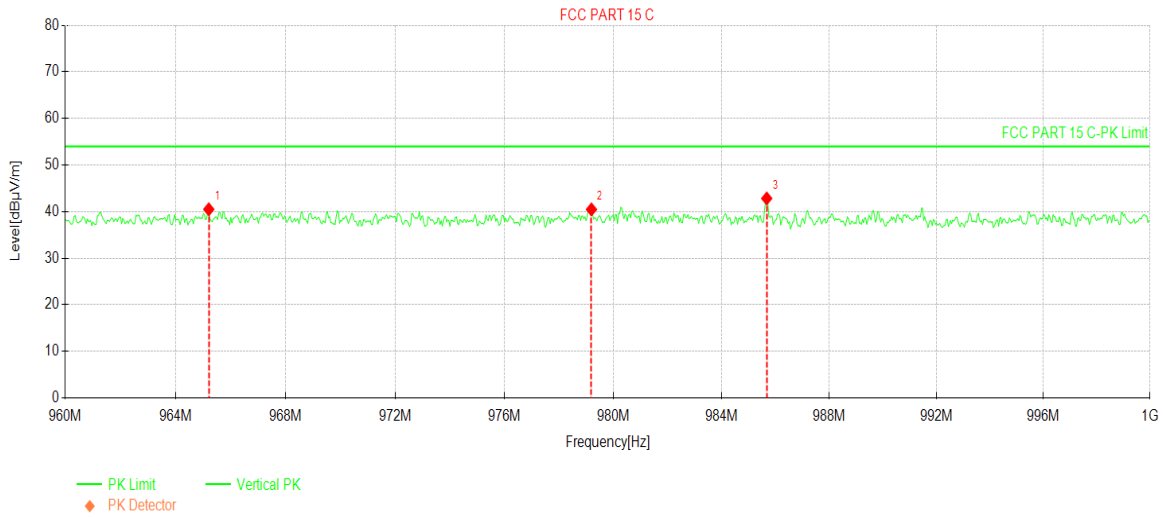


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	965.200	13.88	40.48	26.60	54.00	13.52	PK	Vertical
2	979.200	13.66	40.46	26.80	54.00	13.54	PK	Vertical
3	985.680	15.99	42.82	26.83	54.00	11.18	PK	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).



<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Robin Gu	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz		

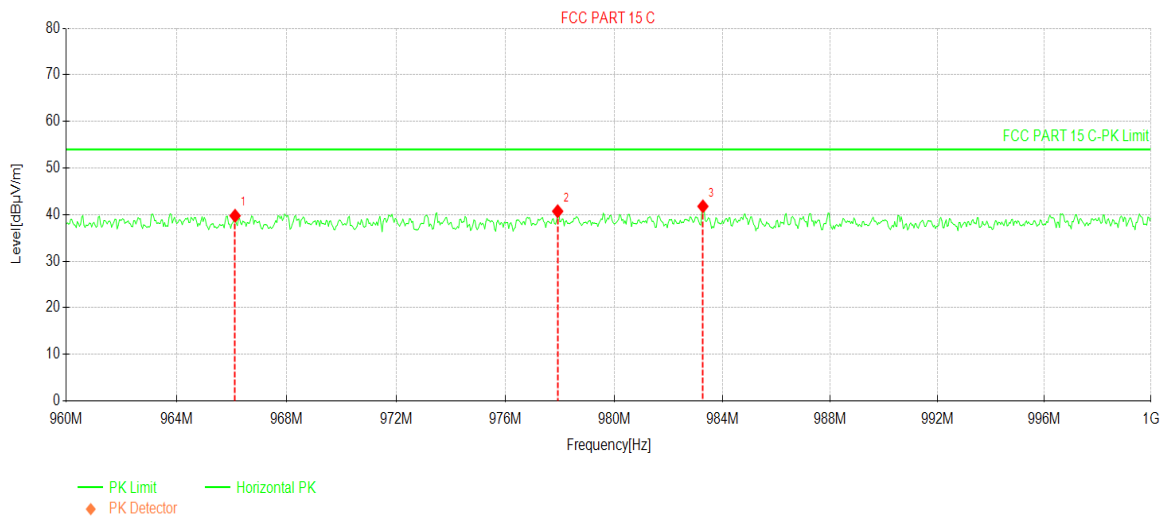


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	966.120	13.11	39.74	26.63	54.00	14.26	PK	Horizontal
2	977.920	13.94	40.71	26.77	54.00	13.29	PK	Horizontal
3	983.280	14.95	41.76	26.81	54.00	12.24	PK	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Kiran Zeng	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz		

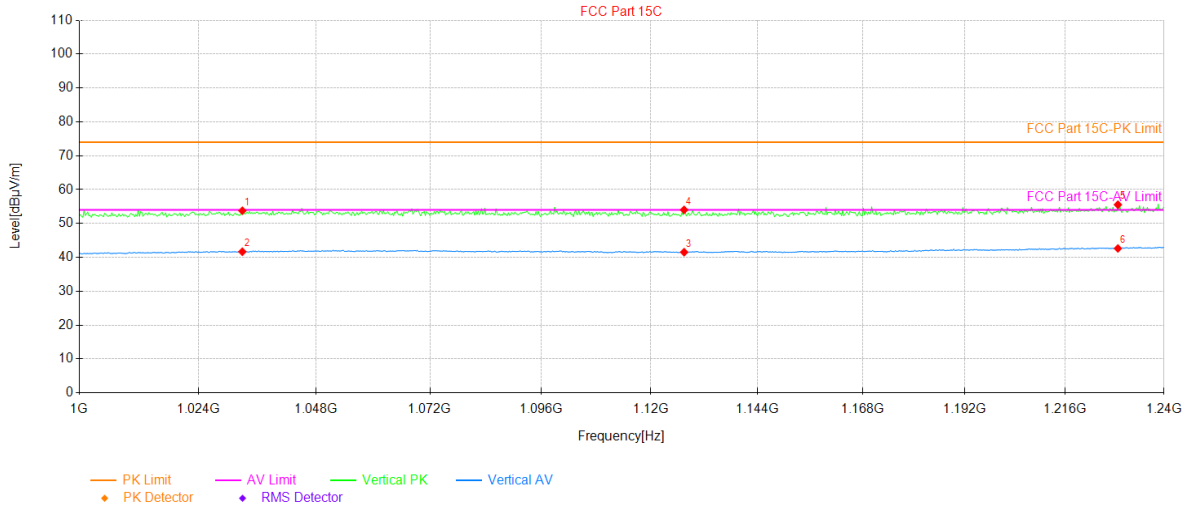


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1032.88	23.12	30.65	53.77	74.00	20.23	17	PK	PASS	Vertical
2	1032.88	11.02	30.65	41.67	54.00	12.33	134	AV	PASS	Vertical
3	1127.44	10.70	30.83	41.53	54.00	12.47	192	AV	PASS	Vertical
4	1127.44	23.19	30.83	54.02	74.00	19.98	219	PK	PASS	Vertical
5	1228.72	24.17	31.38	55.55	74.00	18.45	210	PK	PASS	Vertical
6	1228.72	11.25	31.38	42.63	54.00	11.37	349	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Kiran Zeng	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz		

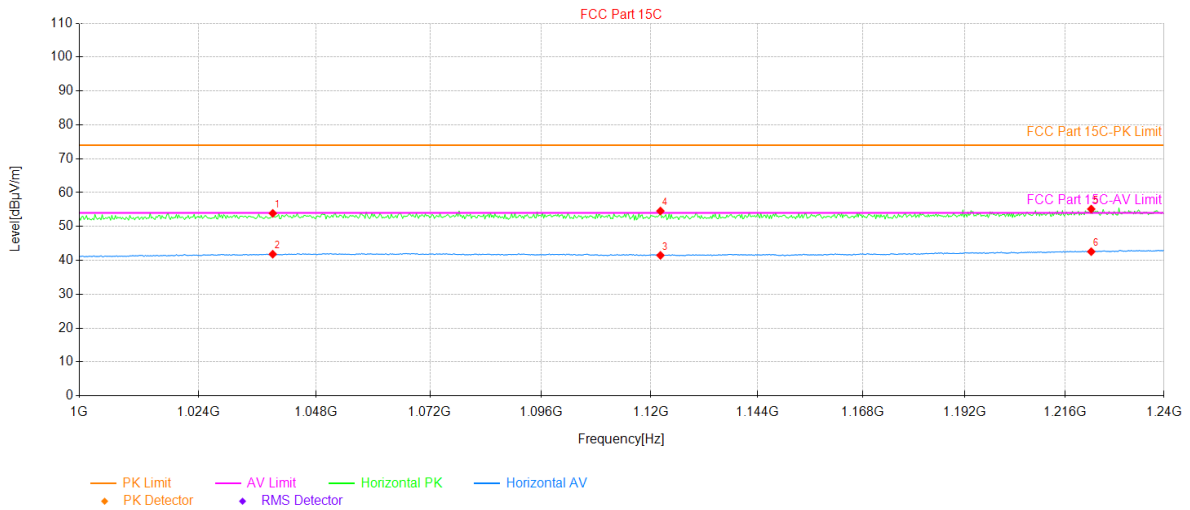


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1039.12	23.20	30.68	53.88	74.00	20.12	267	PK	PASS	Horizontal
2	1039.12	11.14	30.68	41.82	54.00	12.18	21	AV	PASS	Horizontal
3	1122.16	10.67	30.81	41.48	54.00	12.52	205	AV	PASS	Horizontal
4	1122.16	23.76	30.81	54.57	74.00	19.43	94	PK	PASS	Horizontal
5	1222.24	23.83	31.32	55.15	74.00	18.85	334	PK	PASS	Horizontal
6	1222.24	11.26	31.32	42.58	54.00	11.42	285	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Kiran Zeng	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz		

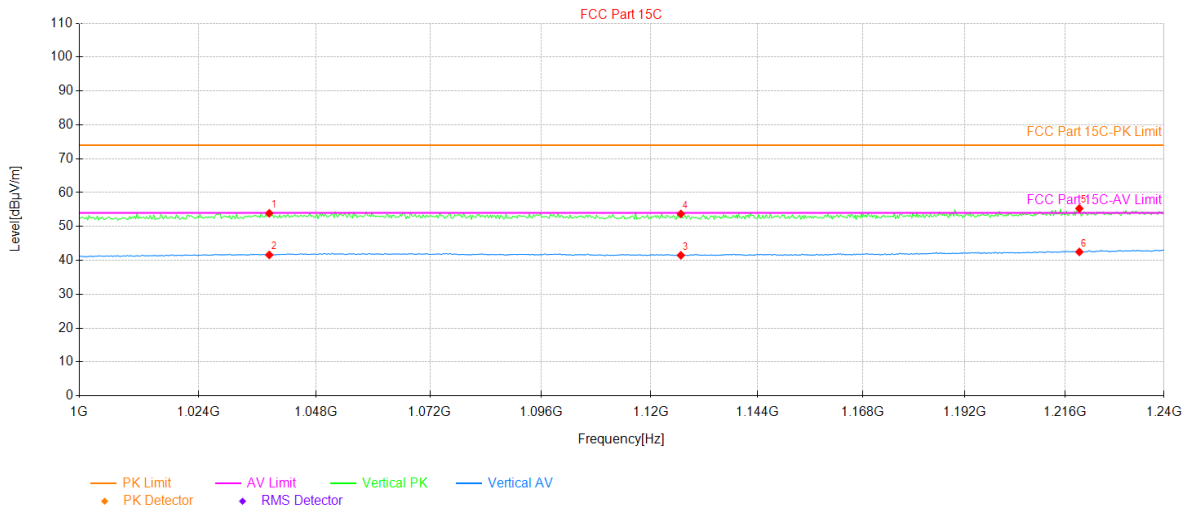


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1038.40	23.22	30.68	53.90	74.00	20.10	267	PK	PASS	Vertical
2	1038.40	10.92	30.68	41.60	54.00	12.40	57	AV	PASS	Vertical
3	1126.72	10.67	30.83	41.50	54.00	12.50	62	AV	PASS	Vertical
4	1126.72	22.88	30.83	53.71	74.00	20.29	353	PK	PASS	Vertical
5	1219.36	23.99	31.31	55.30	74.00	18.70	39	PK	PASS	Vertical
6	1219.36	11.19	31.31	42.50	54.00	11.50	30	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Kiran Zeng	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz		

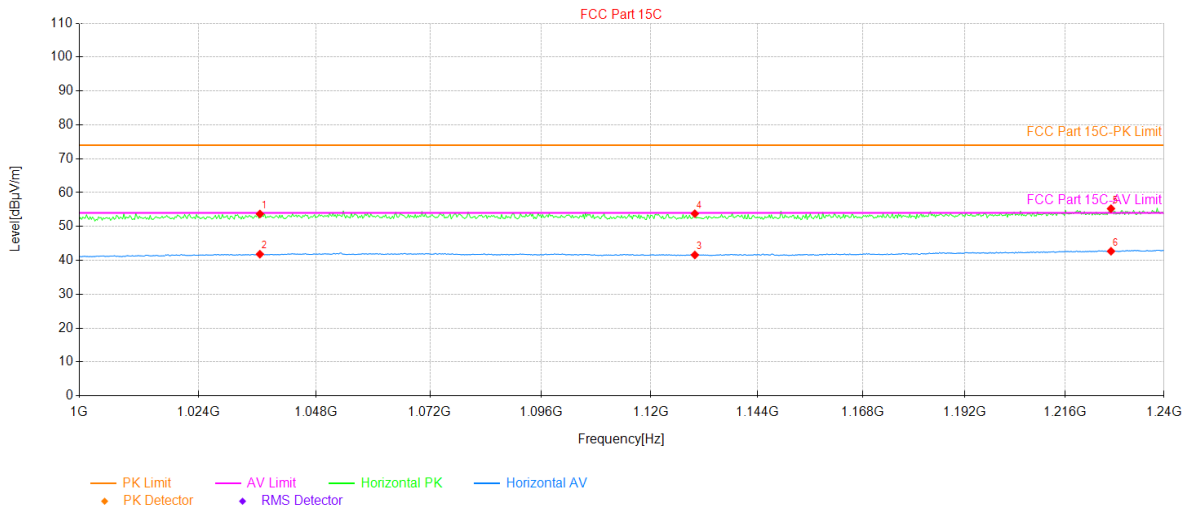

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1036.48	23.03	30.66	53.69	74.00	20.31	329	PK	PASS	Horizontal
2	1036.48	11.16	30.66	41.82	54.00	12.18	288	AV	PASS	Horizontal
3	1129.84	10.74	30.85	41.59	54.00	12.41	311	AV	PASS	Horizontal
4	1129.84	22.93	30.85	53.78	74.00	20.22	243	PK	PASS	Horizontal
5	1227.04	23.91	31.36	55.27	74.00	18.73	171	PK	PASS	Horizontal
6	1227.04	11.33	31.36	42.69	54.00	11.31	135	AV	PASS	Horizontal


**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

### 5.7.4 Emissions in Non-restricted Frequency Bands

Below 1GHz:

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Robin Gu	<b>Test mode:</b>	Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz		

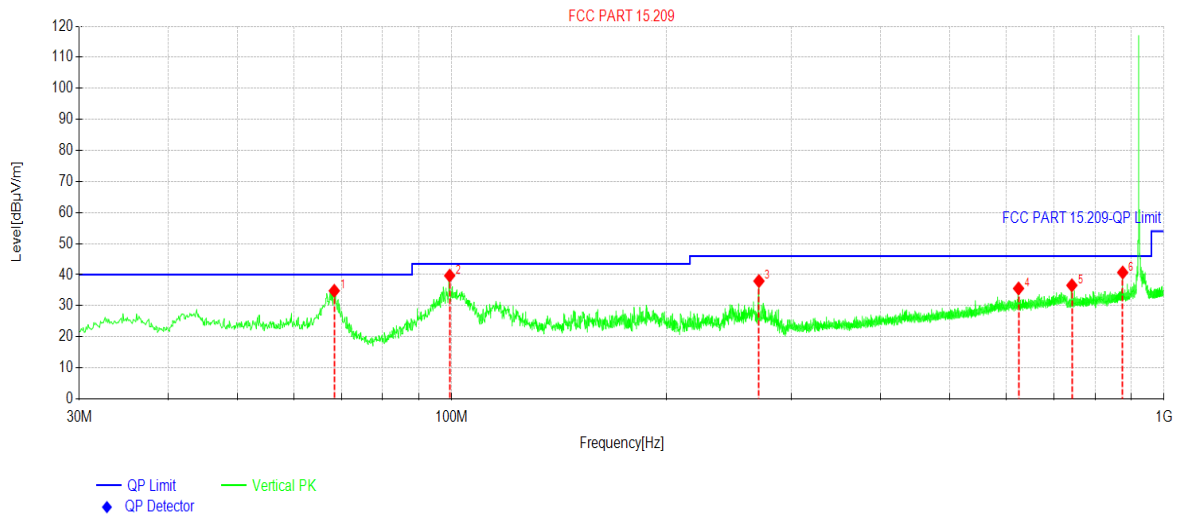


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	68.4158	51.00	-16.20	34.80	40.00	5.20	PK	Vertical
2	99.3619	54.53	-14.84	39.69	43.50	3.81	PK	Vertical
3	270.002	51.67	-13.74	37.93	46.00	8.07	PK	Vertical
4	624.960	41.92	-6.37	35.55	46.00	10.45	PK	Vertical
5	742.536	41.20	-4.64	36.56	46.00	9.44	PK	Vertical
6	875.051	43.73	-3.02	40.71	46.00	5.29	PK	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

<b>Product Name:</b>	Industrial AI Edge Computing Gateway	<b>Product Model:</b>	DSGW-380
<b>Test By:</b>	Robin Gu	<b>Test mode:</b>	Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz		

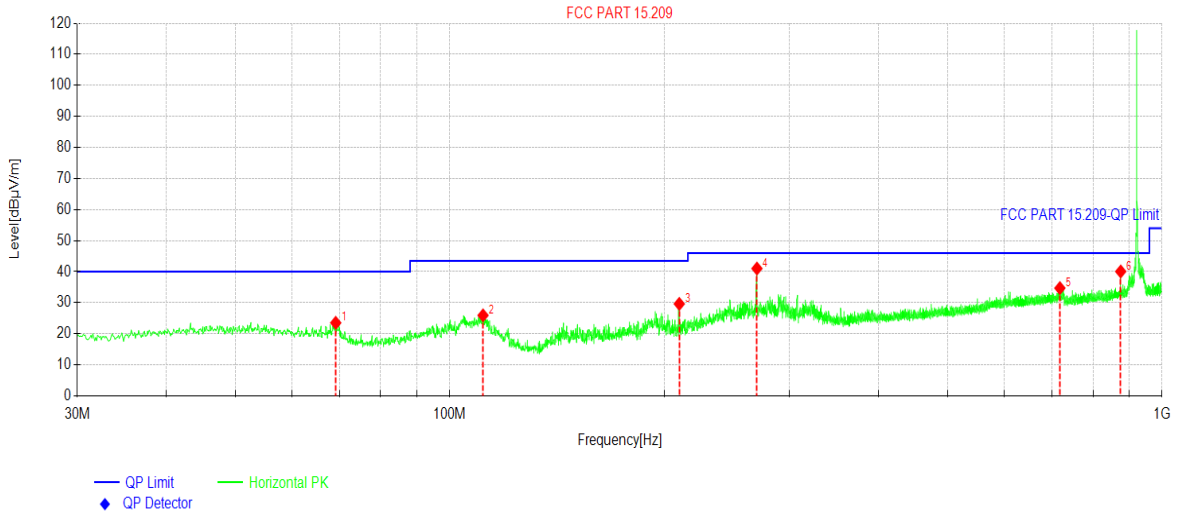

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	69.1919	40.05	-16.53	23.52	40.00	16.48	PK	Horizontal
2	111.391	40.97	-15.05	25.92	43.50	17.58	PK	Horizontal
3	210.050	45.06	-15.43	29.63	43.50	13.87	PK	Horizontal
4	270.002	54.76	-13.74	41.02	46.00	4.98	PK	Horizontal
5	718.865	39.76	-5.05	34.71	46.00	11.29	PK	Horizontal
6	875.051	43.08	-3.02	40.06	46.00	5.94	PK	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

**Above 1GHz:**

Lowest channel						
Peak Value						
Frequency (MHz)	Read Level (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
1846.60	71.39	-22.41	48.98	74.00	25.02	Vertical
1846.60	71.63	-22.41	49.22	74.00	24.78	Horizontal
Average Value						
Frequency (MHz)	Read Level (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
1846.60	67.98	-22.41	45.57	54.00	8.43	Vertical
1846.60	68.07	-22.41	45.66	54.00	8.34	Horizontal
Middle channel						
Peak Value						
Frequency (MHz)	Read Level (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
1851.40	71.19	-22.33	48.86	74.00	25.14	Vertical
1851.40	70.37	-22.33	48.04	74.00	25.96	Horizontal
Average Value						
Frequency (MHz)	Read Level (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
1851.40	66.97	-22.33	44.64	54.00	9.36	Vertical
1851.40	65.59	-22.33	43.26	54.00	10.74	Horizontal
Highest channel						
Peak Value						
Frequency (MHz)	Read Level (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
1855.00	71.14	-22.27	48.87	74.00	25.13	Vertical
1855.00	69.56	-22.27	47.29	74.00	26.71	Horizontal
Average Value						
Frequency (MHz)	Read Level (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
1855.00	64.46	-22.27	42.19	54.00	11.81	Vertical
1855.00	63.52	-22.27	41.25	54.00	12.75	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						

-----End of report-----