



HIRSCHMANN MOBILITY

Antenna Box GNSS+CN1+WiFi/BT

Part Number 920-719-001

A 006 820 30 75

Features

- Interior installation on non conductible material
- For Cellular networks, GNSS services and WLAN/BT (2.4+5.8 GHz)

Technical Data

Dimensions	162 x 82 x25 mm
Housing materials	PC+ABS comparable UV light resistible material
Weight	140 g
Operations temp. range	-40 - +85 °C
Storage temp. range	-40 - + 90 °C
Protection class	IP6k0 (acc. ISO 20653)
Connector	GNSS: Fakra male, Code C (Blue) CN: Fakra male, Code D (Bordeaux) WiFi/BT: Fakra male, Code I (Beige)

Technical Data

Cellular	
Frequency range	698 - 960 MHz 1447 - 1511 MHz 1710 - 2690 MHz 3300 - 4200 MHz 4400 - 5000 MHz
Return loss	> 7 dB
VSWR	> 2.6
Impedance	50 Ω
Average gain*	698 - 960 MHz: >-4 dBi 1447 - 1511 MHz: >-4 dBi 1710 - 2690 MHz: >-4 dBi 3300 - 4200 MHz: >-4 dBi 4400 - 5000 MHz: >-4 dBi
Peak gain*	698 - 960 MHz: 2.5 dBi 1447 - 1511 MHz: 2.6 dBi 1710 - 2690 MHz: 3.6 dBi 3300 - 4200 MHz: 6.4 dBi 4400 - 5000 MHz: 4.3 dBi
Radiation efficiency	698 - 960 MHz: > 40% 1447 - 1511 MHz: > 40% 1710 - 2690 MHz: > 30% 3300 - 4200 MHz: > 40% 4400 - 5000 MHz: > 40%
Diagnostic Resistor	10 kΩ
BT/WiFi	
Frequency bands	2400-2480 MHz 5150-5835 MHz
Return loss	> 7 dB
VSWR	< 2.6
Impedance	50 Ω
Average gain* (0=50-90°)	2400-2480 MHz: >-4 dBi 5150-5835 MHz: >-4 dBi
Peak gain*	2400-2480 MHz: 2.6 dBi 5150-5835 MHz: 5 dBi
Radiation efficiency**	2400-2480 MHz: > 40% 5150-5835 MHz: > 40%
Diagnostic Resistor	10 kΩ


Antenna Box GNSS+CN1+WiFi/BT | Part Number 920-719-001

GNSS (GPS, Galileo, GLONASS, Beidou, QZSS)	
Output Return loss	> 10 dB
Output VSWR	< 2
Impedance	50 Ω
Low Noise Amplifier	
Current Consumption	typ. 22 mA
Supply Voltage	3-5.5 V
LNA Gain	typ. 28 dB
Noise Figure	< 2 dB
Out-of-Band Rejection	typ. 40 dB
Passive Antenna	
Polarization	RHCP
Passive Antenna Gain	typ. 3 dBic
Coexistence	
Frequency range	617 - 960 MHz 1447 - 1511 MHz 1710 - 2690 MHz 3300 - 4200 MHz 4400 - 5000 MHz 2400 - 2480 MHz 5150 - 5835 MHz
Isolation CN-BT/WiFi	617 - 960 MHz: 40 dB 1447 - 1511 MHz: 40 dB 1710 - 2690 MHz: 40 dB 3300 - 4200 MHz: 38 dB 4400 - 5000 MHz: 28 dB 2400 - 2480 MHz: 40 dB 5150 - 5835 MHz: 28 dB

* Measured on dielectric slab


**including Filtering

Technical Drawing

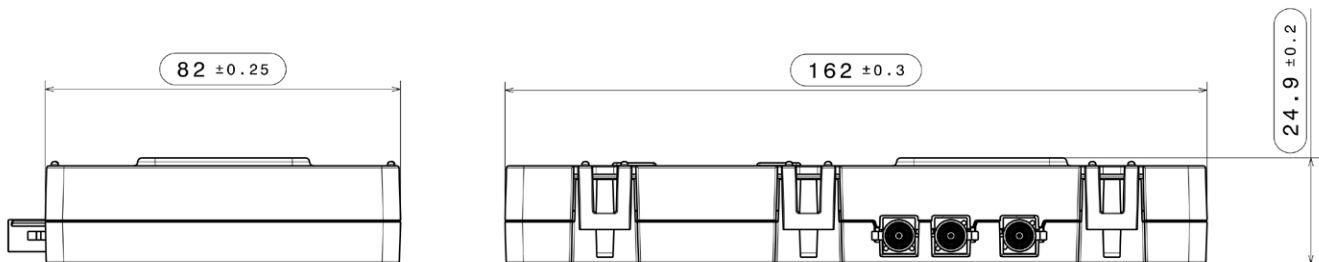


Antenna diagrams
Cellular Network

Reflection Coefficient

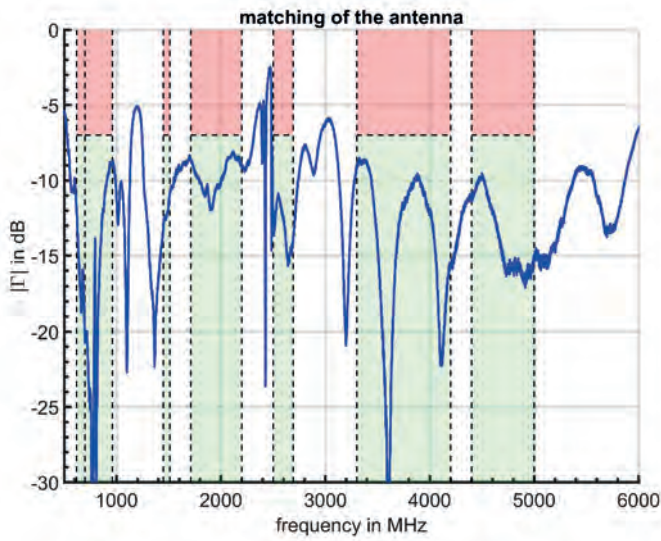


VSWR

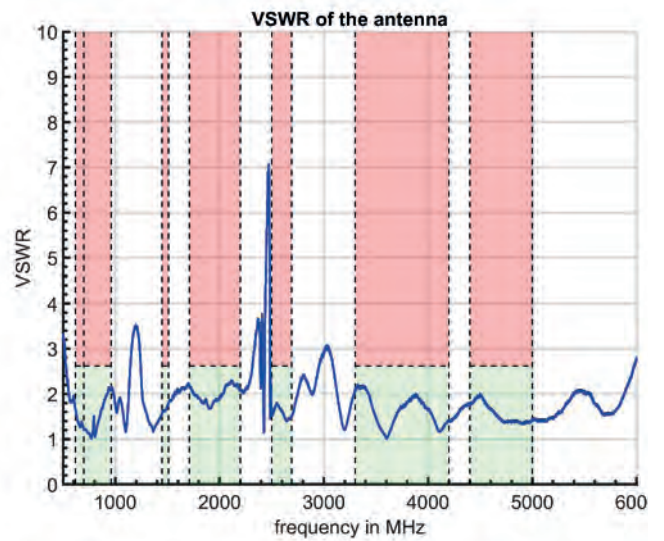


Average Gain

realized partial average gain (Theta=[0.00 - 180.00]° ; Phi=[0.00 - 355.00]°)
E_Total, Theta - linear w. spherical area consideration, Phi - linear

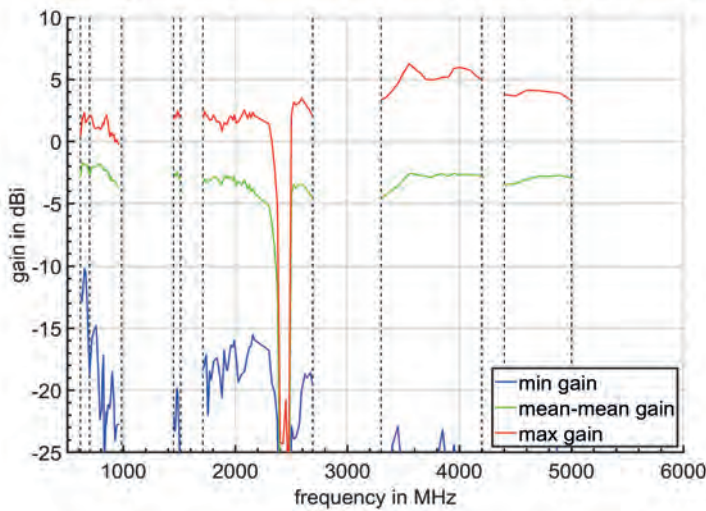


Efficiency (incl. Filtering)

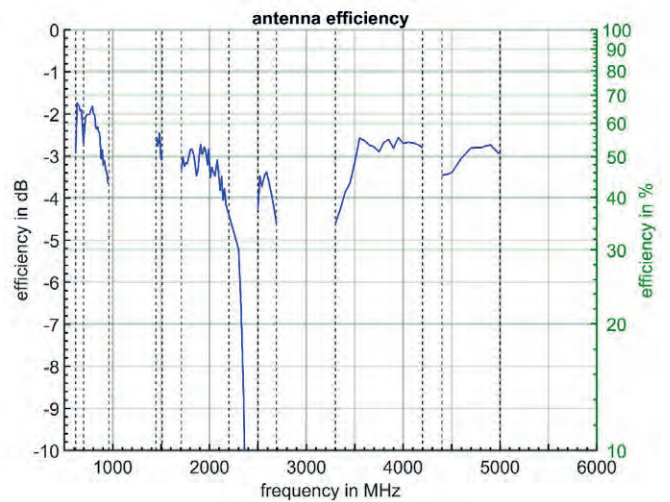


Antenna diagrams Cellular Network

Radiation pattern


3D radiation pattern
realized antenna gain (E_Total, frequency = 617.0 MHz)

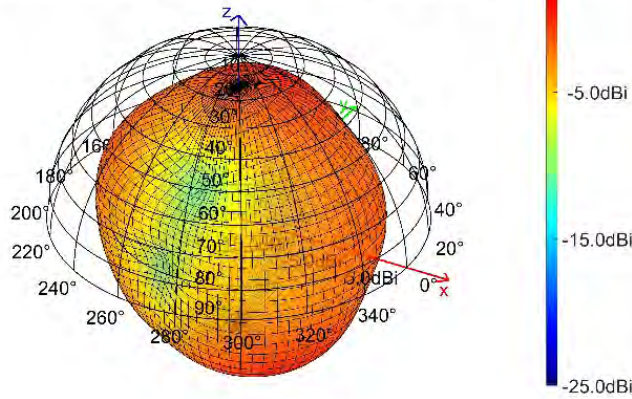


3D radiation pattern
realized antenna gain (E_Total, frequency = 698.0 MHz)

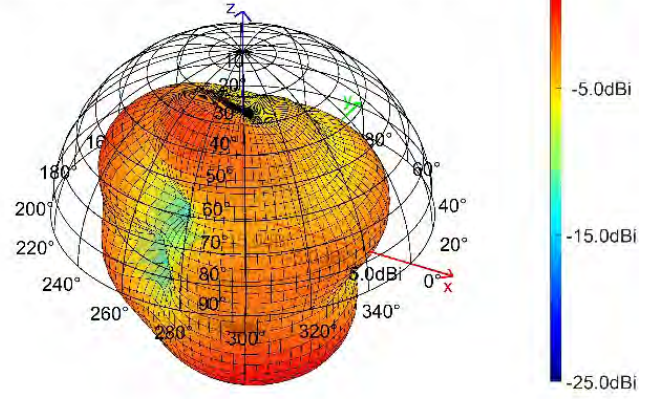


3D radiation pattern
realized antenna gain (E_Total, frequency = 960.0 MHz)

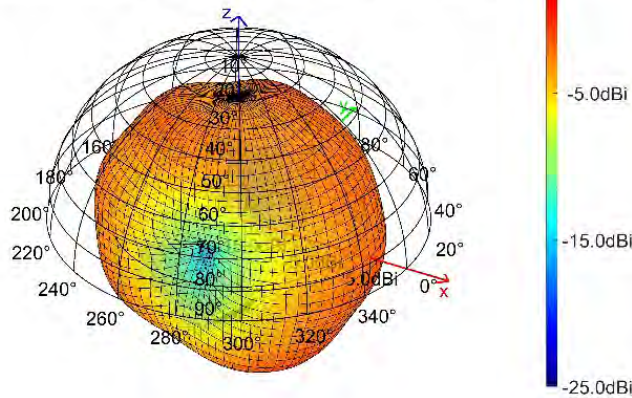


3D radiation pattern
realized antenna gain (E_Total, frequency = 1447.9 MHz)

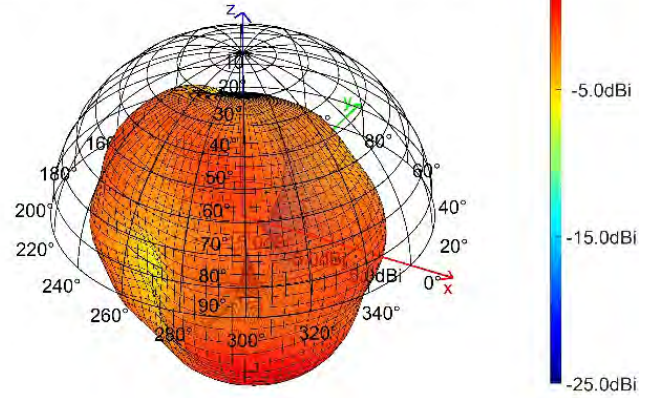

3D radiation pattern
realized antenna gain (E_Total, frequency = 1510.9 MHz)

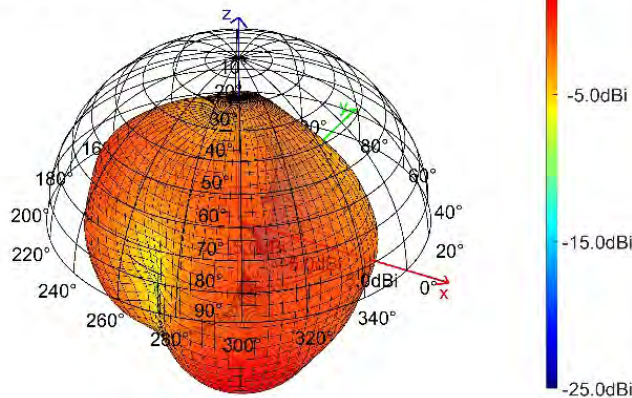


3D radiation pattern
realized antenna gain (E_Total, frequency = 1710.0 MHz)

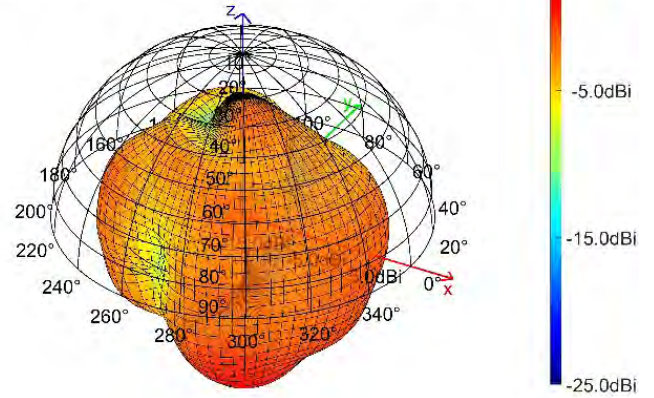


Antenna diagrams
Cellular Network

Radiation pattern


3D radiation pattern
realized antenna gain (E_Total, frequency = 2155.0 MHz)

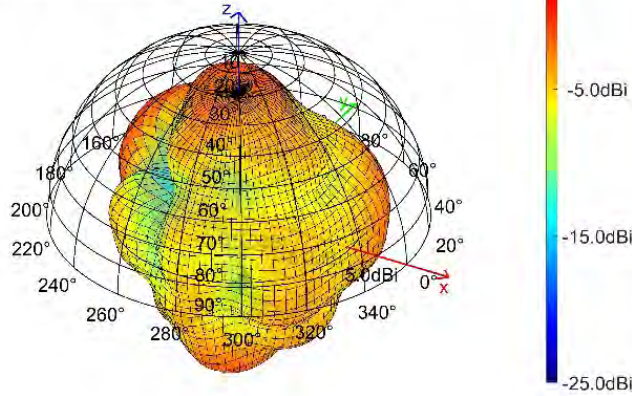


3D radiation pattern
realized antenna gain (E_Total, frequency = 2690.0 MHz)

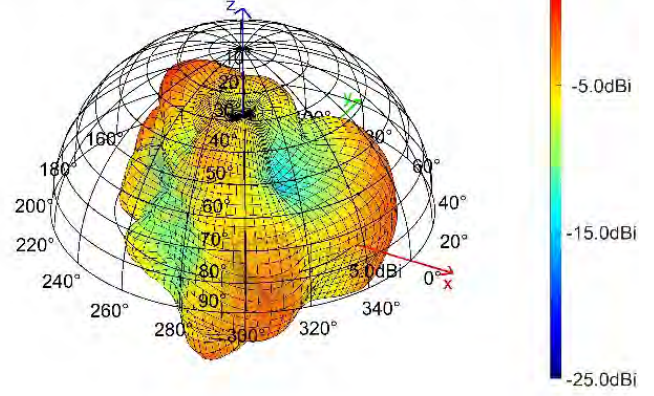


3D radiation pattern
realized antenna gain (E_Total, frequency = 3300.0 MHz)

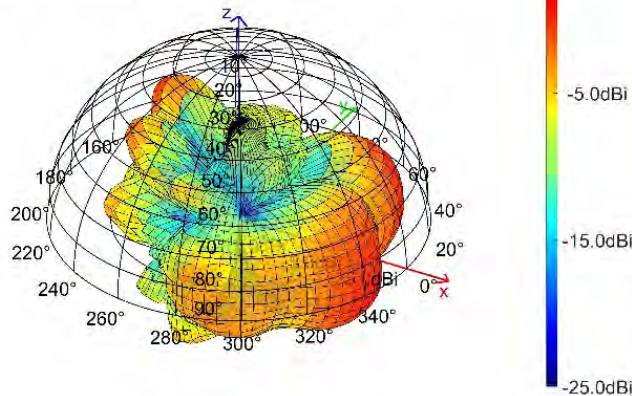


3D radiation pattern
realized antenna gain (E_Total, frequency = 3750.0 MHz)

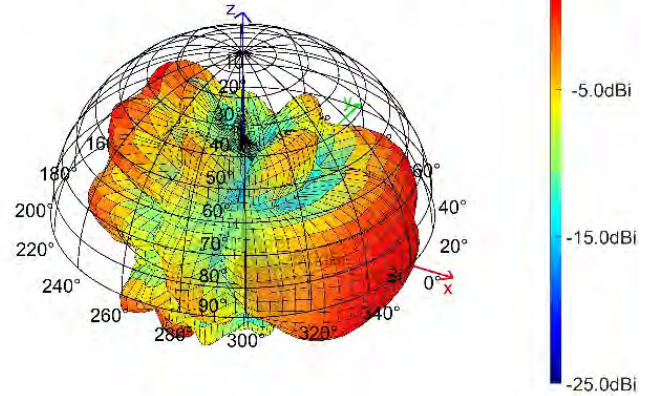

3D radiation pattern
realized antenna gain (E_Total, frequency = 4200.0 MHz)

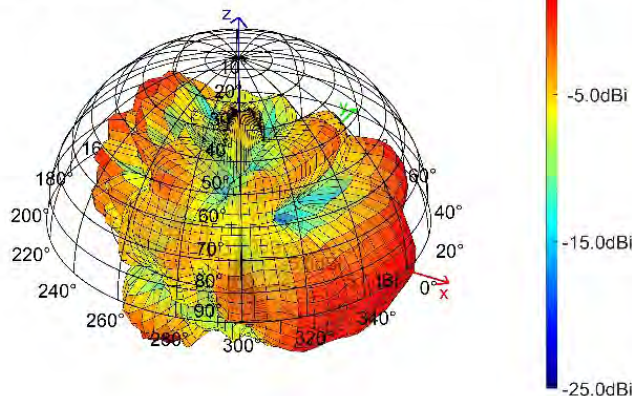


3D radiation pattern
realized antenna gain (E_Total, frequency = 4400.0 MHz)

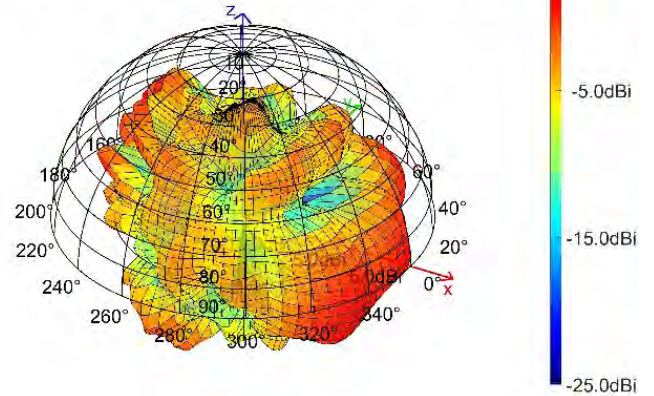


Antenna diagrams
Cellular Network

Radiation pattern

3D radiation pattern
realized antenna gain (E_Total, frequency = 4700.0 MHz)

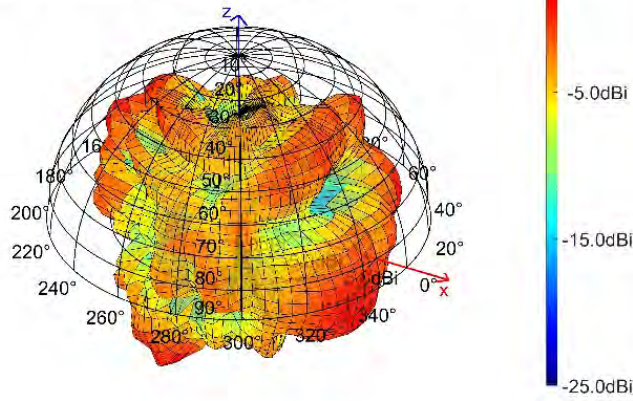


3D radiation pattern
realized antenna gain (E_Total, frequency = 4990.0 MHz)

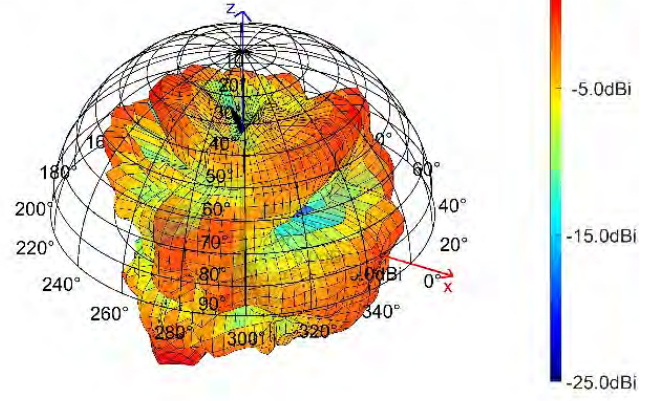


Antenna diagrams
Bluetooth/WiFi

Reflection Coefficient

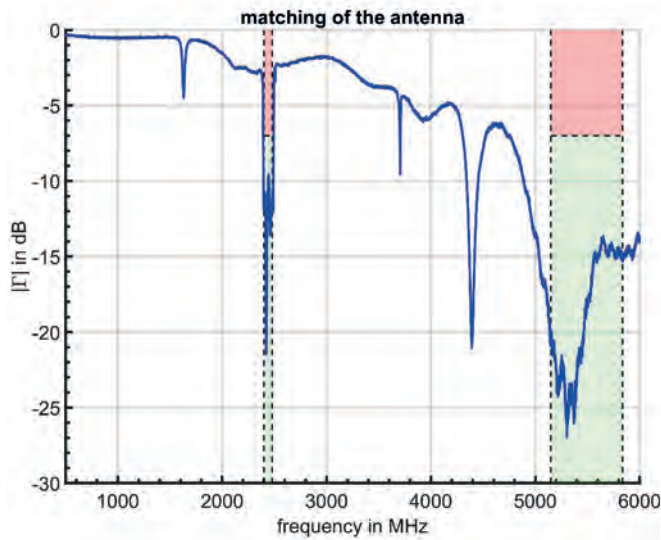


VSWR

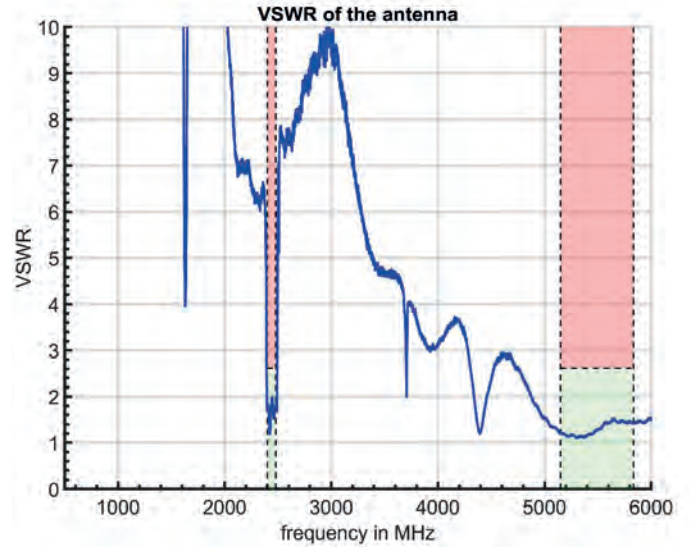


Average Gain

realized partial average gain (Theta=[0.00 - 180.00]° ; Phi=[0.00 - 355.00]°)
E_Total, Theta - linear w. spherical area consideration, Phi - linear

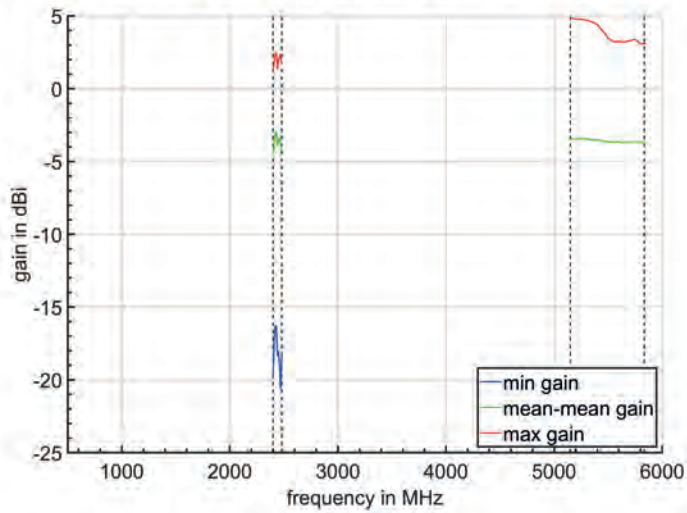


Efficiency (incl. Filtering)

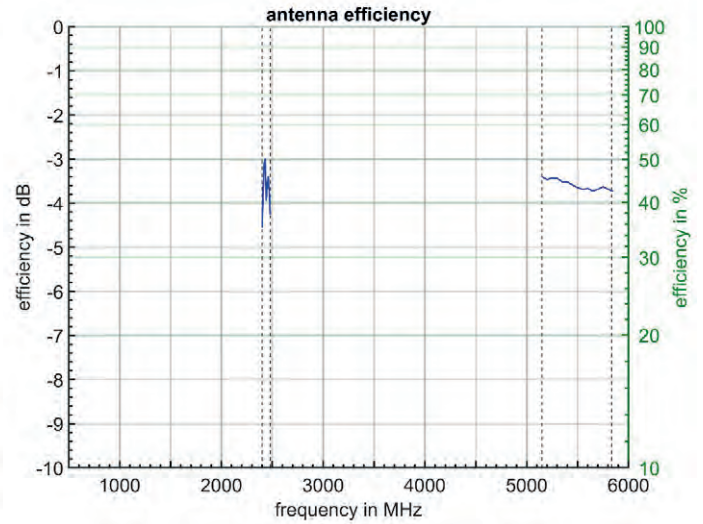


Antenna diagrams
Bluetooth/WiFi

Radiation pattern


3D radiation pattern
realized antenna gain (E_Total, frequency = 2400.0 MHz)

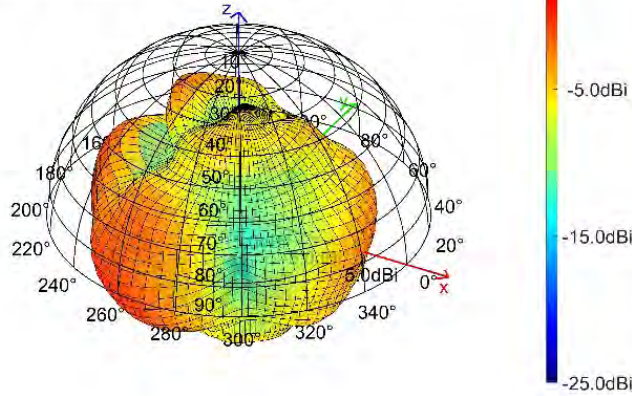


3D radiation pattern
realized antenna gain (E_Total, frequency = 2450.0 MHz)

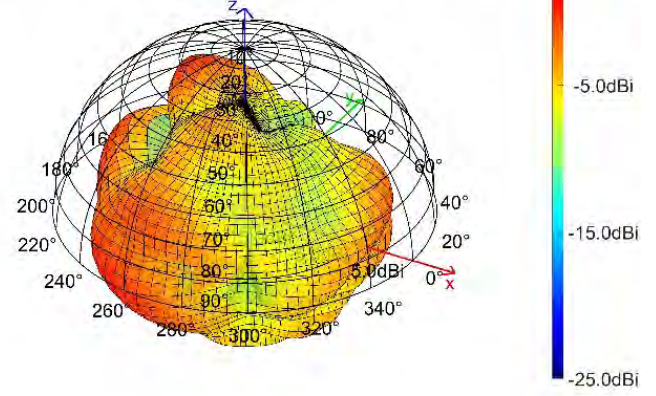


3D radiation pattern
realized antenna gain (E_Total, frequency = 2480.0 MHz)

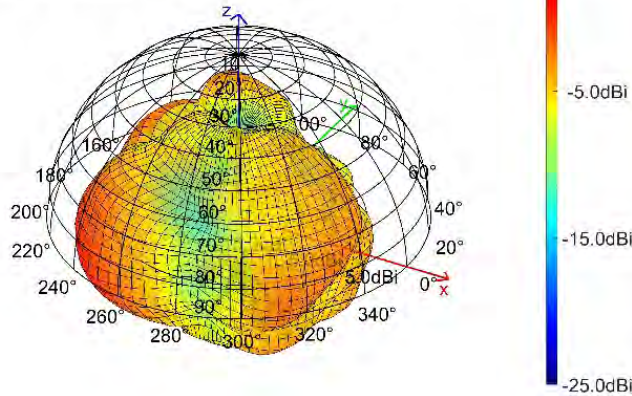


3D radiation pattern
realized antenna gain (E_Total, frequency = 5150.0 MHz)

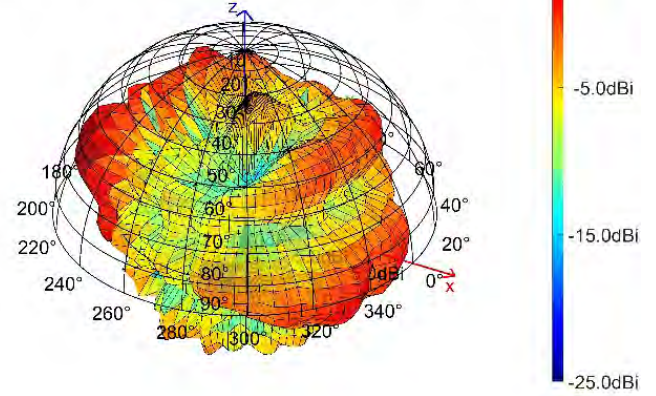

3D radiation pattern
realized antenna gain (E_Total, frequency = 5500.0 MHz)

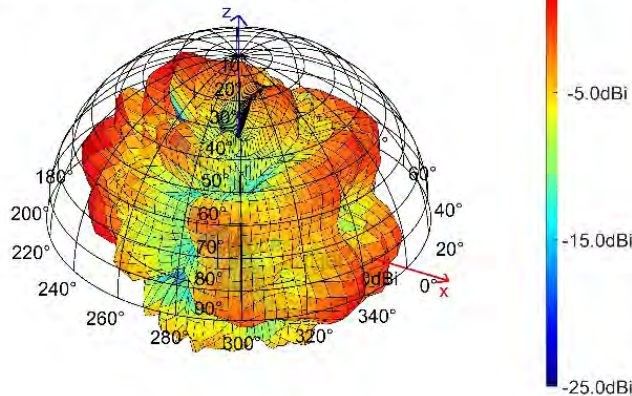


3D radiation pattern
realized antenna gain (E_Total, frequency = 5800.0 MHz)

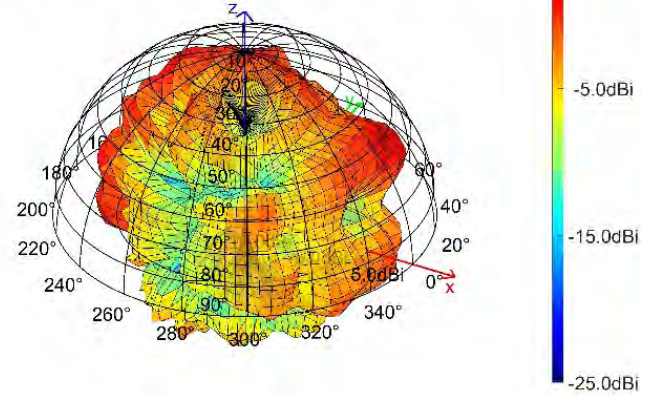


Antenna diagrams
GNSS


Output Reflection Coefficient

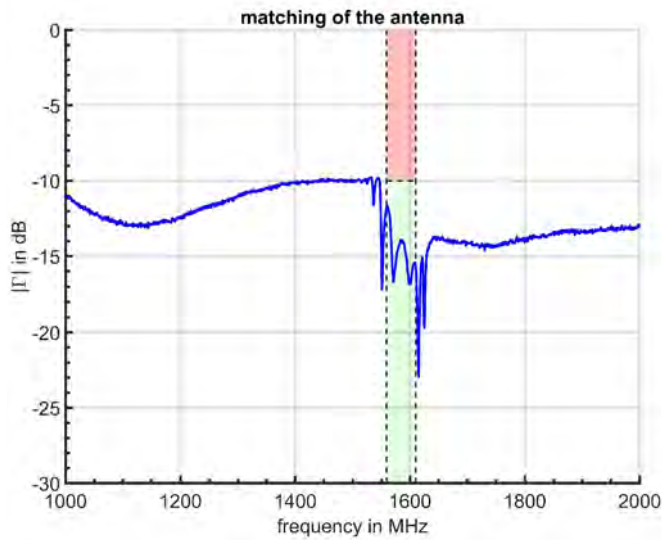


Output VSWR

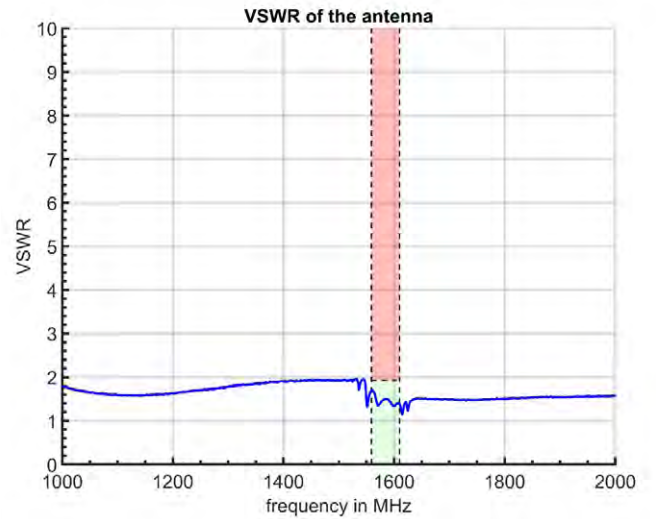


LNA Gain

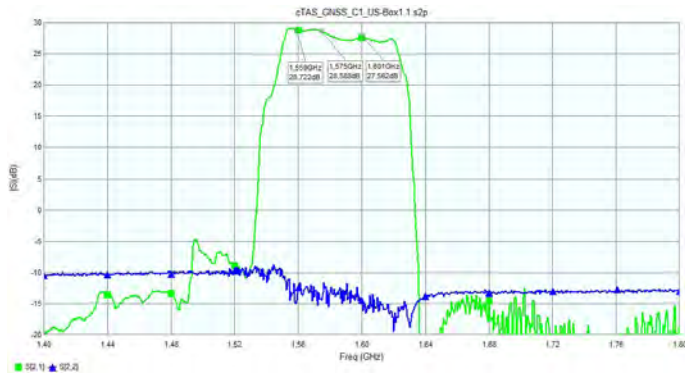

LNA Noise Figure

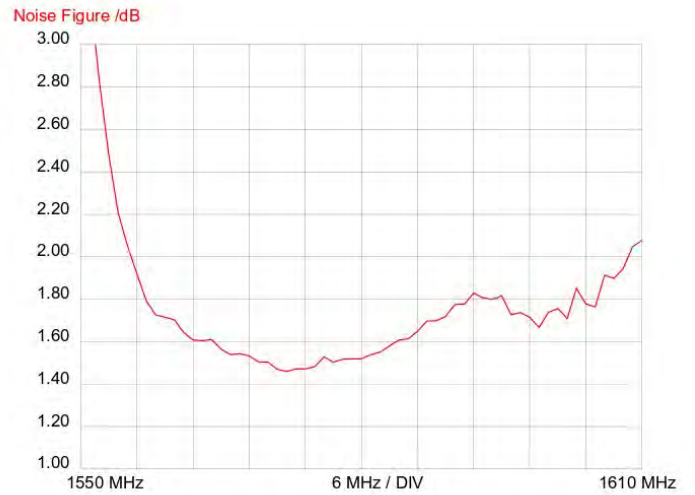


Passive Antenna Gain

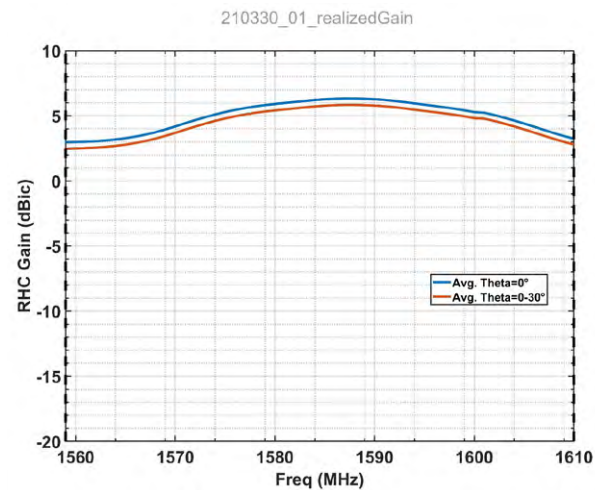


Antenna diagrams
GNSS

Passive Patch Antenna Radiation Pattern*


3D radiation pattern
realized antenna gain (E_RHC, frequency = 1560.0 MHz)

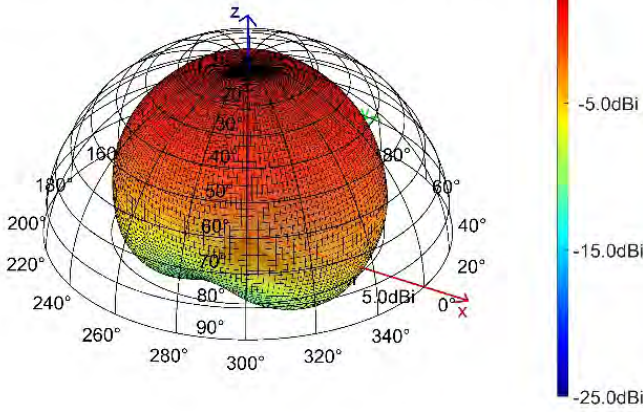

3D radiation pattern
realized antenna gain (E_RHC, frequency = 1575.0 MHz)

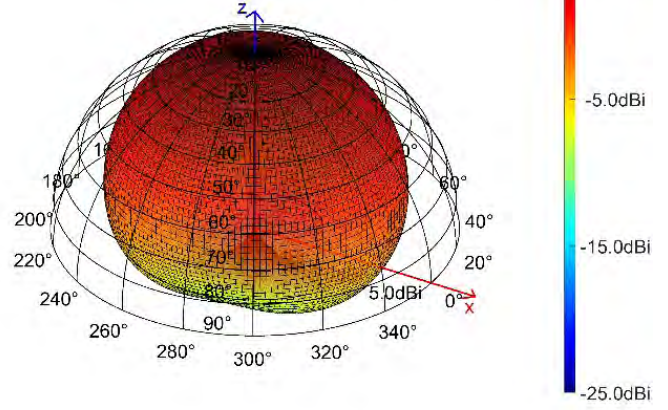


3D radiation pattern
realized antenna gain (E_RHC, frequency = 1610.0 MHz)

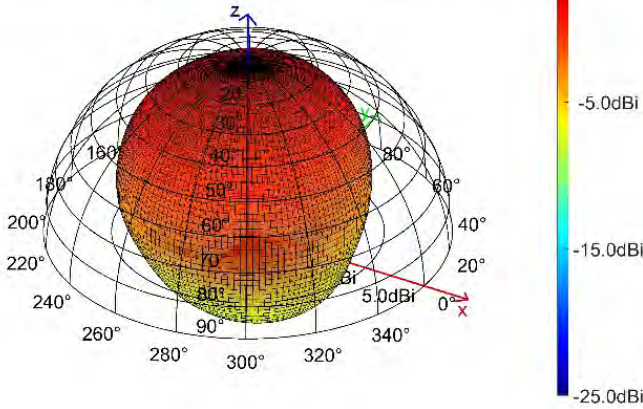

*Measured on 150mm Groundplane

Antenna diagrams Coexistence CN-BT/WiFi

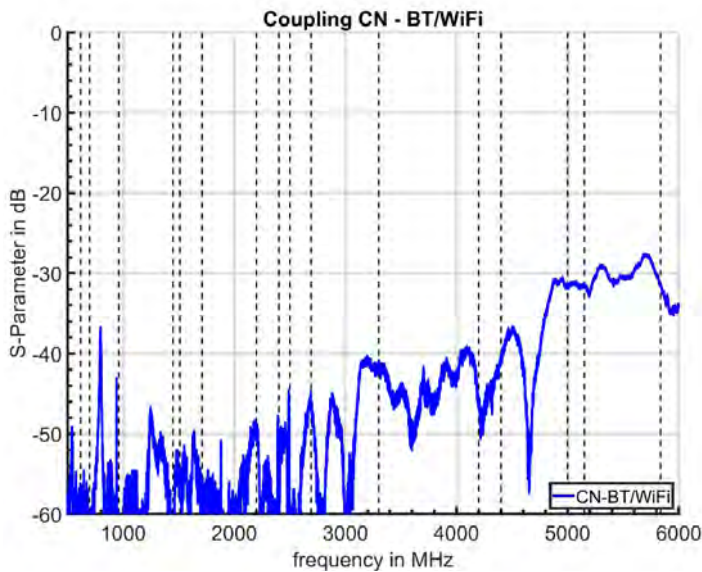

te.com/hirschmann-mobility

hirschmann-mobility@te.com

Hirschmann Car Communication GmbH,
a TE Connectivity Company
Stuttgarter Strasse 45-51
72654 Neckartenzlingen | Germany
Phone: +49 7127 14-0 | Fax: +49 7127 14-1428

TE, TE Connectivity, and TE connectivity (logo) are trademarks.
Hirschmann, GLONASS, Bluetooth and Fakra are trademarks.
Other products and/or company names might be trademarks of their respective owners.

DISCLAIMER While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this data sheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this data sheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© 2021 TE Connectivity. All Rights Reserved. | Published 03-2023