


## Antenna report

### 1.test philosophy

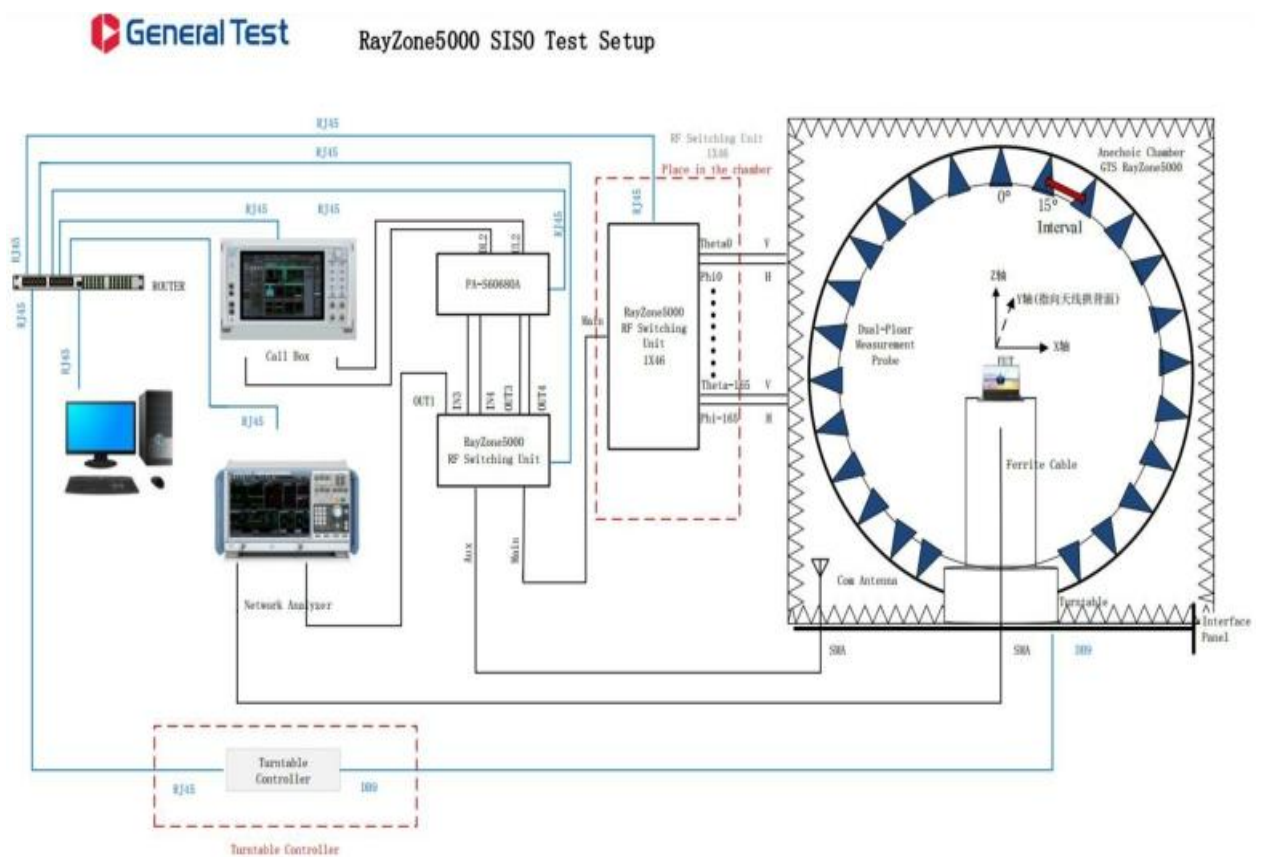

## 2. test equipment


name	modle	model numbei	manufacturer	calibration date	Date of next calibration
OTA test system	RayZone-5000	RFI-LAB-RF-D00	GTS	2021.3.22	2023.3.21
network analyzer	E5071C	RFI-LAB-RF-C02	KEYSIGHT	2022.5.13	2023.5.12
network analyzer	E5071C	RFI-LAB-RF-D01	KEYSIGHT	2022.5.13	2023.5.12

## 3. testing environment

environment temperature	23.6°C
relative humidity	58%RH
atmospheric pressure	100.14kPa



# ShanWan

## 4. Sample material

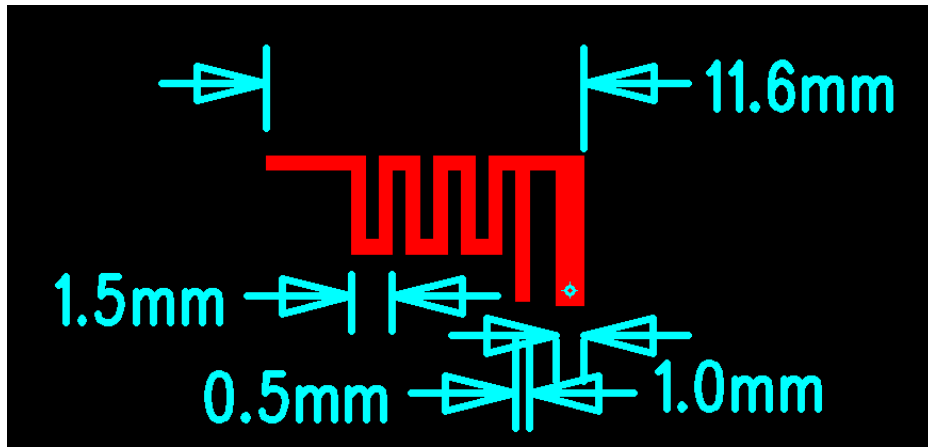

## 5. Sample layout diagram

front view

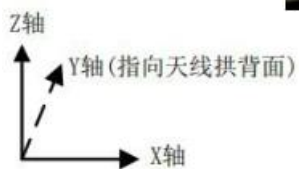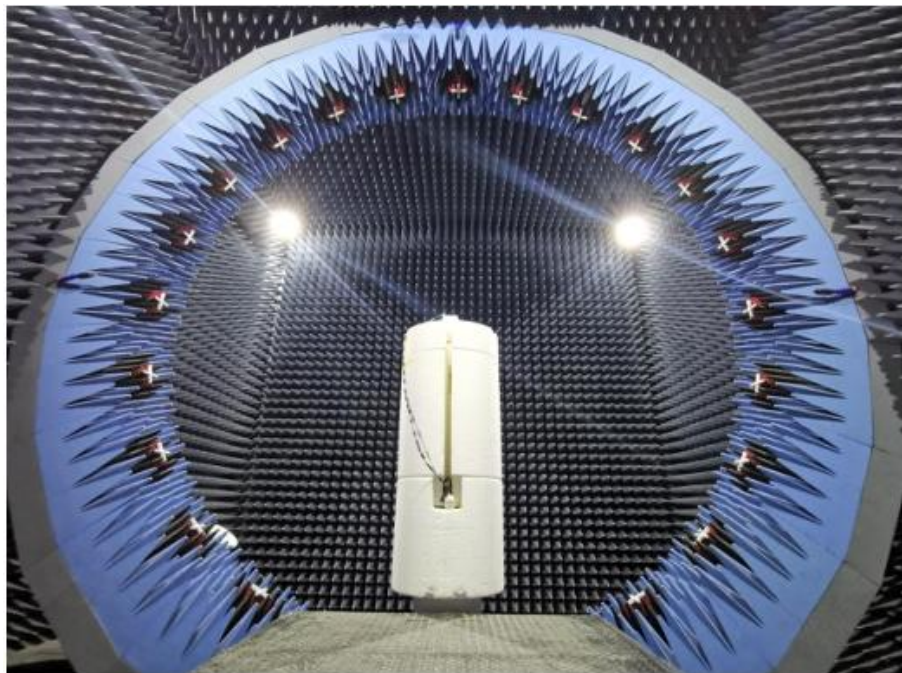

## 6.test result

### 6.1 detection principle

Object name	name of parameter	Method name	standard
Mobile communication antenna	radiation pattern	General technical specification for mobile communication antennas	GB/T 9410-2008
	antenna gain		
	voltage standing wave ratio		
	Roundness of the directional graph		
antenna	Gain and directivity	IEEE Standard Procedure for antenna testing	ANSI/IEEE Std 149-1979
	radiant efficiency		
	impedance		

### 6.2 Test uncertainty

the calculation of Uncertainty is based on the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO, which uses K=2 inclusion factor and 95% confidence level to represent extended uncertainty.

project	uncertainty
standing wave-ratio swr	$\pm 0.3$
Gain, efficiency	$\pm 0.72\text{dB}$

## 7. test data

### 7.1 Network analyzer test



### 7.2 standing-wave ratio (SWR)

frequency/MHz	2402	2440	2480
voltage standing wave ratio	2.7457	2.6723	2.3064


### 7.3 Gain and efficiency

frequency/MHz	2402	2410	2420	2430	2440	2450	2460	2470	2480
maximum gain/dBi	-1.97	-1.95	-1.63	-1.49	-1.27	-1.06	-0.89	-0.71	-0.95
efficiency/%	17.88	18.34	19.20	19.89	20.58	20.86	21.78	22.18	21.03


### 7.4 Directional artwork

frequency/MHz	2402	2410	2420	2430	2440	2450	2460	2470	2480
H Theta=90/dB	20.55	20.57	20.15	19.12	18.93	20.11	20.49	19.26	16.51


## 7.5 directional diagram

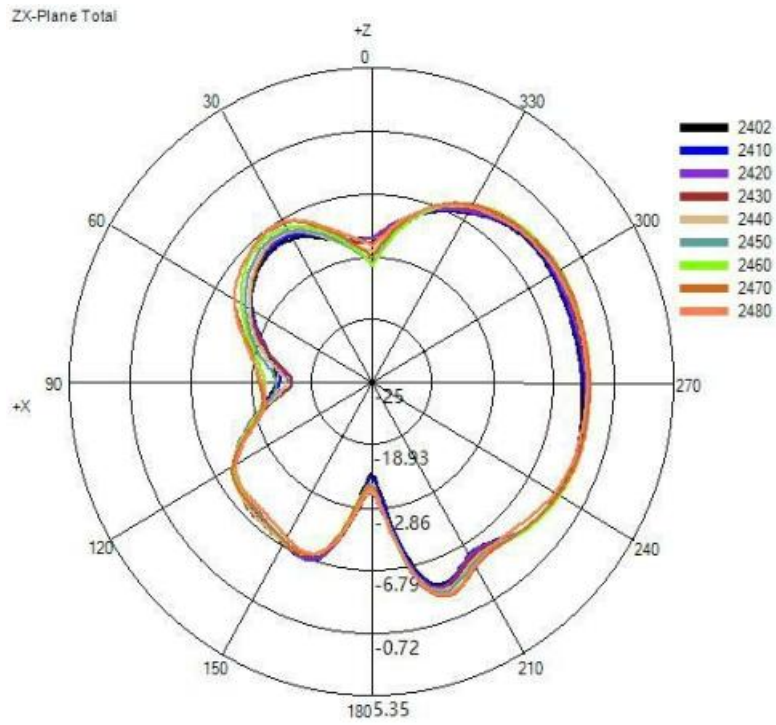


(2) Y-Z (unit: dBi):

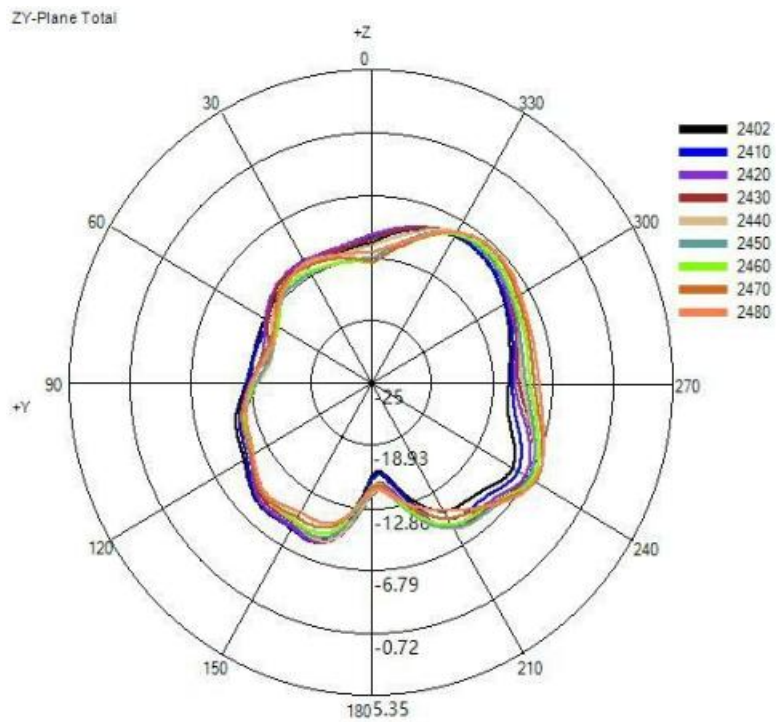

(3) X-Y (unit: dBi):

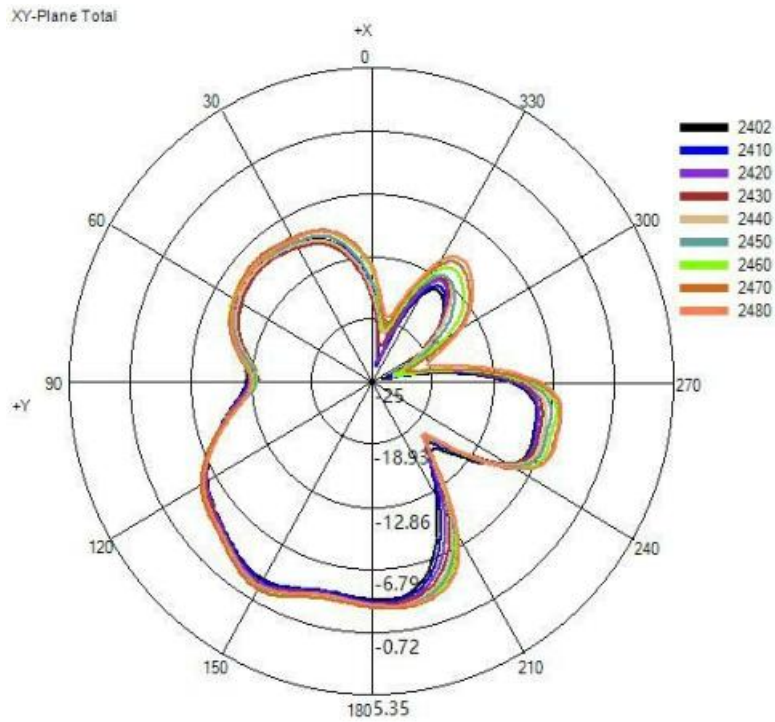

(4) 2470MHz 的 3D directional diagram(unit: dBi):

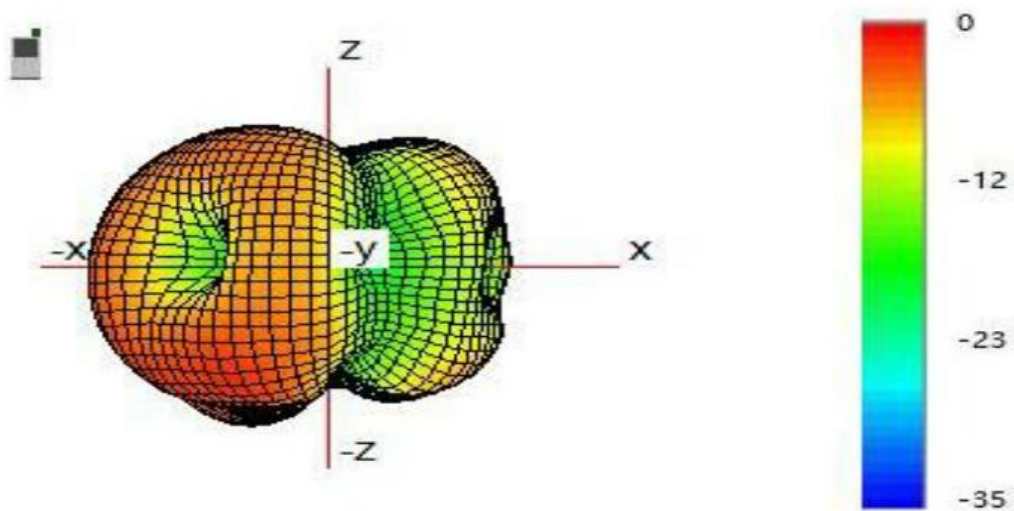

-----end-----

(The following is blank)