



TEST REPORT

APPLICANT : Realme Chongqing Mobile
Telecommunications Corp., Ltd.

PRODUCT NAME : Bluetooth Earphone

MODEL NAME : RMA2408

BRAND NAME : realme

FCC ID : 2AUYFRMA2408

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-10-10

TEST DATE : 2024-10-12 to 2024-11-12

ISSUE DATE : 2024-11-13



Edited by: Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Summary of Test Result4
- 1.1. Testing Applied Standards5
- 1.2. Test Equipment List6
- 1.3. Measurement Uncertainty8
- 1.4. Testing Laboratory8
- 2. General Description9
- 2.1. Information of Applicant and Manufacturer9
- 2.2. Information of EUT9
- 2.3. Channel List of EUT 11
- 2.4. Test Configuration of EUT 12
- 2.5. Test Conditions 12
- 2.6. Test Setup Layout Diagram 12
- 3. Test Results 15
- 3.1. Antenna Requirement 15
- 3.2. Hopping Mechanism 16
- 3.3. Number of Hopping Frequency 17
- 3.4. Duty Cycle of Test Signal 18
- 3.5. Maximum Peak Conducted Output Power 19
- 3.6. Maximum Average Conducted Output Power 20
- 3.7. 20 dB Bandwidth 21
- 3.8. Carried Frequency Separation 22
- 3.9. Time of Occupancy (Dwell time) 23
- 3.10. Conducted Spurious Emissions and Band Edge 24
- 3.11. Conducted Emission 25
- 3.12. Restricted Frequency Bands 26
- 3.13. Radiated Emission 27



Annex A Test Data and Result 29

Change History		
Version	Date	Reason for change
1.0	2024-11-13	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Nov. 12, 2024	Li Zikai	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Oct. 25, 2024	Li Zikai	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Oct. 25, 2024	Li Zikai	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Oct. 25, 2024	Li Zikai	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Oct. 25, 2024	Li Zikai	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Nov. 12, 2024	Li Zikai	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Nov. 12, 2024	Li Zikai	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Nov. 12, 2024	Li Zikai	PASS	No deviation
11	15.207	Conducted Emission	Oct. 16, 2024	Fan Shengquan	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Oct. 12&14, 2024	Zhong Xiangyun	PASS	No deviation
13	15.209,	Radiated	Oct. 12&14,	Zhong	PASS	No deviation



	15.247(d)	Emission	2024	Xiangyun		
--	-----------	----------	------	----------	--	--

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB 558074 D01 v05r02 and DA 00-075.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	N/A	N/A
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	N/A	N/A
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	N/A	N/A
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Applicant Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China
Manufacturer	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

2.2. Information of EUT

Product Name:	Bluetooth Earphone	
Sample No.:	1#, 10#, 12#, 14#	
Hardware Version:	V1	
Software Version:	V1.1.0.16	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	5.4	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	-3.5dBi	
Accessory Information:	Battery (Earphone)	
	Brand Name:	N/A
	Model No.:	112570B
	Serial No.:	N/A
	Capacity:	62mAh
	Rated Voltage:	3.89V
	Charge Limit:	4.48V
	Manufacturer:	Chongqing VDL Electronics Co., LTD.



Accessory Information:	Battery (Charging case)	
	Brand Name:	N/A
	Model No.:	751443
	Serial No.:	N/A
	Capacity:	480mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.35V
	Manufacturer:	Xinyu Ganfeng Electionics Co.,LTD.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

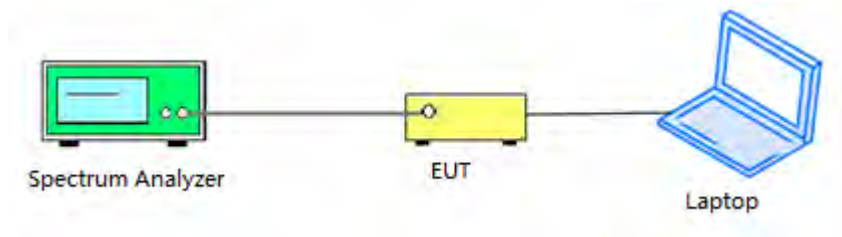


2.6.2. Conducted Emission Measurement

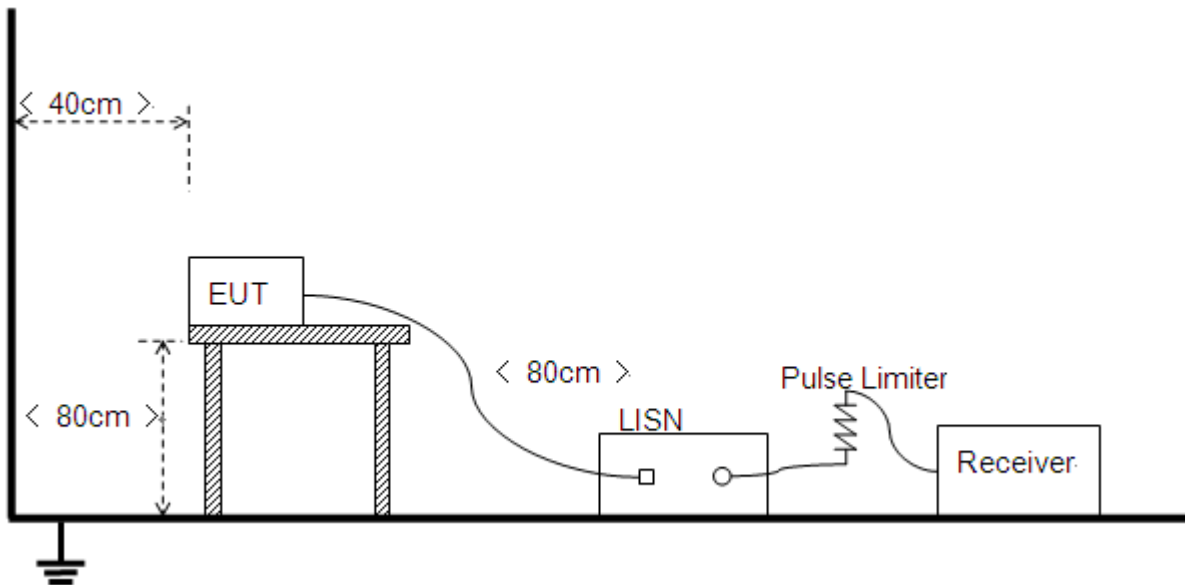


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

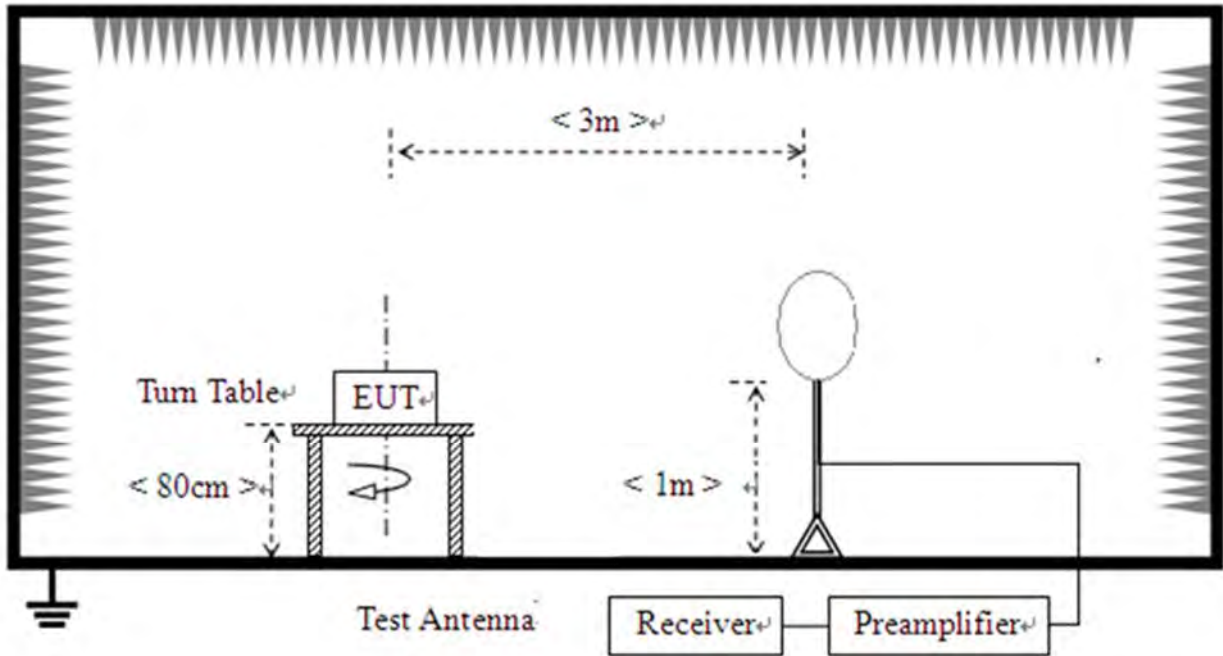

2) For radiated emissions from 30MHz to 1GHz

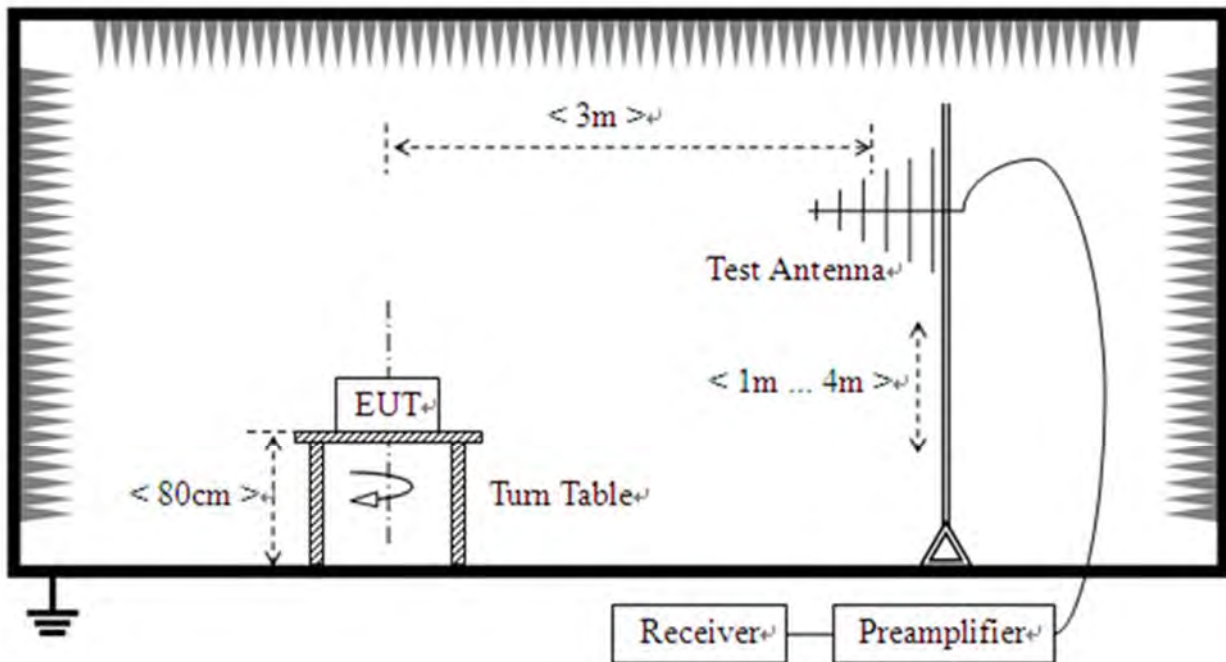

3) For radiated emissions above 1GHz

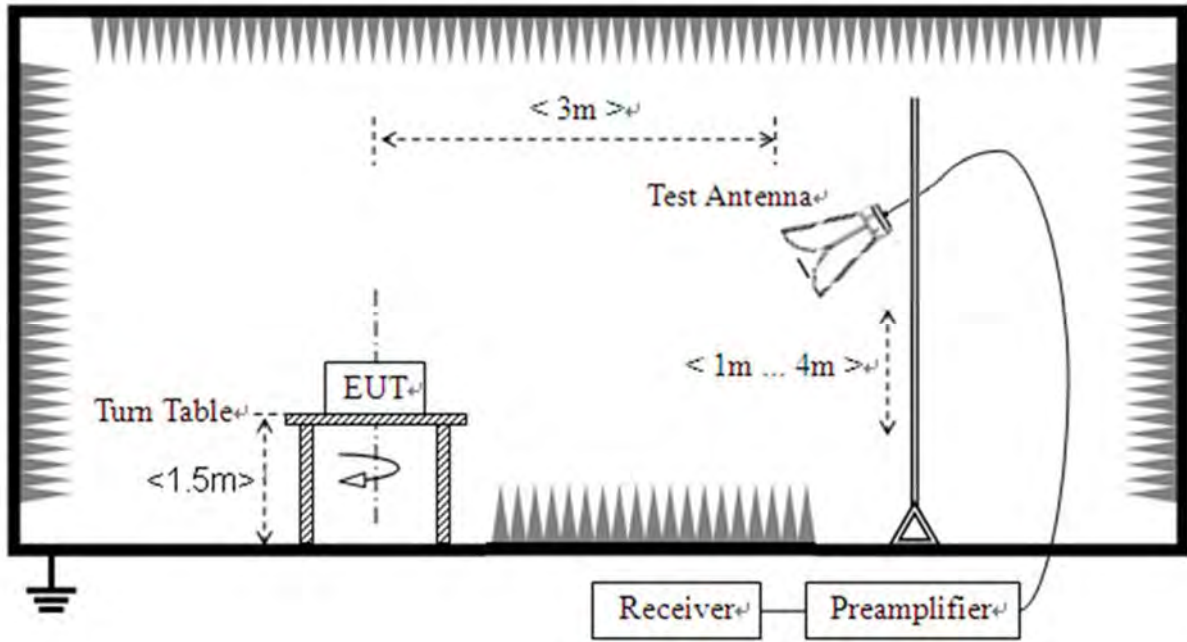



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
<input checked="" type="checkbox"/> Internal <input type="checkbox"/> External	<input checked="" type="checkbox"/> FPC Antenna <input type="checkbox"/> Spring Antenna <input type="checkbox"/> Ceramic Antenna <input type="checkbox"/> Integrated Antenna <input type="checkbox"/> Dipole Antenna <input type="checkbox"/> PCB Antenna <input type="checkbox"/> IFA Antenna	<input type="checkbox"/> I-PEX Connector <input type="checkbox"/> SMA Connector <input type="checkbox"/> RP-SMA Connector <input checked="" type="checkbox"/> Metal Shrapnel



3.2. Hopping Mechanism

3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "***Bluetooth core specification v5.1***".



3.3. Number of Hopping Frequency

3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.1 in this report.



3.4. Duty Cycle of Test Signal

3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.4.2. Test Result

Refer to Annex A.2 in this report.



3.5. Maximum Peak Conducted Output Power

3.5.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.3 in this report.



3.6. Maximum Average Conducted Output Power

3.6.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.4 in this report.



3.7.20 dB Bandwidth

3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.



3.8. Carried Frequency Separation

3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4. Test Result

Refer to Annex A.6 in this report.



3.9. Time of Occupancy (Dwell time)

3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (1600 / 2 / 79) \times 31.6$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (1600 / 4 / 79) \times 31.6$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (1600 / 6 / 79) \times 31.6$ Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (800 / 2 / 20) \times (0.4 \times 20)$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (800 / 4 / 20) \times (0.4 \times 20)$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (800 / 6 / 20) \times (0.4 \times 20)$ Millisecond.

3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4. Test Result

Refer to Annex A.7 in this report.



3.10. Conducted Spurious Emissions and Band Edge

3.10.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2. Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

3.10.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4. Test Result

Refer to Annex A.8 and A.9 in this report.



3.11. Conducted Emission

3.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.11.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4. Test Result

Refer to Annex A.10 in this report.



3.12. Restricted Frequency Bands

3.12.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.12.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4. Test Result

Refer to Annex A.11 in this report.



3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.13.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4. Test Result

Refer to Annex A.12 in this report.



Annex A Test Data and Result

A.1. Number of Hopping Frequency

Left

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

Right


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Left

Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

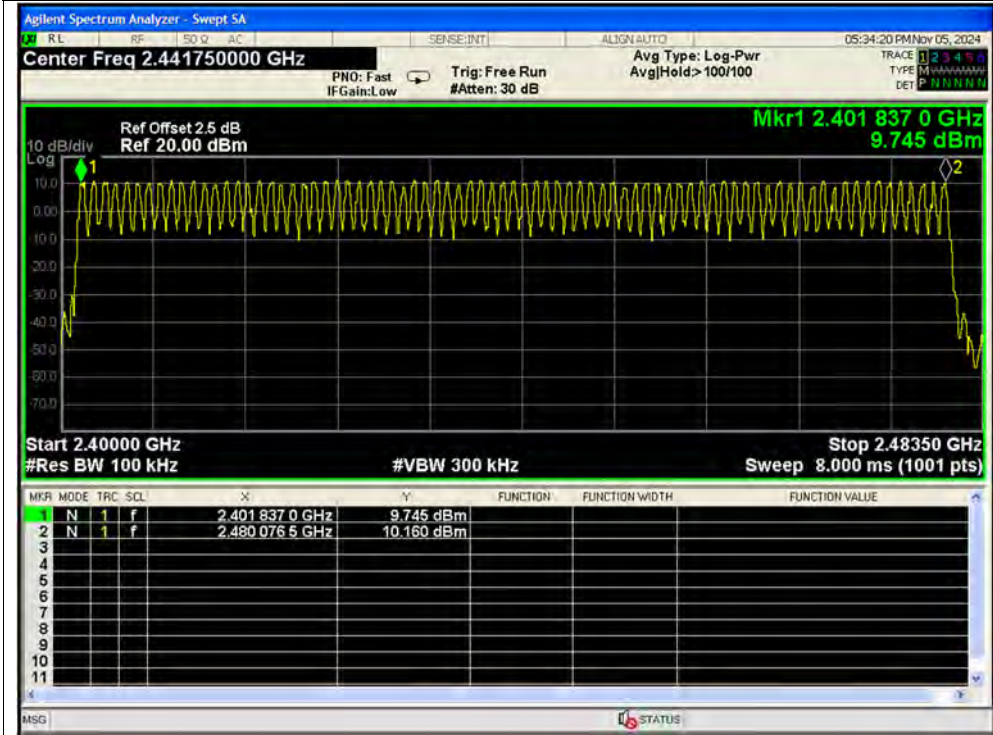


Hopping No. NVNT 1-DH5 2441MHz Ant1

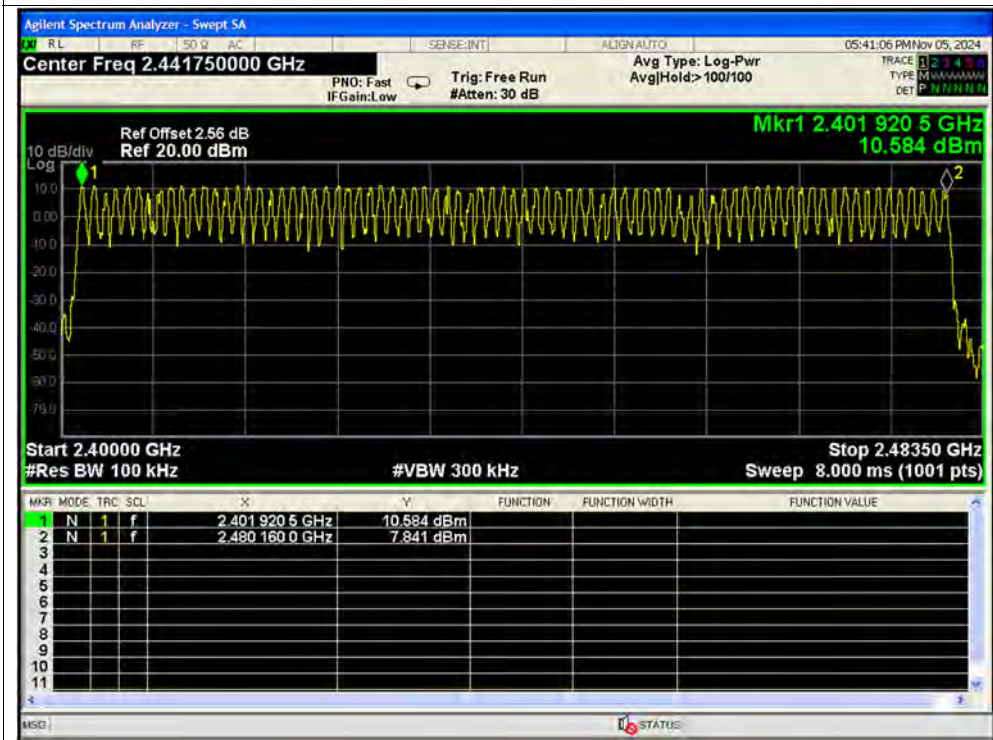




Hopping No. NVNT 1-DH5 2480MHz Ant1

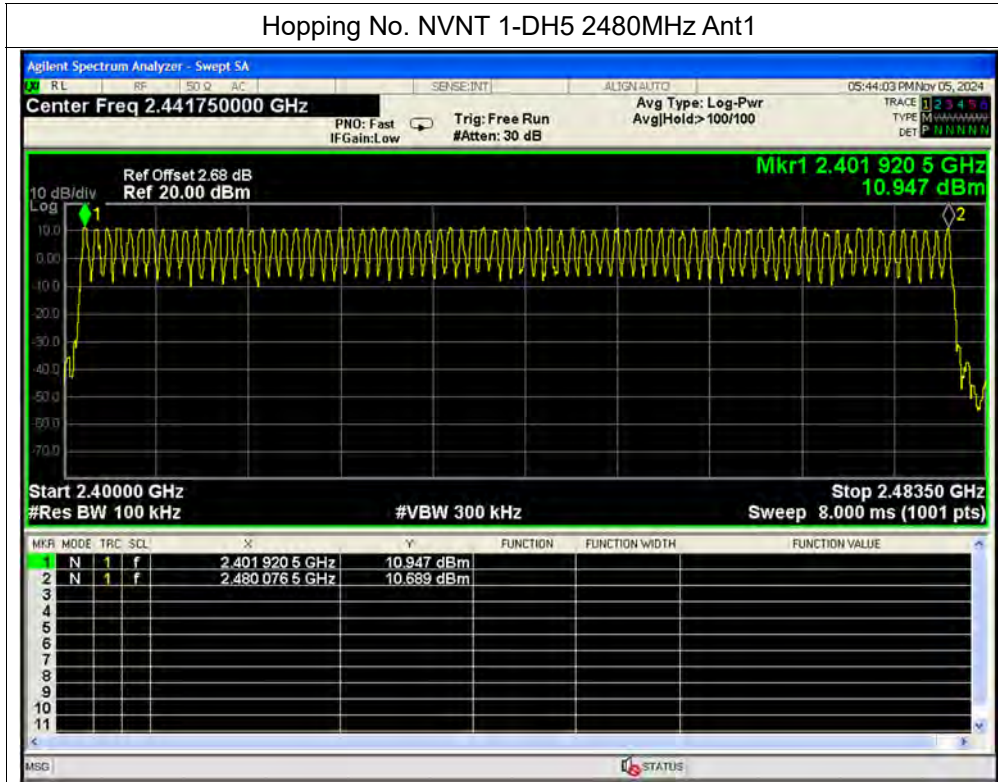


Hopping No. NVNT 2-DH5 2402MHz Ant1

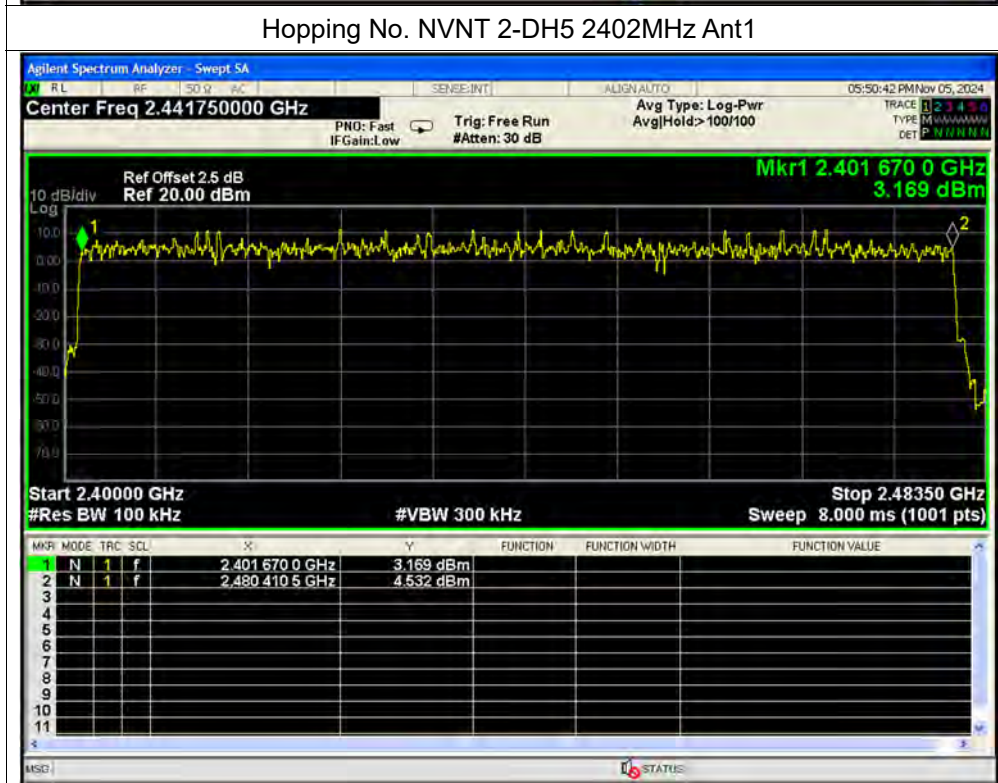




Hopping No. NVNT 2-DH5 2441MHz Ant1

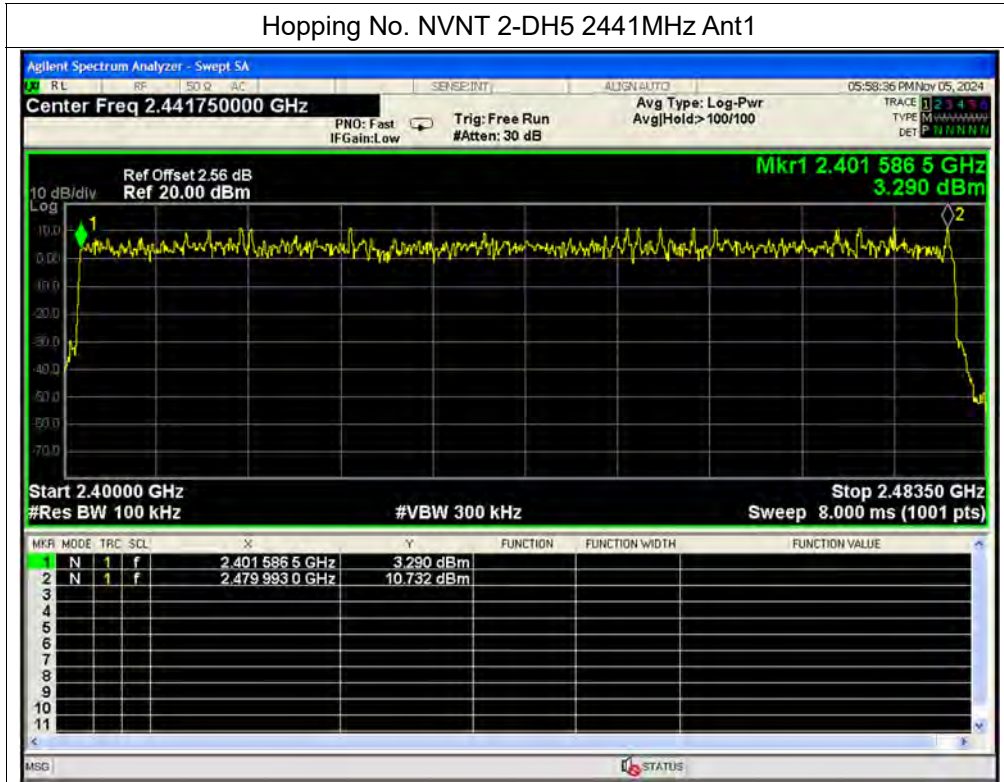


Hopping No. NVNT 2-DH5 2480MHz Ant1

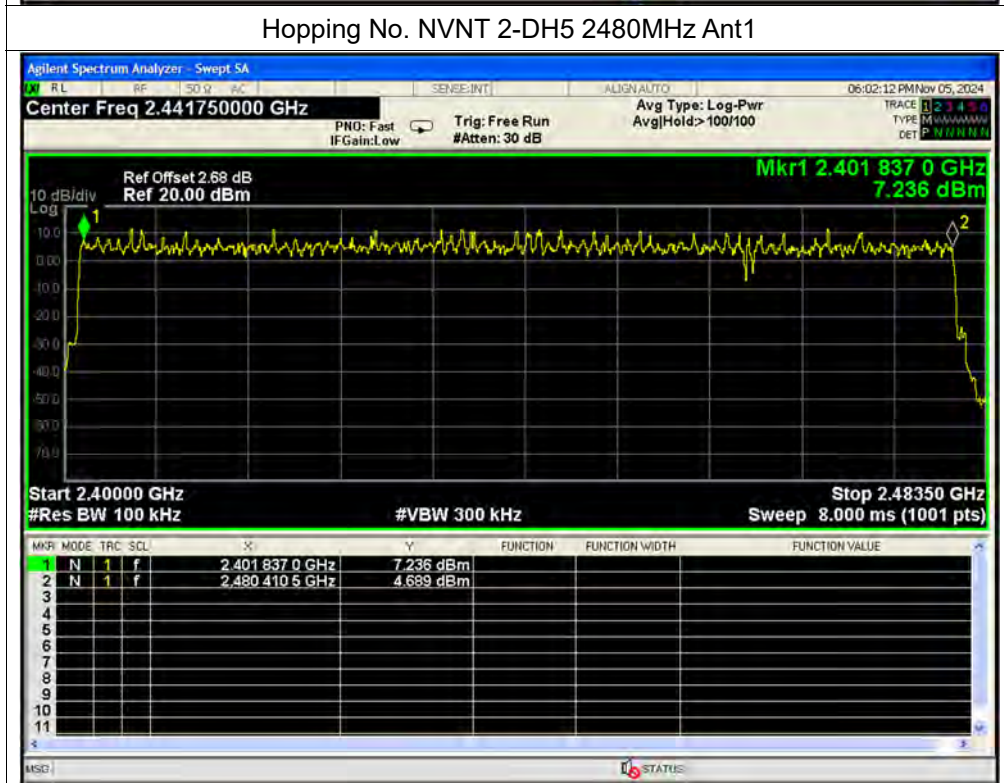




Hopping No. NVNT 3-DH5 2402MHz Ant1

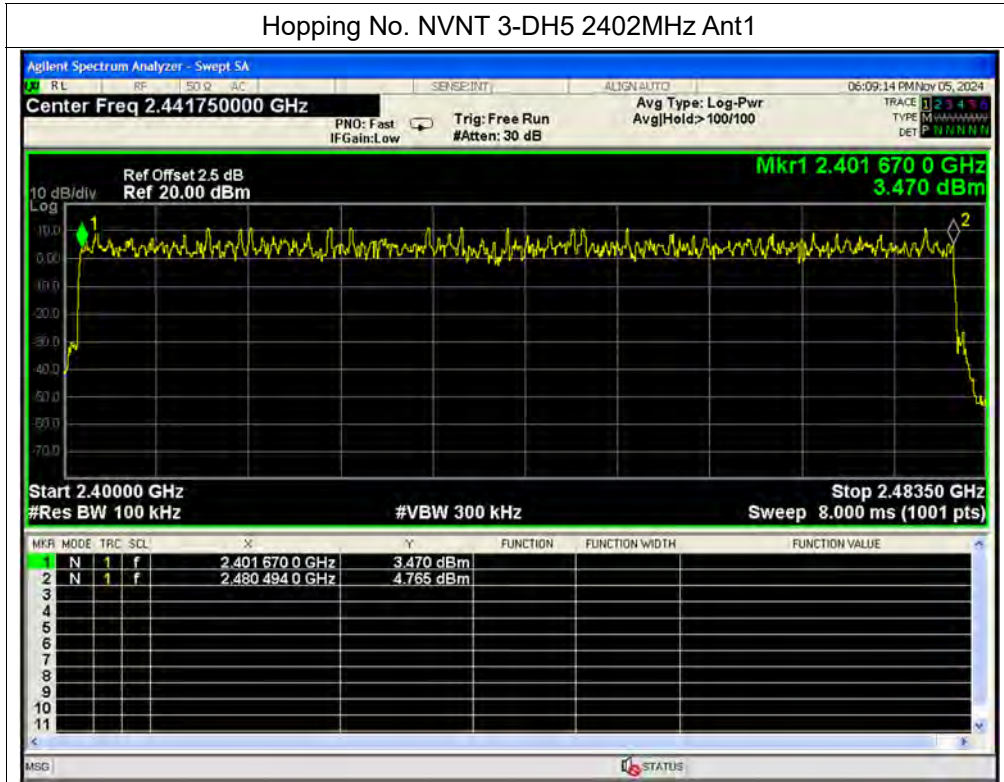


Hopping No. NVNT 3-DH5 2441MHz Ant1

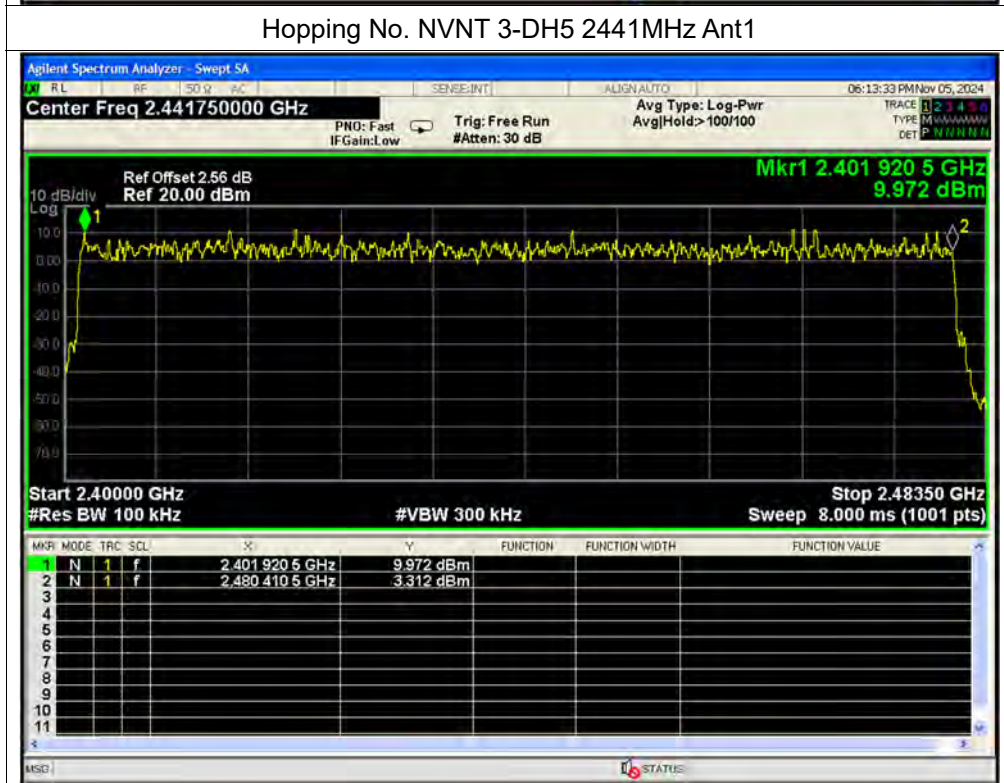



Hopping No. NVNT 3-DH5 2480MHz Ant1

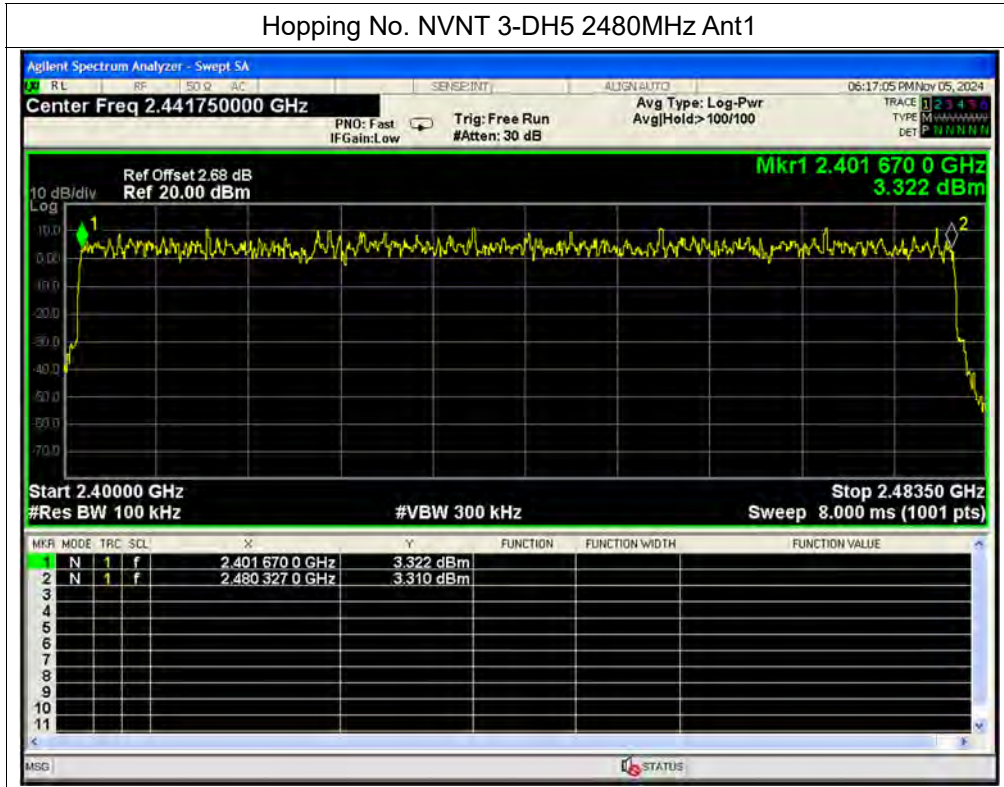





Right

Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

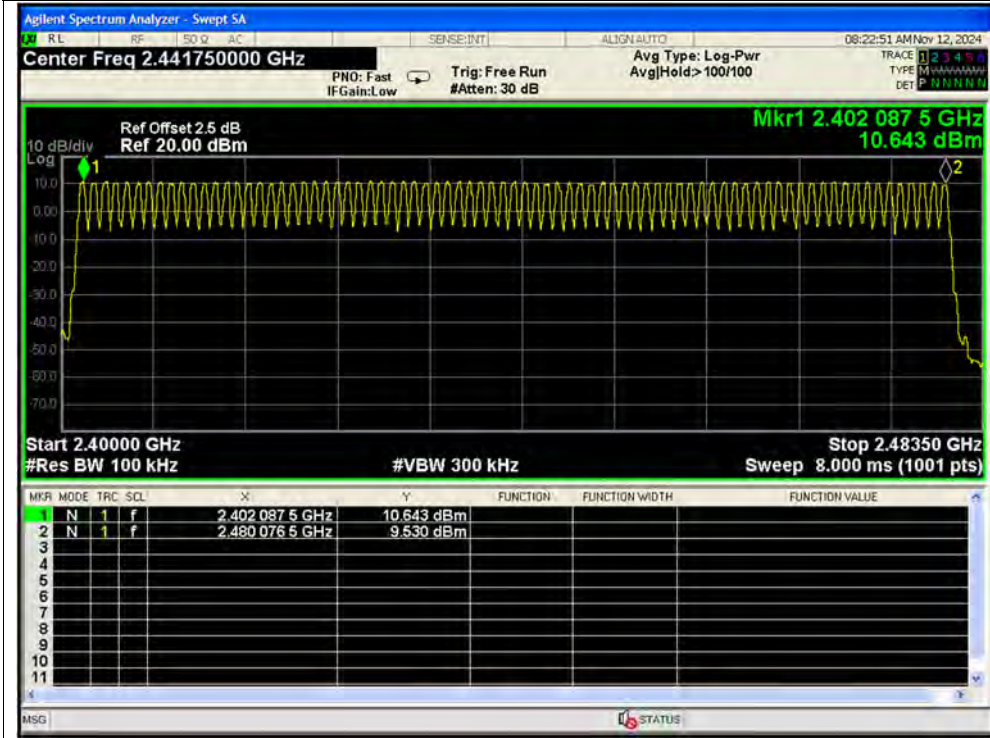


Hopping No. NVNT 1-DH5 2441MHz Ant1

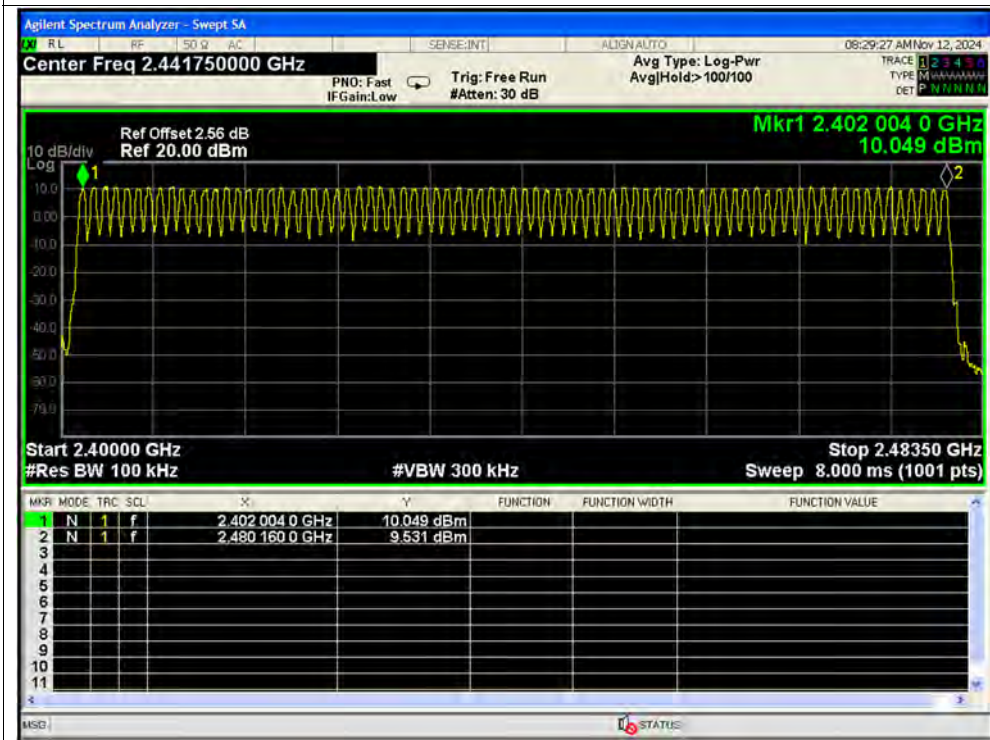




Hopping No. NVNT 1-DH5 2480MHz Ant1

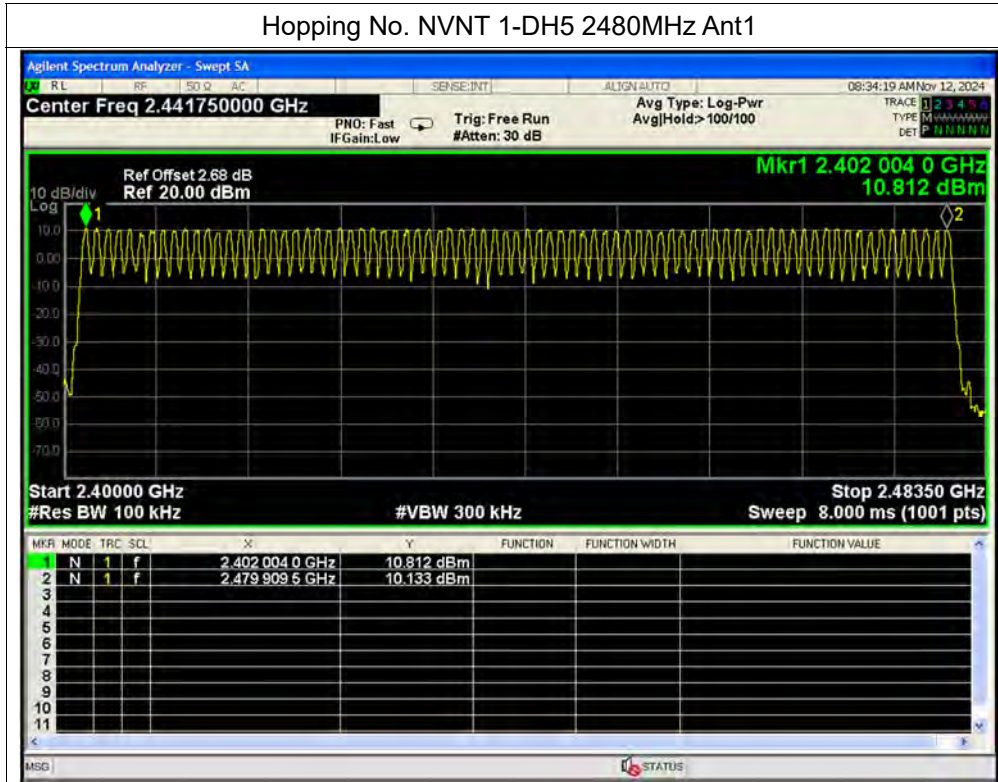


Hopping No. NVNT 2-DH5 2402MHz Ant1

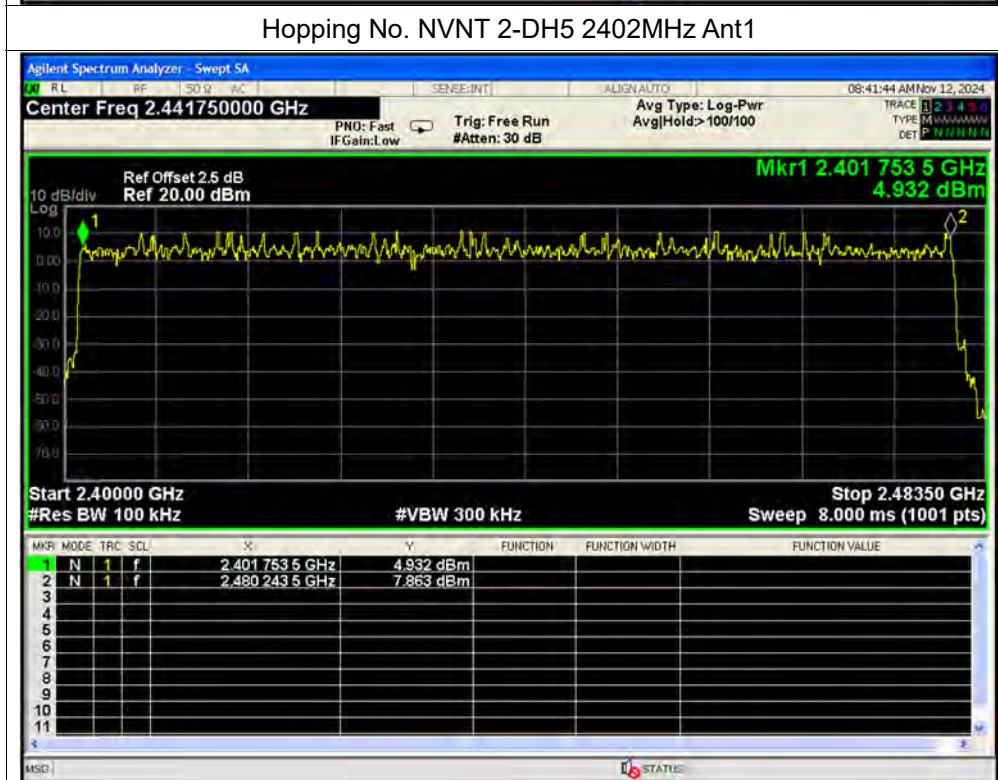




Hopping No. NVNT 2-DH5 2441MHz Ant1

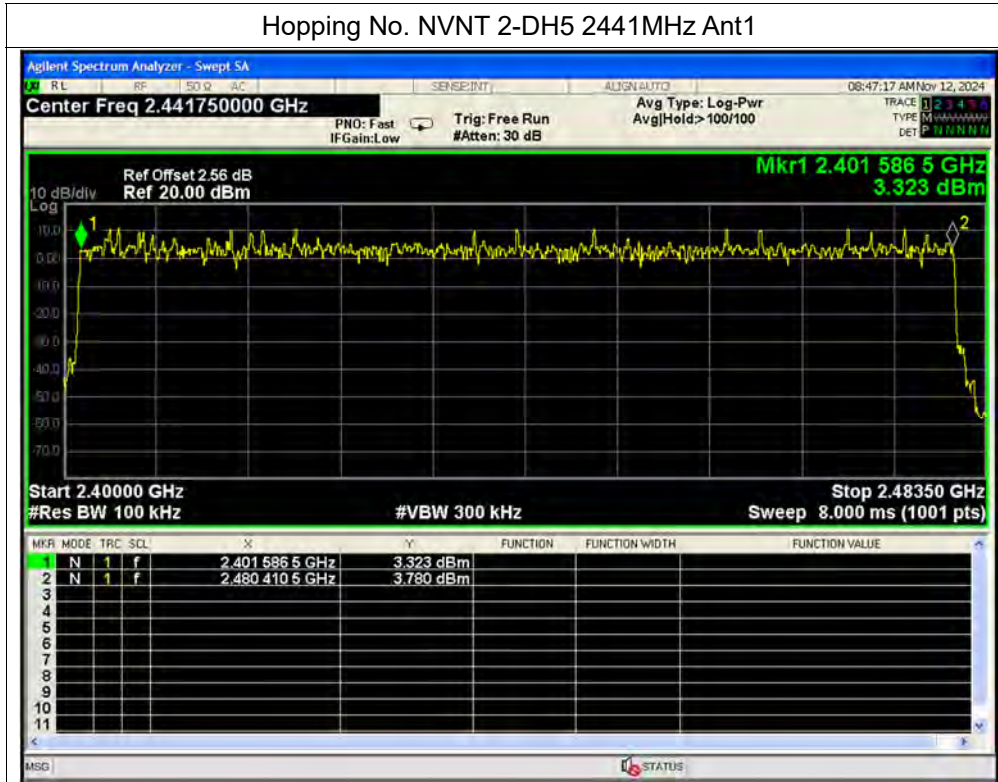


Hopping No. NVNT 2-DH5 2480MHz Ant1

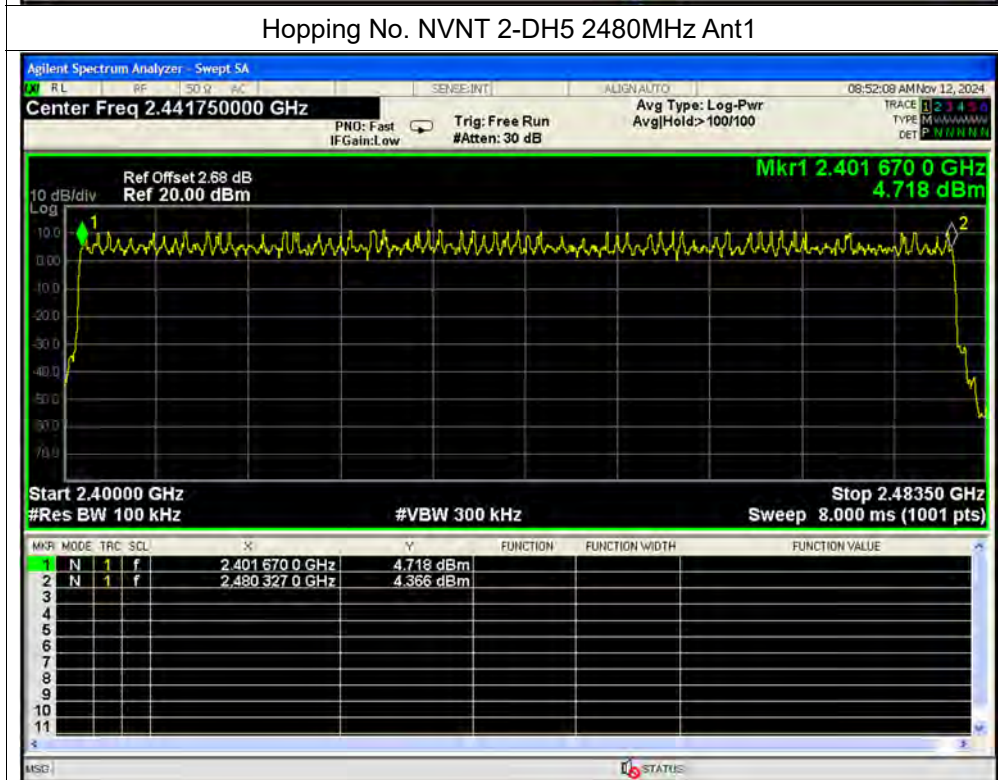




Hopping No. NVNT 3-DH5 2402MHz Ant1

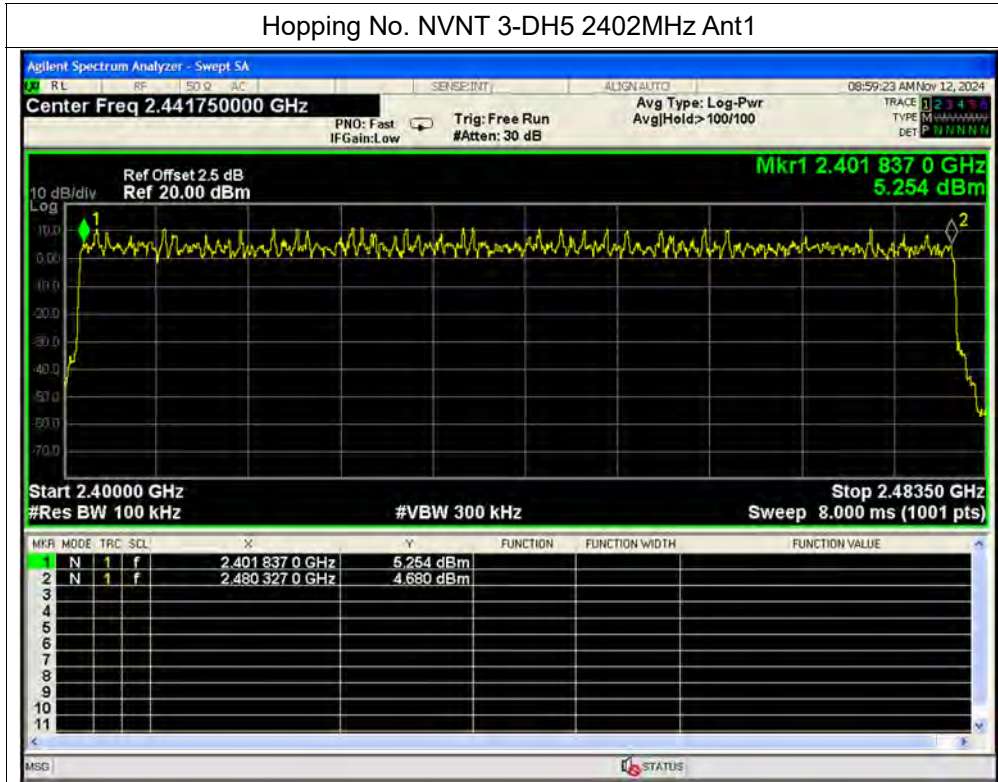


Hopping No. NVNT 3-DH5 2441MHz Ant1

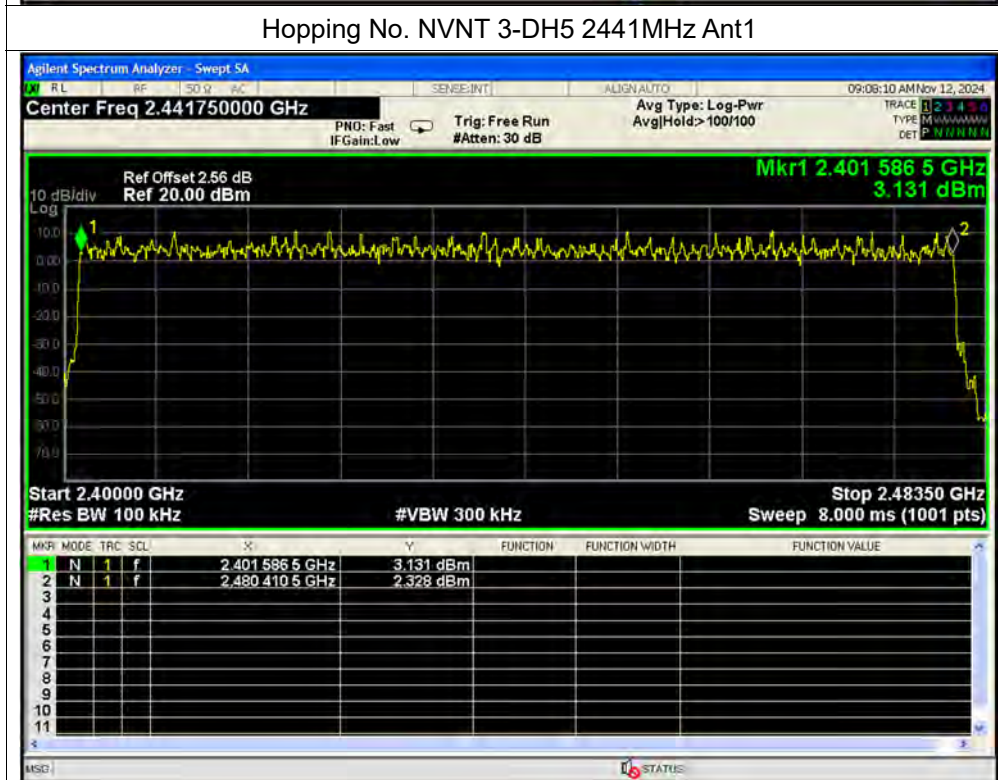



Hopping No. NVNT 3-DH5 2480MHz Ant1

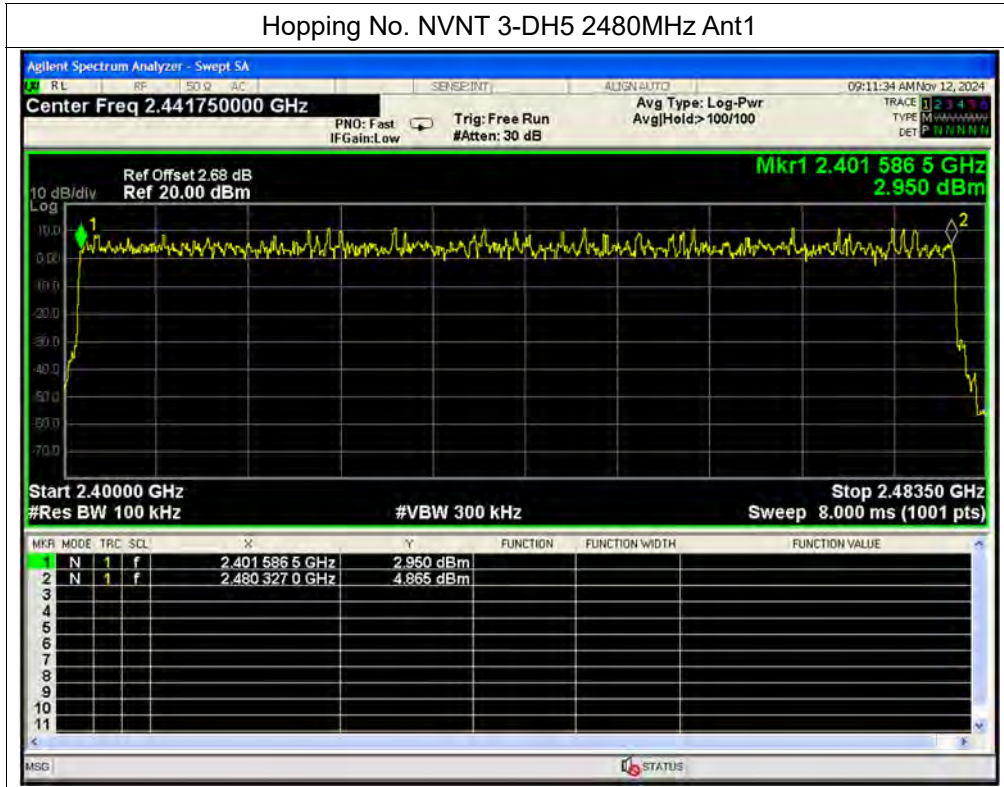

**A.2. Duty Cycle of Test Signal****Left**

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	57.72	2.39	0.35
NVNT	1-DH5	2441	Ant1	57.72	2.39	0.35
NVNT	1-DH5	2480	Ant1	57.72	2.39	0.35
NVNT	2-DH5	2402	Ant1	57.84	2.38	0.35
NVNT	2-DH5	2441	Ant1	57.84	2.38	0.35
NVNT	2-DH5	2480	Ant1	57.84	2.38	0.35
NVNT	3-DH5	2402	Ant1	57.84	2.38	0.35
NVNT	3-DH5	2441	Ant1	57.84	2.38	0.35
NVNT	3-DH5	2480	Ant1	57.88	2.37	0.35

Right


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	57.72	2.39	0.35
NVNT	1-DH5	2441	Ant1	57.72	2.39	0.35
NVNT	1-DH5	2480	Ant1	57.72	2.39	0.35
NVNT	2-DH5	2402	Ant1	57.84	2.38	0.35
NVNT	2-DH5	2441	Ant1	57.8	2.38	0.35
NVNT	2-DH5	2480	Ant1	57.84	2.38	0.35
NVNT	3-DH5	2402	Ant1	57.84	2.38	0.35
NVNT	3-DH5	2441	Ant1	57.84	2.38	0.35
NVNT	3-DH5	2480	Ant1	57.84	2.38	0.35




Left

Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

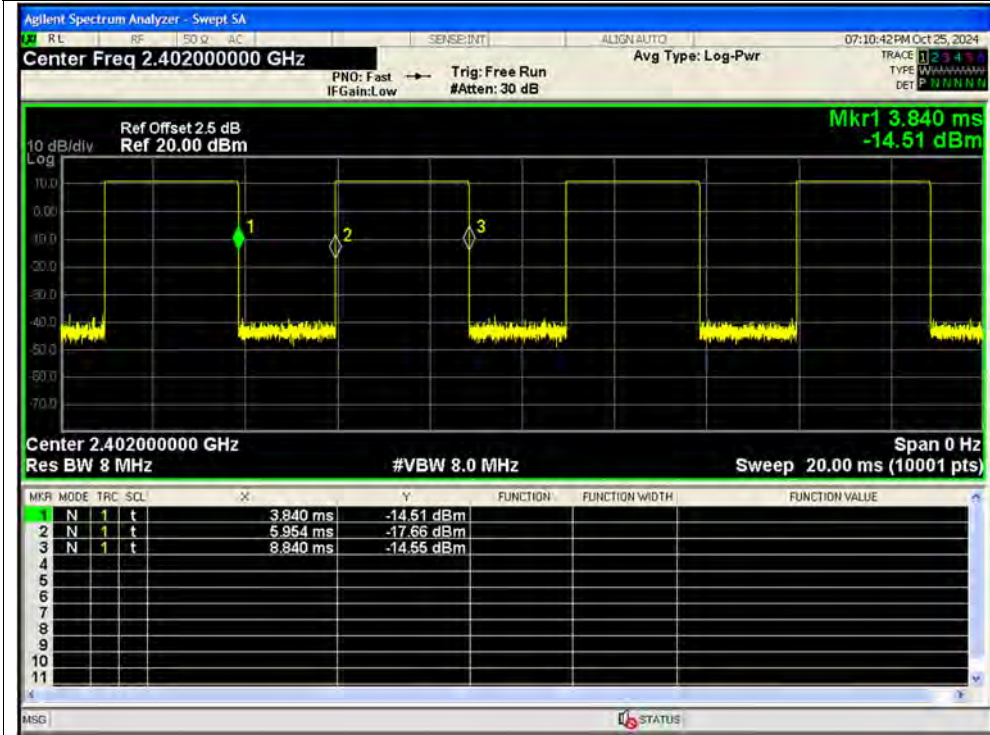


Duty Cycle NVNT 1-DH5 2441MHz Ant1

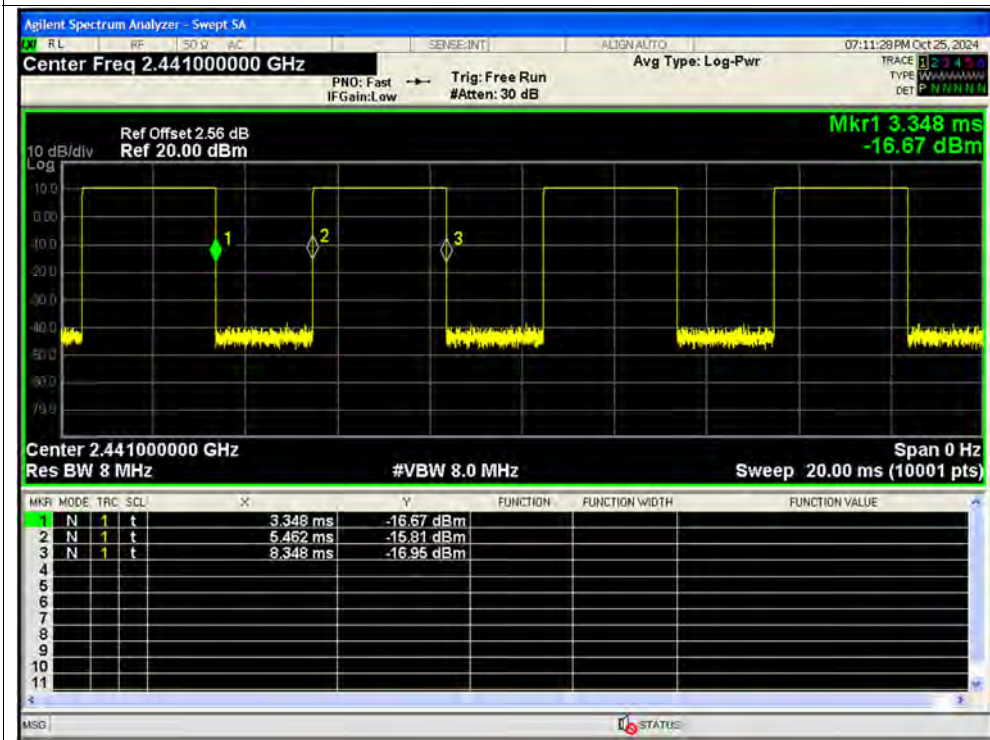




Duty Cycle NVNT 1-DH5 2480MHz Ant1

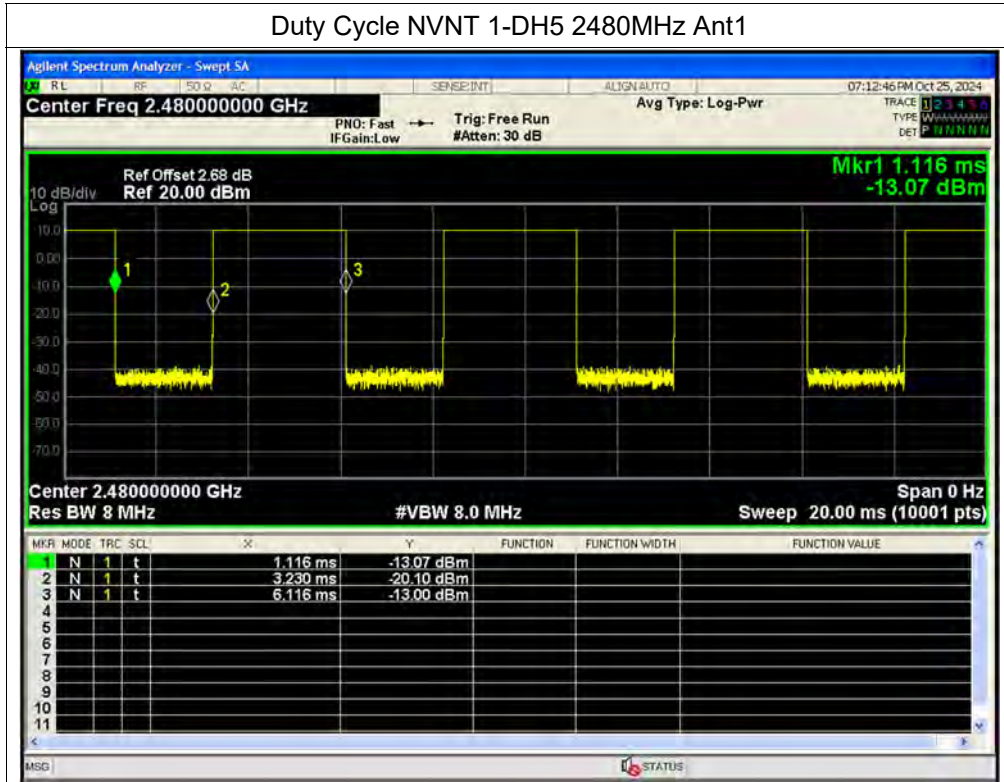


Duty Cycle NVNT 2-DH5 2402MHz Ant1

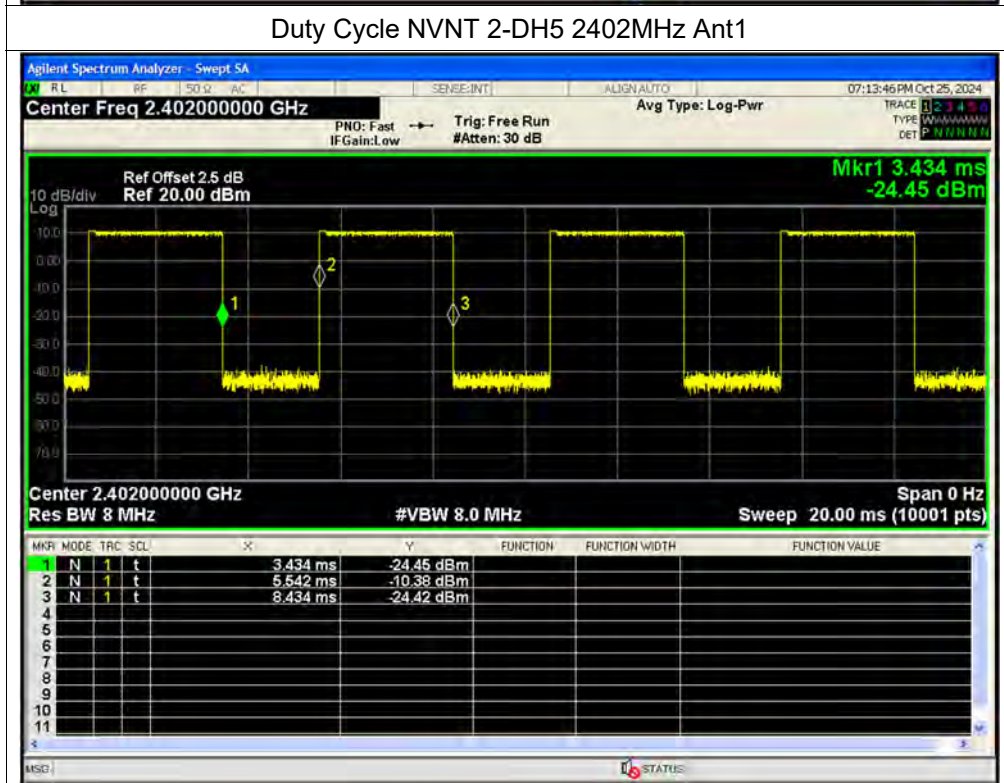




Duty Cycle NVNT 2-DH5 2441MHz Ant1

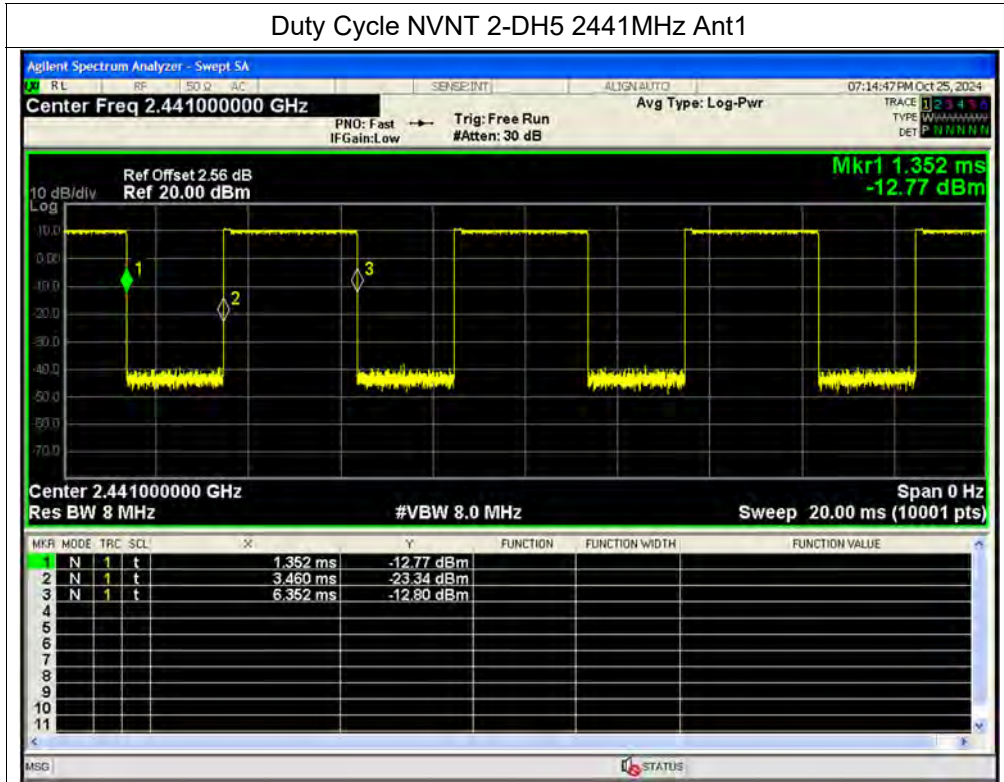


Duty Cycle NVNT 2-DH5 2480MHz Ant1

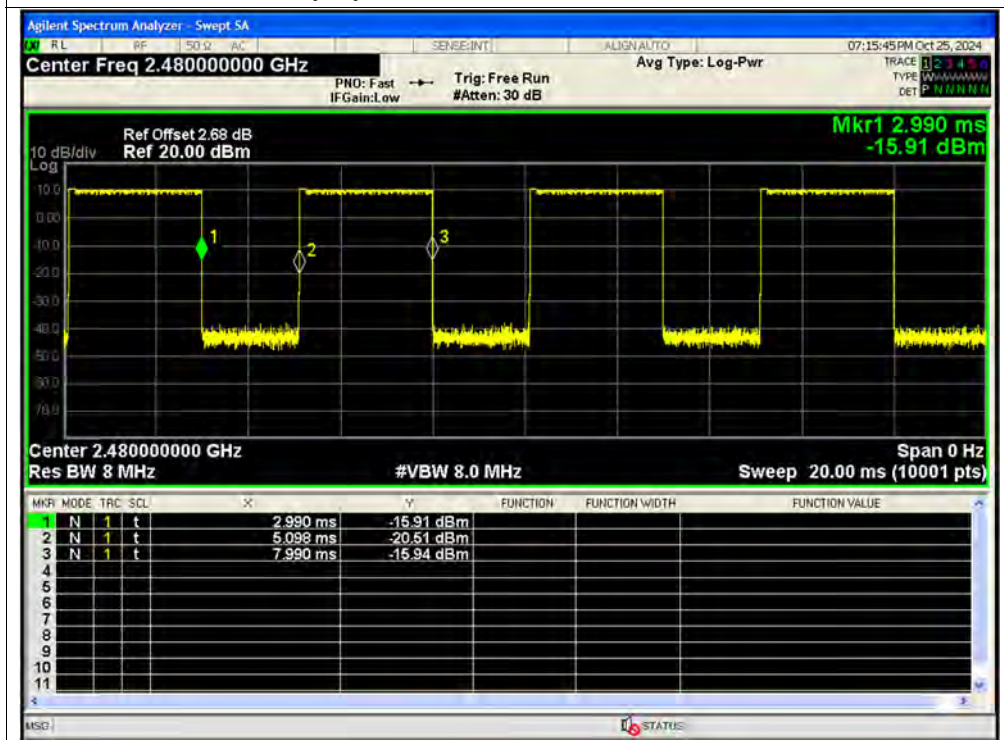




Duty Cycle NVNT 3-DH5 2402MHz Ant1

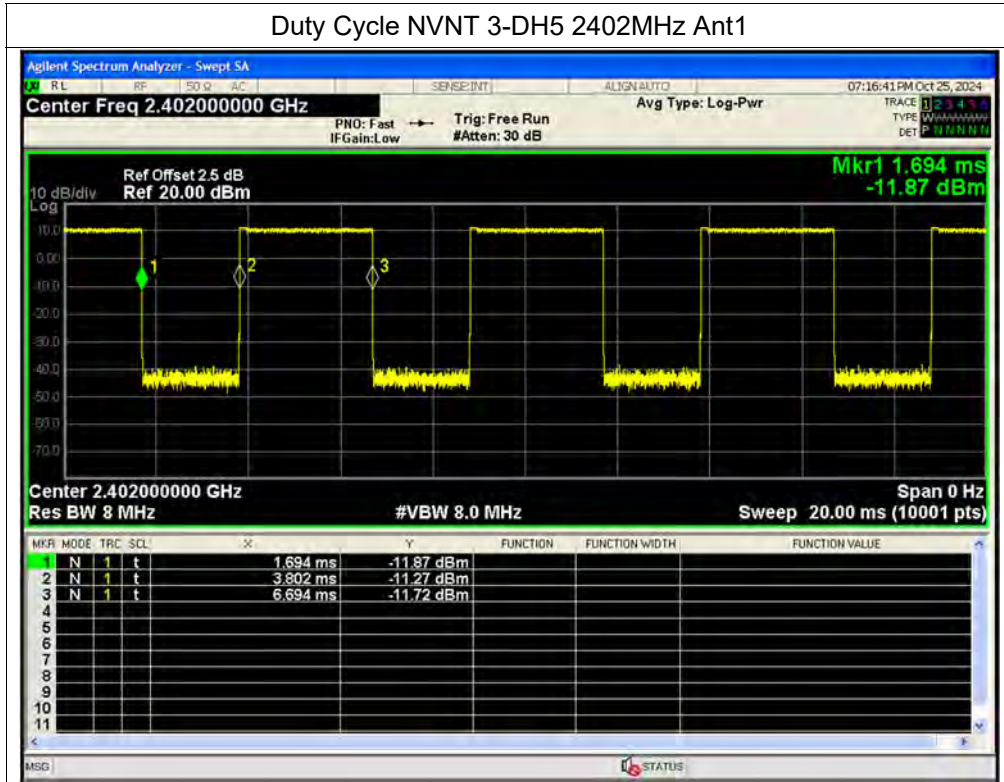


Duty Cycle NVNT 3-DH5 2441MHz Ant1

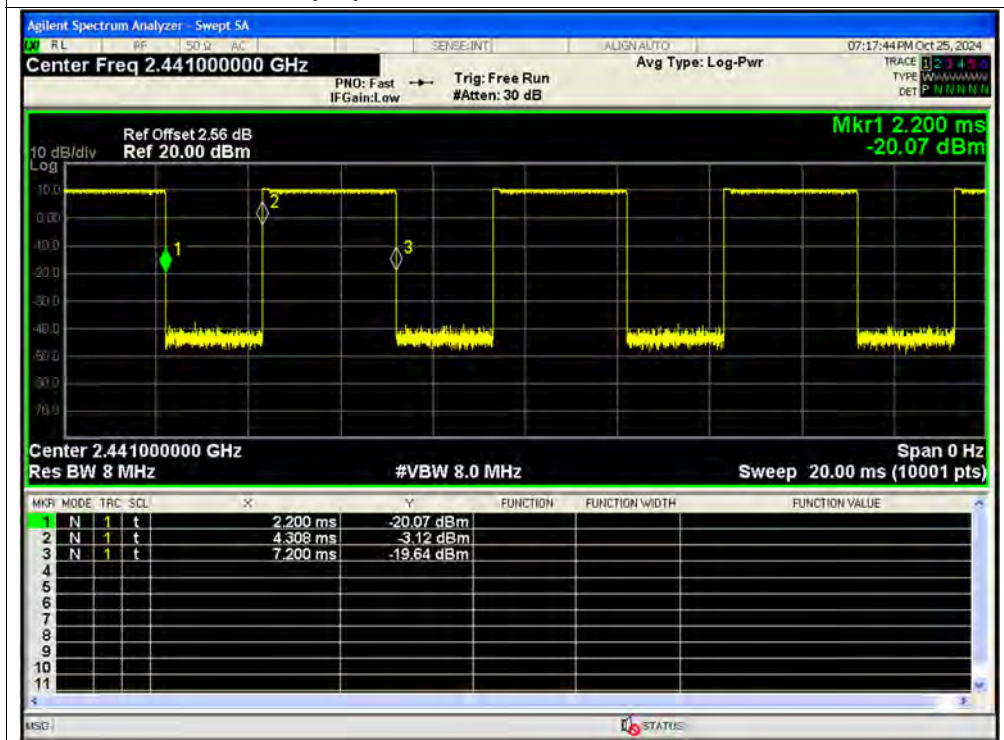



Duty Cycle NVNT 3-DH5 2480MHz Ant1

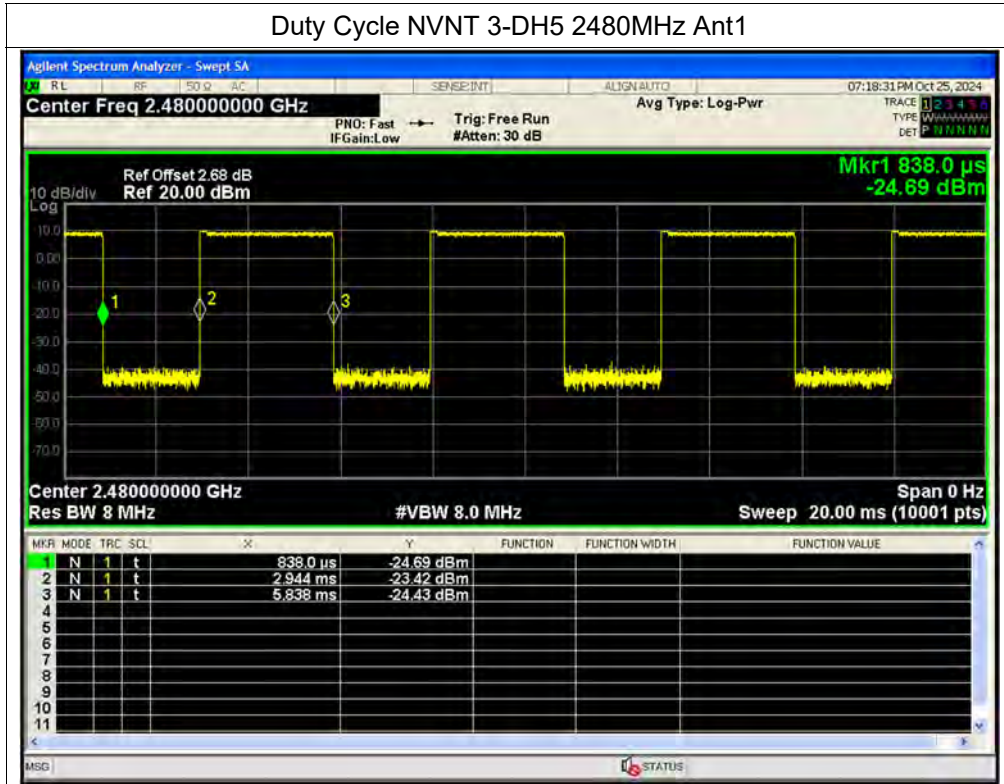





Right

Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

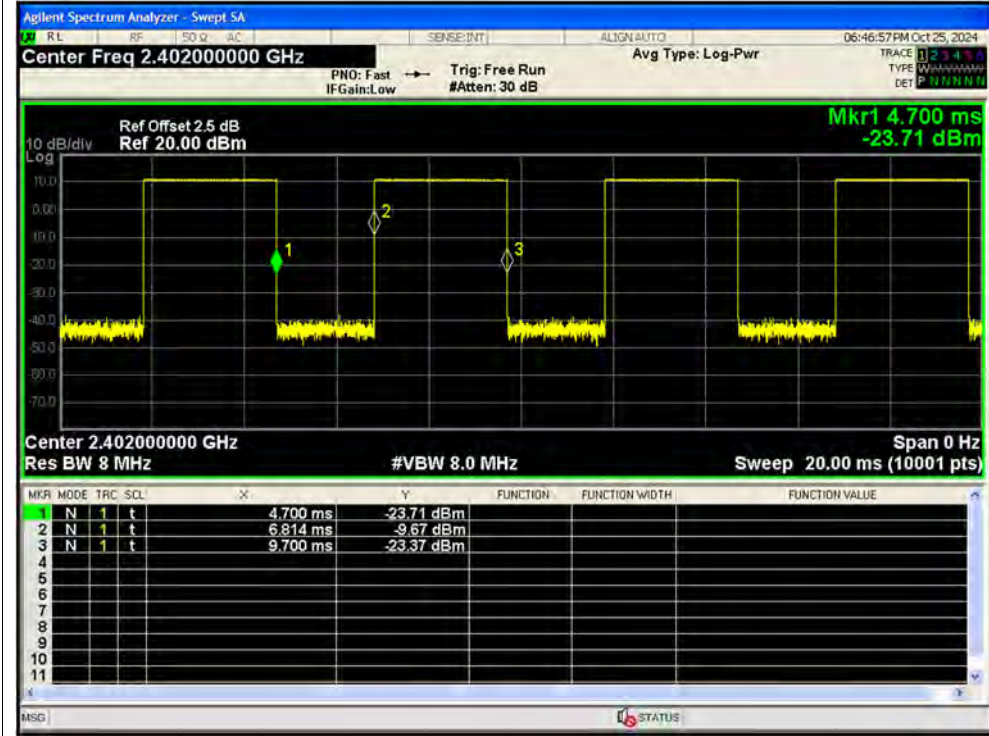


Duty Cycle NVNT 1-DH5 2441MHz Ant1

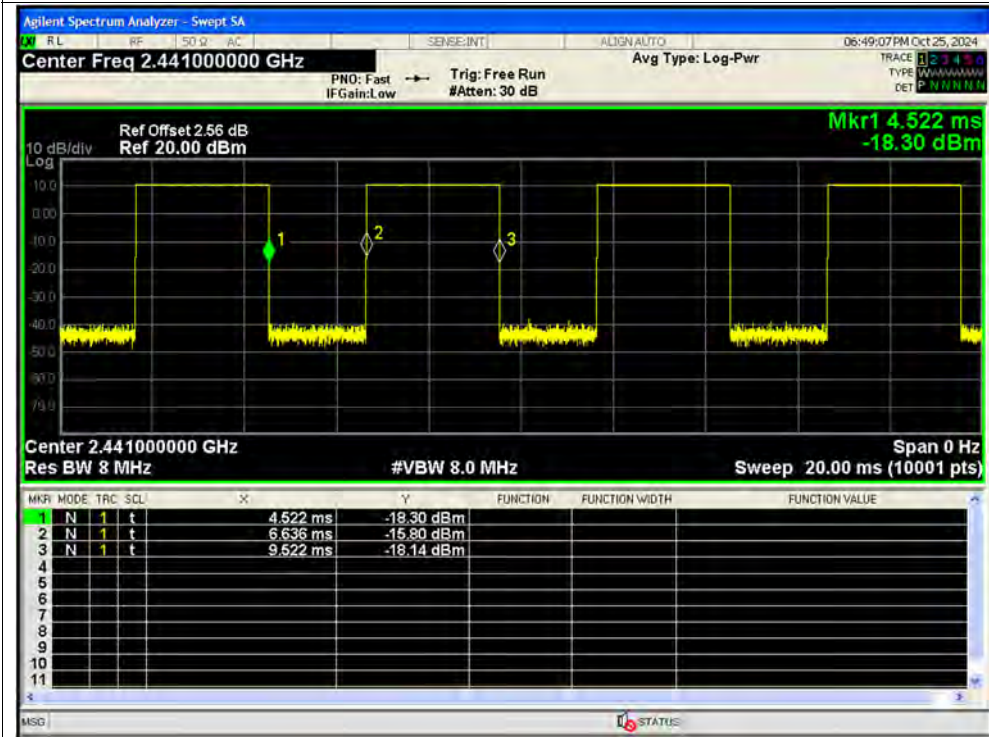




Duty Cycle NVNT 1-DH5 2480MHz Ant1

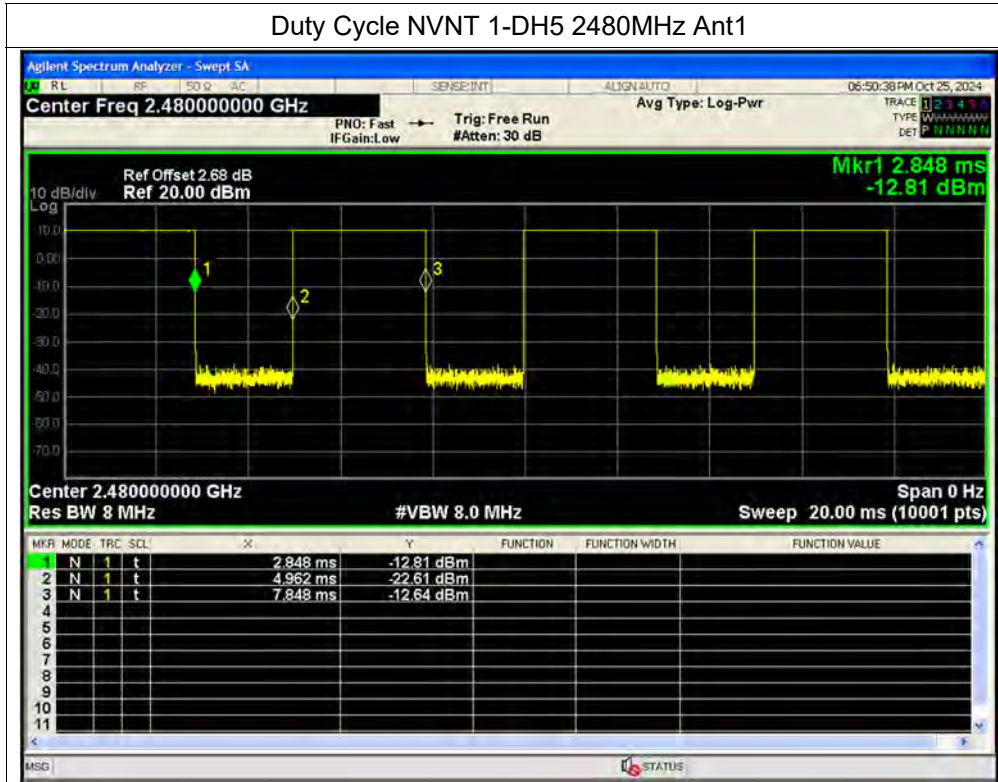


Duty Cycle NVNT 2-DH5 2402MHz Ant1

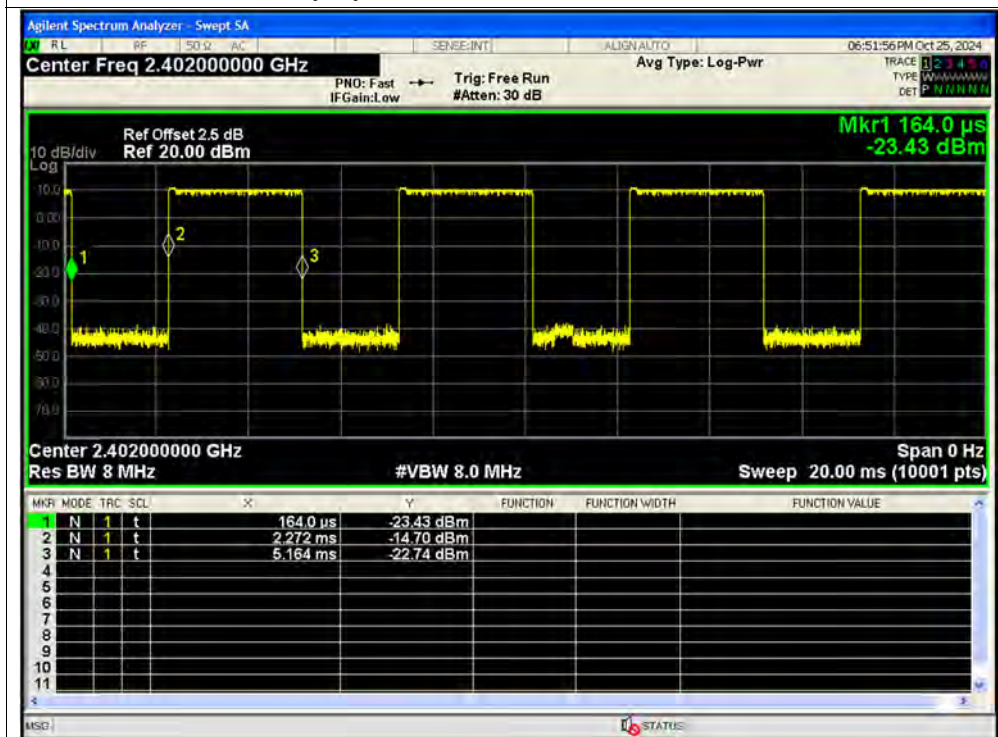




Duty Cycle NVNT 2-DH5 2441MHz Ant1

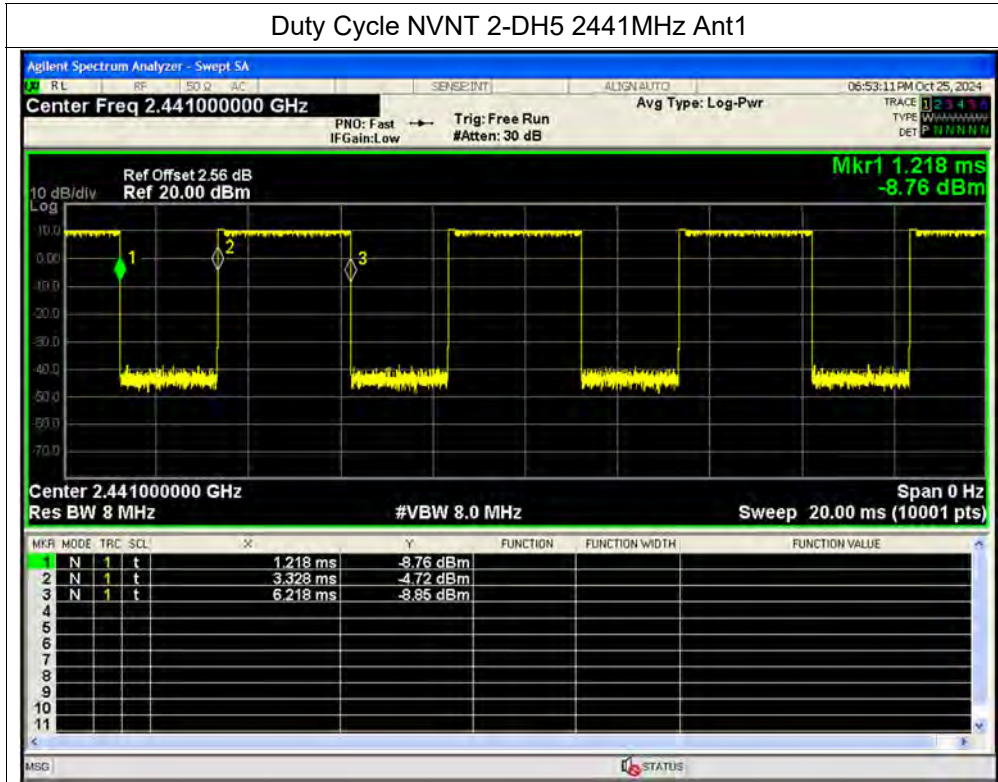


Duty Cycle NVNT 2-DH5 2480MHz Ant1

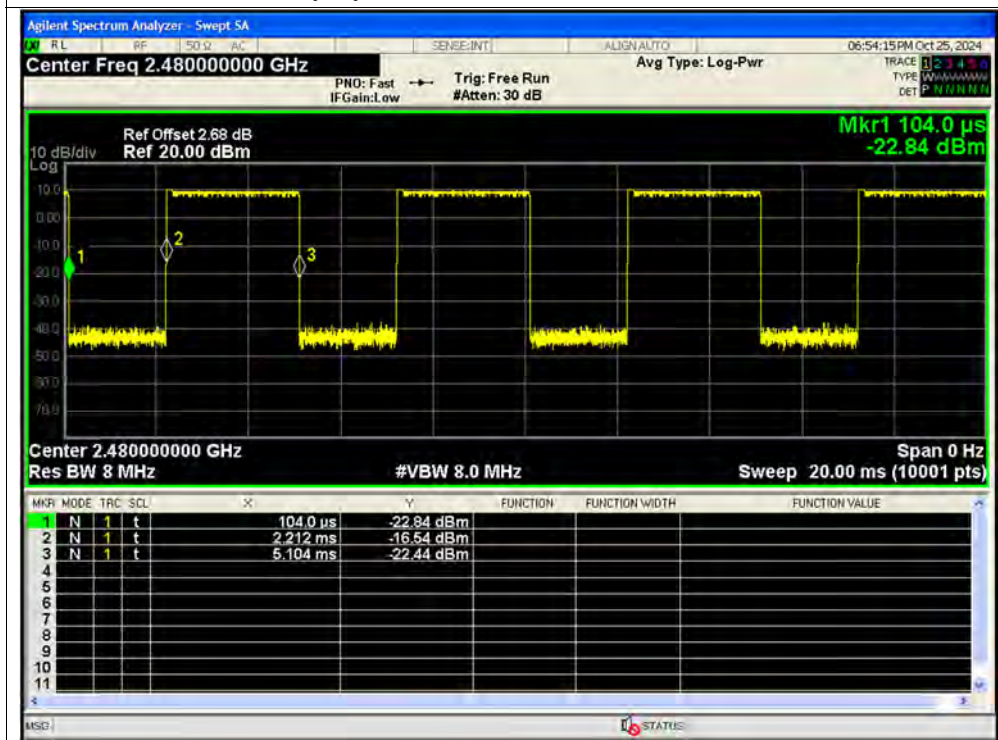




Duty Cycle NVNT 3-DH5 2402MHz Ant1

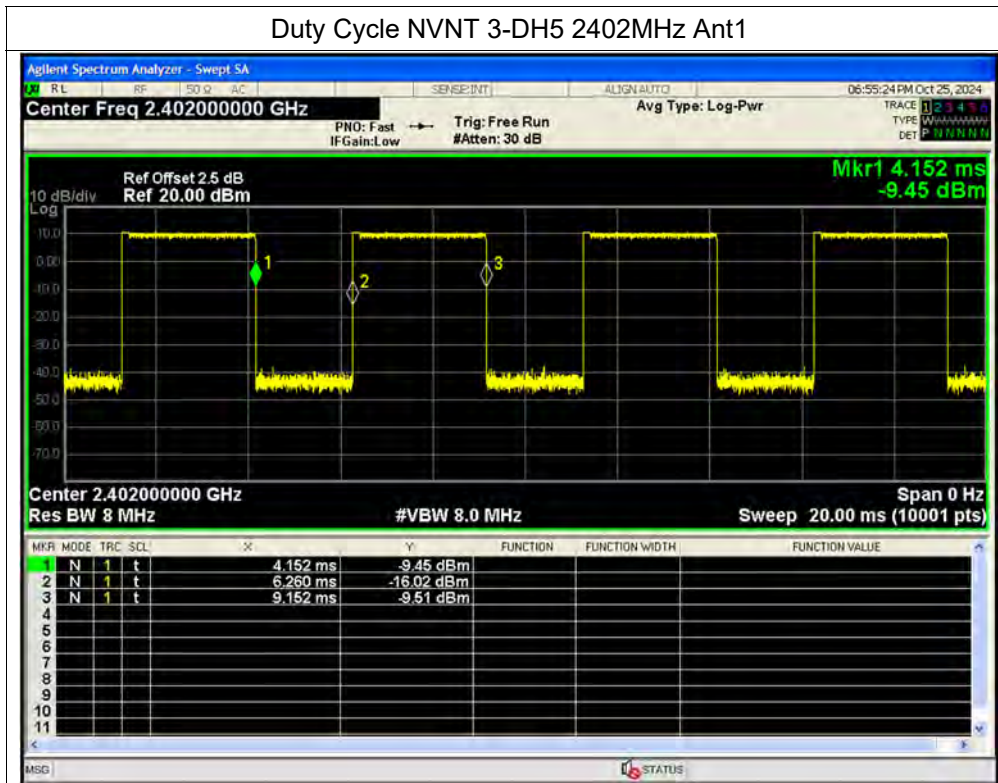


Duty Cycle NVNT 3-DH5 2441MHz Ant1

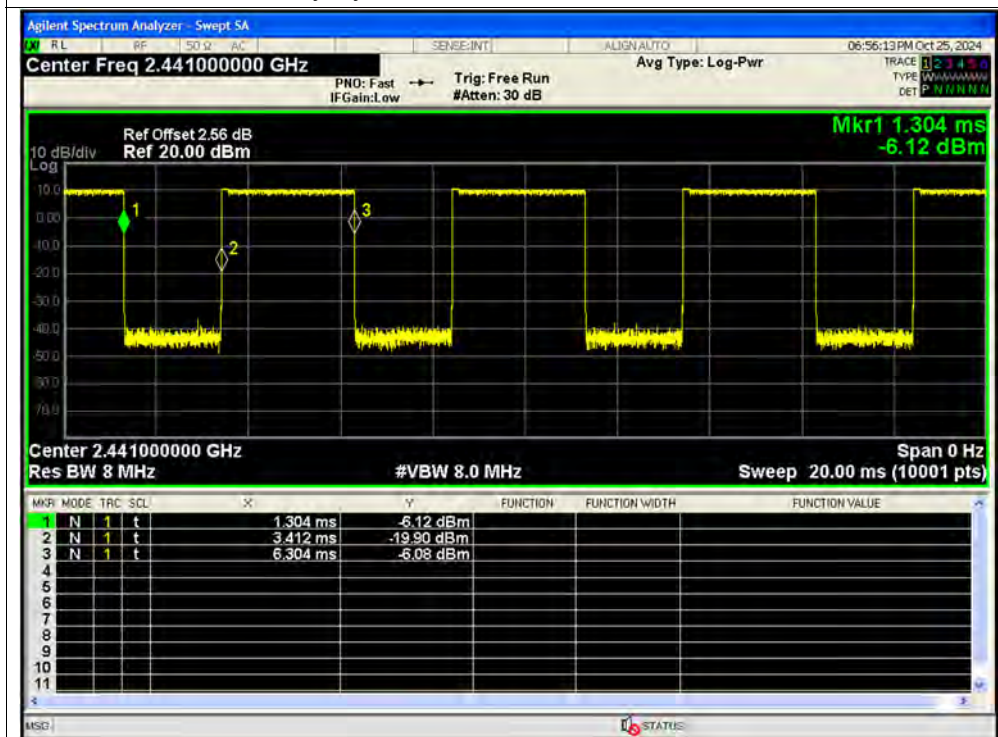



Duty Cycle NVNT 3-DH5 2480MHz Ant1

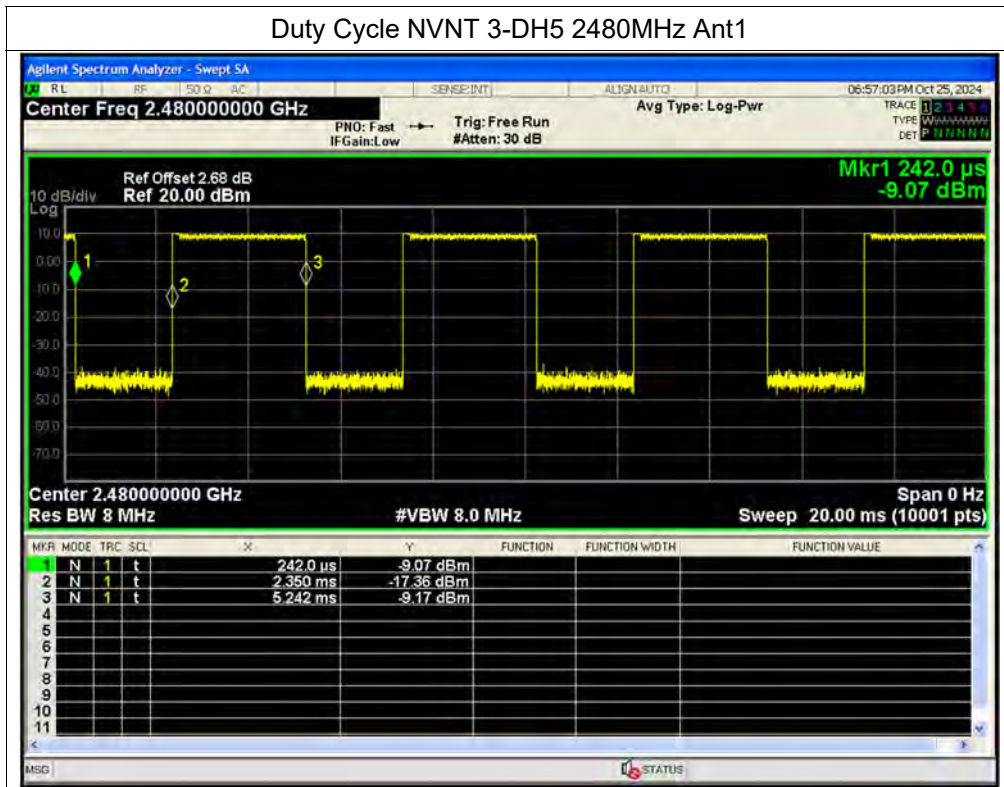

**A.3. Maximum Peak Conducted Output Power****Left**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Total Power (W)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	10.7	0	10.7	0.01175	30	Pass
NVNT	1-DH5	2441	Ant1	10.43	0	10.43	0.01104	30	Pass
NVNT	1-DH5	2480	Ant1	10.19	0	10.19	0.01045	30	Pass
NVNT	2-DH5	2402	Ant1	10.8	0	10.8	0.01202	30	Pass
NVNT	2-DH5	2441	Ant1	10.58	0	10.58	0.01143	30	Pass
NVNT	2-DH5	2480	Ant1	10.38	0	10.38	0.01091	30	Pass
NVNT	3-DH5	2402	Ant1	11.02	0	11.02	0.01265	30	Pass
NVNT	3-DH5	2441	Ant1	10.37	0	10.37	0.01089	30	Pass
NVNT	3-DH5	2480	Ant1	10	0	10	0.01	30	Pass

Right

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Total Power (W)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	10.61	0	10.61	0.01151	30	Pass
NVNT	1-DH5	2441	Ant1	10.31	0	10.31	0.01074	30	Pass
NVNT	1-DH5	2480	Ant1	10	0	10	0.01	30	Pass
NVNT	2-DH5	2402	Ant1	10.63	0	10.63	0.01156	30	Pass
NVNT	2-DH5	2441	Ant1	10.4	0	10.4	0.01096	30	Pass
NVNT	2-DH5	2480	Ant1	9.88	0	9.88	0.00973	30	Pass
NVNT	3-DH5	2402	Ant1	10.53	0	10.53	0.0113	30	Pass
NVNT	3-DH5	2441	Ant1	10.26	0	10.26	0.01062	30	Pass
NVNT	3-DH5	2480	Ant1	9.94	0	9.94	0.00986	30	Pass



Left

Test Graphs


Peak Power NVNT 1-DH5 2402MHz Ant1




Peak Power NVNT 1-DH5 2441MHz Ant1




Peak Power NVNT 1-DH5 2480MHz Ant1

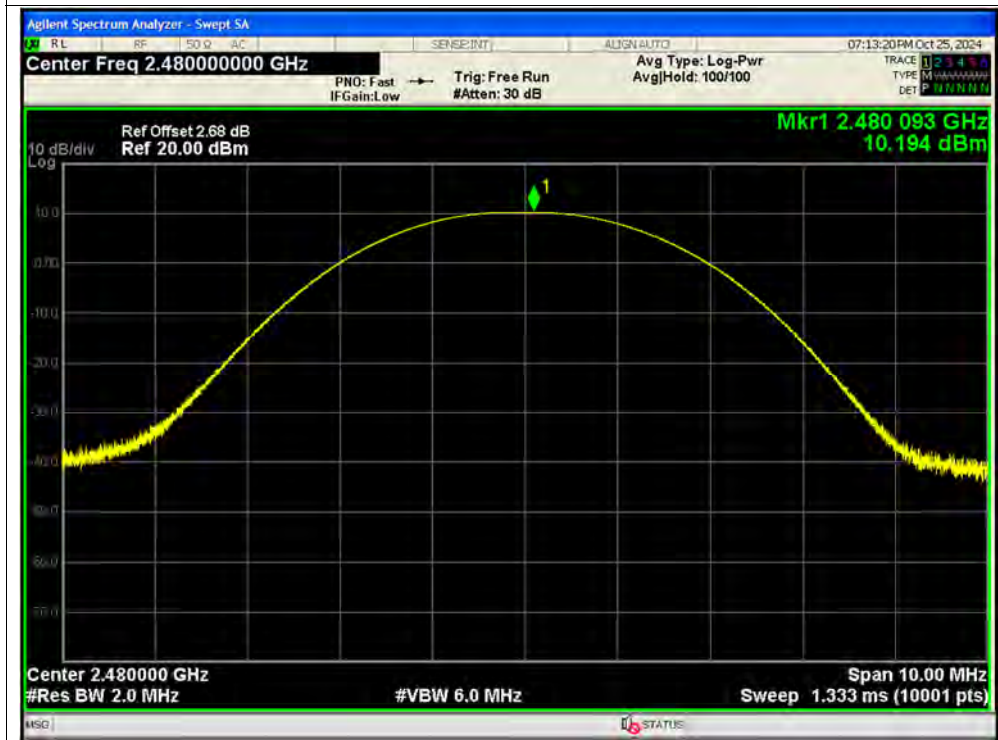


Peak Power NVNT 2-DH5 2402MHz Ant1

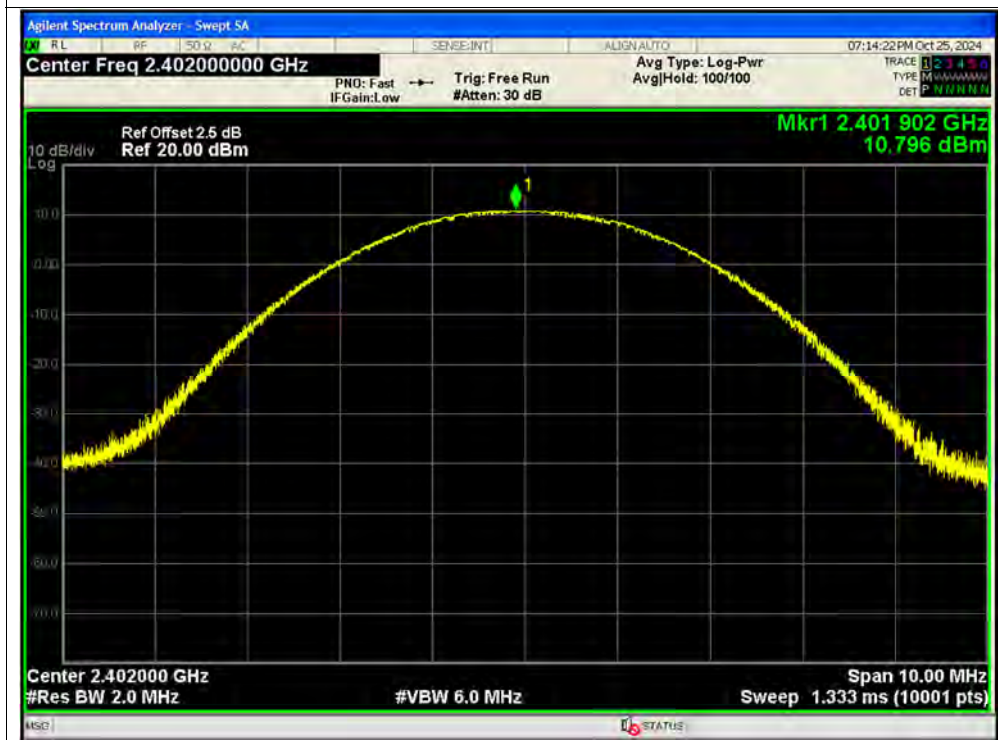

Peak Power NVNT 2-DH5 2441MHz Ant1

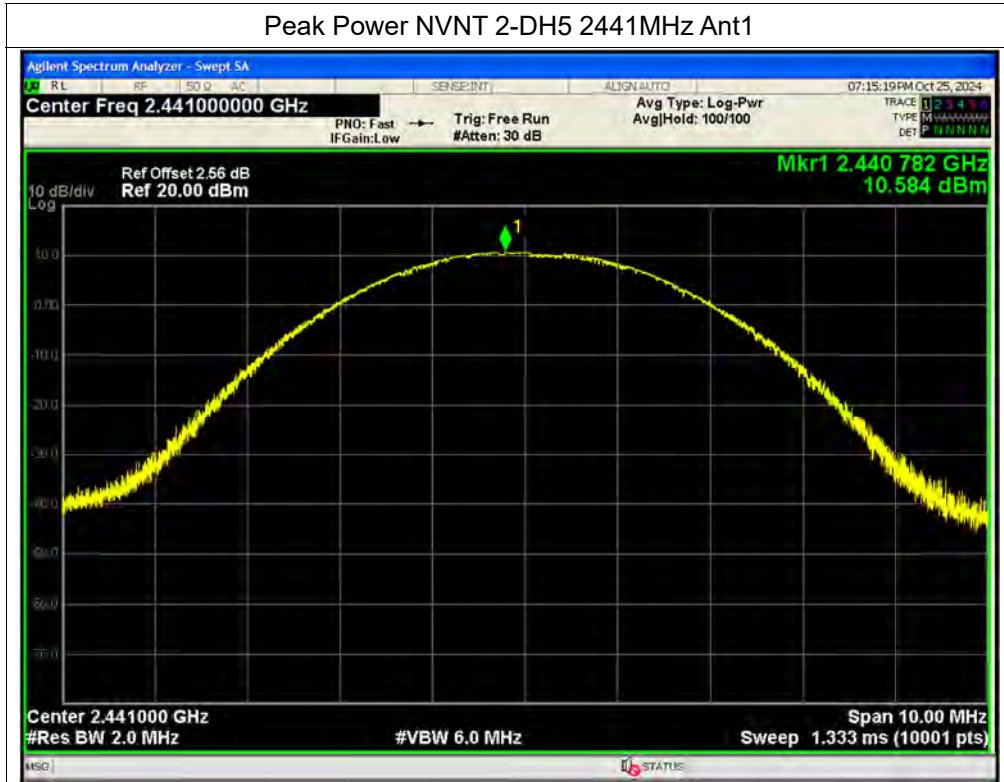


Peak Power NVNT 2-DH5 2480MHz Ant1

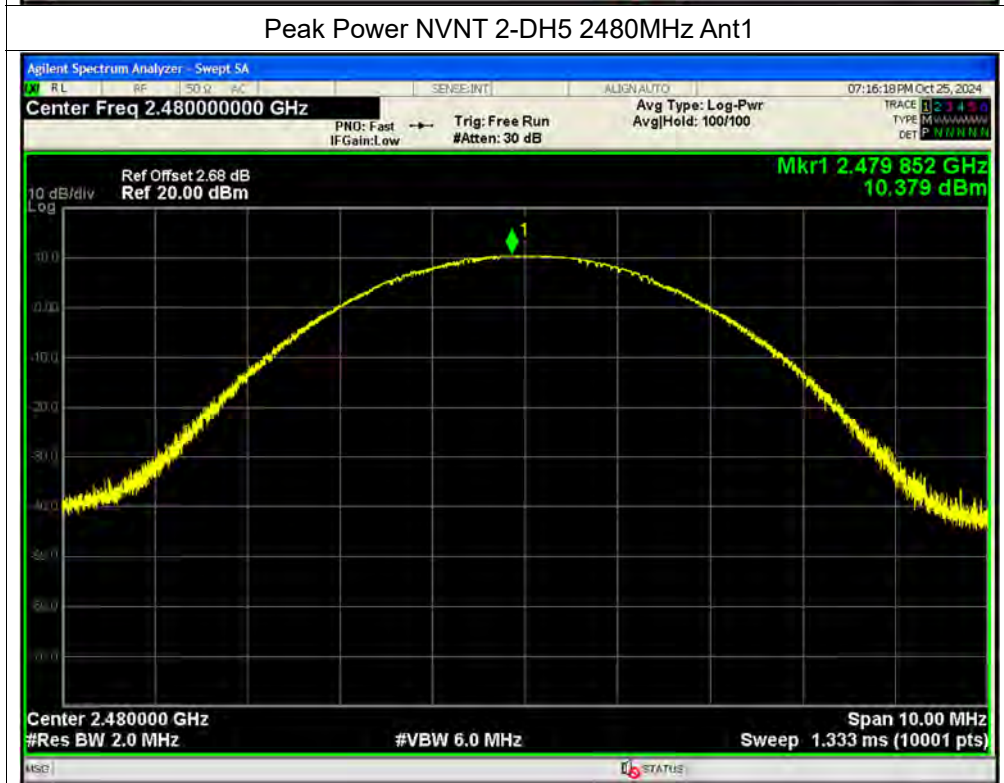




Peak Power NVNT 3-DH5 2402MHz Ant1

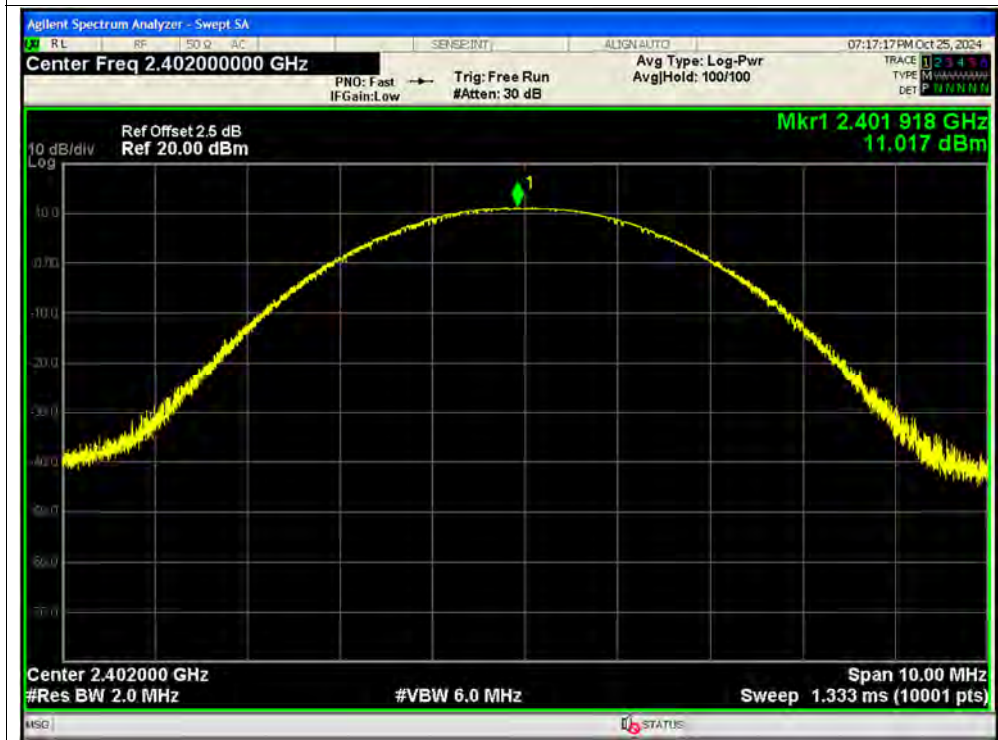


Peak Power NVNT 3-DH5 2441MHz Ant1

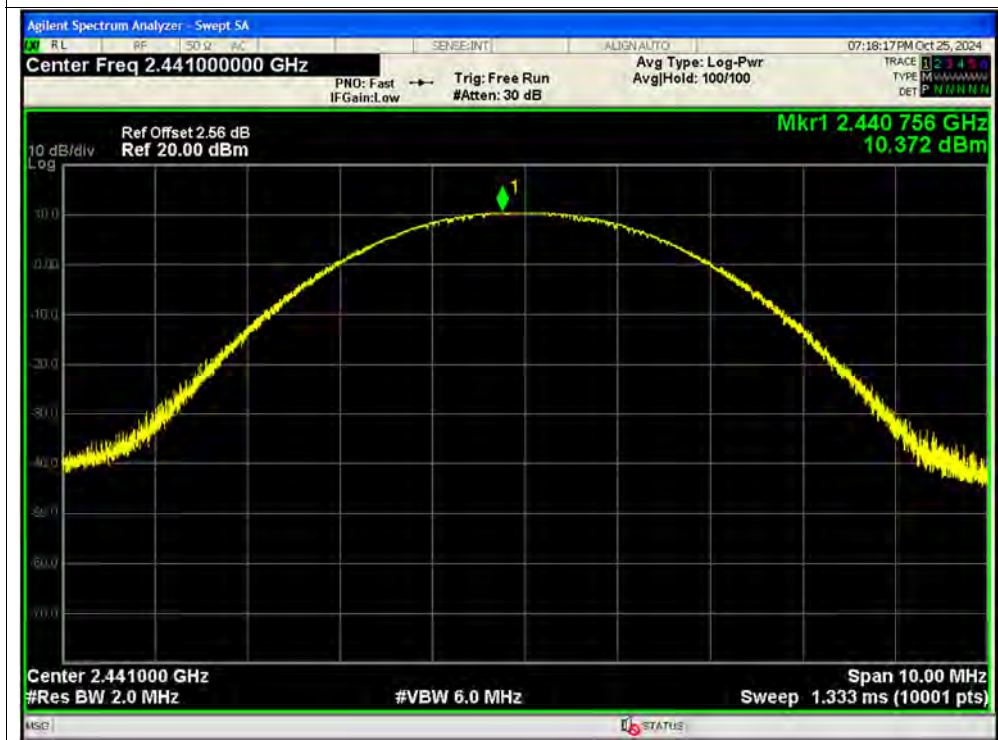



Peak Power NVNT 3-DH5 2480MHz Ant1

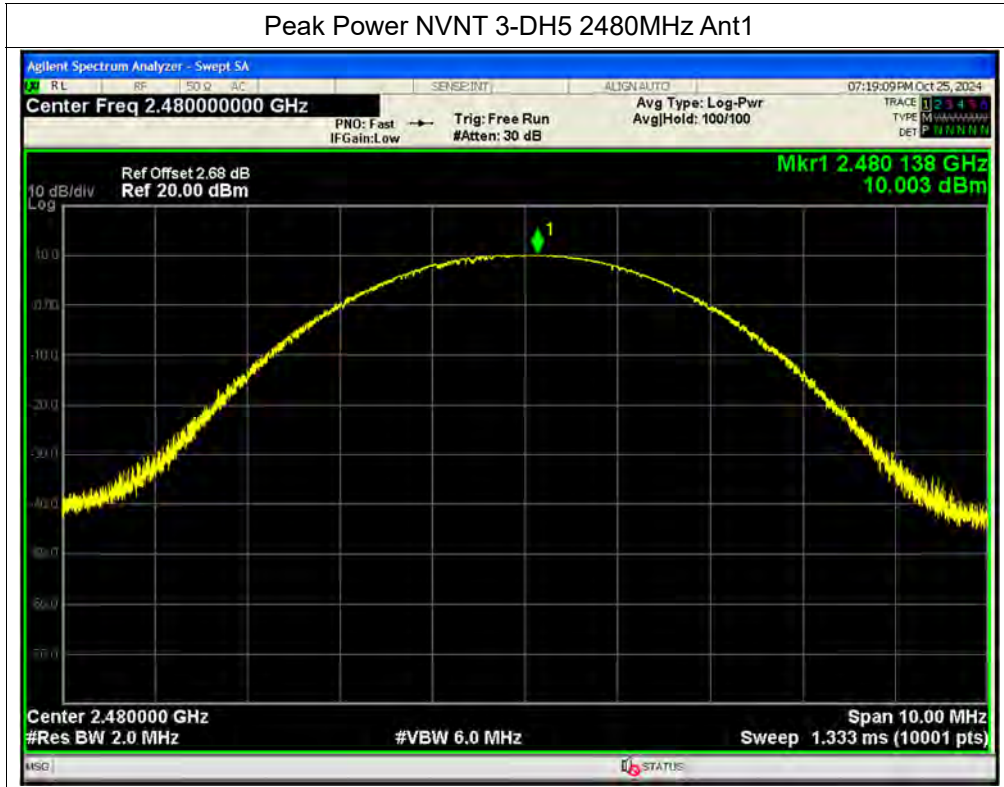


Right

Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1




Peak Power NVNT 1-DH5 2441MHz Ant1

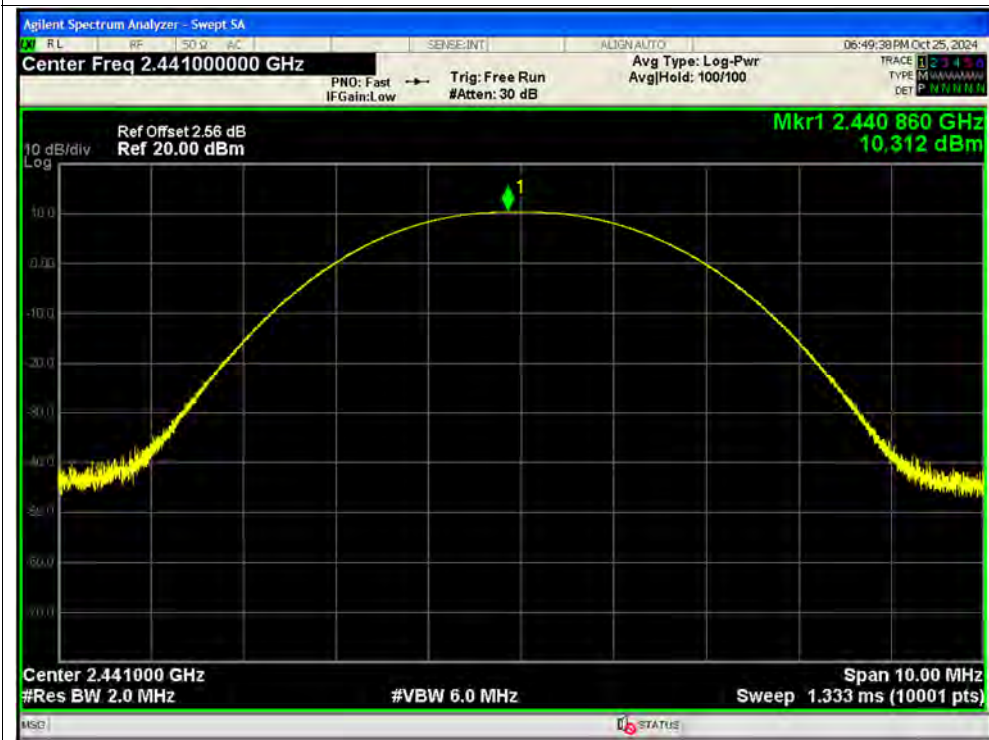




Peak Power NVNT 1-DH5 2480MHz Ant1

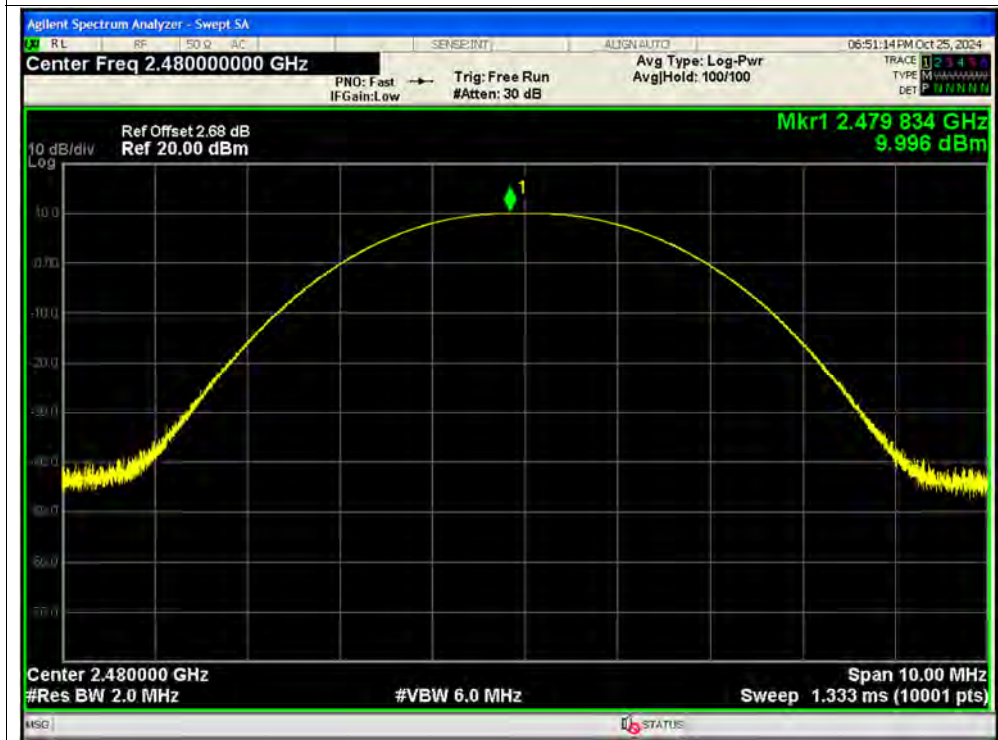


Peak Power NVNT 2-DH5 2402MHz Ant1

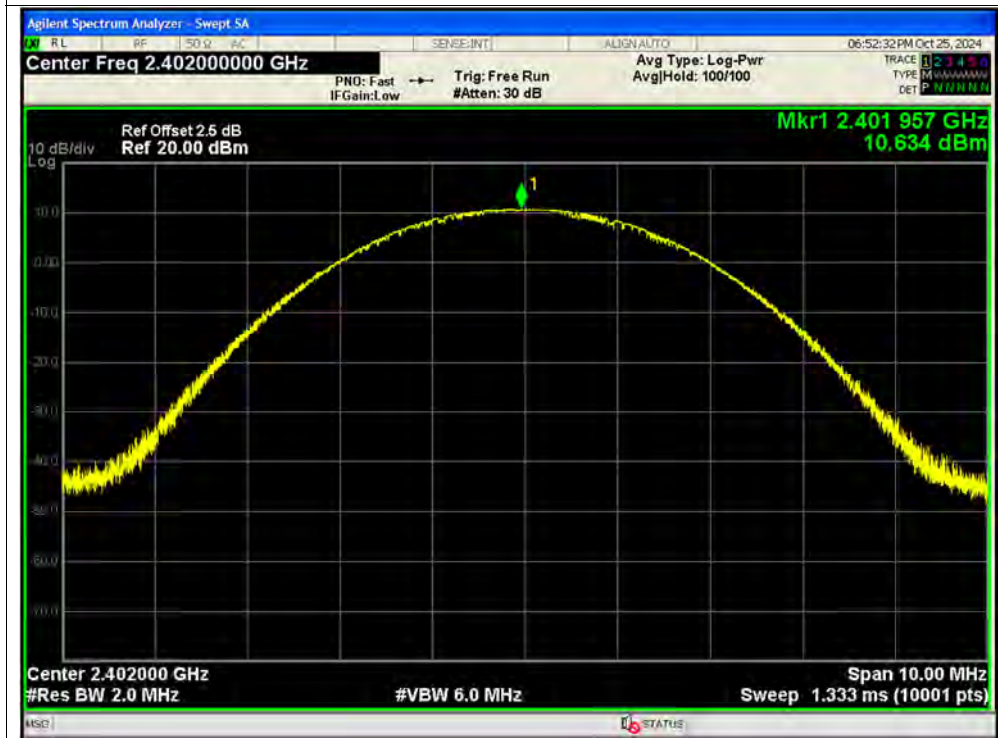




Peak Power NVNT 2-DH5 2441MHz Ant1

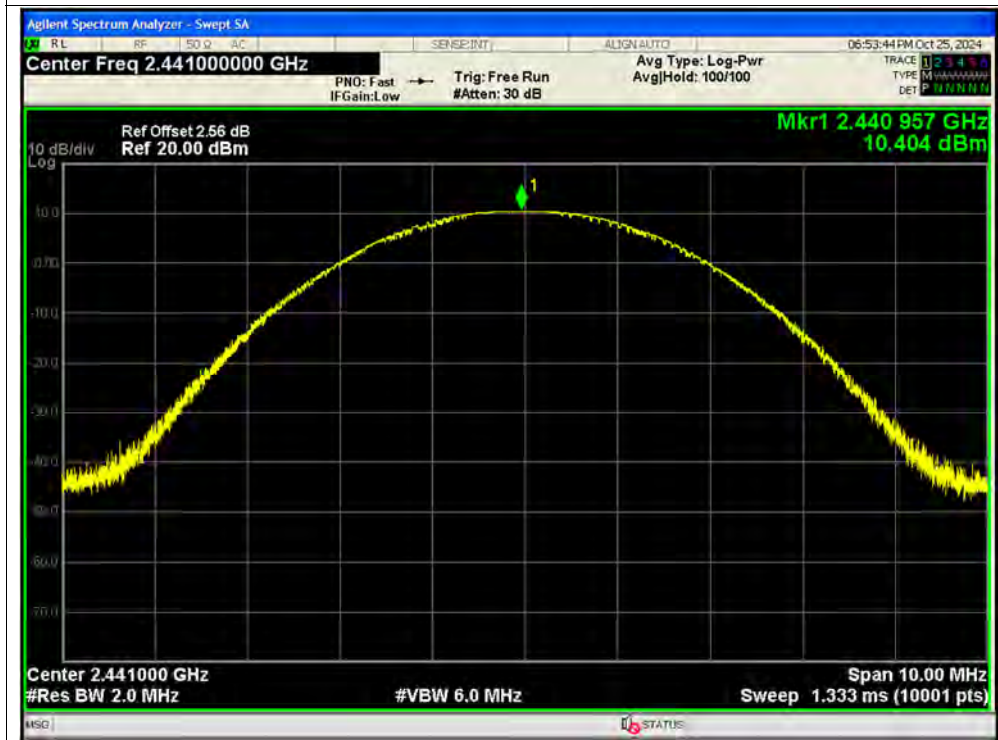


Peak Power NVNT 2-DH5 2480MHz Ant1

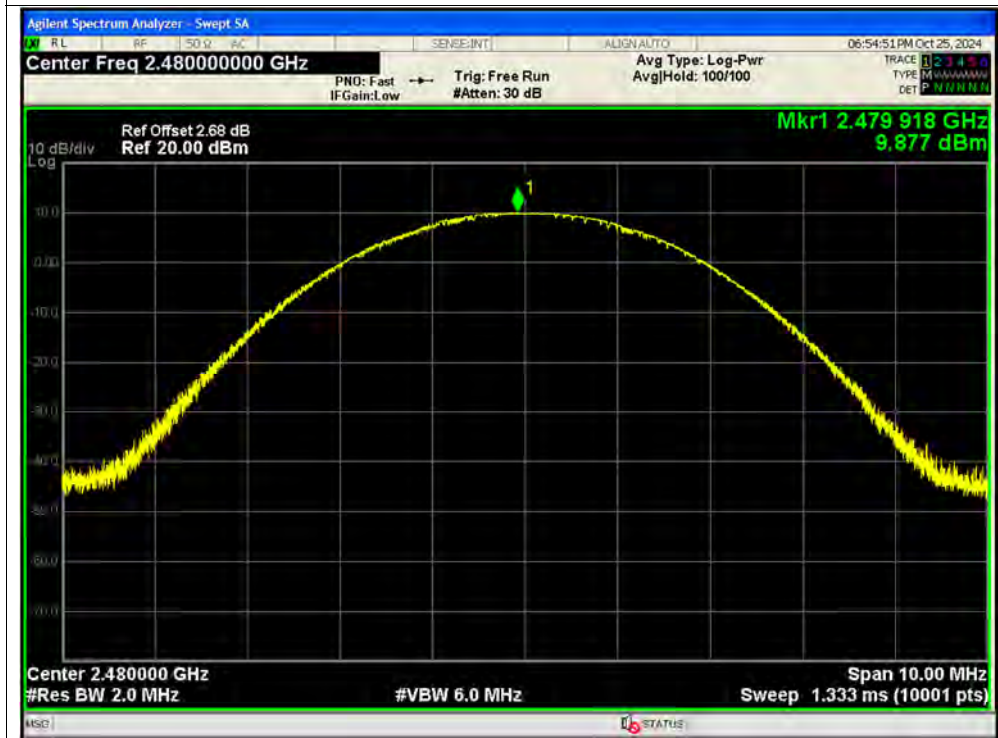




Peak Power NVNT 3-DH5 2402MHz Ant1

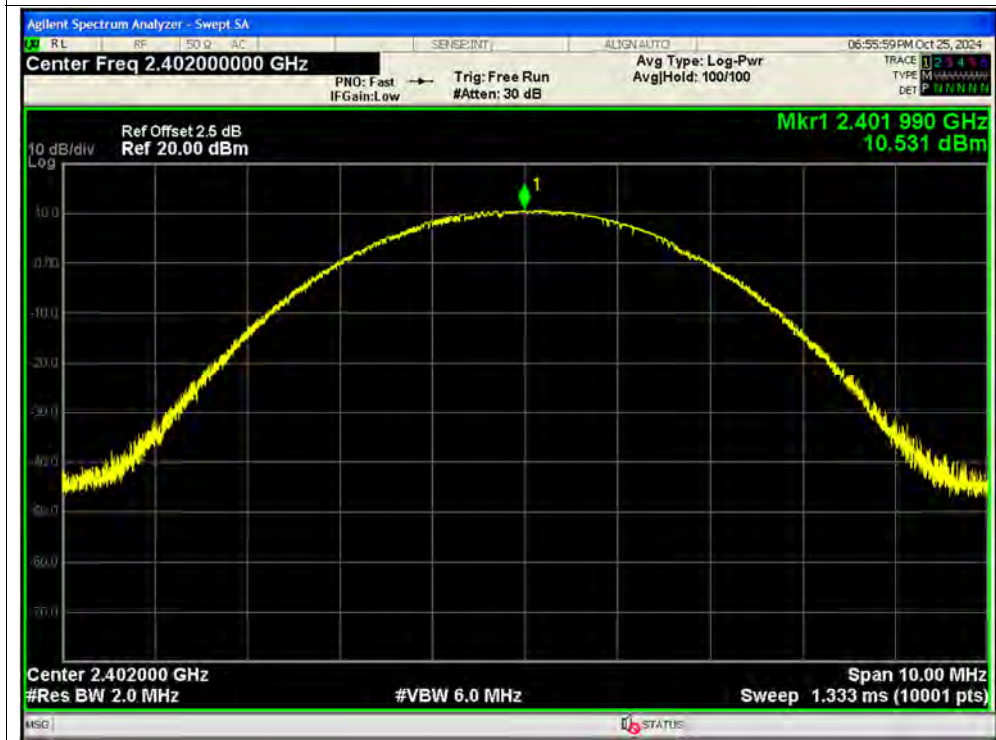

Peak Power NVNT 3-DH5 2441MHz Ant1



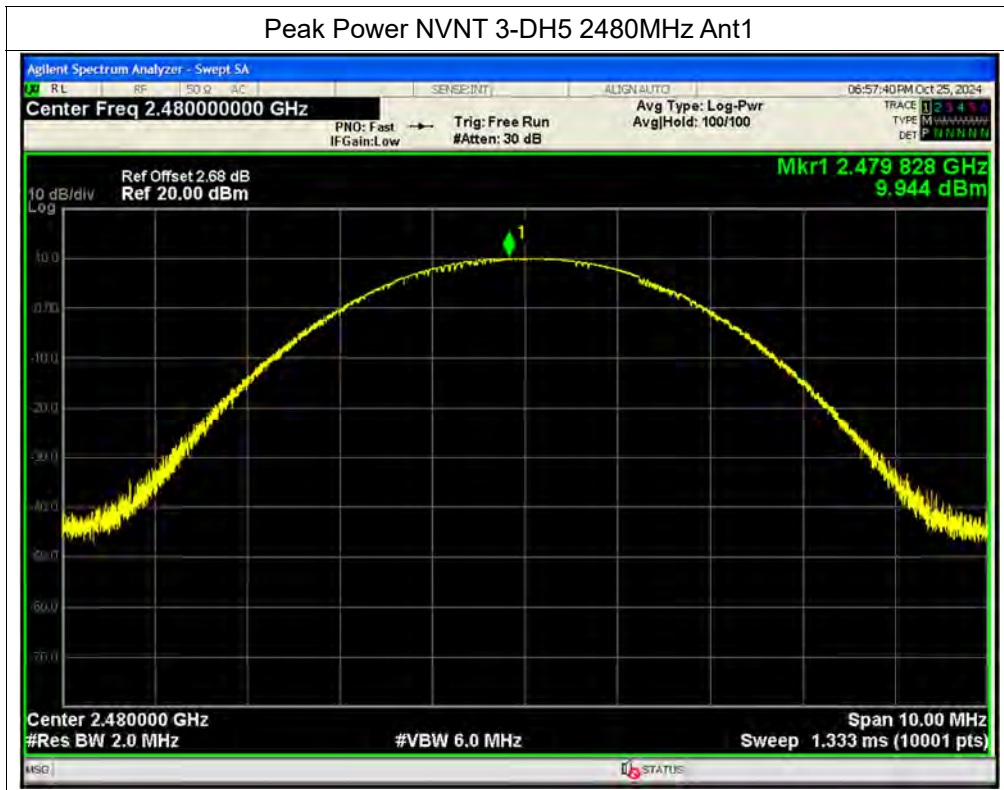



A.4. Maximum Average Conducted Output Power

Left

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Total Power (W)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	8.03	2.39	10.42	0.01102	30	Pass
NVNT	1-DH5	2441	Ant1	7.85	2.39	10.24	0.01057	30	Pass
NVNT	1-DH5	2480	Ant1	7.56	2.39	9.95	0.00989	30	Pass
NVNT	2-DH5	2402	Ant1	5.9	2.38	8.28	0.00673	30	Pass
NVNT	2-DH5	2441	Ant1	5.74	2.38	8.12	0.00649	30	Pass
NVNT	2-DH5	2480	Ant1	5.51	2.38	7.89	0.00615	30	Pass
NVNT	3-DH5	2402	Ant1	6.23	2.38	8.61	0.00726	30	Pass
NVNT	3-DH5	2441	Ant1	5.73	2.38	8.11	0.00647	30	Pass
NVNT	3-DH5	2480	Ant1	4.99	2.37	7.36	0.00545	30	Pass


Right

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Total Power (W)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	7.78	2.39	10.17	0.0104	30	Pass
NVNT	1-DH5	2441	Ant1	7.9	2.39	10.29	0.01069	30	Pass
NVNT	1-DH5	2480	Ant1	7.41	2.39	9.8	0.00955	30	Pass
NVNT	2-DH5	2402	Ant1	5.19	2.38	7.57	0.00571	30	Pass
NVNT	2-DH5	2441	Ant1	5	2.38	7.38	0.00547	30	Pass
NVNT	2-DH5	2480	Ant1	5.06	2.38	7.44	0.00555	30	Pass
NVNT	3-DH5	2402	Ant1	4.99	2.38	7.37	0.00546	30	Pass
NVNT	3-DH5	2441	Ant1	5.06	2.38	7.44	0.00555	30	Pass
NVNT	3-DH5	2480	Ant1	4.47	2.38	6.85	0.00484	30	Pass






Average Power NVNT 1-DH5 2480MHz Ant1

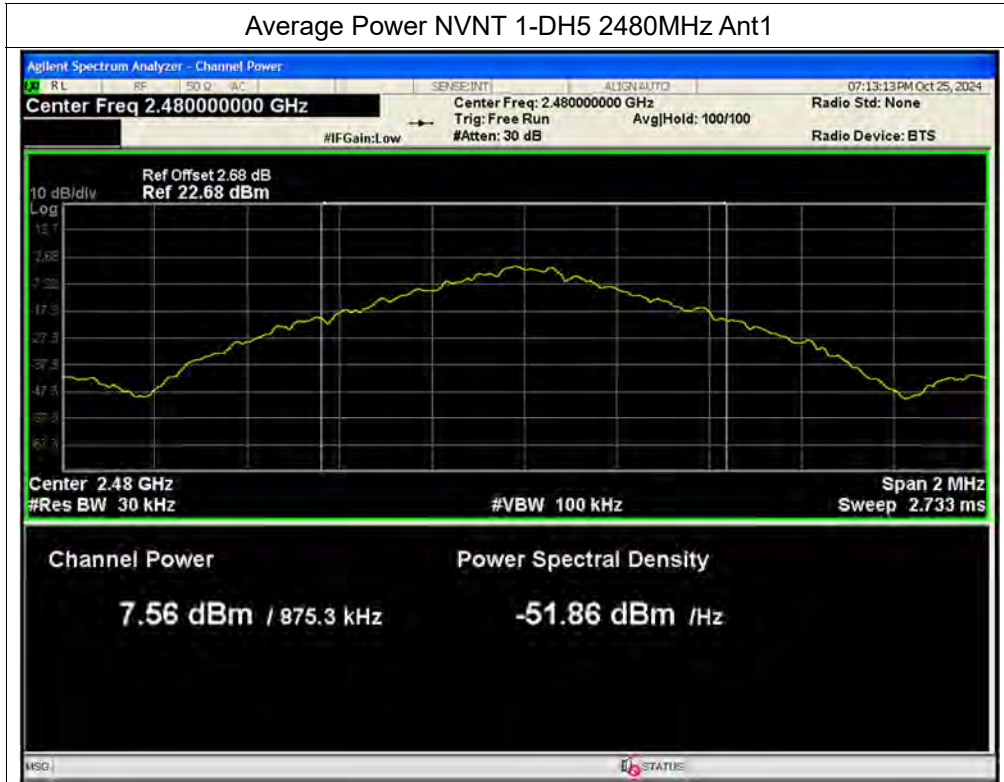


Average Power NVNT 2-DH5 2402MHz Ant1

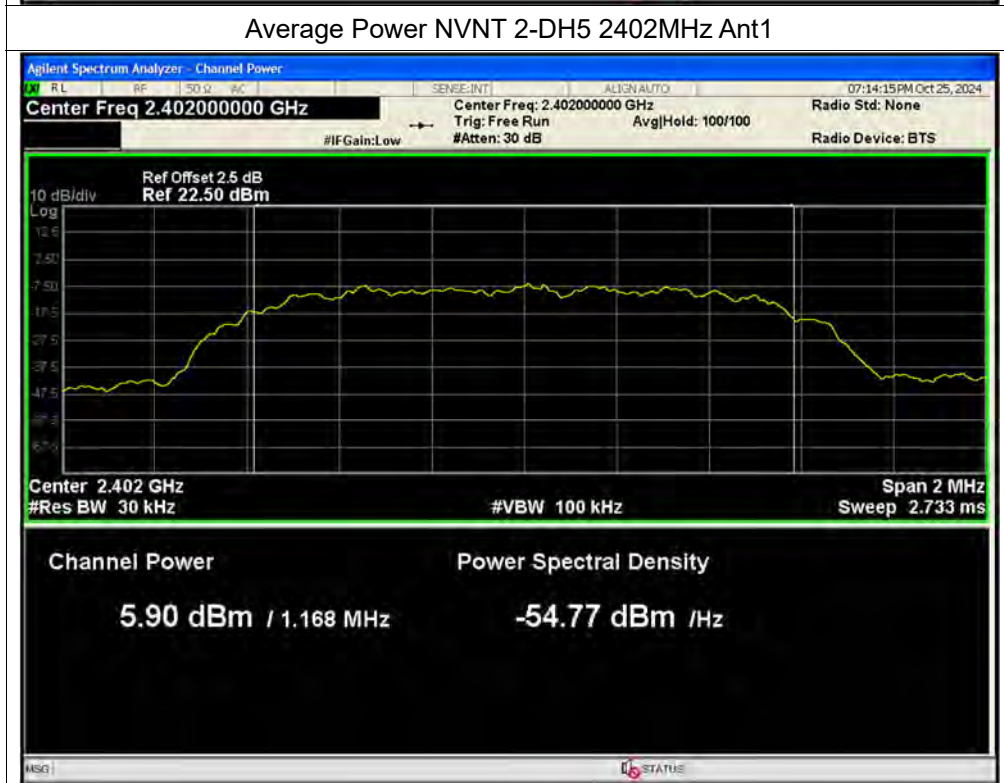




Average Power NVNT 2-DH5 2441MHz Ant1

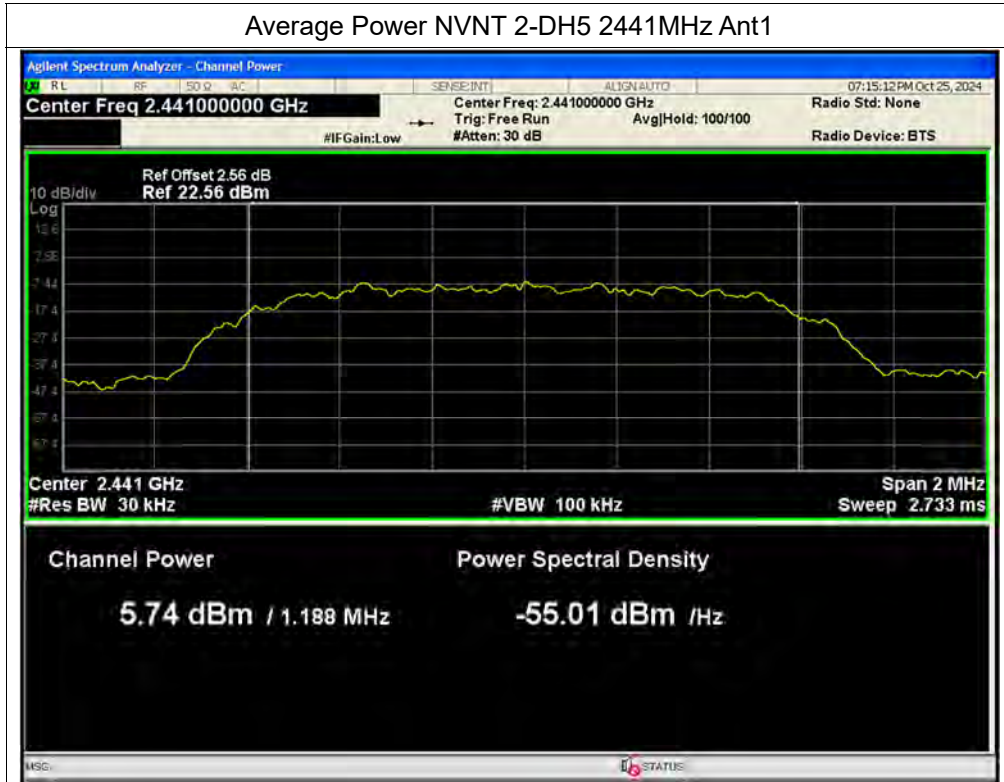


Average Power NVNT 2-DH5 2480MHz Ant1

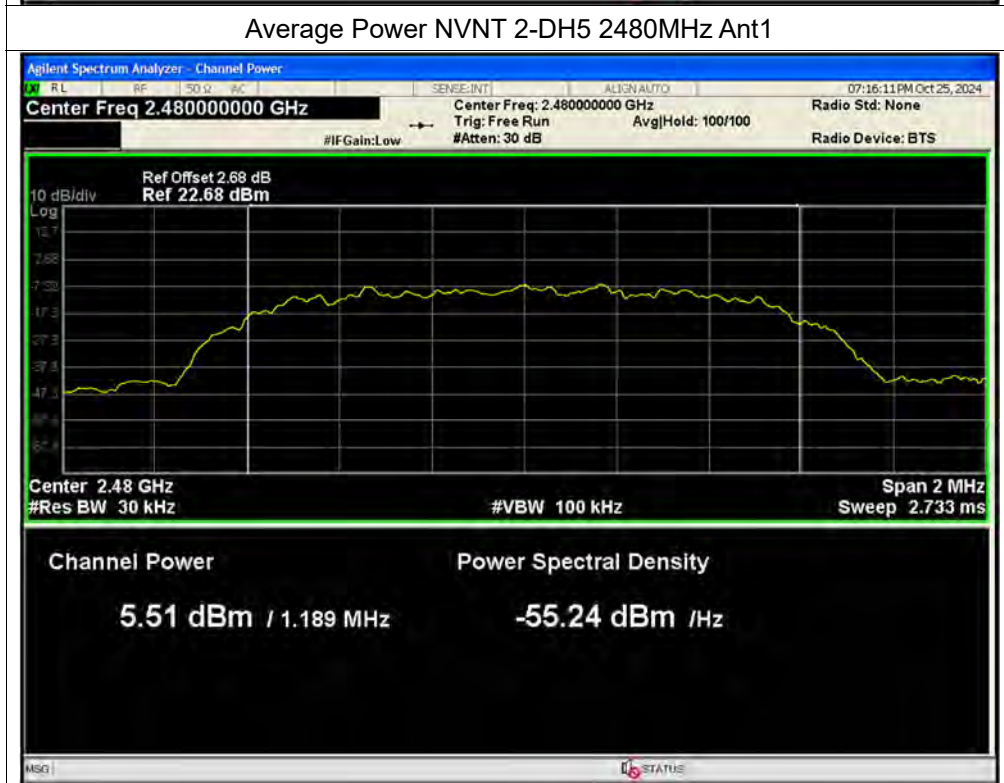





Average Power NVNT 3-DH5 2402MHz Ant1

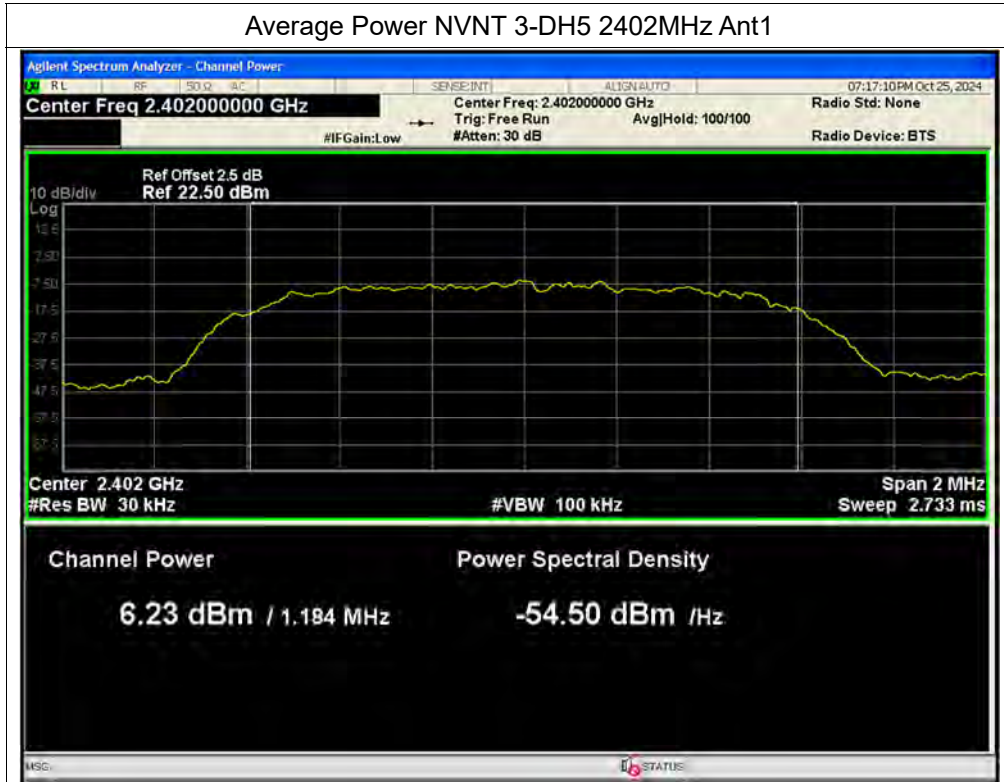

Average Power NVNT 3-DH5 2441MHz Ant1

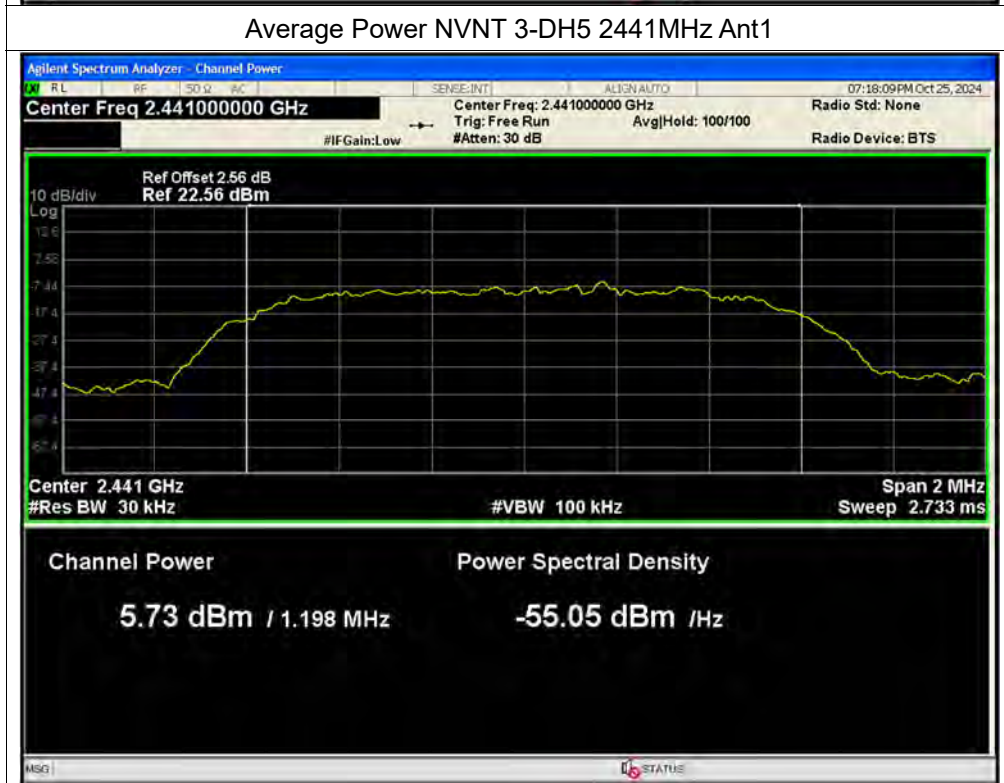

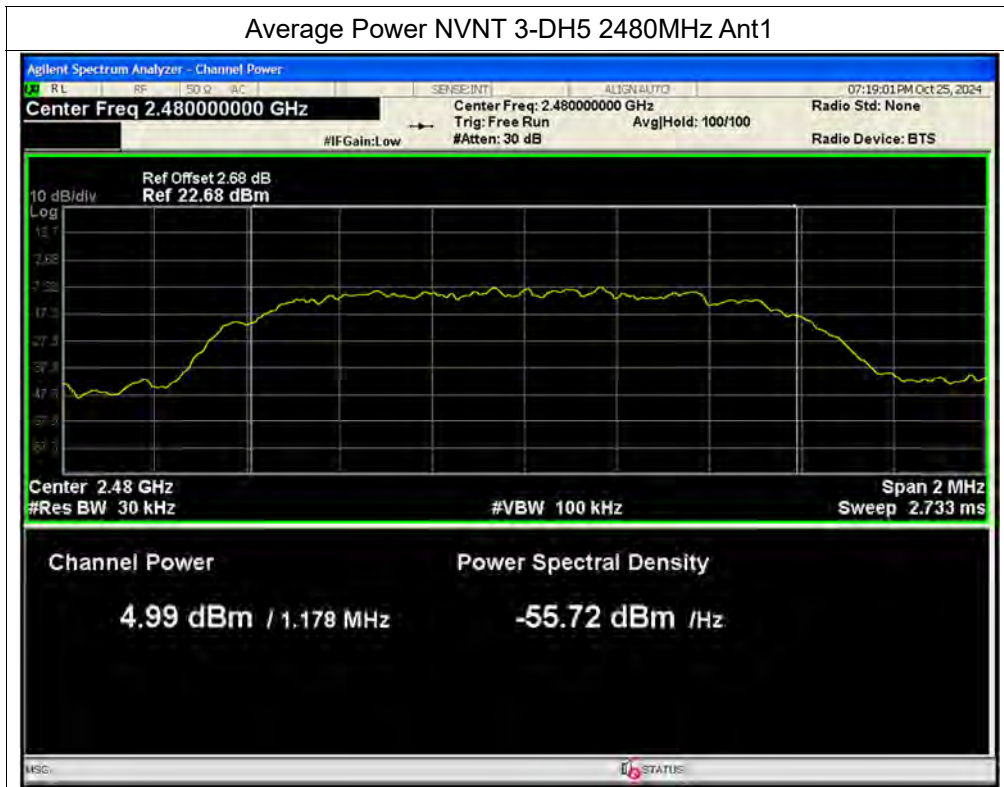



Right

Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1




Average Power NVNT 1-DH5 2441MHz Ant1






Average Power NVNT 1-DH5 2480MHz Ant1

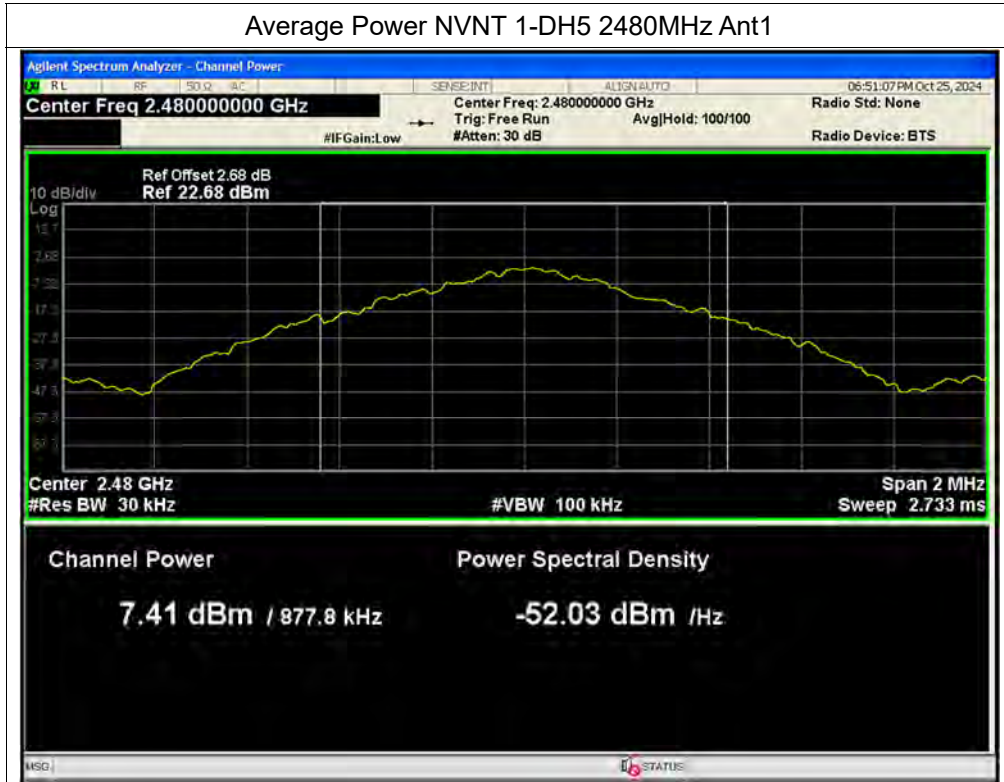


Average Power NVNT 2-DH5 2402MHz Ant1

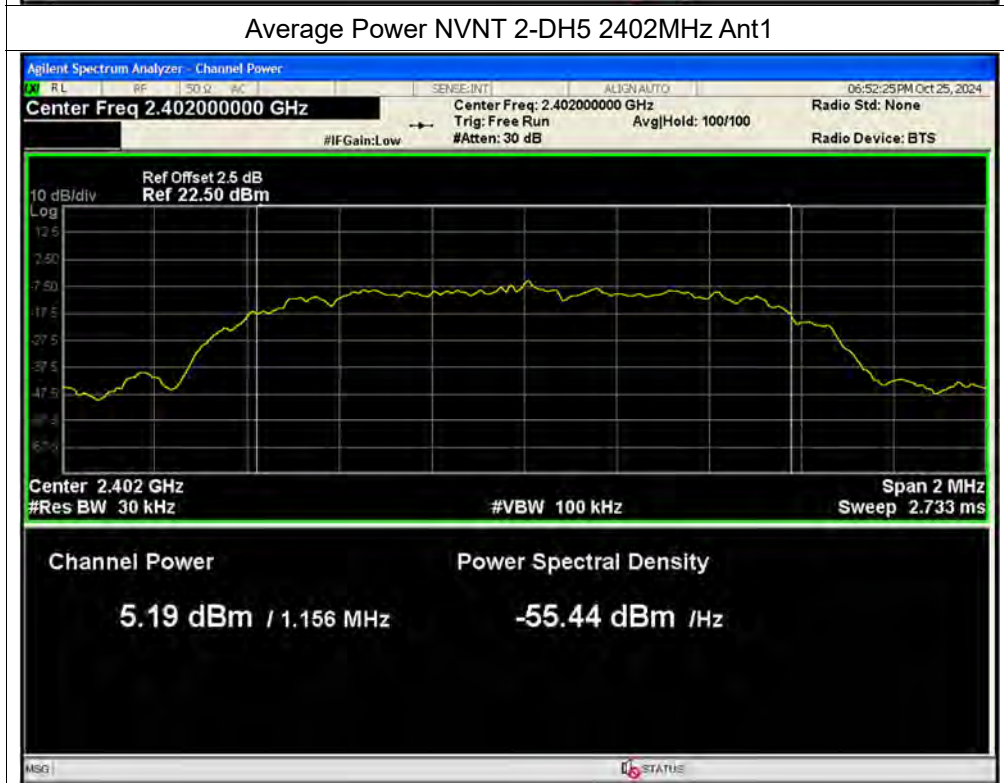




Average Power NVNT 2-DH5 2441MHz Ant1

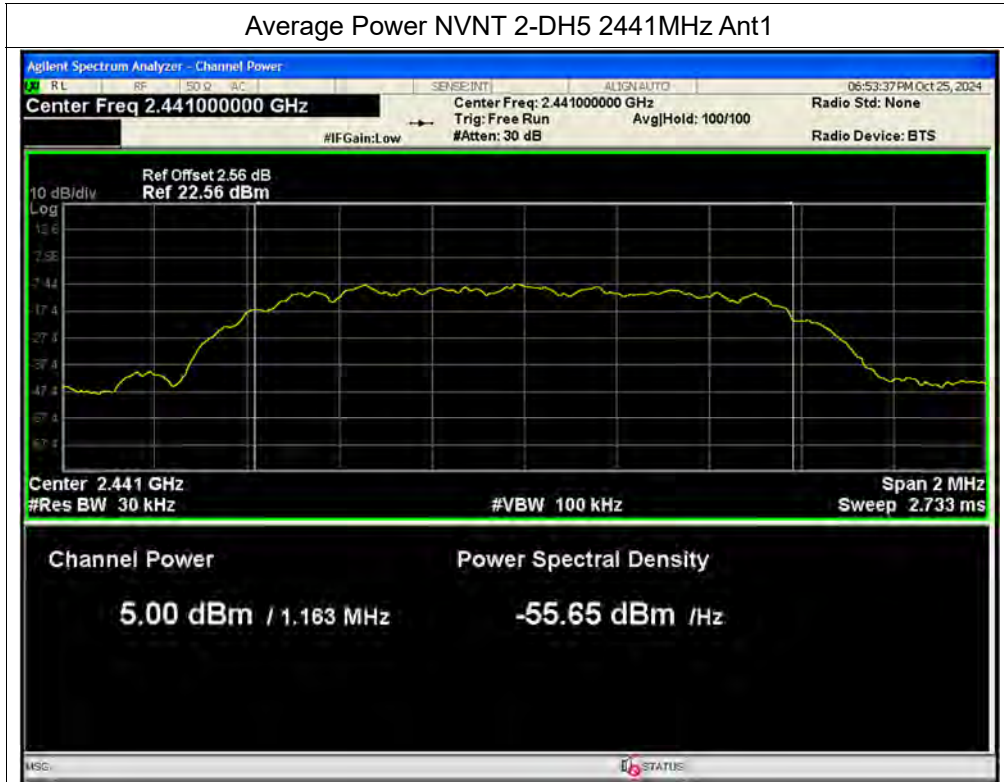


Average Power NVNT 2-DH5 2480MHz Ant1

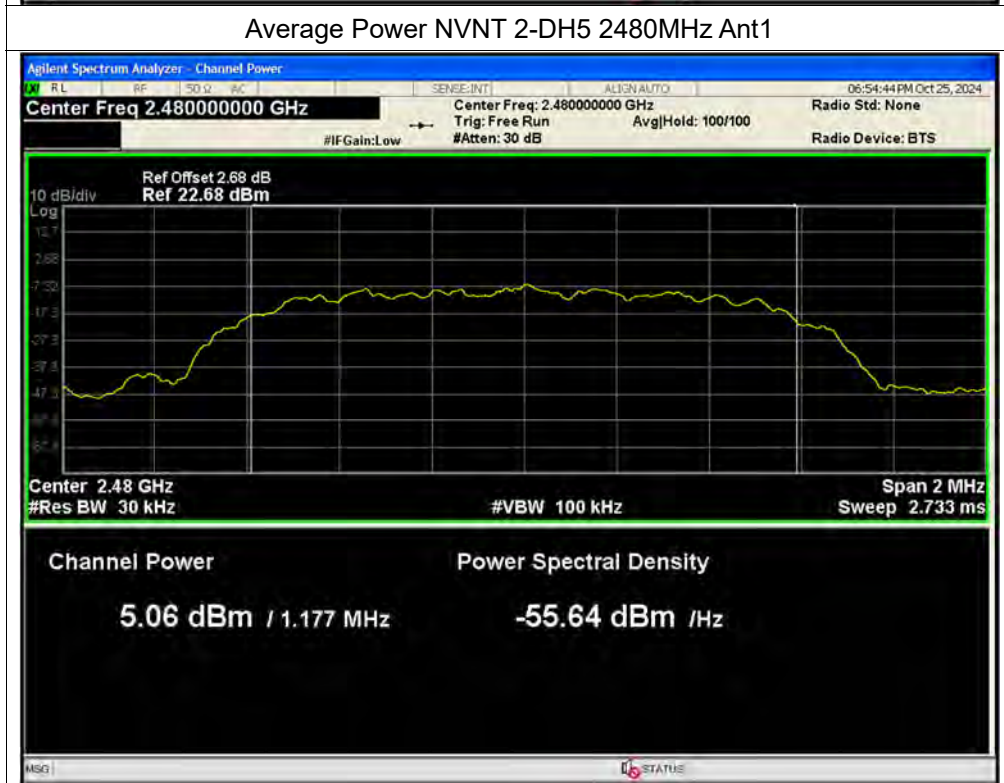





Average Power NVNT 3-DH5 2402MHz Ant1

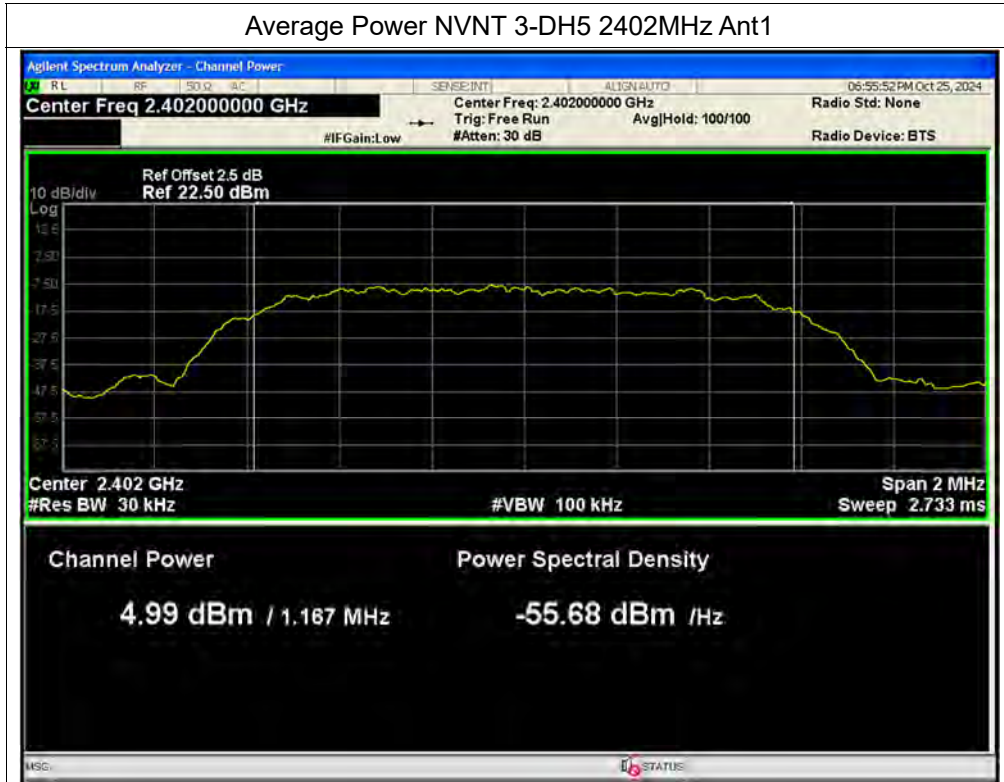

Average Power NVNT 3-DH5 2441MHz Ant1

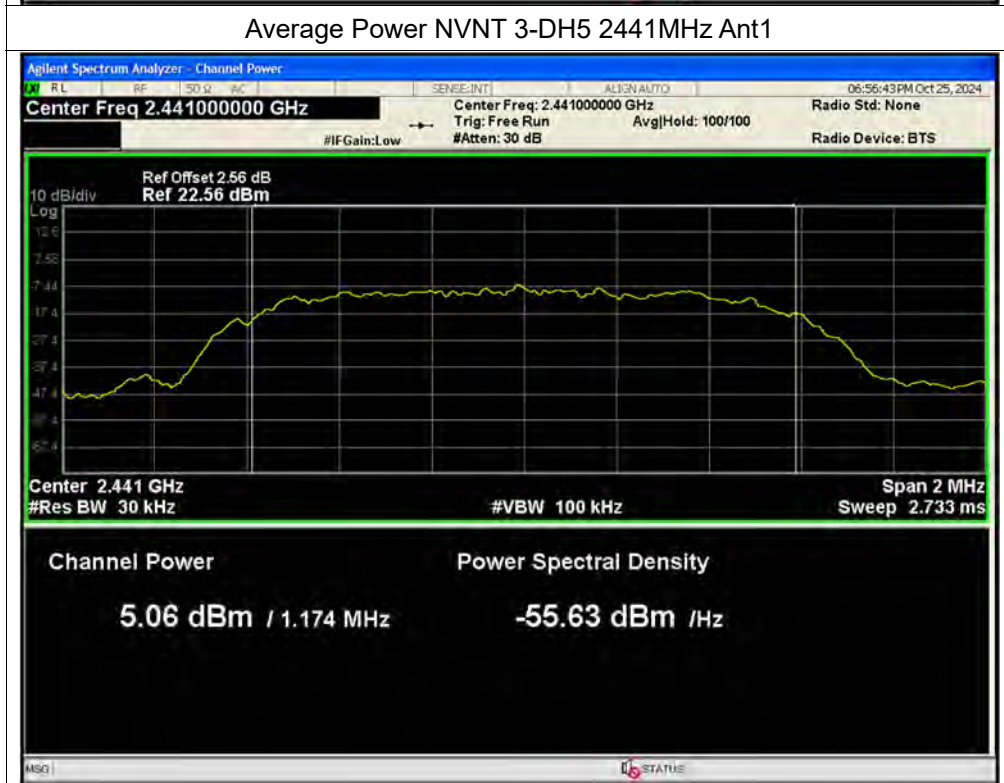

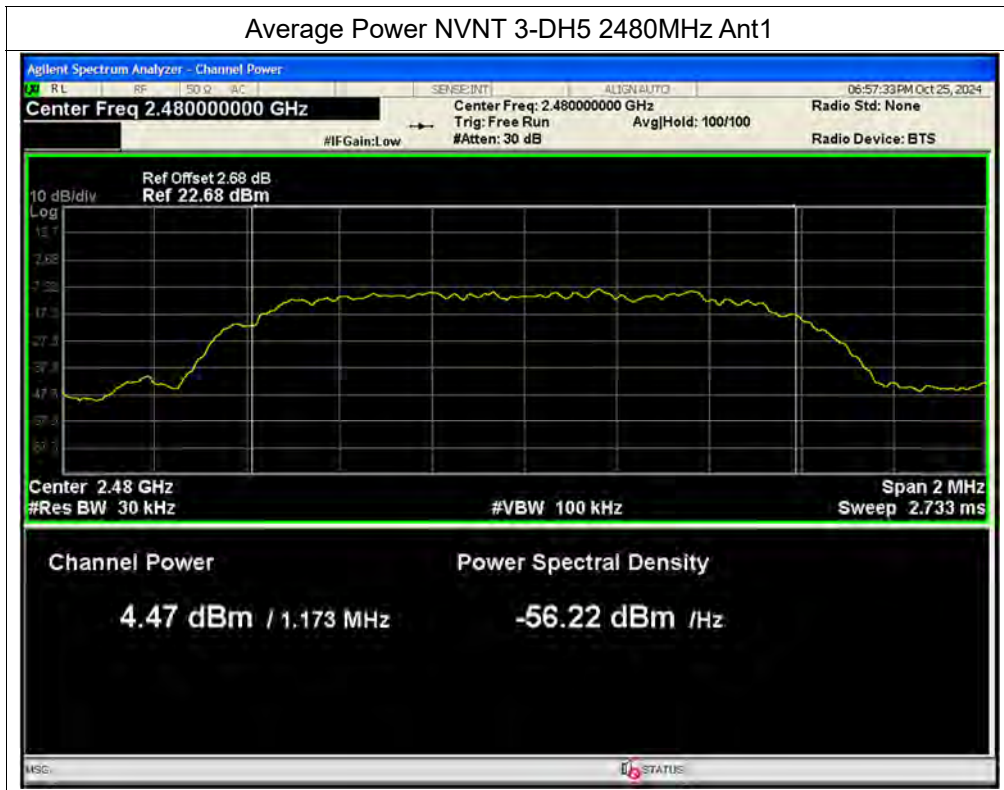

**A.5. 20 dB Bandwidth****Left**

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	1.015
NVNT	1-DH5	2441	Ant1	0.992
NVNT	1-DH5	2480	Ant1	1.005
NVNT	2-DH5	2402	Ant1	1.271
NVNT	2-DH5	2441	Ant1	1.257
NVNT	2-DH5	2480	Ant1	1.21
NVNT	3-DH5	2402	Ant1	1.251
NVNT	3-DH5	2441	Ant1	1.272
NVNT	3-DH5	2480	Ant1	1.242

Right

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.999
NVNT	1-DH5	2441	Ant1	0.975
NVNT	1-DH5	2480	Ant1	0.957
NVNT	2-DH5	2402	Ant1	1.193
NVNT	2-DH5	2441	Ant1	1.267
NVNT	2-DH5	2480	Ant1	1.26
NVNT	3-DH5	2402	Ant1	1.258
NVNT	3-DH5	2441	Ant1	1.236
NVNT	3-DH5	2480	Ant1	1.242



Left

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

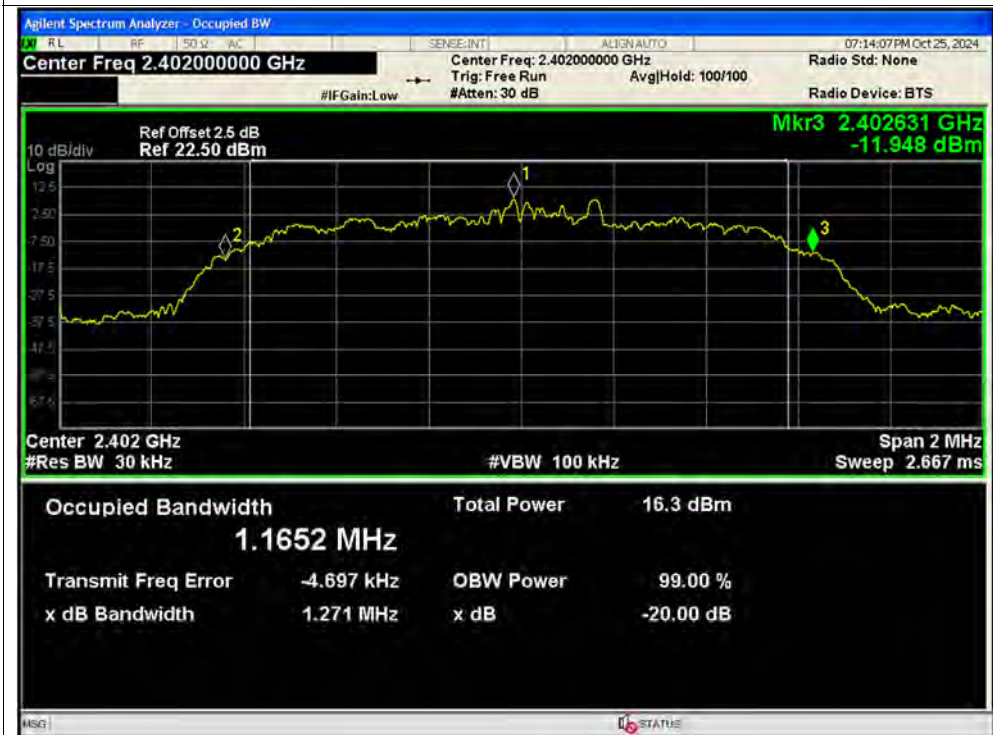



-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

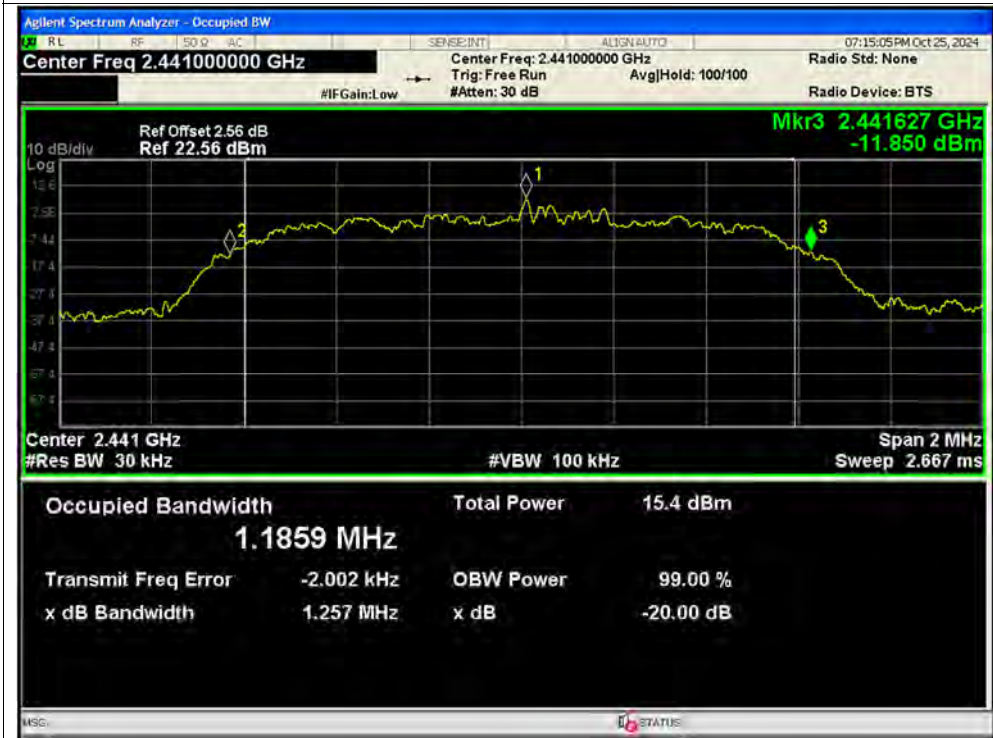


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1







-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

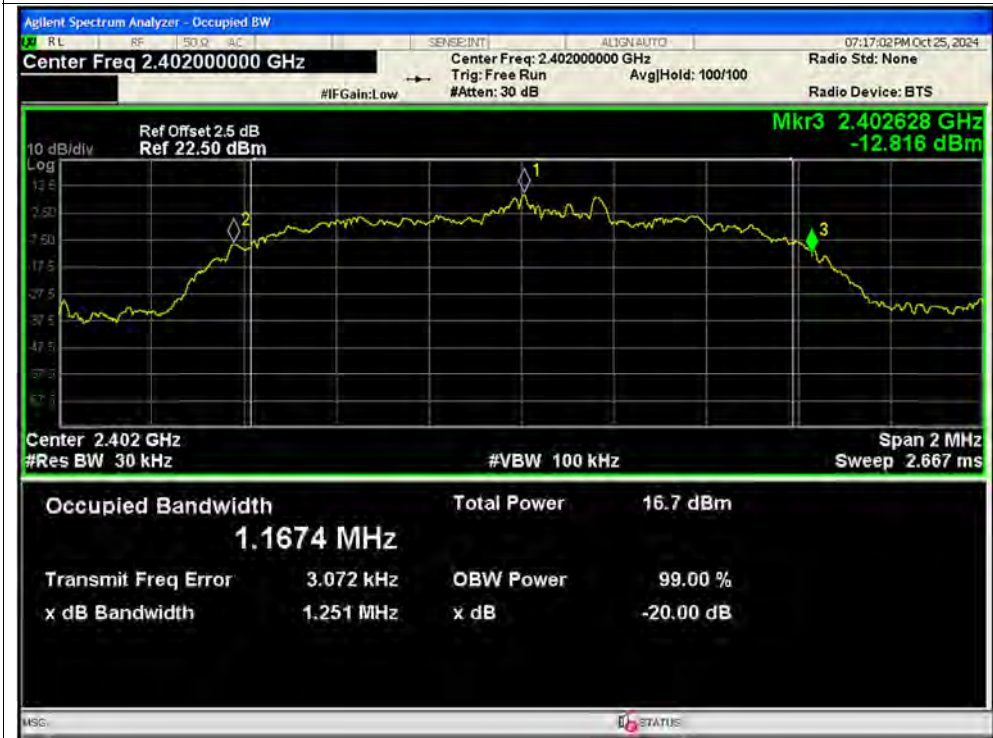

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

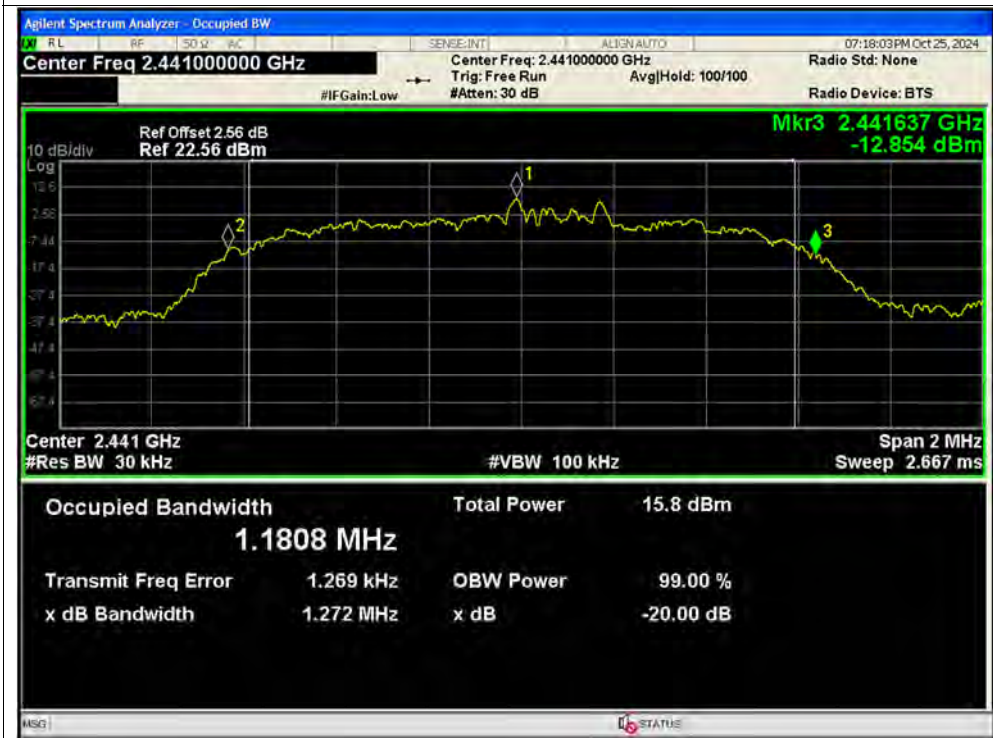

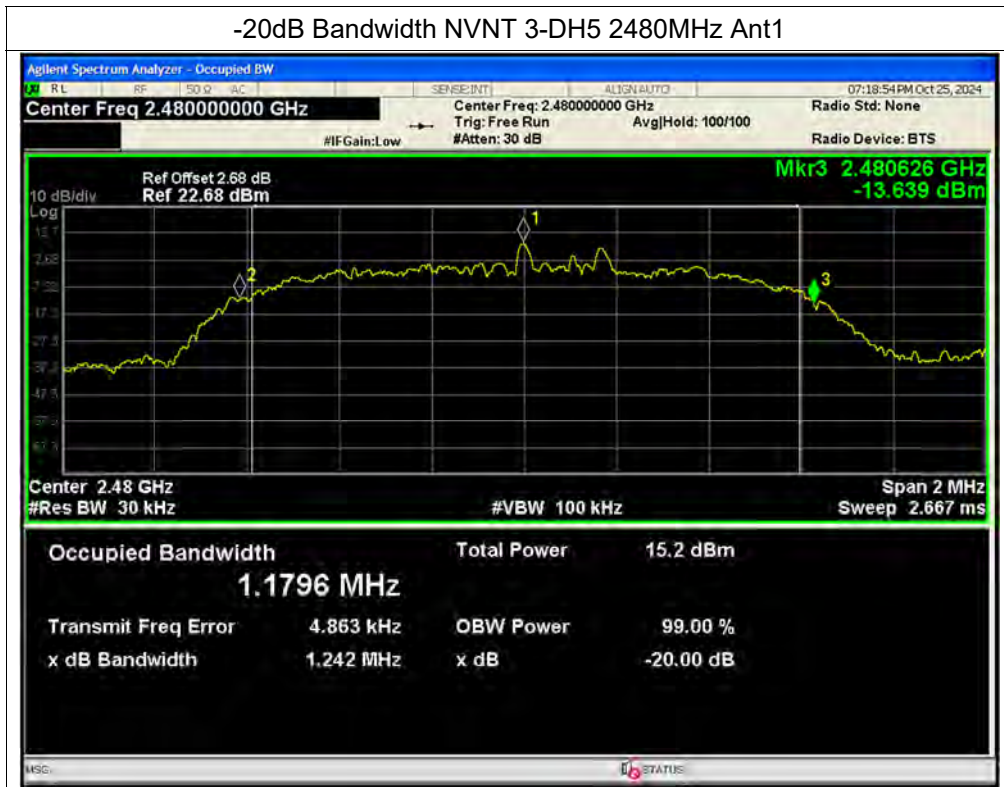



Right

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

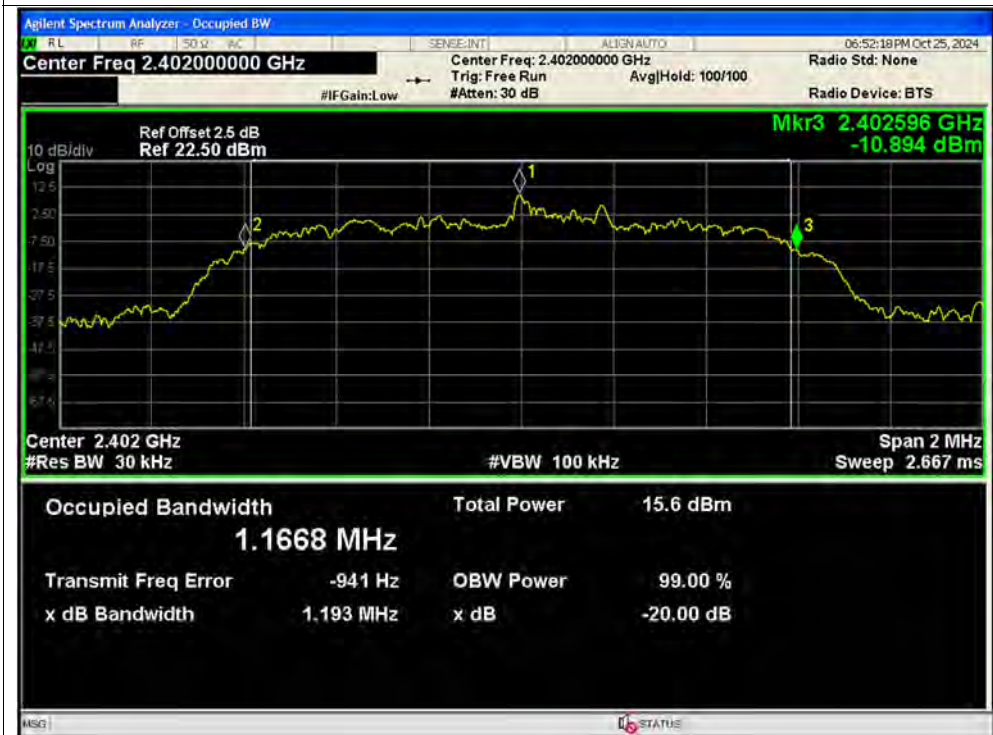




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

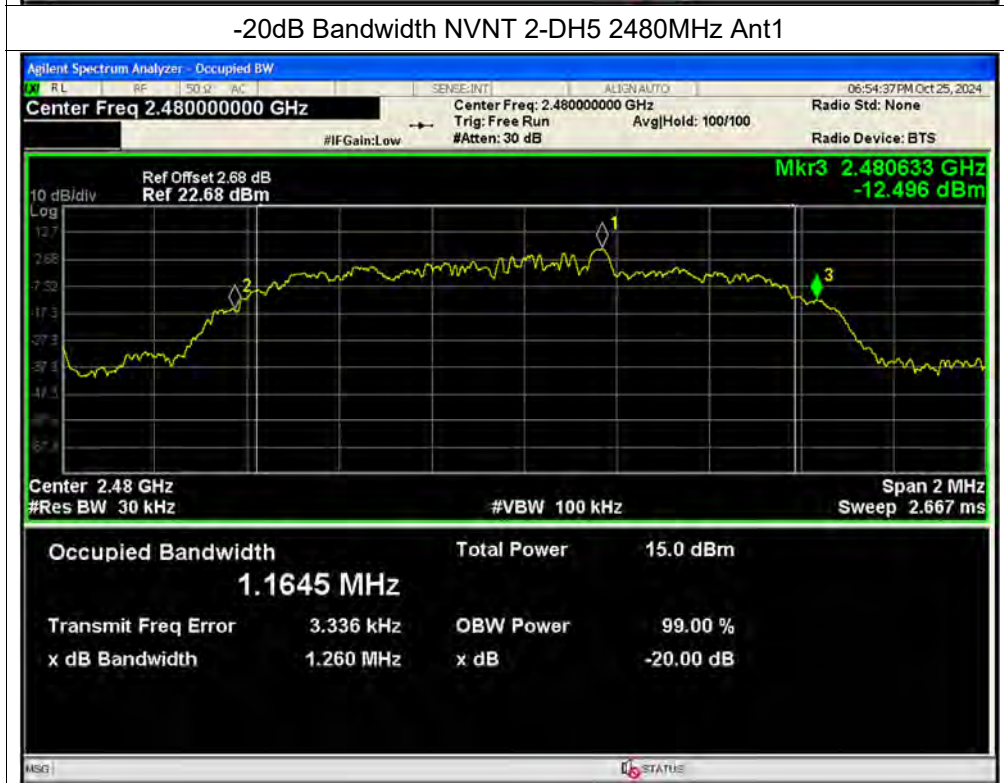





-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

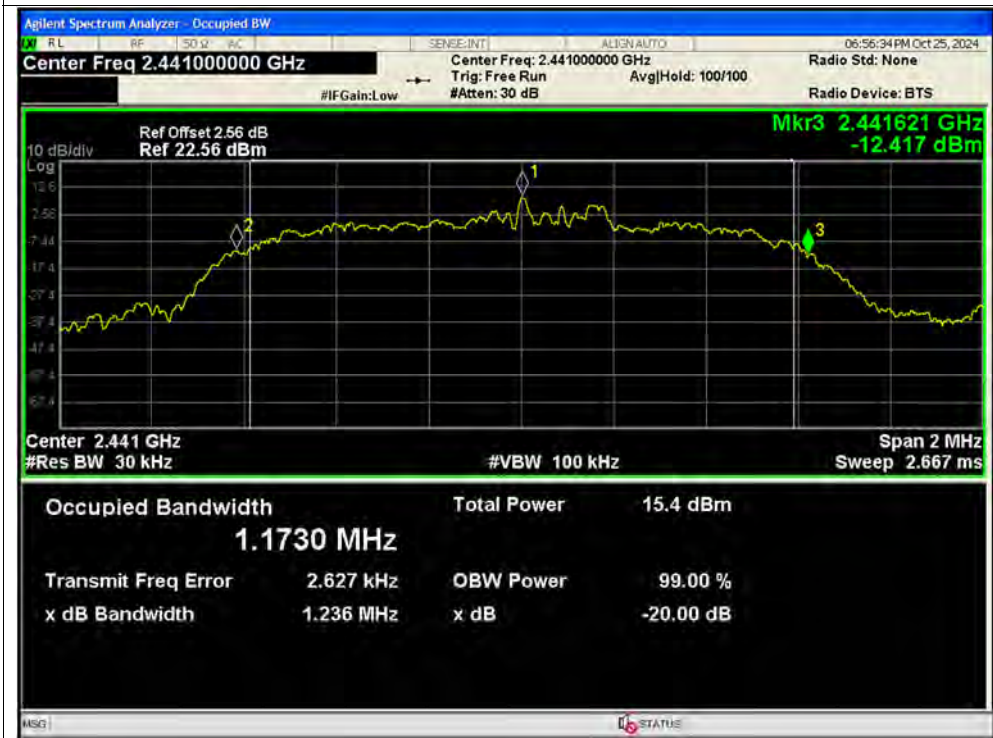

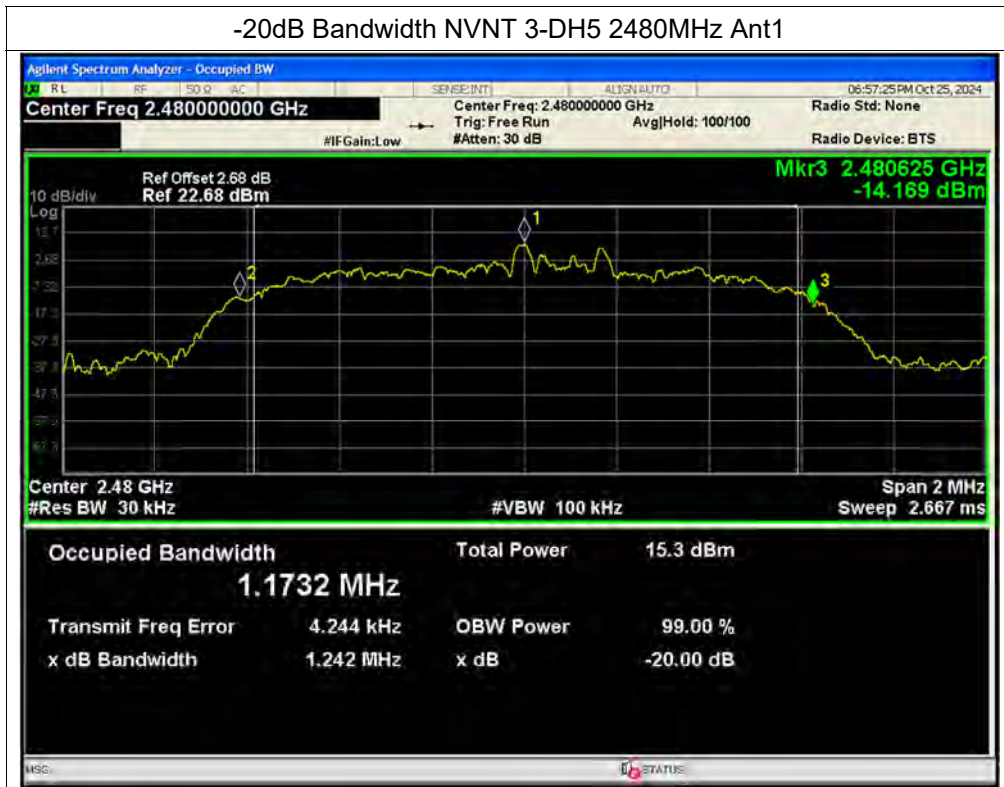

**A.6. Carried Frequency Separation****Left**

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.968	2402.892	0.924	0.677	Pass
NVNT	1-DH5	Ant1	2440.99	2441.99	1	0.661	Pass
NVNT	1-DH5	Ant1	2479.004	2479.99	0.986	0.67	Pass
NVNT	2-DH5	Ant1	2402.064	2403.166	1.102	0.847	Pass
NVNT	2-DH5	Ant1	2441.014	2441.996	0.982	0.838	Pass
NVNT	2-DH5	Ant1	2478.822	2480.004	1.182	0.807	Pass
NVNT	3-DH5	Ant1	2401.926	2402.93	1.004	0.834	Pass
NVNT	3-DH5	Ant1	2441.17	2442.124	0.954	0.848	Pass
NVNT	3-DH5	Ant1	2478.994	2480.162	1.168	0.828	Pass

Right

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.998	2403.164	1.166	0.666	Pass
NVNT	1-DH5	Ant1	2440.908	2441.938	1.03	0.65	Pass
NVNT	1-DH5	Ant1	2478.904	2479.99	1.086	0.638	Pass
NVNT	2-DH5	Ant1	2402.022	2402.934	0.912	0.795	Pass
NVNT	2-DH5	Ant1	2440.986	2441.982	0.996	0.845	Pass
NVNT	2-DH5	Ant1	2478.818	2480.014	1.196	0.84	Pass
NVNT	3-DH5	Ant1	2401.98	2402.996	1.016	0.839	Pass
NVNT	3-DH5	Ant1	2441.058	2442.11	1.052	0.824	Pass
NVNT	3-DH5	Ant1	2479.114	2480.152	1.038	0.828	Pass






CFS NVNT 1-DH5 2480MHz Ant1




CFS NVNT 2-DH5 2402MHz Ant1

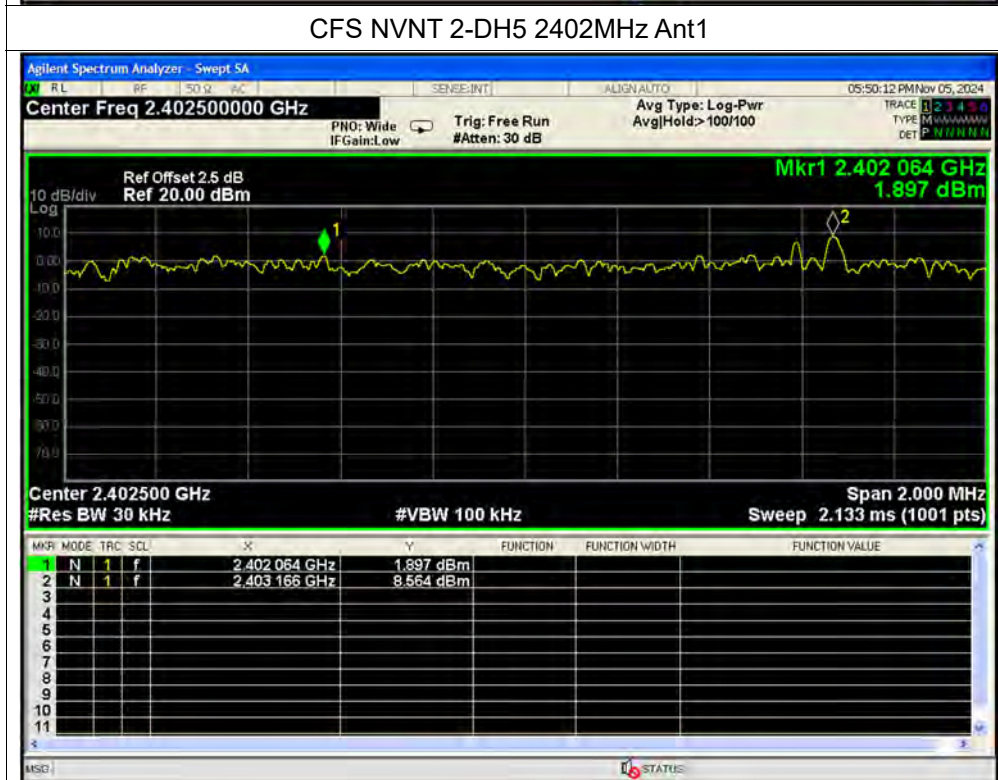




CFS NVNT 2-DH5 2441MHz Ant1

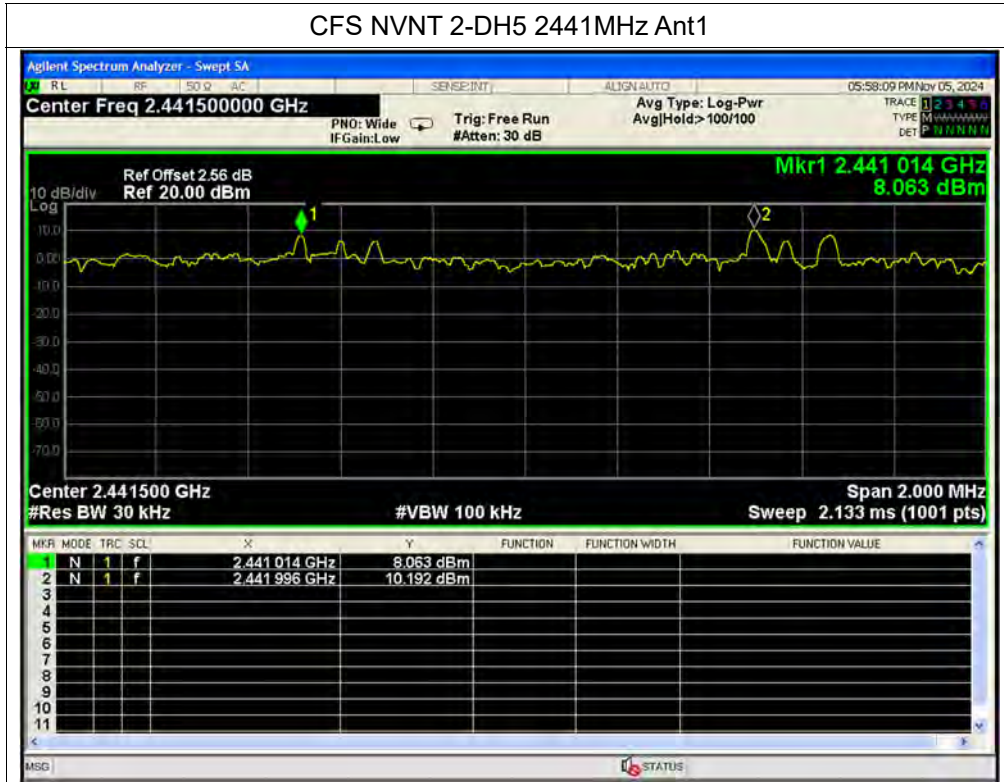


CFS NVNT 2-DH5 2480MHz Ant1

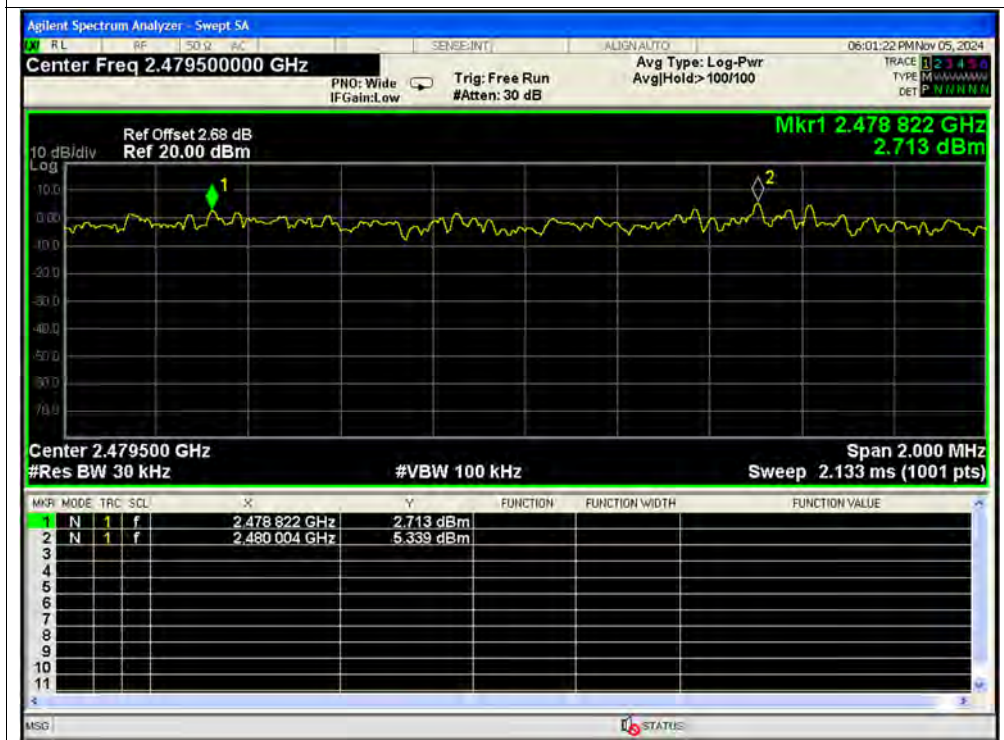





CFS NVNT 3-DH5 2402MHz Ant1

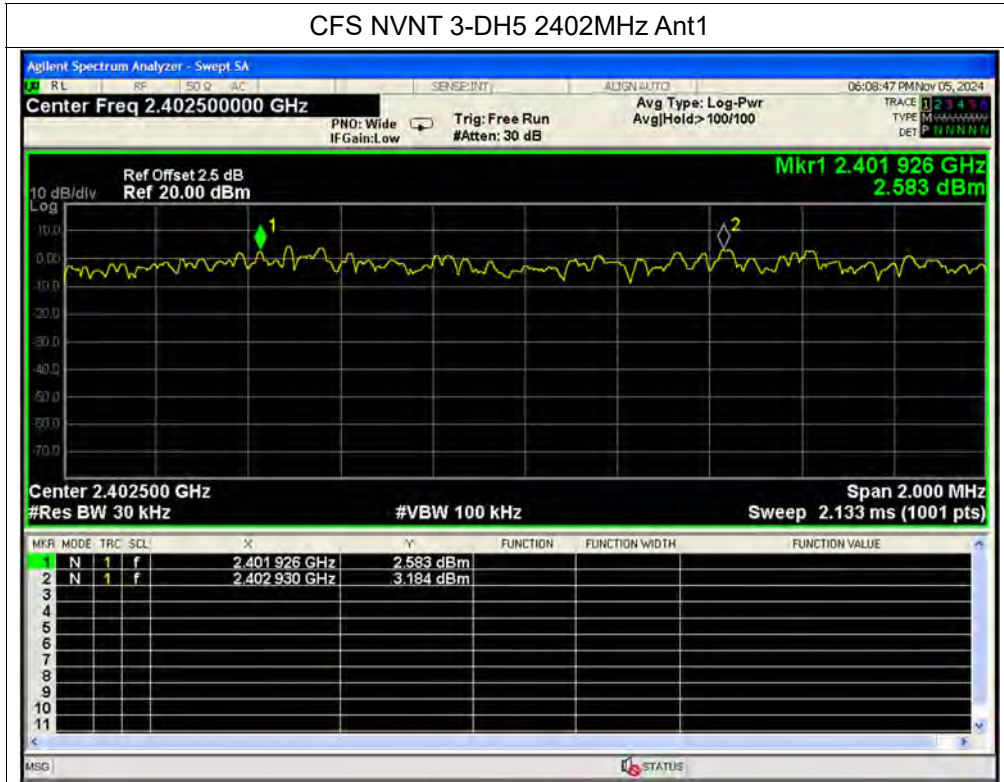

CFS NVNT 3-DH5 2441MHz Ant1

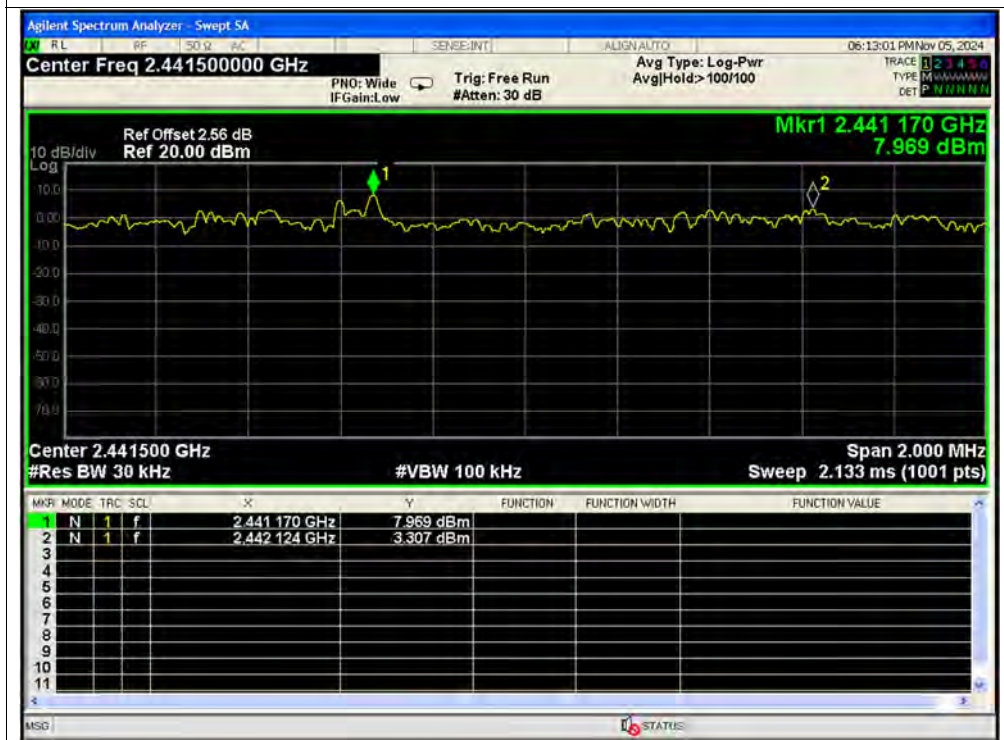

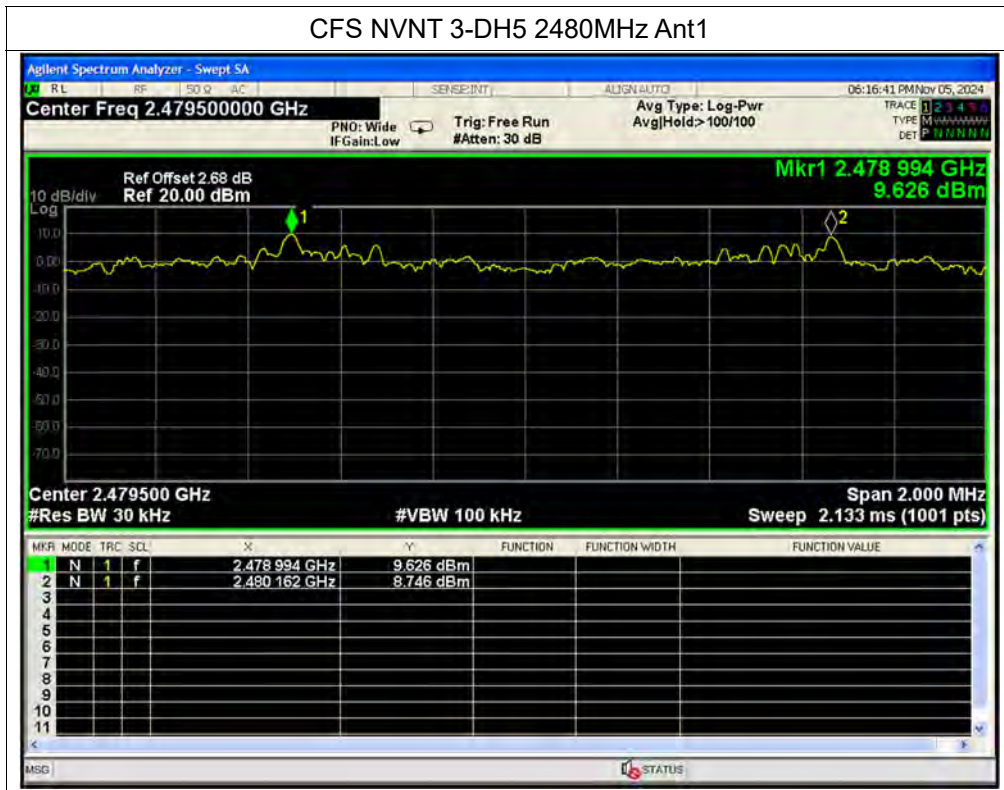



Right

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1



CFS NVNT 1-DH5 2441MHz Ant1






CFS NVNT 1-DH5 2480MHz Ant1




CFS NVNT 2-DH5 2402MHz Ant1

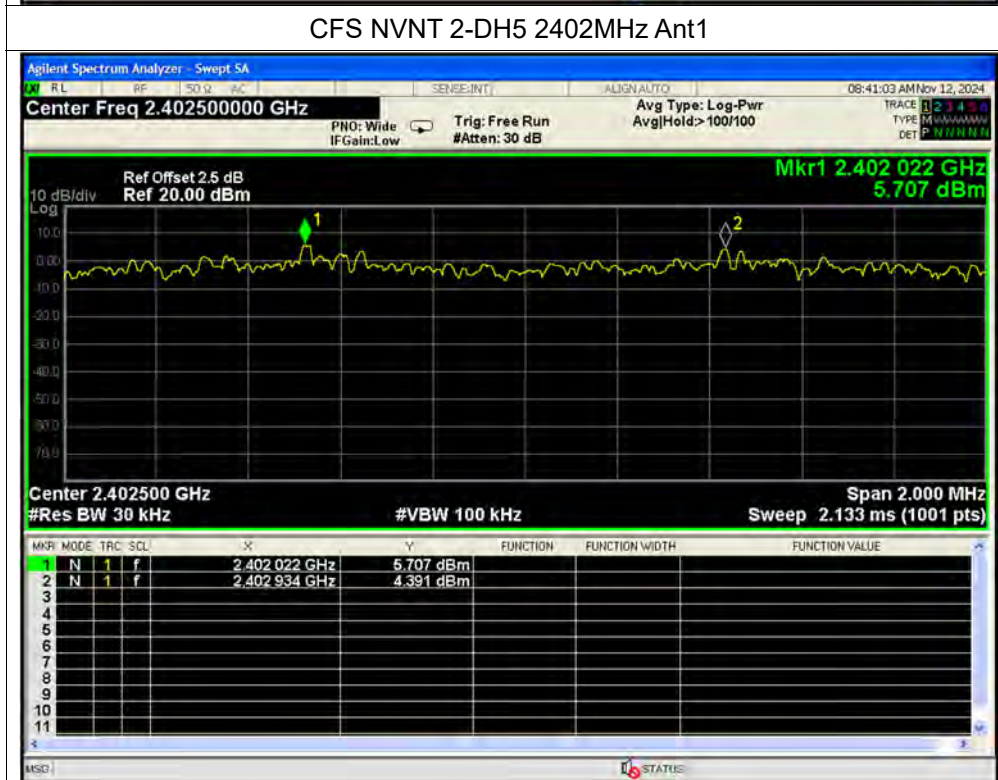




CFS NVNT 2-DH5 2441MHz Ant1

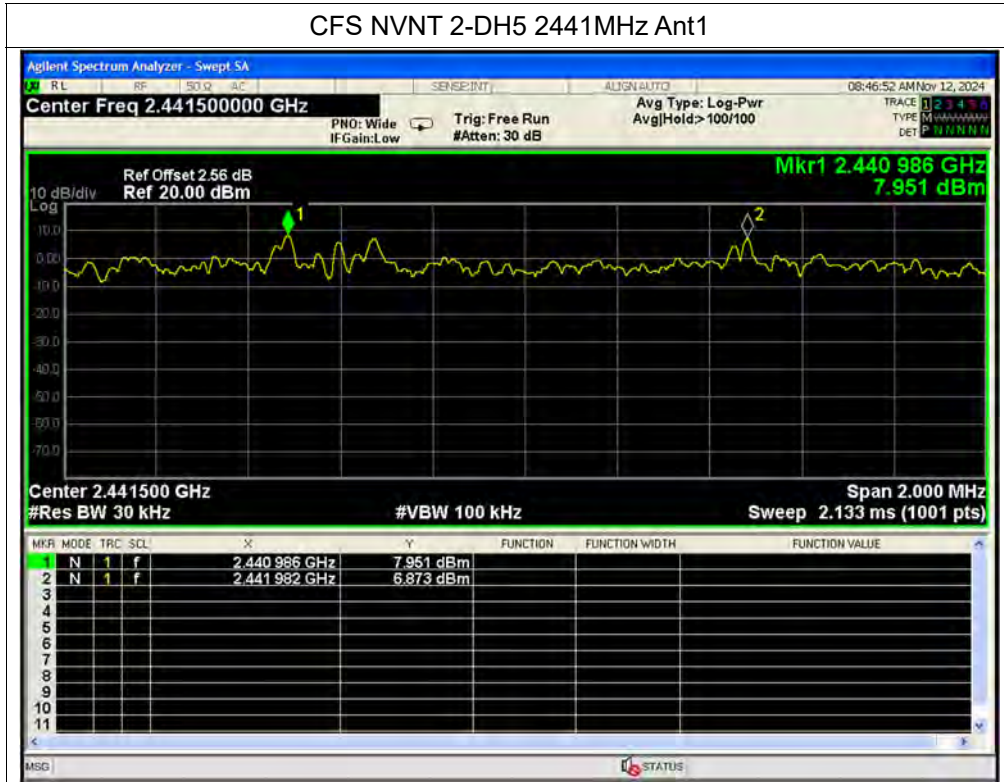


CFS NVNT 2-DH5 2480MHz Ant1

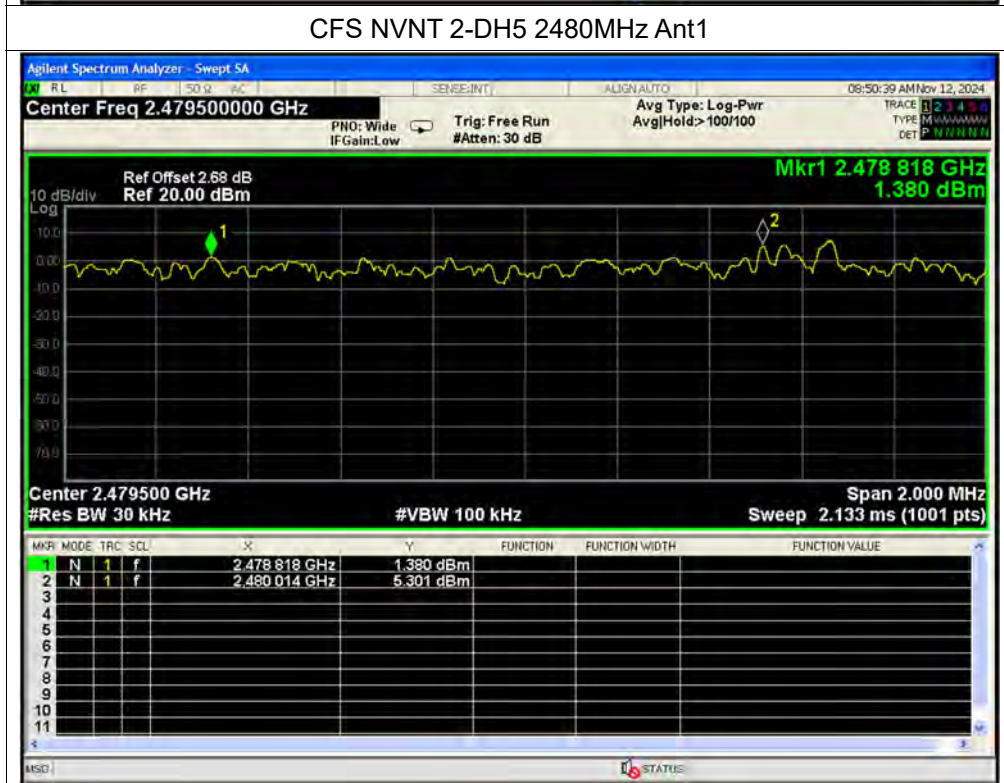





CFS NVNT 3-DH5 2402MHz Ant1

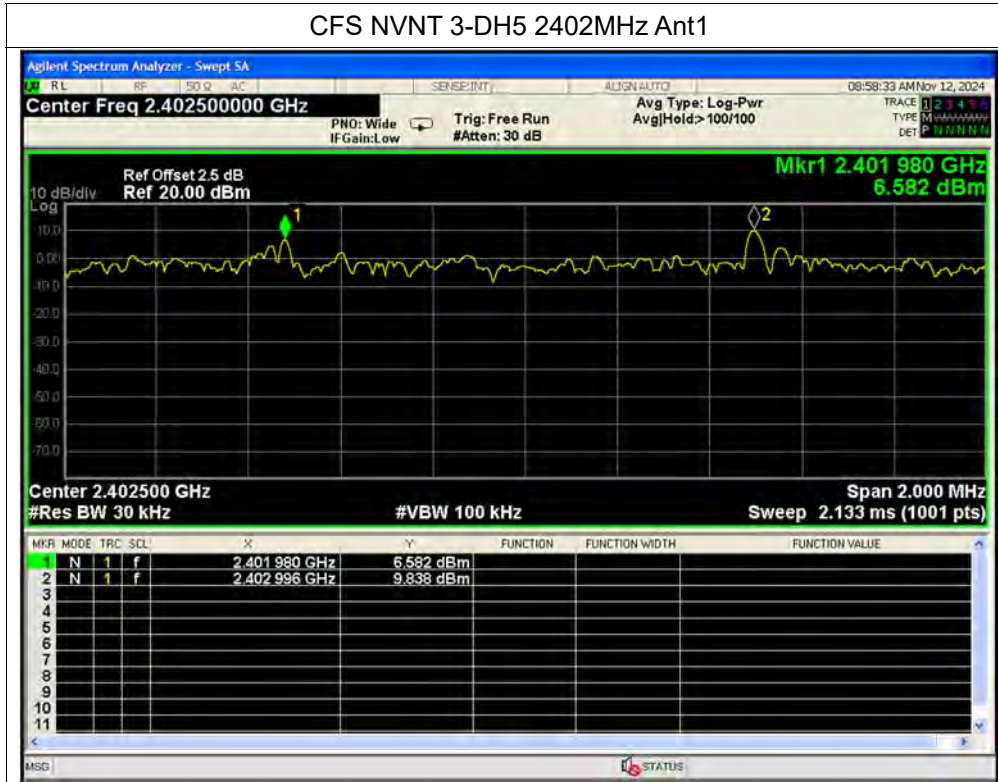

CFS NVNT 3-DH5 2441MHz Ant1

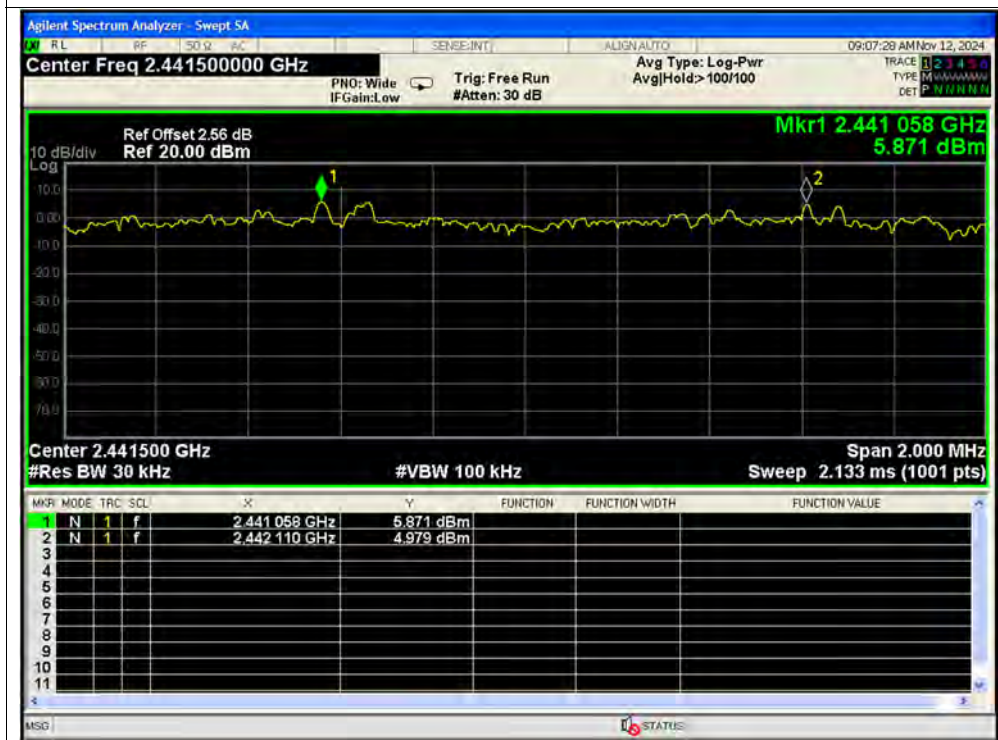


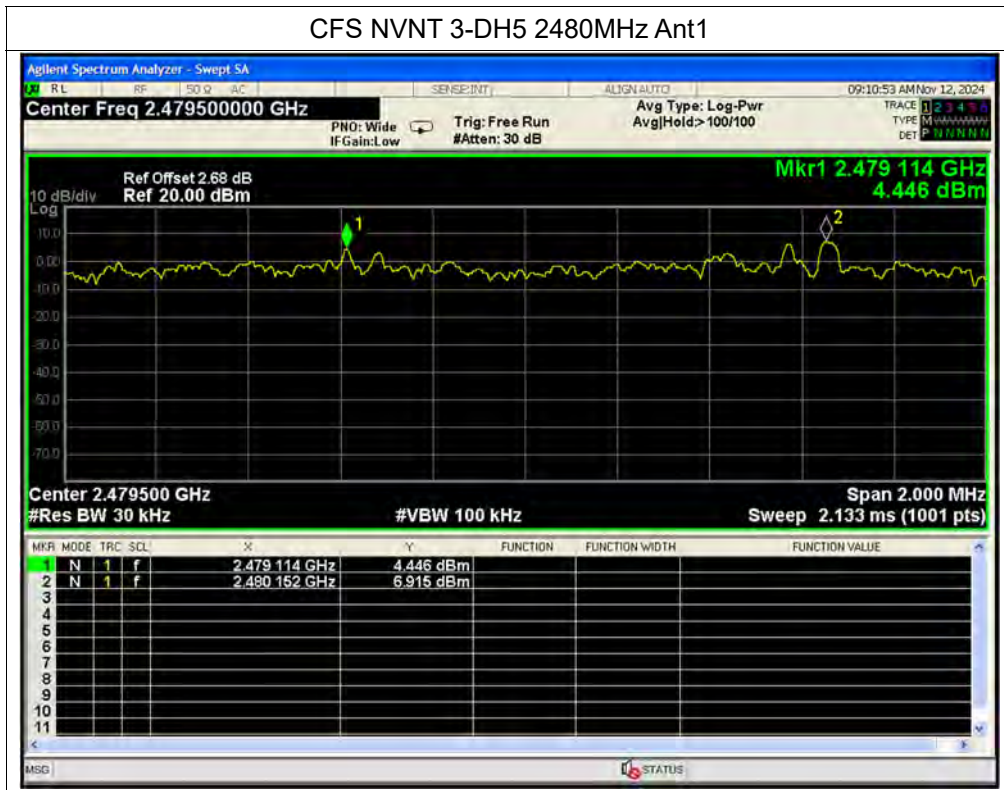


**A.7. Time of Occupancy (Dwell time)****Left**

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.881	250.647	87	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	244.97	85	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.881	224.718	78	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.887	199.203	69	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.886	216.45	75	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.887	202.09	70	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	248.282	86	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.887	242.508	84	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.887	245.395	85	31600	400	Pass


Right

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.881	276.576	96	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	256.498	89	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.881	233.361	81	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.887	228.073	79	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.887	204.977	71	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.886	225.108	78	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	239.621	83	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.888	207.936	72	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.887	225.186	78	31600	400	Pass

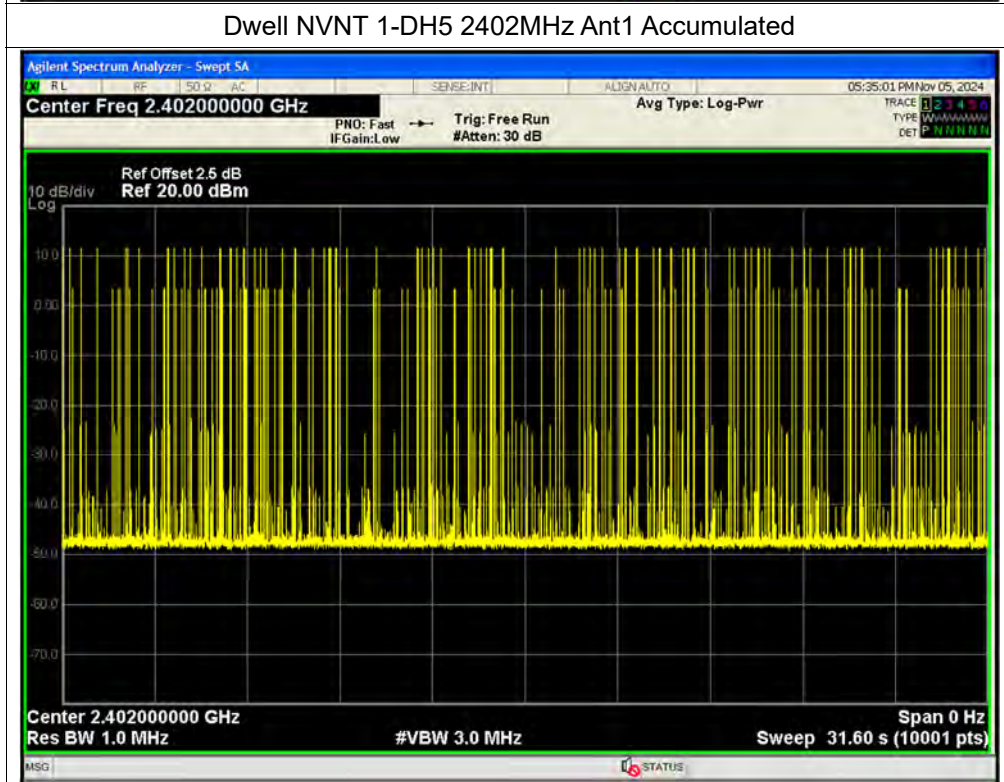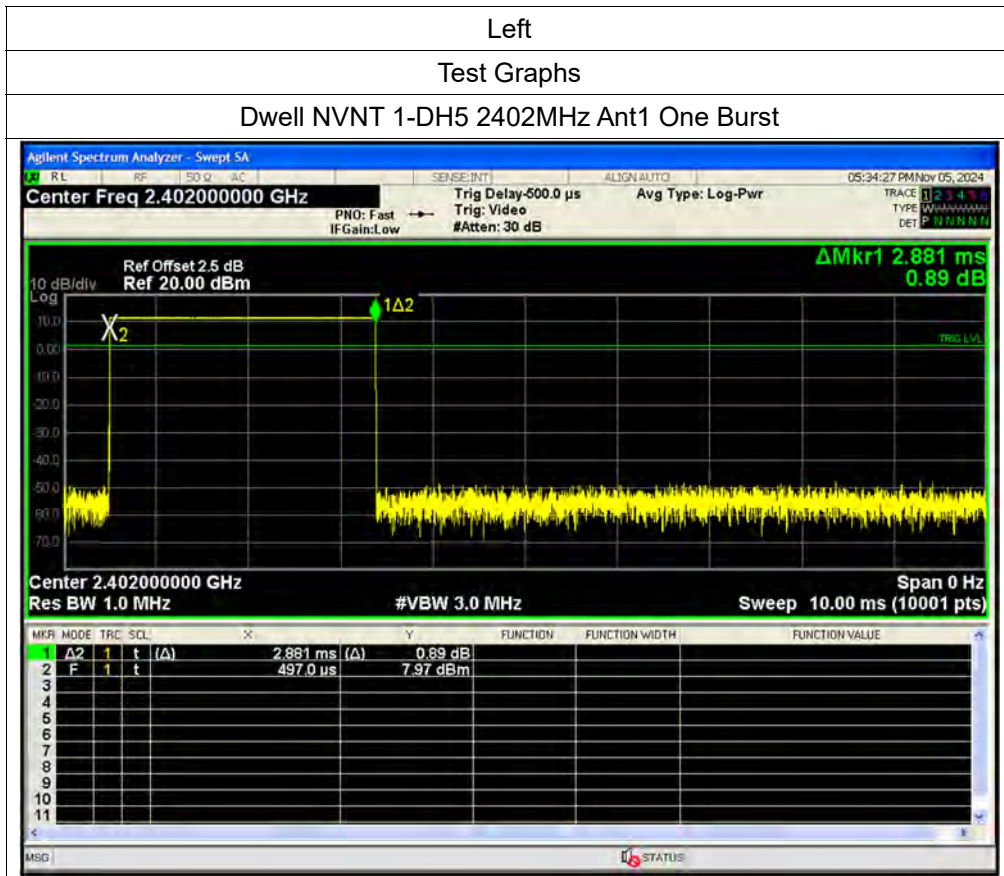



Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

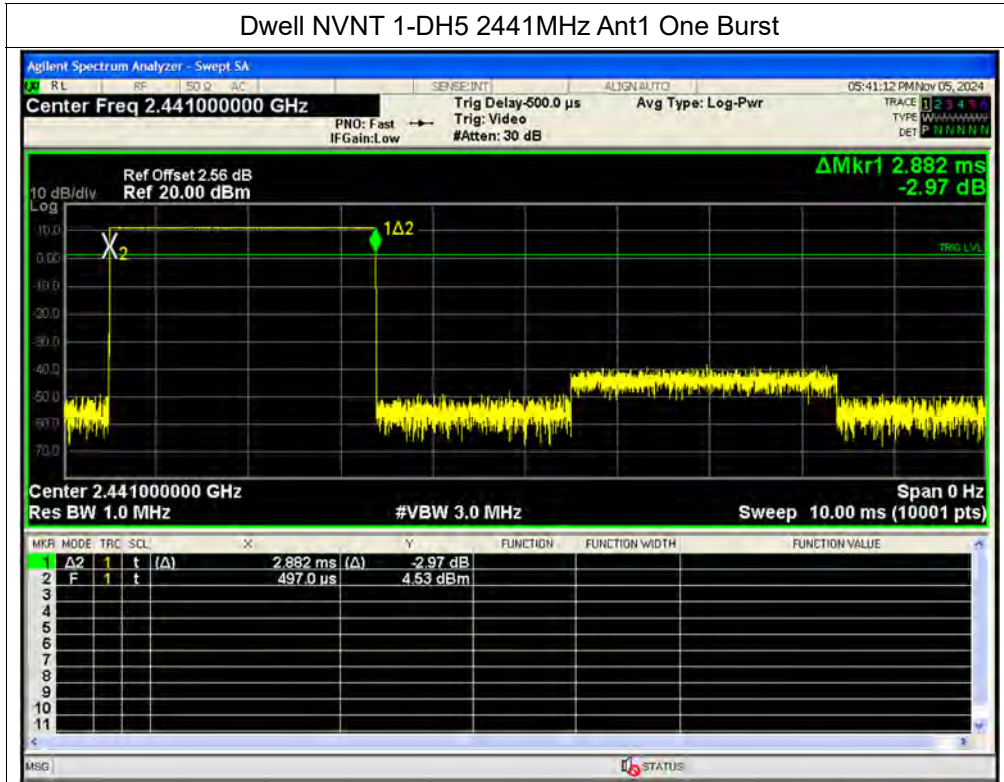


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated






Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

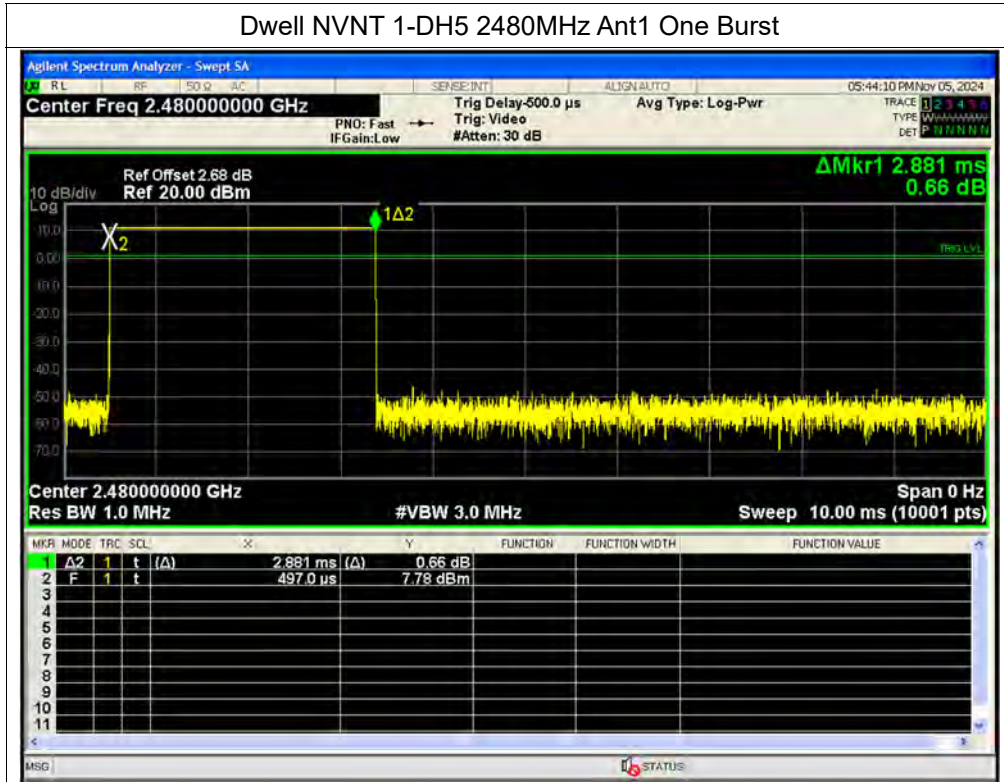


Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

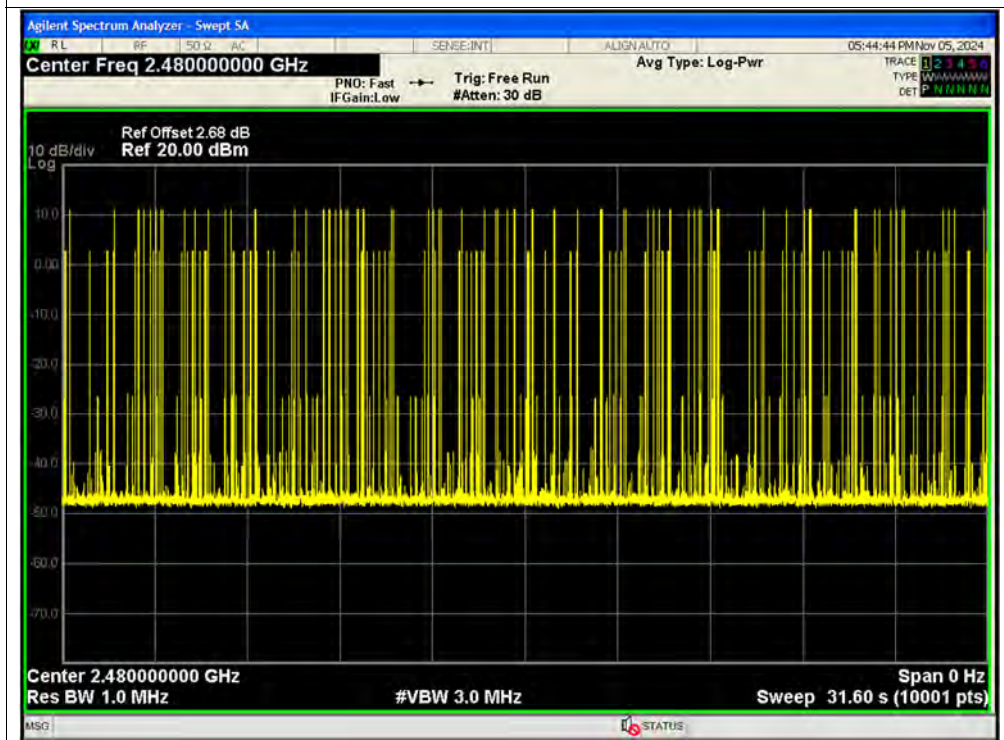




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

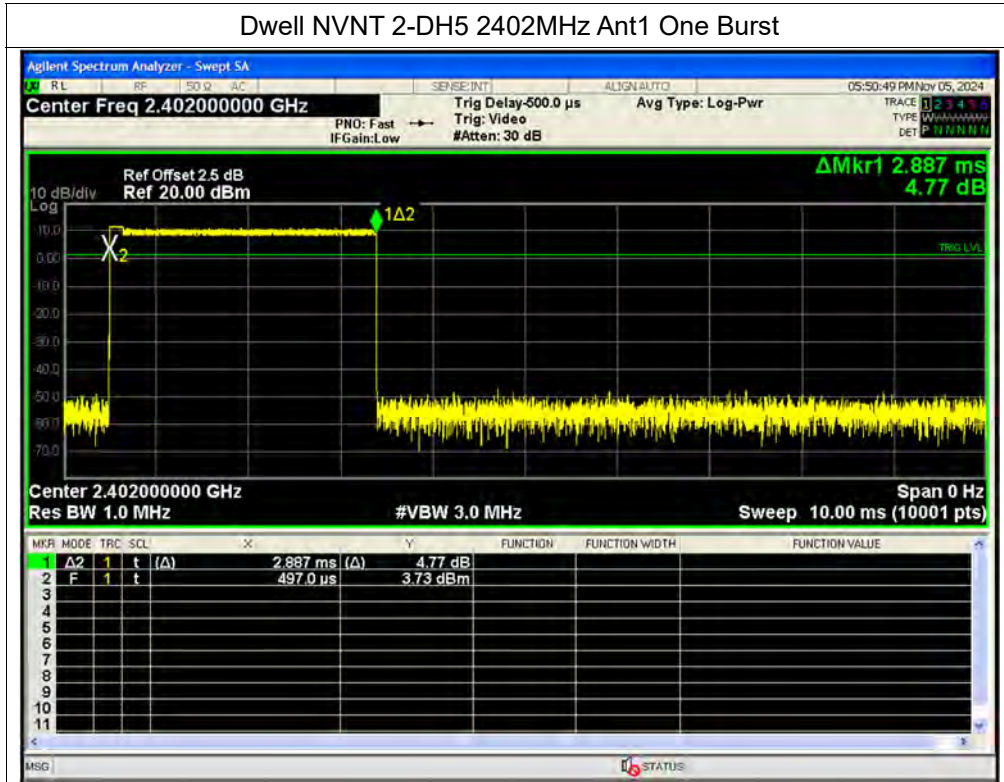


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

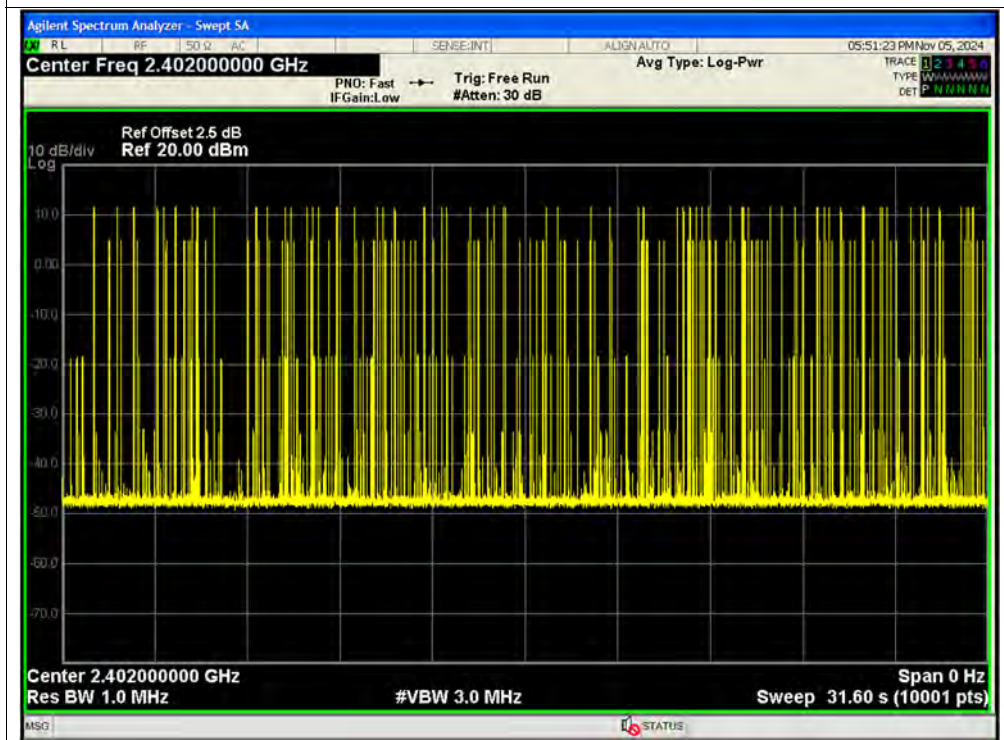



Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

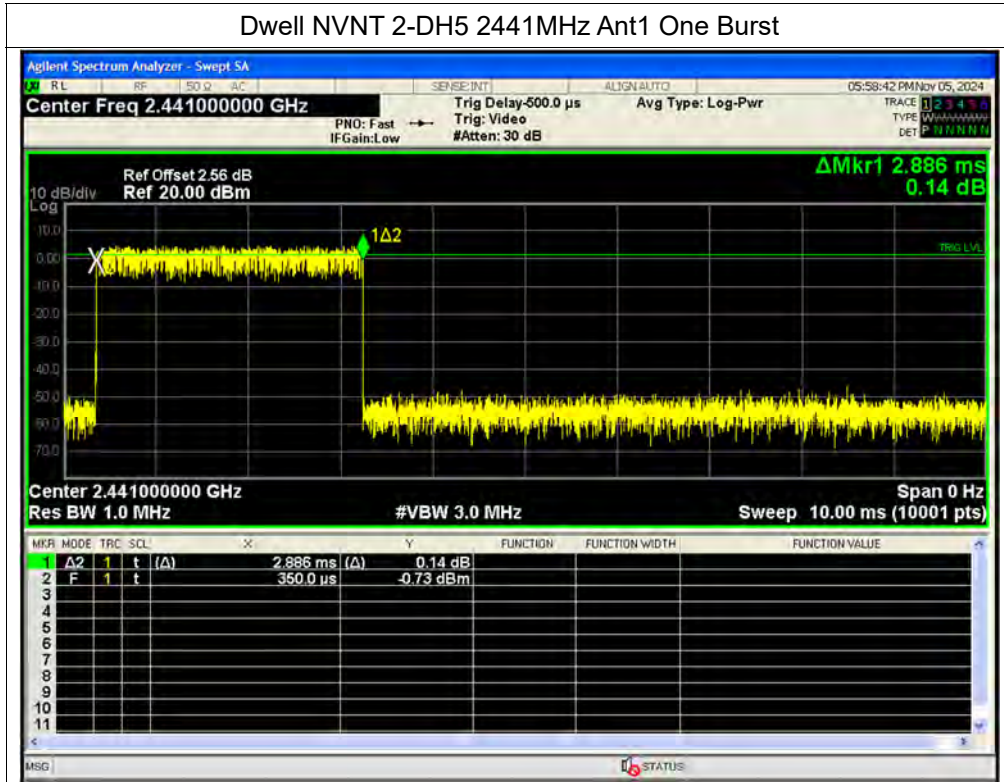

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

