



# **TEST REPORT**

APPLICANT	Realme Chongqing Mobile Telecommunications Corp., L	td.
PRODUCT NAME	: Mobile Phone	
MODEL NAME	: RMX3503	
BRAND NAME	: realme	
FCC ID	: 2AUYFRMX3503	
STANDARD(S)	: 47 CFR Part 15 Subpart C	
RECEIPT DATE	: 2021-11-26	
TEST DATE	: 2021-12-15 to 2022-01-07	
ISSUE DATE	: 2022-01-25	

Edited by:

Pong Mi Peng Mi (Rapporteur)

Approved by: Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





## DIRECTORY

1. Technical Information 3
1.1. Applicant and Manufacturer Information 3
1.2. Equipment Under Test (EUT) Description 3
1.3. The Channel Number and Frequency 6
1.4. Test Standards and Results 7
1.5. Environmental Conditions 8
2. 47 CFR Part 15C Requirements 9
2.1. Antenna Requirement ······ 9
2.2. Hopping Mechanism ······ 9
2.3. Number of Hopping Frequency10
2.4. Duty Cycle of Test Signal ······13
2.5. Maximum Peak Conducted Output Power ······14
2.6. Maximum Average Conducted Output Power ······21
2.7. 20 dB Bandwidth······23
2.8. Carried Frequency Separation
2.9. Time of Occupancy (Dwell time)
2.10. Conducted Spurious Emissions40
2.11. Conducted Emission 53
2.12. Restricted Frequency Bands 57
2.13. Radiated Emission ······67
Annex A Test Uncertainty80
Annex B Testing Laboratory Information81

Change History						
Version	Version Date Reason for change					
1.0 2022-01-25		First edition				





# **1.** Technical Information

Note: Provide by applicant.

### **1.1. Applicant and Manufacturer Information**

Applicant:	Realme Chongqing Mobile Telecommunications Corp., Ltd.		
Applicant Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,		
Applicant Address:	China		
Manufacturer:	Realme Chongqing Mobile Telecommunications Corp., Ltd.		
Manufaaturar Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,		
Manufacturer Address:	China		

### **1.2. Equipment Under Test (EUT) Description**

Product Name:	Mobile Phone			
Sample No.:	12#			
Hardware Version:	11			
Software Version:	Android 11			
Equipment Type:	Bluetooth classic			
Bluetooth Version:	5.0			
Modulation Type:	FHSS (GFSK(1Mbps), π/4-DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))			
Operating Frequency Range:	: 2402MHz–2480MHz			
Antenna Type:	PIFA Antenna			
Antenna Gain:	-1.06dBi			
	Battery 1			
	Brand Name:	realme		
	Model No.:	BLP877		
Accessory Information	Serial No.:	N/A		
Accessory Information:	Capacity:	Typical: 5000mAh, Rated: 4890mAh		
	Rated Voltage:	3.87V		
	Charge Limit:	4.45V		
	Manufacturer:	Huizhou Desay Battery Co., Ltd		





	Battery 2	
	Brand Name:	realme
	Model No.:	BLP877
	Serial No.:	N/A
	Capacity:	Typical: 5000mAh, Rated: 4890mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Dongguan NVT Technology Co., Ltd.
	Battery 3	
	Brand Name:	realme
	Model No.:	BLP877
	Serial No.:	N/A
	Capacity:	Typical: 5000mAh, Rated: 4890mAh
	Rated Voltage:	3.87V
Accessory Information	Charge Limit:	4.45V
Accessory Information:	Manufacturer:	TWS Technology (Guangzhou) Limited
	AC Adapter 1	
	Brand Name:	realme
	Model No.:	OP52JAUH
	Serial No.:	N/A
	Rated Output:	5V=2A
	Rated Input:	100-240V~50/60Hz, 0.4A
	Manufacturer:	Ten Pao Industrial Co., Ltd.
	AC Adapter 2	
	Brand Name:	realme
	Model No.:	OP52YAUH
	Serial No.:	N/A
	Rated Output:	5V=2A
	Rated Input:	100-240V~50/60Hz, 0.4A
	Manufacturer:	Jiangsu Chenyang Electron Co., Ltd.





	AC Adapter 3				
	Brand Name:	realme			
	Model No.:	OP52CAEH			
	Serial No.:	N/A			
	Rated Output:	5V=2A			
	Rated Input:	100-240V~50/60Hz, 0.4A			
	Manufacturer:	Dongguan YOHOO Electronic Technology Co., Ltd.			
	AC Adapter 4				
	Brand Name:	realme			
	Model No.:	OP52JAEH			
	Serial No.:	N/A			
	Rated Output:	5V==2A			
	Rated Input:	100-240V~50/60Hz, 0.4A			
	Manufacturer:	Ten Pao Industrial Co., Ltd.			
	AC Adapter 5				
	Brand Name:	realme			
Accessory Information:	Model No.:	OP52YAEH			
	Serial No.:	N/A			
	Rated Output:	5V=2A			
	Rated Input:	100-240V~50/60Hz, 0.4A			
	Manufacturer:	Jiangsu Chenyang Electron Co., Ltd.			
	AC Adapter 6				
	Brand Name:	realme			
	Model No.:	OP52CAED			
	Serial No.:	N/A			
	Rated Output:	5V=2A			
	Rated Input:	100-240V~50/60Hz, 0.4A			
	Manufacturer:	Dongguan YOHOO Electronic Technology Co., Ltd.			
	USB Cable				
	Model No.:	DL122			
	Earphone				
	Model No.:	MH156			
	Length:	1.2m			





Note 1: This test report is variant from the original report (Report No.: SZ21110310W02, FCC ID: 2AUYFRMX3501), based on the similarity between before, only changed the model name, no other change. The changes do not affect the results in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### **1.3. The Channel Number and Frequency**

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.





### 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title			
1	47 CFR Part 15	Radio Frequency Devices			
Test	Test detailed items/section required by FCC rules and results are as below:				

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS <sub>Note1</sub>	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS <sub>Note1</sub>	No deviation
3	15.247(a)	Number of Hopping Frequency	Dec 15, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
4	ANSI C63.10	Duty Cycle	Dec 15, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Dec 29, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Dec 29, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
7	15.247(a)	20dB Bandwidth	Dec 15, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
8	15.247(a)	Carrier Frequency Separation	Dec 15, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Dec 15, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
10	15.247(d)	Conducted Spurious Emission	Dec 15, 2021	Su Xiaoxian	PASS <sub>Note1</sub>	No deviation
11	15.207	Conducted Emission	Jan 07, 2021	Yang Lian	PASS <sub>Note1</sub>	No deviation
12	15.247(d)	Restricted Frequency Bands	Jan 04&05, 2021	Su Zhan	PASS <sub>Note1</sub>	No deviation
13	15.209, 15.247(d)	Radiated Emission	Jan 02, 2021	Su Zhan	PASS <sub>Note1</sub>	No deviation



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



**Note 1:** The test results of these test items in this report refer to the test report (Report No.: SZ21110310W02).

**Note 2:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB558074 D01 v05r02 and DA 00-075.

**Note 3:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

**Note 4:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 5:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

### **1.5. Environmental Conditions**

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106





# **2.47 CFR Part 15C Requirements**

### 2.1. Antenna Requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.

### 2.2. Hopping Mechanism

#### 2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### 2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "*Bluetooth core specification v5.1*".






### **2.3. Number of Hopping Frequency**

#### 2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

#### 2.3.2. Test Description

#### Test Setup:

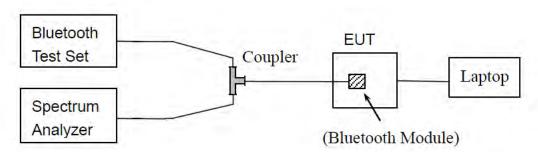

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### 2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW ≥ RBW

Sweep = auto Detector function = peak Trace = max hold

Allow the trace to stabilize





#### 2.3.4. Test Result

#### A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
π/4-DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

#### **B. Test Plot:**



(GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



Marker 1 78.824000000 MH	Z PNO: Fast Trig: Free Run IFGain:Low Atten: 30 dB	Aug Type: Log-Pwr Avg Hold>10/10	03:13:29 PM Dec 15, 2021 TRACE 2 4 TYPE MUMANNA DET P N KN N N	Peak Search		
Ref Offset 1.5 dB         ΔMkr1 78.824 0 MHz           0 dB/div         Ref 20.00 dBm         -0.492 dB						
	MMm-mmmmmmmm	an Walking and Maria	amprover 122	Next Pk Right		
-10.0				Next Pk Lef		
20.0				Marker Delta		
40 0				Mkr→CF		
£0.0				Mkr⊸RefLv		
70 0 Start 2.40000 GHz #Res BW 300 kHz	#VBW 300 kHz	Sween 1	Stop 2.48350 GHz 133 ms (1001 pts)	More 1 of 2		

(π/4-DQPSK)









### 2.4. Duty Cycle of Test Signal


#### 2.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be nonconstant.

#### 2.4.2. Test Description

#### **Test Setup:**



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

#### 2.4.3. Test Result

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*lg[1/D])
GFSK	77.33	1.12
π/4-DQPSK	76.80	1.15
8-DPSK	76.80	1.15



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




### 2.5. Maximum Peak Conducted Output Power

#### 2.5.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

#### 2.5.2. Test Description

#### Test Setup:

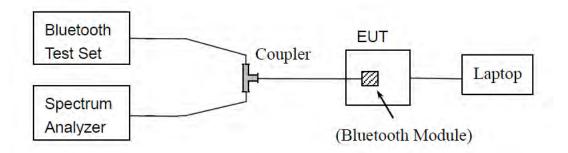

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.





#### 2.5.3. Test Result

#### **GFSK Mode**

#### A. Test Verdict:

Channel	Frequency	Measured Outp	ut Peak Power	Lir	nit	Vardiat
Channel	(MHz)	dBm	W	dBm	W	Verdict
0	2402	9.66	0.009			PASS
39	2441	10.37	0.011	20.96	0.125	PASS
78	2480	10.15	0.010			PASS

#### **B. Test Plot:**



(Channel 0, GFSK)







(Channel 39, GFSK)



(Channel 78, GFSK)

MORLAB

Tel: 86-755-36698555 Http://www.morlab.cn



#### π/4-DQPSK Mode

#### A. Test Verdict:

Channel	Frequency	Measured Outp	ut Peak Power	Lin	nit	Vardiat
Channel	(MHz)	dBm	W	dBm	W	Verdict
0	2402	10.02	0.010			PASS
39	2441	11.02	0.013	20.96	0.125	PASS
78	2480	10.49	0.011	-		PASS

#### **B. Test Plot:**

t Trig: Free Run Atten: 30 dB	ALIGNAUTO 0 Avg Type: Log-Pwr Avg Hold:>10/10	4:19:06 PM Dec 29, 2021 TRACE 2 2 3 4 5 TYPE MYNARMAN DET P NNNNN	Peak Search
	Mkr1 2.	402 045 GHz 10.019 dBm	NextPeak
<b>1</b>			Next Pk Righ
			Next Pk Lef
			Marker Delt
			Mkr→Cl
			Mkr→RefLv
VBW 5.0 MHz	Swoon 1 00	Span 5.000 MHz	Mon 1 of:
	trig: Free Run Atten: 30 dB	Avg Type: Log-Pwr Avg Hold>10/10 Mkr1 2.	Avg Type: Log-Pwr Atten: 30 dB Avg Type: Log-Pwr AvgHeld>10/10 Mkr1 2.402 045 GHz 10.019 dBm

(Channel 0, π/4-DQPSK)







#### (Channel 39, π/4-DQPSK)



#### (Channel 78, π/4-DQPSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555



#### 8-DPSK Mode

#### A. Test Verdict:

Channel	Frequency	Measured Outp	ut Peak Power	Lin	nit	Verdict
Channel	(MHz)	dBm	W	dBm	W	veruici
0	2402	10.12	0.010			PASS
39	2441	11.27	0.013	20.96	0.125	PASS
78	2480	10.58	0.011			PASS

#### **B. Test Plot:**

FGain:Low Atter	n: 30 dB	M	r1 2.401 990 GH 10.119 dBr	Next Peak
	<b>1</b>			Next Pk Right
				Next Pk Let
				Marker Delt
				Mkr→C
				Mkr→RefL
#VBW 5.0 M	ЛНZ	Sweet	Span 5.000 MH	More 1 of:
	#VBW 5.0 N	#VBW 5.0 MHz		Span 5.000 MH #VBW 5.0 MHz Sweep 1.000 ms (1001 pts

(Channel 0, 8-DPSK)







#### (Channel 39, 8-DPSK)



#### (Channel 78, 8-DPSK)

**MORLAB** 

Tel: 86-755-36698555 Http://www.morlab.cn



### 2.6. Maximum Average Conducted Output Power


#### 2.6.1. Requirement

According to FCC §15.247(b), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum average output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

#### 2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

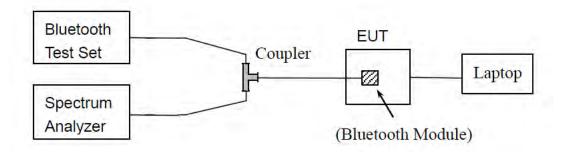

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.





#### 2.6.3. Test Result

#### **GFSK Mode**

	Fraguanay	Measured		Average Pov	wer	Limit		
Channel	Frequency (MHz)	Measureu	Duty	Duty Factor	<sup>-</sup> Calculated			Verdict
	(10112)	dBm	Factor	dBm	W	dBm	W	
0	2402	8.36		9.48	0.009			PASS
39	2441	8.82	1.12	9.94	0.010	20.96	0.125	PASS
78	2480	8.69		9.81	0.010			PASS

#### π/4-DQPSK Mode

	Frequency	Measured		Average Pov	wer	Limit		
Channel	Frequency (MHz)	Measureu	Duty	Duty Factor	r Calculated			Verdict
	(IVITZ)	dBm	Factor	dBm	W	dBm	W	
0	2402	6.56		7.71	0.006			PASS
39	2441	7.18	1.15	8.33	0.007	20.96	0.125	PASS
78	2480	6.92		8.07	0.006			PASS

#### 8-DPSK Mode

	Frequency	Measured		Average Pov	wer	Limit		
Channel	Frequency (MHz)	Measureu	Duty	Duty Factor	<sup>r</sup> Calculated			Verdict
	(IVITZ)	dBm	Factor	dBm	W	dBm	W	
0	2402	6.53		7.68	0.006			PASS
39	2441	7.20	1.15	8.35	0.007	20.96	0.125	PASS
78	2480	6.98		8.13	0.007			PASS






### 2.7. 20 dB Bandwidth

#### 2.7.1. Definition

According to FCC  $\frac{15.247(a)(1)}{b}$ , the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ( $10*\log 1\% = 20$  dB) taking the total RF output power.

#### 2.7.2. Test Description

#### Test Setup:

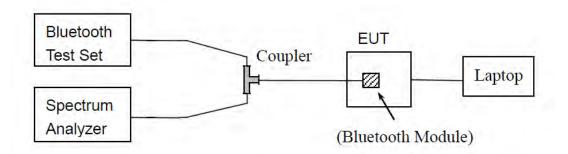

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### 2.7.3. Test Procedure

Use the following spectrum analyzer settings: Span = between 2 to 5 times the OBW, centered on the test channel RBW= 1% to 5% of the OBW  $VBW \ge 3 \times RBW$ Sweep = auto Detector function = peak Trace = max hold





#### 2.7.4. Test Result

#### **GFSK Mode**

#### A. Test Verdict:

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	Result
0	2402	1.006	PASS
39	2441	0.936	PASS
78	2480	0.974	PASS

#### **B. Test Plot:**



(Channel 0, GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn

Http://www.morlab.cn

Fax: 86-755-36698525







(Channel 39, GFSK)



(Channel 78, GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fr Http://www.morlab.cn E



#### π/4-DQPSK Mode

#### A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.282	PASS
39	2441	1.284	PASS
78	2480	1.307	PASS

#### **B. Test Plot:**

enter Freq 2.40200000	GHz Cente	SENSELINT r Freq: 2.402000000 GHz free Run Avg Hole	Rad	09:02 PMDec 15, 2021 lio Std: None	Me	as Setup
		: 30 dB		io Device: BTS	Avg	Hold Nun
dB/div Ref 20.00 dBr	n				<u>On</u>	1
og 0.0						AvgMod
.00	mon	Marham			Exp	Repe
0.0	~					
0.0	1		1.			
amman AMM			Manuf	a may marine		
0.0					_	
00					0	BWPowe
0.0						99.00 %
enter 2.402 GHz			-	Span 3 MHz		
Res BW 30 kHz	#	VBW 100 kHz	Sw	eep 4.133 ms		
Occupied Bandwidt	h	Total Power	14.8 dB	m		
1.	1855 MHz					x di
Transmit Freg Error	1.425 kHz	.425 kHz OBW Power		99.00 %		-20.00 di
x dB Bandwidth	1.282 MHz	x dB	-20.00 d	IB	<u> </u>	
						Mor
						1 of

(Channel 0, π/4-DQPSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





(Channel 39, π/4-DQPSK)

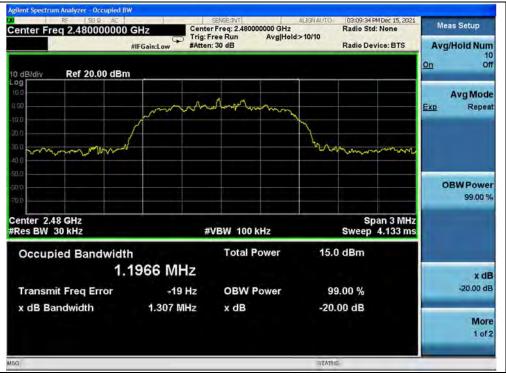

#### (Channel 78, π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn



#### 8-DPSK Mode

#### A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.253	PASS
39	2441	1.260	PASS
78	2480	1.243	PASS

#### **B. Test Plot:**



(Channel 0, 8-DPSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





(Channel 39, 8-DPSK)

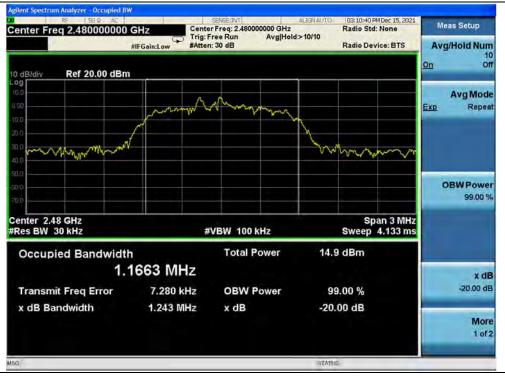

#### (Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn




### 2.8. Carried Frequency Separation

#### 2.8.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

#### 2.8.2. Test Description

#### Test Setup:

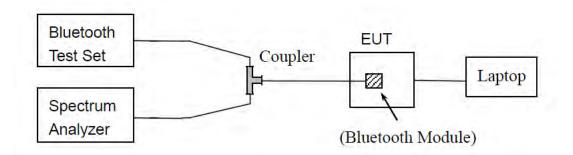

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### 2.8.3. Test Procedure

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span

Video (or Average) Bandwidth (VBW) ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.





#### 2.8.4. Test Result

#### A. Test Verdict:

	Measured	Carried Frequency	20 dB		
Test Mode	Channel	Separation	Bandwidth	Min. Limit	Verdict
	Numbers	(MHz)	(MHz)		
GFSK	39 and 40	1.104	1.006	two-thirds of the - 20dBbandwidth -	PASS
π/4-DQPSK	39 and 40	1.083	1.307		PASS
8-DPSK	39 and 40	1.002	1.260		PASS

#### **B. Test Plot:**



(GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525






(π/4-DQPSK)







Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn






### 2.9. Time of Occupancy (Dwell time)

#### 2.9.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 2.9.2. Test Description

#### Test Setup:

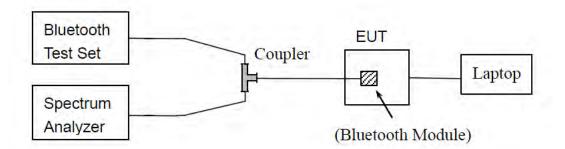

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### 2.9.3. Test Procedure

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) \*(1600 / 2 /79)\*31.6 Millisecond DH3: Dwell time equal to Pulse time (ms) \* (1600 /4 /79) \*31.6 Millisecond DH5: Dwell time equal to Pulse Time (ms)\* (1600 / 6 /79) \*31.6 Millisecond

#### AFH Mode:

DH1: Dwell time equal to Pulse time (ms) (800 / 2 / 20)(0.4 + 20) Millisecond DH3: Dwell time equal to Pulse time (ms) (800 / 4 / 20)(0.4 + 20) Millisecond DH5: Dwell time equal to Pulse Time (ms) (800 / 6 / 20)(0.4 + 20) Millisecond.





#### 2.9.4. Test Result

#### GFSK Mode

#### A. Test Verdict:

DH	Pulse Width	dth Dwell Time (ms)		Limit (sec)	Verdict
Packet	(ms)	Normal Mode	AFH Mode		Voraiot
DH1	0.40	128.00	64.00		PASS
DH3	1.66	265.60	132.80	0.4	PASS
DH5	2.88	307.20	153.60		PASS

#### B. Test Plot:



(DH1, GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn





(DH3, GFSK)



(DH5, GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn




#### π/4-DQPSK Mode

#### A. Test Verdict:

DH Pulse Width Packet (ms)	Dwell Time (ms)		Limit (sec)	Verdict	
	Normal Mode	AFH Mode	Linit (Sec)	veruici	
DH1	0.39	124.80	62.40		PASS
DH3	1.64	262.40	131.20	0.4	PASS
DH5	2.88	307.20	153.60		PASS


#### **B. Test Plot:**

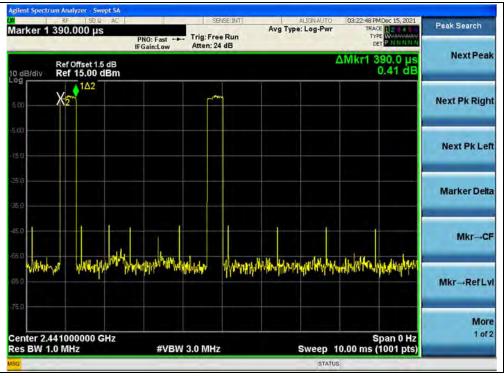


(DH1, π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





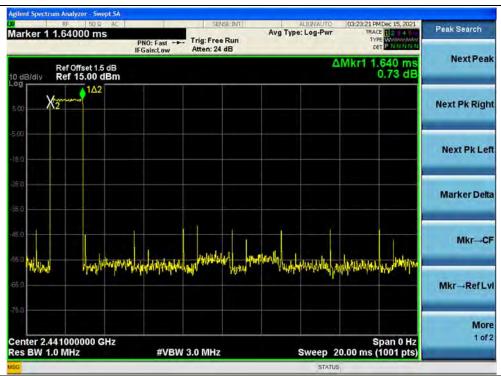

## (DH3, π/4-DQPSK)



## (DH5, π/4-DQPSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



## 8-DPSK mode

#### A. Test Verdict:

DH	Pulse Width	Dwell T	ïme (ms)	Limit (sec)	Verdict
Packet	(ms)	Normal Mode	AFH Mode	Linit (Sec)	verdici
DH1	0.39	124.80	62.40		PASS
DH3	1.64	262.40	131.20	0.4	PASS
DH5	2.88	307.20	153.60		PASS

#### **B. Test Plot:**



(DH1, 8-DPSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn






(DH3, 8-DPSK)







Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






## 2.10. Conducted Spurious Emissions

## 2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

## 2.10.2. Test Description

## Test Setup:

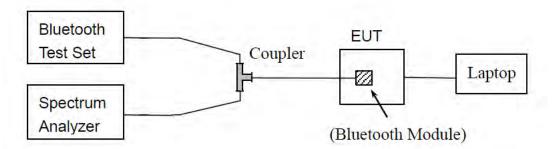

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

## 2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz VBW  $\geq$  RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize.





## 2.10.4. Test Result

#### **GFSK Mode**

#### A. Test Verdict:

	Fraguanay	Measured Max. Out of Band	Limit (	(dBm)	
Channel	Frequency (MHz)	Emission (dBm)	Carrier Level	Calculated	Verdict
	(IVI⊓∠)			-20dBc Limit	
0	2402	-41.41	7.62	-12.38	PASS
39	2441	-40.63	7.86	-12.14	PASS
78	2480	-40.82	8.74	-11.26	PASS

#### **B. Test Plot:**



(30MHz to 25GHz, Channel 0, GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



er 2 2.399490000000	GHz PNO: Wide Trig: Free Run IFGain:Low Atten: 30 dB	Avg Type: Log-Pwr Avg Hold>10/10	03:33:17 PM Dec 15, 2021 TRACE 2 4 TYPE MUMAAAAAA DET PINIKIN N M	Marker
Ref Offset 1.5 dB div Ref 20.00 dBm	I GUILLEON	Mkr	2 2.399 49 GHz -53.460 dBm	Select Marker
		2		Norma
		N m		Delta
๛ฅ๛๛๚๛๛๛๚๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛	man and and and and and and and and and a	rí	mmmm	Fixed
er 2.400000 GHz BW 100 kHz	#VBW 300 kHz	the second se	Span 10.00 MHz 000 ms (1001 pts)	of
DE TRC SCL X 1 1 7 2.40 1 1 7 2.39	01 87 GHz 8.182 dBm 19 49 GHz 53.460 dBm	FUNCTION FUNCTION WIDTH	FUNCTION VALUE	Properties
				More 1 of 2


(Band edge, Channel 0, GFSK)




(Band edge with hopping on, Channel 0, GFSK)





Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525 E-mail: service@morlab.cn





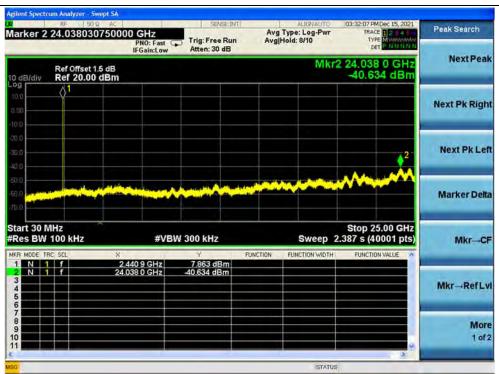




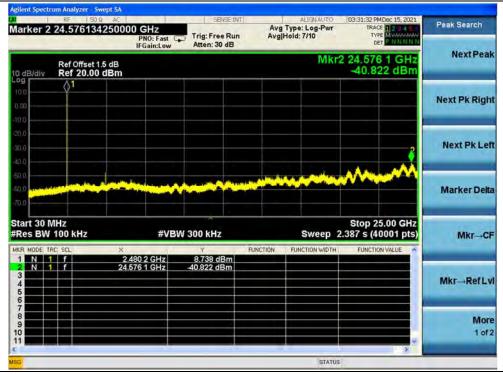

(30MHz to 25GHz, Channel 78, GFSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





Marker	133:44 PMDec 15, 2021 TRACE 2 3 4 0 TVPE MULLION	Type: Log-Pwr Hold>10/10		SENSE INT		AC 00000 GH			er
Select Marker	DET PINNINN	1010.210/10	Avgi	Atten: 30 dB	O: Wide 😱 ain:Low	PN IFG			
2	.484 10 GHz 52.873 dBm	Mkr2					ef Offset ef 20.0		Jdiv
Norma							2ª		
Delt			2			Jours		A	1
Fixed	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	m		minin	mm	K			ľ.
01	pan 10.00 MHz ) ms (1001 pts)	Sweep 1.0		00 kHz	#VBW		500 GH 0 kHz	2.483 W 10	er B
	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION			× 2.479 84		TRC S	
Properties				52.873 dBm		2.479 84 2.484 10		1	

(Band edge, Channel 78, GFSK)

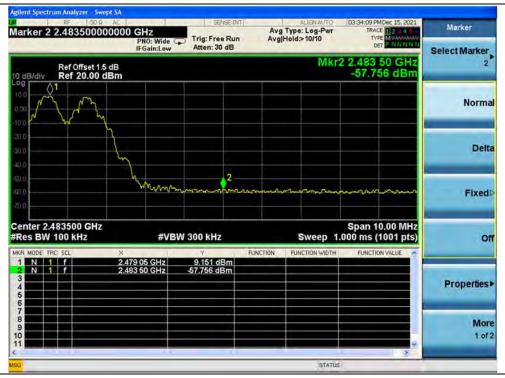

(Band edge with hopping on, Channel 78, GFSK)





## π/4-DQPSK Mode

#### A. Test Verdict:


Channel	Frequency	Measured Max. Out of Band	Limit	(dBm)	
	Frequency (MHz)		Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
0	2402	-40.83	5.79	-14.21	PASS
39	2441	-39.64	6.03	-13.97	PASS
78	2480	-41.11	5.05	-14.95	PASS

## **B. Test Plot:**



(30MHz to 25GHz, Channel 0, π/4-DQPSK)










(Band edge, Channel 0,  $\pi/4$ -DQPSK)




(Band edge with hopping on, Channel 0,  $\pi/4$ -DQPSK)

**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





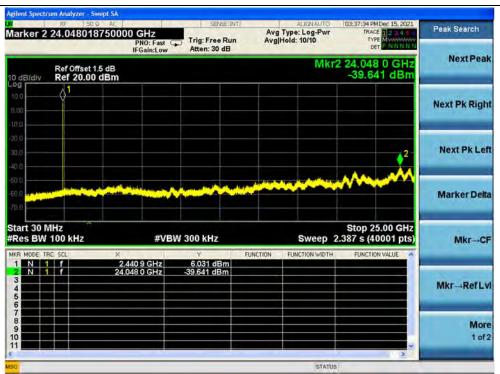


(30MHz to 25GHz, Channel 39, π/4-DQPSK)



(30MHz to 25GHz, Channel 78, π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







(Band edge, Channel 78, π/4-DQPSK)



(Band edge with hopping on, Channel 78,  $\pi$ /4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




## 8-DPSK Mode

#### A. Test Verdict:

Channel	Fraguanay	Measured Max. Out of Band	Limi	t (dBm)	
	Frequency (MHz)		Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
0	2402	-41.12	4.32	-15.68	PASS
39	2441	-40.83	3.72	-16.28	PASS
78	2480	-41.13	5.55	-14.45	PASS

## **B. Test Plot:**

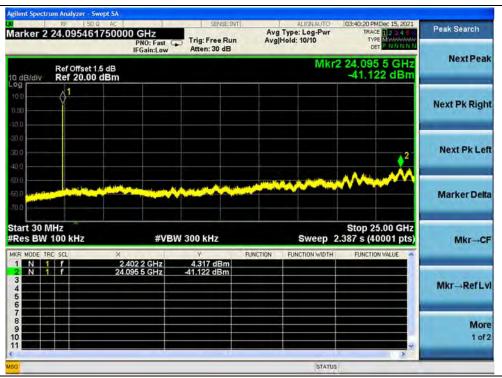

(30MHz to 25GHz, Channel 0, 8-DPSK)







## (Band edge, Channel 0, 8-DPSK)



#### (Band edge with hopping on, Channel 0, 8-DPSK)













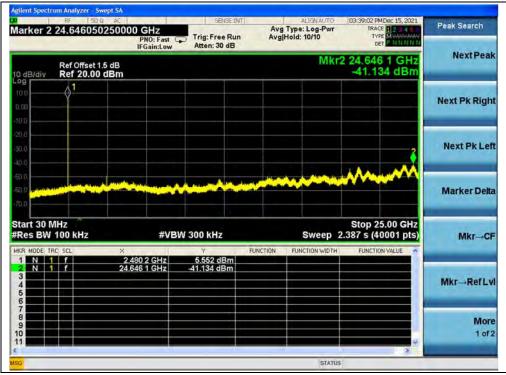

(30MHz to 25GHz, Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





Marker	03:41:01 PMDec 15, 2021 TRACE 2 2 3 4 0 TYPE MUNICIPAL	vg Type: Log-Pwr vg Hold>10/10	sense int	AC 0000 GHz PNO: Wide C	r 2 2.483500
Select Marker	DET P NIMANI	31.	tten: 30 dB	IFGain:Low	
2	2.483 50 GHz -53.013 dBm	Mkr2			Ref Offset
Norm					h
Delt				hong	m
Fixed	suu anna anna anna anna anna anna anna a	www.	2	h	
0	Span 10.00 MHz 000 ms (1001 pts)	Sweep 1.0	0 kHz	#VBW	r 2.483500 GI 3W 100 kHz
	FUNCTION VALUE	FUNCTION WIDTH	Y FUNG	× 2.480 04 GHz	DE TRC SCL
Properties			.013 dBm	2.483 50 GHz	ii

(Band edge, Channel 78, 8-DPSK)



(Band edge with hopping on, Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



# 2.11. Conducted Emission

## 2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency Penge (MHz)	Conducted	Limit (dBµV)
Frequency Range (MHz)	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50


Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

## 2.11.2. Test Description

#### **Test Setup:**

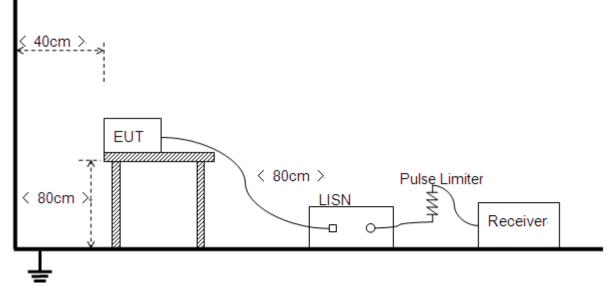

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



## 2.11.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hzwere considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

## A. Test Setup:


Test Mode: <u>EUT+Adapter+ Earphone + BT TX</u> Test Voltage: AC 120V/60Hz The measurement results are obtained as below: E  $[dB\mu V] = U_R + L_{Cable loss} [dB] + A_{Factor}$ U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN







#### B. Test Plot:

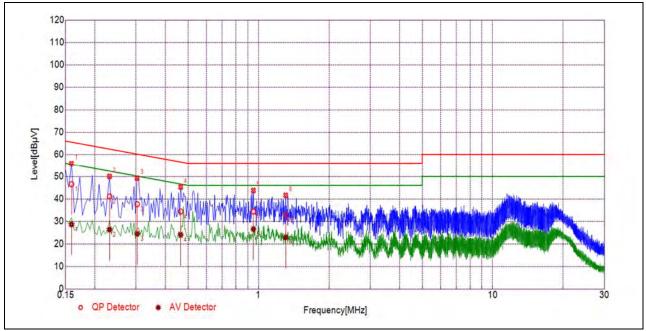


(L Phase)

No.	Fre.	Emission L	.evel (dBµV)	Limit (	dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1590	46.54	28.63	65.52	55.52		PASS
2	0.2311	41.07	26.26	62.41	52.41		PASS
3	0.3033	37.62	24.40	60.15	50.15	Line	PASS
4	0.4653	34.38	23.96	56.60	46.60	Line	PASS
5	0.9511	34.39	26.52	56.00	46.00		PASS
6	1.3058	32.86	22.86	56.00	46.00		PASS





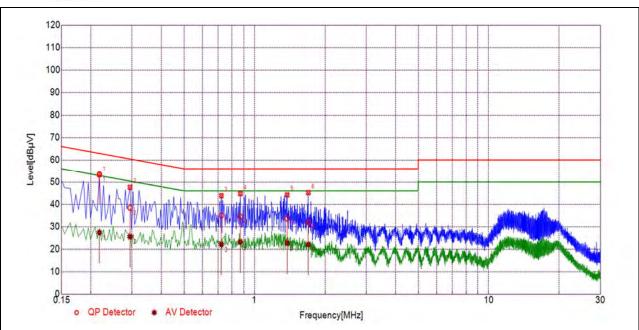

(N Phase)
-----------

No.	No. Fre. (MHz)	Emission Level (dBµV)		Limit (	dBµV)	Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2175	53.45	27.31	62.91	52.91		PASS
2	0.2941	38.41	25.52	60.41	50.41		PASS
3	0.7217	34.99	22.08	56.00	46.00	Neutral	PASS
4	0.8693	34.48	23.15	56.00	46.00	Neutral	PASS
5	1.3779	33.67	22.60	56.00	46.00		PASS
6	1.6972	31.92	22.03	56.00	46.00		PASS








## 2.12. Restricted Frequency Bands

## 2.12.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

## 2.12.2. Test Description

#### **Test Setup:**

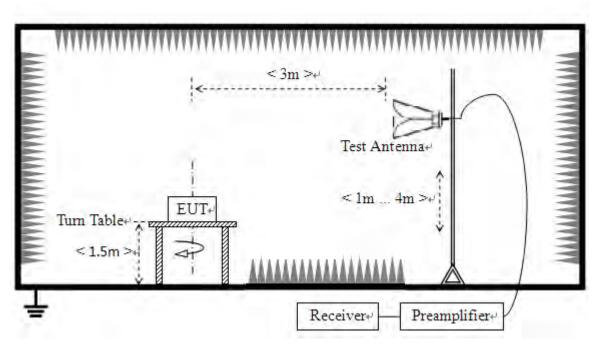

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

## For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





## 2.12.3. Test Procedure

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for  $f \ge 1$ GHz, 100 kHz for f < 1GHz VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold Allow the trace to stabilize

## 2.12.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; AT = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

AT: Total correction Factor except Antenna

**UR: Receiver Reading** 

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

## GFSK Mode

## A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U <sub>R</sub>	A⊤ (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E	Limit (dBµV/m)	Verdict
		PK/ AV	(dBµV)			(dBµV/m)		
0	2370.93	PK	23.04	6.74	27.20	56.98	74	PASS
0	2390.00	AV	10.47	6.74	27.20	44.41	54	PASS
78	2487.70	PK	23.54	6.74	27.20	57.48	74	PASS
78	2483.50	AV	10.23	6.74	27.20	44.17	54	PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



## **B. Test Plot:**

eysight Spectrum Analyzer - Swept SA		SENSE:INT	ALIGN AUTO	11:24:37 PM Jan 04, 2022	- 6 -
ker 2 2.3709280000		Trig: Free Run #Atten: 6 dB	Avg Type: Voltage Avg Hold:>100/100	TRACE 1 3 4 5 6 TYPE M WWWWWW DET P P N N N N	Marker
B/div Ref 82.99 dBu		#Atten: 0 db	Mkr2	2.370 928 GHz 23.036 dBµV	Select Marker 2
					Norma
		united the Challenger of Mary and Mary	2	Q <sup>1</sup>	Delt
					Fixed
rt 2.30000 GHz es BW (CISPR) 1 MHz		3.0 MHz		Stop 2.40400 GHz .000 ms (1001 pts)	o
N 1 f 2.	× 390 000 GHz 370 928 GHz	22.062 dBµV 23.036 dBµV	NCTION FUNCTION WIDTH	FUNCTION VALUE	Properties
					Mor 1 of
		III.	STATU		

(PEAK, Channel 0, GFSK)



(AVERAGE, Channel 0, GFSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 E-mail: service@morlab.cn



Marker	12:11:49 AMJan 05, 2022	ALIGN AUTO		SENSE:IN			RESEL 50	
Select Marker	TRACE 1 2 3 4 5 6 TYPE MWWWWWWW DET PPNNNN	Type: Voltage Hold:>100/100		Trig: Free Run #Atten: 6 dB	PNO: Fast G	000000	4877020 REAMP	
2	2.487 702 GHz 23.537 dBµV	Mkr2				dBµV	tef 82.99	3/div
Norma								1
Dell	mandar dama	and a constant	ية مرد المرد الم	2 miloreturio	Merrerante	^1		
Fixed								
o	Stop 2.50000 GHz .000 ms (1001 pts)	Sweep 1.		3.0 MHz	#VBV		ISPR) 1	
Properties	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	21.376 dBµV 23.537 dBµV	500 GHz 702 GHz	× 2.483 5 2,487 7		N 1 N 1
Moi 1 of								
				10				

(PEAK, Channel 78, GFSK)

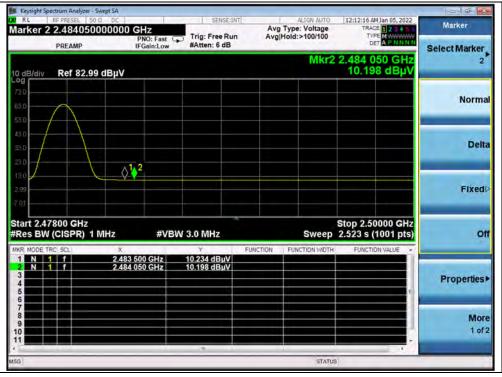

(AVERAGE, Channel 78, GFSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525 E-mail: service@morlab.cn



## π/4-DQPSK Mode

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	, en aner
0	2378.42	PK	22.46	6.74	27.20	56.40	74	PASS
0	2384.14	AV	9.90	6.74	27.20	43.84	54	PASS
78	2486.43	PK	23.17	6.74	27.20	57.11	74	PASS
78	2483.50	AV	10.56	6.74	27.20	44.50	54	PASS

#### **B. Test Plot:**

	RF PRESEL 50 2.378416 PREAMP	000000	GHZ PNO: Fast IFGain:Low				ALIGN AUTO e: Voltage :>100/100	TRAC	Jan 04, 2022	Marker Select Marker
0 dB/div	Ref 82.9	9 dBµV					Mkr2	2.378 4	16 GHz 9 dBµV	2
73 D 53 D									$\land$	Norma
13 D	agnathe provincibule					a tutto cundo	2-			Dell
13.0 2.99 1.01										Fixed
Res BW	0000 GHz (CISPR) 1		#VB	W 3.0 MHz*			Sweep 1	Stop 2.40 .000 ms (1	001 pts)	o
3 4 5			000 GHz 416 GHz	20.001 dBµ 22.459 dBµ	V	VCTION FUI	NCTION WIDTH	FUNCTIO	N VALUE	Properties
6 7 8 9 0										Moi 1 of
G	1		_		-		STATUS			


(PEAK, Channel 0,π/4-DQPSK)





	PRESEL 50 0 DC		SENSE:IN	π	ALIGN AUTO	11:49:52 PM.	lan 04, 2022	- 6 <b>-</b> ×
	.384136000000	GHz		#Av	g Type: Voltage Hold:>100/100	TRACE	123450	Marker
Р	REAMP	PNO: Fast IFGain:Low	#Atten: 6 dB		11010.5 100/100	DET	APNNNN	Select Marker
dB/div	Ref 82.99 dBµV				Mkr2	2.384 13 9.897	6 GHz dBµV	2
9 10 10							A	Norma
р								
.p						_21		Deli
0 0 1						<b>∨</b>		Fixed
art 2.3000	00 GHz CISPR) 1 MHz	#VBW	3.0 MHz		Sweep	Stop 2.404 15.40 s (1	400 GHz 001 pts)	o
R MODE TRC		0 000 GHz	Y 9.848 dBµV	FUNCTION	FUNCTION WIDTH	FUNCTION	VALUE .	
Ň Î	f 2.38	4 136 GHz	9.897 dBµV					Properties
								Moi 1 of
			in .		STATU			-

(AVERAGE, Channel 0, π/4-DQPSK)

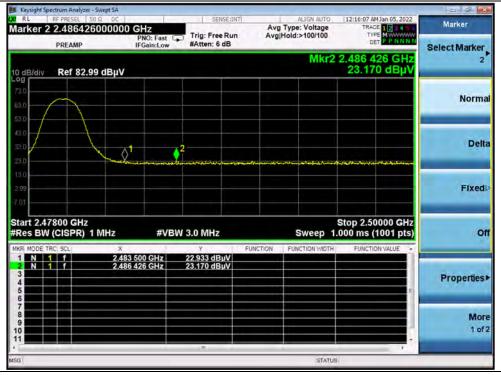

#### (PEAK, Channel 78, π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525 E-mail: service@morlab.cn



Marker	M Jan 05, 2022		ALIGN AUTO	1	SENSE: INT	1.0			ESEL 50 S	
	E 123456 M WWWWW T A P N N N N	TY	ype: Voltage old:>100/100		ree Run : 6 dB	Trig: F	NO: Fast Gain:Low	P	8361000	2 2.48 PREA
Select Marker 2	10 GHz 0 dBµV	2.483 e	Mkr2				Guineon		ef 82.99 d	
Norm										
Dell										
Fixed								2		
o	0000 GHz 1001 pts)	2.523 s	Sweep		Iz	N 3.0 MH	#VB\		SPR) 1 M	
	ON VALUE	FUNCT	FUNCTION WIDTH	FUNCTION	dBµV dBµV	10.556 10.490	0 GHz 10 GHz	× 2.483 50 2,483 61		TRC SCL
Properties	E									
Properties Mor 1 of										

(AVERAGE, Channel 78, π/4-DQPSK)





## 8-DPSK Mode

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	, er aret
0	2368.43	PK	23.56	6.74	27.20	57.50	74	PASS
0	2382.68	AV	10.36	6.74	27.20	44.30	54	PASS
78	2491.82	PK	23.60	6.74	27.20	57.54	74	PASS
78	2483.50	AV	10.75	6.74	27.20	44.69	54	PASS

#### **B. Test Plot:**

RL arker 2	RF PRESEL 50 0 2.36843200 PREAMP		Trig: Free Run #Atten: 6 dB	ALIGN AUTO Avg Type: Voltage Avg Hold:>100/100	11:54:50 PM Jan 04, 2022 TRACE 1 2 3 4 5 6 TYPE M VANNA DET P P NNNN	Marker Select Marker
dB/div	Ref 82.99 d	ΒμV		Mkr2	2.368 432 GHz 23.557 dBµV	2
30 30 30						Norm
30 30 30 30	and free and a start	مىلىكى ئەرىپەر يەرىپىلىرىد		2 		Del
3.0 :99 :01						Fixed
	0000 GHz (CISPR) 1 MI	Hz #VE	W 3.0 MHz		Stop 2.40400 GHz .000 ms (1001 pts)	C
1 N 1 2 N 1 3 2 N 1 4 2 N 1 5 2 N 1	f	2.390 000 GHz 2.368 432 GHz	22.220 dBµV 23.557 dBµV			Properties
						Mo 1 of
				STATUS		

(PEAK, Channel 0, 8-DPSK)





RL I	ctrum Analyzer - Swept SJ RF PRESEL 50 Q DI 2.3826800000	000 GHz	SENSE:IM	Avg	ALIGN AUTO Type: Voltage Hold:>100/100	11:55:42 PM Jan I TRACE	2450	Marker
_	PREAMP	PNO: Fast G IFGain:Low	#Atten: 6 dB			TYPE MY DET A	NNNN	Select Marker
dB/div	Ref 82.99 dBj	v			Mkr2	2.382 680 10.358 d	GHz BµV	2
a.o							٨	Norma
3D 3D 3D								Del
3.0 99 01						<sup>2</sup> $(1)$		Fixed
Res BW (	000 GHz (CISPR) 1 MHz	#VBW	3.0 MHz			Stop 2.40400 11.93 s (100	1 pts)	c
KR MODE TRI	1 2	× 2,390 000 GHz 2,382 680 GHz	10.354 dBµV 10.358 dBµV	FUNCTION	FUNCTION WIDTH	FUNCTION VA	UE -	Properties
4 5 6 7 8 9 9								<b>Mo</b> 1 of
-						-	1	

(AVERAGE, Channel 0, 8-DPSK)



## (PEAK, Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525 E-mail: service@morlab.cn



rker 2 2.483566 PREAMP			Avg	ALIGN AUTO Type: Voltage  Hold:>100/100	12:21:24 AM Jan 05, 2022 TRACE 2 3 4 5 6 TYPE MUMANAN DET A P N N N N	Marker Select Marker
B/div Ref 82.9	9 dBµV			Mkr2	2.483 566 GHz 10.668 dBµV	2
						Norm
						De
	2					Fixe
rt 2.47800 GHz es BW (CISPR) 1		BW 3.0 MHz			Stop 2.50000 GHz 2.523 s (1001 pts)	
MODE TRC SCL	× 2.483 500 GHz 2.483 566 GHz	γ 10.749 dBµV 10.668 dBµV	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	Propertie
						Mc 1 c
						Mo 1 o

(AVERAGE, Channel 78, 8-DPSK)





# 2.13. Radiated Emission

## 2.13.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).







## 2.13.2. Test Description

#### Test Setup:

1) For radiated emissions from 9kHz to 30MHz

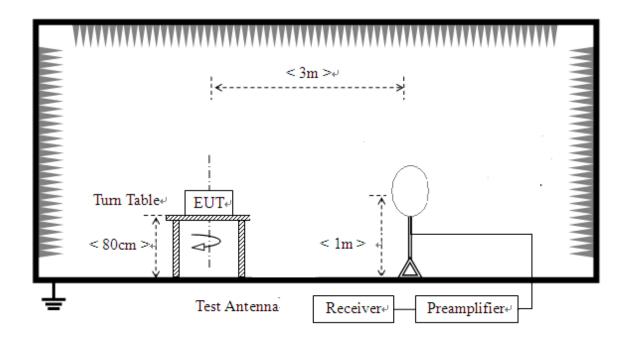

2) For radiated emissions from 30MHz to1GHz

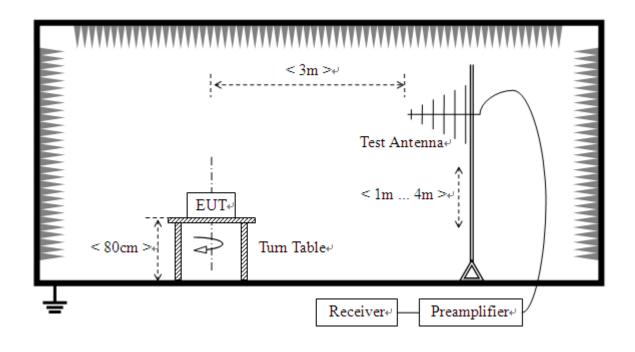




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

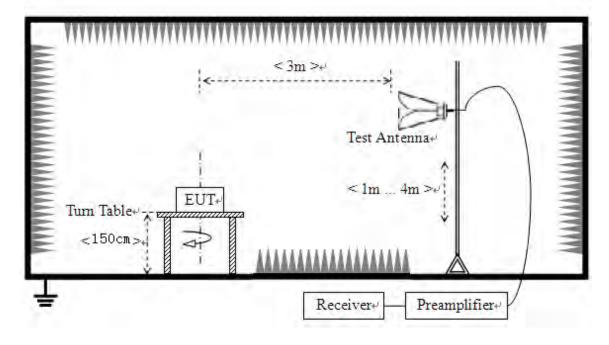

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.





## 2.13.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor AT and A<sub>Factor</sub> were built in test software.

**Note 1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note 2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note 3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






#### **GFSK Mode**



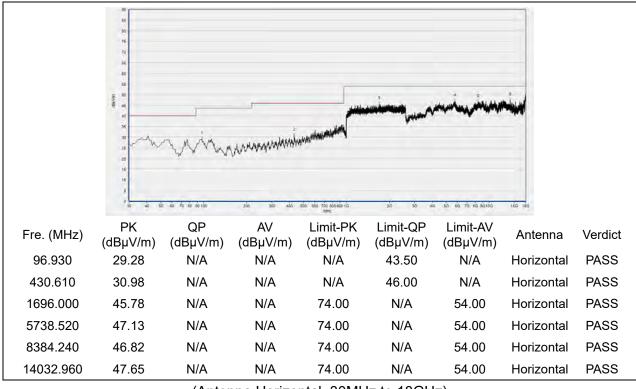

(Antenna Horizontal, 30MHz to 18GHz)

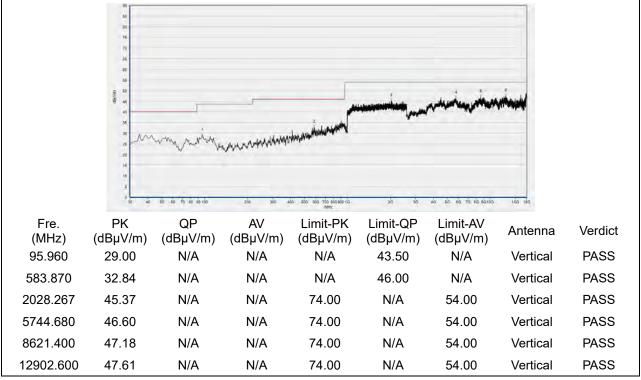


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



#### Plot for Channel 39

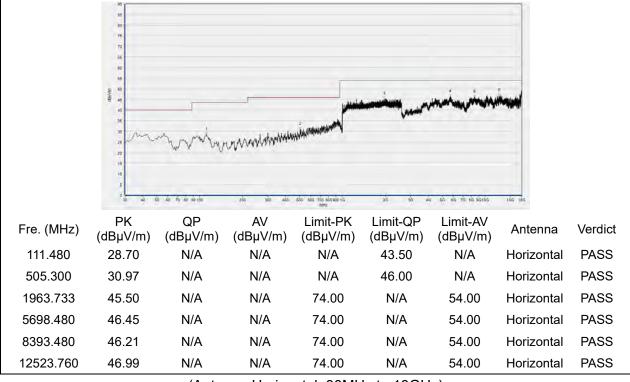

(Antenna Horizontal, 30MHz to 18GHz)

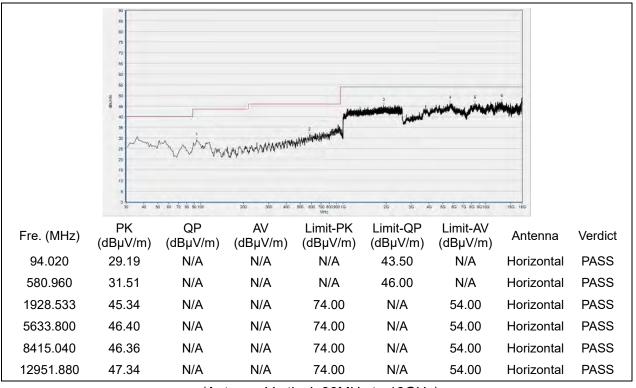

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



#### Plot for Channel 78

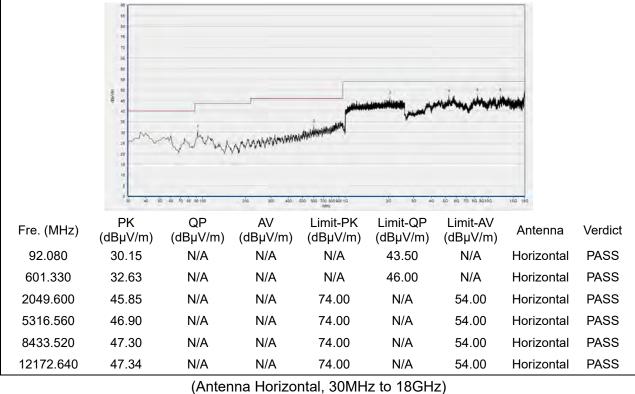


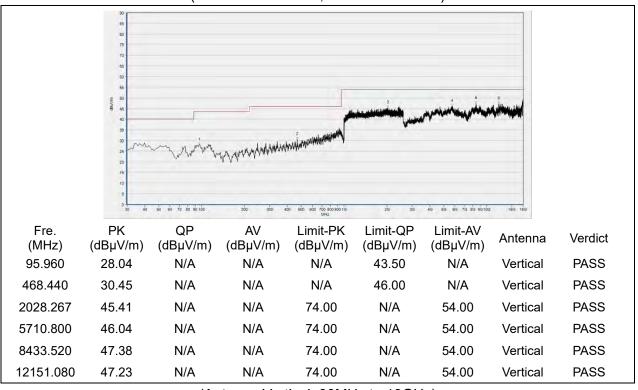

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525






## π/4-DQPSK Mode

Plots for Channel 0

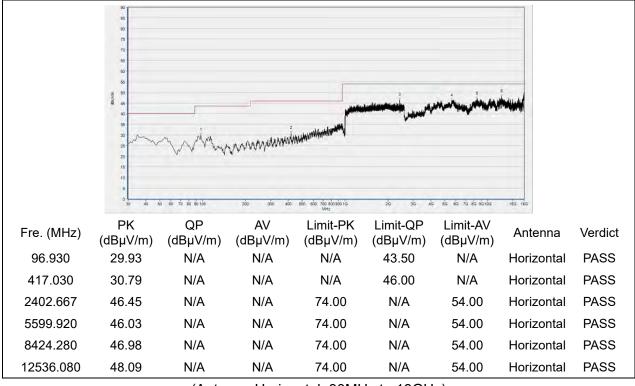

(Antenna Horizontal, 30MHz to 18GHz)

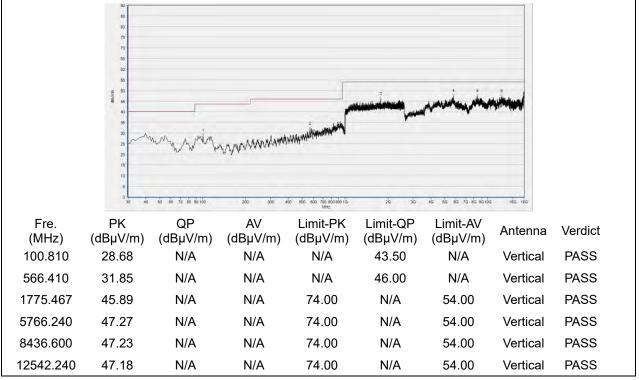


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



#### Plot for Channel 39

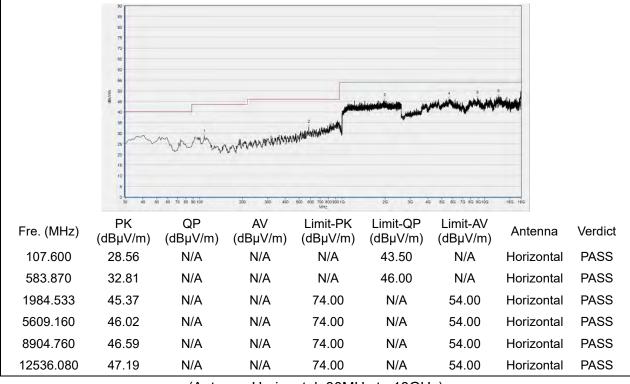

(Antenna Horizontal, 30MHz to 18GHz)

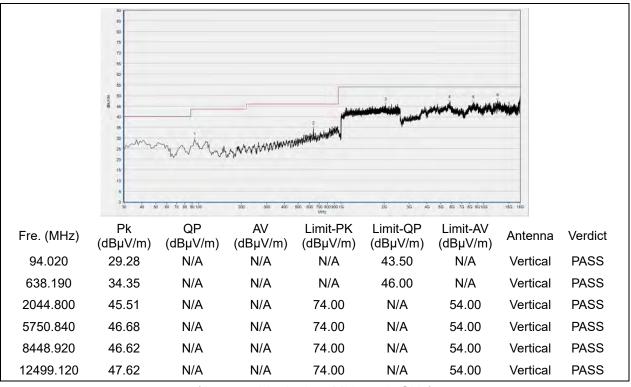

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

n E-mail: service@morlab.cn


-



#### Plot for Channel 78

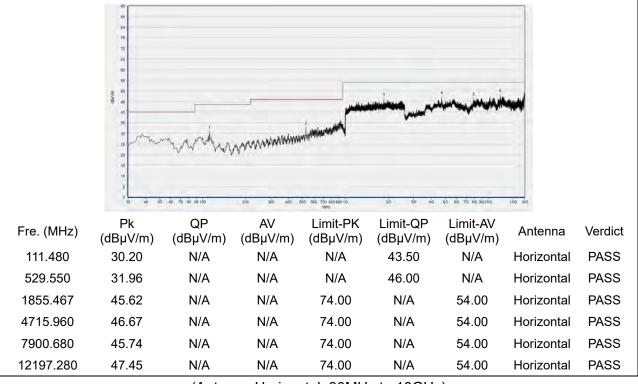

(Antenna Horizontal, 30MHz to 18GHz)

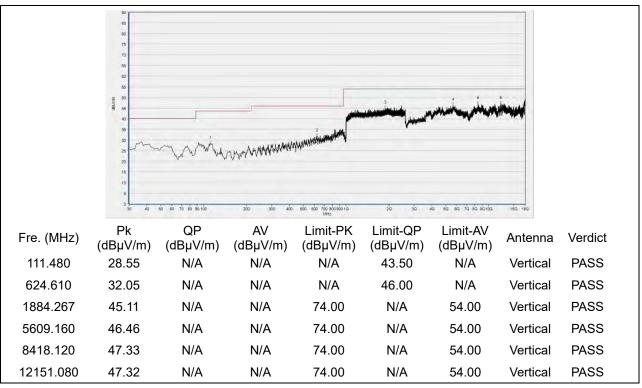

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525




#### 8-DPSK Mode

Plots for Channel 0

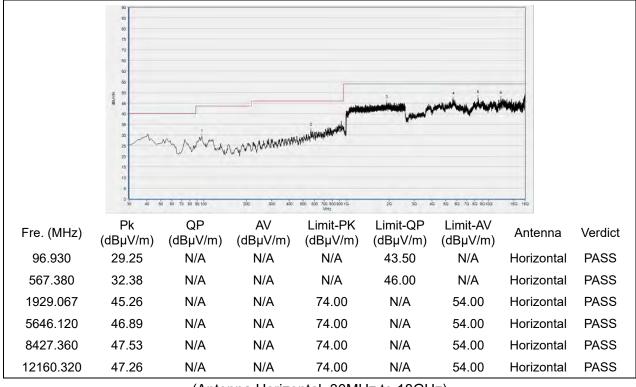

(Antenna Horizontal, 30MHz to 18GHz)

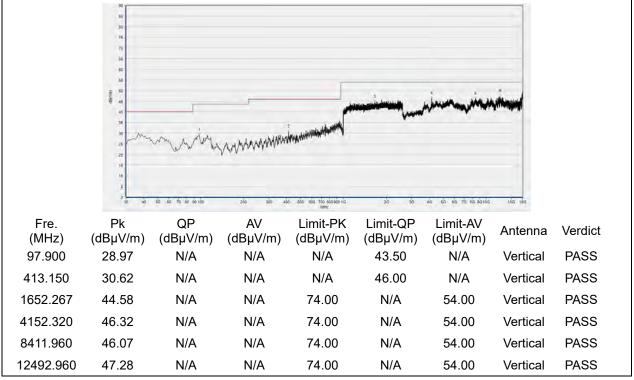


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



#### Plot for Channel 39

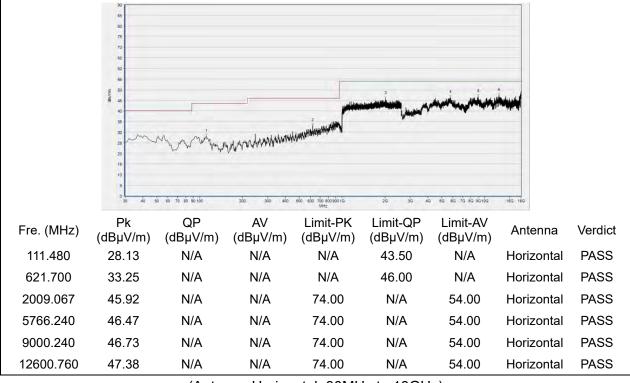

(Antenna Horizontal, 30MHz to 18GHz)

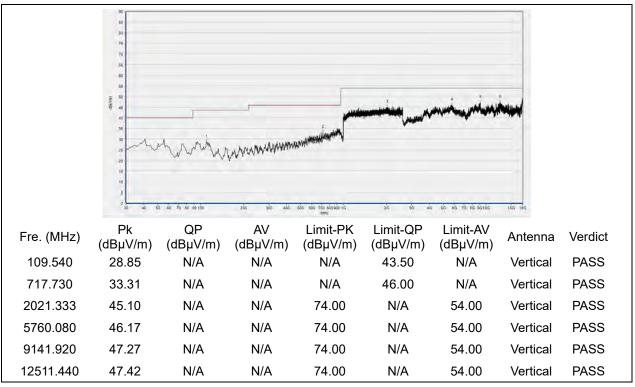


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



#### Plot for Channel 78

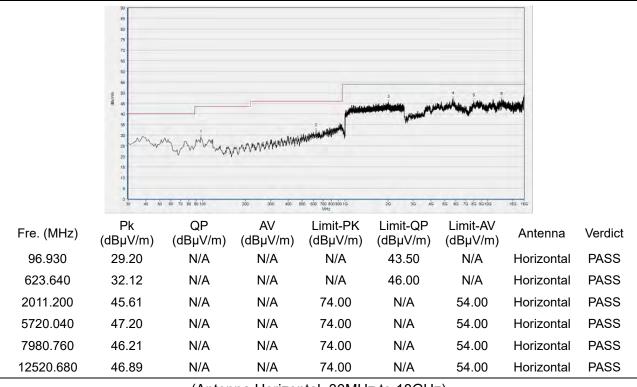

(Antenna Horizontal, 30MHz to 18GHz)

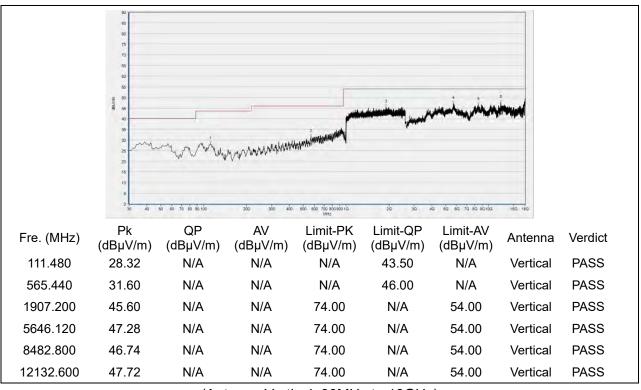

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



# **Annex A Test Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Uncertainty
±5%
±2.22dB
±5%
±5%
±5%
±2.77dB
±5%
±2.95dB
±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





# **Annex B Testing Laboratory Information**

## 1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.			
	FL.3, Building A, FeiYang Science Park, No.8 LongChang			
Laboratory Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong			
	Province, P. R. China			
Telephone:	+86 755 36698555			
Facsimile:	+86 755 36698525			

## 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				

#### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





## 4. Test Equipments Utilized

## 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2021.03.25	2022.03.24
Directional Coupler	17041703	DTO-5-30	ShangHaiHuaxiang	N/A	N/A
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2021.03.25	2022.03.24
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

## 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2021.03.09	2022.03.08
	040744	NSLK	Schwarzbeck	2021.03.09	2022.03.08
LISN	812744	8127			
Pulse Limiter	VTSD 9561	VTSD	Coburer=book	2021.07.21	2022.07.20
(10dB)	F-B #206	9561-F	Schwarzbeck	2021.07.21	2022.07.20
Coaxial					
Cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
(30MHz-26GHz)					

#### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.5.77.0418
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0





## **4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2021.07.16	2022.07.15
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2021.07.16	2022.07.15
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2021.07.16	2022.07.15
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2021.07.16	2022.07.15
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2021.07.16	2022.07.15
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

\_\_\_\_\_ END OF REPORT \_\_\_\_



\_\_\_\_