



# **TEST REPORT**

APPLICANT	Realme Chongqing Mobile Telecommunications Corp	
PRODUCT NAME	: Mobile Phone	
MODEL NAME	: RMX3521	
BRAND NAME	: realme	
FCC ID	: 2AUYFRMX3521	
STANDARD(S)	: 47 CFR Part 15 Subpart (	2
RECEIPT DATE	: 2022-01-07	
TEST DATE	: 2022-01-14 to 2022-02-14	1
ISSUE DATE	: 2022-02-23	

Edited by:

Yong Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





# DIRECTORY

1. Technical Information
1.1. Applicant and Manufacturer Information
1.2. Equipment Under Test (EUT) Description 3
1.3. The Channel Number and Frequency 5
1.4. Test Standards and Results ······ 6
1.5. Environmental Conditions7
2. 47 CFR Part 15C Requirements ······ 8
2.1. Antenna Requirement ······ 8
2.2. Duty Cycle of Test Signal 9
2.3. Maximum Peak Conducted Output Power ······ 9
2.4. Maximum Average Conducted Output Power ······15
2.5. 6 dB Bandwidth ······17
2.6. Conducted Spurious Emissions and Band Edge
2.7. Power Spectral Density (PSD)29
2.8. Conducted Emission ····································
2.9. Restricted Frequency Bands ······38
2.10. Radiated Emission45
Annex A Test Uncertainty55
Annex B Testing Laboratory Information56

Change History					
Version Date Reason for change					
1.0 2022-02-23		First edition			





# **1. Technical Information**

Note: Provide by applicant.

# **1.1. Applicant and Manufacturer Information**

Applicant:	Realme Chongqing Mobile Telecommunications Corp., Ltd.		
Applicant Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,		
Applicant Address:	China		
Manufacturer: Realme Chongqing Mobile Telecommunications Corp., Ltd			
Monufacturer Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,		
Manufacturer Address:	China		

# **1.2. Equipment Under Test (EUT) Description**

Product Name:	Mobile Phone			
Sample No.:	11#			
Hardware Version:	11			
Software Version:	realme UI V3.0			
Equipment Type:	Bluetooth LE			
Bluetooth Version:	5.1			
Modulation Type:	GFSK			
Data Rate:	1Mbps, 2Mbps			
Operating Frequency Range:	2402MHz-2480MHz			
Antenna Type:	PIFA Antenna			
Antenna Gain:	0.64dBi			
	Battery 1			
	Brand Name:	realme		
	Model No.:	BLP883		
Accessory Information	Serial No.:	N/A		
Accessory Information:	Capacity:	Typical: 5000mAh, Rated: 4880mAh		
	Rated Voltage:	3.87V		
	Charge Limit:	4.45V		
	Manufacturer:	SUNWODA Electronic Co., Ltd.		





	Battery 2				
	Brand Name:	realme			
	Model No.:	BLP883			
	Serial No.:	N/A			
	Capacity:	Typical: 5000mAh, Rated: 4880mAh			
	Rated Voltage:	3.87V			
	Charge Limit:	4.45V			
	Manufacturer:	TWS Technology (Guangzhou) Limited			
	AC Adapter 1				
	Brand Name:	realme			
	Model No.:	VCB3HDUH			
	Serial No.:	N/A			
	Rated Output:	5V=2A or 11V=3A Max			
	Rated Input:	100-240V~50/60Hz, 1.2A			
Accessory Information:	Manufacturer:	SHENZHEN HUNTKEY ELECTRIC CO			
	AC Adapter 2				
	Brand Name:	realme			
	Model No.:	VCB3HDUH			
	Serial No.:	N/A			
	Rated Output:	5V=2A or 11V=3A Max			
	Rated Input:	100-240V~50/60Hz, 1.2A			
	Manufacturer:	Huizhou Golden Lake Industrial Co.,Ltd.			
	AC Adapter 3				
	Brand Name:	realme			
	Model No.:	VCB3HDUH			
	Serial No.:	N/A			
	Rated Output:	5V=2A or 11V=3A Max			
	Rated Input:	100-240V~50/60Hz, 1.2A			
	Manufacturer:	Dongguan YOHOO Electronic Technology Co., Ltd.			





	USB Cable 1	USB Cable 1		
	Model No.:	DL143		
	USB Cable 2	USB Cable 2		
Accessory Information:	Model No.:	DL150		
	Earphone			
	Model No.:	MH156		
	Length:	1.2m		

Note 1: We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

# **1.3. The Channel Number and Frequency**

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark	
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation	
2	N/A	Duty Cycle of Test Signal	Jan 27, 2022	Su Xiaoxian	PASS	No deviation	
3	15.247(b)	Maximum Peak Conducted Output Power	Jan 14, 2022	Su Xiaoxian	PASS	No deviation	
4	15.247(b)	Maximum Average Conducted Output Power	Jan 14, 2022	Su Xiaoxian	PASS	No deviation	
5	15.247(a)	Bandwidth	Feb 03, 2022	Su Xiaoxian	PASS	No deviation	
6	15.247(d)	Conducted Spurious Emission and Band Edge	Feb 03, 2022	Su Xiaoxian	PASS	No deviation	
7	15.247(e)	Power Spectral Density	Feb 03, 2022	Su Xiaoxian	PASS	No deviation	
8	15.207	Conducted Emission	Jan 14, 2022	Huang Zhiye	PASS	No deviation	
9	15.247(d)	Restricted Frequency Bands	Feb 14, 2022	Su Zhan	PASS	No deviation	
10	15.209, 15.247(d)	Radiated Emission	Feb 09, 2022	Su Zhan	PASS	No deviation	
	<b>Note 1:</b> The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.						





**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

# 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 2.47 CFR Part 15C Requirements

# 2.1. Antenna Requirement

### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




# 2.2. Duty Cycle of Test Signal

# 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered). When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

## 2.2.2. Test Description

#### Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

## 2.2.3. Test Result

Test Mode	Data Rate	Duty Cycle (%) (D)	Duty Factor (10*lg[1/D])
GFSK	1Mbps	62.40	2.05
	2Mbps	32.00	4.95



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



# 2.3. Maximum Peak Conducted Output Power


### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 2.3.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

#### 2.3.3. Test Procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency

- b) Set RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time = auto couple
- f) Detector = peak
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use peak marker function to determine the peak amplitude level





### 2.3.4. Test Result

#### 1Mbps

#### A. Test Verdict:

Channel	Frequency	Measured Outp	ut Peak Power	Lir	nit	Verdict
Channel (MHz)		dBm	W	dBm	W	verdict
0	2402	6.16	0.0041			PASS
19	2440	6.09	0.0041	30	1	PASS
39	2480	6.88	0.0049			PASS

#### **B. Test Plot:**



(Channel 0, 2402MHz)



Tel: 86-755-36698555

Fax: 86-755-36698525





#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### 2Mbps

#### A. Test Verdict:

Channel Frequency (MHz)		Measured Output Peak Power		Limit		Vardiat
		dBm	W	dBm	W	Verdict
0	2402	5.72	0.0037			PASS
19	2440	5.29	0.0034	30	1	PASS
39	2480	7.39	0.0055			PASS

### **B. Test Plot:**




(Channel 0, 2402MHz)



Tel: 86-755-36698555

Fax: 86-755-36698525







#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



# 2.4. Maximum Average Conducted Output Power


### 2.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 2.4.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

#### 2.4.3. Test Procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.





## 2.4.4. Test Result

# 1Mbps

Frequency		Average Power				Limit		Verdict
Channel	Frequency (MHz)	Measured	Duty	Duty Factor Calculated				Verdict
	(IVITZ)	dBm	Factor	dBm	W	dBm	W	
0	2402	3.59		5.64	0.0037			PASS
19	2440	3.72	2.05	5.77	0.0038	30	1	PASS
39	2480	4.38		6.43	0.0044			PASS

#### 2Mbps

	Fraguanay	Average Power				Limit		Verdict
Channel	Frequency (MHz)	Measured	Duty	Duty Factor Calculated		LIIIII		Veruici
	(IVITIZ)	dBm	Factor	dBm	W	dBm	W	
0	2402	-0.13		4.82	0.0030			PASS
19	2440	-0.44	4.95	4.51	0.0028	30	1	PASS
39	2480	1.69		6.64	0.0046			PASS



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn




### 2.5.1. Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### 2.5.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### 2.5.3. Test Procedure

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

 h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission



Http://www.morlab.cn

Fax: 86-755-36698525



The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\ge$  3  $\times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\ge$ 6 dB.

# 2.5.4. Test Result

### 1Mbps

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.666	≥500	PASS
19	2440	0.668	≥500	PASS
39	2480	0.666	≥500	PASS

#### B. Test Plot:



#### (Channel 0, 2402MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





#### (Channel 19, 2440 MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525



#### 2Mbps

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	1.120	≥500	PASS
19	2440	1.155	≥500	PASS
39	2480	1.148	≥500	PASS

#### **B.Test Plot:**




(Channel 0, 2402MHz)



Tel: 86-755-36698555

Fax: 86-755-36698525







#### (Channel 19, 2440 MHz)




#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525






# 2.6. Conducted Spurious Emissions and Band Edge

### 2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### 2.6.2. Test Description

#### **Test Setup:**



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### 2.6.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.






### 2.6.4. Test Result

#### 1Mbps

#### A. Test Verdict:

	Frequency	Measured Max. Out of	Limit	(dBm)		
Channel	(MHz)	Band Emission (dBm)	Corrier Lovel	Calculated	Verdict	
			Carrier Level	-20dBc Limit		
0	2402	-41.12	6.55	-13.45	PASS	
19	2440	-41.10	4.76	-15.24	PASS	
39	2480	-41.38	6.34	-13.66	PASS	

#### **B. Test Plot:**

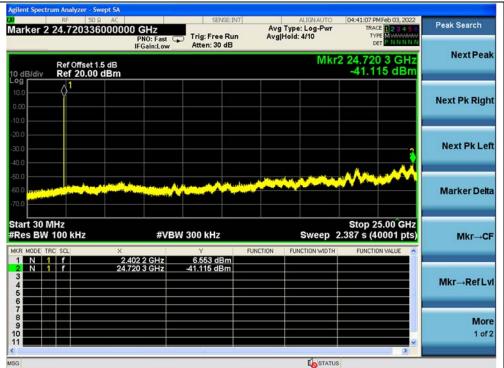

(30MHz to 25GHz, Channel 0)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



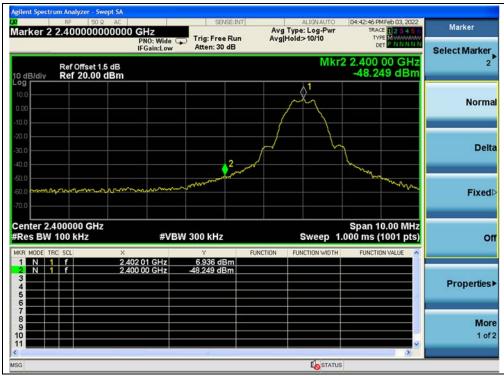

#### (Band Edge, Channel 0)

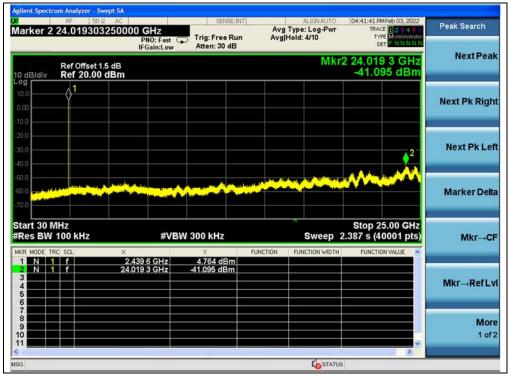

#### (30MHz to 25GHz, Channel 19)



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



arker 2 24.041776250	0000 GHz		ALIGN AUTO vg Type: Log-Pwr g Hold: 4/10	04:42:05 PMFeb 03, 2022 TRACE 12345 TYPE MWWWWW DET PNNNNN	Peak Search
Ref Offset 1.5 dB dB/div Ref 20.00 dBn			Mkr2	24.041 8 GHz -41.383 dBm	NextPeak
					Next Pk Right
				2	Next Pk Left
0.0 200 gave lating data in the state of the state 0.0				M	Marker Delta
	#VBW 30	Y FUNCTION	Sweep 2	Stop 25.00 GHz .387 s (40001 pts)	Mkr→CF
N 1 F N 1 F	2.480 2 GHz 6 24.041 8 GHz 41	.339 dBm .383 dBm			Mkr→RefLvi
					More

### (30MHz to 25GHz, Channel 39)



#### (Band Edge, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



### 2Mbps

#### A. Test Verdict:

	Frequency	Measured Max. Out of	Limit	(dBm)		
Channel	(MHz)	Band Emission (dBm)	Carrier Loval	Calculated	Verdict	
			Carrier Level	-20dBc Limit		
0	2402	-40.05	2.77	-17.23	PASS	
19	2440	-40.31	5.71	-14.29	PASS	
39	2480	-40.84	3.63	-16.37	PASS	

### **B. Test Plot:**



(30MHz to 25GHz, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn





#### (Band Edge, Channel 0)

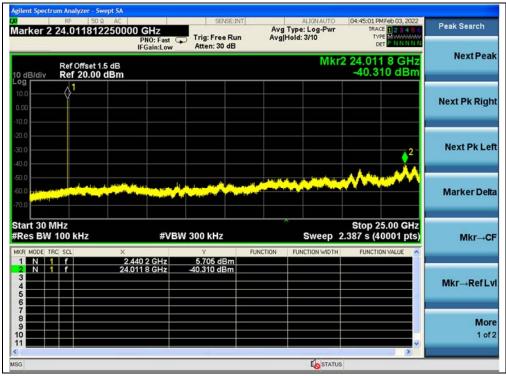

#### (30MHz to 25GHz, Channel 19)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



Peak Search	04:45:40 PMFeb 03, 2022 TRACE 2 3 4 5 1 TYPE MMMMMM DET P N N N N N	ALIGNAUTO Type: Log-Pwr Hold: 10/10		SENSE:IN Trig: Free Rur Atten: 30 dB	0 GHz PNO: Fast IFGain:Low		RF	
NextPeak	2 24.587 4 GHz -40.837 dBm	Mkr				Dffset 1.5 dB 20.00 dBm	Ref liv <b>Ref</b>	0 dB/di
Next Pk Right								. <b>og</b> 10.0 0.00 10.0
Next Pk Left								20.0
Marker Delta	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~							50.0 60.0 70.0
Mkr→CF	Stop 25.00 GHz .387 s (40001 pts) FUNCTION VALUE	Sweep 2	FUNCT	W 300 kHz		X	BO MHZ BW 100	Res B
Mkr→RefLvl				3.634 dBm -40.837 dBm	79 6 GHz 87 4 GHz	24.58	1 f 1 f	1 N 2 N 3 4 5 6
More 1 of 2								7 8 9 10 11
		In STATUS						SG





(Band Edge, Channel 39)



Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn




# 2.7. Power Spectral Density

### 2.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 2.7.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### 2.7.3. Test Procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW





### 2.7.4. Test Result

#### 1Mbps

#### A. Test Verdict:

	Spectral Power Density (dBm/3kHz)								
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict					
0	2402	-7.81	8	PASS					
19	2440	-8.13	8	PASS					
39	2480	-7.13	8	PASS					

#### **B. Test Plot:**




(Channel 0, 2402MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn







#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



### 2Mbps

#### A.Test Verdict:

Spectral Power Density (dBm/3kHz)								
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict				
0	2402	-11.35	8	PASS				
19	2440	-11.79	8	PASS				
39	2480	-10.74	8	PASS				

#### **B.Test Plot:**






Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








#### (Channel 19, 2440MHz)





Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525





# 2.8. Conducted Emission

### 2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency Penge (MHz)	Conducted Limit (dBµV)			
Frequency Range (MHz)	Quai-peak	Average		
0.15 - 0.50	66 to 56	56 to 46		
0.50 - 5	56	46		
5 - 30	60	50		


Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.8.2. Test Description

#### **Test Setup:**

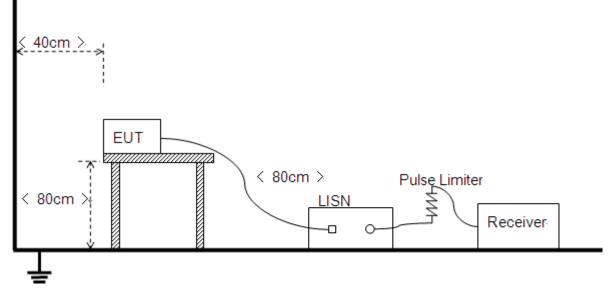

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

MORLAB



#### 2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: <u>EUT+Adaptor+ Earphone + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U<sub>R</sub> + L<sub>Cable loss</sub> [dB] + A<sub>Factor</sub> U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN




Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn E-mail: service@morlab.cn

Page 35 of 58





#### B. Test Plot:

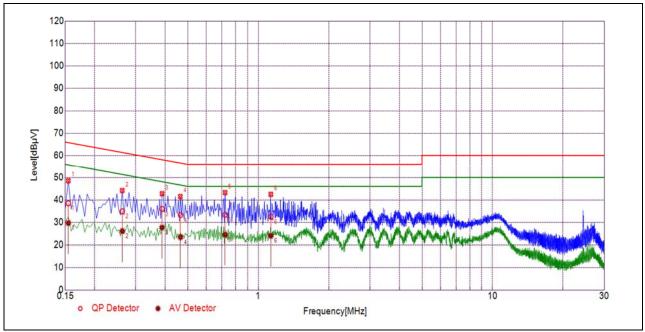


#### (L Phase)

No.	No. Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	38.48	29.65	65.76	55.76	Line	PASS
2	0.2626	34.88	26.06	61.35	51.35		PASS
3	0.3882	35.93	27.65	58.10	48.10		PASS
4	0.4655	33.25	23.37	56.59	46.59		PASS
5	0.7218	33.37	24.54	56.00	46.00		PASS
6	1.1309	32.51	23.99	56.00	46.00		PASS





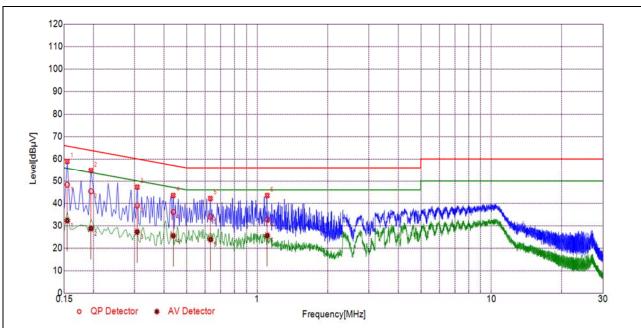

(N Phase)
-----------


No.	Fre.	Emission Level (dBµV) Quai-peak Average		Limit (	dBµV)	Power-line	Verdict
	(MHz)			Quai-peak	Average		
1	0.1545	48.31	32.27	65.76	55.76		PASS
2	0.1951	45.38	28.70	63.82	53.82		PASS
3	0.3072	38.97	27.23	60.05	50.05	Neutral	PASS
4	0.4382	36.09	25.45	57.10	47.10	Neutral	PASS
5	0.6319	33.95	23.79	56.00	46.00		PASS
6	1.1042	32.73	25.55	56.00	46.00		PASS



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn






# 2.9. Restricted Frequency Bands

#### 2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### 2.9.2. Test Description

#### **Test Setup**

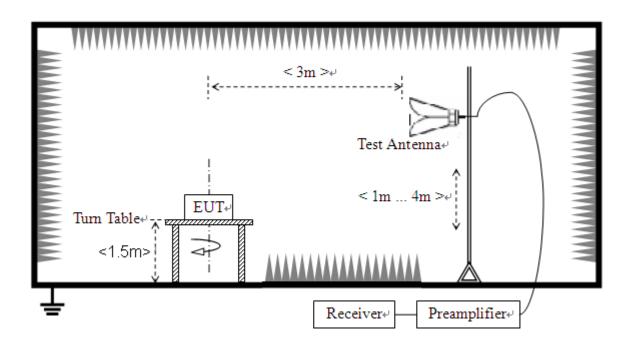

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





## 2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for  $f \ge 1$ GHz, 100 kHz for f < 1GHz VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold Allow the trace to stabilize

#### 2.9.4. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

E [dBµV/m] =U<sub>R</sub> + A<sub>T</sub> + A<sub>Factor</sub> [dB]; A<sub>T</sub> =L<sub>Cable loss</sub> [dB]-G<sub>preamp</sub> [dB]

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

#### 1Mbps

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
Onanner	(MHz)	PK/ AV	U <sub>R</sub> (dB) (dBµV)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdiet	
0	2380.39	PK	24.72	6.74	27.20	58.66	74	PASS
0	2389.75	AV	10.93	6.74	27.20	44.87	54	PASS
39	2486.21	PK	23.90	6.74	27.20	57.84	74	PASS
39	2484.80	AV	10.59	6.74	27.20	44.53	54	PASS



Fax: 86-755-36698525



#### **B. Test Plot:**

									nalyzer - S			
Marker	50 PM Feb 09, 2022 TRACE 1 2 3 4 5 6 TYPE M	TRAC	ALIGN OFF pe: Voltage Id:>100/100		SENSE:IN		GHz PNO: Fast	Ω DC 000000	03920			rker
Select Marker 2	0 392 GHz 719 dBµV	2.380 3			Atten: 6 dB		IFGain:Low	dBµV		PREA Ref		B/di
Norm	$\wedge$											
Delt	21	^1	¢ <sup>2</sup>		un an		unaler Programma	Arecolicistic a	and the second second			
Fixed												
c	2.40400 GHz is (1001 pts)	.000 ms (		FUNCTION	MHz	BW 3	#VE	MHz	GHz PR) 1 I	-	W (0	
Properties		FONCTION	ONC TION MOTH	FONCTION	328 dBµV 719 dBµV		000 GHz 392 GHz	2.390		f	1	N
Mo 1 of												
			STATUS			_				_	_	

(PEAK, Channel 0)



(AVERAGE, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



							📕 Keysight Spectrum
Marker	10:11:08 PM Feb 09, 2022 TRACE 1 2 3 4 5 6	ALIGN OFF		SENSE:I	GH7	SEL 50 Ω DC 36206000000	
Select Marker		Hold:>100/100	יא n	Trig: Free Ru #Atten: 6 dB	PNO: Fast G		PRE
2	2.486 206 GHz 23.904 dBµV	Mkr2				f 82.99 dBµV	10 dB/div Re
Norma							73.0 63.0 53.0
Delta					**************************************	han and	43.0 33.0 23.0
Fixed							13.0 2.99 -7.01
or	Stop 2.50000 GHz .000 ms (1001 pts)	Sweep 1	FUNCTION	3.0 MHz	#VBW	PR) 1 MHz	Start 2.47800 #Res BW (CIS
Properties	E			22.428 dBµV 23.904 dBµV	500 GHz 206 GHz	2.483	1 N 1 f 2 N 1 f 3 4 5 6
Mor 1 of	-			m			7 8 9 10 11
		STATUS					ISG

#### (PEAK, Channel 39)



# (AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### 2Mbps

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
Onanner	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Vordiot
0	2346.70	PK	23.86	6.74	27.20	57.80	74	PASS
0	2390.00	AV	10.91	6.74	27.20	44.85	54	PASS
39	2483.65	PK	23.88	6.74	27.20	57.82	74	PASS
39	2486.07	AV	10.62	6.74	27.20	44.56	54	PASS

#### **B. Test Plot:**

💓 Keysight Sp 💢 R L		nalyzer - Swept SA		SEN	SE:INT	ALIGN OFF	10:15:27 PM Feb 09, 202	2
Marker 2		669600000	PNO: Fast	Trig: Free	Run Av	g Type: Voltage Hold:>100/100	TRACE 12345 TYPE M	6 Marker
	PREA	MP	IFGain:Low	#Atten: 6	dB	Mkr2	2.346 696 GH	Select Marker
10 dB/div Log	Ref	82.99 dBµV					23.859 dBµ	
73.0								Normal
63.0 53.0								
43.0								
33.0				2				Delta
23.0	<b>W</b> alitza (h.	ومليجيح أجرعوه وحواقين		the state of the s	anangangangangangangangangangangangangan	there and the case of the case	reaser and a contract of the second	
2.99								Fixed⊳
-7.01								
Start 2.3 #Res BW		GHz PR) 1 MHz	#VE	3W 3.0 MHz		Sweep 1	Stop 2.40400 GH .000 ms (1001 pt	z S) Off
MKR MODE T	TRC SCL	X	0 000 GHz	Y 22.559 dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	
2 N			6 696 GHz	23.859 dB				
4								Properties►
6 7								
8 9 10								More 1 of 2
11				m			+	-
MSG						STATU	S	
				/DE				

# (PEAK, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



Marker Select Marker	4 Feb 09, 2022 E 1 2 3 4 5 6 E M W W W W W	TRAC	ALIGN OFF e: Voltage :>100/100				GHz PNO: Fast G IFGain:Low	zer - Swept SA 50 Ω DC 44000000		X RL
2	44 GHz 0 dBµV	2.389 5 10.91	Mkr2					2.99 dBµV	iv Ref 82	10 dB/c Log <b>Г</b>
Norma										73.0 — 63.0 —
Delta	$\land$									53.0
Fixed		\$ <sup>2</sup>								13.0 2.99 -7.01 —
Of	400 GHz 1001 pts)	11.93 s (	Sweep	NCTION		3.0 MHz	#VBV		30000 GH SW (CISPR)	#Res
Properties						10.914 dB 10.910 dB	000 GHz 544 GHz	2.390		1 N 2 N 3 4 5 6
More 1 of 2						m				7 8 9 10 11
			STATUS		_					MSG

# (AVERAGE, Channel 0)

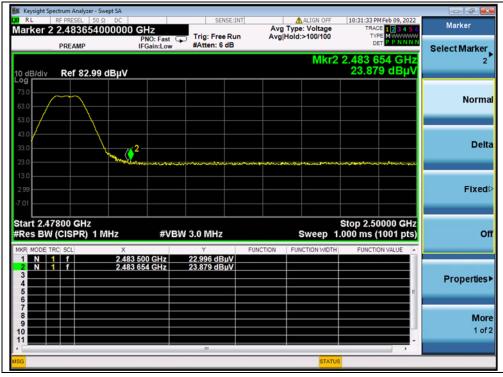

# (PEAK, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



Marker	1Feb 09, 2022 E 1 2 3 4 5 6 E M T A P N N N N	TRAC	ALIGN OFF be: Voltage d:>100/100			Z IO: Fast G	DC 0000 GI P	ESEL 50 Ω	arker 2 2.4
Select Marker 2	74 GHz 7 dBµV	2.486 0 10.61	Mkr2			uni.cow		ef 82.99 d	dB/div R
Norma									3.0 3.0 3.0 3.0
Delt									3.0 3.0 3.0 3.0 3.0
Fixed						• <sup>2</sup>	\		3.0 .99 .01
o	0000 GHz 1001 pts)	Stop 2.50 2.523 s (	Sweep	INCTION	3.0 MHz	#VBW	Hz ×	SPR) 1 M	tart 2.47800 Res BW (CIS
Properties					10.580 dB 10.617 dB		2.483 50 2.486 07		1 N 1 f 2 N 1 f 3 4 5 6
Mor 1 of									7 8 9 0 1
			STATUS		 m				a

(AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 2.10. Radiated Emission

#### 2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).




Fax: 86-755-36698525




# 2.10.2. Test Description

#### Test Setup:

1) For radiated emissions from 9kHz to 30MHz

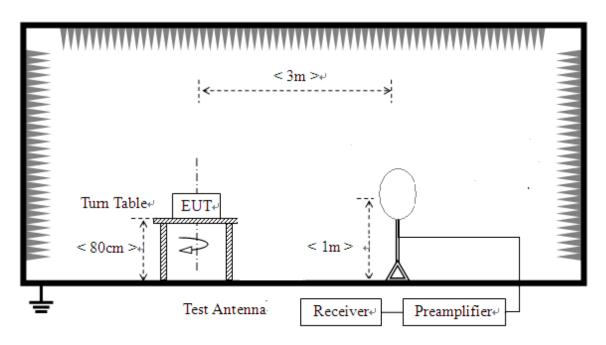

2) For radiated emissions from 30MHz to1GHz

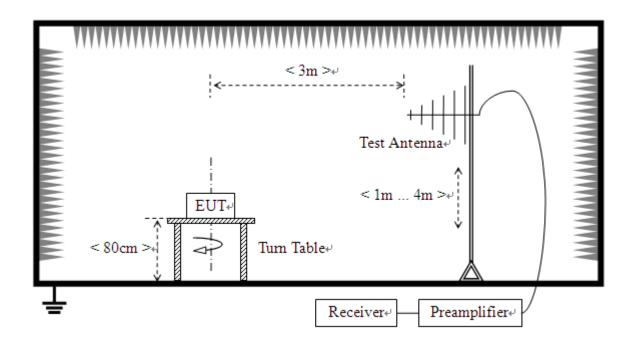




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

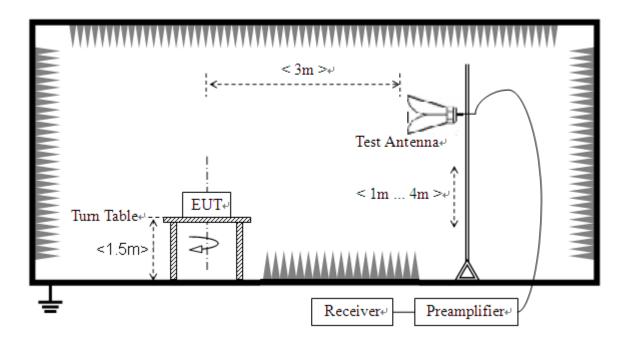

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.





#### 2.10.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




Fax: 86-755-36698525




# 1Mbps



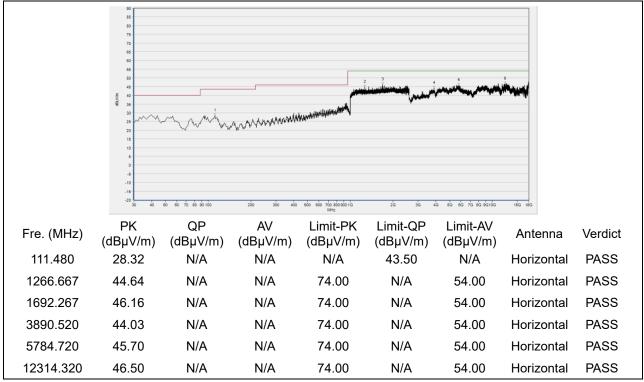

(Antenna Horizontal, 30MHz to 18GHz)

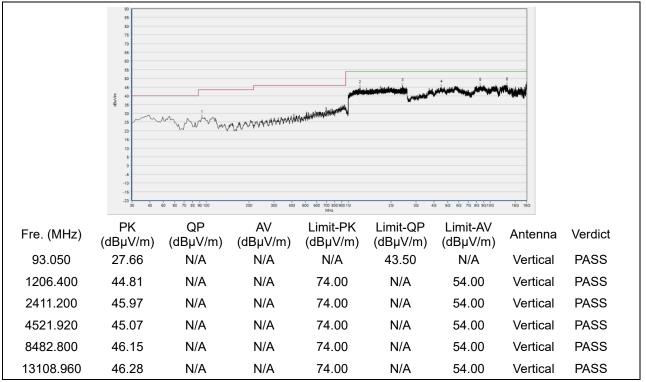


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 19

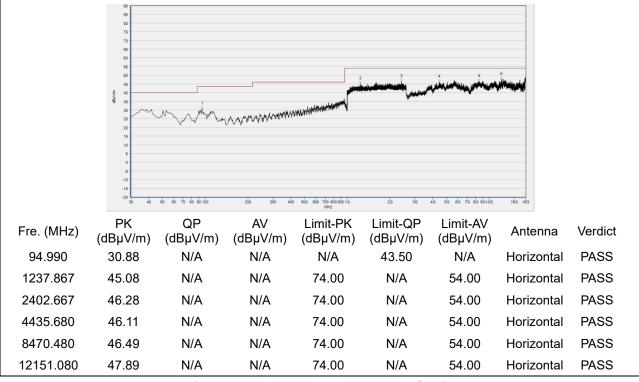

(Antenna Horizontal, 30MHz to 18GHz)

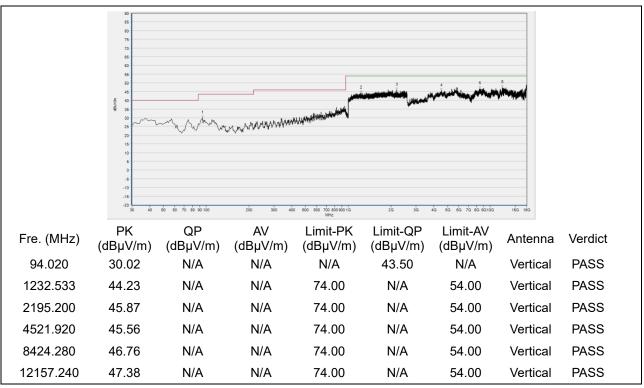


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 39

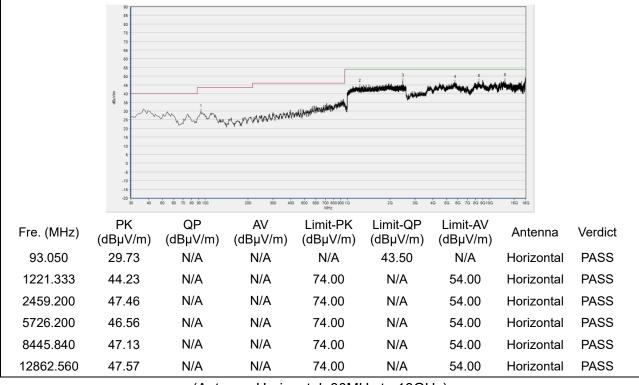

(Antenna Horizontal, 30MHz to 18GHz)

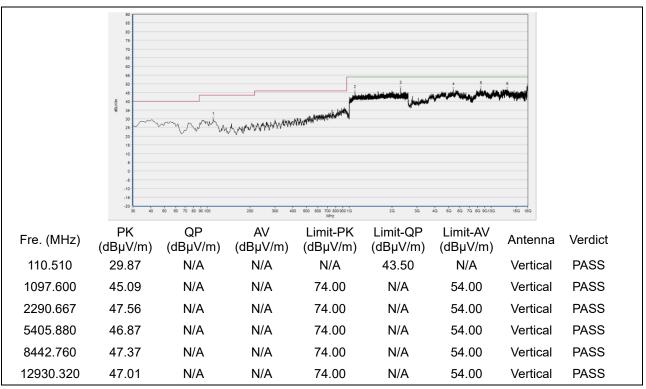

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




#### 2Mbps

Plot for Channel 0

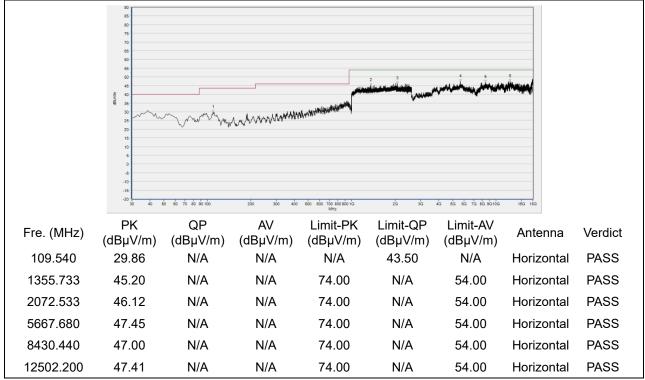

(Antenna Horizontal, 30MHz to 18GHz)

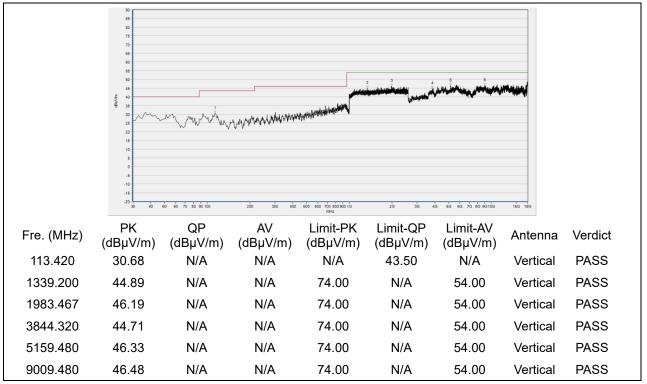


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 19

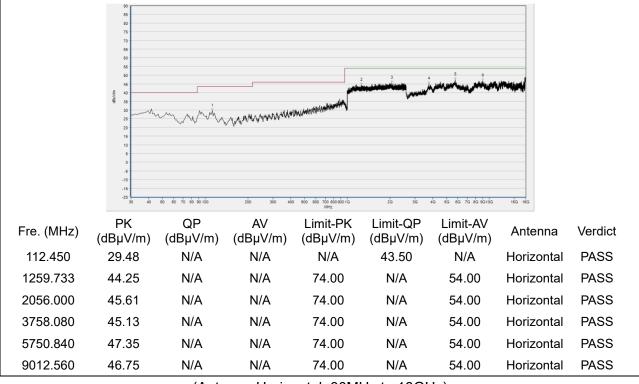

(Antenna Horizontal, 30MHz to 18GHz)

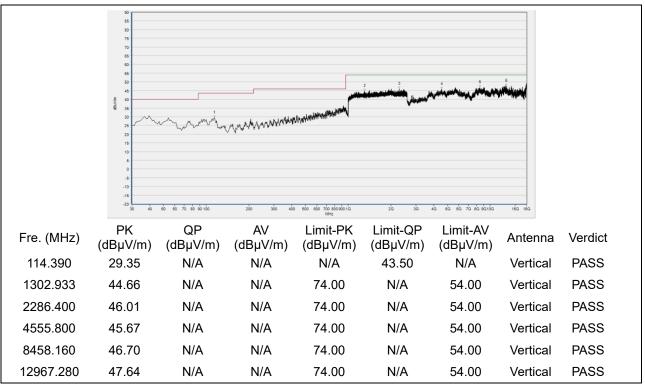


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn






#### Plot for Channel 39

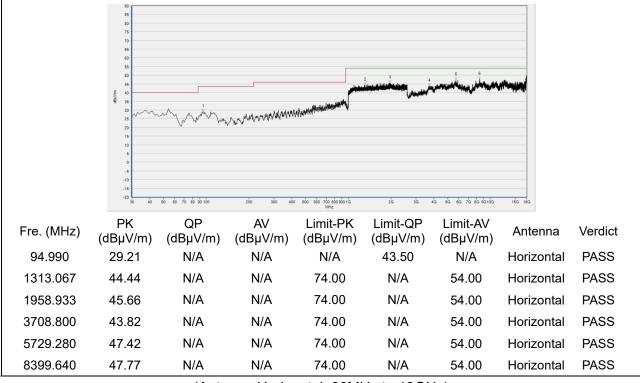

(Antenna Horizontal, 30MHz to 18GHz)

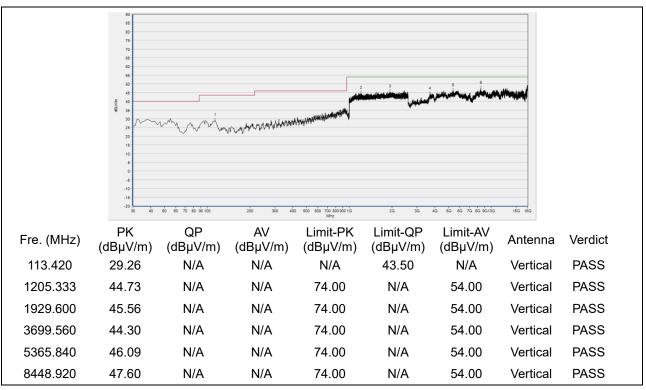

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn



# **Annex A Test Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	±2.22dB
Power Spectral Density	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



# **Annex B Testing Laboratory Information**

#### 1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
Laboratory Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				
Telephone:	+86 755 36698555				
Facsimile:	+86 755 36698525				

#### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				

#### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



## 4. Test Equipments Utilized

# 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2021.03.25	2022.03.24
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNE R	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

# 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY5640009 3	N9038A	KEYSIGHT	2021.03.09	2022.03.08
LISN	8127449	NSLK 8127	Schwarzbeck	2021.03.09	2022.03.08
Pulse Limiter	VTSD 9561	VTSD	Schwarzbeck	2021.07.21	2022.07.20
(10dB)	F-B #206	9561-F			
Coaxial					
Cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
(30MHz-26GHz)					

#### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.5.77.0418
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



Fax: 86-755-36698525



#### 4.4 Radiated Test Equipments

Equipment		_			
Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2021.07.16	2022.07.15
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1520	Schwarzbeck	2019.02.14	2022.02.14
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2021.07.16	2022.07.15
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2021.07.16	2022.07.15
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2021.07.16	2022.07.15
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2021.07.16	2022.07.15
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

\_\_\_\_ END OF REPORT \_\_\_\_



Fax: 86-755-36698525

Http://www.morlab.cn