



# TEST REPORT

No.I23N01711-RF GSM

for

**Realme Chongqing Mobile Telecommunications Corp., Ltd.**

**Mobile Phone**

**Model Name: RMX3840**

**FCC ID: 2AUYFRMX3370**

with

**Hardware Version: 11**

**Software Version: realme UI 5.0**

**Issued Date: 2023-12-12**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@saict.ac.cn. www.saict.ac.cn



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I23N01711-RF GSM	Rev.0	1st edition	2023-12-12



## **CONTENTS**

<b>1. SUMMARY OF TEST REPORT .....</b>	<b>4</b>
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS .....	4
1.3. TEST RESULT .....	4
1.4. TESTING LOCATION .....	4
1.5. PROJECT DATA .....	4
1.6. SIGNATURE.....	4
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
2.1. APPLICANT INFORMATION .....	5
2.2. MANUFACTURER INFORMATION .....	5
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....</b>	<b>6</b>
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT .....	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION .....	6
<b>4. REFERENCE DOCUMENTS.....</b>	<b>7</b>
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>7. STATEMENT .....</b>	<b>10</b>
<b>8. TEST EQUIPMENTS UTILIZED .....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>12</b>
A.1 OUTPUT POWER.....	12
A.2 FIELD STRENGTH OF SPURIOUS RADIATION.....	20
A.3 FREQUENCY STABILITY .....	28
A.4 OCCUPIED BANDWIDTH .....	30
A.5 EMISSION BANDWIDTH .....	43
A.6 BAND EDGE COMPLIANCE.....	56
A.7 CONDUCTED SPURIOUS EMISSION .....	63
A.8 PEAK-TO-AVERAGE POWER RATIO .....	68
<b>ANNEX B CCREDITATION CERTIFICATE .....</b>	<b>81</b>
<b>ANNEX C CERTIFICATE OF BRAND AUTHORIZATION .....</b>	<b>82</b>



# 1. SUMMARY OF TEST REPORT

## 1.1. Test Items

Description	Mobile Phone
Model Name	RMX3840
Brand Name	realme
Applicant's name	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer's Name	Realme Chongqing Mobile Telecommunications Corp., Ltd.

## 1.2. Test Standards

FCC Part 22/24	10-1-22 Edition
FCC Part 2	10-1-21 Edition
ANSI C63.26	2015
KDB971168 D01	v03r01

## 1.3. Test Result

All test items are passed. Please refer to "6 Summary of Test Results" for detail.

## 1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

## 1.5. Project Data

Testing Start Date: 2023-10-19

Testing End Date: 2023-12-03

## 1.6. Signature

Wang Ping  
(Prepared this test report)

Huang Qiuqin  
(Reviewed this test report)

Zhang Hao  
(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: Realme Chongqing Mobile Telecommunications Corp., Ltd.  
Address /Post: No.178 Yulong Avenue,Yufengshan,Yubei District, Chongqing, China  
Contact Person: Yang LiangPing  
Contact Email ylp@realme.net  
Telephone: (86)13798864426  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Realme Chongqing Mobile Telecommunications Corp., Ltd.  
Address /Post: No.178 Yulong Avenue,Yufengshan,Yubei District, Chongqing, China  
Contact Person: Yang LiangPing  
Contact Email ylp@realme.net  
Telephone: (86)13798864426  
Fax: /



### **3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT**

#### **(AE)**

#### **3.1. About EUT**

Description	Mobile Phone
Model Name	RMX3840
FCC ID	2AUYFRMX3370
Frequency Bands	GSM 850/PCS 1900
Antenna	Integrated
Extreme vol. Limits	3.60V to 4.48V (nominal: 3.89V)
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of SAICT.

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT01aa	863994060022837	11	realme UI 5.0	2023-10-16
	863994060022829			
UT05aa	867815060019653	11	realme UI 5.0	2023-10-19
	867815060019646			

\*EUT ID: is used to identify the test sample in the lab internally.

UT01aa are used for conduction test, UT05aa is used for radiation test.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE2	Charger
AE3	USB Cable

##### AE1

Model	BLPA35
Manufacturer	Sunwoda Electronic Co.,Ltd.
Capacity	4880mAh
Nominal Voltage	3.91 V

##### AE2

Model	VCB70AUH
Manufacturer	HUIZHOU GOLDEN LAKE INDUSTRIAL CO., LTD
Specification	American Standard Charger

##### AE3

Model	DL129
Manufacturer	/

\*AE ID: is used to identify the test sample in the lab internally. AE: ancillary equipment

#### **3.4. General Description**

The Equipment Under Test (EUT) is a model Mobile Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.



#### **4. REFERENCE DOCUMENTS**

##### **4.1. Reference Documents for Testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-22 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-21 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-22 Edition
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01

## 5. LABORATORY ENVIRONMENT

**Shielded room** did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

**Fully-anechoic chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



**6. SUMMARY OF TEST RESULTS**

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured

**GSM850**

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P

**PCS1900**

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/KDB971168 D01	A.8	P



## **7. STATEMENT**

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

**8. TEST EQUIPMENTS UTILIZED**

No.	Description	Type	Manufacture	Series Number	Cal Due Date
1	Test Receiver	ESR7	R&S	101676	2024-11-22
2	BiLog Antenna	3142E	ETS-Lindgren	0224831	2024-05-27
3	Horn Antenna	3117	ETS-Lindgren	00066577	2025-04-17
4	Horn Antenna	QSH-SL-18-26-S-20	Q-par	17013	2026-02-01
5	Horn Antenna	QSH-SL-26-40-K-20	Q-par	17014	2026-01-30
6	Antenna	BBHA 9120D	Schwarzbeck	1593	2025-10-24
7	Antenna	QWH-SL-18-40-K-SG	Q-par	15979	2026-01-30
8	preamplifier	83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2024-11-22
10	Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2025-05-28
11	Spectrum Analyzer	FSV40	R&S	101192	2024-01-11
12	Universal Radio Communication Tester	CMU200	R&S	114545	2024-01-11
13	Universal Radio Communication Tester	CMW500	R&S	152499	2024-07-13
14	Universal Radio Communication Tester	CMW500	R&S	168719	2024-03-23
15	Universal Radio Communication Tester	E7515B	Keysight	MY59322022	2024-02-13
16	Universal Radio Communication Tester	CMW500	R&S	129146	2024-04-24
17	Spectrum Analyzer	FSW26	R&S	102197	2024-11-24
18	Temperature Chamber	SH-241	ESPEC	92007516	2024-10-15
19	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2024-11-13

**Test software**

Item	Name	Version
Radiated	EMC32	V10.50.40

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

#### **GSM850**

	Power step	Nominal Peak output power (dBm)
GSM	5	33dBm(2W)
GPRS	3	33dBm(2W)
EGPRS	6	27dBm(0.5W)

#### **Measurement result**

##### **GSM(GMSK)**

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	32.31
836.6	5	32.37
848.8	5	32.56

##### **GPRS(GMSK,1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	32.33
836.6	3	32.32
848.8	3	32.58

##### **EGPRS(8PSK,1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
824.2	6	26.52
836.6	6	26.73
848.8	6	26.80

Note: Expanded measurement uncertainty is  $U = 0.49\text{dB}$ ,  $k = 1.96$

**PCS1900**

	Power step	Nominal Peak output power (dBm)
GSM	0	30dBm(1W)
GPRS	3	30dBm(1W)
EGPRS	5	26dBm(0.4W)

**Measurement result****GSM(GMSK)**

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	29.84
1880.0	0	29.13
1909.8	0	29.93

**GPRS(GMSK,1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	29.87
1880.0	3	29.11
1909.8	3	29.95

**EGPRS(8PSK,1Slot)**

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	5	26.24
1880.0	5	25.64
1909.8	5	26.17

Note: Expanded measurement uncertainty is  $U = 0.49\text{dB}$ ,  $k = 1.96$

**A.1.3 Radiated**

**A.1.3.1 Description**


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."


Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

**A.1.3.2 Method of Measurement**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

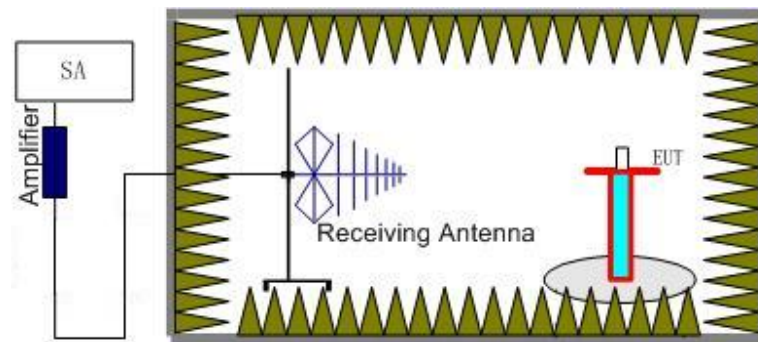

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

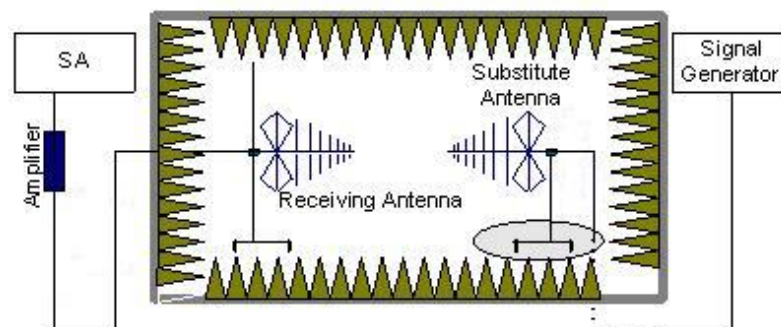

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the



receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain(dBi) ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

**GSM 850-ERP 22.913(a)**

**Limits**

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

**Measurement result**

**Upper antenna**

**GSM 850**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
<b>824.20</b>	<b>-2.55</b>	<b>-33.60</b>	<b>-0.79</b>	<b>2.15</b>	<b>28.11</b>	<b>38.45</b>	<b>H</b>
836.60	-2.76	-33.50	-0.74	2.15	27.85	38.45	H
848.80	-3.04	-33.50	-0.73	2.15	27.57	38.45	H

**GPRS 850**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-4.52	-33.60	-0.79	2.15	26.13	38.45	H
836.60	-4.64	-33.50	-0.74	2.15	25.97	38.45	H
848.80	-4.93	-33.50	-0.73	2.15	25.69	38.45	H

**EGPRS-8PSK 850**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-8.62	-33.60	-0.79	2.15	22.03	38.45	H
836.60	-8.83	-33.50	-0.74	2.15	21.78	38.45	H
848.80	-8.99	-33.50	-0.73	2.15	21.63	38.45	H





**Lower antenna**  
**GSM 850**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-3.43	-33.60	-0.79	2.15	27.23	38.45	H
836.60	-2.81	-33.50	-0.74	2.15	27.80	38.45	H
848.80	-3.61	-33.50	-0.73	2.15	27.01	38.45	H

**GPRS 850**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-4.56	-33.60	-0.79	2.15	26.10	38.45	H
836.60	-4.16	-33.50	-0.74	2.15	26.45	38.45	H
848.80	-4.74	-33.50	-0.73	2.15	25.88	38.45	H

**EGPRS-8PSK 850**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-8.63	-33.60	-0.79	2.15	22.03	38.45	H
836.60	-8.14	-33.50	-0.74	2.15	22.47	38.45	H
848.80	-8.87	-33.50	-0.73	2.15	21.75	38.45	H

Frequency: 824.20MHz

Peak ERP(dBm)=P<sub>Mea</sub>(-2.55dBm)-(P<sub>ci</sub>+P<sub>Ag</sub>)(-33.60dB)+Ga(-0.79dB)-2.15dB=28.11dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.82dB(30MHz-3GHz)/3.06dB(3GHz-18GHz)/2.40dB(18GHz-40GHz), k = 2

**Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.**

**PCS1900-EIRP 24.232(c)****Limits**

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

**Measurement result****Upper antenna****GSM 1900**

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-10.93	-29.30	8.10	24.32	33.00	V
1880.00	-10.68	-29.40	8.10	24.67	33.00	V
1909.80	-11.14	-29.30	8.10	24.11	33.00	V

**GPRS 1900**

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-11.64	-29.40	8.10	23.71	33.00	V
1880.00	-11.31	-29.30	8.10	23.94	33.00	V
1909.80	-11.64	-29.30	8.10	23.61	33.00	V

**EGPRS-8PSK 1900**

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-16.18	-29.40	8.10	19.17	33.00	V
1880.00	-15.81	-29.30	8.10	19.44	33.00	V
1909.80	-16.22	-29.30	8.10	19.03	33.00	V

**Lower antenna****GSM 1900**

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-9.32	-29.30	8.10	25.93	33.00	V
1880.00	-9.01	-29.40	8.10	26.34	33.00	V
<b>1909.80</b>	<b>-8.72</b>	<b>-29.30</b>	<b>8.10</b>	<b>26.53</b>	<b>33.00</b>	<b>V</b>

**GPRS 1900**

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-10.94	-29.40	8.10	24.41	33.00	V
1880.00	-10.56	-29.30	8.10	24.69	33.00	V
1909.80	-10.48	-29.30	8.10	24.77	33.00	V

**EGPRS-8PSK 1900**

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-15.20	-29.40	8.10	20.15	33.00	V
1880.00	-14.68	-29.30	8.10	20.57	33.00	V
1909.80	-14.62	-29.30	8.10	20.63	33.00	V

Frequency: 1909.80MHz

Peak EIRP(dBm)= PMea(8.72dBm) -(Pcl+PAg)(-29.30dB)+Ga (8.10dB) =26.53dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

Note: The maximum value of expanded measurement uncertainty for this test item is

$U = 2.82\text{dB}(30\text{MHz}-3\text{GHz})/3.06\text{dB}(3\text{GHz}-18\text{GHz})/2.40\text{dB}(18\text{GHz}-40\text{GHz}), k = 2$

**Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.**

## A.2 FIELD STRENGTH OF SPURIOUS RADIATION

### Reference


FCC: CFR 2.1053, 22.917, 24.238.

### A.2.1 Measurement Method


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

### The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

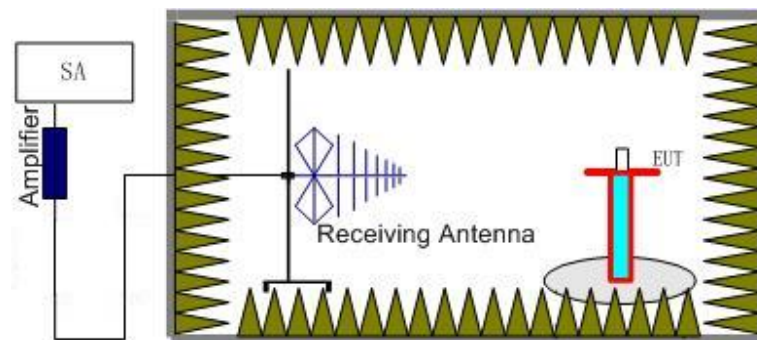

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

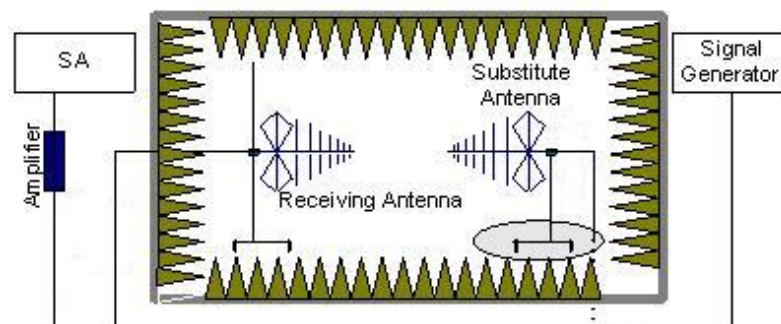

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .



### **A.2.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**A.2.4 Measurement Results Table**

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

**A.2.5 Sweep Table**

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	

**Upper antenna****GSM Mode Channel 128/824.2MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
7041.50	-48.67	1.80	12.00	-40.62	-13.00	V
9226.00	-47.07	2.10	11.60	-39.72	-13.00	H
9300.50	-47.48	2.00	11.60	-40.03	-13.00	H
9433.00	-48.21	2.10	11.60	-40.86	-13.00	H
9476.00	-48.25	2.10	11.60	-40.90	-13.00	V
9733.00	-47.69	2.20	11.20	-40.84	-13.00	H

**GSM Mode Channel 190/836.6MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
7084.00	-49.12	1.80	12.00	-41.07	-13.00	V
9104.00	-48.45	2.20	11.60	-41.20	-13.00	H
9226.50	-47.62	2.10	11.60	-40.27	-13.00	H
9296.50	-47.06	2.00	11.60	-39.61	-13.00	H
9429.50	-47.97	2.10	11.60	-40.62	-13.00	H
9475.00	-48.46	2.10	11.60	-41.11	-13.00	V

**GSM Mode Channel 251/848.8MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
8431.50	-48.21	1.80	11.30	-40.86	-13.00	H
9149.00	-48.02	2.10	11.60	-40.67	-13.00	H
9226.00	-47.53	2.10	11.60	-40.18	-13.00	H
9301.00	-47.77	2.00	11.60	-40.32	-13.00	H
9423.00	-48.79	2.10	11.60	-41.44	-13.00	H
9475.00	-48.40	2.10	11.60	-41.05	-13.00	V



**GSM Mode Channel 512/1850.2MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16994.38	-41.50	2.90	16.50	-27.90	-13.00	H
17112.50	-40.51	2.90	14.50	-28.91	-13.00	H
17341.25	-39.97	3.20	14.50	-28.67	-13.00	H
17510.62	-36.54	2.90	12.80	-26.64	-13.00	H
17583.75	-36.39	3.30	12.80	-26.89	-13.00	H
17774.38	-37.25	3.60	12.80	-28.05	-13.00	H

**GSM Mode Channel 661/1880.0MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16979.38	-41.96	2.90	16.50	-28.36	-13.00	H
17211.25	-40.55	2.90	14.50	-28.95	-13.00	H
17298.75	-39.86	3.20	14.50	-28.56	-13.00	H
17520.62	-36.85	2.90	12.80	-26.95	-13.00	H
17594.38	-36.65	3.30	12.80	-27.15	-13.00	H
17770.00	-37.15	3.60	12.80	-27.95	-13.00	H

**GSM Mode Channel 810/1909.8MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16938.12	-42.03	2.90	16.50	-28.43	-13.00	H
17211.25	-40.49	2.90	14.50	-28.89	-13.00	H
17340.62	-39.67	3.20	14.50	-28.37	-13.00	H
17507.50	-37.47	2.90	12.80	-27.57	-13.00	H
17590.00	-36.93	3.30	12.80	-27.43	-13.00	H
17825.00	-37.36	3.60	12.80	-28.16	-13.00	H

**Lower antenna****GSM Mode Channel 128/824.2MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
8473.50	-48.45	1.80	11.30	-41.10	-13.00	H
9150.50	-47.43	2.10	11.60	-40.08	-13.00	H
9223.00	-47.52	2.10	11.60	-40.17	-13.00	H
9295.00	-46.96	2.00	11.60	-39.51	-13.00	H
9424.50	-46.67	2.10	11.60	-39.32	-13.00	H
9474.00	-47.75	2.10	11.60	-40.40	-13.00	V

**GSM Mode Channel 190/836.6MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
7192.50	-49.23	1.80	12.00	-41.18	-13.00	V
8801.00	-49.03	1.90	12.00	-41.08	-13.00	V
9049.00	-48.07	2.20	11.60	-40.82	-13.00	V
9134.00	-48.35	2.10	11.60	-41.00	-13.00	V
9303.00	-48.57	2.00	11.60	-41.12	-13.00	V
9366.00	-48.61	2.00	11.60	-41.16	-13.00	V

**GSM Mode Channel 251/848.8MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
8429.50	-47.89	1.80	11.30	-40.54	-13.00	H
8575.00	-48.78	2.10	12.00	-41.03	-13.00	H
9100.00	-47.89	2.20	11.60	-40.64	-13.00	H
9223.00	-47.54	2.10	11.60	-40.19	-13.00	H
9295.00	-47.43	2.00	11.60	-39.98	-13.00	H
9474.00	-47.83	2.10	11.60	-40.48	-13.00	V

**GSM Mode Channel 512/1850.2MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16965.62	-41.39	2.90	16.50	-27.79	-13.00	H
17120.62	-40.87	2.90	14.50	-29.27	-13.00	H
17353.75	-39.88	3.20	14.50	-28.58	-13.00	H
17501.25	-36.74	2.90	12.80	-26.84	-13.00	H
17569.38	-35.88	3.30	12.80	-26.38	-13.00	H
17790.62	-37.08	3.60	12.80	-27.88	-13.00	H

**GSM Mode Channel 661/1880.0MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16943.12	-40.97	2.90	16.50	-27.37	-13.00	H
17120.62	-40.17	2.90	14.50	-28.57	-13.00	H
17277.50	-39.32	3.20	14.50	-28.02	-13.00	H
17504.38	-36.63	2.90	12.80	-26.73	-13.00	H
17594.38	-36.24	3.30	12.80	-26.74	-13.00	H
17836.88	-36.90	3.60	12.80	-27.70	-13.00	H

**GSM Mode Channel 810/1909.8MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16955.62	-41.93	2.90	16.50	-28.33	-13.00	H
17211.88	-40.51	2.90	14.50	-28.91	-13.00	H
17222.50	-39.92	3.20	14.50	-28.62	-13.00	H
17483.12	-38.10	2.90	14.50	-26.50	-13.00	H
17580.62	-36.87	3.30	12.80	-27.37	-13.00	H
17837.50	-37.28	3.60	12.80	-28.08	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is

$$U = 2.82\text{dB}(30\text{MHz}-3\text{GHz})/3.06\text{dB}(3\text{GHz}-18\text{GHz})/2.40\text{dB}(18\text{GHz}-40\text{GHz}), k = 2$$

### **A.3 FREQUENCY STABILITY**

#### **Reference**

##### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMW500

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments e-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

**A.3.2 Measurement results**
**GSM 850**
**Frequency Error vs Voltage**

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.89	824.032	848.964		
50				-1.13	0.0027
40				1.16	0.0028
30				0.68	0.0016
10				1.39	0.0033
0				0.36	0.0008
-10				0.78	0.0019
-20				1.32	0.0032
-30				0.13	0.0003

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	824.032	848.964	3.39	0.0081
4.48				1.16	0.0028

 Expanded measurement uncertainty is 10Hz,  $k = 2$ 
**PCS 1900**
**Frequency Error vs Voltage**

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.89	1850.030	1909.962		
50				6.26	0.0067
40				2.68	0.0029
30				5.26	0.0056
10				6.33	0.0067
0				4.23	0.0045
-10				7.14	0.0076
-20				4.88	0.0052
-30				6.26	0.0067

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	1850.030	1909.962	6.36	0.0068
4.48				3.16	0.0034

 Expanded measurement uncertainty is 10Hz,  $k = 2$



#### **A.4 OCCUPIED BANDWIDTH**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.




**GSM850 (99% BW)**

**GSM**


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)
824.2	243.370
836.6	243.004
848.8	241.973

**GSM850**

**Channel 128-Occupied Bandwidth (99% BW)**

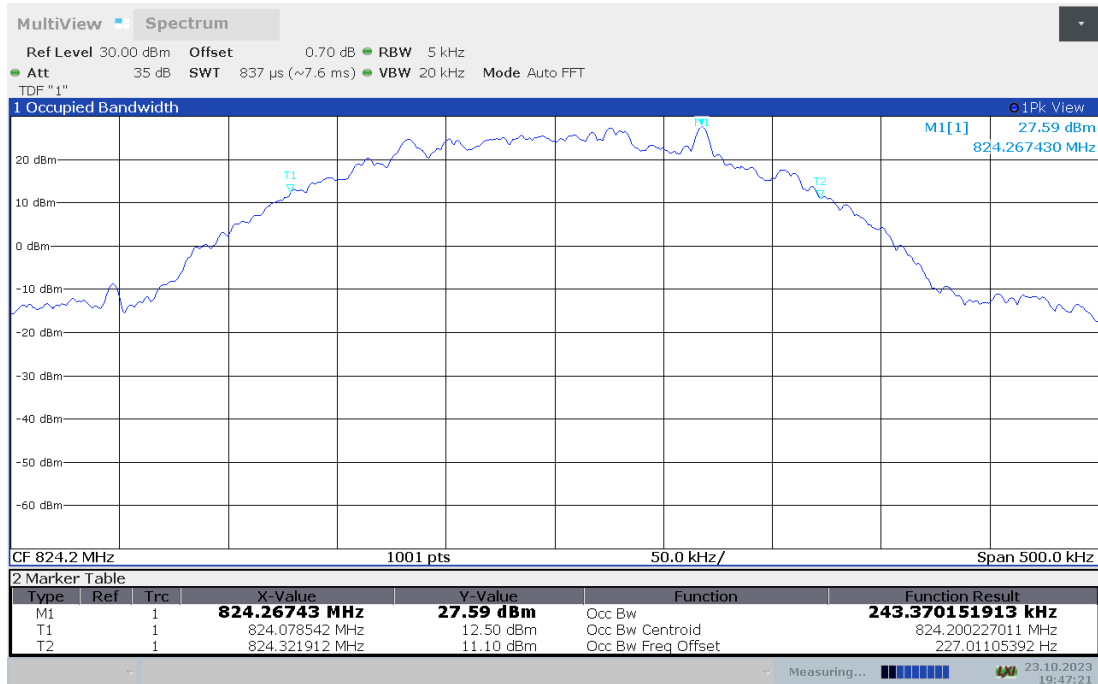


**Channel 190-Occupied Bandwidth (99% BW)**

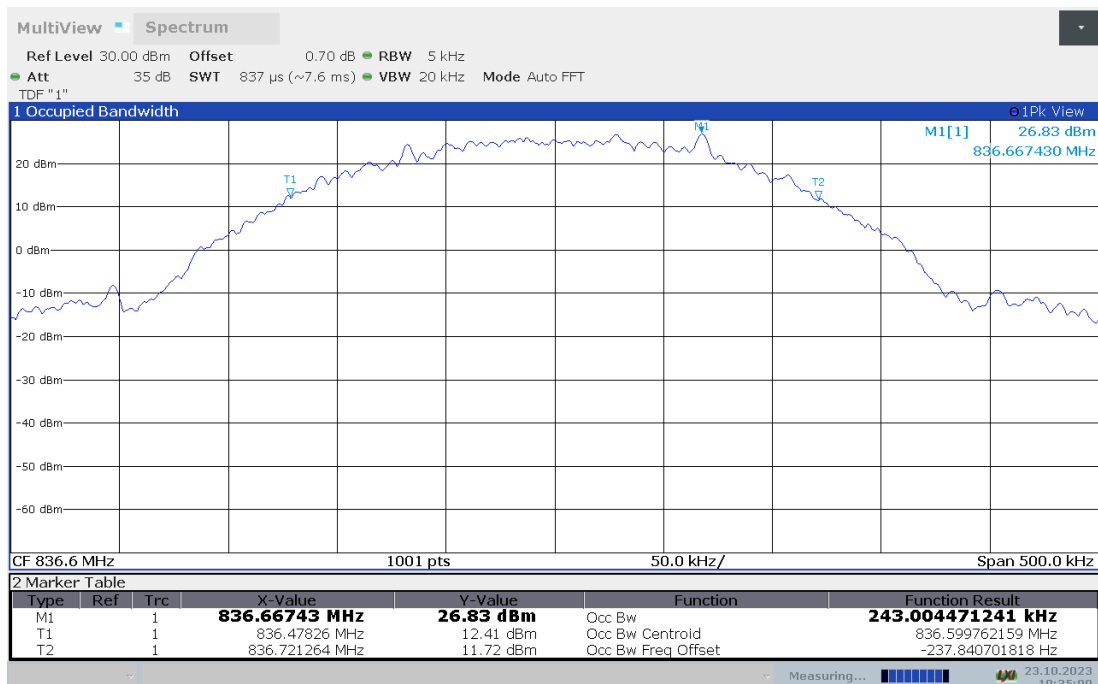



Channel 251-Occupied Bandwidth (99% BW)

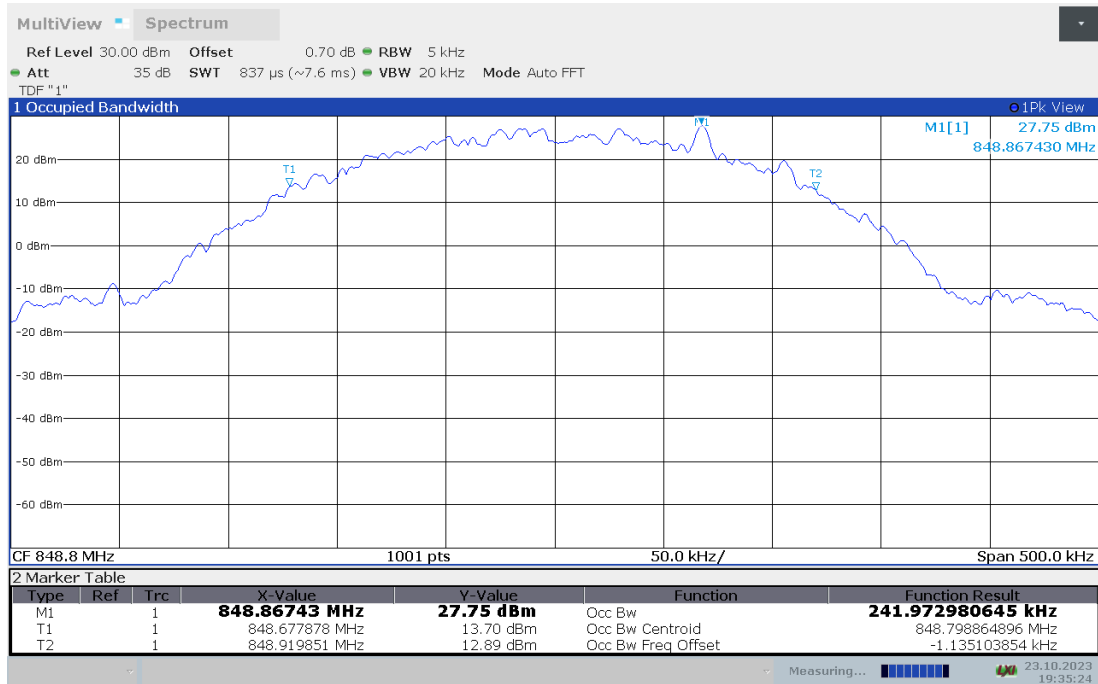






**GSM850 (99% BW)  
GPRS**


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)
824.2	244.020
836.6	244.298
848.8	243.331

**GSM850**

**Channel 128-Occupied Bandwidth (99% BW)**

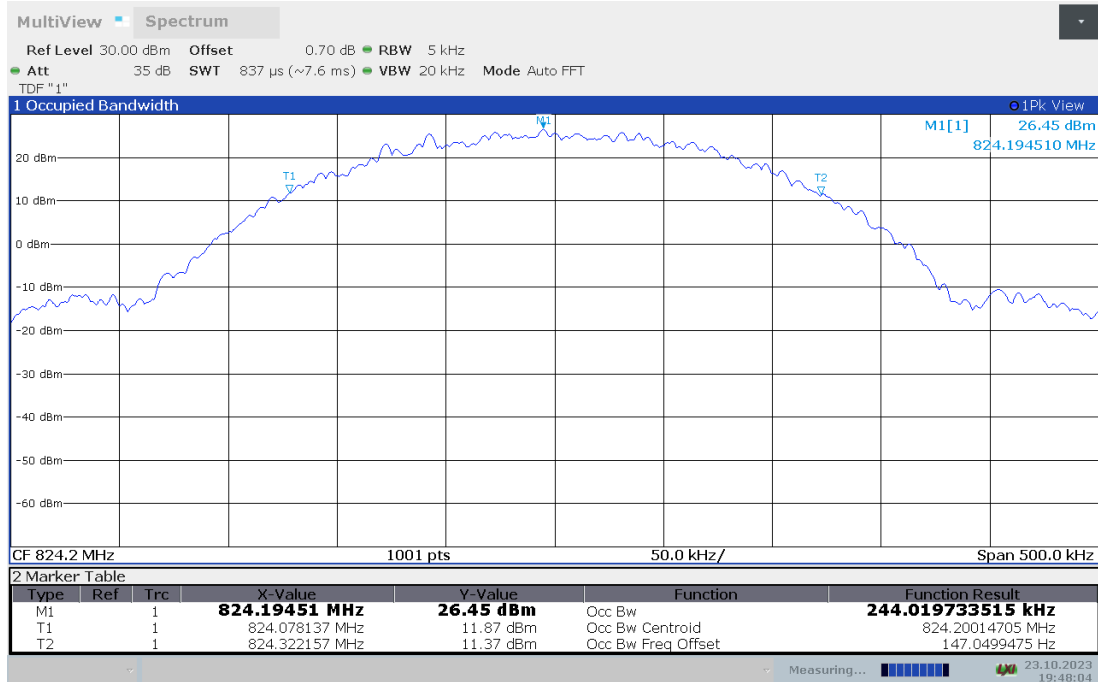


**Channel 190-Occupied Bandwidth (99% BW)**

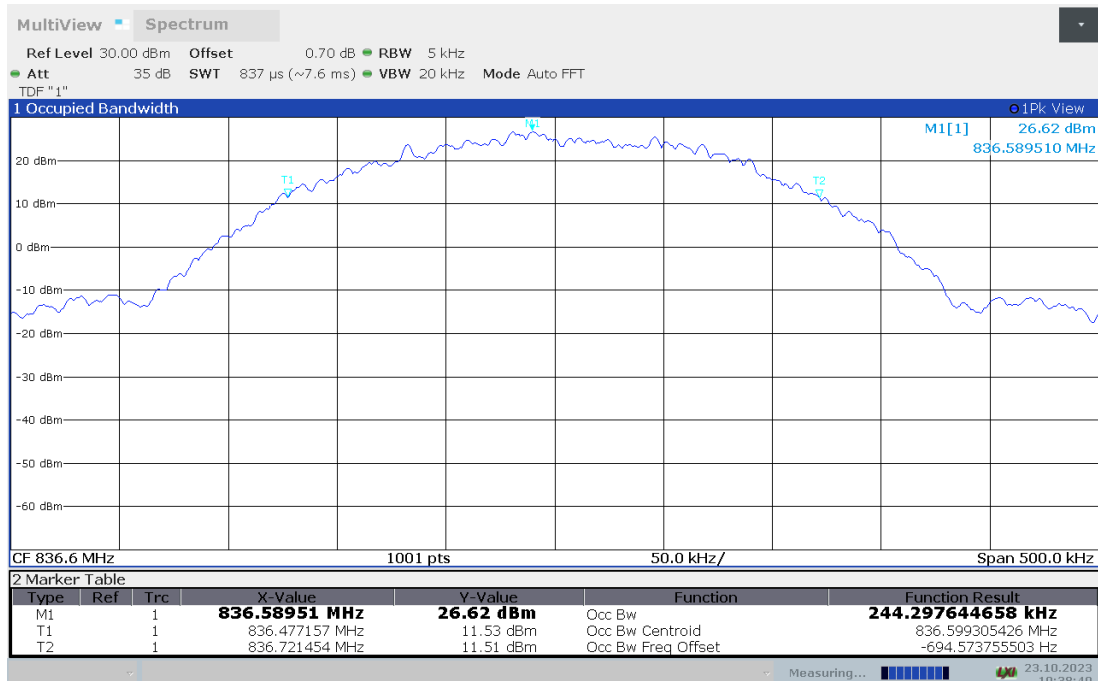



### Channel 251-Occupied Bandwidth (99% BW)

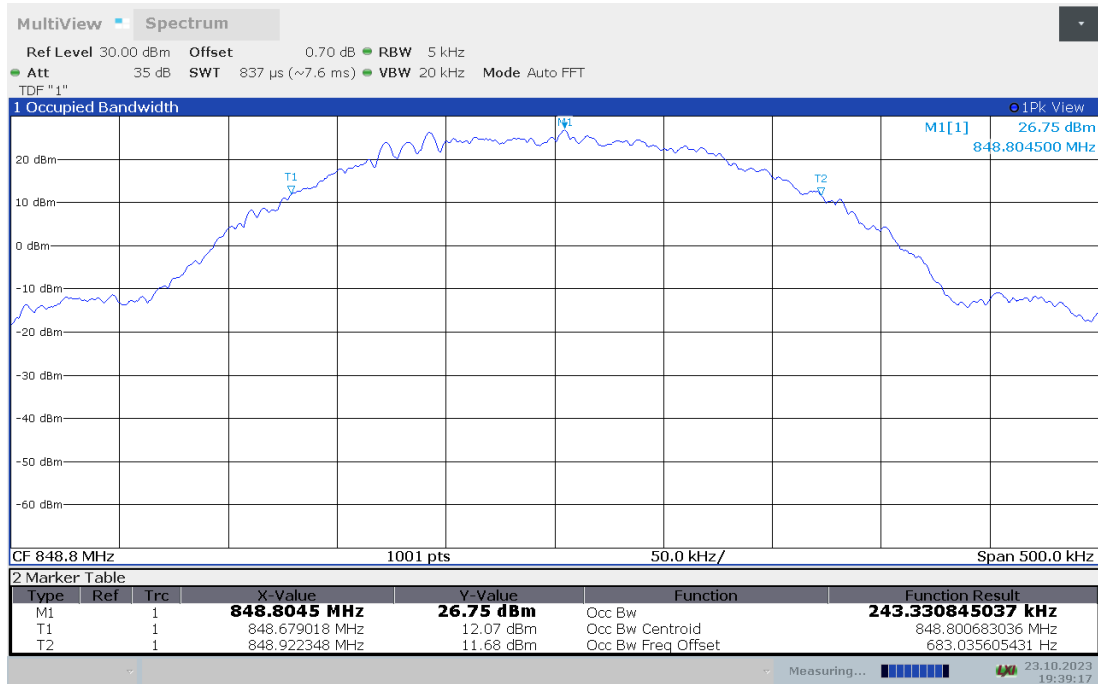




**GSM850 (99% BW)  
EGPRS**


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)
824.2	245.772
836.6	247.661
848.8	242.048

**GSM850**

**Channel 128-Occupied Bandwidth (99% BW)**

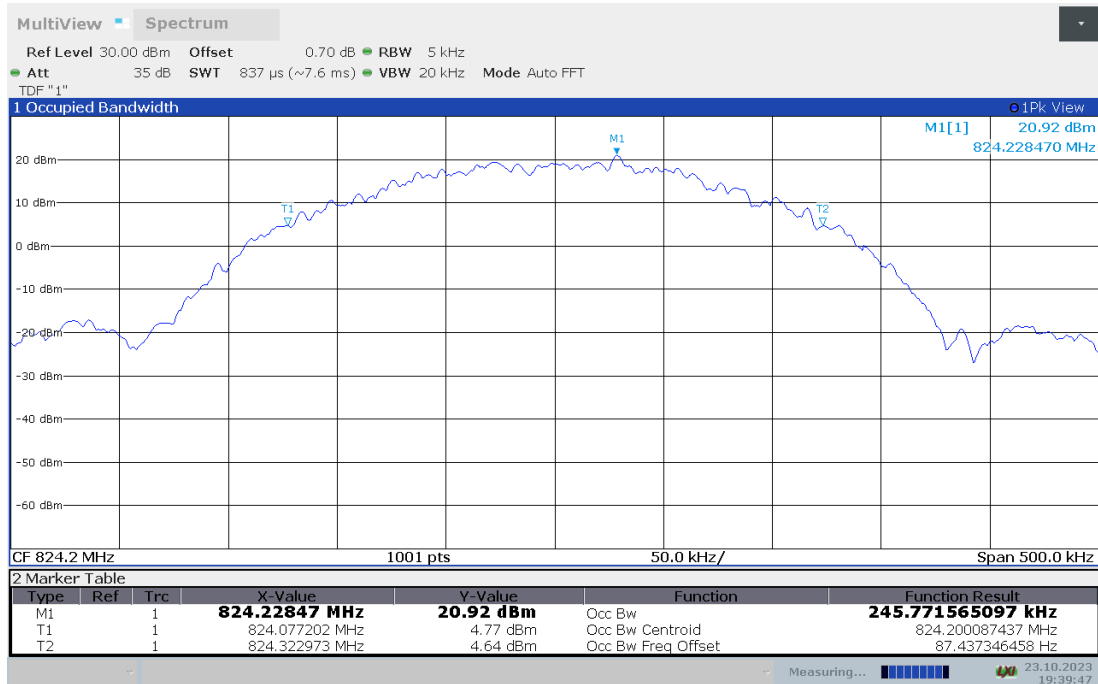


**Channel 190-Occupied Bandwidth (99% BW)**

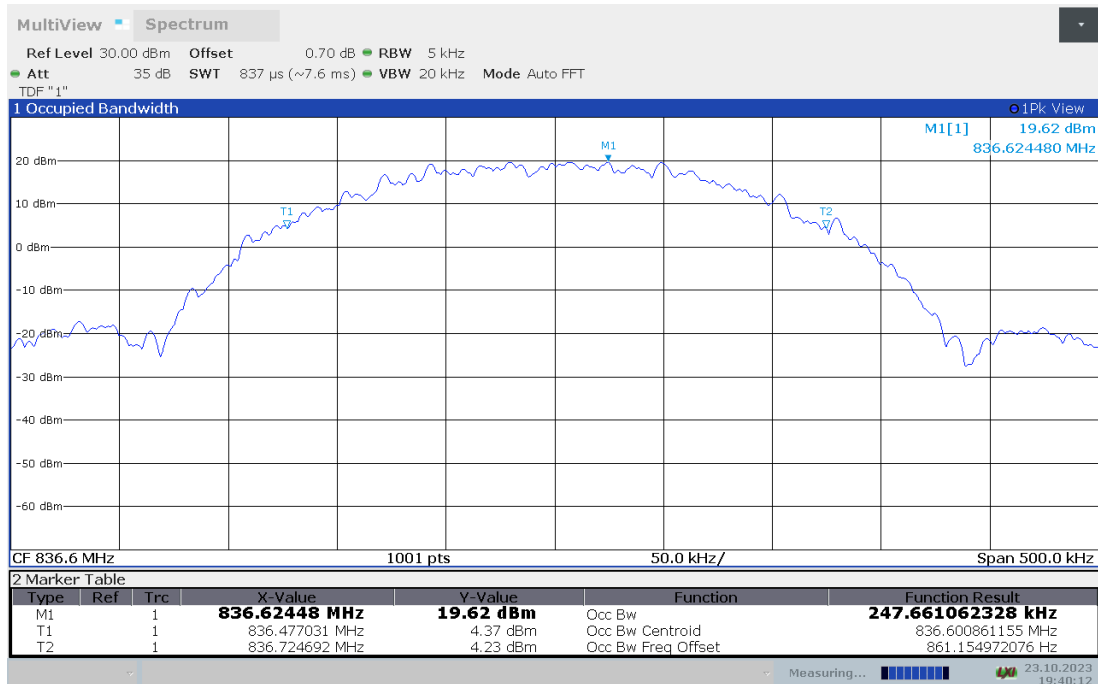



### Channel 251-Occupied Bandwidth (99% BW)

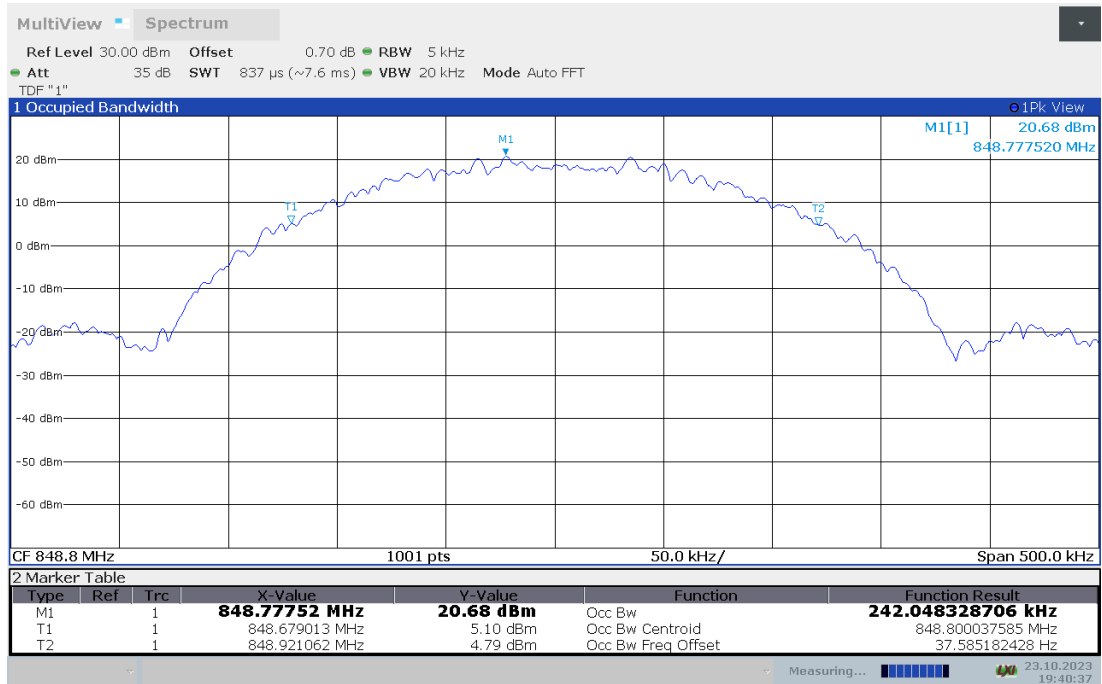




**PCS1900 (99% BW)  
GSM**

Frequency (MHz)	Occupied Bandwidth (99%) (kHz)
1850.2	241.863
1880	243.297
1909.8	244.449

**PCS1900**

**Channel 512-Occupied Bandwidth (99% BW)**

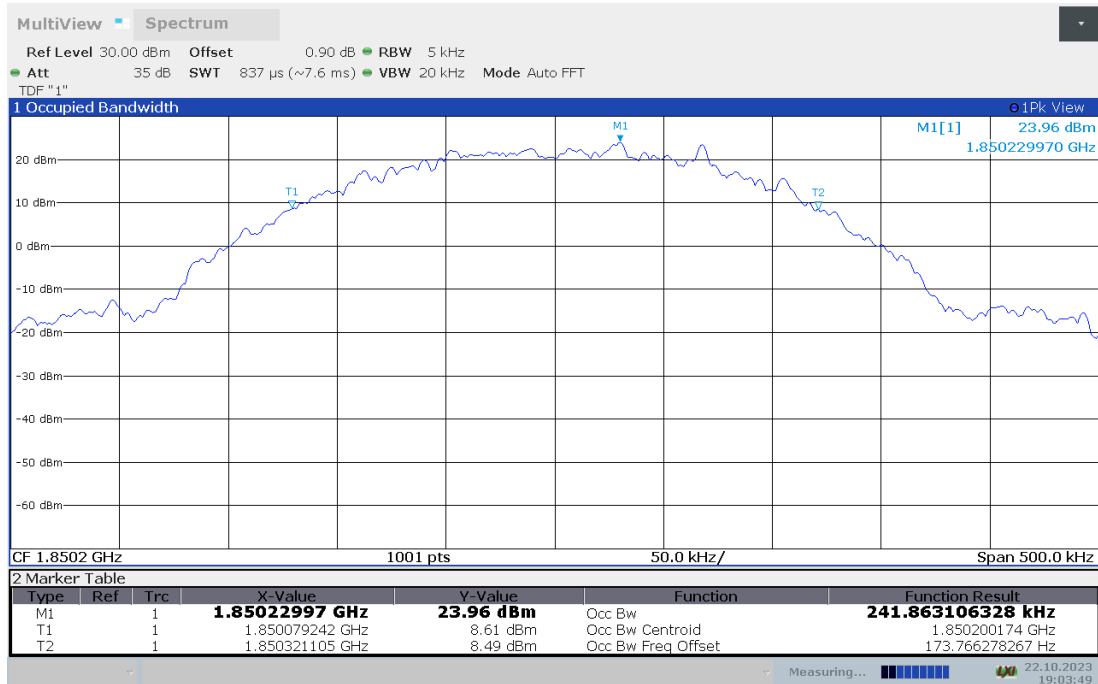


**Channel 661-Occupied Bandwidth (99% BW)**





### Channel 810-Occupied Bandwidth (99% BW)

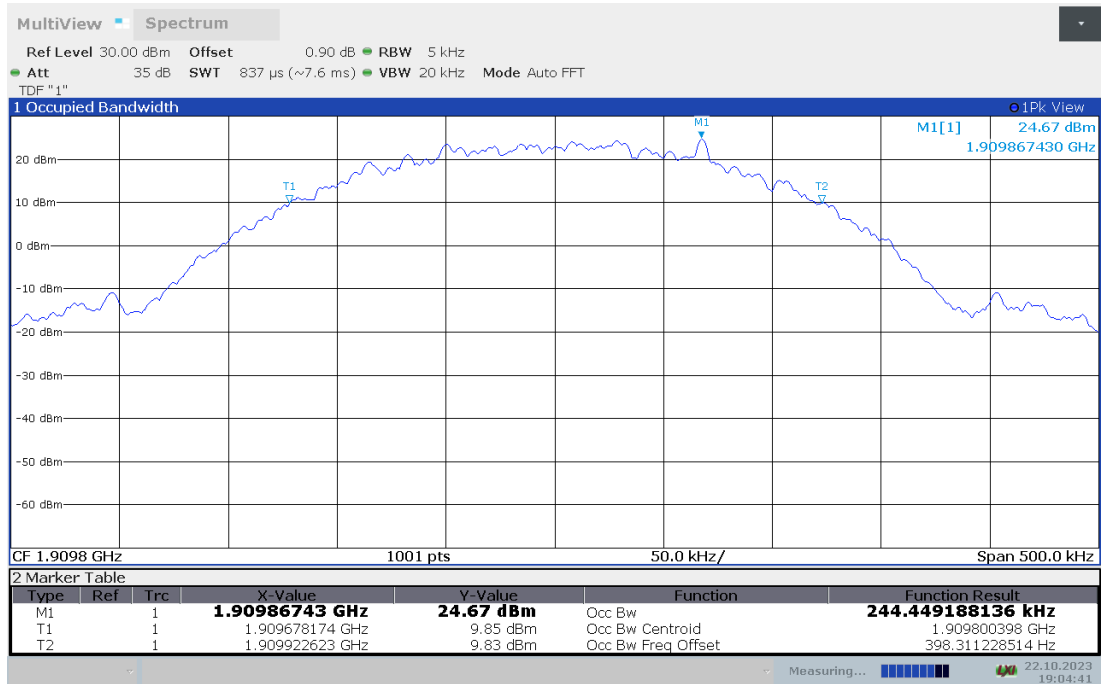




**PCS1900 (99% BW)**  
**GPRS**


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)
1850.2	243.888
1880	241.978
1909.8	244.264

**PCS1900**

**Channel 512-Occupied Bandwidth (99% BW)**

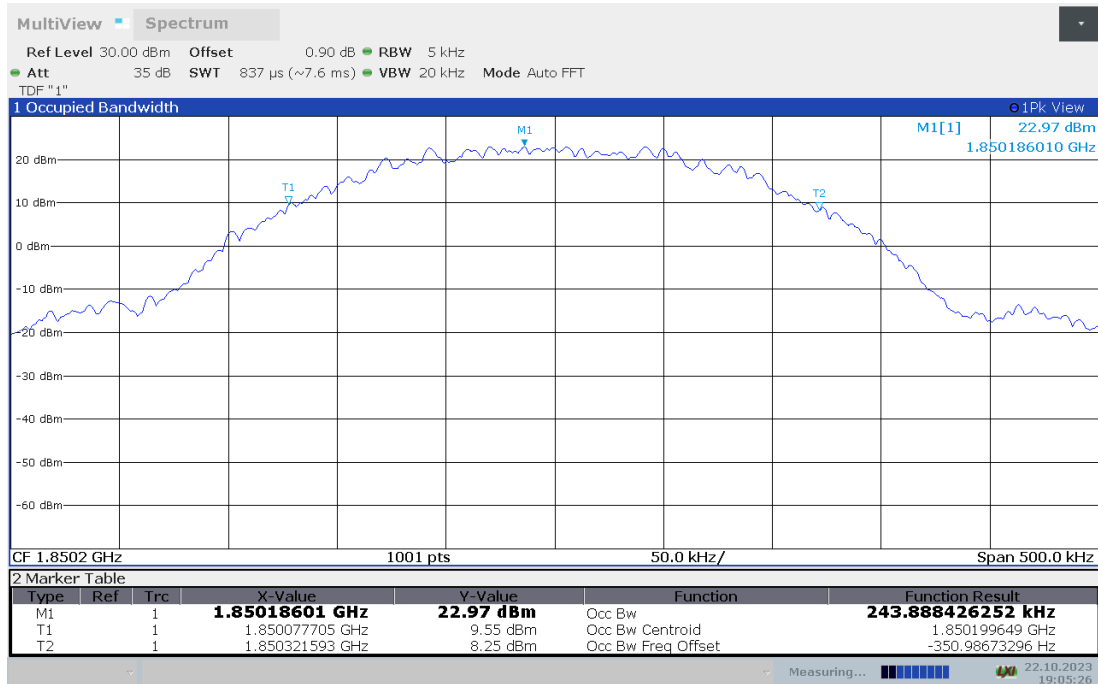


**Channel 661-Occupied Bandwidth (99% BW)**

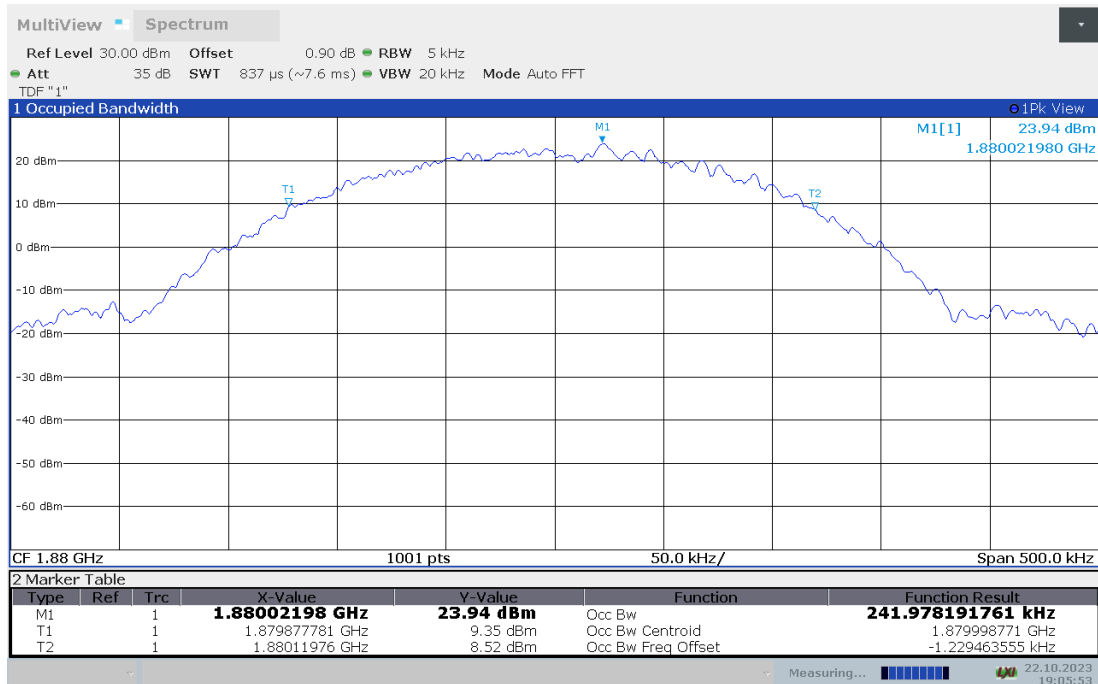



### Channel 810-Occupied Bandwidth (99% BW)

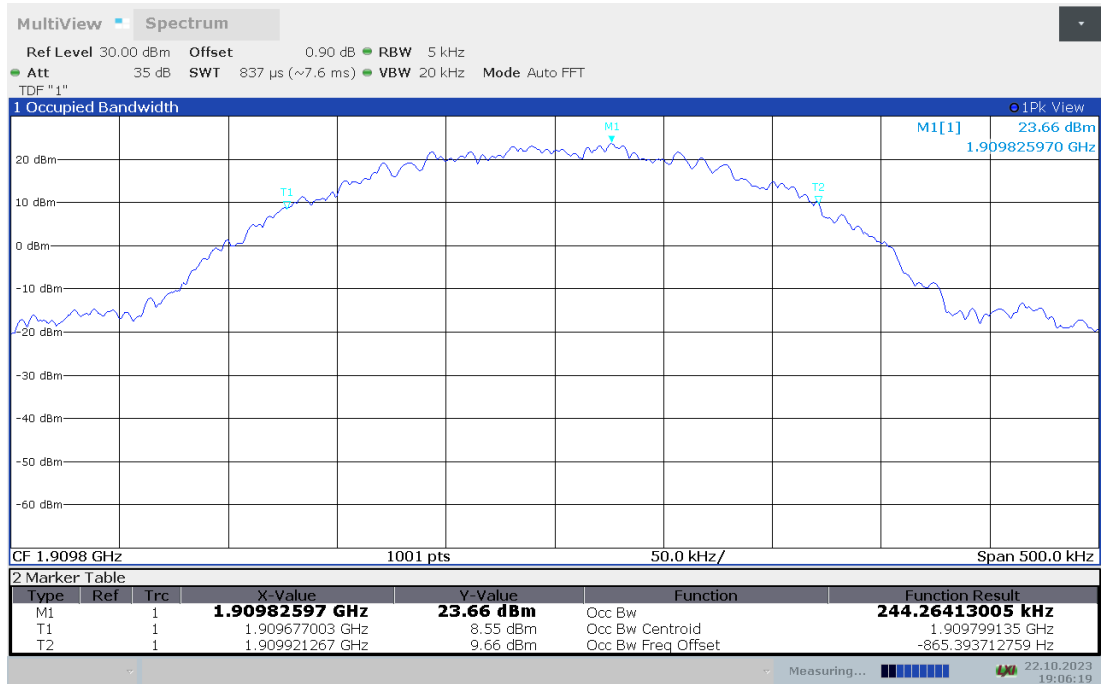






**PCS1900 (99% BW)  
EGPRS**


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)
1850.2	241.718
1880	244.551
1909.8	243.333

**PCS1900**

**Channel 512-Occupied Bandwidth (99% BW)**

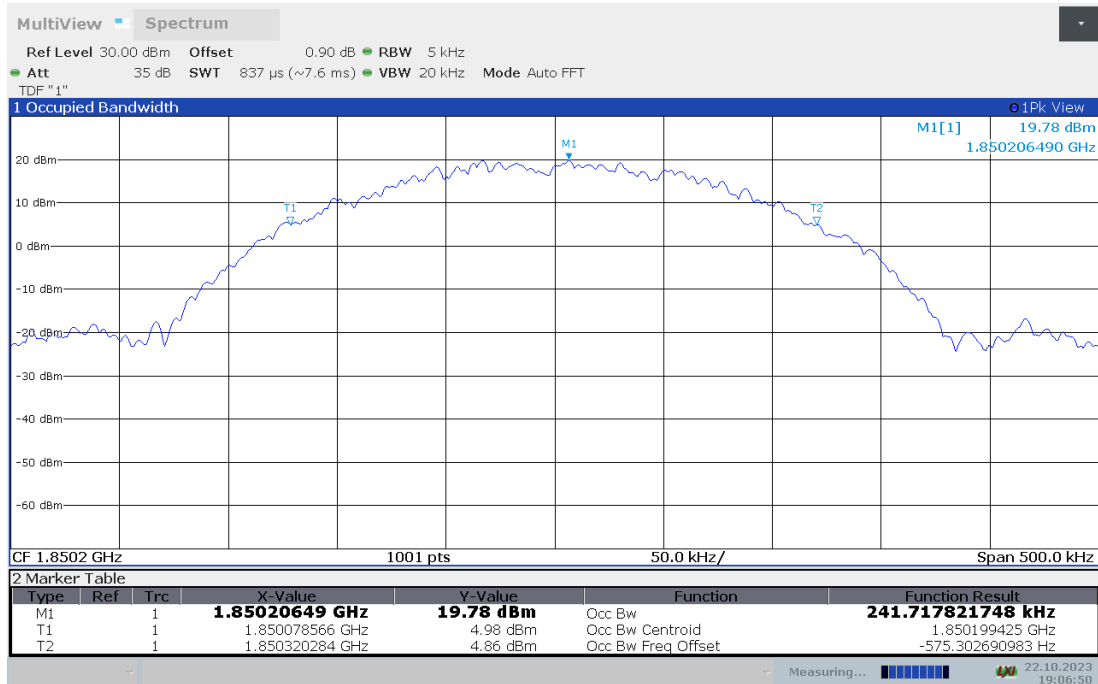


**Channel 661-Occupied Bandwidth (99% BW)**

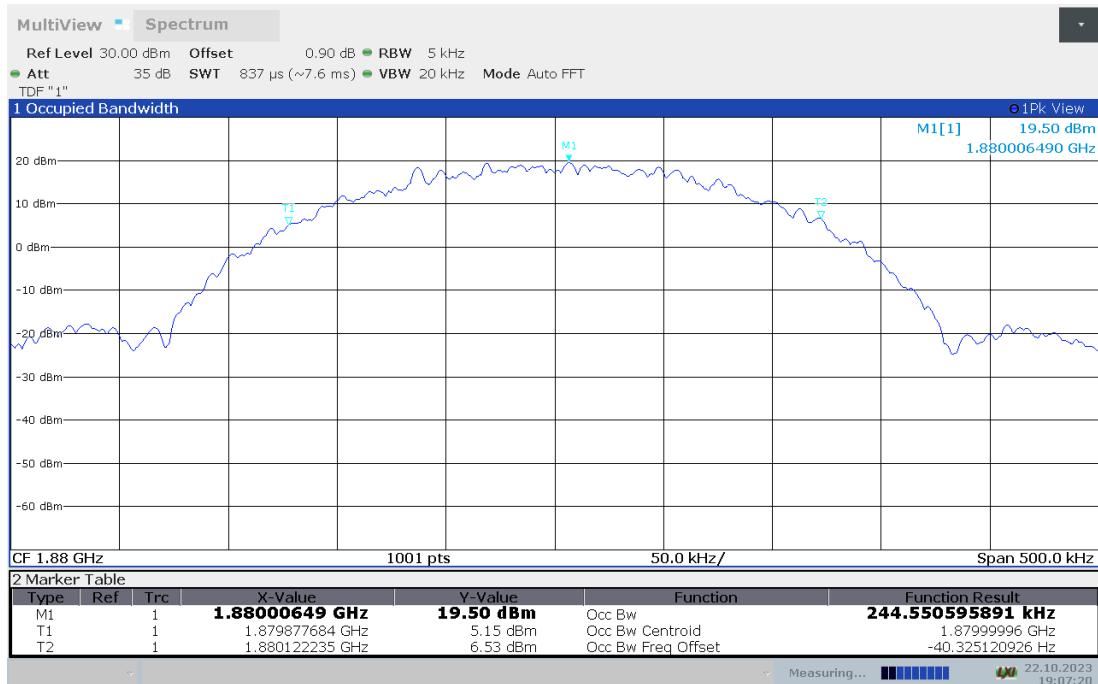



### Channel 810-Occupied Bandwidth (99% BW)

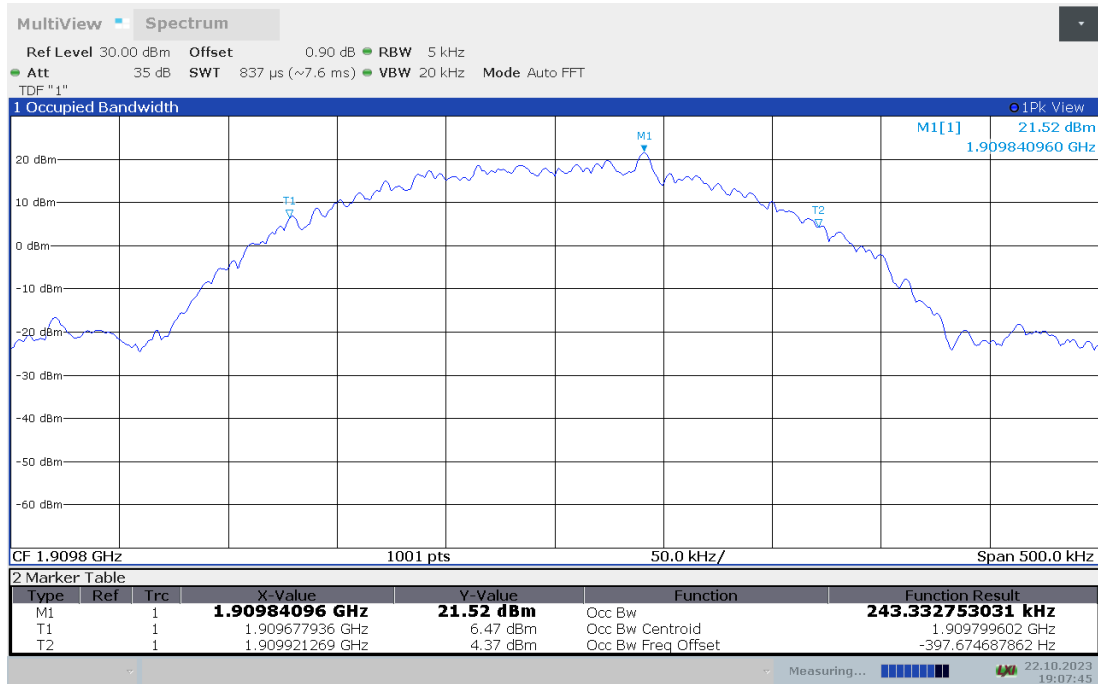

Note: Expanded measurement uncertainty is  $U = 3428\text{Hz}$ ,  $k = 2$

## **A.5 EMISSION BANDWIDTH**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.



**GSM850 (-26dBc BW)**

**GSM**


Frequency (MHz)	Emission Bandwidth (-26dBc BW)(kHz)
824.2	312.690
836.6	311.190
848.8	312.190

**GSM850**

**Channel 128-Emission Bandwidth (-26dBc BW)**




**Channel 190-Emission Bandwidth (-26dBc BW)**

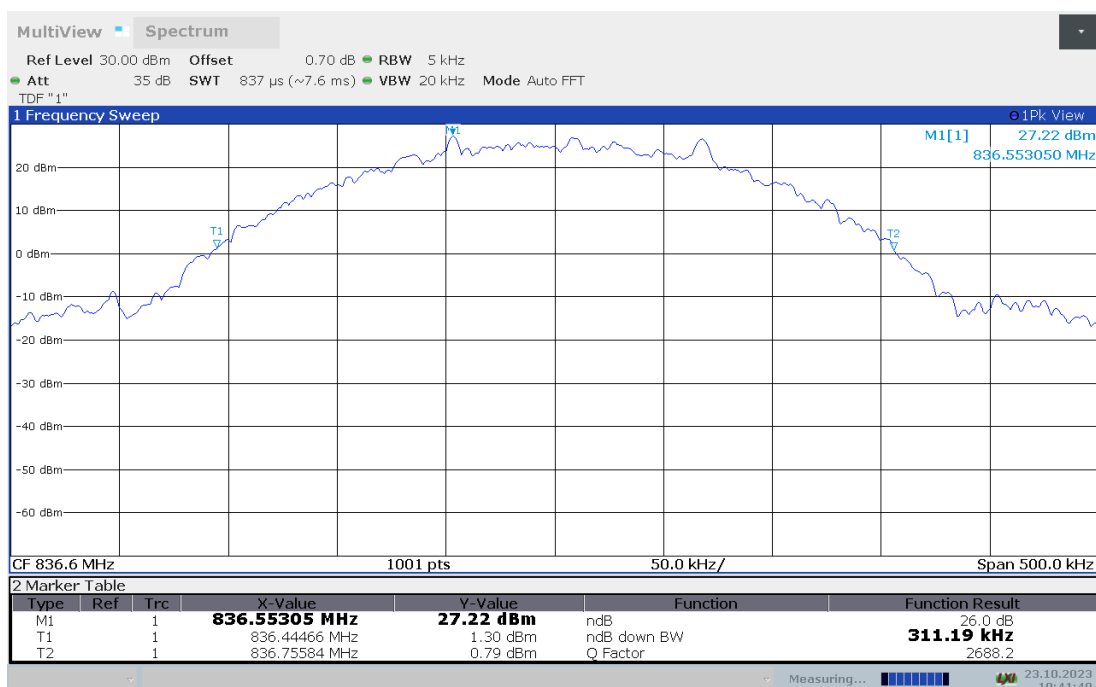



### Channel 251-Emission Bandwidth (-26dBc BW)

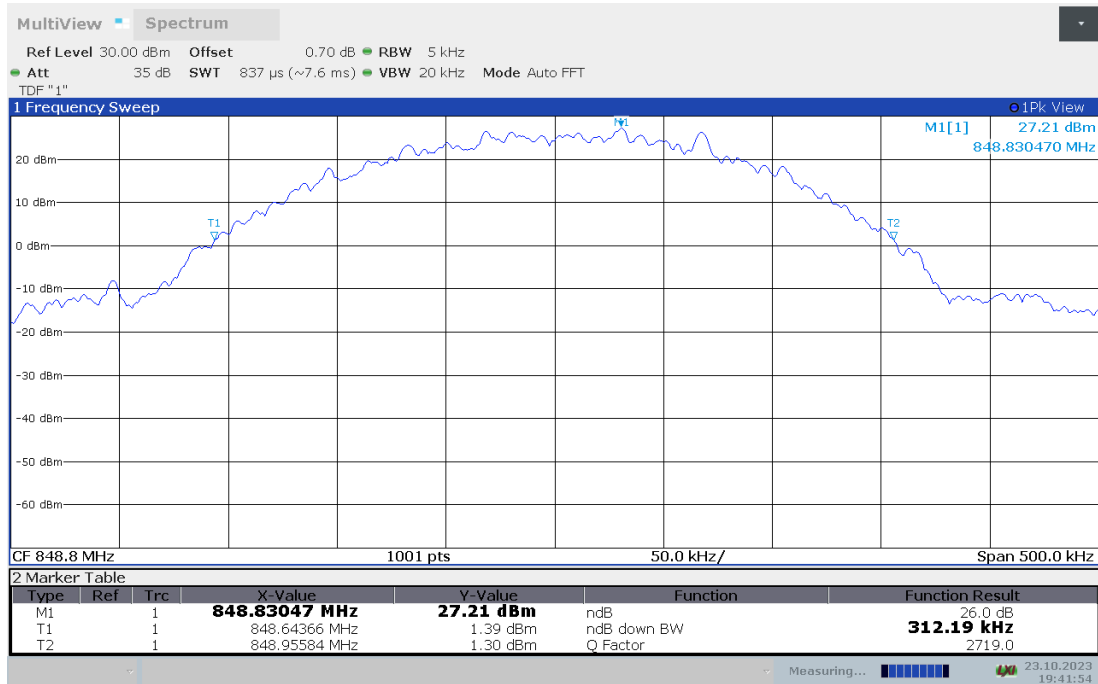




**GSM850 (-26dBc BW)**

**GPRS**


Frequency (MHz)	Emission Bandwidth (-26dBc BW)(kHz)
824.2	316.180
836.6	310.190
848.8	315.680

**GSM850**

**Channel 128-Emission Bandwidth (-26dBc BW)**

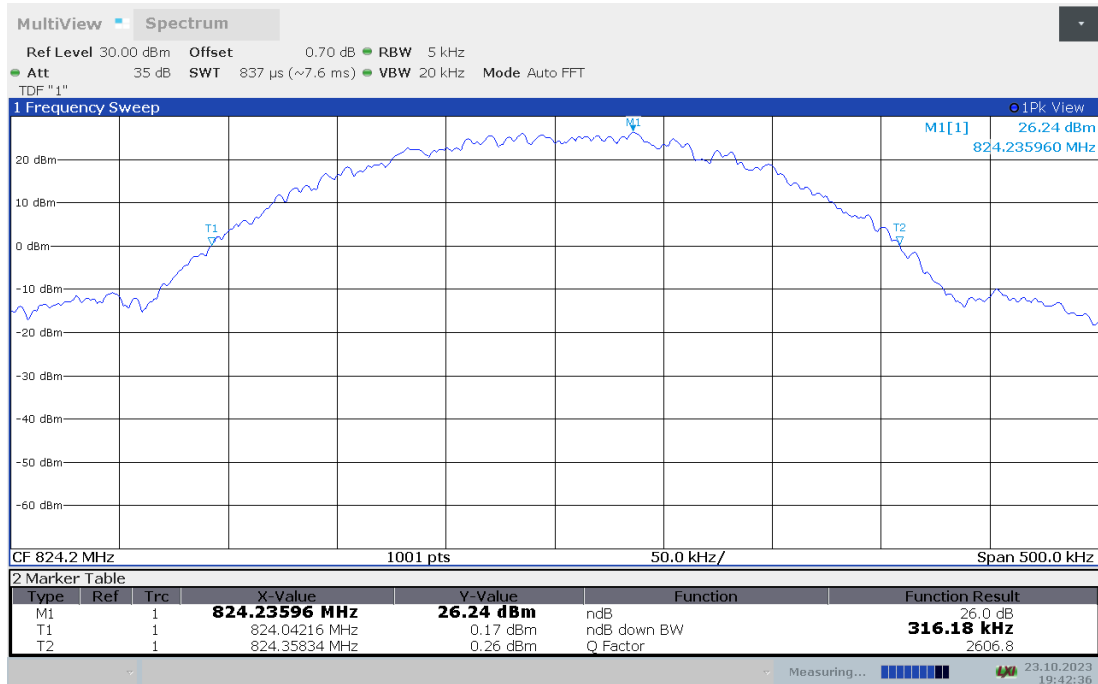


**Channel 190-Emission Bandwidth (-26dBc BW)**

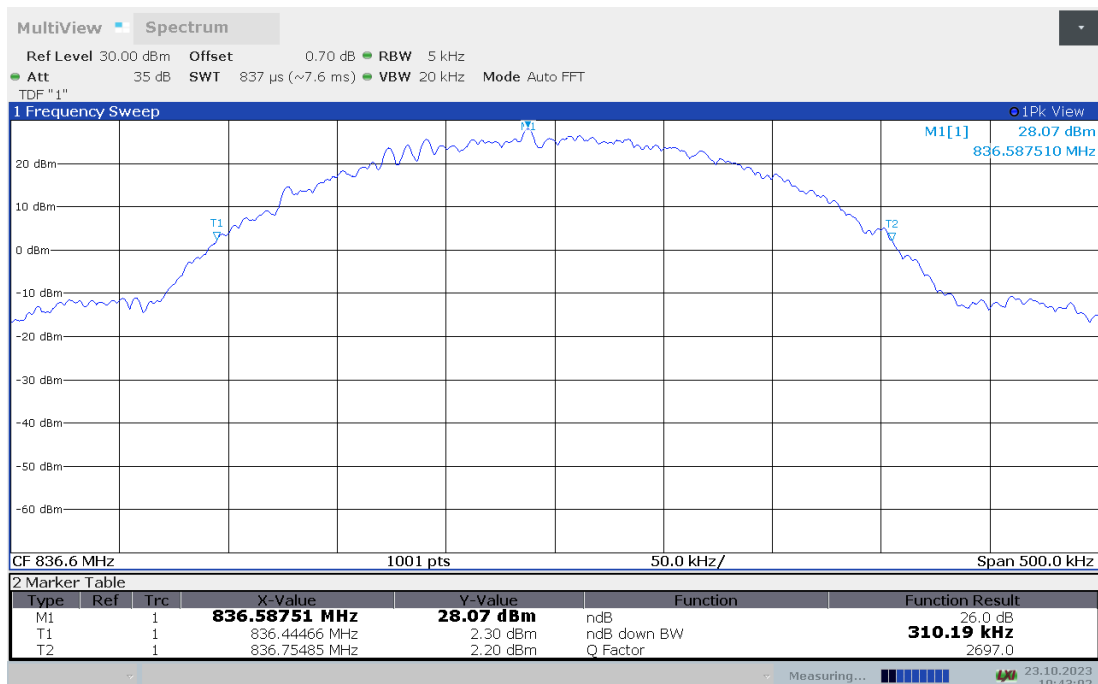



### Channel 251-Emission Bandwidth (-26dBc BW)

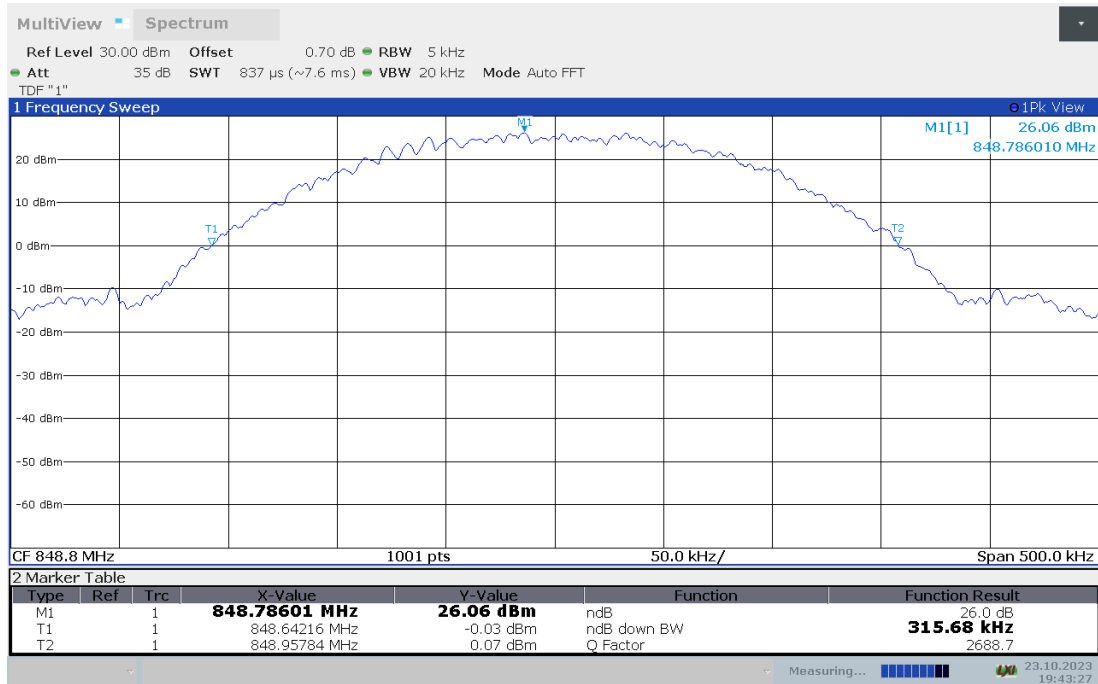




**GSM850 (-26dBc BW)  
EGPRS**


Frequency (MHz)	Emission Bandwidth (-26dBc BW)(kHz)
824.2	310.190
836.6	307.190
848.8	303.700

**GSM850**

**Channel 128-Emission Bandwidth (-26dBc BW)**

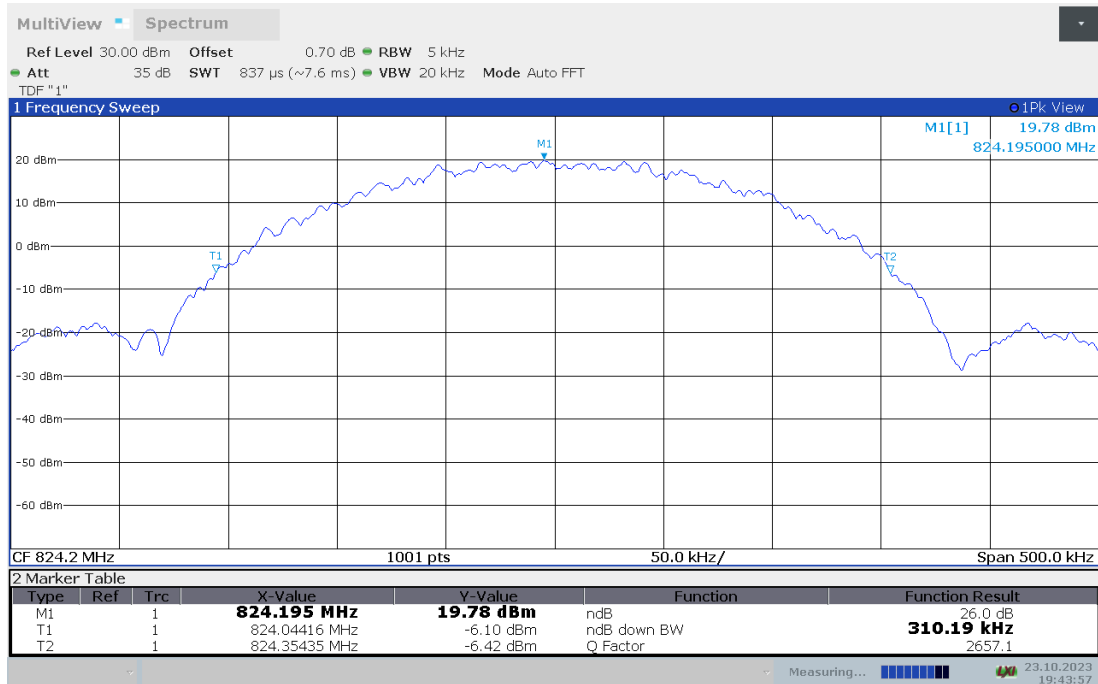


**Channel 190-Emission Bandwidth (-26dBc BW)**

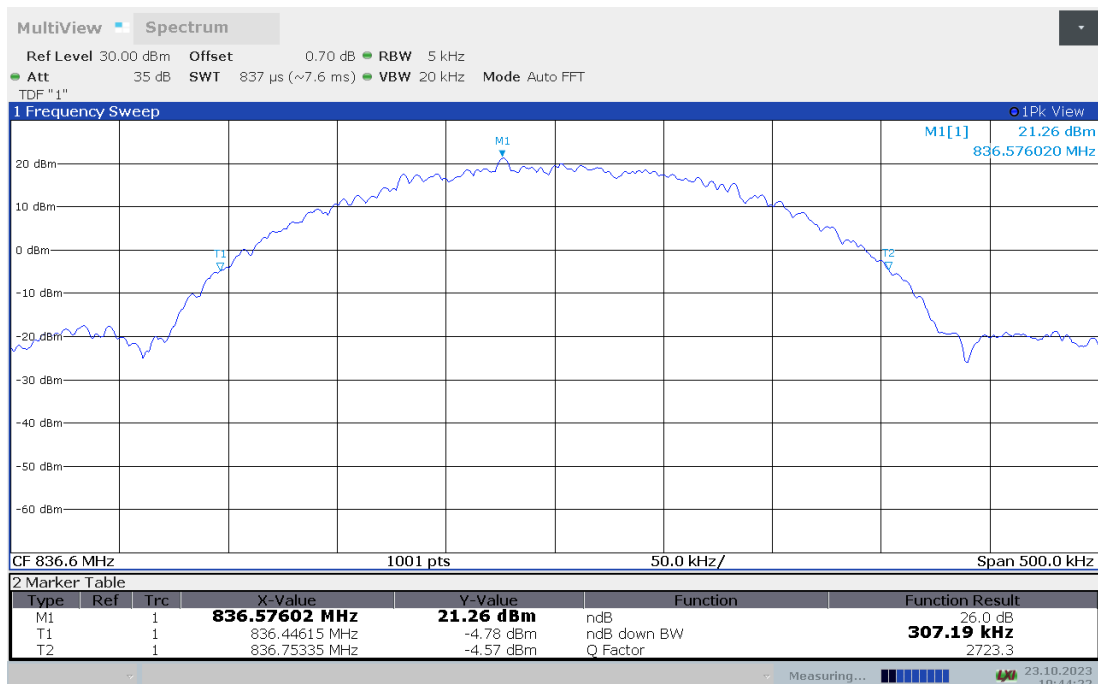





### Channel 251-Emission Bandwidth (-26dBc BW)

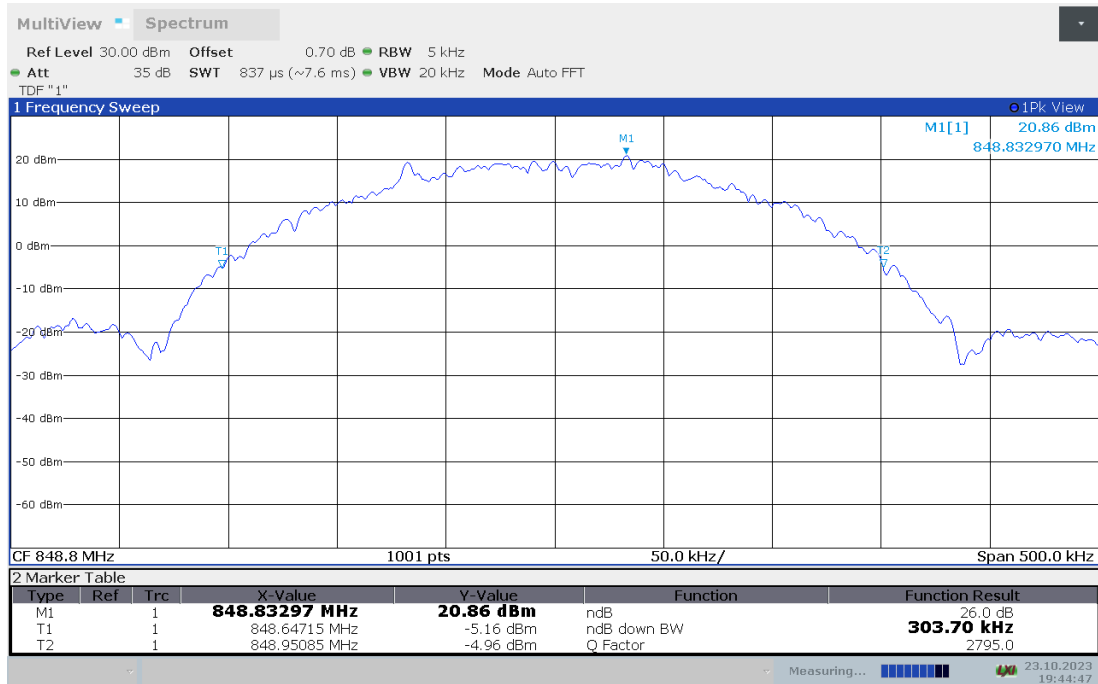




**PCS1900 (-26dBc BW)  
GSM**


Frequency (MHz)	Emission Bandwidth (-26dBc BW)(kHz)
1850.2	313.190
1880	308.690
1909.8	311.690

**PCS1900**

**Channel 512-Emission Bandwidth (-26dBc BW)**

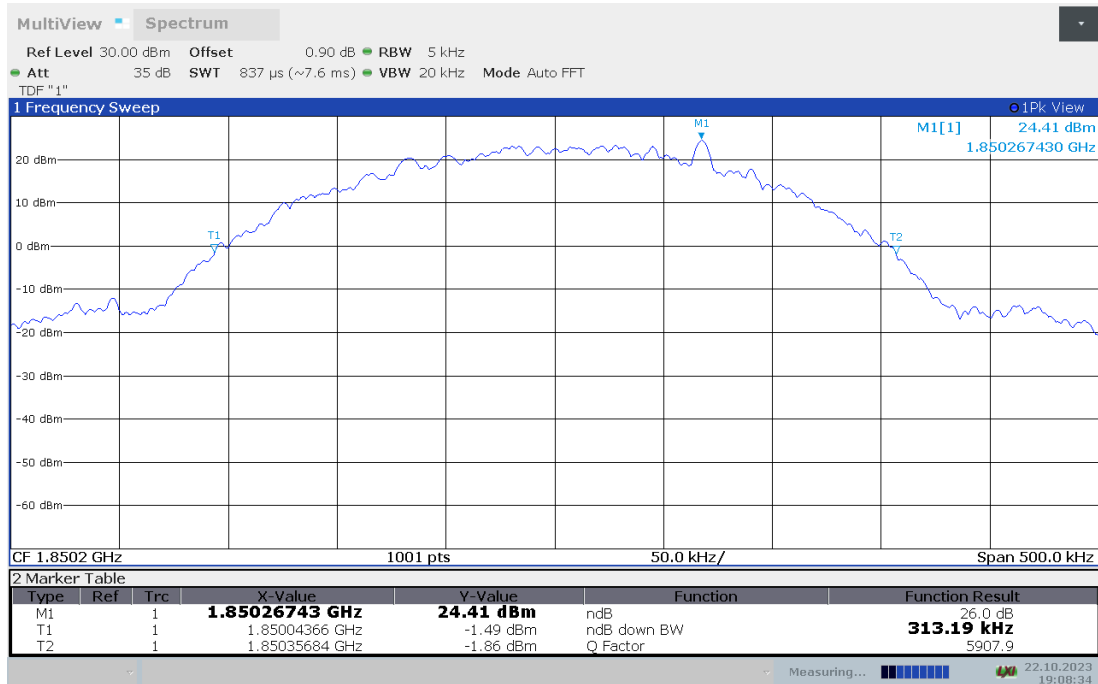


**Channel 661-Emission Bandwidth (-26dBc BW)**

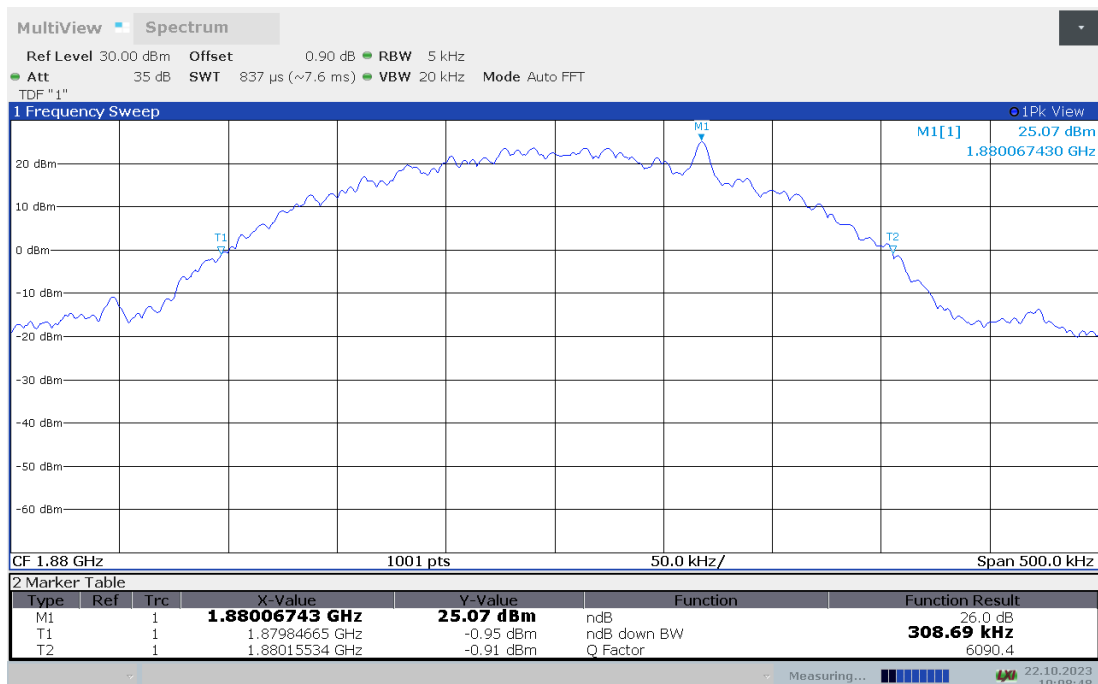



### Channel 810-Emission Bandwidth (-26dBc BW)

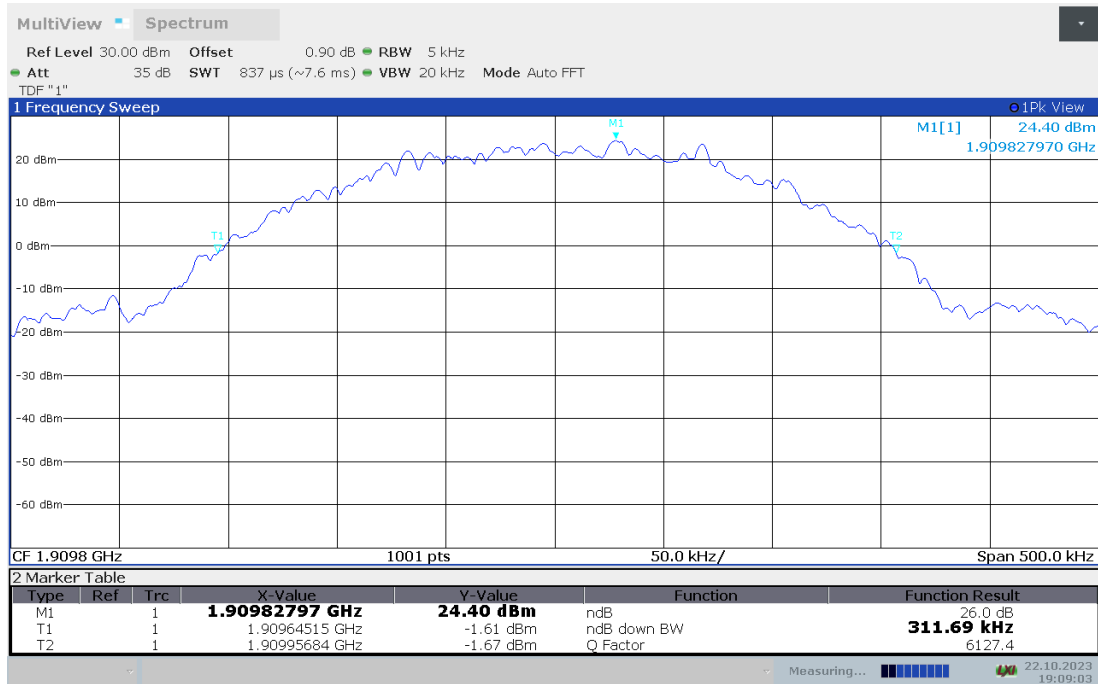




**PCS1900 (-26dBc BW)  
GPRS**


Frequency (MHz)	Emission Bandwidth (-26dBc BW)(kHz)
1850.2	310.690
1880	311.190
1909.8	314.190

**PCS1900**

**Channel 512-Emission Bandwidth (-26dBc BW)**

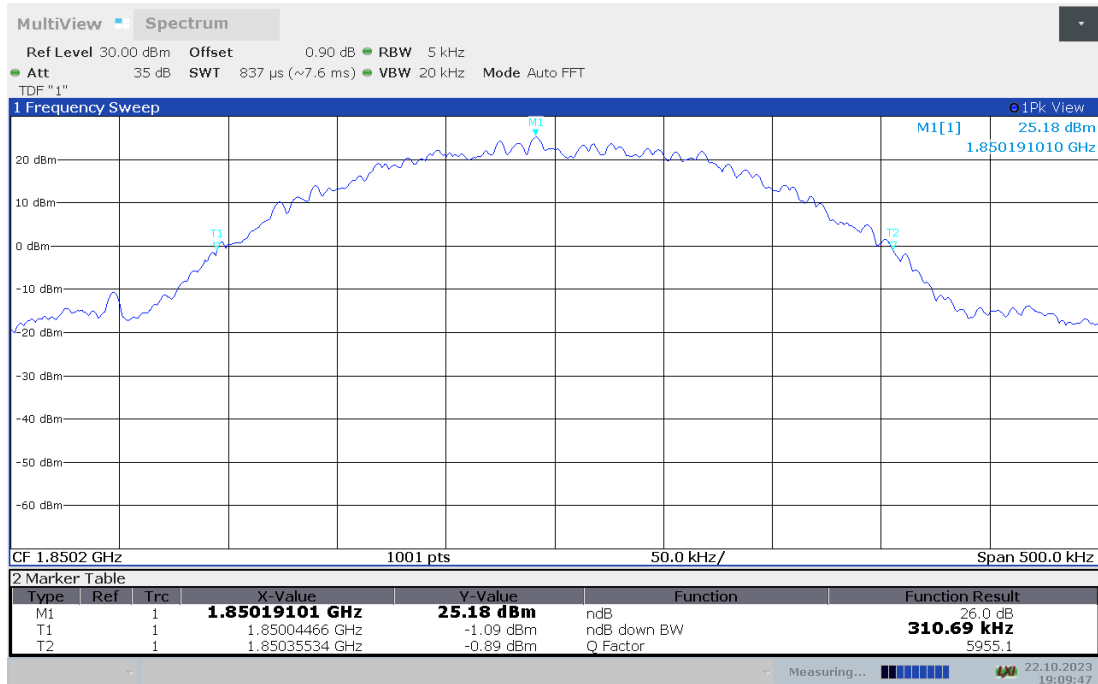


**Channel 661-Emission Bandwidth (-26dBc BW)**

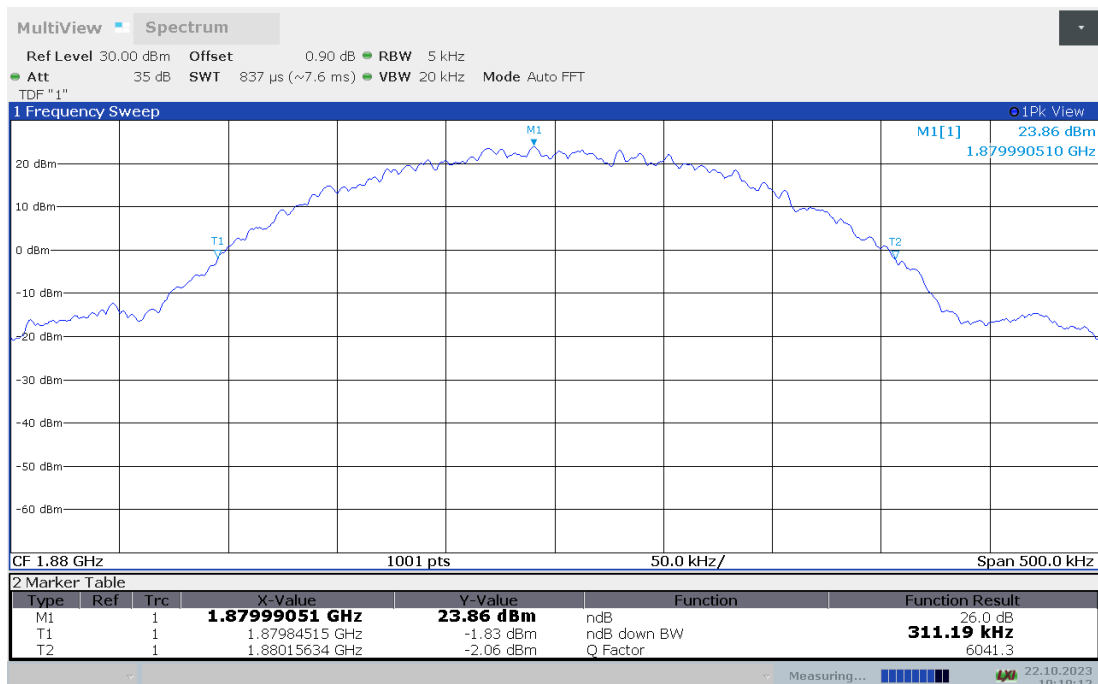



Channel 810-Emission Bandwidth (-26dBc BW)

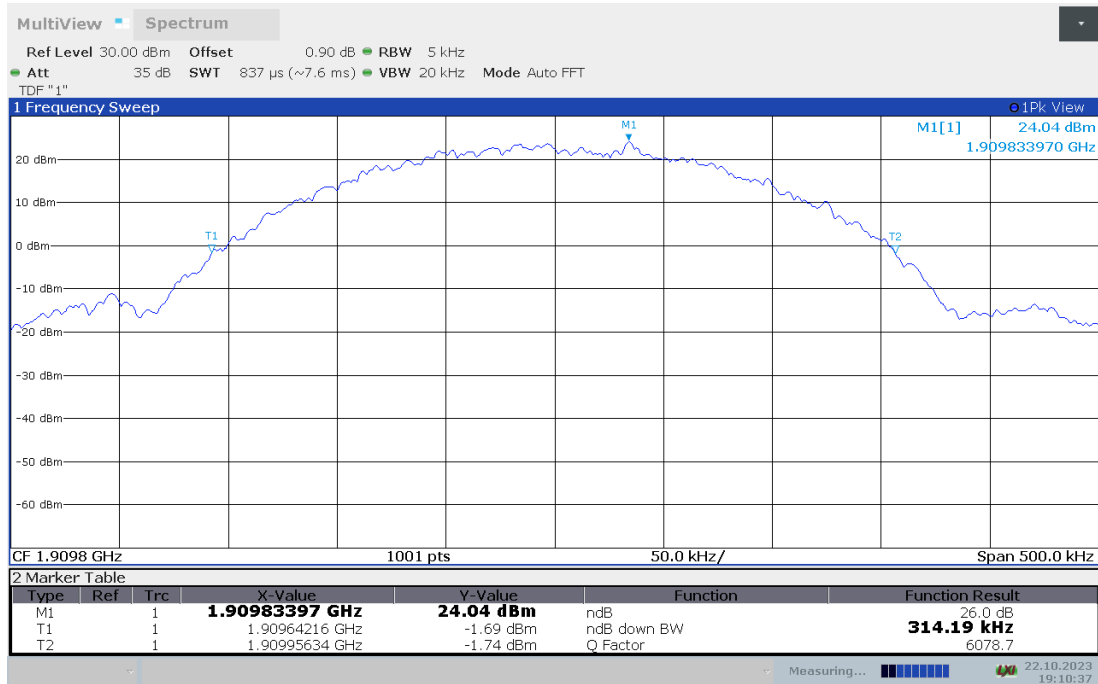




**PCS1900 (-26dBc BW)  
EGPRS**


Frequency (MHz)	Emission Bandwidth (-26dBc BW)(kHz)
1850.2	311.190
1880	310.690
1909.8	309.190

**PCS1900**

**Channel 512-Emission Bandwidth (-26dBc BW)**

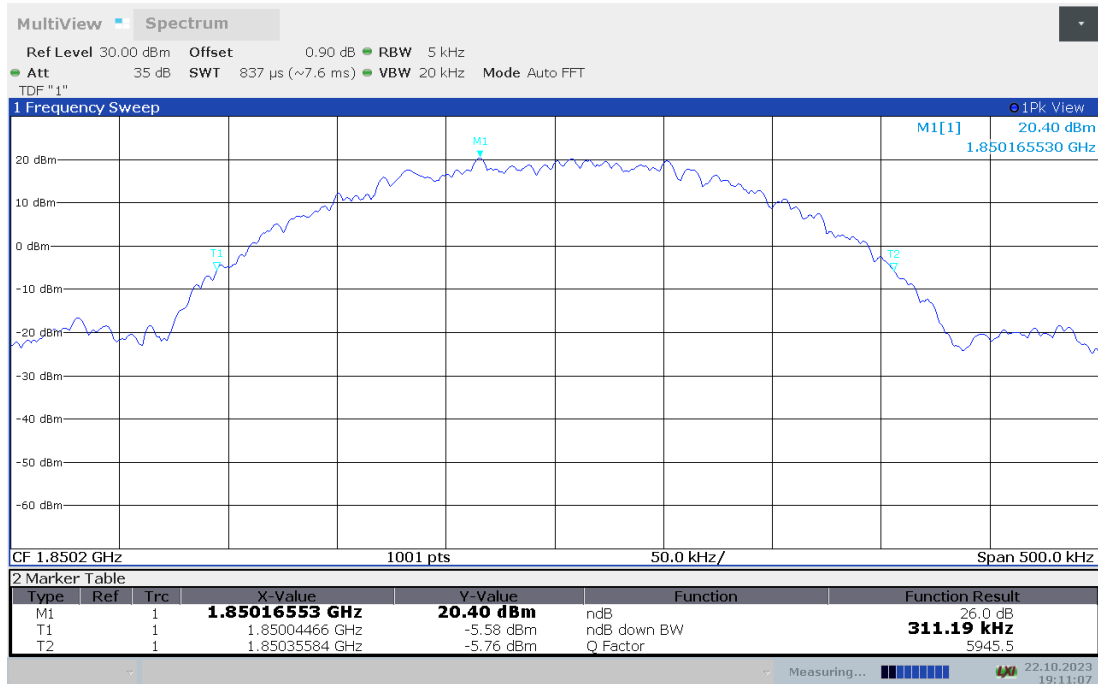


**Channel 661-Emission Bandwidth (-26dBc BW)**

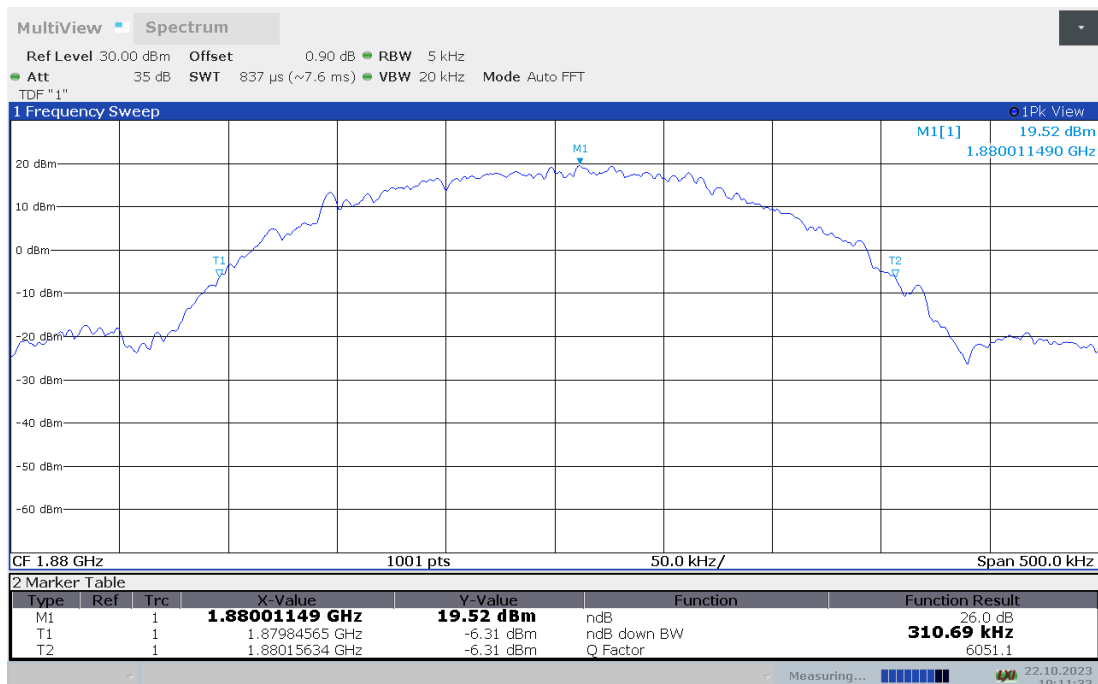



**Channel 810-Emission Bandwidth (-26dBc BW)**

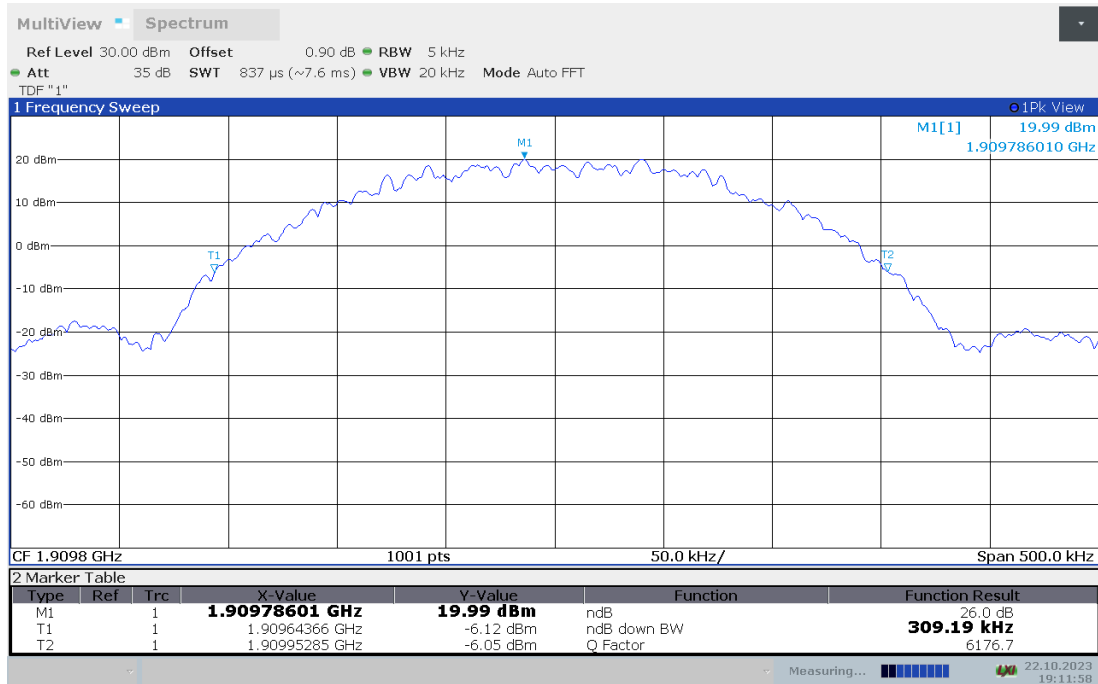

Note: Expanded measurement uncertainty is  $U = 3428\text{Hz}$ ,  $k = 2$



## **A.6 BAND EDGE COMPLIANCE**

### **A.6.1 Measurement limit**

Part 22.917 and Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


### **A.6.2 Measurement result**

**Only worst case result is given below**





**GSM850**  
**GSM**  
**Channel 128**

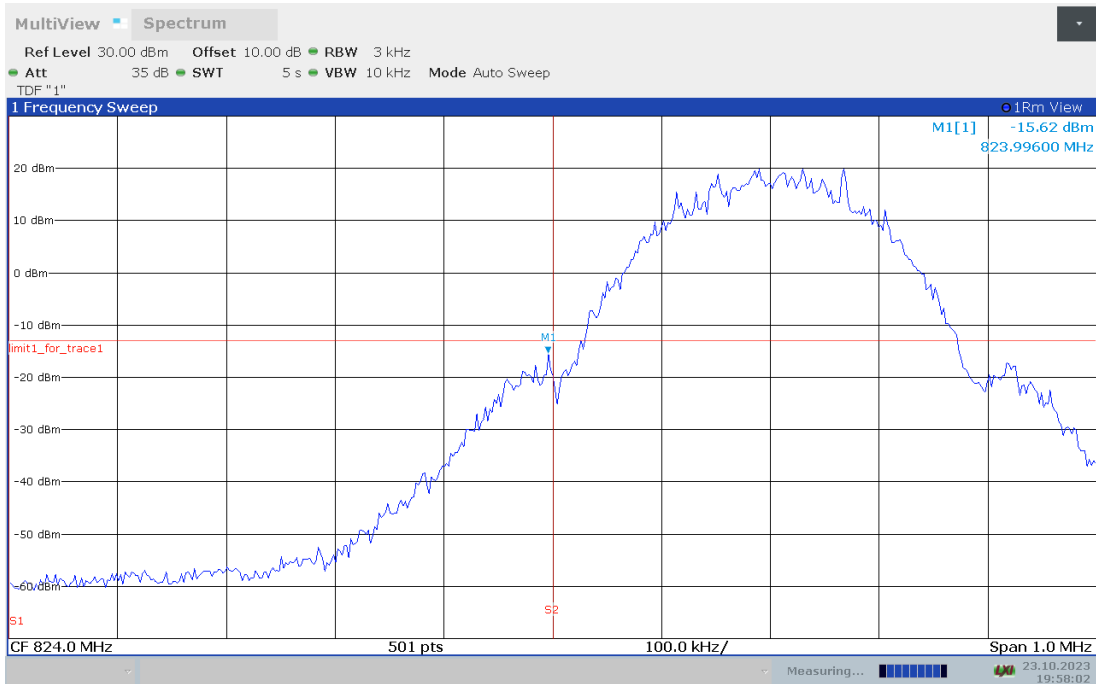


**Channel 251**






**GSM850**  
**GPRS**  
**Channel 128**

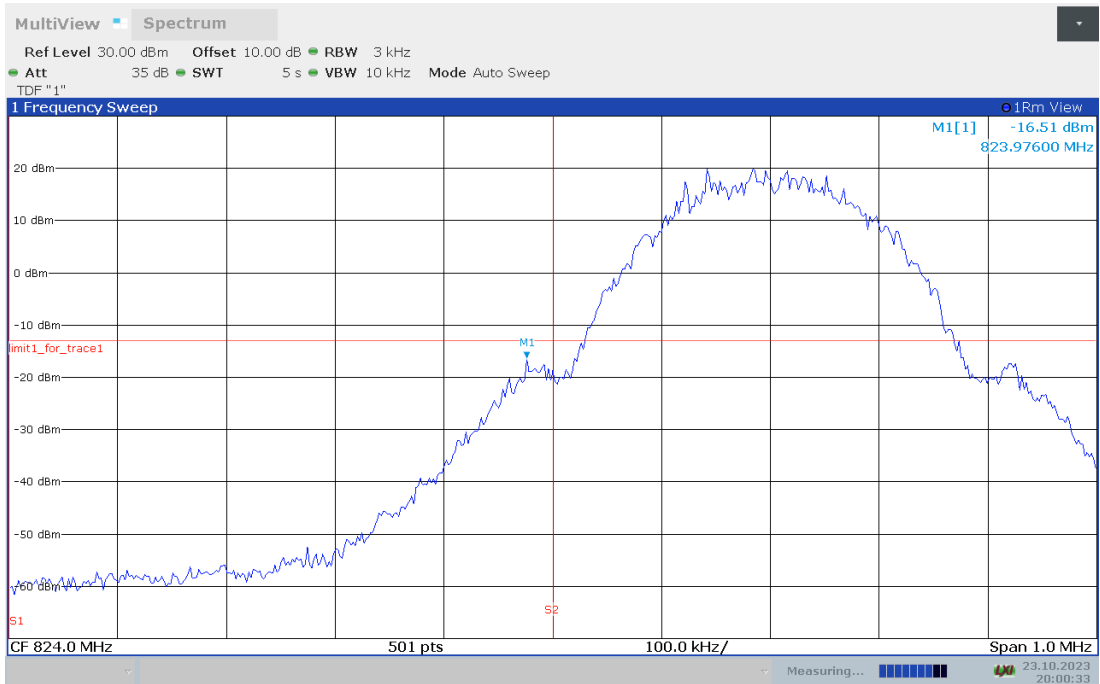


**Channel 251**

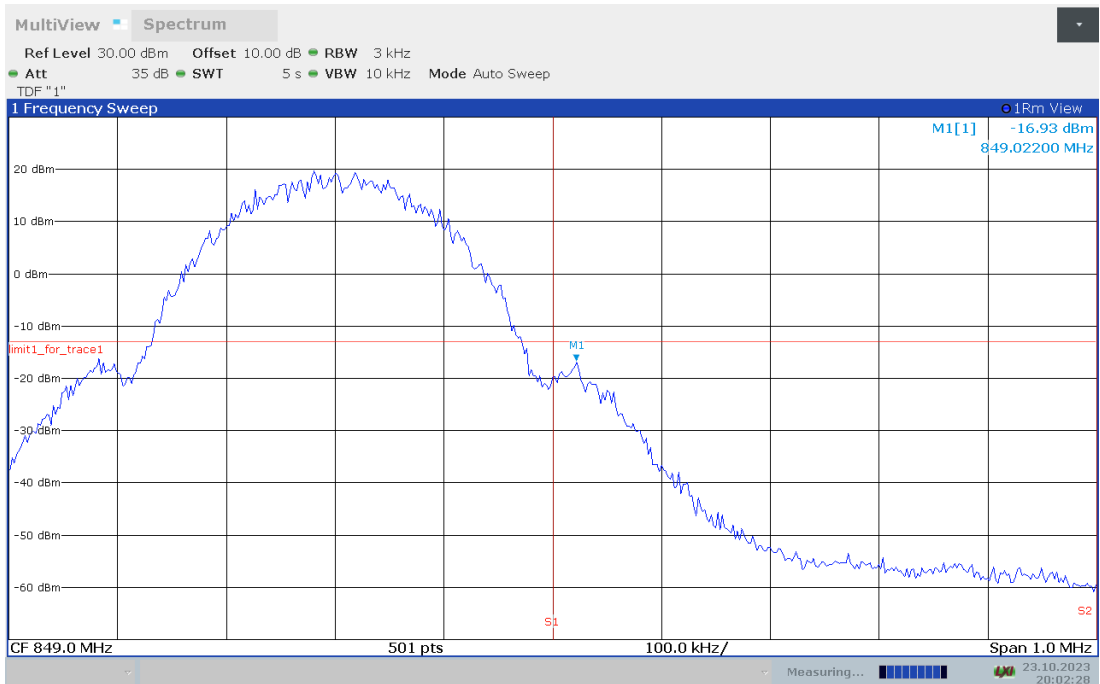




**GSM850**  
**EGPRS**  
**Channel 128**

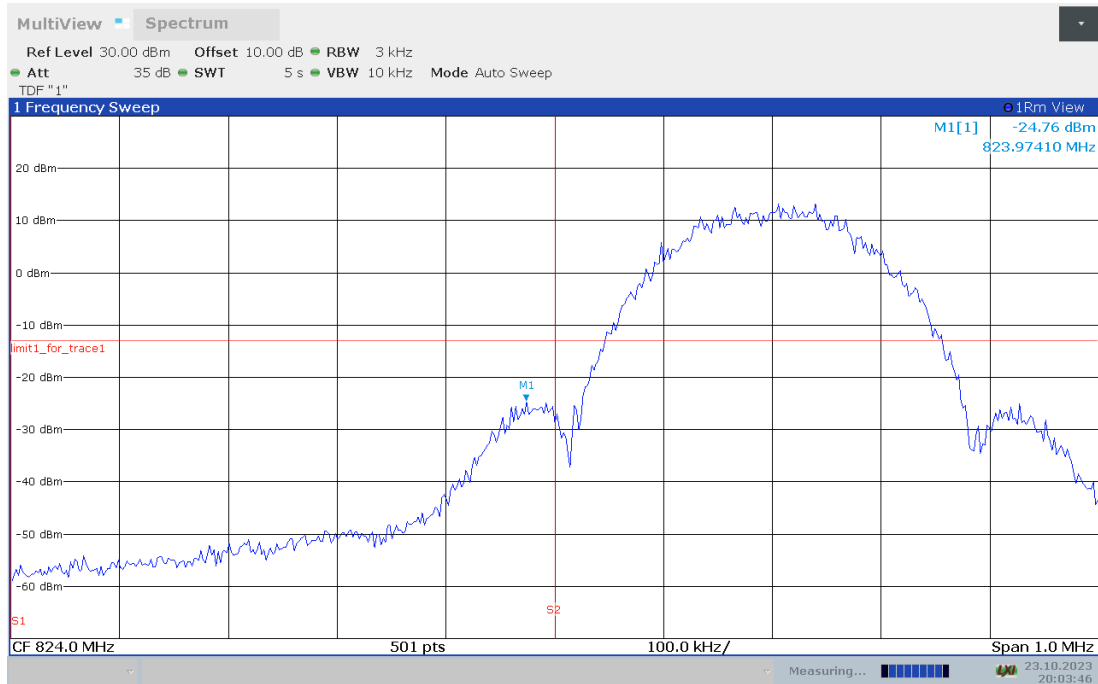


**Channel 251**

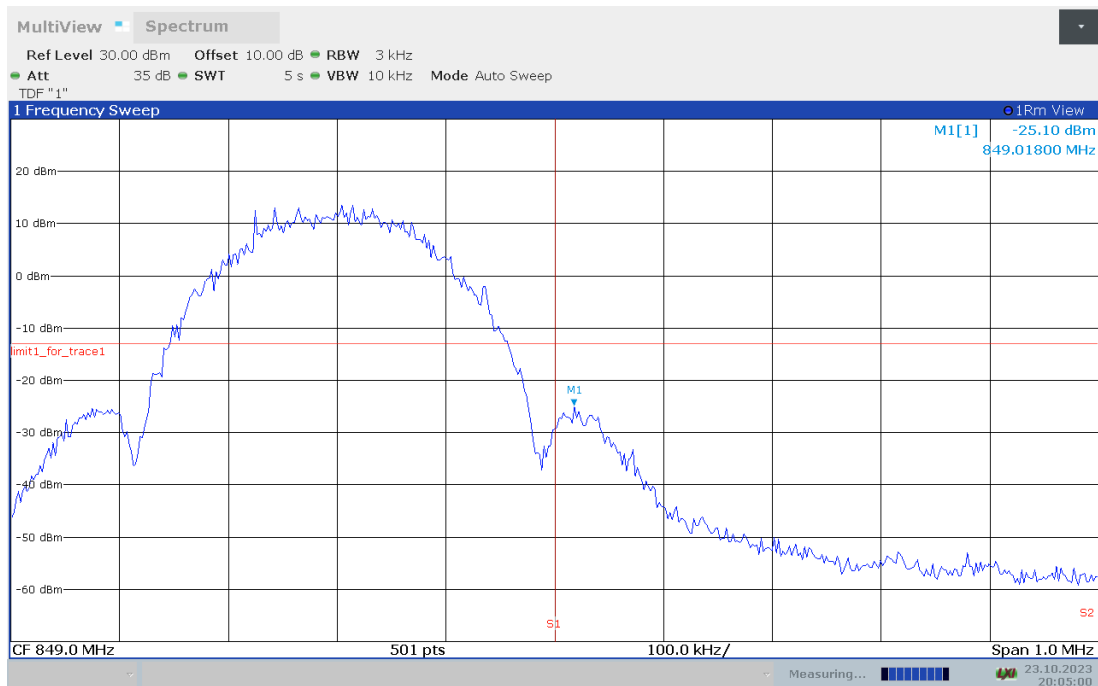




PCS1900  
GSM  
Channel 512

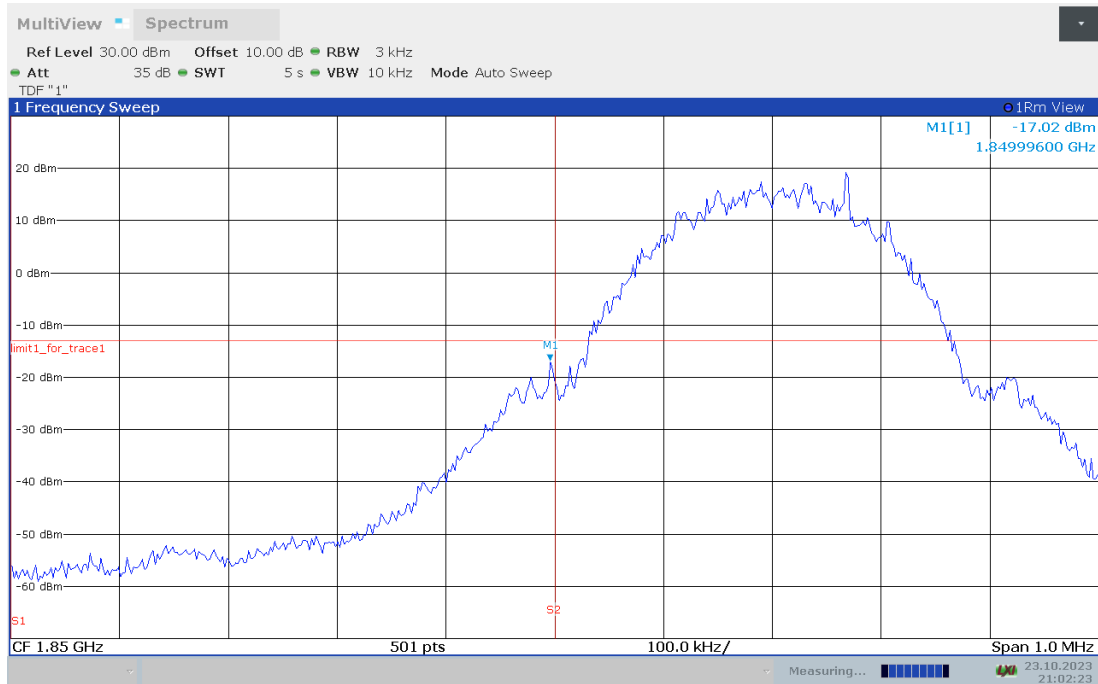


Channel 810

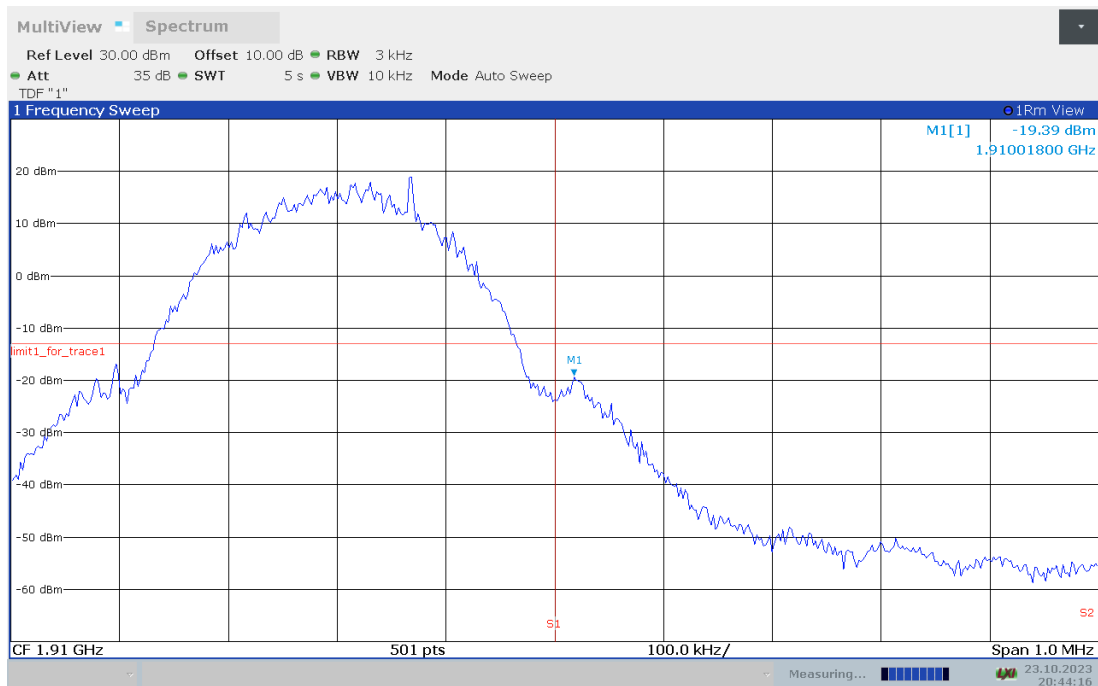



PCS1900  
GPRS  
Channel 512

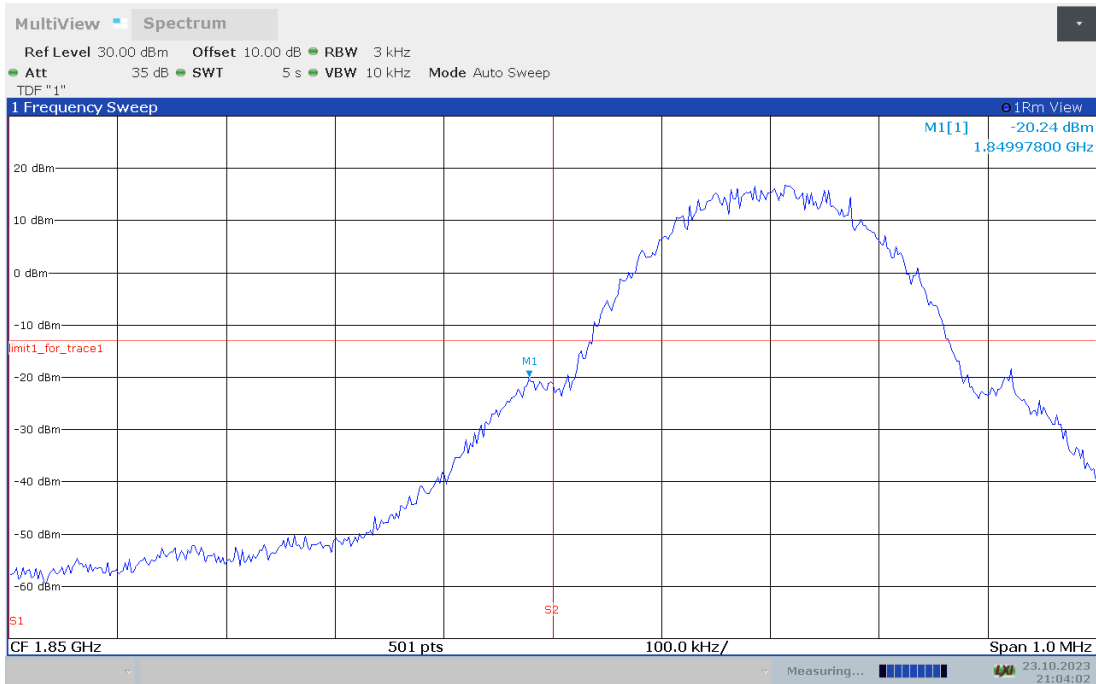


Channel 810






PCS1900  
EGPRS  
Channel 512

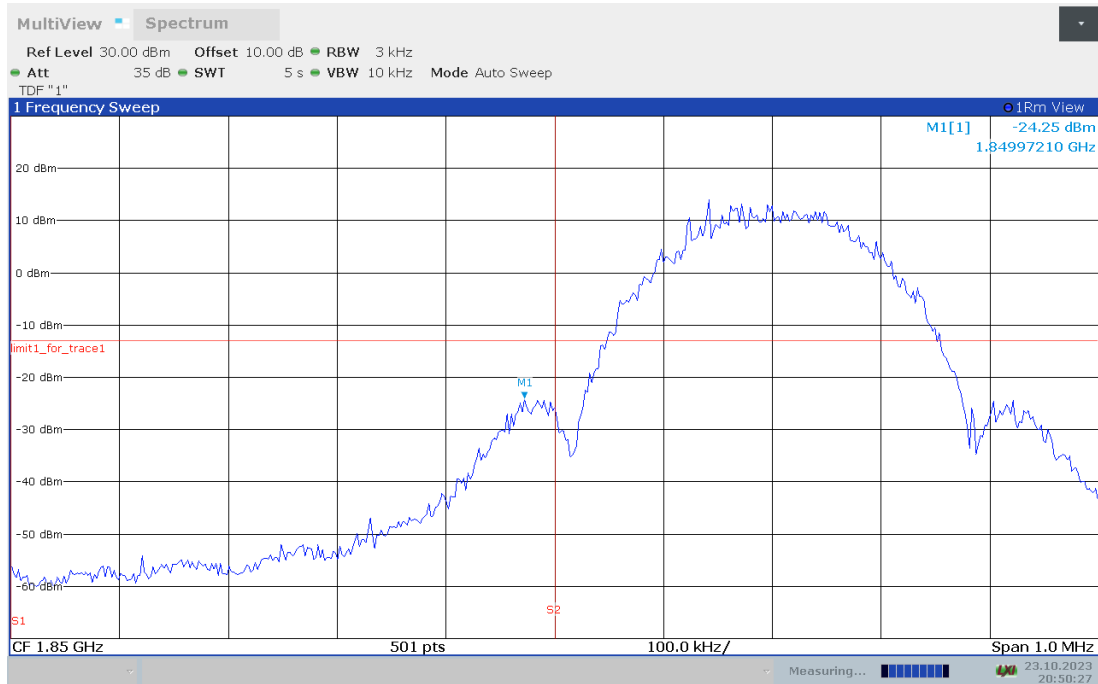

Channel 810

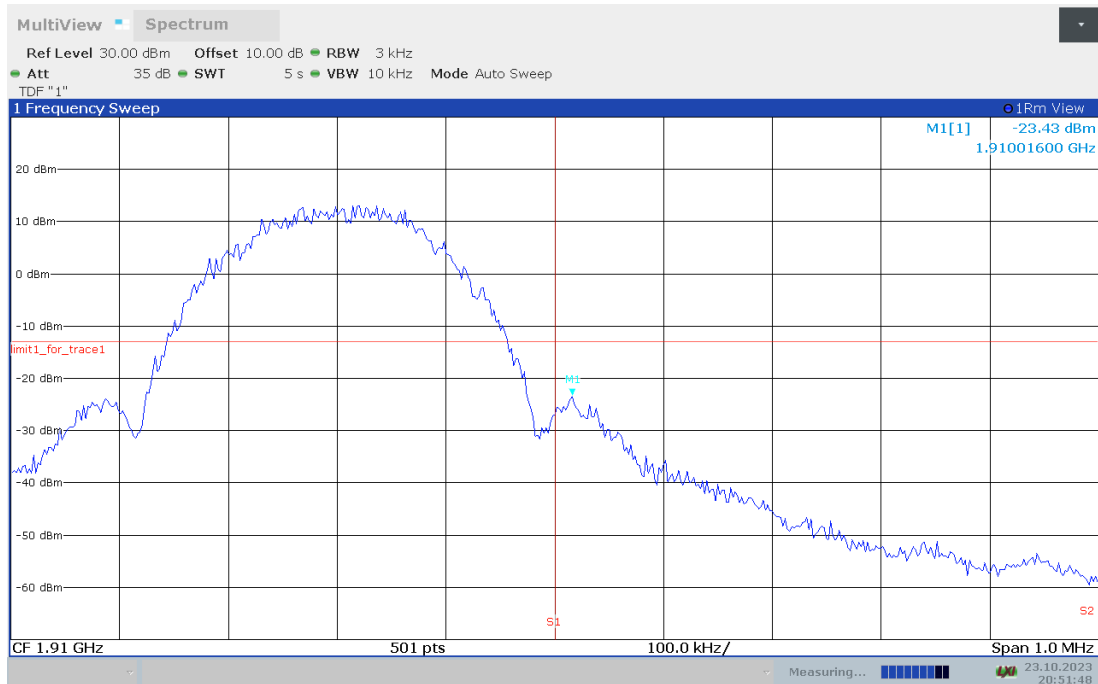

Note: Expanded measurement uncertainty is  $U = 0.49\text{dB}(100\text{kHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz}), k = 1.96$

## **A.7 CONDUCTED SPURIOUS EMISSION**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than  $2 \times \text{span} / \text{RBW}$

### **A.7.2 Measurement Limit**

Part 22.917 and Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### A.7.3 Measurement result


Only worst case result is given below

**GSM850**

**Channel 128: 30MHz–8.49 GHz**

Spurious emission limit –13dBm

**NOTE: peak above the limit line is the carrier frequency..**

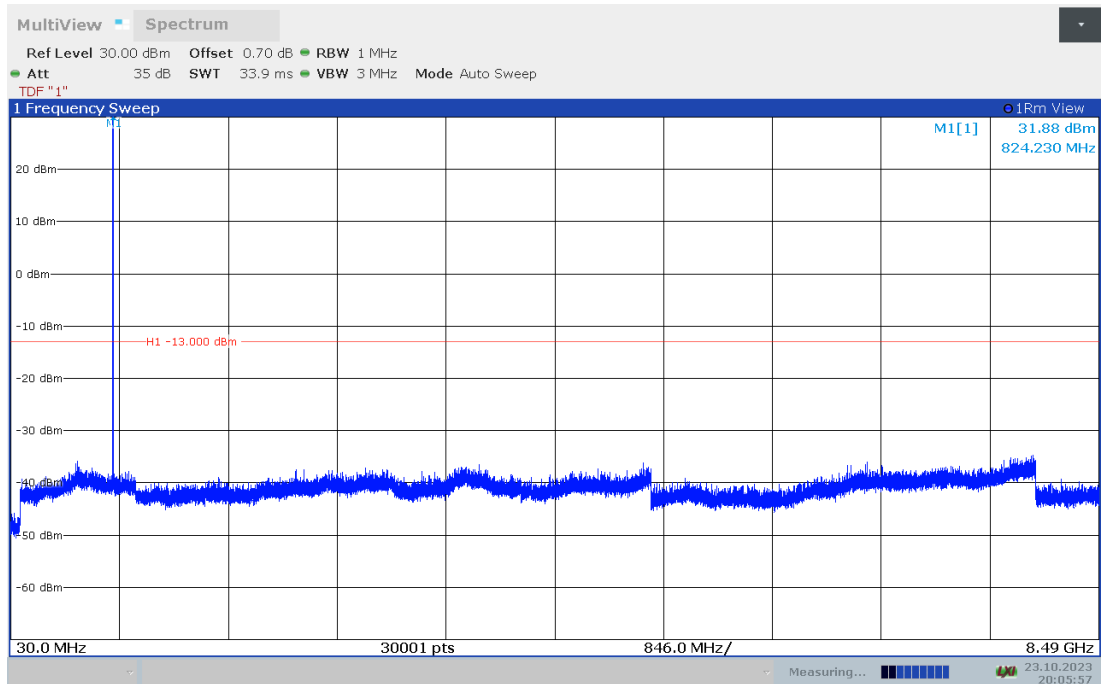






**Channel 190: 30MHz – 8.49GHz**

Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

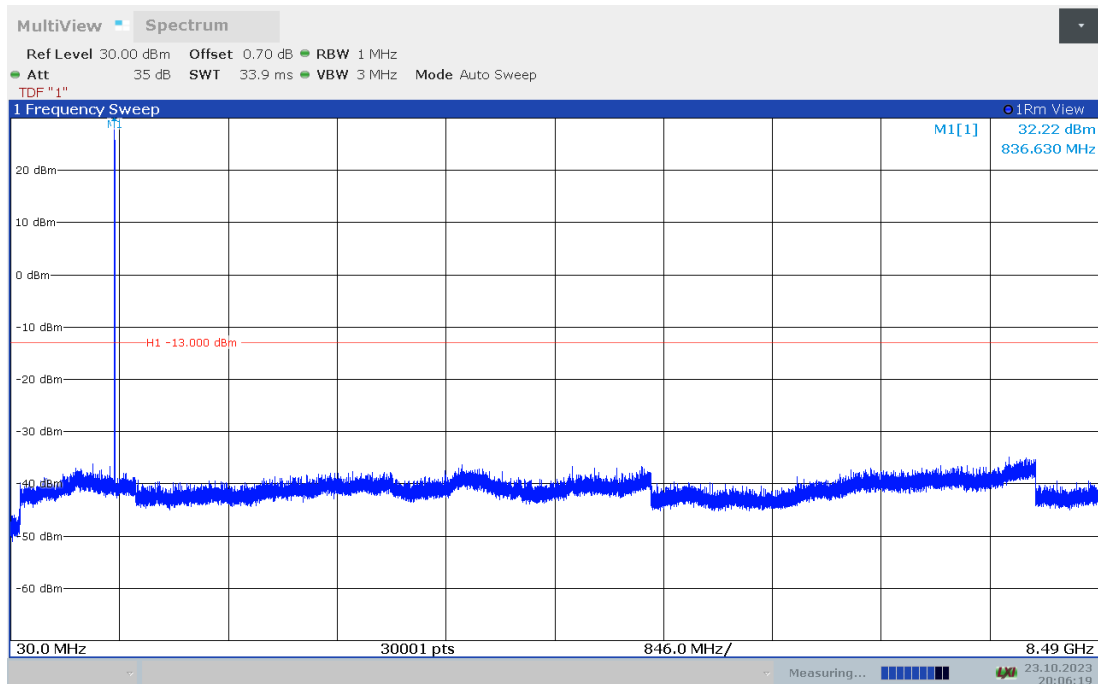

**Channel 251: 30MHz – 8.49 GHz**

Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

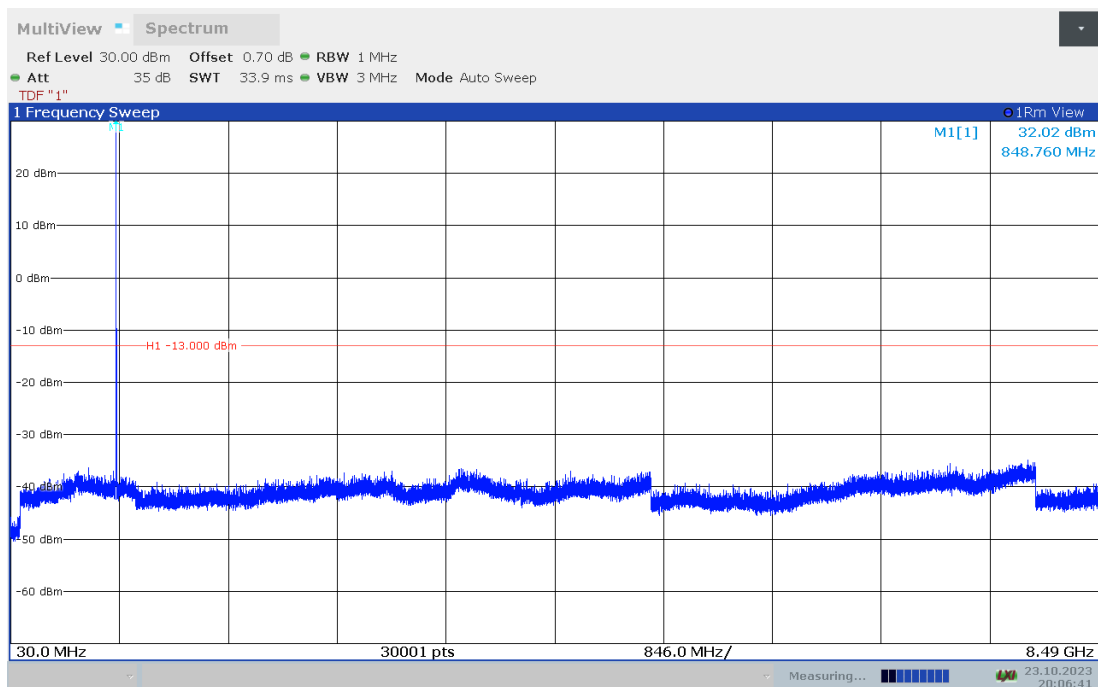




**PCS1900**


**Channel 512: 30MHz – 19.1GHz**

Spurious emission limit –13dBm.

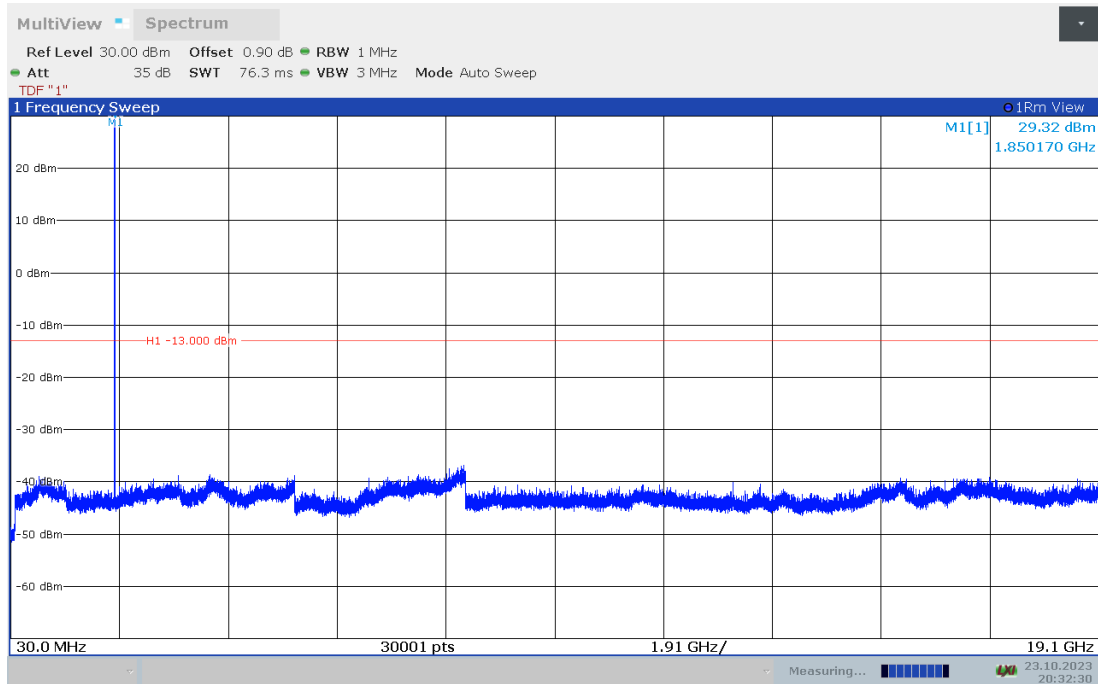


**Channel 661: 30MHz –19.1GHz**

Spurious emission limit –13dBm

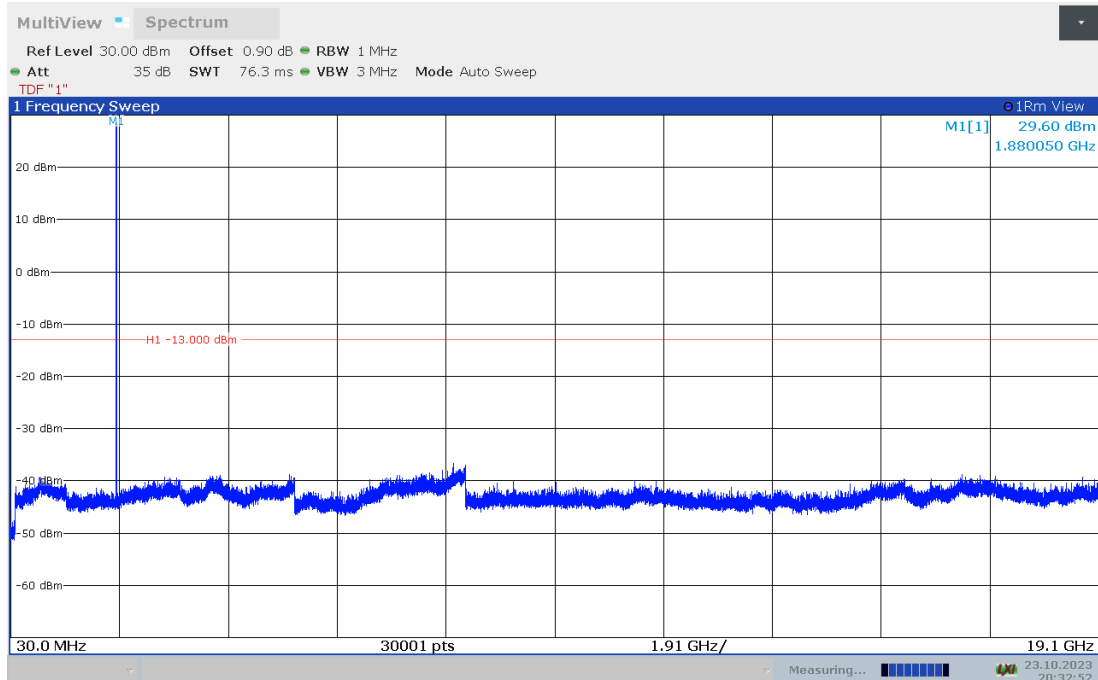

**Channel 810: 30MHz –19.1GHz**  
 Spurious emission limit –13dBm.

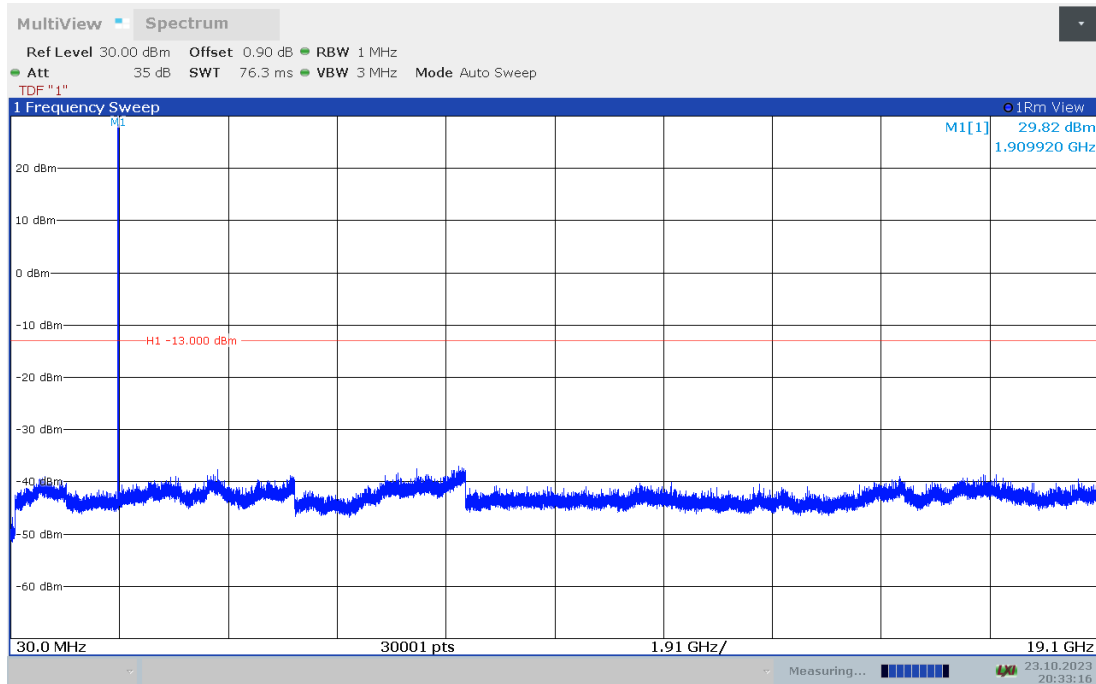

Note: Expanded measurement uncertainty is  $U = 0.49\text{dB}(100\text{KHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$ ,  $k = 1.96$



**A.8 PEAK-TO-AVERAGE POWER RATIO**

The peak-to-average power ratio (PAPR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

Measurement results

**Only worst case result is given below**


GSM850

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
824.2	8.28
836.6	8.26
848.8	8.26




### GSM 850

### Channel 128- Peak-to-average Power Ratio

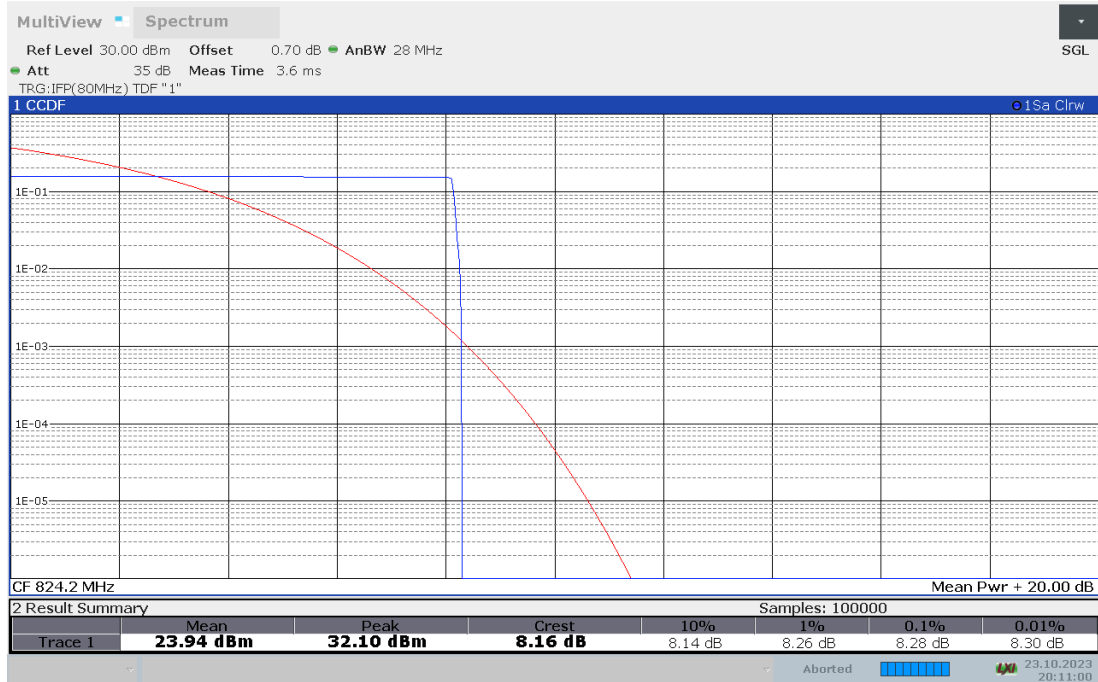


### Channel 190- Peak-to-average Power Ratio

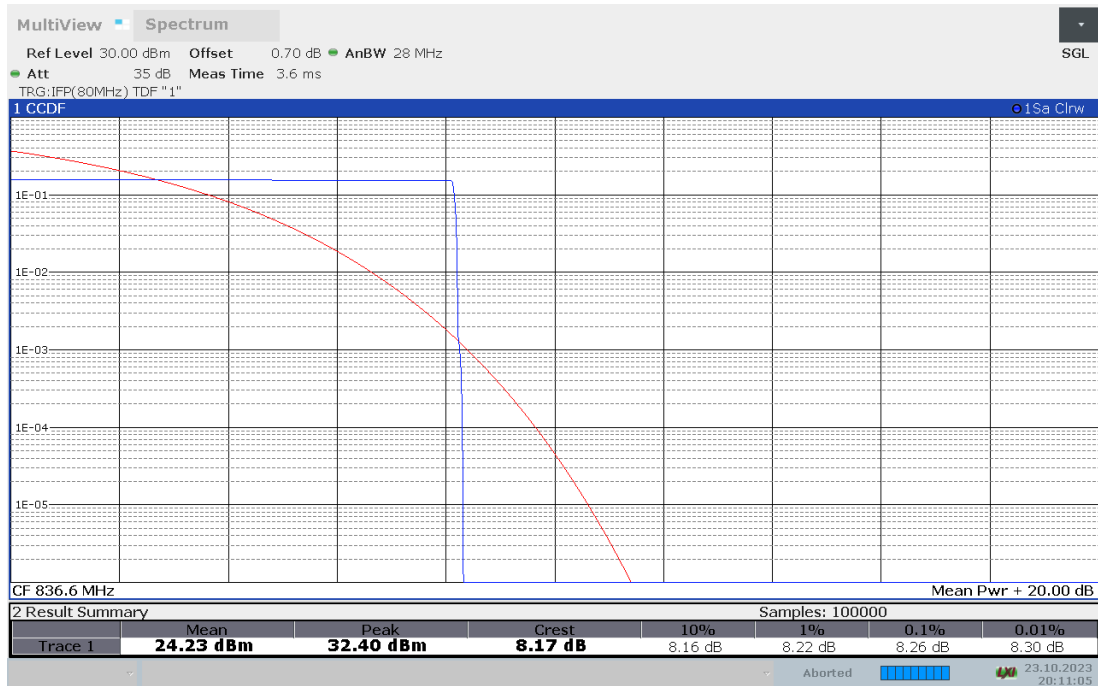



### Channel 251- Peak-to-average Power Ratio

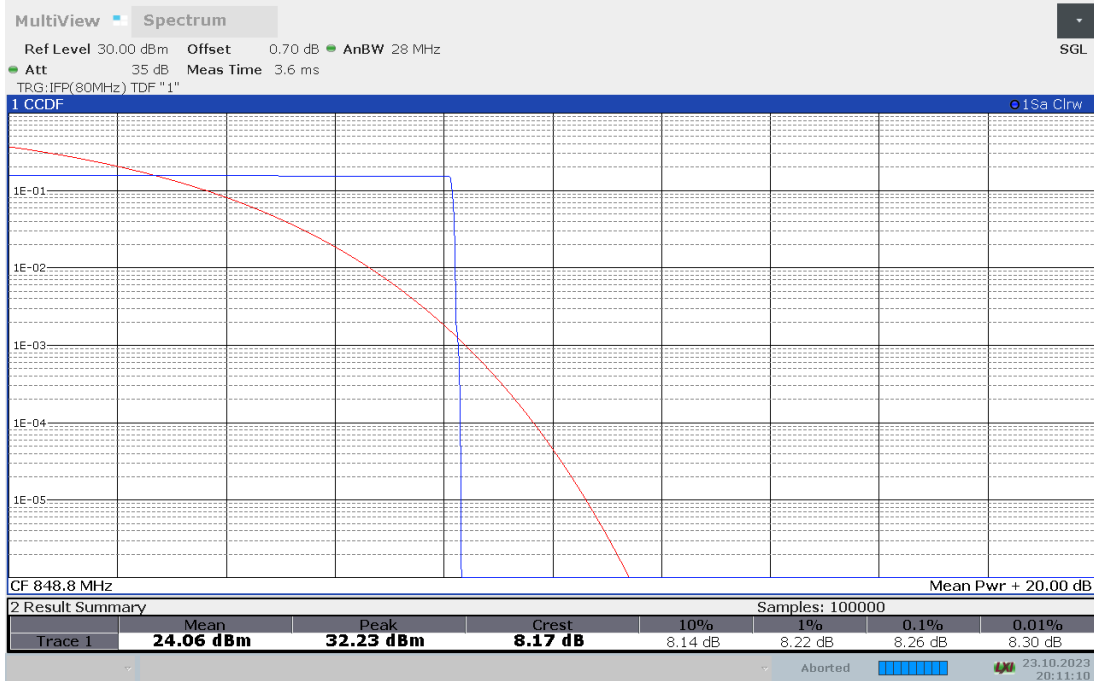




**GPRS 850 (PAPR)**


Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
824.2	8.28
836.6	8.30
848.8	8.26

**GPRS 850**

**Channel 128- Peak-To-Average Power Ratio(PAPR)**

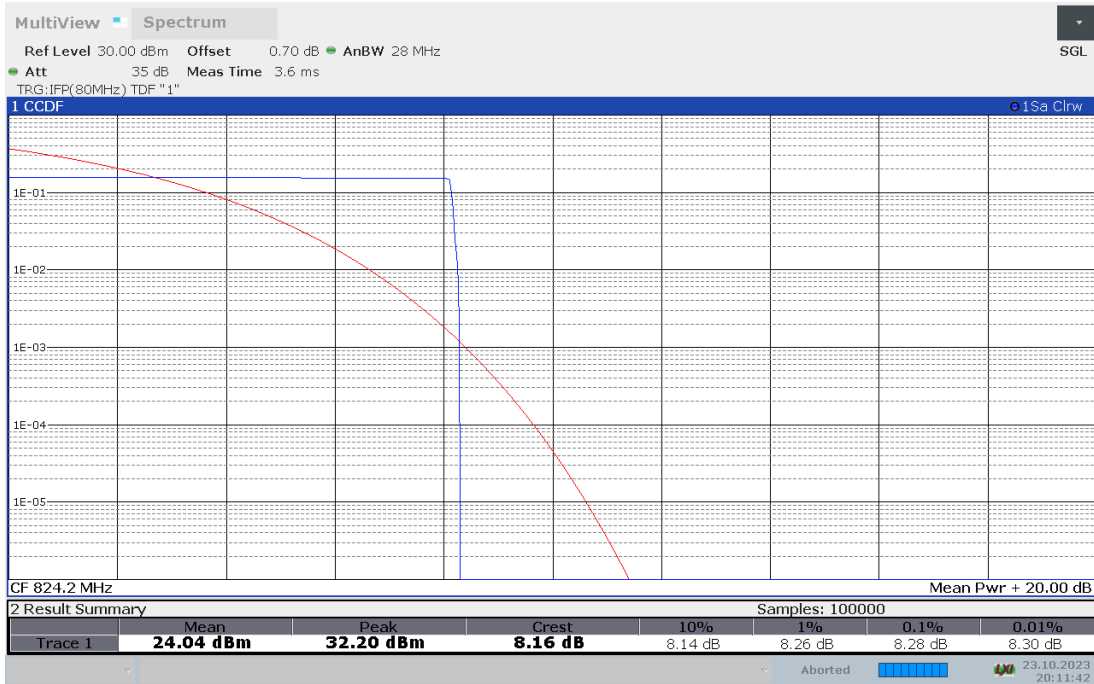


**Channel 190- Peak-To-Average Power Ratio(PAPR)**

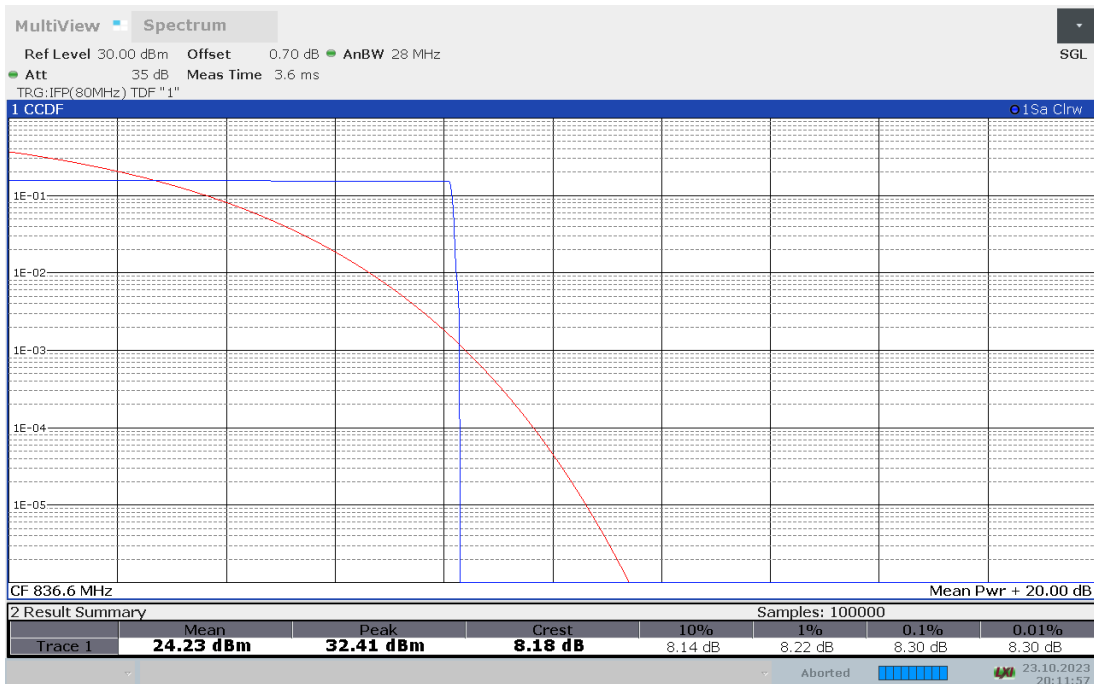



### Channel 251- Peak-To-Average Power Ratio(PAPR)

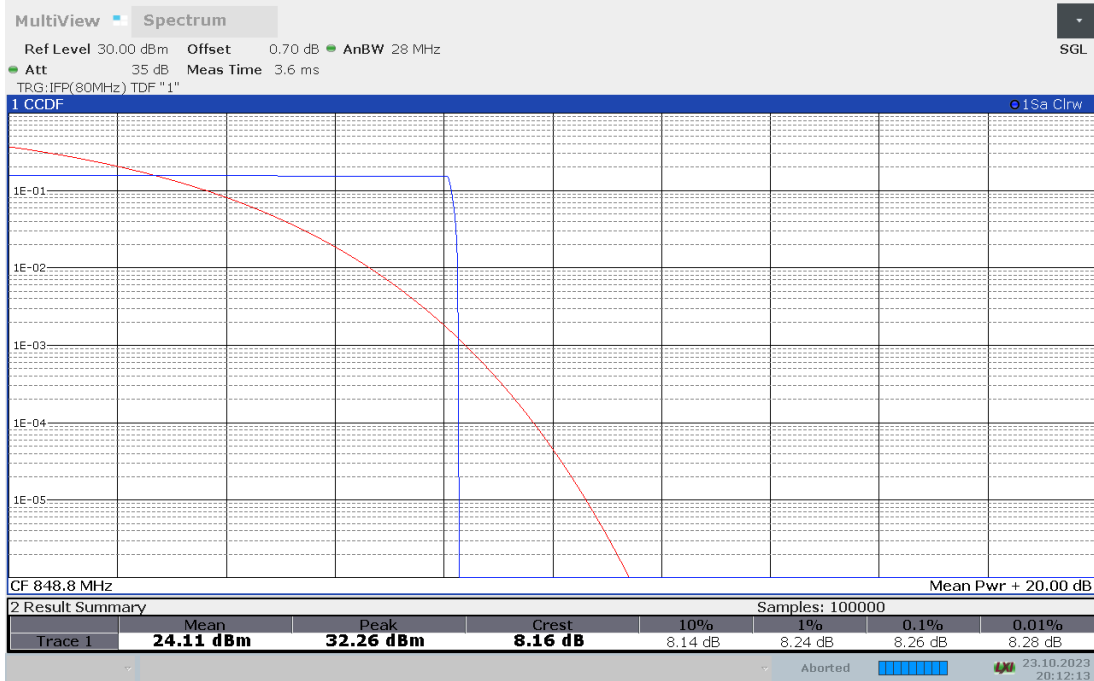






**EGPRS 850 (PAPR)**


Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
824.2	11.18
836.6	11.42
848.8	11.42

**EGPRS 850**

**Channel 128- Peak-To-Average Power Ratio(PAPR)**

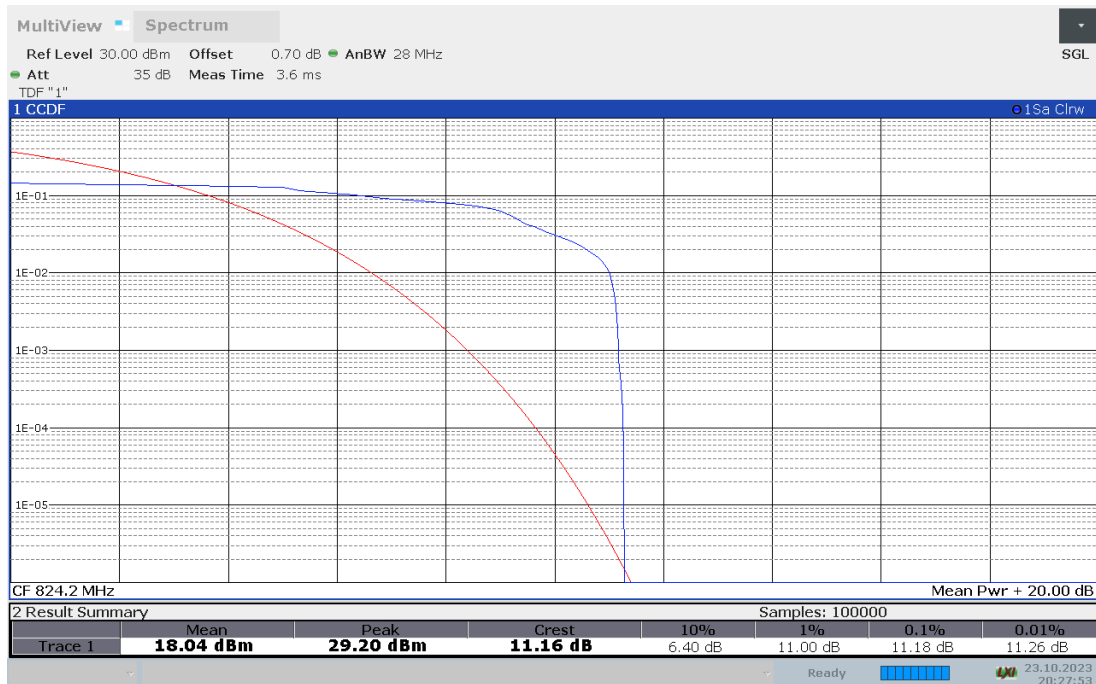


**Channel 190- Peak-To-Average Power Ratio(PAPR)**

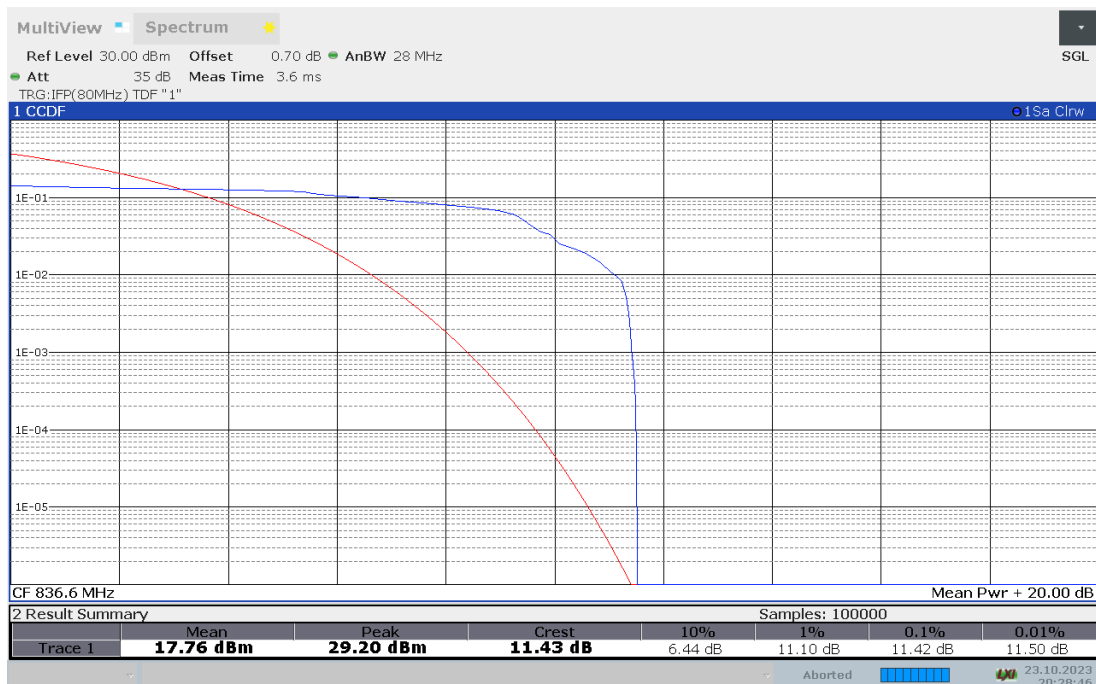



### Channel 251- Peak-To-Average Power Ratio(PAPR)

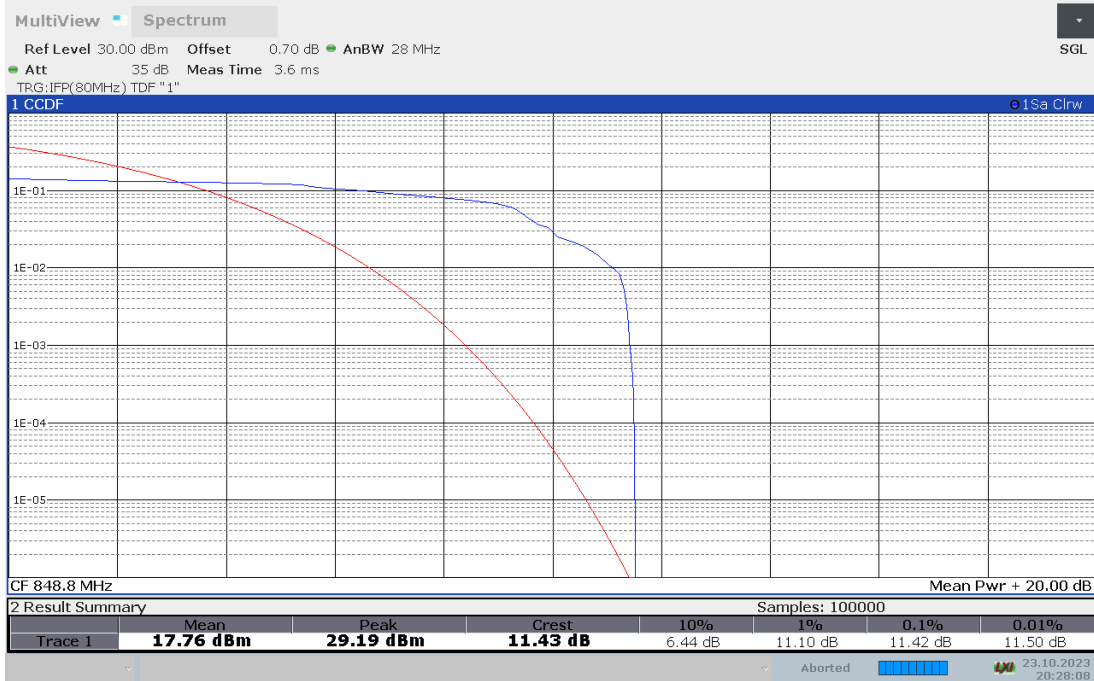



PCS1900 (PAPR)

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	8.36
1880.0	8.40
1909.7	8.44

PCS 1900

Channel 512- Peak-To-Average Power Ratio(PAPR)




Channel 661- Peak-To-Average Power Ratio(PAPR)





### Channel 810- Peak-To-Average Power Ratio(PAPR)

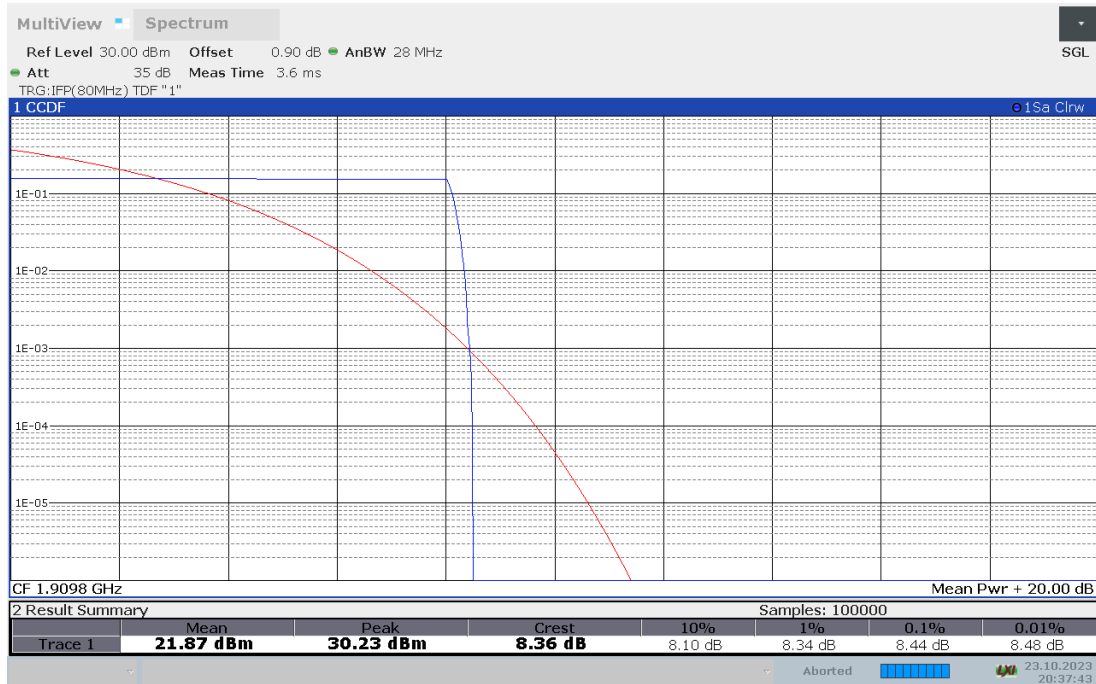




**GPRS1900 (PAPR)**


Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	8.38
1880.0	8.40
1909.7	8.42

**GPRS 1900**

**Channel 512- Peak-To-Average Power Ratio(PAPR)**

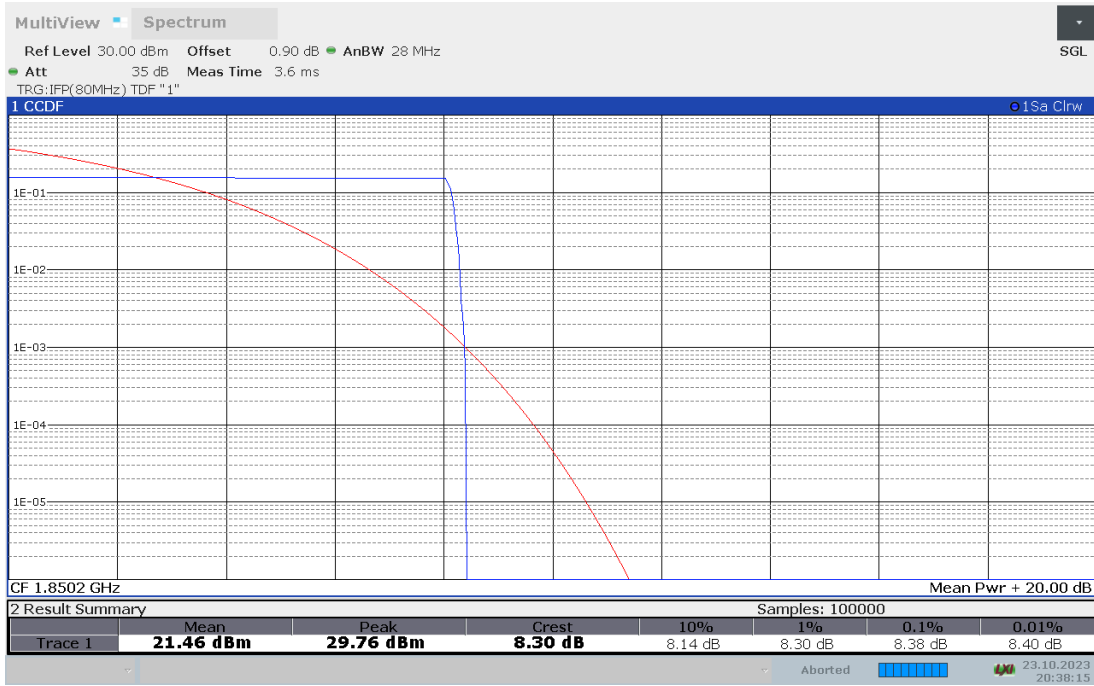

**Channel 661- Peak-To-Average Power Ratio(PAPR)**

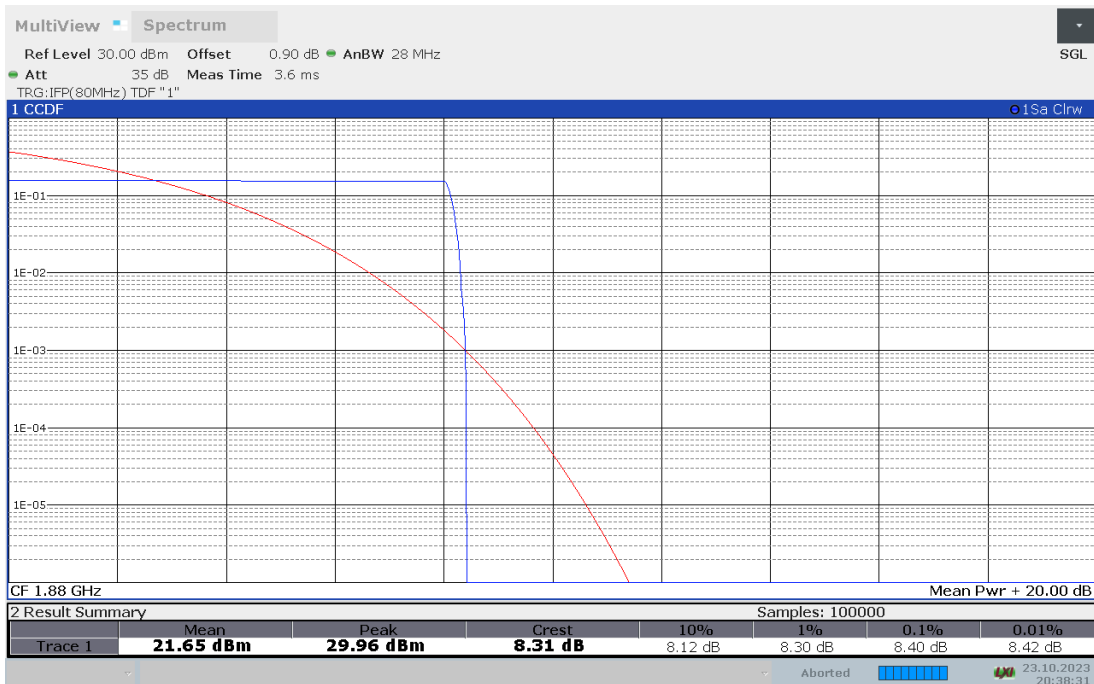

### Channel 810- Peak-To-Average Power Ratio(PAPR)



Note: Expanded measurement uncertainty is  $U = 0.49$  dB,  $k = 2$




**EGPRS1900 (PAPR)**


Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	11.28
1880.0	11.26
1909.7	11.36

**EGPRS 1900**

**Channel 512- Peak-To-Average Power Ratio(PAPR)**

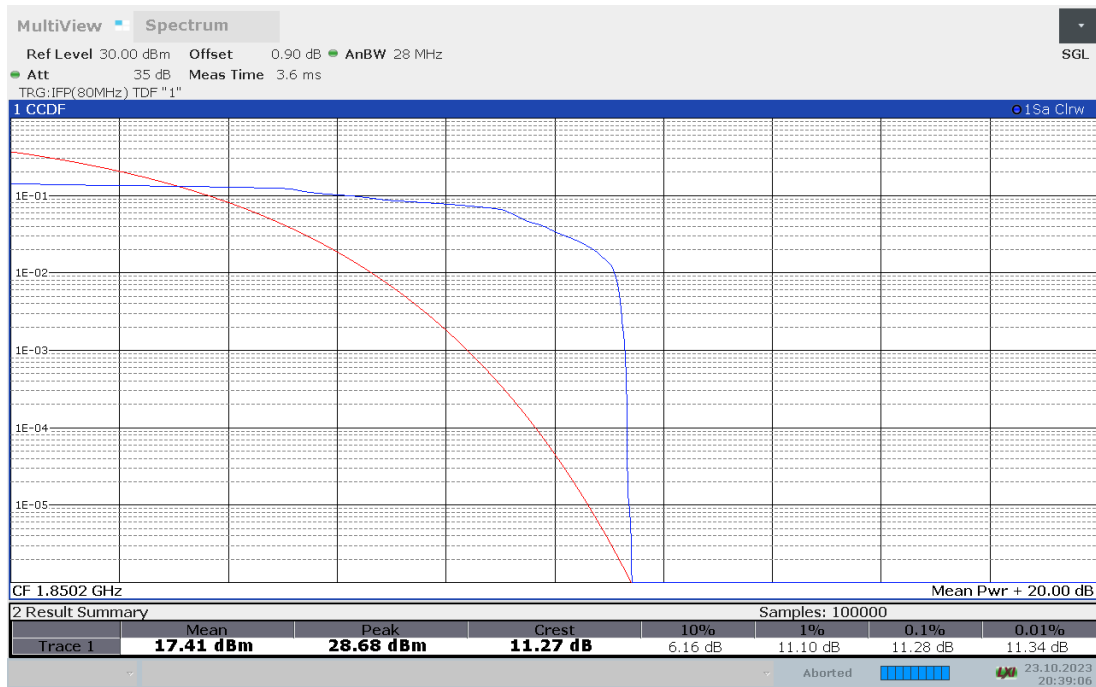


**Channel 661- Peak-To-Average Power Ratio(PAPR)**

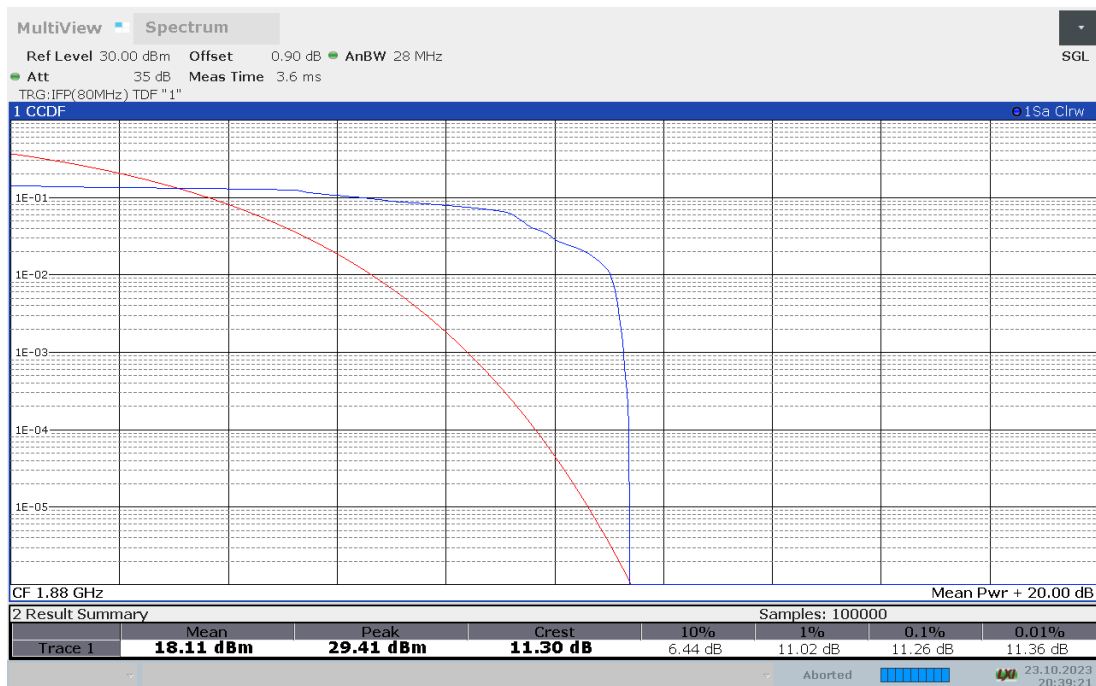



### Channel 810- Peak-To-Average Power Ratio(PAPR)

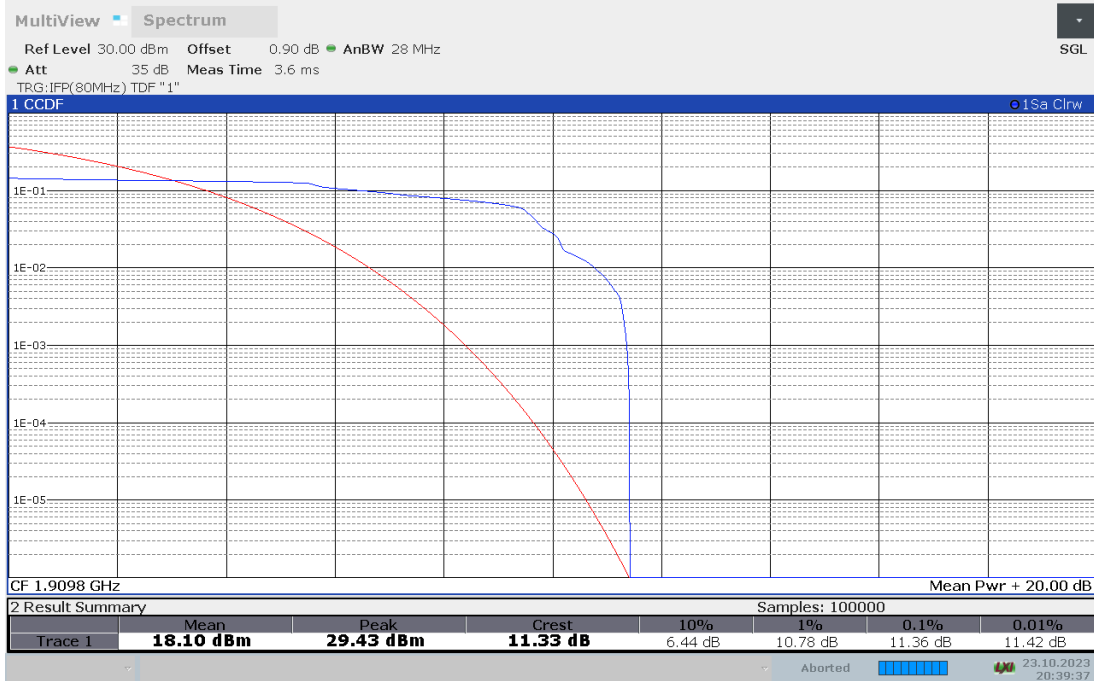



**ANNEX B accreditation Certificate**



## Accredited Laboratory

A2LA has accredited

### SHENZHEN ACADEMY OF INFORMATION AND COMMUNICATIONS TECHNOLOGY

Shenzhen, People's Republic of China

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 14<sup>th</sup> day of November 2023.



Mr. Trace McInturff, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 4353.01  
Valid to November 30, 2025

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

## ANNEX C Certificate of Brand Authorization



\*\*\*END OF REPORT\*\*\*