




| | | | |
|-----------------|---|---------------------|---------|
| Test Engineer : | Yuki Tang | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

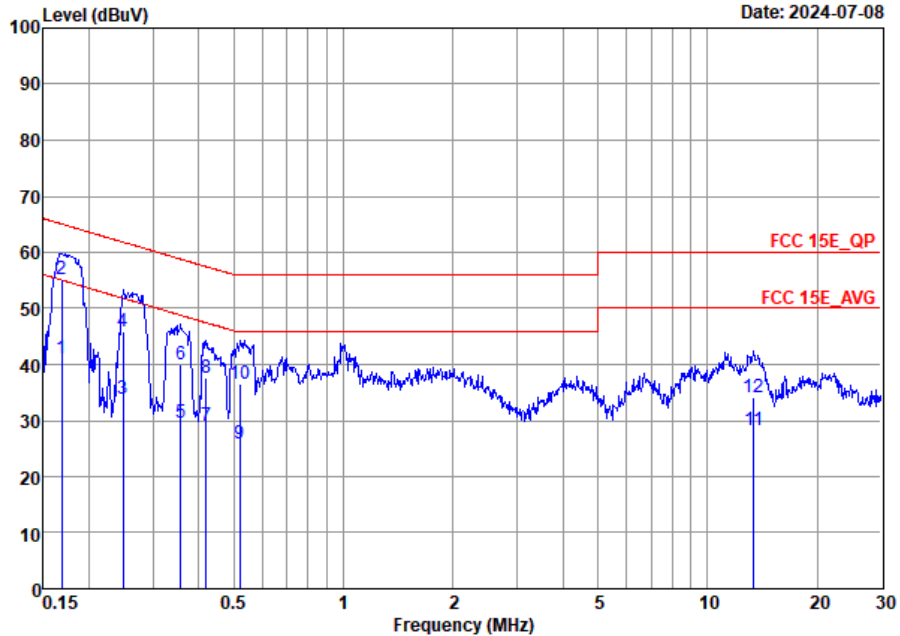

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.17 | 41.02 | -14.01 | 55.03 | 20.40 | 10.48 | 10.14 | Average |
| 2 * | 0.17 | 55.32 | -9.71 | 65.03 | 34.70 | 10.48 | 10.14 | QP |
| 3 | 0.25 | 33.81 | -18.01 | 51.82 | 13.51 | 10.15 | 10.15 | Average |
| 4 | 0.25 | 45.91 | -15.91 | 61.82 | 25.61 | 10.15 | 10.15 | QP |
| 5 | 0.36 | 29.72 | -19.06 | 48.78 | 9.30 | 10.26 | 10.16 | Average |
| 6 | 0.36 | 40.12 | -18.66 | 58.78 | 19.70 | 10.26 | 10.16 | QP |
| 7 | 0.42 | 29.12 | -18.34 | 47.46 | 8.99 | 9.97 | 10.16 | Average |
| 8 | 0.42 | 37.72 | -19.74 | 57.46 | 17.59 | 9.97 | 10.16 | QP |
| 9 | 0.52 | 25.99 | -20.01 | 46.00 | 5.70 | 10.13 | 10.16 | Average |
| 10 | 0.52 | 36.59 | -19.41 | 56.00 | 16.30 | 10.13 | 10.16 | QP |
| 11 | 13.41 | 28.19 | -21.81 | 50.00 | 7.50 | 10.23 | 10.46 | Average |
| 12 | 13.41 | 34.19 | -25.81 | 60.00 | 13.50 | 10.23 | 10.46 | QP |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

| | | | |
|-----------------|---------------|---------------------|---------|
| Test Engineer : | HuaCong Liang | Relative Humidity : | 50% |
| | | Temperature : | 20-22°C |

Radiated Spurious Emission Test Modes

| Mode | Band | Band (GHz) | Ant | Modulation | Ch. | Freq. | Data Rate | RU | Remark |
|------------------|----------|------------|-----|---------------|-----|-------|-----------|--------------------|--------|
| Mode 1 | U-NII-1 | 5.15-5.25 | 10 | 802.11a | 36 | 5180 | 6Mbps | - | - |
| Mode 2 | U-NII-1 | 5.15-5.25 | 10 | 802.11a | 44 | 5120 | 6Mbps | - | - |
| Mode 3 | U-NII-1 | 5.15-5.25 | 10 | 802.11a | 48 | 5240 | 6Mbps | - | - |
| Mode 4 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE20 | 36 | 5180 | MCS0 | Full RU | - |
| Mode 5 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE20 | 44 | 5120 | MCS0 | Full RU | - |
| Mode 6 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE20 | 48 | 5240 | MCS0 | Full RU | - |
| Mode 7 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE40 | 38 | 5190 | MCS0 | Full RU | - |
| Mode 8 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE40 | 46 | 5230 | MCS0 | Full RU | - |
| Mode 9 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE80 | 42 | 5210 | MCS0 | Full RU | - |
| Mode 10 | U-NII-2A | 5.25-5.35 | 10 | 802.11a | 52 | 5260 | 6Mbps | - | - |
| Mode 11 | U-NII-2A | 5.25-5.35 | 10 | 802.11a | 60 | 5300 | 6Mbps | - | - |
| Mode 12 | U-NII-2A | 5.25-5.35 | 10 | 802.11a | 64 | 5320 | 6Mbps | - | - |
| Mode 13 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE20 | 52 | 5260 | MCS0 | Full RU | - |
| Mode 14 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE20 | 60 | 5300 | MCS0 | Full RU | - |
| Mode 15 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE20 | 64 | 5320 | MCS0 | Full RU | - |
| Mode 16 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE40 | 54 | 5270 | MCS0 | Full RU | - |
| Mode 17 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE40 | 62 | 5310 | MCS0 | Full RU | - |
| Mode 18 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE80 | 58 | 5290 | MCS0 | Full RU | - |
| Mode 19 | U-NII-2C | 5.47-5.725 | 10 | 802.11a | 100 | 5500 | 6Mbps | - | - |
| Mode 20 | U-NII-2C | 5.47-5.725 | 10 | 802.11a | 116 | 5580 | 6Mbps | - | - |
| Mode 21 | U-NII-2C | 5.47-5.725 | 10 | 802.11a | 140 | 5700 | 6Mbps | - | - |
| Mode 22 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE20 | 100 | 5500 | MCS0 | Full RU | - |
| Mode 23 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE20 | 116 | 5580 | MCS0 | Full RU | - |
| Mode 24 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE20 | 140 | 5700 | MCS0 | Full RU | - |
| Mode 25 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE40 | 102 | 5510 | MCS0 | Full RU | - |
| Mode 26 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE40 | 134 | 5670 | MCS0 | Full RU | - |
| Mode 27 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE80 | 106 | 5530 | MCS0 | Full RU | - |
| Mode 28 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE80 | 122 | 5610 | MCS0 | Full RU | - |
| Mode 29 | U-NII-3 | 5.725-5.85 | 10 | 802.11a | 149 | 5745 | 6Mbps | - | - |
| Mode 30 | U-NII-3 | 5.725-5.85 | 10 | 802.11a | 157 | 5785 | 6Mbps | - | - |
| Mode 31 | U-NII-3 | 5.725-5.85 | 10 | 802.11a | 165 | 5825 | 6Mbps | - | - |
| Mode 32 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE20 | 149 | 5745 | MCS0 | Full RU | - |
| Mode 33 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE20 | 157 | 5785 | MCS0 | Full RU | - |
| Mode 34 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE20 | 165 | 5825 | MCS0 | Full RU | - |
| Mode 35 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE40 | 151 | 5755 | MCS0 | Full RU | - |
| Mode 36 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE40 | 159 | 5795 | MCS0 | Full RU | - |
| Mode 37 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE80 | 155 | 5775 | MCS0 | Full RU | - |
| Mode 38 | U-NII-1 | 5.15-5.25 | 10 | 802.11ax HE20 | 36 | 5180 | MCS0 | Partial RU (26/0) | - |
| Mode 39 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE20 | 64 | 5320 | MCS0 | Partial RU (52/40) | - |
| Mode 40 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE20 | 100 | 5500 | MCS0 | Partial RU (26/0) | - |
| Mode 41 | U-NII-2C | 5.47-5.725 | 10 | 802.11ax HE20 | 140 | 5700 | MCS0 | Partial RU (26/8) | - |
| Mode 42 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE20 | 149 | 5745 | MCS0 | Partial RU (26/0) | - |
| Mode 43 | U-NII-3 | 5.725-5.85 | 10 | 802.11ax HE20 | 165 | 5825 | MCS0 | Partial RU (26/8) | - |
| Mode 45 | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE80 | 58 | 5290 | MCS0 | - | LF |
| Mode 48 | 2.4G | 2.4~2.4835 | 10 | Bluetooth LE | 38 | 2478 | 2M | - | |
| | U-NII-2A | 5.25-5.35 | 10 | 802.11ax HE80 | 58 | 5290 | MCS0 | Full RU | |
| LTE Band 13 Link | | | | | | | | | |






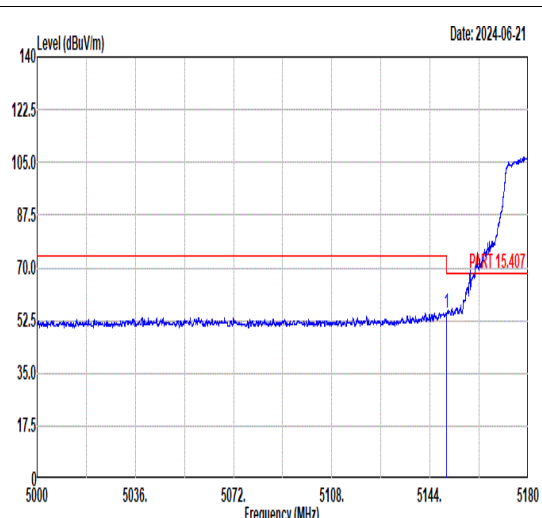
Summary of each worse mode

Table with 11 columns: Mode, Modulation, Ch., Freq. (MHz), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Pol., Peak Avg., Result, Remark. It contains 40 rows of test data for various frequencies and modulation types.



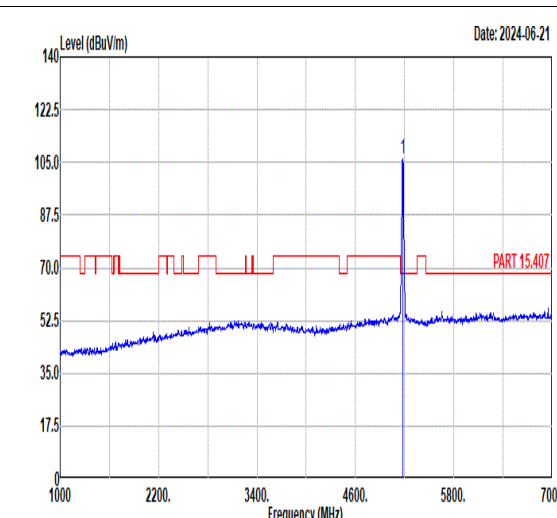
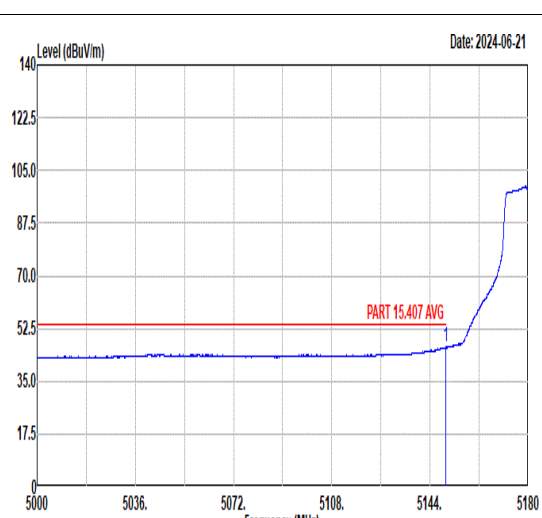


| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|---------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 26 | 802.11ax HE40 | 134 | 5726.29 | 62.58 | 68.30 | -5.72 | H | PEAK | Pass | Band Edge |
| 26 | 802.11ax HE40 | 134 | - | - | - | - | - | - | - | Harmonic |
| 27 | 802.11ax HE80 | 106 | 5454.13 | 48.05 | 54.00 | -5.95 | H | AVERAGE | Pass | Band Edge |
| 27 | 802.11ax HE80 | 106 | - | - | - | - | - | - | - | Harmonic |
| 28 | 802.11ax HE80 | 122 | 5727.89 | 61.05 | 68.30 | -7.25 | H | PEAK | Pass | Band Edge |
| 28 | 802.11ax HE80 | 122 | - | - | - | - | - | - | - | Harmonic |
| 29 | 802.11a | 149 | - | - | - | - | - | - | - | Band Edge |
| 29 | 802.11a | 149 | 17235.00 | 47.99 | 68.30 | -20.31 | H | Peak | Pass | Harmonic |
| 30 | 802.11a | 157 | - | - | - | - | - | - | - | Band Edge |
| 30 | 802.11a | 157 | 17355.00 | 48.27 | 68.30 | -20.03 | V | Peak | Pass | Harmonic |
| 31 | 802.11a | 165 | 5948.58 | 52.94 | 68.30 | -15.36 | V | PEAK | Pass | Band Edge |
| 31 | 802.11a | 165 | 17475.00 | 47.68 | 68.30 | -20.62 | H | Peak | Pass | Harmonic |
| 32 | 802.11ax HE20 | 149 | 5646.04 | 54.12 | 68.30 | -14.08 | H | PEAK | Pass | Band Edge |
| 32 | 802.11ax HE20 | 149 | 17235.00 | 47.46 | 68.30 | -20.84 | H | Peak | Pass | Harmonic |
| 33 | 802.11ax HE20 | 157 | - | - | - | - | - | - | - | Band Edge |
| 33 | 802.11ax HE20 | 157 | 17355.00 | 48.00 | 68.30 | -20.30 | V | Peak | Pass | Harmonic |
| 34 | 802.11ax HE20 | 165 | 5942.69 | 53.05 | 68.30 | -15.25 | H | PEAK | Pass | Band Edge |
| 34 | 802.11ax HE20 | 165 | 17475.00 | 47.40 | 68.30 | -20.90 | V | Peak | Pass | Harmonic |
| 35 | 802.11ax HE40 | 151 | 5649.07 | 55.68 | 68.30 | -12.62 | H | PEAK | Pass | Band Edge |
| 35 | 802.11ax HE40 | 151 | - | - | - | - | - | - | - | Harmonic |
| 36 | 802.11ax HE40 | 159 | 5612.40 | 54.27 | 68.30 | -14.03 | H | PEAK | Pass | Band Edge |
| 36 | 802.11ax HE40 | 159 | - | - | - | - | - | - | - | Harmonic |
| 37 | 802.11ax HE80 | 155 | 5649.98 | 58.61 | 68.30 | -9.69 | H | PEAK | Pass | Band Edge |
| 37 | 802.11ax HE80 | 155 | 17325.00 | 47.70 | 68.30 | -20.60 | V | Peak | Pass | Harmonic |
| 38 | 802.11ax HE20 | 36 | 5137.97 | 47.82 | 54.00 | -6.18 | V | AVERAGE | Pass | Band Edge |
| 38 | 802.11ax HE20 | 36 | - | - | - | - | - | - | - | Harmonic |
| 39 | 802.11ax HE20 | 64 | 5358.43 | 47.81 | 54.00 | -6.19 | H | AVERAGE | Pass | Band Edge |
| 39 | 802.11ax HE20 | 64 | - | - | - | - | - | - | - | Harmonic |
| 40 | 802.11ax HE20 | 100 | 5457.79 | 46.26 | 54.00 | -7.74 | V | AVERAGE | Pass | Band Edge |
| 40 | 802.11ax HE20 | 100 | - | - | - | - | - | - | - | Harmonic |
| 41 | 802.11ax HE20 | 140 | 5741.24 | 62.72 | 68.30 | -5.58 | H | PEAK | Pass | Band Edge |
| 41 | 802.11ax HE20 | 140 | - | - | - | - | - | - | - | Harmonic |
| 42 | 802.11ax HE20 | 149 | 5608.56 | 53.99 | 68.30 | -14.31 | V | PEAK | Pass | Band Edge |
| 42 | 802.11ax HE20 | 149 | - | - | - | - | - | - | - | Harmonic |
| 43 | 802.11ax HE20 | 165 | 5949.00 | 53.59 | 68.30 | -14.71 | V | PEAK | Pass | Band Edge |
| 43 | 802.11ax HE20 | 165 | - | - | - | - | - | - | - | Harmonic |
| 45 | 802.11ax HE80 | 58 | 288.99 | 31.97 | 46 | -14.03 | H | PEAK | Pass | LF |
| 48 | Co-location | | 5350.79 | 48.48 | 54.00 | -5.52 | V | AVERAGE | Pass | Band Edge |
| | | | 10580.00 | 48.62 | 68.30 | -19.68 | V | Peak | Pass | Harmonic |

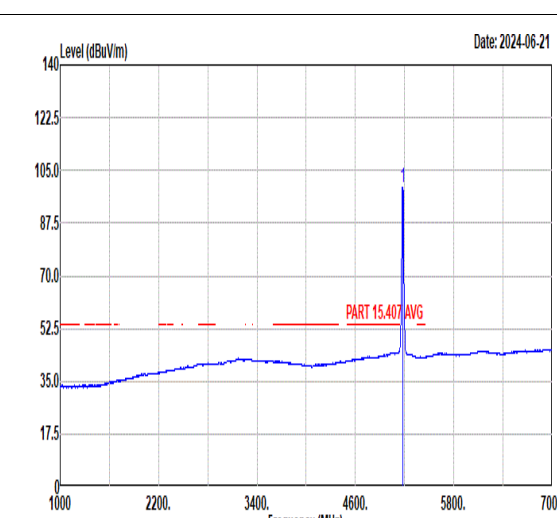

| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.99</td> <td>54.97</td> <td>74.00</td> <td>-19.03</td> <td>40.80</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>384</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.99 | 54.97 | 74.00 | -19.03 | 40.80 | 34.87 | 11.08 | 31.78 | 384 | 348 | PEAK |  <p>Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.01</td> <td>-----</td> <td>-----</td> <td>91.90</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>384</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 106.01 | ----- | ----- | 91.90 | 34.86 | 11.07 | 31.82 | 384 | 348 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.99 | 54.97 | 74.00 | -19.03 | 40.80 | 34.87 | 11.08 | 31.78 | 384 | 348 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 106.01 | ----- | ----- | 91.90 | 34.86 | 11.07 | 31.82 | 384 | 348 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.67</td> <td>46.30</td> <td>54.00</td> <td>-7.70</td> <td>32.12</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>384</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.67 | 46.30 | 54.00 | -7.70 | 32.12 | 34.87 | 11.09 | 31.78 | 384 | 348 | AVERAGE |  <p>Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.36</td> <td>-----</td> <td>-----</td> <td>85.23</td> <td>34.87</td> <td>11.07</td> <td>31.81</td> <td>384</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 99.36 | ----- | ----- | 85.23 | 34.87 | 11.07 | 31.81 | 384 | 348 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.67 | 46.30 | 54.00 | -7.70 | 32.12 | 34.87 | 11.09 | 31.78 | 384 | 348 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 99.36 | ----- | ----- | 85.23 | 34.87 | 11.07 | 31.81 | 384 | 348 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

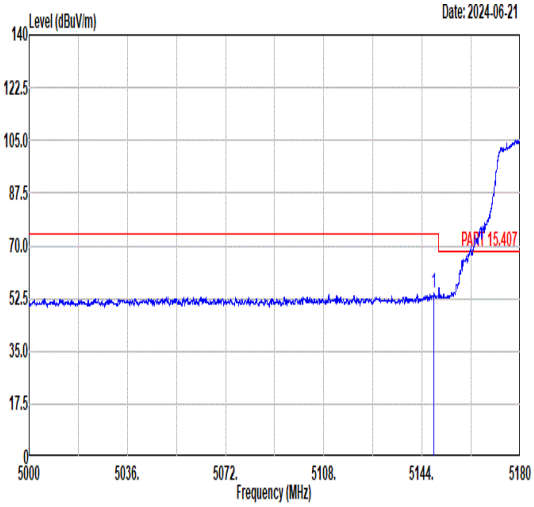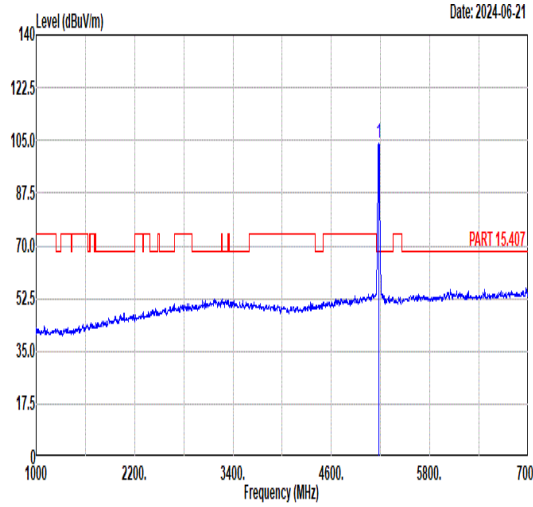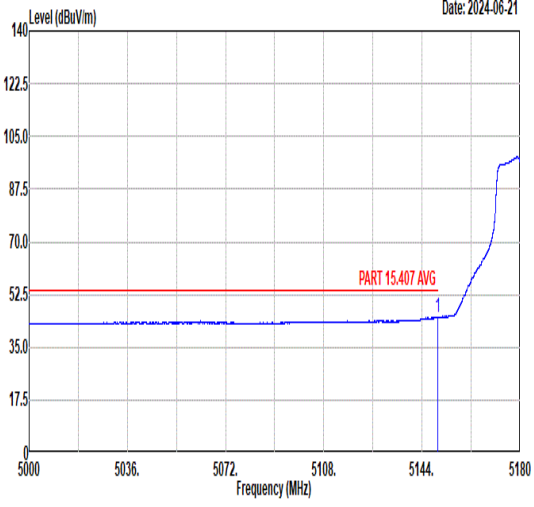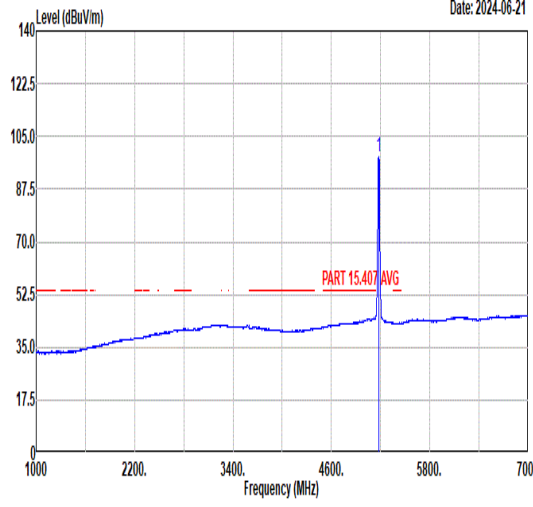

| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------------|--------|--------|------|----|---------|-------|------|------|-------|--------|-------------|--|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.43</td> <td>54.21</td> <td>74.00</td> <td>-19.79</td> <td>40.03</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>294</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5148.43 | 54.21 | 74.00 | -19.79 | 40.03 | 34.87 | 11.09 | 31.78 | 294 | 26 | PEAK |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.20</td> <td>-----</td> <td>-----</td> <td>90.09</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>294</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5180.00 | 104.20 | ----- | ----- | 90.09 | 34.86 | 11.07 | 31.82 | 294 | 26 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5148.43 | 54.21 | 74.00 | -19.79 | 40.03 | 34.87 | 11.09 | 31.78 | 294 | 26 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.20 | ----- | ----- | 90.09 | 34.86 | 11.07 | 31.82 | 294 | 26 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.67</td> <td>45.14</td> <td>54.00</td> <td>-8.86</td> <td>30.96</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>294</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5149.67 | 45.14 | 54.00 | -8.86 | 30.96 | 34.87 | 11.09 | 31.78 | 294 | 26 | AVERAGE |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>98.13</td> <td>-----</td> <td>-----</td> <td>84.01</td> <td>34.86</td> <td>11.07</td> <td>31.81</td> <td>294</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5180.00 | 98.13 | ----- | ----- | 84.01 | 34.86 | 11.07 | 31.81 | 294 | 26 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.67 | 45.14 | 54.00 | -8.86 | 30.96 | 34.87 | 11.09 | 31.78 | 294 | 26 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 98.13 | ----- | ----- | 84.01 | 34.86 | 11.07 | 31.81 | 294 | 26 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|--------------|-------------|-------|--------|--------|------------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-22</p> | <p>Date: 2024-06-22</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>47.74</td> <td>68.30</td> <td>-20.56</td> <td>44.92</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15540.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>40.47</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 10360.00 | 47.74 | 68.30 | -20.56 | 44.92 | 39.44 | 14.15 | 50.77 | -- -- Peak | 2 15540.00 | 47.71 | 74.00 | -26.29 | 40.47 | 41.82 | 16.85 | 51.43 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>48.09</td> <td>68.30</td> <td>-20.21</td> <td>45.27</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15540.00</td> <td>47.19</td> <td>74.00</td> <td>-26.81</td> <td>39.95</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 10360.00 | 48.09 | 68.30 | -20.21 | 45.27 | 39.44 | 14.15 | 50.77 | -- -- Peak | 2 15540.00 | 47.19 | 74.00 | -26.81 | 39.95 | 41.82 | 16.85 | 51.43 |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10360.00 | 47.74 | 68.30 | -20.56 | 44.92 | 39.44 | 14.15 | 50.77 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15540.00 | 47.71 | 74.00 | -26.29 | 40.47 | 41.82 | 16.85 | 51.43 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10360.00 | 48.09 | 68.30 | -20.21 | 45.27 | 39.44 | 14.15 | 50.77 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15540.00 | 47.19 | 74.00 | -26.81 | 39.95 | 41.82 | 16.85 | 51.43 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------------------|--------------|-------------|-------|--------|--------|-------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH44_5120MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-22</p> | <p>Date: 2024-06-22</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.19</td> <td>68.30</td> <td>-19.11</td> <td>46.30</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.28</td> <td>74.00</td> <td>-26.72</td> <td>39.97</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10440.00 | 49.19 | 68.30 | -19.11 | 46.30 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 47.28 | 74.00 | -26.72 | 39.97 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.06</td> <td>68.30</td> <td>-19.24</td> <td>46.17</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.34</td> <td>74.00</td> <td>-26.66</td> <td>40.03</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10440.00 | 49.06 | 68.30 | -19.24 | 46.17 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 47.34 | 74.00 | -26.66 | 40.03 | 41.90 | 16.94 | 51.53 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 49.19 | 68.30 | -19.11 | 46.30 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 47.28 | 74.00 | -26.72 | 39.97 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 49.06 | 68.30 | -19.24 | 46.17 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 47.34 | 74.00 | -26.66 | 40.03 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-22</p> | <p>Date: 2024-06-22</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.24</td> <td>68.30</td> <td>-20.06</td> <td>45.32</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.55</td> <td>74.00</td> <td>-26.45</td> <td>40.21</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10480.00 | 48.24 | 68.30 | -20.06 | 45.32 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | 2 | 15720.00 | 47.55 | 74.00 | -26.45 | 40.21 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.81</td> <td>68.30</td> <td>-20.49</td> <td>44.89</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.84</td> <td>74.00</td> <td>-26.16</td> <td>40.50</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10480.00 | 47.81 | 68.30 | -20.49 | 44.89 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | 2 | 15720.00 | 47.84 | 74.00 | -26.16 | 40.50 | 41.93 | 16.99 | 51.58 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10480.00 | 48.24 | 68.30 | -20.06 | 45.32 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15720.00 | 47.55 | 74.00 | -26.45 | 40.21 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10480.00 | 47.81 | 68.30 | -20.49 | 44.89 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15720.00 | 47.84 | 74.00 | -26.16 | 40.50 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

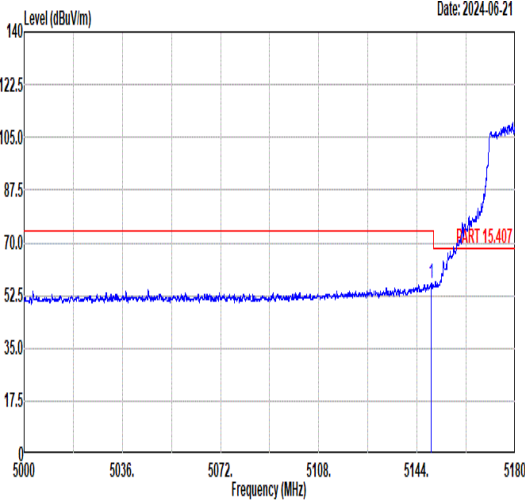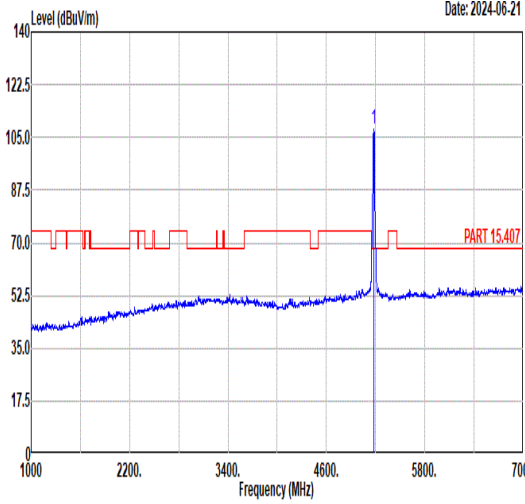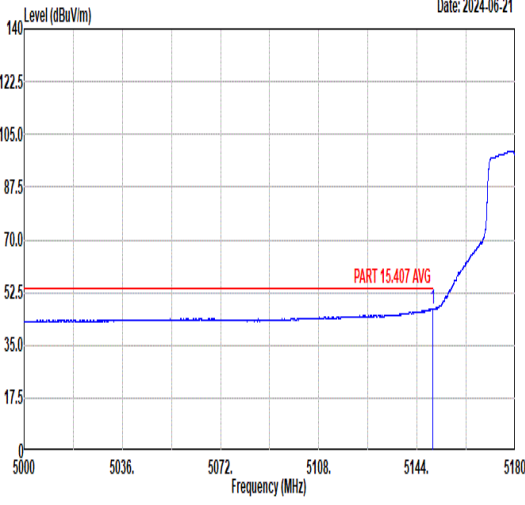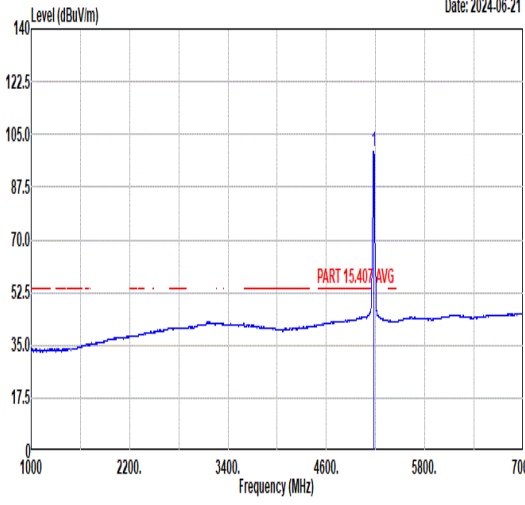

| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.31</td> <td>56.69</td> <td>74.00</td> <td>-17.31</td> <td>42.51</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>285</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.31 | 56.69 | 74.00 | -17.31 | 42.51 | 34.87 | 11.09 | 31.78 | 285 | 348 | PEAK |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>107.92</td> <td>-----</td> <td>-----</td> <td>93.81</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>285</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 107.92 | ----- | ----- | 93.81 | 34.86 | 11.07 | 31.82 | 285 | 348 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.31 | 56.69 | 74.00 | -17.31 | 42.51 | 34.87 | 11.09 | 31.78 | 285 | 348 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 107.92 | ----- | ----- | 93.81 | 34.86 | 11.07 | 31.82 | 285 | 348 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.85</td> <td>47.16</td> <td>54.00</td> <td>-6.84</td> <td>32.98</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>285</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.85 | 47.16 | 54.00 | -6.84 | 32.98 | 34.87 | 11.09 | 31.78 | 285 | 348 | AVERAGE |  <p style="text-align: right;">Date: 2024-06-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.37</td> <td>-----</td> <td>-----</td> <td>85.24</td> <td>34.87</td> <td>11.07</td> <td>31.81</td> <td>285</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 99.37 | ----- | ----- | 85.24 | 34.87 | 11.07 | 31.81 | 285 | 348 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.85 | 47.16 | 54.00 | -6.84 | 32.98 | 34.87 | 11.09 | 31.78 | 285 | 348 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 99.37 | ----- | ----- | 85.24 | 34.87 | 11.07 | 31.81 | 285 | 348 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.81</td> <td>54.43</td> <td>74.00</td> <td>-19.57</td> <td>40.25</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>400</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5146.81 | 54.43 | 74.00 | -19.57 | 40.25 | 34.87 | 11.09 | 31.78 | 400 | 16 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.34</td> <td>74.00</td> <td>32.34</td> <td>92.21</td> <td>34.87</td> <td>11.07</td> <td>31.81</td> <td>400</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 106.34 | 74.00 | 32.34 | 92.21 | 34.87 | 11.07 | 31.81 | 400 | 16 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5146.81 | 54.43 | 74.00 | -19.57 | 40.25 | 34.87 | 11.09 | 31.78 | 400 | 16 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 106.34 | 74.00 | 32.34 | 92.21 | 34.87 | 11.07 | 31.81 | 400 | 16 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.31</td> <td>45.85</td> <td>54.00</td> <td>-8.15</td> <td>31.67</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>400</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.31 | 45.85 | 54.00 | -8.15 | 31.67 | 34.87 | 11.09 | 31.78 | 400 | 16 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.55</td> <td>54.00</td> <td>43.55</td> <td>83.44</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>400</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 97.55 | 54.00 | 43.55 | 83.44 | 34.86 | 11.07 | 31.82 | 400 | 16 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.31 | 45.85 | 54.00 | -8.15 | 31.67 | 34.87 | 11.09 | 31.78 | 400 | 16 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 97.55 | 54.00 | 43.55 | 83.44 | 34.86 | 11.07 | 31.82 | 400 | 16 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------------------|--------------|-------------|-------|--------|--------|------------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-22</p> | <p>Date: 2024-06-22</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>48.39</td> <td>68.30</td> <td>-19.91</td> <td>45.57</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15540.00</td> <td>47.20</td> <td>74.00</td> <td>-26.80</td> <td>39.96</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 10360.00 | 48.39 | 68.30 | -19.91 | 45.57 | 39.44 | 14.15 | 50.77 | -- -- Peak | 2 15540.00 | 47.20 | 74.00 | -26.80 | 39.96 | 41.82 | 16.85 | 51.43 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>49.09</td> <td>68.30</td> <td>-19.21</td> <td>46.27</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15540.00</td> <td>47.98</td> <td>74.00</td> <td>-26.02</td> <td>40.74</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 10360.00 | 49.09 | 68.30 | -19.21 | 46.27 | 39.44 | 14.15 | 50.77 | -- -- Peak | 2 15540.00 | 47.98 | 74.00 | -26.02 | 40.74 | 41.82 | 16.85 | 51.43 |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10360.00 | 48.39 | 68.30 | -19.91 | 45.57 | 39.44 | 14.15 | 50.77 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15540.00 | 47.20 | 74.00 | -26.80 | 39.96 | 41.82 | 16.85 | 51.43 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10360.00 | 49.09 | 68.30 | -19.21 | 46.27 | 39.44 | 14.15 | 50.77 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15540.00 | 47.98 | 74.00 | -26.02 | 40.74 | 41.82 | 16.85 | 51.43 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH44_5120MHZ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-22</p> | <p>Date: 2024-06-22</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>48.11</td> <td>68.30</td> <td>-20.19</td> <td>45.22</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.46</td> <td>74.00</td> <td>-26.54</td> <td>40.15</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10440.00 | 48.11 | 68.30 | -20.19 | 45.22 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 47.46 | 74.00 | -26.54 | 40.15 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>48.87</td> <td>68.30</td> <td>-19.43</td> <td>45.98</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>40.22</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10440.00 | 48.87 | 68.30 | -19.43 | 45.98 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 47.53 | 74.00 | -26.47 | 40.22 | 41.90 | 16.94 | 51.53 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 48.11 | 68.30 | -20.19 | 45.22 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 47.46 | 74.00 | -26.54 | 40.15 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 48.87 | 68.30 | -19.43 | 45.98 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 47.53 | 74.00 | -26.47 | 40.22 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.88</td> <td>68.30</td> <td>-20.42</td> <td>44.96</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.62</td> <td>74.00</td> <td>-26.38</td> <td>40.28</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10480.00 | 47.88 | 68.30 | -20.42 | 44.96 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | 2 | 15720.00 | 47.62 | 74.00 | -26.38 | 40.28 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.53</td> <td>68.30</td> <td>-19.77</td> <td>45.61</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>40.49</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10480.00 | 48.53 | 68.30 | -19.77 | 45.61 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | 2 | 15720.00 | 47.83 | 74.00 | -26.17 | 40.49 | 41.93 | 16.99 | 51.58 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10480.00 | 47.88 | 68.30 | -20.42 | 44.96 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15720.00 | 47.62 | 74.00 | -26.38 | 40.28 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10480.00 | 48.53 | 68.30 | -19.77 | 45.61 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15720.00 | 47.83 | 74.00 | -26.17 | 40.49 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|-----------|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.12</td> <td>55.95</td> <td>74.00</td> <td>-18.05</td> <td>41.77</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>104</td> <td>3 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5148.12 | 55.95 | 74.00 | -18.05 | 41.77 | 34.87 | 11.09 | 31.78 | 104 | 3 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>100.71</td> <td>-----</td> <td>-----</td> <td>86.60</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>104</td> <td>3 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5190.00 | 100.71 | ----- | ----- | 86.60 | 34.86 | 11.07 | 31.82 | 104 | 3 PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5148.12 | 55.95 | 74.00 | -18.05 | 41.77 | 34.87 | 11.09 | 31.78 | 104 | 3 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 100.71 | ----- | ----- | 86.60 | 34.86 | 11.07 | 31.82 | 104 | 3 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.99</td> <td>46.95</td> <td>54.00</td> <td>-7.05</td> <td>32.78</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>104</td> <td>3 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5149.99 | 46.95 | 54.00 | -7.05 | 32.78 | 34.87 | 11.08 | 31.78 | 104 | 3 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>90.98</td> <td>-----</td> <td>-----</td> <td>76.87</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>104</td> <td>3 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5190.00 | 90.98 | ----- | ----- | 76.87 | 34.86 | 11.07 | 31.82 | 104 | 3 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.99 | 46.95 | 54.00 | -7.05 | 32.78 | 34.87 | 11.08 | 31.78 | 104 | 3 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 90.98 | ----- | ----- | 76.87 | 34.86 | 11.07 | 31.82 | 104 | 3 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.97</td> <td>52.26</td> <td>74.00</td> <td>-21.74</td> <td>38.52</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>104</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5352.97 | 52.26 | 74.00 | -21.74 | 38.52 | 34.83 | 10.94 | 32.03 | 104 | 3 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5352.97 | 52.26 | 74.00 | -21.74 | 38.52 | 34.83 | 10.94 | 32.03 | 104 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.76</td> <td>43.11</td> <td>54.00</td> <td>-10.89</td> <td>29.36</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>104</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5454.76 | 43.11 | 54.00 | -10.89 | 29.36 | 34.81 | 11.10 | 32.16 | 104 | 3 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5454.76 | 43.11 | 54.00 | -10.89 | 29.36 | 34.81 | 11.10 | 32.16 | 104 | 3 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------------|-------------|--------|--------|-------|-------|------|-------|-------------|--------------|-------------|--|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|---|-------|------|-----|-------|--------|------|------|------|-------|-------------|--------------|-------------|--|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.83</td> <td>58.11</td> <td>74.00</td> <td>-15.89</td> <td>43.93</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5149.83 | 58.11 | 74.00 | -15.89 | 43.93 | 34.87 | 11.09 | 31.78 | 100 | 311 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>101.11</td> <td>-----</td> <td>-----</td> <td>87.02</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>100</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5190.00 | 101.11 | ----- | ----- | 87.02 | 34.86 | 11.06 | 31.83 | 100 | 311 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.83 | 58.11 | 74.00 | -15.89 | 43.93 | 34.87 | 11.09 | 31.78 | 100 | 311 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 101.11 | ----- | ----- | 87.02 | 34.86 | 11.06 | 31.83 | 100 | 311 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.61</td> <td>48.49</td> <td>54.00</td> <td>-5.51</td> <td>34.31</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5149.61 | 48.49 | 54.00 | -5.51 | 34.31 | 34.87 | 11.09 | 31.78 | 100 | 311 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>92.65</td> <td>-----</td> <td>-----</td> <td>78.54</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5190.00 | 92.65 | ----- | ----- | 78.54 | 34.86 | 11.07 | 31.82 | 100 | 311 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.61 | 48.49 | 54.00 | -5.51 | 34.31 | 34.87 | 11.09 | 31.78 | 100 | 311 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 92.65 | ----- | ----- | 78.54 | 34.86 | 11.07 | 31.82 | 100 | 311 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.64</td> <td>53.40</td> <td>74.00</td> <td>-20.60</td> <td>39.67</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>100</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5358.64 | 53.40 | 74.00 | -20.60 | 39.67 | 34.83 | 10.94 | 32.04 | 100 | 311 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5358.64 | 53.40 | 74.00 | -20.60 | 39.67 | 34.83 | 10.94 | 32.04 | 100 | 311 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.98</td> <td>43.05</td> <td>54.00</td> <td>-10.95</td> <td>29.29</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>100</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5457.98 | 43.05 | 54.00 | -10.95 | 29.29 | 34.81 | 11.11 | 32.16 | 100 | 311 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5457.98 | 43.05 | 54.00 | -10.95 | 29.29 | 34.81 | 11.11 | 32.16 | 100 | 311 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |

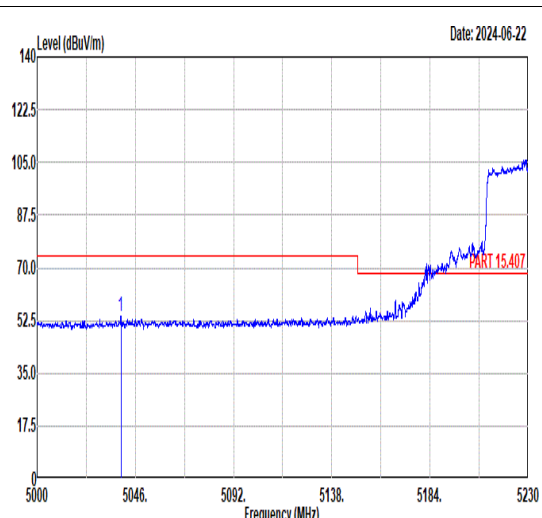
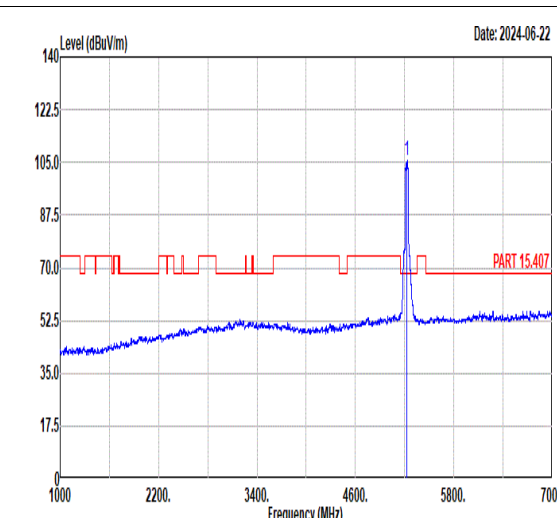
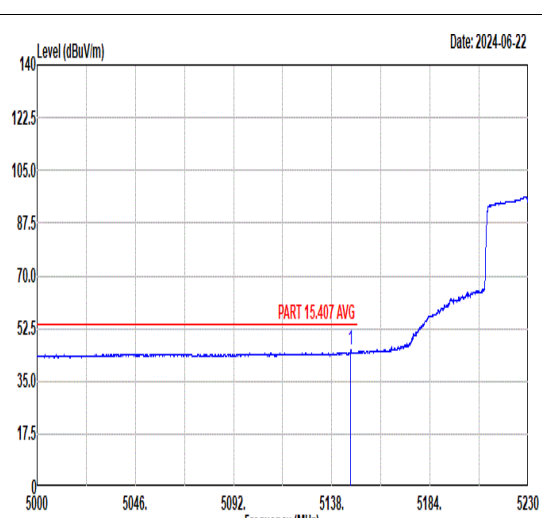
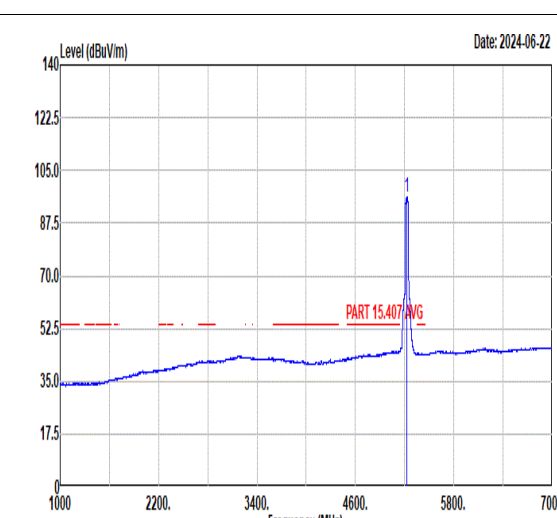


| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|-----------|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|--|--|--|--|--|--|--|--|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|--|--|--|--|--|--|--|--|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5039.22</td> <td>54.00</td> <td>74.00</td> <td>-20.00</td> <td>39.60</td> <td>34.89</td> <td>11.15</td> <td>31.64</td> <td>215</td> <td>3 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | deg | 1 | 5039.22 | 54.00 | 74.00 | -20.00 | 39.60 | 34.89 | 11.15 | 31.64 | 215 | 3 PEAK |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>105.57</td> <td>-----</td> <td>-----</td> <td>91.57</td> <td>34.85</td> <td>11.03</td> <td>31.88</td> <td>215</td> <td>3 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | deg | 1 | 5230.00 | 105.57 | ----- | ----- | 91.57 | 34.85 | 11.03 | 31.88 | 215 | 3 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5039.22 | 54.00 | 74.00 | -20.00 | 39.60 | 34.89 | 11.15 | 31.64 | 215 | 3 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5230.00 | 105.57 | ----- | ----- | 91.57 | 34.85 | 11.03 | 31.88 | 215 | 3 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.88</td> <td>45.24</td> <td>54.00</td> <td>-8.76</td> <td>31.06</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>215</td> <td>3 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | deg | 1 | 5146.88 | 45.24 | 54.00 | -8.76 | 31.06 | 34.87 | 11.09 | 31.78 | 215 | 3 AVERAGE |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>96.23</td> <td>-----</td> <td>-----</td> <td>82.22</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>215</td> <td>3 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | deg | 1 | 5230.00 | 96.23 | ----- | ----- | 82.22 | 34.85 | 11.04 | 31.88 | 215 | 3 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5146.88 | 45.24 | 54.00 | -8.76 | 31.06 | 34.87 | 11.09 | 31.78 | 215 | 3 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5230.00 | 96.23 | ----- | ----- | 82.22 | 34.85 | 11.04 | 31.88 | 215 | 3 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5427.94</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>40.02</td> <td>34.81</td> <td>10.99</td> <td>32.13</td> <td>215</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5427.94 | 53.69 | 74.00 | -20.31 | 40.02 | 34.81 | 10.99 | 32.13 | 215 | 3 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5427.94 | 53.69 | 74.00 | -20.31 | 40.02 | 34.81 | 10.99 | 32.13 | 215 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.10</td> <td>43.55</td> <td>54.00</td> <td>-10.45</td> <td>29.81</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>215</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5351.10 | 43.55 | 54.00 | -10.45 | 29.81 | 34.83 | 10.94 | 32.03 | 215 | 3 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5351.10 | 43.55 | 54.00 | -10.45 | 29.81 | 34.83 | 10.94 | 32.03 | 215 | 3 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

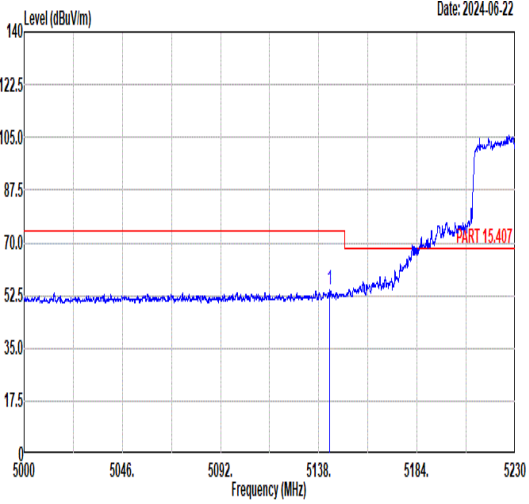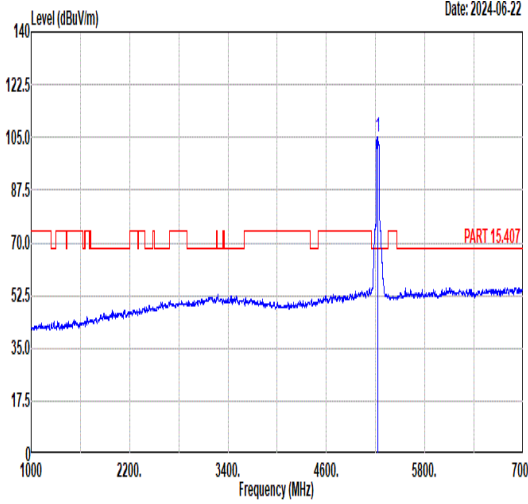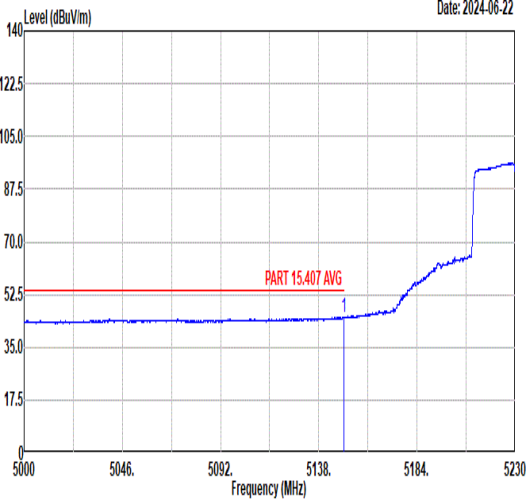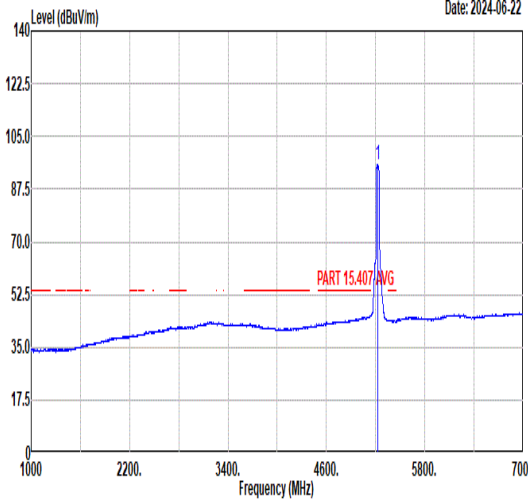

| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.18</td> <td>54.29</td> <td>74.00</td> <td>-19.71</td> <td>40.10</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>100</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5143.18 | 54.29 | 74.00 | -19.71 | 40.10 | 34.87 | 11.09 | 31.77 | 100 | 356 | PEAK |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>105.33</td> <td>-----</td> <td>-----</td> <td>91.30</td> <td>34.86</td> <td>11.04</td> <td>31.87</td> <td>100</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5230.00 | 105.33 | ----- | ----- | 91.30 | 34.86 | 11.04 | 31.87 | 100 | 356 | PEAK |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5143.18 | 54.29 | 74.00 | -19.71 | 40.10 | 34.87 | 11.09 | 31.77 | 100 | 356 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5230.00 | 105.33 | ----- | ----- | 91.30 | 34.86 | 11.04 | 31.87 | 100 | 356 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.62</td> <td>45.03</td> <td>54.00</td> <td>-8.97</td> <td>30.85</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.62 | 45.03 | 54.00 | -8.97 | 30.85 | 34.87 | 11.09 | 31.78 | 100 | 356 | AVERAGE |  <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>95.87</td> <td>-----</td> <td>-----</td> <td>81.86</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>100</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5230.00 | 95.87 | ----- | ----- | 81.86 | 34.85 | 11.04 | 31.88 | 100 | 356 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.62 | 45.03 | 54.00 | -8.97 | 30.85 | 34.87 | 11.09 | 31.78 | 100 | 356 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5230.00 | 95.87 | ----- | ----- | 81.86 | 34.85 | 11.04 | 31.88 | 100 | 356 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5400.34</td> <td>52.36</td> <td>74.00</td> <td>-21.64</td> <td>38.72</td> <td>34.82</td> <td>10.91</td> <td>32.09</td> <td>100</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5400.34 | 52.36 | 74.00 | -21.64 | 38.72 | 34.82 | 10.91 | 32.09 | 100 | 356 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5400.34 | 52.36 | 74.00 | -21.64 | 38.72 | 34.82 | 10.91 | 32.09 | 100 | 356 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.01</td> <td>43.21</td> <td>54.00</td> <td>-10.79</td> <td>29.48</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>100</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5355.01 | 43.21 | 54.00 | -10.79 | 29.48 | 34.83 | 10.94 | 32.04 | 100 | 356 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5355.01 | 43.21 | 54.00 | -10.79 | 29.48 | 34.83 | 10.94 | 32.04 | 100 | 356 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|-------|--------|-------------|--------|-------|-------|-----------|-----------|-------------|-------|--------|-------------|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|-------|------|-----|-------|--------|------|------|------|-------|-------------|-------|--------|-------------|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.65</td> <td>53.64</td> <td>74.00</td> <td>-20.36</td> <td>39.45</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>228</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5141.65 | 53.64 | 74.00 | -20.36 | 39.45 | 34.87 | 11.09 | 31.77 | 228 | 2 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>93.68</td> <td>-----</td> <td>79.69</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>228</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5210.00 | 93.68 | ----- | 79.69 | 34.85 | 11.03 | 31.89 | 228 | 2 PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5141.65 | 53.64 | 74.00 | -20.36 | 39.45 | 34.87 | 11.09 | 31.77 | 228 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5210.00 | 93.68 | ----- | 79.69 | 34.85 | 11.03 | 31.89 | 228 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.65</td> <td>46.85</td> <td>54.00</td> <td>-7.15</td> <td>32.67</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>228</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5149.65 | 46.85 | 54.00 | -7.15 | 32.67 | 34.87 | 11.09 | 31.78 | 228 | 2 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>86.10</td> <td>-----</td> <td>72.05</td> <td>34.86</td> <td>11.05</td> <td>31.86</td> <td>228</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5210.00 | 86.10 | ----- | 72.05 | 34.86 | 11.05 | 31.86 | 228 | 2 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.65 | 46.85 | 54.00 | -7.15 | 32.67 | 34.87 | 11.09 | 31.78 | 228 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5210.00 | 86.10 | ----- | 72.05 | 34.86 | 11.05 | 31.86 | 228 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|--------|-----------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.15</td> <td>52.10</td> <td>74.00</td> <td>-21.90</td> <td>38.36</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>228</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5352.15 | 52.10 | 74.00 | -21.90 | 38.36 | 34.83 | 10.94 | 32.03 | 228 | 2 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5352.15 | 52.10 | 74.00 | -21.90 | 38.36 | 34.83 | 10.94 | 32.03 | 228 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p style="text-align: right;">Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.38</td> <td>44.54</td> <td>54.00</td> <td>-9.46</td> <td>30.82</td> <td>34.83</td> <td>10.93</td> <td>32.04</td> <td>228</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5362.38 | 44.54 | 54.00 | -9.46 | 30.82 | 34.83 | 10.93 | 32.04 | 228 | 2 AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5362.38 | 44.54 | 54.00 | -9.46 | 30.82 | 34.83 | 10.93 | 32.04 | 228 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|------|-------------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-------------|--|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--------|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|-------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.02</td> <td>55.70</td> <td>74.00</td> <td>-18.30</td> <td>41.52</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>229</td> <td>316 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | 1 | 5149.02 | 55.70 | 74.00 | -18.30 | 41.52 | 34.87 | 11.09 | 31.78 | 229 | 316 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>96.06</td> <td>-----</td> <td>-----</td> <td>82.00</td> <td>34.86</td> <td>11.05</td> <td>31.85</td> <td>229</td> <td>316 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | 1 | 5210.00 | 96.06 | ----- | ----- | 82.00 | 34.86 | 11.05 | 31.85 | 229 | 316 PEAK |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.02 | 55.70 | 74.00 | -18.30 | 41.52 | 34.87 | 11.09 | 31.78 | 229 | 316 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5210.00 | 96.06 | ----- | ----- | 82.00 | 34.86 | 11.05 | 31.85 | 229 | 316 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.44</td> <td>48.02</td> <td>54.00</td> <td>-5.98</td> <td>33.84</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>229</td> <td>316 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | 1 | 5149.44 | 48.02 | 54.00 | -5.98 | 33.84 | 34.87 | 11.09 | 31.78 | 229 | 316 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.03</td> <td>-----</td> <td>-----</td> <td>73.95</td> <td>34.86</td> <td>11.06</td> <td>31.84</td> <td>229</td> <td>316 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | 1 | 5210.00 | 88.03 | ----- | ----- | 73.95 | 34.86 | 11.06 | 31.84 | 229 | 316 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.44 | 48.02 | 54.00 | -5.98 | 33.84 | 34.87 | 11.09 | 31.78 | 229 | 316 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5210.00 | 88.03 | ----- | ----- | 73.95 | 34.86 | 11.06 | 31.84 | 229 | 316 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5376.15</td> <td>51.97</td> <td>74.00</td> <td>-22.03</td> <td>38.29</td> <td>34.82</td> <td>10.92</td> <td>32.06</td> <td>229</td> <td>316</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5376.15 | 51.97 | 74.00 | -22.03 | 38.29 | 34.82 | 10.92 | 32.06 | 229 | 316 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5376.15 | 51.97 | 74.00 | -22.03 | 38.29 | 34.82 | 10.92 | 32.06 | 229 | 316 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.38</td> <td>44.62</td> <td>54.00</td> <td>-9.38</td> <td>30.89</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>229</td> <td>316</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5361.38 | 44.62 | 54.00 | -9.38 | 30.89 | 34.83 | 10.94 | 32.04 | 229 | 316 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5361.38 | 44.62 | 54.00 | -9.38 | 30.89 | 34.83 | 10.94 | 32.04 | 229 | 316 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.17</td> <td>68.30</td> <td>-20.13</td> <td>45.22</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.27</td> <td>74.00</td> <td>-26.73</td> <td>39.89</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10520.00 | 48.17 | 68.30 | -20.13 | 45.22 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 47.27 | 74.00 | -26.73 | 39.89 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.77</td> <td>68.30</td> <td>-19.53</td> <td>45.82</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.68</td> <td>74.00</td> <td>-26.32</td> <td>40.30</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10520.00 | 48.77 | 68.30 | -19.53 | 45.82 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 47.68 | 74.00 | -26.32 | 40.30 | 41.97 | 17.04 | 51.63 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.17 | 68.30 | -20.13 | 45.22 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 47.27 | 74.00 | -26.73 | 39.89 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.77 | 68.30 | -19.53 | 45.82 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 47.68 | 74.00 | -26.32 | 40.30 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|-------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.52</td> <td>74.00</td> <td>-25.48</td> <td>45.54</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.24</td> <td>74.00</td> <td>-26.76</td> <td>39.78</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10600.00 | 48.52 | 74.00 | -25.48 | 45.54 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | 2 | 15900.00 | 47.24 | 74.00 | -26.76 | 39.78 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>53.90</td> <td>74.00</td> <td>-20.10</td> <td>50.92</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>43.92</td> <td>54.00</td> <td>-10.08</td> <td>40.94</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>46.62</td> <td>74.00</td> <td>-27.38</td> <td>39.16</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10600.00 | 53.90 | 74.00 | -20.10 | 50.92 | 39.48 | 14.30 | 50.80 | 100 | 12 | Peak | 2 | 10600.00 | 43.92 | 54.00 | -10.08 | 40.94 | 39.48 | 14.30 | 50.80 | 100 | 12 | Average | 3 | 15900.00 | 46.62 | 74.00 | -27.38 | 39.16 | 42.04 | 17.14 | 51.72 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 48.52 | 74.00 | -25.48 | 45.54 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15900.00 | 47.24 | 74.00 | -26.76 | 39.78 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 53.90 | 74.00 | -20.10 | 50.92 | 39.48 | 14.30 | 50.80 | 100 | 12 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10600.00 | 43.92 | 54.00 | -10.08 | 40.94 | 39.48 | 14.30 | 50.80 | 100 | 12 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 15900.00 | 46.62 | 74.00 | -27.38 | 39.16 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.47</td> <td>54.33</td> <td>74.00</td> <td>-19.67</td> <td>40.60</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>219</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5356.47 | 54.33 | 74.00 | -19.67 | 40.60 | 34.83 | 10.94 | 32.04 | 219 | 2 PEAK | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>104.96</td> <td>-----</td> <td>-----</td> <td>91.14</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>219</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 104.96 | ----- | ----- | 91.14 | 34.84 | 10.97 | 31.99 | 219 | 2 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5356.47 | 54.33 | 74.00 | -19.67 | 40.60 | 34.83 | 10.94 | 32.04 | 219 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 104.96 | ----- | ----- | 91.14 | 34.84 | 10.97 | 31.99 | 219 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.70</td> <td>44.97</td> <td>54.00</td> <td>-9.03</td> <td>31.23</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>219</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5352.70 | 44.97 | 54.00 | -9.03 | 31.23 | 34.83 | 10.94 | 32.03 | 219 | 2 AVERAGE | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.68</td> <td>-----</td> <td>-----</td> <td>84.86</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>219</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 98.68 | ----- | ----- | 84.86 | 34.84 | 10.97 | 31.99 | 219 | 2 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5352.70 | 44.97 | 54.00 | -9.03 | 31.23 | 34.83 | 10.94 | 32.03 | 219 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 98.68 | ----- | ----- | 84.86 | 34.84 | 10.97 | 31.99 | 219 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|------|------|-------|---------|--------|-------|--------|------|--------|----|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|--|---|---------|-------|--------|-------|-------|-------|-------|-----|-----|--|---------|---|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|----|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|--|---|---------|--------|-------|-------|-------|-------|-------|-----|-----|--|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.17</td> <td>54.20</td> <td>-19.80</td> <td>40.46</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>221</td> <td>318</td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 5350.17 | 54.20 | -19.80 | 40.46 | 34.83 | 10.94 | 32.03 | 221 | 318 | | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.58</td> <td>-----</td> <td>92.76</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>221</td> <td>318</td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 5320.00 | 106.58 | ----- | 92.76 | 34.84 | 10.97 | 31.99 | 221 | 318 | | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.17 | 54.20 | -19.80 | 40.46 | 34.83 | 10.94 | 32.03 | 221 | 318 | | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 106.58 | ----- | 92.76 | 34.84 | 10.97 | 31.99 | 221 | 318 | | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>44.57</td> <td>-9.43</td> <td>30.83</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>221</td> <td>318</td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 5350.00 | 44.57 | -9.43 | 30.83 | 34.83 | 10.94 | 32.03 | 221 | 318 | | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.06</td> <td>-----</td> <td>86.24</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>221</td> <td>318</td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 5320.00 | 100.06 | ----- | 86.24 | 34.84 | 10.97 | 31.99 | 221 | 318 | | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.00 | 44.57 | -9.43 | 30.83 | 34.83 | 10.94 | 32.03 | 221 | 318 | | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 100.06 | ----- | 86.24 | 34.84 | 10.97 | 31.99 | 221 | 318 | | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|-------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|-----|----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.06</td> <td>74.00</td> <td>-25.94</td> <td>45.07</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.21</td> <td>74.00</td> <td>-26.79</td> <td>39.71</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10640.00 | 48.06 | 74.00 | -25.94 | 45.07 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | 2 | 15960.00 | 47.21 | 74.00 | -26.79 | 39.71 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>53.55</td> <td>74.00</td> <td>-20.45</td> <td>50.56</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>44.34</td> <td>54.00</td> <td>-9.66</td> <td>41.35</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>47.86</td> <td>74.00</td> <td>-26.14</td> <td>40.36</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10640.00 | 53.55 | 74.00 | -20.45 | 50.56 | 39.47 | 14.32 | 50.80 | 100 | 12 | Peak | 2 | 10640.00 | 44.34 | 54.00 | -9.66 | 41.35 | 39.47 | 14.32 | 50.80 | 100 | 12 | Average | 3 | 15960.00 | 47.86 | 74.00 | -26.14 | 40.36 | 42.08 | 17.19 | 51.77 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 48.06 | 74.00 | -25.94 | 45.07 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15960.00 | 47.21 | 74.00 | -26.79 | 39.71 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 53.55 | 74.00 | -20.45 | 50.56 | 39.47 | 14.32 | 50.80 | 100 | 12 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10640.00 | 44.34 | 54.00 | -9.66 | 41.35 | 39.47 | 14.32 | 50.80 | 100 | 12 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 15960.00 | 47.86 | 74.00 | -26.14 | 40.36 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.30</td> <td>68.30</td> <td>-20.00</td> <td>45.35</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.00</td> <td>74.00</td> <td>-27.00</td> <td>39.62</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10520.00 | 48.30 | 68.30 | -20.00 | 45.35 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 47.00 | 74.00 | -27.00 | 39.62 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.46</td> <td>68.30</td> <td>-19.84</td> <td>45.51</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.62</td> <td>74.00</td> <td>-26.38</td> <td>40.24</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10520.00 | 48.46 | 68.30 | -19.84 | 45.51 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 47.62 | 74.00 | -26.38 | 40.24 | 41.97 | 17.04 | 51.63 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.30 | 68.30 | -20.00 | 45.35 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 47.00 | 74.00 | -27.00 | 39.62 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.46 | 68.30 | -19.84 | 45.51 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 47.62 | 74.00 | -26.38 | 40.24 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|-------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|-----|----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH60_5300MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>49.94</td> <td>74.00</td> <td>-24.06</td> <td>46.96</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>39.50</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10600.00 | 49.94 | 74.00 | -24.06 | 46.96 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | 2 | 15900.00 | 46.96 | 74.00 | -27.04 | 39.50 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>54.22</td> <td>74.00</td> <td>-19.78</td> <td>51.24</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>44.19</td> <td>54.00</td> <td>-9.81</td> <td>41.21</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>46.78</td> <td>74.00</td> <td>-27.22</td> <td>39.32</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10600.00 | 54.22 | 74.00 | -19.78 | 51.24 | 39.48 | 14.30 | 50.80 | 100 | 12 | Peak | 2 | 10600.00 | 44.19 | 54.00 | -9.81 | 41.21 | 39.48 | 14.30 | 50.80 | 100 | 12 | Average | 3 | 15900.00 | 46.78 | 74.00 | -27.22 | 39.32 | 42.04 | 17.14 | 51.72 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 49.94 | 74.00 | -24.06 | 46.96 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15900.00 | 46.96 | 74.00 | -27.04 | 39.50 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 54.22 | 74.00 | -19.78 | 51.24 | 39.48 | 14.30 | 50.80 | 100 | 12 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10600.00 | 44.19 | 54.00 | -9.81 | 41.21 | 39.48 | 14.30 | 50.80 | 100 | 12 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 15900.00 | 46.78 | 74.00 | -27.22 | 39.32 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|-----------|------|-------|------|--------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|---|-------|------|-----|-------|--------|------|------|--------|--|------|-------|------|--------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.17</td> <td>57.08</td> <td>74.00</td> <td>-16.92</td> <td>43.35</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>220</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5357.17 | 57.08 | 74.00 | -16.92 | 43.35 | 34.83 | 10.94 | 32.04 | 220 | 2 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.28</td> <td>-----</td> <td>-----</td> <td>92.45</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>220</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 106.28 | ----- | ----- | 92.45 | 34.84 | 10.97 | 31.98 | 220 | 2 PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5357.17 | 57.08 | 74.00 | -16.92 | 43.35 | 34.83 | 10.94 | 32.04 | 220 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 106.28 | ----- | ----- | 92.45 | 34.84 | 10.97 | 31.98 | 220 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.31</td> <td>45.77</td> <td>54.00</td> <td>-8.23</td> <td>32.03</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>220</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.31 | 45.77 | 54.00 | -8.23 | 32.03 | 34.83 | 10.94 | 32.03 | 220 | 2 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.00</td> <td>-----</td> <td>-----</td> <td>84.18</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>220</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 98.00 | ----- | ----- | 84.18 | 34.84 | 10.97 | 31.99 | 220 | 2 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.31 | 45.77 | 54.00 | -8.23 | 32.03 | 34.83 | 10.94 | 32.03 | 220 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 98.00 | ----- | ----- | 84.18 | 34.84 | 10.97 | 31.99 | 220 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|-------|--------|-------------|--------|-------|-------|------|-------|-------------|-------|--------|-------------|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|------|-------|-------------|-------|--------|-------------|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.27</td> <td>56.34</td> <td>74.00</td> <td>-17.66</td> <td>42.60</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>221</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5352.27 | 56.34 | 74.00 | -17.66 | 42.60 | 34.83 | 10.94 | 32.03 | 221 | 319 | PEAK | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.17</td> <td>-----</td> <td>-----</td> <td>94.35</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>221</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5320.00 | 108.17 | ----- | ----- | 94.35 | 34.84 | 10.97 | 31.99 | 221 | 319 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5352.27 | 56.34 | 74.00 | -17.66 | 42.60 | 34.83 | 10.94 | 32.03 | 221 | 319 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 108.17 | ----- | ----- | 94.35 | 34.84 | 10.97 | 31.99 | 221 | 319 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.88</td> <td>45.48</td> <td>54.00</td> <td>-8.52</td> <td>31.74</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>221</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5350.88 | 45.48 | 54.00 | -8.52 | 31.74 | 34.83 | 10.94 | 32.03 | 221 | 319 | AVERAGE | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.40</td> <td>-----</td> <td>-----</td> <td>84.58</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>221</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5320.00 | 98.40 | ----- | ----- | 84.58 | 34.84 | 10.97 | 31.99 | 221 | 319 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.88 | 45.48 | 54.00 | -8.52 | 31.74 | 34.83 | 10.94 | 32.03 | 221 | 319 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 98.40 | ----- | ----- | 84.58 | 34.84 | 10.97 | 31.99 | 221 | 319 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|-------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>49.81</td> <td>74.00</td> <td>-24.19</td> <td>46.82</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.57</td> <td>74.00</td> <td>-26.43</td> <td>40.07</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10640.00 | 49.81 | 74.00 | -24.19 | 46.82 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | 2 | 15960.00 | 47.57 | 74.00 | -26.43 | 40.07 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>53.34</td> <td>74.00</td> <td>-20.66</td> <td>50.35</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>40.95</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>100</td> <td>12</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>47.32</td> <td>74.00</td> <td>-26.68</td> <td>39.82</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 10640.00 | 53.34 | 74.00 | -20.66 | 50.35 | 39.47 | 14.32 | 50.80 | 100 | 12 | Peak | 2 | 10640.00 | 43.94 | 54.00 | -10.06 | 40.95 | 39.47 | 14.32 | 50.80 | 100 | 12 | Average | 3 | 15960.00 | 47.32 | 74.00 | -26.68 | 39.82 | 42.08 | 17.19 | 51.77 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 49.81 | 74.00 | -24.19 | 46.82 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15960.00 | 47.57 | 74.00 | -26.43 | 40.07 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 53.34 | 74.00 | -20.66 | 50.35 | 39.47 | 14.32 | 50.80 | 100 | 12 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10640.00 | 43.94 | 54.00 | -10.06 | 40.95 | 39.47 | 14.32 | 50.80 | 100 | 12 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 15960.00 | 47.32 | 74.00 | -26.68 | 39.82 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5051.19</td> <td>53.60</td> <td>74.00</td> <td>-20.40</td> <td>39.23</td> <td>34.89</td> <td>11.14</td> <td>31.66</td> <td>212</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5051.19 | 53.60 | 74.00 | -20.40 | 39.23 | 34.89 | 11.14 | 31.66 | 212 | 2 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>104.49</td> <td>-----</td> <td>-----</td> <td>90.56</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>212</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 104.49 | ----- | ----- | 90.56 | 34.85 | 11.01 | 31.93 | 212 | 2 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5051.19 | 53.60 | 74.00 | -20.40 | 39.23 | 34.89 | 11.14 | 31.66 | 212 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 104.49 | ----- | ----- | 90.56 | 34.85 | 11.01 | 31.93 | 212 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5114.10</td> <td>44.37</td> <td>54.00</td> <td>-9.63</td> <td>30.12</td> <td>34.88</td> <td>11.11</td> <td>31.74</td> <td>212</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5114.10 | 44.37 | 54.00 | -9.63 | 30.12 | 34.88 | 11.11 | 31.74 | 212 | 2 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>95.74</td> <td>-----</td> <td>-----</td> <td>81.81</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>212</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 95.74 | ----- | ----- | 81.81 | 34.85 | 11.01 | 31.93 | 212 | 2 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5114.10 | 44.37 | 54.00 | -9.63 | 30.12 | 34.88 | 11.11 | 31.74 | 212 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 95.74 | ----- | ----- | 81.81 | 34.85 | 11.01 | 31.93 | 212 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------|--------|--------|------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.13</td> <td>58.16</td> <td>74.00</td> <td>-15.84</td> <td>44.42</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>212</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5353.13 | 58.16 | 74.00 | -15.84 | 44.42 | 34.83 | 10.94 | 32.03 | 212 | 2 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5353.13 | 58.16 | 74.00 | -15.84 | 44.42 | 34.83 | 10.94 | 32.03 | 212 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.51</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>32.30</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>212</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5353.51 | 46.04 | 54.00 | -7.96 | 32.30 | 34.83 | 10.94 | 32.03 | 212 | 2 AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5353.51 | 46.04 | 54.00 | -7.96 | 32.30 | 34.83 | 10.94 | 32.03 | 212 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

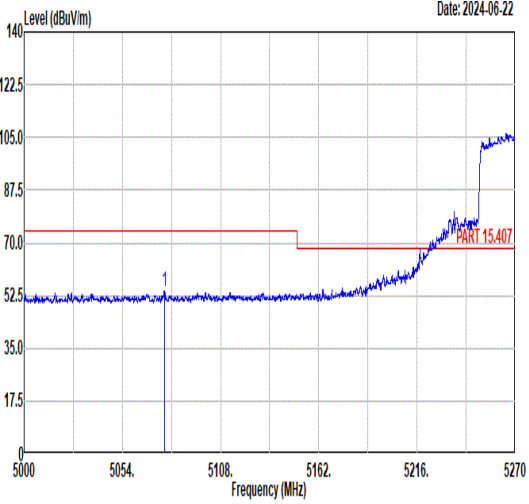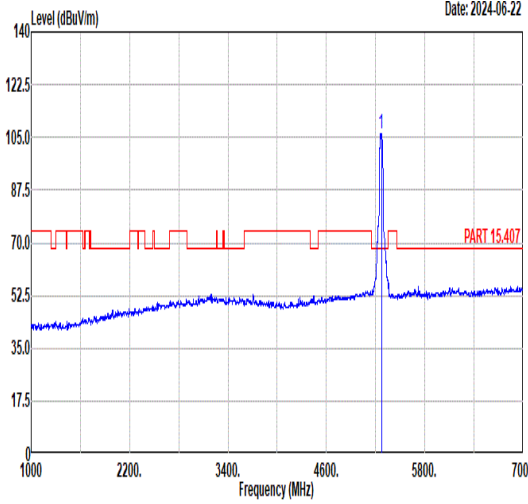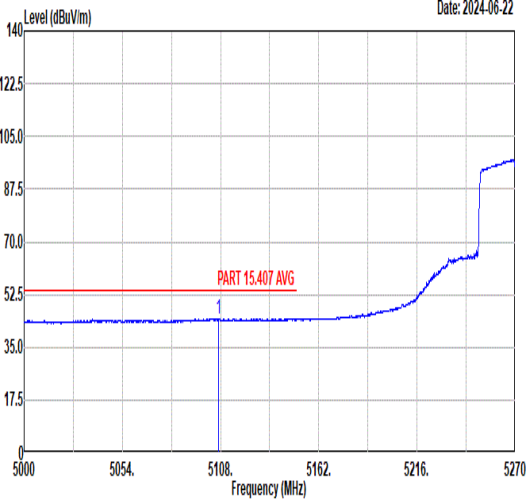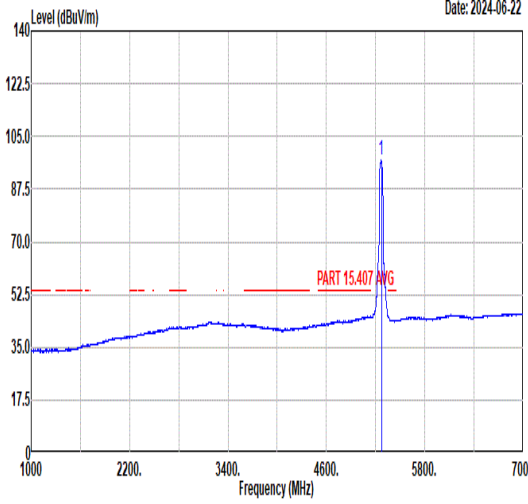

| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------------|--------|--------|--------|-------------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-------------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5077.09</td> <td>53.97</td> <td>74.00</td> <td>-20.03</td> <td>39.65</td> <td>34.88</td> <td>11.13</td> <td>31.69</td> <td>226</td> <td>319 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5077.09 | 53.97 | 74.00 | -20.03 | 39.65 | 34.88 | 11.13 | 31.69 | 226 | 319 PEAK |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>106.41</td> <td>-----</td> <td>-----</td> <td>92.51</td> <td>34.84</td> <td>11.00</td> <td>31.94</td> <td>226</td> <td>319 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 106.41 | ----- | ----- | 92.51 | 34.84 | 11.00 | 31.94 | 226 | 319 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5077.09 | 53.97 | 74.00 | -20.03 | 39.65 | 34.88 | 11.13 | 31.69 | 226 | 319 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 106.41 | ----- | ----- | 92.51 | 34.84 | 11.00 | 31.94 | 226 | 319 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5107.06</td> <td>44.55</td> <td>54.00</td> <td>-9.45</td> <td>30.29</td> <td>34.88</td> <td>11.11</td> <td>31.73</td> <td>226</td> <td>319 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5107.06 | 44.55 | 54.00 | -9.45 | 30.29 | 34.88 | 11.11 | 31.73 | 226 | 319 AVERAGE |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>96.95</td> <td>-----</td> <td>-----</td> <td>83.02</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>226</td> <td>319 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 96.95 | ----- | ----- | 83.02 | 34.85 | 11.01 | 31.93 | 226 | 319 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5107.06 | 44.55 | 54.00 | -9.45 | 30.29 | 34.88 | 11.11 | 31.73 | 226 | 319 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 96.95 | ----- | ----- | 83.02 | 34.85 | 11.01 | 31.93 | 226 | 319 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.84</td> <td>60.16</td> <td>74.00</td> <td>-13.84</td> <td>46.43</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>226</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5358.84 | 60.16 | 74.00 | -13.84 | 46.43 | 34.83 | 10.94 | 32.04 | 226 | 319 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5358.84 | 60.16 | 74.00 | -13.84 | 46.43 | 34.83 | 10.94 | 32.04 | 226 | 319 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.33</td> <td>46.31</td> <td>54.00</td> <td>-7.69</td> <td>32.57</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>226</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5353.33 | 46.31 | 54.00 | -7.69 | 32.57 | 34.83 | 10.94 | 32.03 | 226 | 319 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5353.33 | 46.31 | 54.00 | -7.69 | 32.57 | 34.83 | 10.94 | 32.03 | 226 | 319 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|---|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|---|---------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------|-------|-------|-------|-------|-----|---|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5109.31 52.99 74.00 -21.01</td> <td>38.73</td> <td>34.88</td> <td>11.11</td> <td>31.73</td> <td>211</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5109.31 52.99 74.00 -21.01 | 38.73 | 34.88 | 11.11 | 31.73 | 211 | 3 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5310.00 102.87 -----</td> <td>89.02</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>211</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5310.00 102.87 ----- | 89.02 | 34.84 | 10.98 | 31.97 | 211 | 3 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5109.31 52.99 74.00 -21.01 | 38.73 | 34.88 | 11.11 | 31.73 | 211 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5310.00 102.87 ----- | 89.02 | 34.84 | 10.98 | 31.97 | 211 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5133.49 43.99 54.00 -10.01</td> <td>29.79</td> <td>34.87</td> <td>11.09</td> <td>31.76</td> <td>211</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5133.49 43.99 54.00 -10.01 | 29.79 | 34.87 | 11.09 | 31.76 | 211 | 3 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5310.00 93.93 -----</td> <td>80.08</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>211</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5310.00 93.93 ----- | 80.08 | 34.84 | 10.98 | 31.97 | 211 | 3 | AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5133.49 43.99 54.00 -10.01 | 29.79 | 34.87 | 11.09 | 31.76 | 211 | 3 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5310.00 93.93 ----- | 80.08 | 34.84 | 10.98 | 31.97 | 211 | 3 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------|-------|--------|-------|--------|--------|-----------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.89</td> <td>57.56</td> <td>74.00</td> <td>-16.44</td> <td>43.82</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>211</td> <td>3 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.89 | 57.56 | 74.00 | -16.44 | 43.82 | 34.83 | 10.94 | 32.03 | 211 | 3 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.89 | 57.56 | 74.00 | -16.44 | 43.82 | 34.83 | 10.94 | 32.03 | 211 | 3 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.13</td> <td>48.55</td> <td>54.00</td> <td>-5.45</td> <td>34.81</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>211</td> <td>3 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.13 | 48.55 | 54.00 | -5.45 | 34.81 | 34.83 | 10.94 | 32.03 | 211 | 3 AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.13 | 48.55 | 54.00 | -5.45 | 34.81 | 34.83 | 10.94 | 32.03 | 211 | 3 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|--|--------------|-------|--------|--------|--------|-------------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|----------------|-------|-------|-------|-------|-------|-----|-------------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|----|-----|--|----------------|-------|-------|-------|-------|-------|-----|-------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5310.00 102.30</td> <td>-----</td> <td>88.47</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>207</td> <td>305 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 5310.00 102.30 | ----- | 88.47 | 34.84 | 10.97 | 31.98 | 207 | 305 PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5310.00 102.30</td> <td>-----</td> <td>88.47</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>207</td> <td>305 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 5310.00 102.30 | ----- | 88.47 | 34.84 | 10.97 | 31.98 | 207 | 305 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5310.00 102.30 | ----- | 88.47 | 34.84 | 10.97 | 31.98 | 207 | 305 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5310.00 102.30 | ----- | 88.47 | 34.84 | 10.97 | 31.98 | 207 | 305 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5310.10 94.07</td> <td>-----</td> <td>80.22</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>207</td> <td>305 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 5310.10 94.07 | ----- | 80.22 | 34.84 | 10.98 | 31.97 | 207 | 305 AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5310.00 94.07</td> <td>-----</td> <td>80.22</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>207</td> <td>305 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 5310.00 94.07 | ----- | 80.22 | 34.84 | 10.98 | 31.97 | 207 | 305 AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5310.10 94.07 | ----- | 80.22 | 34.84 | 10.98 | 31.97 | 207 | 305 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5310.00 94.07 | ----- | 80.22 | 34.84 | 10.98 | 31.97 | 207 | 305 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.48</td> <td>58.53</td> <td>74.00</td> <td>-15.47</td> <td>44.79</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>207</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5351.48 | 58.53 | 74.00 | -15.47 | 44.79 | 34.83 | 10.94 | 32.03 | 207 | 305 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5351.48 | 58.53 | 74.00 | -15.47 | 44.79 | 34.83 | 10.94 | 32.03 | 207 | 305 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.13</td> <td>48.86</td> <td>54.00</td> <td>-5.14</td> <td>35.12</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>207</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.13 | 48.86 | 54.00 | -5.14 | 35.12 | 34.83 | 10.94 | 32.03 | 207 | 305 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.13 | 48.86 | 54.00 | -5.14 | 35.12 | 34.83 | 10.94 | 32.03 | 207 | 305 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|-------|--------|--------|--------|--------|-----------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|-----------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5073.23</td> <td>45.50</td> <td>54.00</td> <td>-8.50</td> <td>31.17</td> <td>34.89</td> <td>11.13</td> <td>31.69</td> <td>198</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5073.23 | 45.50 | 54.00 | -8.50 | 31.17 | 34.89 | 11.13 | 31.69 | 198 | 2 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>95.86</td> <td>-----</td> <td>81.98</td> <td>34.84</td> <td>10.99</td> <td>31.95</td> <td>198</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5290.00 | 95.86 | ----- | 81.98 | 34.84 | 10.99 | 31.95 | 198 | 2 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5073.23 | 45.50 | 54.00 | -8.50 | 31.17 | 34.89 | 11.13 | 31.69 | 198 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5290.00 | 95.86 | ----- | 81.98 | 34.84 | 10.99 | 31.95 | 198 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5073.23</td> <td>45.50</td> <td>54.00</td> <td>-8.50</td> <td>31.17</td> <td>34.89</td> <td>11.13</td> <td>31.69</td> <td>198</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5073.23 | 45.50 | 54.00 | -8.50 | 31.17 | 34.89 | 11.13 | 31.69 | 198 | 2 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>88.43</td> <td>-----</td> <td>74.56</td> <td>34.84</td> <td>10.99</td> <td>31.96</td> <td>198</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5290.00 | 88.43 | ----- | 74.56 | 34.84 | 10.99 | 31.96 | 198 | 2 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5073.23 | 45.50 | 54.00 | -8.50 | 31.17 | 34.89 | 11.13 | 31.69 | 198 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5290.00 | 88.43 | ----- | 74.56 | 34.84 | 10.99 | 31.96 | 198 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------|--------|--------|------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.65</td> <td>55.65</td> <td>74.00</td> <td>-18.35</td> <td>41.91</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>198</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5352.65 | 55.65 | 74.00 | -18.35 | 41.91 | 34.83 | 10.94 | 32.03 | 198 | 2 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5352.65 | 55.65 | 74.00 | -18.35 | 41.91 | 34.83 | 10.94 | 32.03 | 198 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.62</td> <td>48.87</td> <td>54.00</td> <td>-5.13</td> <td>35.13</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>198</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.62 | 48.87 | 54.00 | -5.13 | 35.13 | 34.83 | 10.94 | 32.03 | 198 | 2 AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.62 | 48.87 | 54.00 | -5.13 | 35.13 | 34.83 | 10.94 | 32.03 | 198 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

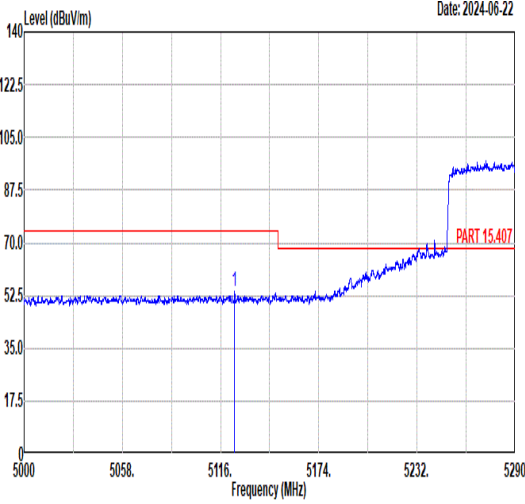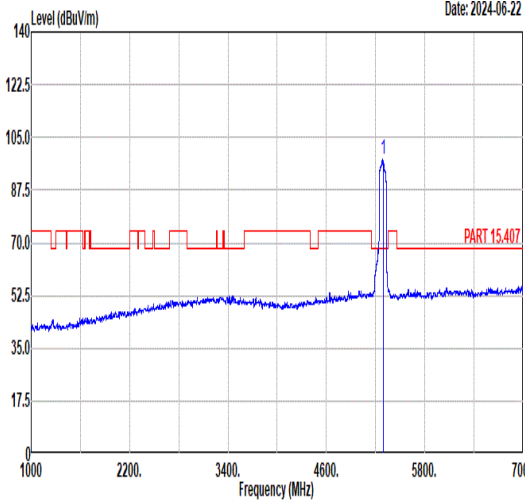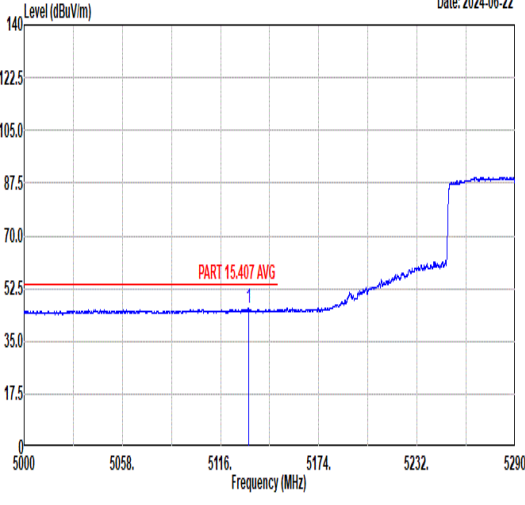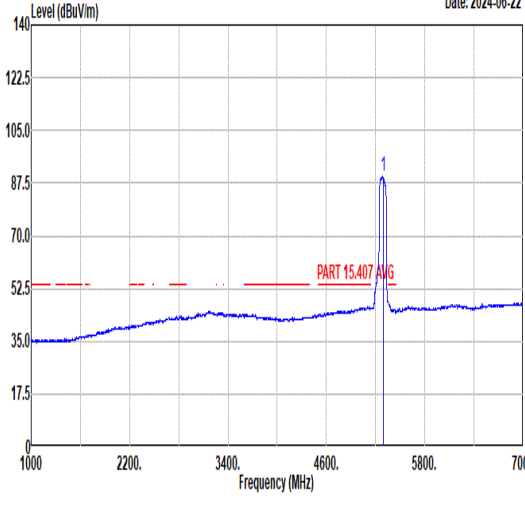

| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5124.27</td> <td>53.68</td> <td>74.00</td> <td>-20.32</td> <td>39.45</td> <td>34.88</td> <td>11.10</td> <td>31.75</td> <td>198</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5124.27 | 53.68 | 74.00 | -20.32 | 39.45 | 34.88 | 11.10 | 31.75 | 198 | 304 | PEAK |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>97.69</td> <td>-----</td> <td>-----</td> <td>83.79</td> <td>34.84</td> <td>11.00</td> <td>31.94</td> <td>198</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5290.00 | 97.69 | ----- | ----- | 83.79 | 34.84 | 11.00 | 31.94 | 198 | 304 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5124.27 | 53.68 | 74.00 | -20.32 | 39.45 | 34.88 | 11.10 | 31.75 | 198 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5290.00 | 97.69 | ----- | ----- | 83.79 | 34.84 | 11.00 | 31.94 | 198 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.39</td> <td>45.92</td> <td>54.00</td> <td>-8.08</td> <td>31.72</td> <td>34.87</td> <td>11.09</td> <td>31.76</td> <td>198</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5132.39 | 45.92 | 54.00 | -8.08 | 31.72 | 34.87 | 11.09 | 31.76 | 198 | 304 | AVERAGE |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>89.58</td> <td>-----</td> <td>-----</td> <td>75.68</td> <td>34.84</td> <td>11.00</td> <td>31.94</td> <td>198</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5290.00 | 89.58 | ----- | ----- | 75.68 | 34.84 | 11.00 | 31.94 | 198 | 304 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5132.39 | 45.92 | 54.00 | -8.08 | 31.72 | 34.87 | 11.09 | 31.76 | 198 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5290.00 | 89.58 | ----- | ----- | 75.68 | 34.84 | 11.00 | 31.94 | 198 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------------|--------|--------|------|--------|---------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.35</td> <td>55.31</td> <td>74.00</td> <td>-18.69</td> <td>41.57</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>198</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5354.35 | 55.31 | 74.00 | -18.69 | 41.57 | 34.83 | 10.94 | 32.03 | 198 | 304 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5354.35 | 55.31 | 74.00 | -18.69 | 41.57 | 34.83 | 10.94 | 32.03 | 198 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.04</td> <td>48.48</td> <td>54.00</td> <td>-5.52</td> <td>34.75</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>198</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5355.04 | 48.48 | 54.00 | -5.52 | 34.75 | 34.83 | 10.94 | 32.04 | 198 | 304 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5355.04 | 48.48 | 54.00 | -5.52 | 34.75 | 34.83 | 10.94 | 32.04 | 198 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------|--------|--------|------------|--------|--|------|-------|-------------|--------------|-------------|--|--|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|--|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|--------------|-------------|--|--|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>48.33</td> <td>68.30</td> <td>-19.97</td> <td>45.36</td> <td>39.48</td> <td>14.29</td> <td>50.80</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15870.00</td> <td>46.92</td> <td>74.00</td> <td>-27.08</td> <td>39.49</td> <td>42.02</td> <td>17.11</td> <td>51.70</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | 1 10580.00 | 48.33 | 68.30 | -19.97 | 45.36 | 39.48 | 14.29 | 50.80 | -- -- Peak | 2 15870.00 | 46.92 | 74.00 | -27.08 | 39.49 | 42.02 | 17.11 | 51.70 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>48.19</td> <td>68.30</td> <td>-20.11</td> <td>45.22</td> <td>39.48</td> <td>14.29</td> <td>50.80</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15870.00</td> <td>47.21</td> <td>74.00</td> <td>-26.79</td> <td>39.78</td> <td>42.02</td> <td>17.11</td> <td>51.70</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | 1 10580.00 | 48.19 | 68.30 | -20.11 | 45.22 | 39.48 | 14.29 | 50.80 | -- -- Peak | 2 15870.00 | 47.21 | 74.00 | -26.79 | 39.78 | 42.02 | 17.11 | 51.70 |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10580.00 | 48.33 | 68.30 | -19.97 | 45.36 | 39.48 | 14.29 | 50.80 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15870.00 | 46.92 | 74.00 | -27.08 | 39.49 | 42.02 | 17.11 | 51.70 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10580.00 | 48.19 | 68.30 | -20.11 | 45.22 | 39.48 | 14.29 | 50.80 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15870.00 | 47.21 | 74.00 | -26.79 | 39.78 | 42.02 | 17.11 | 51.70 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|-----|---------|--|--------------|-------|-------|-------|--------|------|------|--|----------------------|--------------|-------------|-------|--------|------|------|--------|----------------------|--------------|-------------|-------|-------|-----|-----|---------|------------------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.89 57.16 74.00 -16.84</td> <td>43.40</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>157</td> <td>350</td> <td>PEAK</td> </tr> <tr> <td>2 5462.43 59.34 68.30 -8.96</td> <td>45.57</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>157</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5459.89 57.16 74.00 -16.84 | 43.40 | 34.81 | 11.12 | 32.17 | 157 | 350 | PEAK | 2 5462.43 59.34 68.30 -8.96 | 45.57 | 34.81 | 11.13 | 32.17 | 157 | 350 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 105.63</td> <td>91.77</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>157</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 105.63 | 91.77 | 34.80 | 11.27 | 32.21 | 157 | 350 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.89 57.16 74.00 -16.84 | 43.40 | 34.81 | 11.12 | 32.17 | 157 | 350 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5462.43 59.34 68.30 -8.96 | 45.57 | 34.81 | 11.13 | 32.17 | 157 | 350 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 105.63 | 91.77 | 34.80 | 11.27 | 32.21 | 157 | 350 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.43 44.74 54.00 -9.26</td> <td>30.97</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>157</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5459.43 44.74 54.00 -9.26 | 30.97 | 34.81 | 11.12 | 32.16 | 157 | 350 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 99.03</td> <td>85.17</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>157</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 99.03 | 85.17 | 34.80 | 11.27 | 32.21 | 157 | 350 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.43 44.74 54.00 -9.26 | 30.97 | 34.81 | 11.12 | 32.16 | 157 | 350 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 99.03 | 85.17 | 34.80 | 11.27 | 32.21 | 157 | 350 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|--------------|-------|--------|--------|--------|--------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|---|---------|--|--|--|--|--|--|--|--------------|------|-----|-------|--------|------|------|--|----------------------|--------------|-------------|-------|--------|------|------|--------|-----------------------|--------------------------------|-------------|--|--|----|-----|--|------------------------|--------------------------------|------|--|--|--|--|--|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5427.79 53.01 74.00 -20.99 39.34 34.81 10.99 32.13 169 15</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 5466.79 56.69 68.30 -11.61 42.90 34.81 11.15 32.17 169 15</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5427.79 53.01 74.00 -20.99 39.34 34.81 10.99 32.13 169 15 | PEAK | | | | | | | 2 5466.79 56.69 68.30 -11.61 42.90 34.81 11.15 32.17 169 15 | PEAK | | | | | | | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 101.84 -----</td> <td>87.98 34.80 11.27 32.21 169 15</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 101.84 ----- | 87.98 34.80 11.27 32.21 169 15 | PEAK | | | | | |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5427.79 53.01 74.00 -20.99 39.34 34.81 10.99 32.13 169 15 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5466.79 56.69 68.30 -11.61 42.90 34.81 11.15 32.17 169 15 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 101.84 ----- | 87.98 34.80 11.27 32.21 169 15 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.23 43.36 54.00 -10.64 29.60 34.81 11.11 32.16 169 15</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5458.23 43.36 54.00 -10.64 29.60 34.81 11.11 32.16 169 15 | AVERAGE | | | | | | | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 95.34 -----</td> <td>81.48 34.80 11.27 32.21 169 15</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 95.34 ----- | 81.48 34.80 11.27 32.21 169 15 | AVERAGE | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5458.23 43.36 54.00 -10.64 29.60 34.81 11.11 32.16 169 15 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 95.34 ----- | 81.48 34.80 11.27 32.21 169 15 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|-------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|-----|----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|-----|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>54.65</td> <td>74.00</td> <td>-19.35</td> <td>51.51</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>110</td> <td>29</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>44.37</td> <td>54.00</td> <td>-9.63</td> <td>41.23</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>110</td> <td>29</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>47.84</td> <td>68.30</td> <td>-20.46</td> <td>39.88</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 11000.00 | 54.65 | 74.00 | -19.35 | 51.51 | 39.40 | 14.54 | 50.80 | 110 | 29 | Peak | 2 | 11000.00 | 44.37 | 54.00 | -9.63 | 41.23 | 39.40 | 14.54 | 50.80 | 110 | 29 | Average | 3 | 16500.00 | 47.84 | 68.30 | -20.46 | 39.88 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>55.38</td> <td>74.00</td> <td>-18.62</td> <td>52.24</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>165</td> <td>358</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>45.28</td> <td>54.00</td> <td>-8.72</td> <td>42.14</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>165</td> <td>358</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>47.57</td> <td>68.30</td> <td>-20.73</td> <td>39.61</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 11000.00 | 55.38 | 74.00 | -18.62 | 52.24 | 39.40 | 14.54 | 50.80 | 165 | 358 | Peak | 2 | 11000.00 | 45.28 | 54.00 | -8.72 | 42.14 | 39.40 | 14.54 | 50.80 | 165 | 358 | Average | 3 | 16500.00 | 47.57 | 68.30 | -20.73 | 39.61 | 42.40 | 17.36 | 51.80 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 54.65 | 74.00 | -19.35 | 51.51 | 39.40 | 14.54 | 50.80 | 110 | 29 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 44.37 | 54.00 | -9.63 | 41.23 | 39.40 | 14.54 | 50.80 | 110 | 29 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 16500.00 | 47.84 | 68.30 | -20.46 | 39.88 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 55.38 | 74.00 | -18.62 | 52.24 | 39.40 | 14.54 | 50.80 | 165 | 358 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 45.28 | 54.00 | -8.72 | 42.14 | 39.40 | 14.54 | 50.80 | 165 | 358 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 16500.00 | 47.57 | 68.30 | -20.73 | 39.61 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|--------|--------|-------------|--------|--------|------------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-22</p> | <p>Date: 2024-06-22</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.40</td> <td>74.00</td> <td>-26.60</td> <td>44.00</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16740.00</td> <td>47.18</td> <td>68.30</td> <td>-21.12</td> <td>39.05</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11160.00 | 47.40 | 74.00 | -26.60 | 44.00 | 39.53 | 14.64 | 50.77 | -- -- Peak | 2 16740.00 | 47.18 | 68.30 | -21.12 | 39.05 | 42.45 | 17.43 | 51.75 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.46</td> <td>74.00</td> <td>-26.54</td> <td>44.06</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16740.00</td> <td>48.45</td> <td>68.30</td> <td>-19.85</td> <td>40.32</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11160.00 | 47.46 | 74.00 | -26.54 | 44.06 | 39.53 | 14.64 | 50.77 | -- -- Peak | 2 16740.00 | 48.45 | 68.30 | -19.85 | 40.32 | 42.45 | 17.43 | 51.75 |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11160.00 | 47.40 | 74.00 | -26.60 | 44.00 | 39.53 | 14.64 | 50.77 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 16740.00 | 47.18 | 68.30 | -21.12 | 39.05 | 42.45 | 17.43 | 51.75 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11160.00 | 47.46 | 74.00 | -26.54 | 44.06 | 39.53 | 14.64 | 50.77 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 16740.00 | 48.45 | 68.30 | -19.85 | 40.32 | 42.45 | 17.43 | 51.75 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|---|--------|--------|--------|-------------|--------|--------|--------|-------------|--------|-------|-------|------|-------|--------|-------------|-------------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|--------|-------|-------|-------|-------|-------|-------|----------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.56</td> <td>60.35</td> <td>68.30</td> <td>-7.95</td> <td>45.97</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>160</td> <td>352 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5726.56 | 60.35 | 68.30 | -7.95 | 45.97 | 35.12 | 11.65 | 32.39 | 160 | 352 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>106.64</td> <td>-----</td> <td>-----</td> <td>92.27</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>160</td> <td>352 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 106.64 | ----- | ----- | 92.27 | 35.08 | 11.66 | 32.37 | 160 | 352 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5726.56 | 60.35 | 68.30 | -7.95 | 45.97 | 35.12 | 11.65 | 32.39 | 160 | 352 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 106.64 | ----- | ----- | 92.27 | 35.08 | 11.66 | 32.37 | 160 | 352 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.28</td> <td>-----</td> <td>-----</td> <td>85.90</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>160</td> <td>352 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 100.28 | ----- | ----- | 85.90 | 35.07 | 11.67 | 32.36 | 160 | 352 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 100.28 | ----- | ----- | 85.90 | 35.07 | 11.67 | 32.36 | 160 | 352 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|---|--------|--------|--------|-------------|--------|--------|--------|------------|--------|-------|-------|------|-------|--------|-------------|-------------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.53</td> <td>58.37</td> <td>68.30</td> <td>-9.93</td> <td>43.99</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>148</td> <td>20 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5727.53 | 58.37 | 68.30 | -9.93 | 43.99 | 35.12 | 11.65 | 32.39 | 148 | 20 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.46</td> <td>-----</td> <td>-----</td> <td>88.08</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>148</td> <td>20 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 102.46 | ----- | ----- | 88.08 | 35.07 | 11.67 | 32.36 | 148 | 20 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5727.53 | 58.37 | 68.30 | -9.93 | 43.99 | 35.12 | 11.65 | 32.39 | 148 | 20 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 102.46 | ----- | ----- | 88.08 | 35.07 | 11.67 | 32.36 | 148 | 20 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.19</td> <td>-----</td> <td>-----</td> <td>81.81</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>148</td> <td>20 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 96.19 | ----- | ----- | 81.81 | 35.07 | 11.67 | 32.36 | 148 | 20 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 96.19 | ----- | ----- | 81.81 | 35.07 | 11.67 | 32.36 | 148 | 20 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.46</td> <td>74.00</td> <td>-26.54</td> <td>43.68</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.50</td> <td>68.30</td> <td>-19.80</td> <td>40.31</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11400.00 | 47.46 | 74.00 | -26.54 | 43.68 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | 2 | 17100.00 | 48.50 | 68.30 | -19.80 | 40.31 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.64</td> <td>74.00</td> <td>-26.36</td> <td>43.86</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.85</td> <td>68.30</td> <td>-19.45</td> <td>40.66</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11400.00 | 47.64 | 74.00 | -26.36 | 43.86 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | 2 | 17100.00 | 48.85 | 68.30 | -19.45 | 40.66 | 42.46 | 17.53 | 51.80 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11400.00 | 47.46 | 74.00 | -26.54 | 43.68 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17100.00 | 48.50 | 68.30 | -19.80 | 40.31 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11400.00 | 47.64 | 74.00 | -26.36 | 43.86 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17100.00 | 48.85 | 68.30 | -19.45 | 40.66 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|-----|---------|--|--------------|-------|-------|-------|--------|------|------|--|----------------------|--------------|-------------|-------|--------|------|------|--------|----------------------|--------------|-------------|-------|-------|-----|-----|---------|------------------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.48 56.51 74.00 -17.49</td> <td>42.75</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>162</td> <td>350</td> <td>PEAK</td> </tr> <tr> <td>2 5469.93 61.62 68.30 -6.68</td> <td>47.83</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>162</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5457.48 56.51 74.00 -17.49 | 42.75 | 34.81 | 11.11 | 32.16 | 162 | 350 | PEAK | 2 5469.93 61.62 68.30 -6.68 | 47.83 | 34.81 | 11.16 | 32.18 | 162 | 350 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 106.56</td> <td>92.70</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>162</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 106.56 | 92.70 | 34.80 | 11.27 | 32.21 | 162 | 350 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5457.48 56.51 74.00 -17.49 | 42.75 | 34.81 | 11.11 | 32.16 | 162 | 350 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5469.93 61.62 68.30 -6.68 | 47.83 | 34.81 | 11.16 | 32.18 | 162 | 350 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 106.56 | 92.70 | 34.80 | 11.27 | 32.21 | 162 | 350 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.93 44.83 54.00 -9.17</td> <td>31.07</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>162</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5457.93 44.83 54.00 -9.17 | 31.07 | 34.81 | 11.11 | 32.16 | 162 | 350 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 98.80</td> <td>84.94</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>162</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 98.80 | 84.94 | 34.80 | 11.27 | 32.21 | 162 | 350 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5457.93 44.83 54.00 -9.17 | 31.07 | 34.81 | 11.11 | 32.16 | 162 | 350 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 98.80 | 84.94 | 34.80 | 11.27 | 32.21 | 162 | 350 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|---|---------|--|--------------|-------|-------|-------|--------|------|------|--|----------------------|--------------|-------------|-------|--------|------|------|--------|----------------------|--------------|-------------|-------|-------|-----|-----|---------|------------------|-------|-------|-------|-------|-----|---|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.89 55.55 74.00 -18.45</td> <td>41.79</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>159</td> <td>5</td> <td>PEAK</td> </tr> <tr> <td>2 5467.68 58.64 68.30 -9.66</td> <td>44.85</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>159</td> <td>5</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5459.89 55.55 74.00 -18.45 | 41.79 | 34.81 | 11.12 | 32.17 | 159 | 5 | PEAK | 2 5467.68 58.64 68.30 -9.66 | 44.85 | 34.81 | 11.15 | 32.17 | 159 | 5 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 102.30</td> <td>88.44</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>159</td> <td>5</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 102.30 | 88.44 | 34.80 | 11.27 | 32.21 | 159 | 5 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.89 55.55 74.00 -18.45 | 41.79 | 34.81 | 11.12 | 32.17 | 159 | 5 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5467.68 58.64 68.30 -9.66 | 44.85 | 34.81 | 11.15 | 32.17 | 159 | 5 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 102.30 | 88.44 | 34.80 | 11.27 | 32.21 | 159 | 5 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.73 43.72 54.00 -10.28</td> <td>29.95</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>159</td> <td>5</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5459.73 43.72 54.00 -10.28 | 29.95 | 34.81 | 11.12 | 32.16 | 159 | 5 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 95.26</td> <td>81.40</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>159</td> <td>5</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 95.26 | 81.40 | 34.80 | 11.27 | 32.21 | 159 | 5 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.73 43.72 54.00 -10.28 | 29.95 | 34.81 | 11.12 | 32.16 | 159 | 5 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 95.26 | 81.40 | 34.80 | 11.27 | 32.21 | 159 | 5 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|-------|--------|-------------|--------|--------|-------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|-----|----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|-----|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>54.48</td> <td>74.00</td> <td>-19.52</td> <td>51.34</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>110</td> <td>39</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>44.89</td> <td>54.00</td> <td>-9.11</td> <td>41.75</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>110</td> <td>39</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>47.28</td> <td>68.30</td> <td>-21.02</td> <td>39.32</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 11000.00 | 54.48 | 74.00 | -19.52 | 51.34 | 39.40 | 14.54 | 50.80 | 110 | 39 | Peak | 2 | 11000.00 | 44.89 | 54.00 | -9.11 | 41.75 | 39.40 | 14.54 | 50.80 | 110 | 39 | Average | 3 | 16500.00 | 47.28 | 68.30 | -21.02 | 39.32 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>55.46</td> <td>74.00</td> <td>-18.54</td> <td>52.32</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>165</td> <td>356</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>45.48</td> <td>54.00</td> <td>-8.52</td> <td>42.34</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>165</td> <td>356</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>47.77</td> <td>68.30</td> <td>-20.53</td> <td>39.81</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 11000.00 | 55.46 | 74.00 | -18.54 | 52.32 | 39.40 | 14.54 | 50.80 | 165 | 356 | Peak | 2 | 11000.00 | 45.48 | 54.00 | -8.52 | 42.34 | 39.40 | 14.54 | 50.80 | 165 | 356 | Average | 3 | 16500.00 | 47.77 | 68.30 | -20.53 | 39.81 | 42.40 | 17.36 | 51.80 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 54.48 | 74.00 | -19.52 | 51.34 | 39.40 | 14.54 | 50.80 | 110 | 39 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 44.89 | 54.00 | -9.11 | 41.75 | 39.40 | 14.54 | 50.80 | 110 | 39 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 16500.00 | 47.28 | 68.30 | -21.02 | 39.32 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 55.46 | 74.00 | -18.54 | 52.32 | 39.40 | 14.54 | 50.80 | 165 | 356 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 45.48 | 54.00 | -8.52 | 42.34 | 39.40 | 14.54 | 50.80 | 165 | 356 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 16500.00 | 47.77 | 68.30 | -20.53 | 39.81 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|--------|--------|-------------|--------|--------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH116_5580MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-23</p> | <p>Date: 2024-06-23</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.12</td> <td>74.00</td> <td>-26.88</td> <td>43.72</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 16740.00</td> <td>47.88</td> <td>68.30</td> <td>-20.42</td> <td>39.75</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11160.00 | 47.12 | 74.00 | -26.88 | 43.72 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | 2 16740.00 | 47.88 | 68.30 | -20.42 | 39.75 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.36</td> <td>74.00</td> <td>-26.64</td> <td>43.96</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 16740.00</td> <td>47.68</td> <td>68.30</td> <td>-20.62</td> <td>39.55</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11160.00 | 47.36 | 74.00 | -26.64 | 43.96 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | 2 16740.00 | 47.68 | 68.30 | -20.62 | 39.55 | 42.45 | 17.43 | 51.75 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11160.00 | 47.12 | 74.00 | -26.88 | 43.72 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 16740.00 | 47.88 | 68.30 | -20.42 | 39.75 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11160.00 | 47.36 | 74.00 | -26.64 | 43.96 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 16740.00 | 47.68 | 68.30 | -20.62 | 39.55 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|---|--------|--------|--------|-------------|--------|--------|-------------|--------|--------|-------|-------|------|-------|--------|-------------|-------------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|----------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|-----|----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.96</td> <td>60.83</td> <td>68.30</td> <td>-7.47</td> <td>46.45</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>148</td> <td>351 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5728.96 | 60.83 | 68.30 | -7.47 | 46.45 | 35.12 | 11.65 | 32.39 | 148 | 351 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>105.66</td> <td>-----</td> <td>-----</td> <td>91.28</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>148</td> <td>351 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 105.66 | ----- | ----- | 91.28 | 35.07 | 11.67 | 32.36 | 148 | 351 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5728.96 | 60.83 | 68.30 | -7.47 | 46.45 | 35.12 | 11.65 | 32.39 | 148 | 351 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 105.66 | ----- | ----- | 91.28 | 35.07 | 11.67 | 32.36 | 148 | 351 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.63</td> <td>-----</td> <td>-----</td> <td>84.25</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>148</td> <td>351 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 98.63 | ----- | ----- | 84.25 | 35.07 | 11.67 | 32.36 | 148 | 351 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 98.63 | ----- | ----- | 84.25 | 35.07 | 11.67 | 32.36 | 148 | 351 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

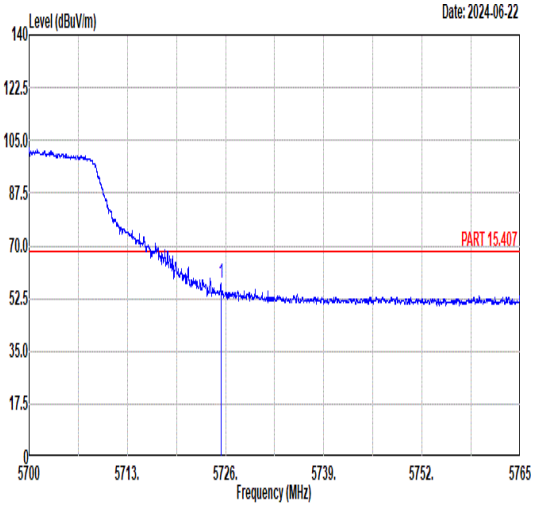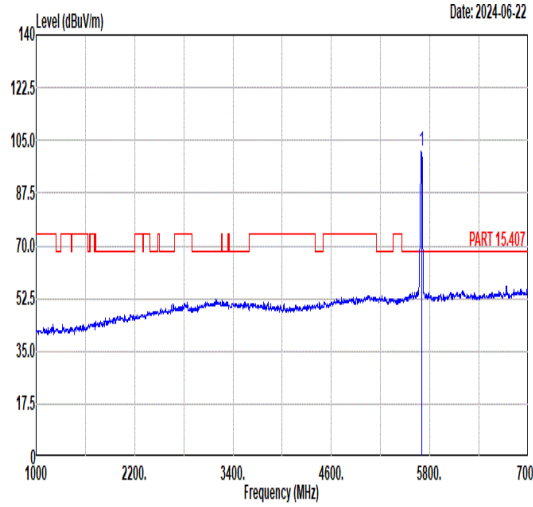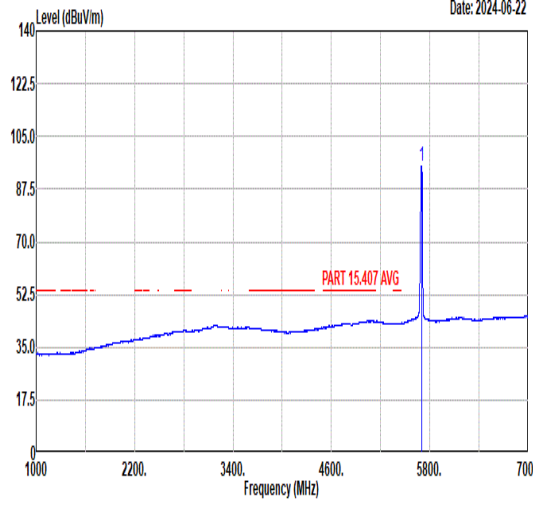

| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|--|--------|--------|--------|-------------|--------|--------|--------|------------|--------|-------|-------|------|-------|--------|-------------|-------------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|--------|-------|-------|-------|-------|-------|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.39</td> <td>57.47</td> <td>68.30</td> <td>-10.83</td> <td>43.09</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>145</td> <td>15 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5725.39 | 57.47 | 68.30 | -10.83 | 43.09 | 35.12 | 11.65 | 32.39 | 145 | 15 PEAK |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>101.30</td> <td>-----</td> <td>-----</td> <td>86.92</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>145</td> <td>15 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 101.30 | ----- | ----- | 86.92 | 35.07 | 11.67 | 32.36 | 145 | 15 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5725.39 | 57.47 | 68.30 | -10.83 | 43.09 | 35.12 | 11.65 | 32.39 | 145 | 15 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 101.30 | ----- | ----- | 86.92 | 35.07 | 11.67 | 32.36 | 145 | 15 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>94.92</td> <td>-----</td> <td>-----</td> <td>80.54</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>145</td> <td>15 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 94.92 | ----- | ----- | 80.54 | 35.07 | 11.67 | 32.36 | 145 | 15 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 94.92 | ----- | ----- | 80.54 | 35.07 | 11.67 | 32.36 | 145 | 15 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|--------|--------|-------------|--------|--------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-23</p> | <p>Date: 2024-06-23</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>44.05</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 17100.00</td> <td>47.59</td> <td>68.30</td> <td>-20.71</td> <td>39.40</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11400.00 | 47.83 | 74.00 | -26.17 | 44.05 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | 2 17100.00 | 47.59 | 68.30 | -20.71 | 39.40 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>47.28</td> <td>74.00</td> <td>-26.72</td> <td>43.50</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 17100.00</td> <td>47.89</td> <td>68.30</td> <td>-20.41</td> <td>39.70</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11400.00 | 47.28 | 74.00 | -26.72 | 43.50 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | 2 17100.00 | 47.89 | 68.30 | -20.41 | 39.70 | 42.46 | 17.53 | 51.80 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11400.00 | 47.83 | 74.00 | -26.17 | 44.05 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17100.00 | 47.59 | 68.30 | -20.71 | 39.40 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11400.00 | 47.28 | 74.00 | -26.72 | 43.50 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17100.00 | 47.89 | 68.30 | -20.41 | 39.70 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|---------|---|---------|-------|-------|-------|--------|-------|-------|--------|------|-------|-------------|---|-------------|------|-----|-------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|---|---------|-------|-------|--------|--------|-------|-------|-------|-----|----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>58.11</td> <td>74.00</td> <td>-15.89</td> <td>44.34</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>209</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.30</td> <td>61.42</td> <td>68.30</td> <td>-6.88</td> <td>47.63</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>209</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5459.60 | 58.11 | 74.00 | -15.89 | 44.34 | 34.81 | 11.12 | 32.16 | 209 | 1 | PEAK | 2 | 5469.30 | 61.42 | 68.30 | -6.88 | 47.63 | 34.81 | 11.16 | 32.18 | 209 | 1 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>104.35</td> <td>-----</td> <td>-----</td> <td>90.44</td> <td>34.81</td> <td>11.32</td> <td>32.22</td> <td>209</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5510.00 | 104.35 | ----- | ----- | 90.44 | 34.81 | 11.32 | 32.22 | 209 | 1 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.60 | 58.11 | 74.00 | -15.89 | 44.34 | 34.81 | 11.12 | 32.16 | 209 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.30 | 61.42 | 68.30 | -6.88 | 47.63 | 34.81 | 11.16 | 32.18 | 209 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 104.35 | ----- | ----- | 90.44 | 34.81 | 11.32 | 32.22 | 209 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.68</td> <td>47.45</td> <td>54.00</td> <td>-6.55</td> <td>33.68</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>209</td> <td>1</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5459.68 | 47.45 | 54.00 | -6.55 | 33.68 | 34.81 | 11.12 | 32.16 | 209 | 1 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>94.73</td> <td>-----</td> <td>-----</td> <td>80.82</td> <td>34.81</td> <td>11.32</td> <td>32.22</td> <td>209</td> <td>1</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5510.00 | 94.73 | ----- | ----- | 80.82 | 34.81 | 11.32 | 32.22 | 209 | 1 | AVERAGE | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.68 | 47.45 | 54.00 | -6.55 | 33.68 | 34.81 | 11.12 | 32.16 | 209 | 1 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 94.73 | ----- | ----- | 80.82 | 34.81 | 11.32 | 32.22 | 209 | 1 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------|--------|--------|--------|--------|------|------|--------|------|--------|-------|--------|------|--------|------|------|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|-----------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5743.71</td> <td>53.22</td> <td>68.30</td> <td>-15.08</td> <td>38.84</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>209</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 5743.71 | 53.22 | 68.30 | -15.08 | 38.84 | 35.14 | 11.64 | 32.40 | 209 | 1 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5743.71 | 53.22 | 68.30 | -15.08 | 38.84 | 35.14 | 11.64 | 32.40 | 209 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|--|---------|-------|-------|--------|--------|-------|-------|--------|------|-------|-------------|---|-------------|------|-----|-------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|---|---------|-------|-------|--------|--------|-------|-------|-------|-----|----|---------|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.38</td> <td>54.57</td> <td>74.00</td> <td>-19.43</td> <td>40.82</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>200</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.96</td> <td>58.29</td> <td>68.30</td> <td>-10.01</td> <td>44.50</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>200</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5455.38 | 54.57 | 74.00 | -19.43 | 40.82 | 34.81 | 11.10 | 32.16 | 200 | 17 | PEAK | 2 | 5468.96 | 58.29 | 68.30 | -10.01 | 44.50 | 34.81 | 11.16 | 32.18 | 200 | 17 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>99.82</td> <td>-----</td> <td>-----</td> <td>85.96</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>200</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5510.00 | 99.82 | ----- | ----- | 85.96 | 34.80 | 11.27 | 32.21 | 200 | 17 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5455.38 | 54.57 | 74.00 | -19.43 | 40.82 | 34.81 | 11.10 | 32.16 | 200 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5468.96 | 58.29 | 68.30 | -10.01 | 44.50 | 34.81 | 11.16 | 32.18 | 200 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 99.82 | ----- | ----- | 85.96 | 34.80 | 11.27 | 32.21 | 200 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>45.21</td> <td>54.00</td> <td>-8.79</td> <td>31.45</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>200</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5460.00 | 45.21 | 54.00 | -8.79 | 31.45 | 34.81 | 11.12 | 32.17 | 200 | 17 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>91.00</td> <td>-----</td> <td>-----</td> <td>77.09</td> <td>34.81</td> <td>11.32</td> <td>32.22</td> <td>200</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5510.00 | 91.00 | ----- | ----- | 77.09 | 34.81 | 11.32 | 32.22 | 200 | 17 | AVERAGE | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5460.00 | 45.21 | 54.00 | -8.79 | 31.45 | 34.81 | 11.12 | 32.17 | 200 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 91.00 | ----- | ----- | 77.09 | 34.81 | 11.32 | 32.22 | 200 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|------|---------|------|--------|-------|--------|------|--------|------|------|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5764.62</td> <td>53.61</td> <td>68.30</td> <td>-14.69</td> <td>39.23</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>200</td> <td>17 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5764.62 | 53.61 | 68.30 | -14.69 | 39.23 | 35.17 | 11.63 | 32.42 | 200 | 17 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5764.62 | 53.61 | 68.30 | -14.69 | 39.23 | 35.17 | 11.63 | 32.42 | 200 | 17 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|---------|---|---------|-------|-------|--------|--------|-------|-------|--------|------|-------|-------------|---|-------------|------|-----|-------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|---|---------|-------|-------|--------|--------|-------|-------|-------|-----|----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5390.19</td> <td>51.71</td> <td>74.00</td> <td>-22.29</td> <td>38.06</td> <td>34.82</td> <td>10.91</td> <td>32.08</td> <td>196</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.23</td> <td>50.94</td> <td>68.30</td> <td>-17.36</td> <td>37.15</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>196</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5390.19 | 51.71 | 74.00 | -22.29 | 38.06 | 34.82 | 10.91 | 32.08 | 196 | 0 | PEAK | 2 | 5469.23 | 50.94 | 68.30 | -17.36 | 37.15 | 34.81 | 11.16 | 32.18 | 196 | 0 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>104.13</td> <td>-----</td> <td>-----</td> <td>89.75</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>196</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5670.00 | 104.13 | ----- | ----- | 89.75 | 35.04 | 11.68 | 32.34 | 196 | 0 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5390.19 | 51.71 | 74.00 | -22.29 | 38.06 | 34.82 | 10.91 | 32.08 | 196 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.23 | 50.94 | 68.30 | -17.36 | 37.15 | 34.81 | 11.16 | 32.18 | 196 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 104.13 | ----- | ----- | 89.75 | 35.04 | 11.68 | 32.34 | 196 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>29.14</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>196</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5459.92 | 42.90 | 54.00 | -11.10 | 29.14 | 34.81 | 11.12 | 32.17 | 196 | 0 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.36</td> <td>-----</td> <td>-----</td> <td>81.99</td> <td>35.03</td> <td>11.68</td> <td>32.34</td> <td>196</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5670.00 | 96.36 | ----- | ----- | 81.99 | 35.03 | 11.68 | 32.34 | 196 | 0 | AVERAGE | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.92 | 42.90 | 54.00 | -11.10 | 29.14 | 34.81 | 11.12 | 32.17 | 196 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 96.36 | ----- | ----- | 81.99 | 35.03 | 11.68 | 32.34 | 196 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|--------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|--------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.29</td> <td>62.58</td> <td>68.30</td> <td>-5.72</td> <td>48.20</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>196</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5726.29 | 62.58 | 68.30 | -5.72 | 48.20 | 35.12 | 11.65 | 32.39 | 196 | 0 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5726.29 | 62.58 | 68.30 | -5.72 | 48.20 | 35.12 | 11.65 | 32.39 | 196 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|-------|--------|-------------|--------|--------|--------|--------|---------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|--|---------|-------|-------|--------|--------|-------|-------|--------|------|-------|-------------|--|--------|-------------|-----|-------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|---------|-------|-------|--------|--------|-------|-------|------|----|---------|-----|---|---------|--------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.51</td> <td>51.74</td> <td>74.00</td> <td>-22.26</td> <td>37.99</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>186</td> <td>24</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.68</td> <td>50.93</td> <td>68.30</td> <td>-17.37</td> <td>37.15</td> <td>34.81</td> <td>11.14</td> <td>32.17</td> <td>186</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5454.51 | 51.74 | 74.00 | -22.26 | 37.99 | 34.81 | 11.10 | 32.16 | 186 | 24 | PEAK | 2 | 5465.68 | 50.93 | 68.30 | -17.37 | 37.15 | 34.81 | 11.14 | 32.17 | 186 | 24 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>101.73</td> <td>-----</td> <td>87.35</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>186</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5670.00 | 101.73 | ----- | 87.35 | 35.04 | 11.68 | 32.34 | 186 | 24 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5454.51 | 51.74 | 74.00 | -22.26 | 37.99 | 34.81 | 11.10 | 32.16 | 186 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5465.68 | 50.93 | 68.30 | -17.37 | 37.15 | 34.81 | 11.14 | 32.17 | 186 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 101.73 | ----- | 87.35 | 35.04 | 11.68 | 32.34 | 186 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.76</td> <td>42.71</td> <td>54.00</td> <td>-11.29</td> <td>28.96</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>186</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5455.76 | 42.71 | 54.00 | -11.29 | 28.96 | 34.81 | 11.10 | 32.16 | 186 | 24 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>92.86</td> <td>-----</td> <td>78.49</td> <td>35.03</td> <td>11.68</td> <td>32.34</td> <td>186</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5670.00 | 92.86 | ----- | 78.49 | 35.03 | 11.68 | 32.34 | 186 | 24 | AVERAGE | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5455.76 | 42.71 | 54.00 | -11.29 | 28.96 | 34.81 | 11.10 | 32.16 | 186 | 24 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 92.86 | ----- | 78.49 | 35.03 | 11.68 | 32.34 | 186 | 24 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|-------|--------|--------|-------|--------|------|--------|----|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|--|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.68</td> <td>58.34</td> <td>68.30</td> <td>-9.96</td> <td>43.96</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>186</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 5726.68 | 58.34 | 68.30 | -9.96 | 43.96 | 35.12 | 11.65 | 32.39 | 186 | 24 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5726.68 | 58.34 | 68.30 | -9.96 | 43.96 | 35.12 | 11.65 | 32.39 | 186 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|---|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|---|---------|--|--------------|-------|-------|-------|--------|------|------|---|----------------------|--------------|-------------|-------|--------|------|------|--------|-----------------------|--------------|-------------|-------|-------|-----|-----|---------|-----------------------|-------|-------|-------|-------|-----|---|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.55 54.74 74.00 -19.26</td> <td>40.98</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>195</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 5469.63 56.08 68.30 -12.22</td> <td>42.29</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>195</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5457.55 54.74 74.00 -19.26 | 40.98 | 34.81 | 11.11 | 32.16 | 195 | 0 | PEAK | 2 5469.63 56.08 68.30 -12.22 | 42.29 | 34.81 | 11.16 | 32.18 | 195 | 0 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 99.59 -----</td> <td>85.58</td> <td>34.84</td> <td>11.40</td> <td>32.23</td> <td>195</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5530.00 99.59 ----- | 85.58 | 34.84 | 11.40 | 32.23 | 195 | 0 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5457.55 54.74 74.00 -19.26 | 40.98 | 34.81 | 11.11 | 32.16 | 195 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5469.63 56.08 68.30 -12.22 | 42.29 | 34.81 | 11.16 | 32.18 | 195 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5530.00 99.59 ----- | 85.58 | 34.84 | 11.40 | 32.23 | 195 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5454.13 48.05 54.00 -5.95</td> <td>34.30</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>195</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5454.13 48.05 54.00 -5.95 | 34.30 | 34.81 | 11.10 | 32.16 | 195 | 0 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 91.00 -----</td> <td>76.99</td> <td>34.84</td> <td>11.40</td> <td>32.23</td> <td>195</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5530.00 91.00 ----- | 76.99 | 34.84 | 11.40 | 32.23 | 195 | 0 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5454.13 48.05 54.00 -5.95 | 34.30 | 34.81 | 11.10 | 32.16 | 195 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5530.00 91.00 ----- | 76.99 | 34.84 | 11.40 | 32.23 | 195 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------|--------|--------|------|--------|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|--------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5754.07</td> <td>53.53</td> <td>68.30</td> <td>-14.77</td> <td>39.14</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>195</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5754.07 | 53.53 | 68.30 | -14.77 | 39.14 | 35.16 | 11.64 | 32.41 | 195 | 0 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5754.07 | 53.53 | 68.30 | -14.77 | 39.14 | 35.16 | 11.64 | 32.41 | 195 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--------------|-------|--------|--------|--------|--------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|--|---------|--|--|--|--|--|--|---|--------------|------|-----|-------|--------|------|------|--|----------------------|--------------|-------------|-------|--------|------|------|--------|-----------------------|---------------------------------|-------------|--|--|----|-----|--|-----------------------|---------------------------------|------|--|--|--|--|--|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5431.47 52.51 74.00 -21.49 38.83 34.81 11.00 32.13 200 316</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 5469.81 54.46 68.30 -13.84 40.67 34.81 11.16 32.18 200 316</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5431.47 52.51 74.00 -21.49 38.83 34.81 11.00 32.13 200 316 | PEAK | | | | | | | 2 5469.81 54.46 68.30 -13.84 40.67 34.81 11.16 32.18 200 316 | PEAK | | | | | | | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 94.52 -----</td> <td>80.61 34.81 11.32 32.22 200 316</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5530.00 94.52 ----- | 80.61 34.81 11.32 32.22 200 316 | PEAK | | | | | |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5431.47 52.51 74.00 -21.49 38.83 34.81 11.00 32.13 200 316 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5469.81 54.46 68.30 -13.84 40.67 34.81 11.16 32.18 200 316 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5530.00 94.52 ----- | 80.61 34.81 11.32 32.22 200 316 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.75 46.01 54.00 -7.99 32.25 34.81 11.11 32.16 200 316</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5457.75 46.01 54.00 -7.99 32.25 34.81 11.11 32.16 200 316 | AVERAGE | | | | | | | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 86.67 -----</td> <td>72.64 34.85 11.42 32.24 200 316</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5530.00 86.67 ----- | 72.64 34.85 11.42 32.24 200 316 | AVERAGE | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5457.75 46.01 54.00 -7.99 32.25 34.81 11.11 32.16 200 316 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5530.00 86.67 ----- | 72.64 34.85 11.42 32.24 200 316 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------|--------|--------|------|-----|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5753.63</td> <td>52.79</td> <td>68.30</td> <td>-15.51</td> <td>38.40</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>200</td> <td>316</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5753.63 | 52.79 | 68.30 | -15.51 | 38.40 | 35.16 | 11.64 | 32.41 | 200 | 316 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5753.63 | 52.79 | 68.30 | -15.51 | 38.40 | 35.16 | 11.64 | 32.41 | 200 | 316 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

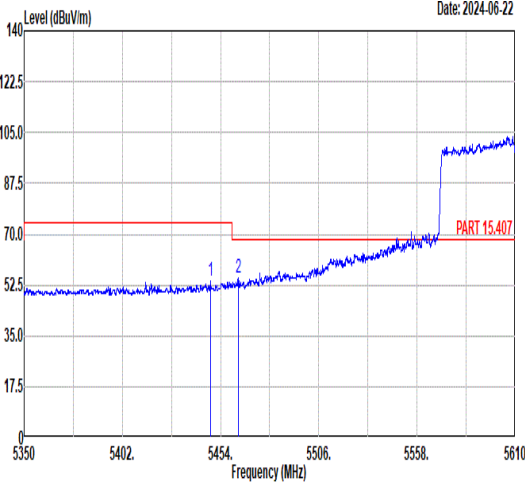
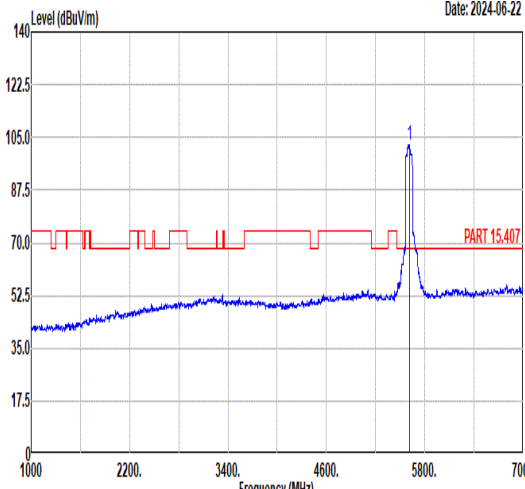
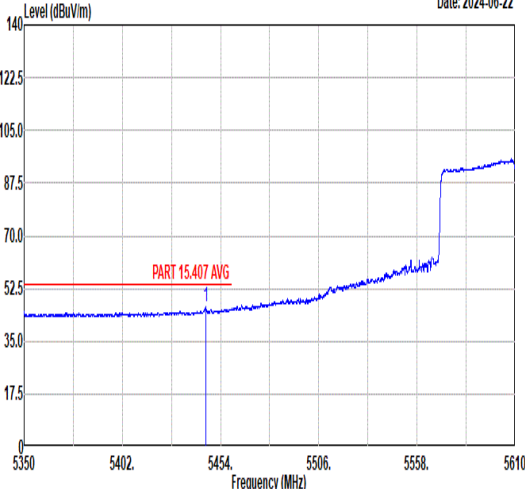
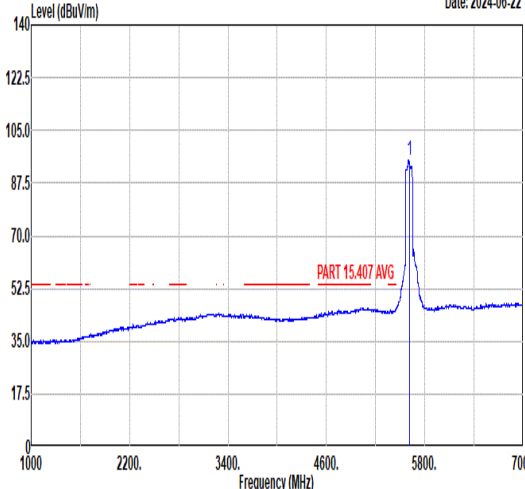


| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|---------|--------|-------|--------|-------|--------|-------|-------|--------|--------|---|-------|--------|-------|--------|-------|--------|------|------|--------|--------|-------|------|------|-------|--------|------|--------|---|---------|--------|--------|-------|-------|-------|-------|-------|-----|-----------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|--------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH112_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.67</td> <td>54.14</td> <td>74.00</td> <td>-19.86</td> <td>40.41</td> <td>34.81</td> <td>11.07</td> <td>32.15</td> <td>198</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5463.52</td> <td>55.18</td> <td>68.30</td> <td>-13.12</td> <td>41.41</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>198</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5448.67 | 54.14 | 74.00 | -19.86 | 40.41 | 34.81 | 11.07 | 32.15 | 198 | 0 PEAK | 2 | 5463.52 | 55.18 | 68.30 | -13.12 | 41.41 | 34.81 | 11.13 | 32.17 | 198 | 0 PEAK |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>102.53</td> <td>-----</td> <td>-----</td> <td>88.16</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>198</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5610.00 | 102.53 | ----- | ----- | 88.16 | 34.96 | 11.71 | 32.30 | 198 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5448.67 | 54.14 | 74.00 | -19.86 | 40.41 | 34.81 | 11.07 | 32.15 | 198 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5463.52 | 55.18 | 68.30 | -13.12 | 41.41 | 34.81 | 11.13 | 32.17 | 198 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 102.53 | ----- | ----- | 88.16 | 34.96 | 11.71 | 32.30 | 198 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.10</td> <td>46.66</td> <td>54.00</td> <td>-7.34</td> <td>32.94</td> <td>34.81</td> <td>11.06</td> <td>32.15</td> <td>198</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5446.10 | 46.66 | 54.00 | -7.34 | 32.94 | 34.81 | 11.06 | 32.15 | 198 | 0 AVERAGE |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>94.97</td> <td>-----</td> <td>-----</td> <td>80.62</td> <td>34.94</td> <td>11.70</td> <td>32.29</td> <td>198</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5610.00 | 94.97 | ----- | ----- | 80.62 | 34.94 | 11.70 | 32.29 | 198 | 0 AVERAGE | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5446.10 | 46.66 | 54.00 | -7.34 | 32.94 | 34.81 | 11.06 | 32.15 | 198 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 94.97 | ----- | ----- | 80.62 | 34.94 | 11.70 | 32.29 | 198 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|-------|--------|-------|--------|--------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|--------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH112_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.89</td> <td>61.05</td> <td>68.30</td> <td>-7.25</td> <td>46.67</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>198</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5727.89 | 61.05 | 68.30 | -7.25 | 46.67 | 35.12 | 11.65 | 32.39 | 198 | 0 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5727.89 | 61.05 | 68.30 | -7.25 | 46.67 | 35.12 | 11.65 | 32.39 | 198 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

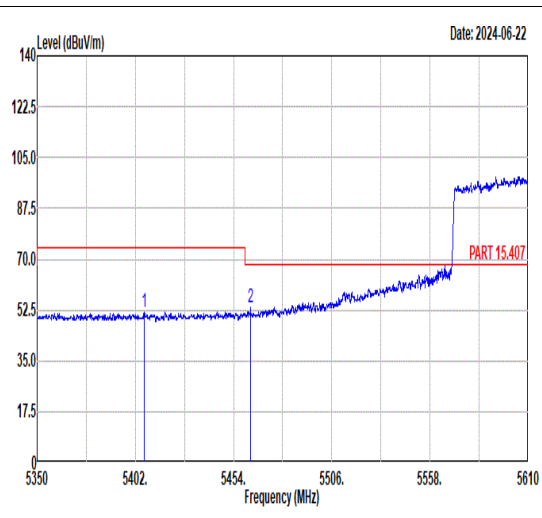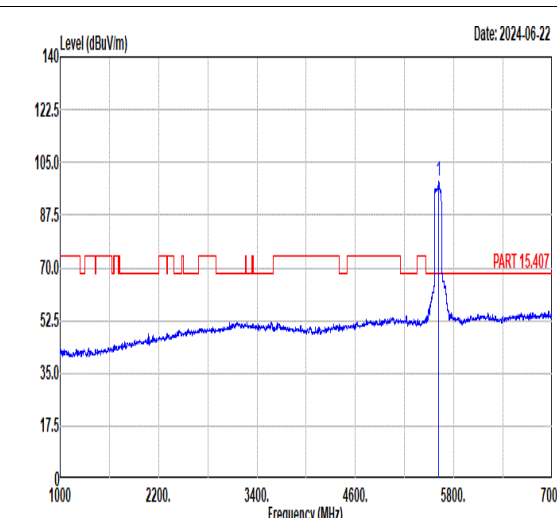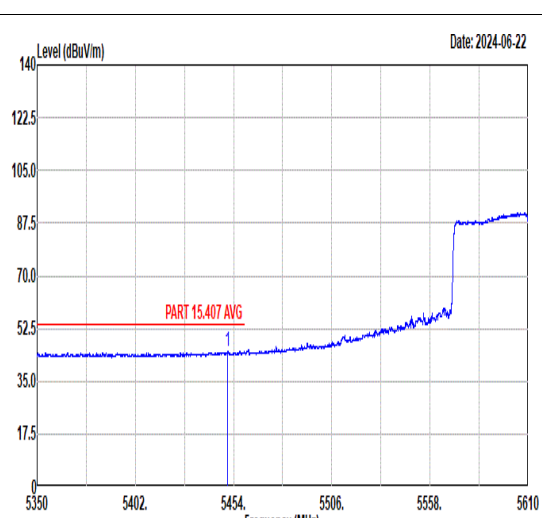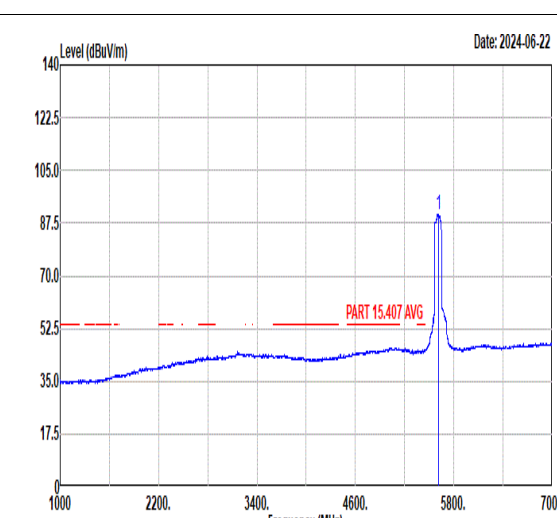

| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|---|---------|--------|-------|--------|-------|--------|-------|-------|--------|------|-------|---|-------|--------|--------|------|--------|--------|------|--------|--------|------|-------|------|------|-------|--------|------|---------|-------|-------|--------|--------|-------|-------|-------|-----|-----|---------|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH112_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5406.78</td> <td>51.74</td> <td>74.00</td> <td>-22.26</td> <td>38.12</td> <td>34.82</td> <td>10.90</td> <td>32.10</td> <td>200</td> <td>327</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.97</td> <td>53.28</td> <td>68.30</td> <td>-15.02</td> <td>39.51</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>200</td> <td>327</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5406.78 | 51.74 | 74.00 | -22.26 | 38.12 | 34.82 | 10.90 | 32.10 | 200 | 327 | PEAK | 2 | 5462.97 | 53.28 | 68.30 | -15.02 | 39.51 | 34.81 | 11.13 | 32.17 | 200 | 327 | PEAK |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>98.61</td> <td>-----</td> <td>-----</td> <td>84.25</td> <td>34.96</td> <td>11.70</td> <td>32.30</td> <td>200</td> <td>327</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5610.00 | 98.61 | ----- | ----- | 84.25 | 34.96 | 11.70 | 32.30 | 200 | 327 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5406.78 | 51.74 | 74.00 | -22.26 | 38.12 | 34.82 | 10.90 | 32.10 | 200 | 327 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5462.97 | 53.28 | 68.30 | -15.02 | 39.51 | 34.81 | 11.13 | 32.17 | 200 | 327 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 98.61 | ----- | ----- | 84.25 | 34.96 | 11.70 | 32.30 | 200 | 327 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.01</td> <td>44.89</td> <td>54.00</td> <td>-9.11</td> <td>31.15</td> <td>34.81</td> <td>11.08</td> <td>32.15</td> <td>200</td> <td>327</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5451.01 | 44.89 | 54.00 | -9.11 | 31.15 | 34.81 | 11.08 | 32.15 | 200 | 327 | AVERAGE |  <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>90.48</td> <td>-----</td> <td>-----</td> <td>76.13</td> <td>34.94</td> <td>11.70</td> <td>32.29</td> <td>200</td> <td>327</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5610.00 | 90.48 | ----- | ----- | 76.13 | 34.94 | 11.70 | 32.29 | 200 | 327 | AVERAGE | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5451.01 | 44.89 | 54.00 | -9.11 | 31.15 | 34.81 | 11.08 | 32.15 | 200 | 327 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 90.48 | ----- | ----- | 76.13 | 34.94 | 11.70 | 32.29 | 200 | 327 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------|--------|-------------|-------|--------|--------------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH112_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.99</td> <td>56.56</td> <td>68.30</td> <td>-11.74</td> <td>42.18</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>200 327 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5730.99 | 56.56 | 68.30 | -11.74 | 42.18 | 35.12 | 11.65 | 32.39 | 200 327 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5730.99 | 56.56 | 68.30 | -11.74 | 42.18 | 35.12 | 11.65 | 32.39 | 200 327 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.75</td> <td>74.00</td> <td>-26.25</td> <td>43.83</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.99</td> <td>68.30</td> <td>-20.31</td> <td>39.94</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11490.00 | 47.75 | 74.00 | -26.25 | 43.83 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | 2 | 17235.00 | 47.99 | 68.30 | -20.31 | 39.94 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>44.05</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.30</td> <td>68.30</td> <td>-21.00</td> <td>39.25</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11490.00 | 47.97 | 74.00 | -26.03 | 44.05 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | 2 | 17235.00 | 47.30 | 68.30 | -21.00 | 39.25 | 42.41 | 17.57 | 51.93 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11490.00 | 47.75 | 74.00 | -26.25 | 43.83 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17235.00 | 47.99 | 68.30 | -20.31 | 39.94 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11490.00 | 47.97 | 74.00 | -26.03 | 44.05 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17235.00 | 47.30 | 68.30 | -21.00 | 39.25 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH157_5785MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.37</td> <td>74.00</td> <td>-26.63</td> <td>43.29</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>47.77</td> <td>68.30</td> <td>-20.53</td> <td>39.86</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 47.37 | 74.00 | -26.63 | 43.29 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 47.77 | 68.30 | -20.53 | 39.86 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>43.89</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.27</td> <td>68.30</td> <td>-20.03</td> <td>40.36</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 47.97 | 74.00 | -26.03 | 43.89 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 48.27 | 68.30 | -20.03 | 40.36 | 42.36 | 17.60 | 52.05 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 47.37 | 74.00 | -26.63 | 43.29 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 47.77 | 68.30 | -20.53 | 39.86 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 47.97 | 74.00 | -26.03 | 43.89 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 48.27 | 68.30 | -20.03 | 40.36 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|--|----------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|------------|------------|--------|---------|---------|--------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|------|------------|----------------|----------------|------------------|-------------------|-------------------|-----------------|------------------|-----------|------------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.33</td> <td>65.42</td> <td>112.34</td> <td>-46.92</td> <td>51.09</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5859.33</td> <td>62.39</td> <td>109.59</td> <td>-47.20</td> <td>48.07</td> <td>35.30</td> <td>11.51</td> <td>32.49</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.44</td> <td>52.25</td> <td>68.61</td> <td>-16.36</td> <td>38.00</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5937.08</td> <td>52.92</td> <td>68.30</td> <td>-15.38</td> <td>38.68</td> <td>35.41</td> <td>11.38</td> <td>32.55</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5854.33 | 65.42 | 112.34 | -46.92 | 51.09 | 35.30 | 11.52 | 32.49 | 175 | 360 | PEAK | 2 | 5859.33 | 62.39 | 109.59 | -47.20 | 48.07 | 35.30 | 11.51 | 32.49 | 175 | 360 | PEAK | 3 | 5924.44 | 52.25 | 68.61 | -16.36 | 38.00 | 35.39 | 11.40 | 32.54 | 175 | 360 | PEAK | 4 | 5937.08 | 52.92 | 68.30 | -15.38 | 38.68 | 35.41 | 11.38 | 32.55 | 175 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.76</td> <td>-----</td> <td>-----</td> <td>93.39</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5825.00 | 107.76 | ----- | ----- | 93.39 | 35.25 | 11.58 | 32.46 | 175 | 360 | PEAK |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.33 | 65.42 | 112.34 | -46.92 | 51.09 | 35.30 | 11.52 | 32.49 | 175 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5859.33 | 62.39 | 109.59 | -47.20 | 48.07 | 35.30 | 11.51 | 32.49 | 175 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.44 | 52.25 | 68.61 | -16.36 | 38.00 | 35.39 | 11.40 | 32.54 | 175 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5937.08 | 52.92 | 68.30 | -15.38 | 38.68 | 35.41 | 11.38 | 32.55 | 175 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 107.76 | ----- | ----- | 93.39 | 35.25 | 11.58 | 32.46 | 175 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.20</td> <td>-----</td> <td>-----</td> <td>86.83</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>175</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5825.00 | 101.20 | ----- | ----- | 86.83 | 35.25 | 11.58 | 32.46 | 175 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 101.20 | ----- | ----- | 86.83 | 35.25 | 11.58 | 32.46 | 175 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|---|--------|--------|-------------|--------|--------|--------|--------|--------|---------|-------------|-------------|--------|-------------|-------------|--|-----|--------|--------|--------|------|------|------|----|----|---------|---------|--------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.58</td> <td>63.66</td> <td>111.77</td> <td>-48.11</td> <td>49.33</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5858.83</td> <td>60.27</td> <td>109.73</td> <td>-49.46</td> <td>45.94</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.08</td> <td>53.42</td> <td>68.88</td> <td>-15.46</td> <td>39.17</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5948.58</td> <td>52.94</td> <td>68.30</td> <td>-15.36</td> <td>38.71</td> <td>35.43</td> <td>11.36</td> <td>32.56</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5854.58 | 63.66 | 111.77 | -48.11 | 49.33 | 35.30 | 11.52 | 32.49 | 100 | 0 | PEAK | 2 | 5858.83 | 60.27 | 109.73 | -49.46 | 45.94 | 35.30 | 11.52 | 32.49 | 100 | 0 | PEAK | 3 | 5924.08 | 53.42 | 68.88 | -15.46 | 39.17 | 35.39 | 11.40 | 32.54 | 100 | 0 | PEAK | 4 | 5948.58 | 52.94 | 68.30 | -15.36 | 38.71 | 35.43 | 11.36 | 32.56 | 100 | 0 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.88</td> <td>-----</td> <td>-----</td> <td>88.51</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5825.00 | 102.88 | ----- | ----- | 88.51 | 35.25 | 11.58 | 32.46 | 100 | 0 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.58 | 63.66 | 111.77 | -48.11 | 49.33 | 35.30 | 11.52 | 32.49 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5858.83 | 60.27 | 109.73 | -49.46 | 45.94 | 35.30 | 11.52 | 32.49 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.08 | 53.42 | 68.88 | -15.46 | 39.17 | 35.39 | 11.40 | 32.54 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5948.58 | 52.94 | 68.30 | -15.36 | 38.71 | 35.43 | 11.36 | 32.56 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 102.88 | ----- | ----- | 88.51 | 35.25 | 11.58 | 32.46 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.39</td> <td>-----</td> <td>-----</td> <td>82.02</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5825.00 | 96.39 | ----- | ----- | 82.02 | 35.25 | 11.58 | 32.46 | 100 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 96.39 | ----- | ----- | 82.02 | 35.25 | 11.58 | 32.46 | 100 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|--------|--------|-------------|--------|--------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-23</p> | <p>Date: 2024-06-23</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.18</td> <td>74.00</td> <td>-26.82</td> <td>42.94</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 17475.00</td> <td>47.68</td> <td>68.30</td> <td>-20.62</td> <td>39.91</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 11650.00 | 47.18 | 74.00 | -26.82 | 42.94 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 17475.00 | 47.68 | 68.30 | -20.62 | 39.91 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.39</td> <td>74.00</td> <td>-26.61</td> <td>43.15</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 17475.00</td> <td>47.47</td> <td>68.30</td> <td>-20.83</td> <td>39.70</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 11650.00 | 47.39 | 74.00 | -26.61 | 43.15 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 17475.00 | 47.47 | 68.30 | -20.83 | 39.70 | 42.31 | 17.63 | 52.17 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11650.00 | 47.18 | 74.00 | -26.82 | 42.94 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17475.00 | 47.68 | 68.30 | -20.62 | 39.91 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11650.00 | 47.39 | 74.00 | -26.61 | 43.15 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17475.00 | 47.47 | 68.30 | -20.83 | 39.70 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|--|--------------|--------|-------|--------|---------|------|--------|----------------------|----------------------|--------|--------|--------|--------|-----|-----|------------------------------|-----------------|-------|-------|-------|-------|-----|------|------------------------------|-------|-------|-------|-------|-----|---|------|-------------------------------|-------|-------|-------|-------|-----|---|------|-------------------------------|-------|-------|-------|-------|-----|---|------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|------|--------|----|-----|--|------------------|-------|-------|-------|-------|-----|---|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5646.04 54.22 68.30 -14.08</td> <td>39.85</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>199</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>2 5650.01 52.70 68.31 -15.61</td> <td>38.33</td> <td>35.01</td> <td>11.69</td> <td>32.32</td> <td>199</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>3 5719.99 66.88 110.80 -43.92</td> <td>52.49</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>199</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>4 5720.00 66.68 110.80 -44.12</td> <td>52.29</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>199</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5646.04 54.22 68.30 -14.08 | 39.85 | 35.00 | 11.69 | 32.32 | 199 | 3 | PEAK | 2 5650.01 52.70 68.31 -15.61 | 38.33 | 35.01 | 11.69 | 32.32 | 199 | 3 | PEAK | 3 5719.99 66.88 110.80 -43.92 | 52.49 | 35.11 | 11.66 | 32.38 | 199 | 3 | PEAK | 4 5720.00 66.68 110.80 -44.12 | 52.29 | 35.11 | 11.66 | 32.38 | 199 | 3 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5745.00 107.89</td> <td>93.51</td> <td>35.13</td> <td>11.65</td> <td>32.40</td> <td>199</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5745.00 107.89 | 93.51 | 35.13 | 11.65 | 32.40 | 199 | 3 | PEAK |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5646.04 54.22 68.30 -14.08 | 39.85 | 35.00 | 11.69 | 32.32 | 199 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5650.01 52.70 68.31 -15.61 | 38.33 | 35.01 | 11.69 | 32.32 | 199 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5719.99 66.88 110.80 -43.92 | 52.49 | 35.11 | 11.66 | 32.38 | 199 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.00 66.68 110.80 -44.12 | 52.29 | 35.11 | 11.66 | 32.38 | 199 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5745.00 107.89 | 93.51 | 35.13 | 11.65 | 32.40 | 199 | 3 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5745.00 99.05</td> <td>84.67</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>199</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5745.00 99.05 | 84.67 | 35.14 | 11.64 | 32.40 | 199 | 3 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5745.00 99.05 | 84.67 | 35.14 | 11.64 | 32.40 | 199 | 3 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|---|--------------|-------------|--------|--------|---------|--------|--------|----------------------|----------------------|--------|-------------|-------------|-------------|-----|-----|------------------------------|-----------------|-------|-------|-------|-------|-----|------|------------------------------|-------|-------|-------|-------|-----|----|------|-------------------------------|-------|-------|-------|-------|-----|----|------|-------------------------------|-------|-------|-------|-------|-----|----|------|---|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|-------------|-------------|----|-----|--|------------------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5605.31 53.70 68.30 -14.60</td> <td>39.33</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>118</td> <td>10</td> <td>PEAK</td> </tr> <tr> <td>2 5650.69 52.73 68.81 -16.08</td> <td>38.36</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>118</td> <td>10</td> <td>PEAK</td> </tr> <tr> <td>3 5718.41 63.46 110.35 -46.89</td> <td>49.07</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>118</td> <td>10</td> <td>PEAK</td> </tr> <tr> <td>4 5720.15 64.65 111.14 -46.49</td> <td>50.26</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>118</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5605.31 53.70 68.30 -14.60 | 39.33 | 34.95 | 11.71 | 32.29 | 118 | 10 | PEAK | 2 5650.69 52.73 68.81 -16.08 | 38.36 | 35.01 | 11.69 | 32.33 | 118 | 10 | PEAK | 3 5718.41 63.46 110.35 -46.89 | 49.07 | 35.11 | 11.66 | 32.38 | 118 | 10 | PEAK | 4 5720.15 64.65 111.14 -46.49 | 50.26 | 35.11 | 11.66 | 32.38 | 118 | 10 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5745.00 105.79</td> <td>91.41</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>118</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5745.00 105.79 | 91.41 | 35.14 | 11.64 | 32.40 | 118 | 10 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5605.31 53.70 68.30 -14.60 | 39.33 | 34.95 | 11.71 | 32.29 | 118 | 10 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5650.69 52.73 68.81 -16.08 | 38.36 | 35.01 | 11.69 | 32.33 | 118 | 10 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5718.41 63.46 110.35 -46.89 | 49.07 | 35.11 | 11.66 | 32.38 | 118 | 10 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.15 64.65 111.14 -46.49 | 50.26 | 35.11 | 11.66 | 32.38 | 118 | 10 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5745.00 105.79 | 91.41 | 35.14 | 11.64 | 32.40 | 118 | 10 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5745.00 96.95</td> <td>82.57</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>118</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5745.00 96.95 | 82.57 | 35.14 | 11.64 | 32.40 | 118 | 10 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5745.00 96.95 | 82.57 | 35.14 | 11.64 | 32.40 | 118 | 10 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------------------|--------|--------|-------------|--------|--------|------------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|---|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-23</p> | <p>Date: 2024-06-23</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>43.91</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17235.00</td> <td>47.46</td> <td>68.30</td> <td>-20.84</td> <td>39.41</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | 1 11490.00 | 47.83 | 74.00 | -26.17 | 43.91 | 39.79 | 14.83 | 50.70 | -- -- Peak | 2 17235.00 | 47.46 | 68.30 | -20.84 | 39.41 | 42.41 | 17.57 | 51.93 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>47.55</td> <td>74.00</td> <td>-26.45</td> <td>43.63</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17235.00</td> <td>47.25</td> <td>68.30</td> <td>-21.05</td> <td>39.20</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | 1 11490.00 | 47.55 | 74.00 | -26.45 | 43.63 | 39.79 | 14.83 | 50.70 | -- -- Peak | 2 17235.00 | 47.25 | 68.30 | -21.05 | 39.20 | 42.41 | 17.57 | 51.93 |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11490.00 | 47.83 | 74.00 | -26.17 | 43.91 | 39.79 | 14.83 | 50.70 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17235.00 | 47.46 | 68.30 | -20.84 | 39.41 | 42.41 | 17.57 | 51.93 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11490.00 | 47.55 | 74.00 | -26.45 | 43.63 | 39.79 | 14.83 | 50.70 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17235.00 | 47.25 | 68.30 | -21.05 | 39.20 | 42.41 | 17.57 | 51.93 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-23</p> | <p>Date: 2024-06-23</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.90</td> <td>74.00</td> <td>-26.10</td> <td>43.82</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>47.35</td> <td>68.30</td> <td>-20.95</td> <td>39.44</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 47.90 | 74.00 | -26.10 | 43.82 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 47.35 | 68.30 | -20.95 | 39.44 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>43.63</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.00</td> <td>68.30</td> <td>-20.30</td> <td>40.09</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 47.71 | 74.00 | -26.29 | 43.63 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 48.00 | 68.30 | -20.30 | 40.09 | 42.36 | 17.60 | 52.05 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 47.90 | 74.00 | -26.10 | 43.82 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 47.35 | 68.30 | -20.95 | 39.44 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 47.71 | 74.00 | -26.29 | 43.63 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 48.00 | 68.30 | -20.30 | 40.09 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|---|---------------------|----------------|---------------------|---------------------|-------------------|-------------------|-------------------|------------------|------------------|------------|------------|--------|---------|---------|--------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|------|------------|----------------|---------------------|-------------|-------------------|-------------------|-----------------|------------------|-----------|------------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.94</td> <td>69.59</td> <td>110.94</td> <td>-41.35</td> <td>55.26</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>193</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>69.40</td> <td>110.80</td> <td>-41.40</td> <td>55.07</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>193</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.83</td> <td>52.73</td> <td>68.33</td> <td>-15.60</td> <td>38.48</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>193</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.69</td> <td>53.05</td> <td>68.30</td> <td>-15.25</td> <td>38.82</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>193</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5854.94 | 69.59 | 110.94 | -41.35 | 55.26 | 35.30 | 11.52 | 32.49 | 193 | 360 | PEAK | 2 | 5855.00 | 69.40 | 110.80 | -41.40 | 55.07 | 35.30 | 11.52 | 32.49 | 193 | 360 | PEAK | 3 | 5924.83 | 52.73 | 68.33 | -15.60 | 38.48 | 35.39 | 11.40 | 32.54 | 193 | 360 | PEAK | 4 | 5942.69 | 53.05 | 68.30 | -15.25 | 38.82 | 35.42 | 11.37 | 32.56 | 193 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.14</td> <td>-----</td> <td>-----</td> <td>94.77</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>193</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5825.00 | 109.14 | ----- | ----- | 94.77 | 35.25 | 11.58 | 32.46 | 193 | 360 | PEAK |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.94 | 69.59 | 110.94 | -41.35 | 55.26 | 35.30 | 11.52 | 32.49 | 193 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5855.00 | 69.40 | 110.80 | -41.40 | 55.07 | 35.30 | 11.52 | 32.49 | 193 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.83 | 52.73 | 68.33 | -15.60 | 38.48 | 35.39 | 11.40 | 32.54 | 193 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5942.69 | 53.05 | 68.30 | -15.25 | 38.82 | 35.42 | 11.37 | 32.56 | 193 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 109.14 | ----- | ----- | 94.77 | 35.25 | 11.58 | 32.46 | 193 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.57</td> <td>-----</td> <td>-----</td> <td>85.20</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>193</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5825.00 | 99.57 | ----- | ----- | 85.20 | 35.25 | 11.58 | 32.46 | 193 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 99.57 | ----- | ----- | 85.20 | 35.25 | 11.58 | 32.46 | 193 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|--|----------------|----------------|----------------|----------------|-------------|-------------|------------|-------------|-------------|------------|------------|--------|---------|---------|--------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|--|------|------------|----------------|----------------|-------------|-------------|------------|------------|-------------|-----------|------------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.83</td> <td>64.25</td> <td>111.20</td> <td>-46.95</td> <td>49.92</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>118</td> <td>11</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5866.69</td> <td>61.46</td> <td>107.53</td> <td>-46.07</td> <td>47.15</td> <td>35.31</td> <td>11.50</td> <td>32.50</td> <td>118</td> <td>11</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.58</td> <td>52.25</td> <td>68.51</td> <td>-16.26</td> <td>38.00</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>118</td> <td>11</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.44</td> <td>52.81</td> <td>68.30</td> <td>-15.49</td> <td>38.56</td> <td>35.41</td> <td>11.39</td> <td>32.55</td> <td>118</td> <td>11</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (dB) | TPos (deg) | Remark | 1 | 5854.83 | 64.25 | 111.20 | -46.95 | 49.92 | 35.30 | 11.52 | 32.49 | 118 | 11 | PEAK | 2 | 5866.69 | 61.46 | 107.53 | -46.07 | 47.15 | 35.31 | 11.50 | 32.50 | 118 | 11 | PEAK | 3 | 5924.58 | 52.25 | 68.51 | -16.26 | 38.00 | 35.39 | 11.40 | 32.54 | 118 | 11 | PEAK | 4 | 5933.44 | 52.81 | 68.30 | -15.49 | 38.56 | 35.41 | 11.39 | 32.55 | 118 | 11 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>105.20</td> <td>70.00</td> <td>35.20</td> <td>90.84</td> <td>35.26</td> <td>11.57</td> <td>32.47</td> <td>118</td> <td>11</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (dB) | TPos (deg) | Remark | 1 | 5825.00 | 105.20 | 70.00 | 35.20 | 90.84 | 35.26 | 11.57 | 32.47 | 118 | 11 | PEAK |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (dB) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.83 | 64.25 | 111.20 | -46.95 | 49.92 | 35.30 | 11.52 | 32.49 | 118 | 11 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5866.69 | 61.46 | 107.53 | -46.07 | 47.15 | 35.31 | 11.50 | 32.50 | 118 | 11 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.58 | 52.25 | 68.51 | -16.26 | 38.00 | 35.39 | 11.40 | 32.54 | 118 | 11 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5933.44 | 52.81 | 68.30 | -15.49 | 38.56 | 35.41 | 11.39 | 32.55 | 118 | 11 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (dB) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 105.20 | 70.00 | 35.20 | 90.84 | 35.26 | 11.57 | 32.47 | 118 | 11 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.67</td> <td>70.00</td> <td>26.67</td> <td>82.30</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>118</td> <td>11</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (dB) | TPos (deg) | Remark | 1 | 5825.00 | 96.67 | 70.00 | 26.67 | 82.30 | 35.25 | 11.58 | 32.46 | 118 | 11 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (dB) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 96.67 | 70.00 | 26.67 | 82.30 | 35.25 | 11.58 | 32.46 | 118 | 11 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>46.91</td> <td>74.00</td> <td>-27.09</td> <td>42.67</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>47.37</td> <td>68.30</td> <td>-20.93</td> <td>39.60</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11650.00 | 46.91 | 74.00 | -27.09 | 42.67 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 | 17475.00 | 47.37 | 68.30 | -20.93 | 39.60 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.39</td> <td>74.00</td> <td>-26.61</td> <td>43.15</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>47.40</td> <td>68.30</td> <td>-20.90</td> <td>39.63</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11650.00 | 47.39 | 74.00 | -26.61 | 43.15 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 | 17475.00 | 47.40 | 68.30 | -20.90 | 39.63 | 42.31 | 17.63 | 52.17 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 46.91 | 74.00 | -27.09 | 42.67 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17475.00 | 47.37 | 68.30 | -20.93 | 39.60 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 47.39 | 74.00 | -26.61 | 43.15 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17475.00 | 47.40 | 68.30 | -20.90 | 39.63 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|--|--------------|--------|--------|--------|---------|--------|--------|----------------------|----------------------|--------|--------|--------|--------|-----|-----|------------------------------|-----------------|-------|-------|-------|-------|-----|------|------------------------------|-------|-------|-------|-------|-----|---|------|-------------------------------|-------|-------|-------|-------|-----|---|------|-------------------------------|-------|-------|-------|-------|-----|---|------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|------|--------|----|-----|--|------------------|-------|-------|-------|-------|-----|---|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5649.07 55.68 68.30 -12.62</td> <td>41.31</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2 5650.16 54.81 68.42 -13.61</td> <td>40.44</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3 5718.82 73.74 110.47 -36.73</td> <td>59.35</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4 5720.00 71.42 110.80 -39.38</td> <td>57.03</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5649.07 55.68 68.30 -12.62 | 41.31 | 35.01 | 11.69 | 32.33 | 198 | 4 | PEAK | 2 5650.16 54.81 68.42 -13.61 | 40.44 | 35.01 | 11.69 | 32.33 | 198 | 4 | PEAK | 3 5718.82 73.74 110.47 -36.73 | 59.35 | 35.11 | 11.66 | 32.38 | 198 | 4 | PEAK | 4 5720.00 71.42 110.80 -39.38 | 57.03 | 35.11 | 11.66 | 32.38 | 198 | 4 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5755.00 107.38</td> <td>92.99</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5755.00 107.38 | 92.99 | 35.16 | 11.64 | 32.41 | 198 | 4 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5649.07 55.68 68.30 -12.62 | 41.31 | 35.01 | 11.69 | 32.33 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5650.16 54.81 68.42 -13.61 | 40.44 | 35.01 | 11.69 | 32.33 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5718.82 73.74 110.47 -36.73 | 59.35 | 35.11 | 11.66 | 32.38 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.00 71.42 110.80 -39.38 | 57.03 | 35.11 | 11.66 | 32.38 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5755.00 107.38 | 92.99 | 35.16 | 11.64 | 32.41 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5755.00 96.66</td> <td>82.27</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>198</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5755.00 96.66 | 82.27 | 35.15 | 11.64 | 32.40 | 198 | 4 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5755.00 96.66 | 82.27 | 35.15 | 11.64 | 32.40 | 198 | 4 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|----------------|----------------|----------------|-------------------|-----------------|-------------------|------------------|-----------------|------------------|-----------|------------|--------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.96</td> <td>52.05</td> <td>110.90</td> <td>-58.85</td> <td>37.72</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.87</td> <td>52.14</td> <td>105.52</td> <td>-53.38</td> <td>37.83</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.58</td> <td>51.52</td> <td>69.25</td> <td>-17.73</td> <td>37.26</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.79</td> <td>52.82</td> <td>68.30</td> <td>-15.48</td> <td>38.58</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>198</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5854.96 | 52.05 | 110.90 | -58.85 | 37.72 | 35.30 | 11.52 | 32.49 | 198 | 4 | PEAK | 2 | 5873.87 | 52.14 | 105.52 | -53.38 | 37.83 | 35.32 | 11.49 | 32.50 | 198 | 4 | PEAK | 3 | 5923.58 | 51.52 | 69.25 | -17.73 | 37.26 | 35.39 | 11.41 | 32.54 | 198 | 4 | PEAK | 4 | 5931.79 | 52.82 | 68.30 | -15.48 | 38.58 | 35.40 | 11.39 | 32.55 | 198 | 4 | PEAK | Blank |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.96 | 52.05 | 110.90 | -58.85 | 37.72 | 35.30 | 11.52 | 32.49 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5873.87 | 52.14 | 105.52 | -53.38 | 37.83 | 35.32 | 11.49 | 32.50 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5923.58 | 51.52 | 69.25 | -17.73 | 37.26 | 35.39 | 11.41 | 32.54 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5931.79 | 52.82 | 68.30 | -15.48 | 38.58 | 35.40 | 11.39 | 32.55 | 198 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|--|--|--------------|--------|--------|--------|---------|--------|--------|----------------------|----------------------|--------|-------------|-------------|--|--|--|-------------------|-------------------|------|------|----|----|-----|-----|------------------------------|-----------------|-------|-------|-------|-------|-----|------|------------------------------|-------|-------|-------|-------|-----|----|------|-------------------------------|-------|-------|-------|-------|-----|----|------|-------------------------------|-------|-------|-------|-------|-----|----|------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|-------------|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5646.11 55.34 68.30 -12.96</td> <td>40.97</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2 5651.54 53.79 69.44 -15.65</td> <td>39.42</td> <td>35.01</td> <td>11.69</td> <td>32.32</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3 5719.27 72.47 110.60 -38.13</td> <td>58.08</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4 5720.00 70.27 110.80 -40.53</td> <td>55.88</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5646.11 55.34 68.30 -12.96 | 40.97 | 35.00 | 11.69 | 32.32 | 106 | 17 | PEAK | 2 5651.54 53.79 69.44 -15.65 | 39.42 | 35.01 | 11.69 | 32.32 | 106 | 17 | PEAK | 3 5719.27 72.47 110.60 -38.13 | 58.08 | 35.11 | 11.66 | 32.38 | 106 | 17 | PEAK | 4 5720.00 70.27 110.80 -40.53 | 55.88 | 35.11 | 11.66 | 32.38 | 106 | 17 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5755.00 104.69</td> <td>90.30</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5755.00 104.69 | 90.30 | 35.15 | 11.64 | 32.40 | 106 | 17 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5646.11 55.34 68.30 -12.96 | 40.97 | 35.00 | 11.69 | 32.32 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5651.54 53.79 69.44 -15.65 | 39.42 | 35.01 | 11.69 | 32.32 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5719.27 72.47 110.60 -38.13 | 58.08 | 35.11 | 11.66 | 32.38 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.00 70.27 110.80 -40.53 | 55.88 | 35.11 | 11.66 | 32.38 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5755.00 104.69 | 90.30 | 35.15 | 11.64 | 32.40 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5755.00 94.87</td> <td>80.48</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>106</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5755.00 94.87 | 80.48 | 35.16 | 11.64 | 32.41 | 106 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5755.00 94.87 | 80.48 | 35.16 | 11.64 | 32.41 | 106 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|-------------|------------|-------------|------------|-------------|------------|-------------|--------|------|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|-----------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit Line</th> <th>Margin (dB)</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.96</td> <td>51.49</td> <td>110.90</td> <td>-59.41</td> <td>37.16</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2 5873.66</td> <td>52.68</td> <td>105.58</td> <td>-52.90</td> <td>38.37</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3 5924.75</td> <td>51.97</td> <td>68.39</td> <td>-16.42</td> <td>37.72</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4 5947.56</td> <td>53.14</td> <td>68.30</td> <td>-15.16</td> <td>38.90</td> <td>35.43</td> <td>11.37</td> <td>32.56</td> <td>106</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Freq | Level | Limit Line | Margin (dB) | Read Level | Ant Factor | Cable Loss | Preamp Loss | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | 1 5854.96 | 51.49 | 110.90 | -59.41 | 37.16 | 35.30 | 11.52 | 32.49 | 106 | 17 | PEAK | 2 5873.66 | 52.68 | 105.58 | -52.90 | 38.37 | 35.32 | 11.49 | 32.50 | 106 | 17 | PEAK | 3 5924.75 | 51.97 | 68.39 | -16.42 | 37.72 | 35.39 | 11.40 | 32.54 | 106 | 17 | PEAK | 4 5947.56 | 53.14 | 68.30 | -15.16 | 38.90 | 35.43 | 11.37 | 32.56 | 106 | 17 | PEAK | Blank |
| Freq | Level | Limit Line | Margin (dB) | Read Level | Ant Factor | Cable Loss | Preamp Loss | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5854.96 | 51.49 | 110.90 | -59.41 | 37.16 | 35.30 | 11.52 | 32.49 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5873.66 | 52.68 | 105.58 | -52.90 | 38.37 | 35.32 | 11.49 | 32.50 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5924.75 | 51.97 | 68.39 | -16.42 | 37.72 | 35.39 | 11.40 | 32.54 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5947.56 | 53.14 | 68.30 | -15.16 | 38.90 | 35.43 | 11.37 | 32.56 | 106 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|---|--|--------------|--------|--------|--------|--------|--------|-----------|----------------------|----------------------|--------|--------|--------|--------|-----|-----|-----------|-----------|-------|--------|-------|-------|-------|-------|-------|--------|-----------|-------|-------|--------|-------|-------|-------|-------|-----|--------|-----------|-------|--------|--------|-------|-------|-------|-------|-----|--------|-----------|-------|--------|--------|-------|-------|-------|-------|-----|--------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|------|--------|----|-----|--|-----------|--------|-------|-------|-------|-------|-------|-------|-----|--------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5612.40</td> <td>54.27</td> <td>68.30</td> <td>-14.03</td> <td>39.90</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>194</td> <td>2 PEAK</td> </tr> <tr> <td>2 5650.02</td> <td>52.47</td> <td>68.31</td> <td>-15.84</td> <td>38.10</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>194</td> <td>2 PEAK</td> </tr> <tr> <td>3 5704.62</td> <td>58.66</td> <td>106.49</td> <td>-47.83</td> <td>44.28</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>194</td> <td>2 PEAK</td> </tr> <tr> <td>4 5720.00</td> <td>58.66</td> <td>110.81</td> <td>-52.15</td> <td>44.27</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>194</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5612.40 | 54.27 | 68.30 | -14.03 | 39.90 | 34.96 | 11.71 | 32.30 | 194 | 2 PEAK | 2 5650.02 | 52.47 | 68.31 | -15.84 | 38.10 | 35.01 | 11.69 | 32.33 | 194 | 2 PEAK | 3 5704.62 | 58.66 | 106.49 | -47.83 | 44.28 | 35.09 | 11.66 | 32.37 | 194 | 2 PEAK | 4 5720.00 | 58.66 | 110.81 | -52.15 | 44.27 | 35.11 | 11.66 | 32.38 | 194 | 2 PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>105.71</td> <td>-----</td> <td>-----</td> <td>91.32</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>194</td> <td>2 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5795.00 | 105.71 | ----- | ----- | 91.32 | 35.21 | 11.62 | 32.44 | 194 | 2 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5612.40 | 54.27 | 68.30 | -14.03 | 39.90 | 34.96 | 11.71 | 32.30 | 194 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5650.02 | 52.47 | 68.31 | -15.84 | 38.10 | 35.01 | 11.69 | 32.33 | 194 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5704.62 | 58.66 | 106.49 | -47.83 | 44.28 | 35.09 | 11.66 | 32.37 | 194 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.00 | 58.66 | 110.81 | -52.15 | 44.27 | 35.11 | 11.66 | 32.38 | 194 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5795.00 | 105.71 | ----- | ----- | 91.32 | 35.21 | 11.62 | 32.44 | 194 | 2 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>97.51</td> <td>-----</td> <td>-----</td> <td>83.12</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>194</td> <td>2 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | 1 5795.00 | 97.51 | ----- | ----- | 83.12 | 35.21 | 11.62 | 32.44 | 194 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5795.00 | 97.51 | ----- | ----- | 83.12 | 35.21 | 11.62 | 32.44 | 194 | 2 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|----------------|----------------|----------------|-------------------|-------------------|-------------------|-------------------|-----------------|------------------|-----------|------------|--------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>63.06</td> <td>110.83</td> <td>-47.77</td> <td>48.73</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>194</td> <td>2</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5857.56</td> <td>64.86</td> <td>110.08</td> <td>-45.22</td> <td>50.53</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>194</td> <td>2</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.66</td> <td>52.09</td> <td>68.45</td> <td>-16.36</td> <td>37.84</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>194</td> <td>2</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5935.52</td> <td>53.39</td> <td>68.30</td> <td>-14.91</td> <td>39.14</td> <td>35.41</td> <td>11.39</td> <td>32.55</td> <td>194</td> <td>2</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5854.99 | 63.06 | 110.83 | -47.77 | 48.73 | 35.30 | 11.52 | 32.49 | 194 | 2 | PEAK | 2 | 5857.56 | 64.86 | 110.08 | -45.22 | 50.53 | 35.30 | 11.52 | 32.49 | 194 | 2 | PEAK | 3 | 5924.66 | 52.09 | 68.45 | -16.36 | 37.84 | 35.39 | 11.40 | 32.54 | 194 | 2 | PEAK | 4 | 5935.52 | 53.39 | 68.30 | -14.91 | 39.14 | 35.41 | 11.39 | 32.55 | 194 | 2 | PEAK | Blank |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.99 | 63.06 | 110.83 | -47.77 | 48.73 | 35.30 | 11.52 | 32.49 | 194 | 2 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5857.56 | 64.86 | 110.08 | -45.22 | 50.53 | 35.30 | 11.52 | 32.49 | 194 | 2 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.66 | 52.09 | 68.45 | -16.36 | 37.84 | 35.39 | 11.40 | 32.54 | 194 | 2 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5935.52 | 53.39 | 68.30 | -14.91 | 39.14 | 35.41 | 11.39 | 32.55 | 194 | 2 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|---|----------------|----------------|----------------|----------------|-------------|-------------|------------|-------------|-------------|------------|------------|--------|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|--|------|------------|----------------|----------------|-------------|-------------|------------|------------|-------------|-----------|------------|--------|---|---------|--------|--------|------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5641.07</td> <td>54.23</td> <td>68.30</td> <td>-14.07</td> <td>39.86</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>52.35</td> <td>68.47</td> <td>-16.12</td> <td>37.98</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.06</td> <td>55.69</td> <td>106.06</td> <td>-50.37</td> <td>41.32</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.24</td> <td>56.20</td> <td>111.34</td> <td>-55.14</td> <td>41.81</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5641.07 | 54.23 | 68.30 | -14.07 | 39.86 | 35.00 | 11.69 | 32.32 | 158 | 17 | PEAK | 2 | 5650.23 | 52.35 | 68.47 | -16.12 | 37.98 | 35.01 | 11.69 | 32.33 | 158 | 17 | PEAK | 3 | 5703.06 | 55.69 | 106.06 | -50.37 | 41.32 | 35.08 | 11.66 | 32.37 | 158 | 17 | PEAK | 4 | 5720.24 | 56.20 | 111.34 | -55.14 | 41.81 | 35.11 | 11.66 | 32.38 | 158 | 17 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>104.94</td> <td>104.94</td> <td>0.00</td> <td>90.55</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5795.00 | 104.94 | 104.94 | 0.00 | 90.55 | 35.21 | 11.62 | 32.44 | 158 | 17 | PEAK |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5641.07 | 54.23 | 68.30 | -14.07 | 39.86 | 35.00 | 11.69 | 32.32 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.23 | 52.35 | 68.47 | -16.12 | 37.98 | 35.01 | 11.69 | 32.33 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5703.06 | 55.69 | 106.06 | -50.37 | 41.32 | 35.08 | 11.66 | 32.37 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.24 | 56.20 | 111.34 | -55.14 | 41.81 | 35.11 | 11.66 | 32.38 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5795.00 | 104.94 | 104.94 | 0.00 | 90.55 | 35.21 | 11.62 | 32.44 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>95.09</td> <td>95.09</td> <td>0.00</td> <td>80.70</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>158</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5795.00 | 95.09 | 95.09 | 0.00 | 80.70 | 35.21 | 11.62 | 32.44 | 158 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable (dB) | Preamp (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5795.00 | 95.09 | 95.09 | 0.00 | 80.70 | 35.21 | 11.62 | 32.44 | 158 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|-------------|------------|-------------|------------|-------------|------------|-------------|--------|------|--------|-----|--------|--------|------|------|------|----|----|----|-----|--|-----------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit Line</th> <th>Margin (dB)</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.77</td> <td>62.92</td> <td>111.33</td> <td>-48.41</td> <td>48.59</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2 5862.81</td> <td>60.22</td> <td>108.61</td> <td>-48.39</td> <td>45.89</td> <td>35.31</td> <td>11.51</td> <td>32.49</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3 5924.98</td> <td>52.10</td> <td>68.21</td> <td>-16.11</td> <td>37.85</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4 5940.62</td> <td>52.87</td> <td>68.30</td> <td>-15.43</td> <td>38.63</td> <td>35.42</td> <td>11.38</td> <td>32.56</td> <td>158</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Freq | Level | Limit Line | Margin (dB) | Read Level | Ant Factor | Cable Loss | Preamp Loss | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 5854.77 | 62.92 | 111.33 | -48.41 | 48.59 | 35.30 | 11.52 | 32.49 | 158 | 17 | PEAK | 2 5862.81 | 60.22 | 108.61 | -48.39 | 45.89 | 35.31 | 11.51 | 32.49 | 158 | 17 | PEAK | 3 5924.98 | 52.10 | 68.21 | -16.11 | 37.85 | 35.39 | 11.40 | 32.54 | 158 | 17 | PEAK | 4 5940.62 | 52.87 | 68.30 | -15.43 | 38.63 | 35.42 | 11.38 | 32.56 | 158 | 17 | PEAK | Blank |
| Freq | Level | Limit Line | Margin (dB) | Read Level | Ant Factor | Cable Loss | Preamp Loss | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5854.77 | 62.92 | 111.33 | -48.41 | 48.59 | 35.30 | 11.52 | 32.49 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5862.81 | 60.22 | 108.61 | -48.39 | 45.89 | 35.31 | 11.51 | 32.49 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5924.98 | 52.10 | 68.21 | -16.11 | 37.85 | 35.39 | 11.40 | 32.54 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5940.62 | 52.87 | 68.30 | -15.43 | 38.63 | 35.42 | 11.38 | 32.56 | 158 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|---|--------|--------|-------------|--------|--------|-------|--------|--------|---------|-------------|-------------|--------|-------------|-------------|--|-----|--------|--------|--------|------|------|------|----|----|---------|---------|-------|-------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.98</td> <td>58.61</td> <td>68.30</td> <td>-9.69</td> <td>44.24</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5677.61</td> <td>67.08</td> <td>88.72</td> <td>-21.64</td> <td>52.70</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.36</td> <td>71.29</td> <td>105.30</td> <td>-34.01</td> <td>56.92</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.02</td> <td>71.31</td> <td>110.83</td> <td>-39.52</td> <td>56.92</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5649.98 | 58.61 | 68.30 | -9.69 | 44.24 | 35.01 | 11.69 | 32.33 | 183 | 4 | PEAK | 2 | 5677.61 | 67.08 | 88.72 | -21.64 | 52.70 | 35.05 | 11.68 | 32.35 | 183 | 4 | PEAK | 3 | 5700.36 | 71.29 | 105.30 | -34.01 | 56.92 | 35.08 | 11.66 | 32.37 | 183 | 4 | PEAK | 4 | 5720.02 | 71.31 | 110.83 | -39.52 | 56.92 | 35.11 | 11.66 | 32.38 | 183 | 4 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>102.62</td> <td>-----</td> <td>-----</td> <td>88.24</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5775.00 | 102.62 | ----- | ----- | 88.24 | 35.17 | 11.63 | 32.42 | 183 | 4 | PEAK |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5649.98 | 58.61 | 68.30 | -9.69 | 44.24 | 35.01 | 11.69 | 32.33 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5677.61 | 67.08 | 88.72 | -21.64 | 52.70 | 35.05 | 11.68 | 32.35 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5700.36 | 71.29 | 105.30 | -34.01 | 56.92 | 35.08 | 11.66 | 32.37 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.02 | 71.31 | 110.83 | -39.52 | 56.92 | 35.11 | 11.66 | 32.38 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5775.00 | 102.62 | ----- | ----- | 88.24 | 35.17 | 11.63 | 32.42 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>94.71</td> <td>-----</td> <td>-----</td> <td>80.32</td> <td>35.18</td> <td>11.63</td> <td>32.42</td> <td>183</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | 1 | 5775.00 | 94.71 | ----- | ----- | 80.32 | 35.18 | 11.63 | 32.42 | 183 | 4 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5775.00 | 94.71 | ----- | ----- | 80.32 | 35.18 | 11.63 | 32.42 | 183 | 4 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|----------------|----------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------|------------------|-----------|------------|--------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>64.49</td> <td>110.82</td> <td>-46.33</td> <td>50.16</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.81</td> <td>66.86</td> <td>106.37</td> <td>-39.51</td> <td>52.54</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.36</td> <td>55.34</td> <td>68.67</td> <td>-13.33</td> <td>41.09</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.21</td> <td>55.31</td> <td>68.30</td> <td>-12.99</td> <td>41.07</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>183</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5854.99 | 64.49 | 110.82 | -46.33 | 50.16 | 35.30 | 11.52 | 32.49 | 183 | 4 | PEAK | 2 | 5870.81 | 66.86 | 106.37 | -39.51 | 52.54 | 35.32 | 11.50 | 32.50 | 183 | 4 | PEAK | 3 | 5924.36 | 55.34 | 68.67 | -13.33 | 41.09 | 35.39 | 11.40 | 32.54 | 183 | 4 | PEAK | 4 | 5931.21 | 55.31 | 68.30 | -12.99 | 41.07 | 35.40 | 11.39 | 32.55 | 183 | 4 | PEAK | Blank |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Line Margin (dB) | Read Level (dBuV) | Ant Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.99 | 64.49 | 110.82 | -46.33 | 50.16 | 35.30 | 11.52 | 32.49 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5870.81 | 66.86 | 106.37 | -39.51 | 52.54 | 35.32 | 11.50 | 32.50 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.36 | 55.34 | 68.67 | -13.33 | 41.09 | 35.39 | 11.40 | 32.54 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5931.21 | 55.31 | 68.30 | -12.99 | 41.07 | 35.40 | 11.39 | 32.55 | 183 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|--|--------|--------|-------------|--------|--------|------|--------|---------|-------|-------------|-------------|--------|-------------|-------------|-----|-----------|-----------|-------|--------|-------|-------|-------|-------|-------|-----|------|-----------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|-----------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5649.98</td> <td>56.65</td> <td>68.30</td> <td>-11.65</td> <td>42.28</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2 5679.03</td> <td>65.48</td> <td>89.76</td> <td>-24.28</td> <td>51.11</td> <td>35.05</td> <td>11.67</td> <td>32.35</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3 5700.03</td> <td>67.99</td> <td>105.21</td> <td>-37.22</td> <td>53.62</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4 5720.49</td> <td>70.04</td> <td>111.91</td> <td>-41.87</td> <td>55.65</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | cm | deg | 1 5649.98 | 56.65 | 68.30 | -11.65 | 42.28 | 35.01 | 11.69 | 32.33 | 160 | 17 | PEAK | 2 5679.03 | 65.48 | 89.76 | -24.28 | 51.11 | 35.05 | 11.67 | 32.35 | 160 | 17 | PEAK | 3 5700.03 | 67.99 | 105.21 | -37.22 | 53.62 | 35.08 | 11.66 | 32.37 | 160 | 17 | PEAK | 4 5720.49 | 70.04 | 111.91 | -41.87 | 55.65 | 35.11 | 11.66 | 32.38 | 160 | 17 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5775.00</td> <td>99.53</td> <td>-----</td> <td>-----</td> <td>85.14</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | cm | deg | 1 5775.00 | 99.53 | ----- | ----- | 85.14 | 35.19 | 11.63 | 32.43 | 160 | 17 | PEAK |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5649.98 | 56.65 | 68.30 | -11.65 | 42.28 | 35.01 | 11.69 | 32.33 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5679.03 | 65.48 | 89.76 | -24.28 | 51.11 | 35.05 | 11.67 | 32.35 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5700.03 | 67.99 | 105.21 | -37.22 | 53.62 | 35.08 | 11.66 | 32.37 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.49 | 70.04 | 111.91 | -41.87 | 55.65 | 35.11 | 11.66 | 32.38 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5775.00 | 99.53 | ----- | ----- | 85.14 | 35.19 | 11.63 | 32.43 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5775.00</td> <td>92.91</td> <td>-----</td> <td>-----</td> <td>78.51</td> <td>35.17</td> <td>11.64</td> <td>32.41</td> <td>160</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | cm | deg | 1 5775.00 | 92.91 | ----- | ----- | 78.51 | 35.17 | 11.64 | 32.41 | 160 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5775.00 | 92.91 | ----- | ----- | 78.51 | 35.17 | 11.64 | 32.41 | 160 | 17 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>63.44</td> <td>110.82</td> <td>-47.38</td> <td>49.11</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.48</td> <td>64.87</td> <td>106.46</td> <td>-41.59</td> <td>50.55</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.36</td> <td>54.39</td> <td>68.67</td> <td>-14.28</td> <td>40.14</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.16</td> <td>54.24</td> <td>68.30</td> <td>-14.06</td> <td>40.00</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>160</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5854.99 | 63.44 | 110.82 | -47.38 | 49.11 | 35.30 | 11.52 | 32.49 | 160 | 17 | PEAK | 2 | 5870.48 | 64.87 | 106.46 | -41.59 | 50.55 | 35.32 | 11.50 | 32.50 | 160 | 17 | PEAK | 3 | 5924.36 | 54.39 | 68.67 | -14.28 | 40.14 | 35.39 | 11.40 | 32.54 | 160 | 17 | PEAK | 4 | 5930.16 | 54.24 | 68.30 | -14.06 | 40.00 | 35.40 | 11.39 | 32.55 | 160 | 17 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.99 | 63.44 | 110.82 | -47.38 | 49.11 | 35.30 | 11.52 | 32.49 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5870.48 | 64.87 | 106.46 | -41.59 | 50.55 | 35.32 | 11.50 | 32.50 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.36 | 54.39 | 68.67 | -14.28 | 40.14 | 35.39 | 11.40 | 32.54 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5930.16 | 54.24 | 68.30 | -14.06 | 40.00 | 35.40 | 11.39 | 32.55 | 160 | 17 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|-------|--------|--------|-------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>48.29</td> <td>74.00</td> <td>-25.71</td> <td>44.25</td> <td>39.84</td> <td>14.87</td> <td>50.67</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>46.83</td> <td>68.30</td> <td>-21.47</td> <td>38.89</td> <td>42.37</td> <td>17.59</td> <td>52.02</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11550.00 | 48.29 | 74.00 | -25.71 | 44.25 | 39.84 | 14.87 | 50.67 | -- | -- | Peak | 2 | 17325.00 | 46.83 | 68.30 | -21.47 | 38.89 | 42.37 | 17.59 | 52.02 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.47</td> <td>74.00</td> <td>-26.53</td> <td>43.43</td> <td>39.84</td> <td>14.87</td> <td>50.67</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>47.70</td> <td>68.30</td> <td>-20.60</td> <td>39.76</td> <td>42.37</td> <td>17.59</td> <td>52.02</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11550.00 | 47.47 | 74.00 | -26.53 | 43.43 | 39.84 | 14.87 | 50.67 | -- | -- | Peak | 2 | 17325.00 | 47.70 | 68.30 | -20.60 | 39.76 | 42.37 | 17.59 | 52.02 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11550.00 | 48.29 | 74.00 | -25.71 | 44.25 | 39.84 | 14.87 | 50.67 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17325.00 | 46.83 | 68.30 | -21.47 | 38.89 | 42.37 | 17.59 | 52.02 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11550.00 | 47.47 | 74.00 | -26.53 | 43.43 | 39.84 | 14.87 | 50.67 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17325.00 | 47.70 | 68.30 | -20.60 | 39.76 | 42.37 | 17.59 | 52.02 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

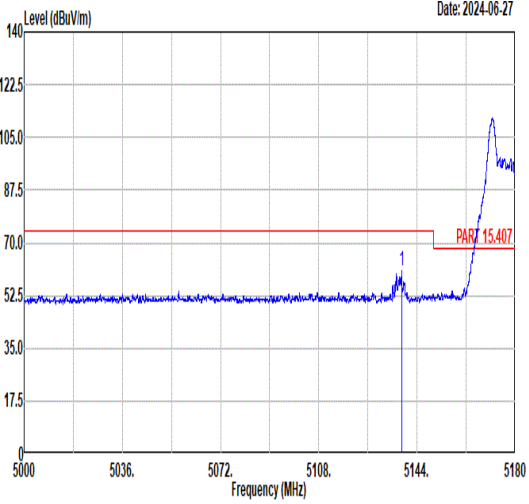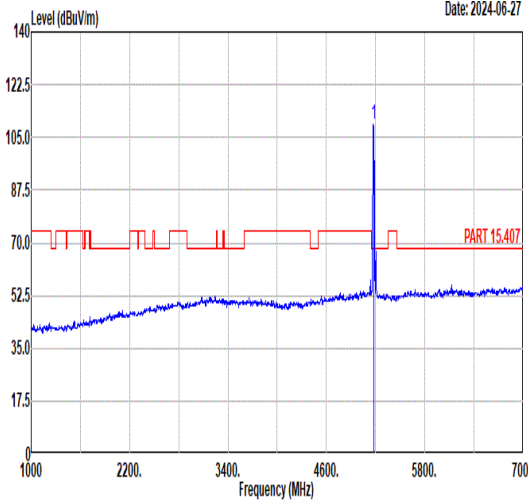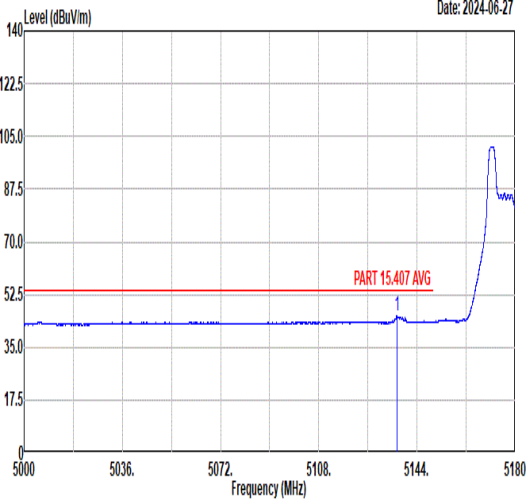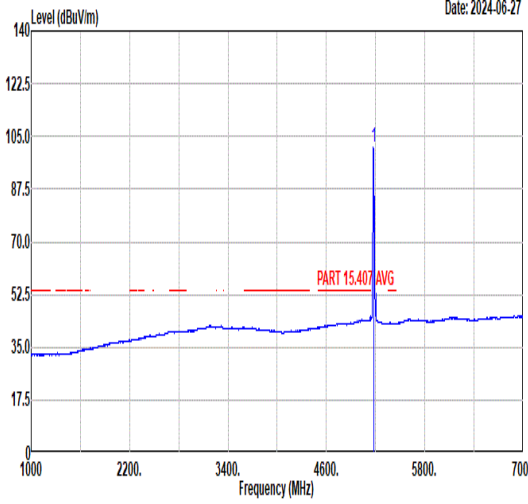

| Mode | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz_Partial RU(26/0) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5138.35</td> <td>60.72</td> <td>74.00</td> <td>-13.28</td> <td>46.53</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>246</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 5138.35 | 60.72 | 74.00 | -13.28 | 46.53 | 34.87 | 11.09 | 31.77 | 246 | 0 PEAK |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.54</td> <td>-----</td> <td>-----</td> <td>95.39</td> <td>34.87</td> <td>11.08</td> <td>31.80</td> <td>246</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 109.54 | ----- | ----- | 95.39 | 34.87 | 11.08 | 31.80 | 246 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5138.35 | 60.72 | 74.00 | -13.28 | 46.53 | 34.87 | 11.09 | 31.77 | 246 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 109.54 | ----- | ----- | 95.39 | 34.87 | 11.08 | 31.80 | 246 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5136.55</td> <td>45.50</td> <td>54.00</td> <td>-8.50</td> <td>31.30</td> <td>34.87</td> <td>11.09</td> <td>31.76</td> <td>246</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 5136.55 | 45.50 | 54.00 | -8.50 | 31.30 | 34.87 | 11.09 | 31.76 | 246 | 0 AVERAGE |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.49</td> <td>-----</td> <td>-----</td> <td>87.34</td> <td>34.87</td> <td>11.08</td> <td>31.80</td> <td>246</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 101.49 | ----- | ----- | 87.34 | 34.87 | 11.08 | 31.80 | 246 | 0 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5136.55 | 45.50 | 54.00 | -8.50 | 31.30 | 34.87 | 11.09 | 31.76 | 246 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 101.49 | ----- | ----- | 87.34 | 34.87 | 11.08 | 31.80 | 246 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

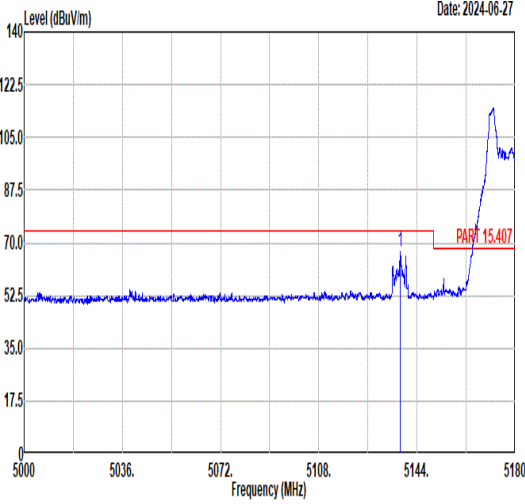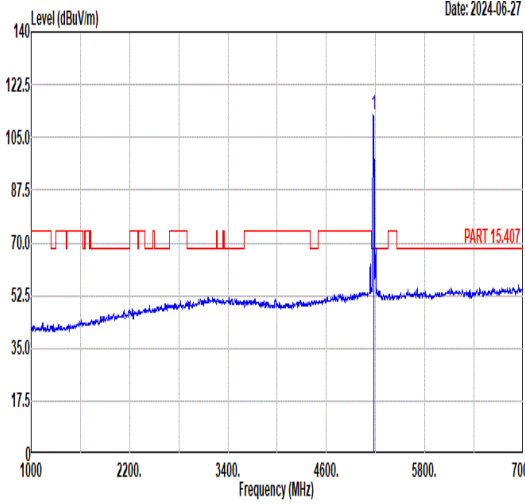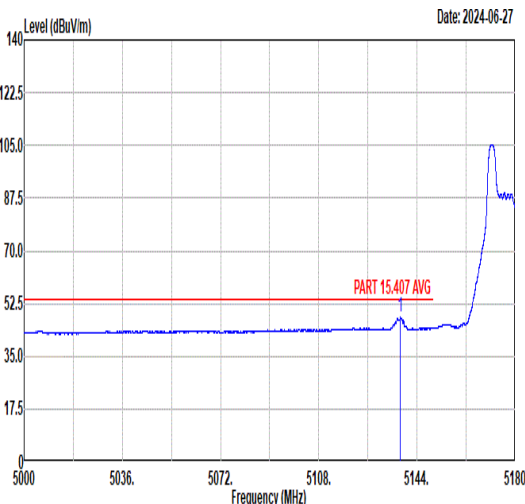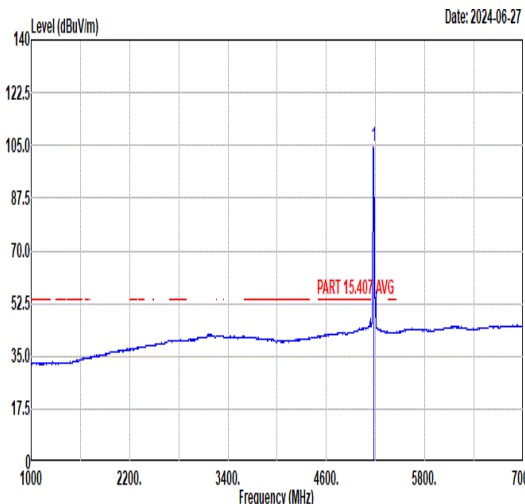

| Mode | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|-------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz_Partial RU(26/0) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.81</td> <td>67.33</td> <td>74.00</td> <td>-6.67</td> <td>53.14</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>185</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5137.81 | 67.33 | 74.00 | -6.67 | 53.14 | 34.87 | 11.09 | 31.77 | 185 | 300 | PEAK |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>112.45</td> <td>-----</td> <td>-----</td> <td>98.30</td> <td>34.87</td> <td>11.08</td> <td>31.80</td> <td>185</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 112.45 | ----- | ----- | 98.30 | 34.87 | 11.08 | 31.80 | 185 | 300 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5137.81 | 67.33 | 74.00 | -6.67 | 53.14 | 34.87 | 11.09 | 31.77 | 185 | 300 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 112.45 | ----- | ----- | 98.30 | 34.87 | 11.08 | 31.80 | 185 | 300 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.97</td> <td>47.82</td> <td>54.00</td> <td>-6.18</td> <td>33.63</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>185</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5137.97 | 47.82 | 54.00 | -6.18 | 33.63 | 34.87 | 11.09 | 31.77 | 185 | 300 | AVERAGE |  <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.85</td> <td>-----</td> <td>-----</td> <td>90.70</td> <td>34.87</td> <td>11.08</td> <td>31.80</td> <td>185</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.85 | ----- | ----- | 90.70 | 34.87 | 11.08 | 31.80 | 185 | 300 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5137.97 | 47.82 | 54.00 | -6.18 | 33.63 | 34.87 | 11.09 | 31.77 | 185 | 300 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.85 | ----- | ----- | 90.70 | 34.87 | 11.08 | 31.80 | 185 | 300 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|--------|-------|-------|-------|-------|-----|-----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz_Partial RU(52/40) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.74</td> <td>62.23</td> <td>74.00</td> <td>-11.77</td> <td>48.50</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>232</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5357.74 | 62.23 | 74.00 | -11.77 | 48.50 | 34.83 | 10.94 | 32.04 | 232 | 0 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>110.02</td> <td>70.00</td> <td>-96.22</td> <td>96.22</td> <td>34.84</td> <td>10.96</td> <td>32.00</td> <td>232</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 110.02 | 70.00 | -96.22 | 96.22 | 34.84 | 10.96 | 32.00 | 232 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5357.74 | 62.23 | 74.00 | -11.77 | 48.50 | 34.83 | 10.94 | 32.04 | 232 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 110.02 | 70.00 | -96.22 | 96.22 | 34.84 | 10.96 | 32.00 | 232 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.43</td> <td>47.81</td> <td>54.00</td> <td>-6.19</td> <td>34.08</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>232</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5358.43 | 47.81 | 54.00 | -6.19 | 34.08 | 34.83 | 10.94 | 32.04 | 232 | 0 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.80</td> <td>52.50</td> <td>-88.00</td> <td>88.00</td> <td>34.84</td> <td>10.96</td> <td>32.00</td> <td>232</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 101.80 | 52.50 | -88.00 | 88.00 | 34.84 | 10.96 | 32.00 | 232 | 0 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5358.43 | 47.81 | 54.00 | -6.19 | 34.08 | 34.83 | 10.94 | 32.04 | 232 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 101.80 | 52.50 | -88.00 | 88.00 | 34.84 | 10.96 | 32.00 | 232 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|-------------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz_Partial RU(52/40) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.31</td> <td>62.86</td> <td>74.00</td> <td>-11.14</td> <td>49.13</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>177</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5357.31 | 62.86 | 74.00 | -11.14 | 49.13 | 34.83 | 10.94 | 32.04 | 177 | 299 | PEAK | <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>111.10</td> <td>-----</td> <td>-----</td> <td>97.30</td> <td>34.84</td> <td>10.96</td> <td>32.00</td> <td>177</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 111.10 | ----- | ----- | 97.30 | 34.84 | 10.96 | 32.00 | 177 | 299 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5357.31 | 62.86 | 74.00 | -11.14 | 49.13 | 34.83 | 10.94 | 32.04 | 177 | 299 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 111.10 | ----- | ----- | 97.30 | 34.84 | 10.96 | 32.00 | 177 | 299 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.43</td> <td>47.03</td> <td>54.00</td> <td>-6.97</td> <td>33.30</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>177</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5358.43 | 47.03 | 54.00 | -6.97 | 33.30 | 34.83 | 10.94 | 32.04 | 177 | 299 | AVERAGE | <p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.66</td> <td>-----</td> <td>-----</td> <td>87.86</td> <td>34.84</td> <td>10.96</td> <td>32.00</td> <td>177</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 101.66 | ----- | ----- | 87.86 | 34.84 | 10.96 | 32.00 | 177 | 299 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5358.43 | 47.03 | 54.00 | -6.97 | 33.30 | 34.83 | 10.94 | 32.04 | 177 | 299 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 101.66 | ----- | ----- | 87.86 | 34.84 | 10.96 | 32.00 | 177 | 299 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |