

JouSecu

MANUAL DE INSTRUCCIONES



Content

	Page
Setup and use your video baby monitor	3
Precaution: use of battery for Parent Unit	4
Scan mode in single screen	5
Scan mode in split screen	6
Quickly switch to the cameras you want to watch	7
Zoom in	8
Talk to your baby unit	9
Power Saving – SCREEN OFF	10
Power Saving – ECO	11-12
Adjust the monitor volume	13
Adjust the camera volume	14
Add more cameras	15
Delete camera	16
Temperature alarm	17
Playing lullaby	18
Adjust the monitor brightness	19
Setting the time	20
Language	21


Contenido

	Página
Configure y use su monitor de video para bebés	23
Precaución:uso de batería para la unidad de padres	24
Modo de escaneo en pantalla única	25
Modo de escaneo en pantalla dividida	26
Cambie rápidamente a las cámaras que desea ver	27
Dar un golpe de zoom	28
Hable con su unidad de bebé	29
Ahorro de energía - PANTALLA APAGADA	30
Ahorro de energía - ECO	31-32
Ajustar el volumen del monitor	33
Ajustar el volumen de la cámara	34
Añadir más cámaras	35
Eliminar cámara	36
Alarma de temperatura	37
Jugando canción de cuna	38
Ajustar el brillo del monitor	39
Configuración de la hora	40
Idiomas	41

Setup and use your video baby monitor


Installing Baby Unit

1) Connect the small plug of power adapter to the Baby Unit and push the Micro USB plug to the end. Only use the enclosed adapter (DC 1000mA). You will see green LED is turned on.



Baby Unit is already paired with Parent Unit without using the pairing button. If you need to add more cameras in the future, you can use this button to add. Please refer to page 14 < [Add more cameras](#)>.

2) Place the Baby Unit on a flat surface, such as a desk or shelf, or mount the camera on a wall.

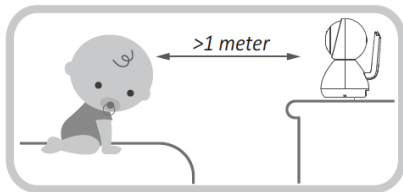


3) Connect the small plug of power adapter to Parent Unit and push the connector to the end. Only use the enclosed adapter (DC 2000mA). Recommend charging time of at least 3 hours before first use.

Precaution: Use of battery for Parent Unit

When battery level is low, the power on/off LED flashes red, the monitor comes with sound alert and battery icon on LCD display flashes red.

Extend life cycle of battery: Only charge the battery when the battery life indicator is low. Constant recharging of your battery before the low battery indicator light comes on will decrease the life of your batteries.

Optimize battery life: Louder speaker sound level consumes more battery power and shortens battery life. Switch on power saving mode and turn the speaker sound level to level 1 to have optimized battery life.

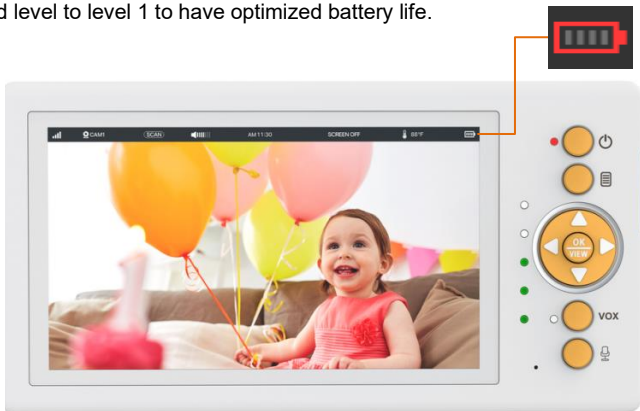


Scan mode in single screen

If two or more cameras are paired for monitoring, in single-screen mode, after entering scan mode, the monitor will switch between paired cameras every 10 seconds.

You can enter the menu with the Menu button only in single screen.

You cannot enter the menu in split screen.

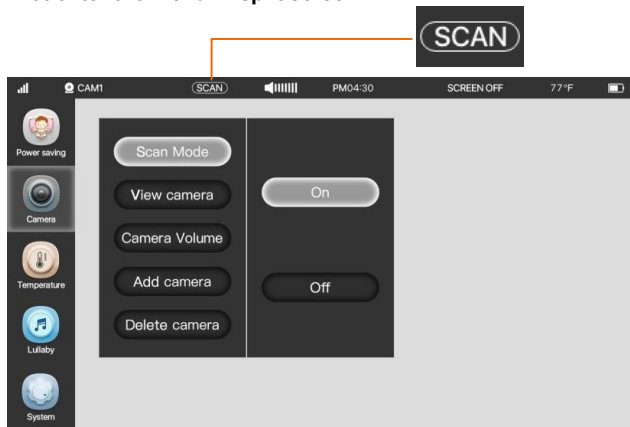

Scan mode in split screen

In split screen, press Menu button to enable scan function, the monitor will alternately receive audio from the paired cameras every 10 seconds.




Quickly switch to the cameras you want to watch

You could use OK/VIEW button to quickly switch to Camera 1, Camera 2, and split screen.


In single screen, you can use the Menu button to enter the menu for settings.

Note: you cannot enter the menu in split screen.

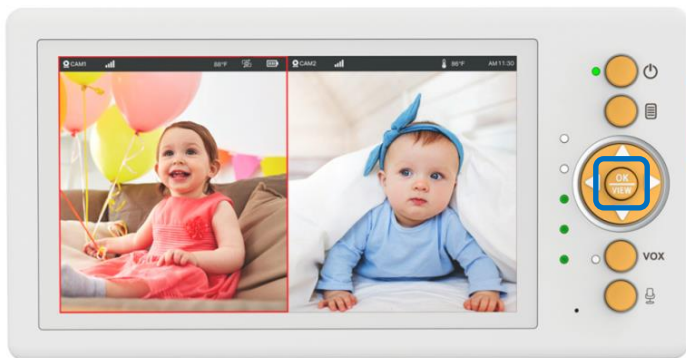


Zoom in

In single screen, press and hold Menu button for 2 seconds to zoom in at 2X and 4X, and then return to 1X.

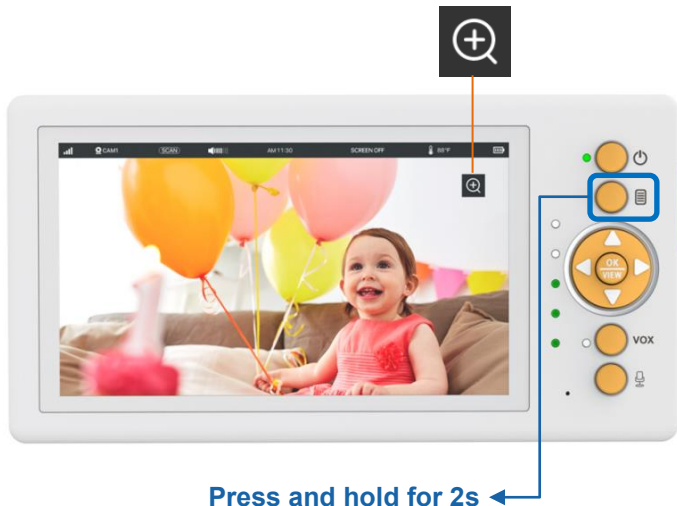

Talk to your Baby Unit

Press and hold the Talk button, and then speak to your Parent Unit. Your voice is transmitted to the Baby Unit. Release the Talk button when finished talking and hear your baby again.

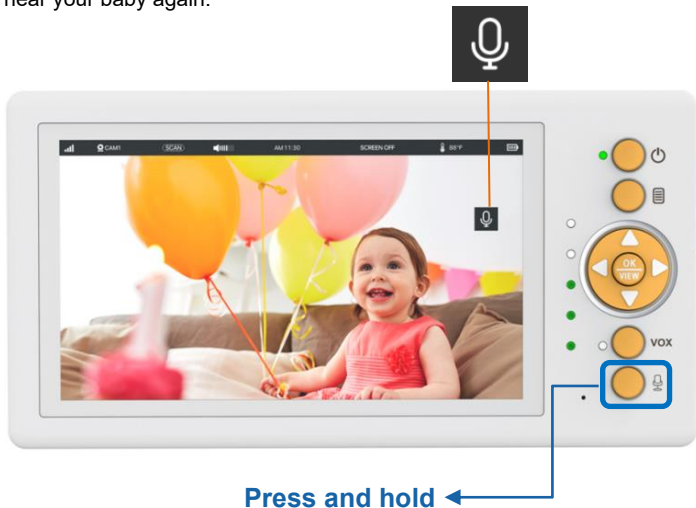

Power Saving – SCREEN OFF

Save battery with SCREEN OFF mode by switching off screen.


VOX button switches off screen and keeps audio on (default setting "SCREEN OFF").

Press any button (except the power button) to exit the Power Saving mode and switch on screen.



Power Saving – ECO

Save more battery with ECO mode by switching off both screen and audio. Enter the menu and then set to ECO. You could select activation sound level between high, medium, low in the menu.

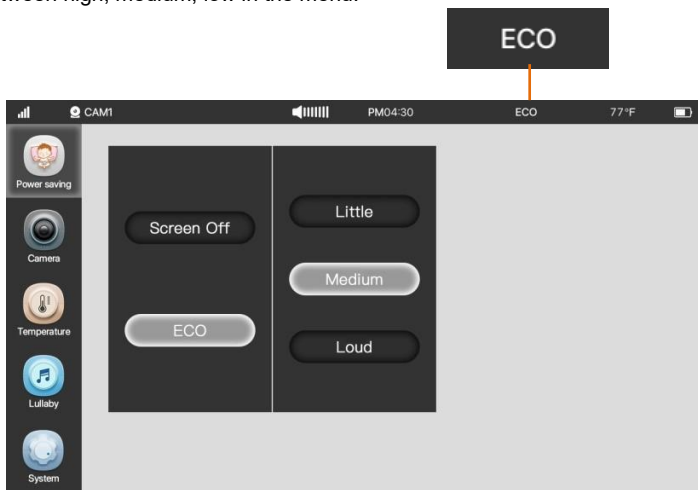

Press VOX button, both sound and screen will be shut off after 30 seconds.

Monitor will be activated when camera detects sound that exceeds the activation sound level you selected (Default level is medium).

After sound and screen is shut off, you could press Power button to switch on both sound and screen. After 30 seconds of inactivity, the sound and screen will shut off again.



Adjust the monitor volume


Press the Volume button to adjust the monitor volume.



Adjust the camera volume

After entering the menu, press the ▲/▼ button to adjust the volume of the current channel camera.

For other paired cameras, you need to switch to the corresponding channel and re-enter the menu to adjust.

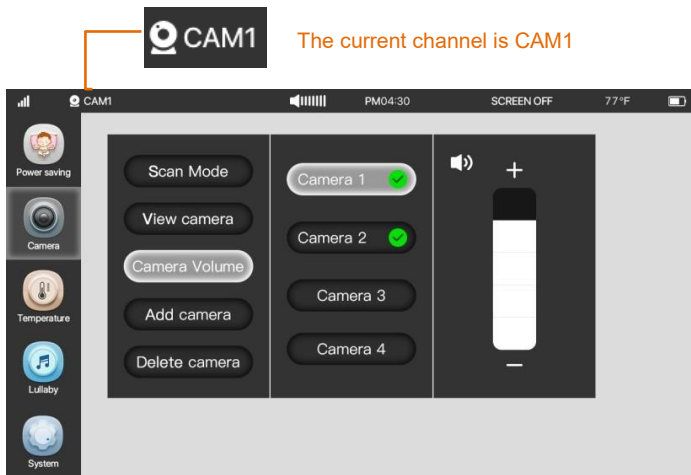


Add more cameras

After entering the menu, choose the channel you need to pair by pressing OK button, and make the monitor enter the pairing mode.


When the pairing message is on screen, press and hold the camera pairing button for 3 seconds.

When camera and monitor is paired, video is on screen automatically.

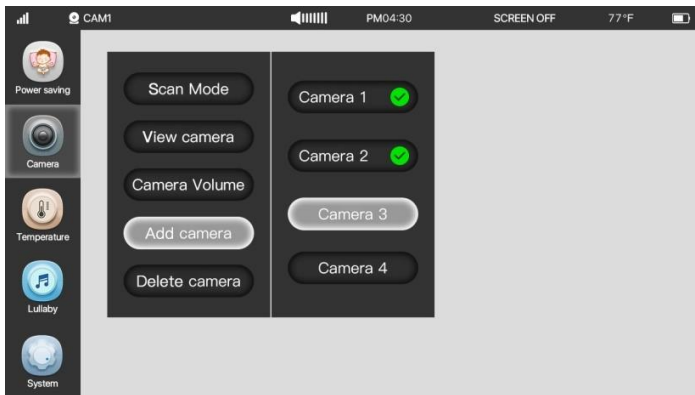

Delete camera


After entering the menu, choose a camera to delete.

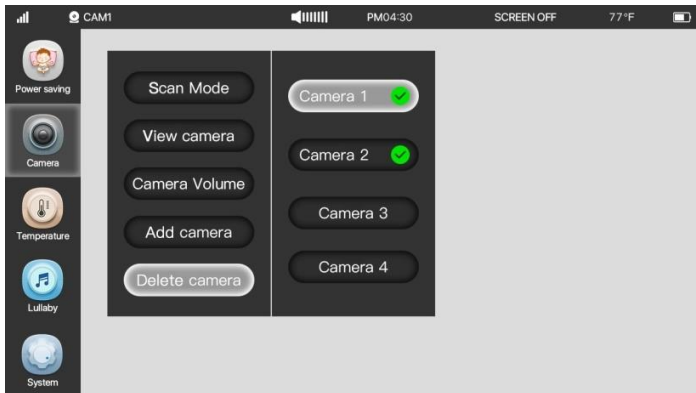

Temperature alarm

After entering the menu, enter the Alarm function to set the temperature (high and low limits) for the current channel camera.


For other paired cameras, you need to switch to the corresponding channel and re-enter the menu for the settings.

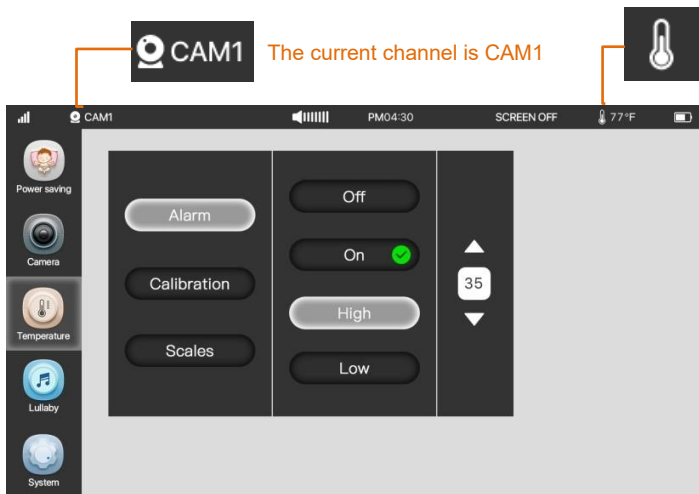

Playing lullaby

After entering the menu, you could choose a lullaby to play on the camera of the current channel.

For other paired cameras, you need to switch to the corresponding channel and re-enter the menu to select the lullaby.

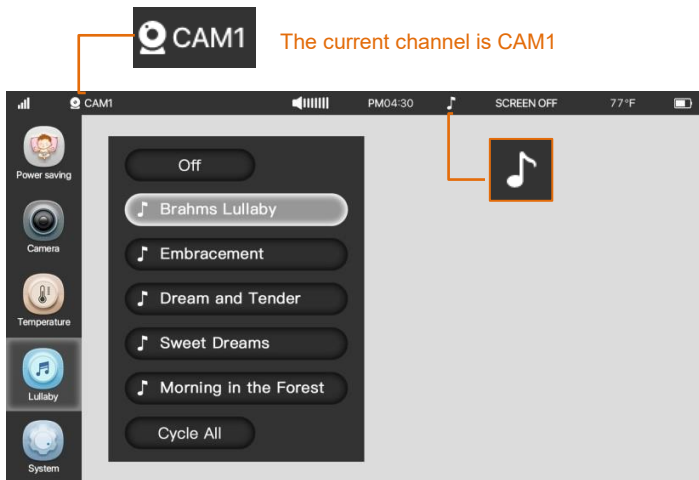

Adjust the monitor brightness

After entering the menu, press ▲/▼ button to adjust the monitor brightness.



Setting the time

Please set the time for the system according to the actual time.



Language


Depending on your needs, you could choose English or Spanish as the system language.



Configure y use su monitor de video para bebés


Instalación de la unidad para bebés

1) Conecte el enchufe pequeño del adaptador de corriente a la unidad del bebé y empuje el enchufe Micro USB hasta el final. Utilice únicamente el adaptador incluido (DC 1000mA). Verá que el LED verde estará encendido.



La unidad para bebés ya está emparejada con la unidad para padres sin usar el botón de emparejamiento. Si necesita agregar más cámaras en el futuro, puede usar este botón para agregar. Consulte la página 32 < [Agregar más cámaras](#) >.

2) Coloque la unidad para bebés sobre una superficie plana, como un escritorio o un estante, o monte la cámara en una pared.

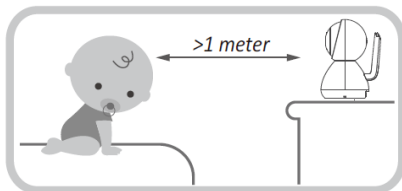

3) Conecte el enchufe pequeño del adaptador de corriente a la unidad para padres y empuje el conector hasta el final. Utilice únicamente el adaptador incluido (DC 2000mA). Se recomienda un tiempo de carga de al menos 3 horas antes del primer uso.

Precaución: uso de batería para la unidad de padres

Cuando el nivel de la batería es bajo, el LED de encendido y apagado parpadea en rojo, el monitor viene con una alerta de sonido y el icono de la batería en la pantalla LCD parpadea en rojo.

Prolongue el ciclo de vida de la batería: solo cargue la batería cuando el indicador de vida útil de la batería esté bajo. La recarga constante de su batería antes de que se encienda la luz indicadora de batería baja disminuirá la vida útil de sus baterías.

Optimice la vida útil de la batería: el nivel más alto de los altavoces consume más energía de la batería y acorta la vida útil de la batería. Active el modo de ahorro de energía y ajuste el nivel de sonido del altavoz al nivel 1 para optimizar la duración de la batería.



Modo de escaneo en pantalla única

Si se emparejan dos o más cámaras para monitorear, en el modo de pantalla única, después de ingresar al modo de escaneo, el monitor cambiará entre las cámaras emparejadas cada 10 segundos más o menos.

Puede ingresar al menú con el botón de menú únicamente en una sola pantalla.

En pantalla dividida, no puede entrar en el menú.



Modo de escaneo en pantalla dividida


En pantalla dividida, presione el botón Menú para habilitar la función de escaneo, el monitor recibirá alternativamente el audio de las cámaras emparejadas cada 10 segundos.



Cambie rápidamente a las cámaras que desea ver

Puede usar el botón OK/VIEW para cambiar rápidamente a la cámara 1, la cámara 2 y la pantalla dividida.

En pantalla única, puede usar el botón Menú para ingresar al menú de configuración, pero en pantalla dividida, no puede ingresar al menú.

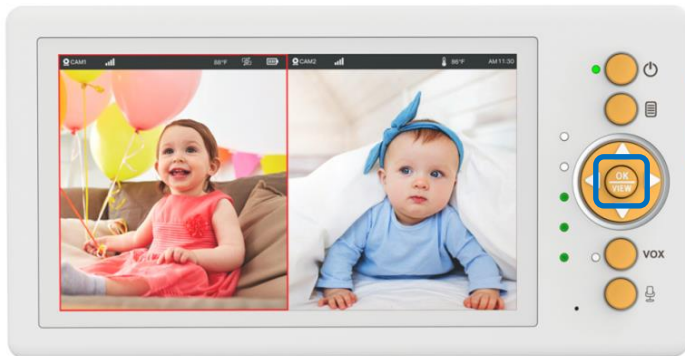


Dar un golpe de zoom

En el modo de pantalla única, mantenga presionado el botón Menú durante 2 segundos para acercar el zoom a 2X y 4X, y luego regrese a 1X.



Hable con su unidad de bebé

Mantenga presionado el botón Hablar y hable con su unidad de padres. Su voz se transmite a la unidad del bebé. Suelte el botón Hablar cuando termine de hablar y vuelva a escuchar a su bebé.

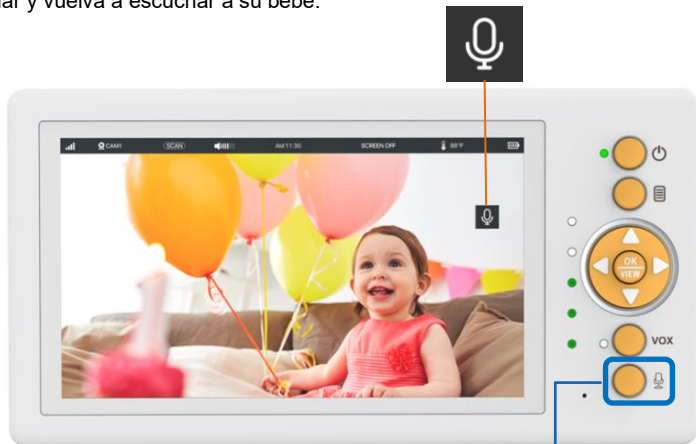


Presione y mantenga

Ahorro de energía – SCREEN OFF

Ahorre energía de la batería con el modo **PANTALLA APAGADA** apagando la pantalla.

El botón VOX apaga la pantalla y mantiene el audio encendido (configuración predeterminada "PANTALLA APAGADA").


Presione cualquier botón excepto el botón de encendido para salir de Ahorro de energía y encender la pantalla.

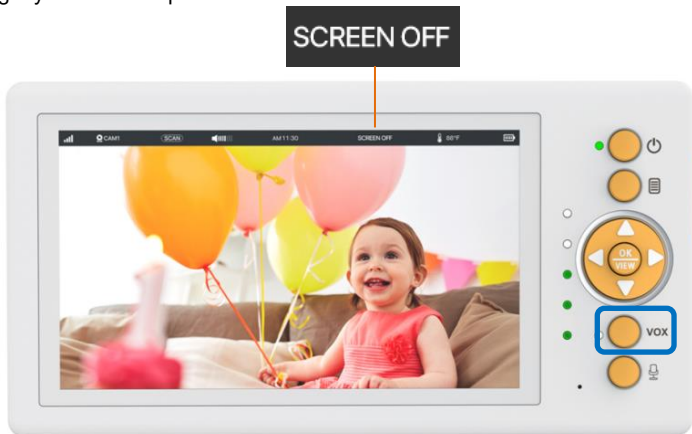

Ahorro de energía - ECO

Ahorre más energía de la batería con el modo ECO apagando la pantalla y el audio.

Entrar en el menú, y luego establecer en ECO. Puede seleccionar el nivel de sonido de activación entre alto, medio y bajo en el menú.

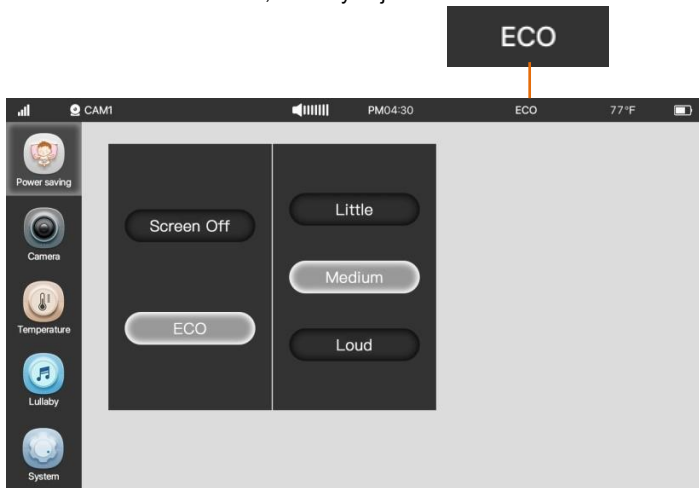

Presione el botón VOX, tanto el sonido como la pantalla se apagarán después de 30 segundos.

El monitor se activará cuando la cámara detecte un sonido que exceda el nivel de sonido de activación que seleccionó (el nivel predeterminado es medio). Después de apagar el sonido y la pantalla, puede presionar el botón de encendido para encender tanto el sonido como la pantalla. Después de 30 segundos de inactividad, el sonido y la pantalla se apagarán nuevamente.



Ajustar el volumen del monitor

Pulse el botón Volumen para ajustar el volumen del monitor.



Ajustar el volumen de la cámara

Después de ingresar al menú, presione el botón ▲/▼ para ajustar el volumen de la cámara del canal actual.

Para otras cámaras emparejadas, debe cambiar al canal correspondiente y volver a ingresar al menú para ajustar.



Añadir más cámaras

Después de ingresar al menú, elija el canal que necesita emparejar presionando el botón OK y haga que el monitor ingrese al modo de emparejamiento.

Cuando el mensaje de emparejamiento aparece en la pantalla, presione el botón de emparejamiento de la cámara durante 3 segundos.

Al emparejarse la cámara y el monitor, el video aparecerá en la pantalla automáticamente.



Eliminar cámara

Después de ingresar al menú, elija una cámara para eliminar.



Alarma de temperatura

Después de ingresar al menú, encienda la función de alarma y luego configure los límites alto y bajo de temperatura para la cámara del canal actual.

Para otras cámaras emparejadas, debe cambiar al canal correspondiente y volver a ingresar al menú para la configuración.



Jugando canción de cuna

Después de ingresar al menú, puede elegir una canción de cuna para reproducir en la cámara del canal actual.

Para otras cámaras emparejadas, debe cambiar al canal correspondiente y volver a ingresar al menú para reproducir.




Ajustar el brillo del monitor

Después de ingresar al menú, presione el botón ▲/▼ para ajustar el brillo del monitor.



Configuración de la hora

Configure la hora del sistema de acuerdo con la hora real.

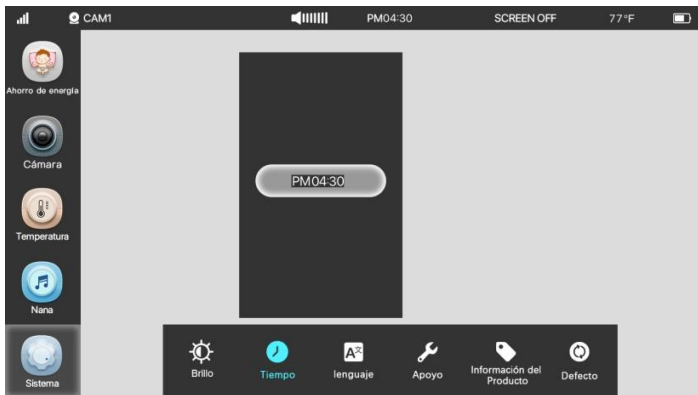

Idiomas

Dependiendo de sus necesidades, puede elegir inglés o español como idioma del sistema.





WARNING

THIS PRODUCT CANNOT REPLACE RESPONSIBLE ADULT SUPERVISION

- When an AC Adapter is plugged into an electrical outlet, do not the exposed end.
- Test baby monitor before first use, periodically, and when changing location of the baby unit(Camera).
- Do not use monitor near water (Such as bathtub, Sink, etc)
- Keep parent unit away from heat sources (Such as stoves, radiators, etc)
- Make sure there is proper ventilation around baby unit and parent unit.
- This product is not a toy. Do not allow children to play with it.
- The mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
- The baby monitor should not be considered as a medical device. While using the baby monitor, it is strongly recommended to have an adult directly checking on your baby. Premature babies or children considered at risk must be supervised by your pediatrician or other medical staff.

Warning Information

- * Keep this instruction manual for future reference.
- * For adult use only.



Battery Warning

Do NOT disassemble the monitor or take out the battery. It might cause irreversible damage to the monitor and danger of battery explosion.

The monitor shall not be exposed to excessive heat such as sunshine, fire or the like.

Keep the monitor away from children.

For Camera(FCC ID: 2AV29-B155BU)

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

.

For Monitor(FCC ID: 2AV29-B155PU)**FCC Warning:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.



Service Email: sales@jousecu.com

Service Tel: +1 929-486-9032

QR of Amazon Store



JouSecu

