


Dangbei | X3

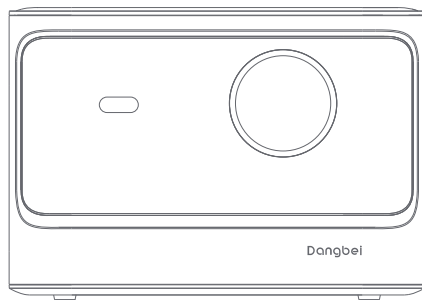

User Manual

Language

English	00
Español	00
Français	00
日本語	00

Contents

Dear Customer	00
Projection Size Description	00
Packing List	00
Projector	00
Remote Control	00
Remote Control Pairing	00
Network Setting	00
Focus Setting	00
Keystone Correction Setting	00
Bluetooth Speaker Mode	00
Screen Mirroring	00
More Settings	00
More Functions	00
Statement	00

Dear Customer

Please read the product instruction carefully:

Thank you for purchasing and using the products of Hangzhou Dangbei Network Technology Co., Ltd. (hereinafter referred to as "Dangbei"). For your safety and interests, you should read the Product Instruction carefully before using this product.

If you fail to follow the product instructions or precautions, and cause any personal injury, property or other losses, Dangbei will not be liable.

About the product instruction:

The copyright of the instruction belongs to Dangbei.


Trademarks and names mentioned in the instruction belong to their respective right owners.

In case of inconformity between the content of the instructions and the actual product, the actual product shall prevail.

* Dangbei reserves the right to interpret and modify the instructions.

Projection Size Description


Size	Screen (Length*Width:cm)
60 inches	133* 75
80 inches	177*100
100 inches	221*124
120 inches	265*149
150 inches	332*187

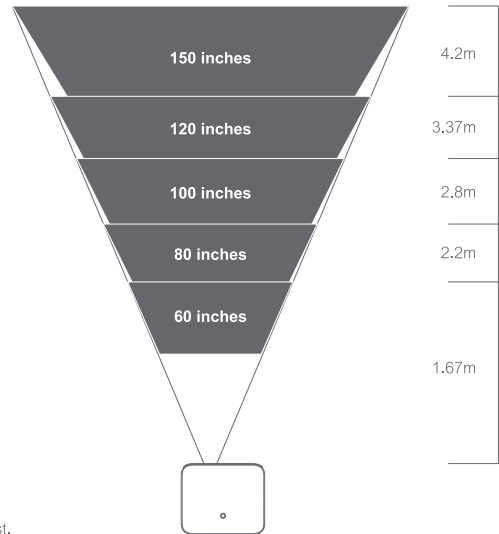

* It is recommended that the projection size of 100 inches is the best.

Packing List


Before using the device, please check all things included.




Projector



Remote Control



Wipe cloth



Adapter




AC Cable




User Manual

Projector


Overview and interface description.






Front view



Rear view



Left View



*** LED Indication**

Standby mode: LED 50% brightness

Projection mode: Keep on LED 100% brightness until the light turns off after the picture is output from the lens.

Bluetooth mode: LED flashes slowly when it is waiting for pairing, after pairing is successful, the LED will 100% brightness.

System software Upgrading: LED flashes fast with 100% brightness.

Remote Control

- Open the battery holder cover of the remote control.
- Install 2 AAA batteries. *
- Put back the cover.



• **Battery Holder**
Install 2 AAA batteries.

• **Mouse key**
Press to enter or exit mouse key mode.

• **Navigation keys**
Navigate menus or adjust the selected content.

• **Return key**
Return to the previous page.

• **Home key**
Open the home page.

• **Power key**

• **Mouse key**

• **Navigation keys**

• **Return key**

• **Home key**



• **Indicator light**

When press key,it will be flashed.

• **Side key**

Long press:automatic focus adjustment.
Short press:Pop-up quick setting window.

• **OK key**

Press to confirm a selection or entry.
Pause/resume play.

• **Menu key**

Access more options during play
(available options depend upon the source).



• **Volume key**


Volume up/down.

* Please insert new batteries matching the polarity(+/-) as indicated.

1

Remote Control Pairing

- Place the remote control within 10cm of the device.
- Press the Home key  and Menu key  simultaneously until an indicator light begins flashing and a "Di" is heard.
- This means that the remote control enters the pairing mode.
- When a "DiDi" is heard, the connection is successful.

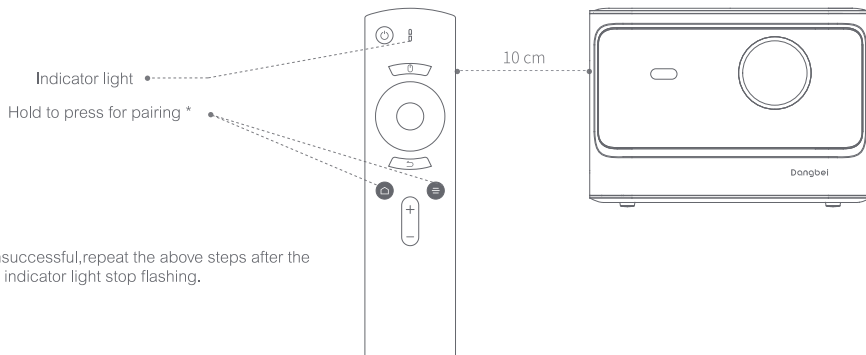

* If pairing is unsuccessful, repeat the above steps after the remote control indicator light stop flashing.

2

Network Setting

Connect the Wi-Fi Network

- Into [Setting] - [Network]
- Select the wireless network,and enter the password.

Connect the Wired Network


- Plug the network cable into the device LAN port(Please ensure the network with the internet).

* The device supports both wired and wireless networks, when both are connected,the system will optimally use the wired network.

3

Focus Setting

Method 1:Hold to press the remote control side key,will automatic focus adjustment.

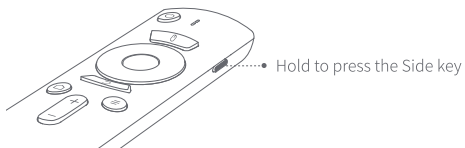

Method 2:Into [Setting] - [Focus] - [Automatic focus]


Method 3:Into [Setting] - [Focus] - [Manual focus],reference the screen picture,press the up and down of the Navigation key to adjust the focus.When the screen clear,stop operation.

* Manual focus through the remote control up and down keys, adjust the picture definition.


4

Keystone Correction Setting

- Into [Setting] - [Keystone correction] - [Automatic correction] The automatic keystone correction function is enabled,the frame will be adjusted automatically.
- Into [Setting] - [Keystone correction] - [Manual correction] To adjust the four points and the size of the frame.

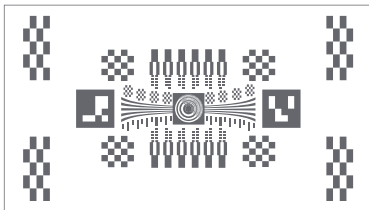

The device support automatic keystone correction,there may be a slight deviation in the correction effect under different usage scenarios, which can be further fine-tuned by manual correction.

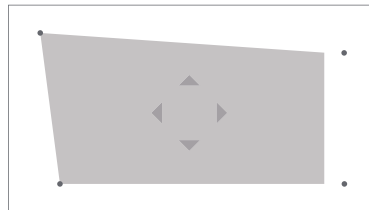

Manual correction

5

Bluetooth Speaker Mode


- Short press the remote control [Power key],select Bluetooth Speaker mode.
- Bluetooth try to pair the device which name included "Dangebel Speaker",when it is pairing successful,you can hear the beep "Bluetooth connected".
- After that,you can enjoy the music,the voice output from the device.
- Short press the remote control [Power key] again,exit the Bluetooth Speaker mode.



Short press the Power key



Connecting equipment




Enjoy the music

6

Screen Mirroring

You can wirelessly cast the screen of your smartphone or tablet onto the projection surface.

Please open the Screencast APP to learn more about the operation method.

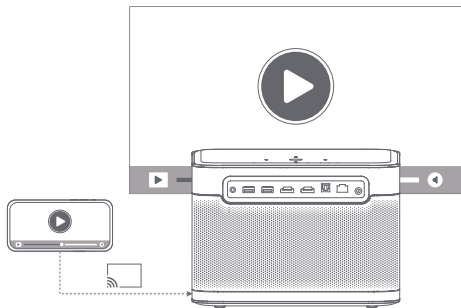**7**

More Settings

The device is displayed on any page, you can press the remote control right Side key to set your device. To configure more settings, go to check the completely setting page.

More Functions

System upgrade

On line upgrade: into [setting] - [system] - [system upgrade]

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC STATEMENT

CAN ICES-3 (B)/NMB-3 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1.L'appareil ne doit pas produire de brouillage;

2.L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The distance between user and products should be no less than 20cm.

La distance entre l'utilisateur et le produit ne doit pas être inférieure à 20 cm.

5.2 GHz band is restricted to indoor use only.

La bande de 5.2 GHz est réservée à l'usage intérieur.



For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS, Inc. (for companies headquartered in the U.S./Japan/Taiwan) or under license from DTS Licensing Limited (for all other companies). DTS, DTS-HD Master Audio, DTS-HD, and the DTS-HD logo are registered trademarks or trademarks of DTS, Inc. in the United States and other countries. © 2020 DTS, Inc. ALL RIGHTS RESERVED.



Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HANGZHOU DANGBEI NETWORK TECHNOLOGY CO., LTD is under license. Other trademarks and trade names are those of their respective owners.



HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Important Precautions

- After power on the device, do not face to the lens by eyes, because the strong lens light may injury to the eyes.
- Do not block the air inlet/outlet of the device, so as not to affect the heat dissipation of internal parts and cause damage to the device.
- Do not throw things to the device top cover, or knock the edge. It has the risk to broke the glass.
- Please keep distance from the environment of the humidity, exposure to the sun, high temperature, magnetic force.
- Do not place the device in areas susceptible to excessive dust and dirt.
- Put the device to the flat and stable station, do not put it to the place prone to vibration
- Please use correct type of battery for the remote control.
- Please use the device original power adaptor, to avoid the high current damage the main board component.
- Do not disassemble the device personally, repair the device only staff authorized by the company.
- Place and use the device in an environment of 0°C-40°C.
- Use careful with the earphone maybe excessive sound pressure from earphones and headphones can cause hearingloss.
- The plug considered as disconnect device of adaptor

Dangbei Smart Projector X3

Model : DBX3

Input : AC 100-240V \sim 60/50Hz,2.5A

Output : 18.0V \equiv 10.0A

USB Output : 5V \equiv 2A (Max)

Manufacturer : Shenzhen Dangs Science and Technology Co., Ltd

For FAQs and more information,please visit:

 mall.dangbei.com

 support@dangbei.com