

Test Report

Verified code: 098237

Report No.: E202212085403-02-2

Customer: Fiberhome Telecommunication Technologies Co., Ltd.

Address: No.88 Youkeyuan Road, Hongshan District, Wuhan,Hubei, China

Sample Name: Wireless Router

Sample Model: SR1021F

Receive Sample Date: Dec.10,2022

Test Date: Feb.16,2023 ~ Mar.15,2023

Reference Document: CFR 47, FCC Part 15 Subpart E Unlicensed National Information Infrastructure Devices

Test Result: Pass

Prepared by: Lu Wei

Reviewed by: Jimmy Tan

Approved by: Zhao Zetian



GRG METROLOGY & TEST GROUP CO., LTD.

Issued Date: 2023-03-28

GRG METROLOGY & TEST GROUP CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.

----- The following blanks -----

Table of Contents

1.	TEST RESULT SUMMARY	6
2.	GENERAL DESCRIPTION OF EUT.....	7
2.1.	APPLICANT	7
2.2.	MANUFACTURER.....	7
2.3.	FACTORY	7
2.4.	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	7
2.5.	TEST OPERATION MODE	10
2.6.	LOCAL SUPPORTIVEINSTRUMENTS.....	10
2.7.	CONFIGURATION OF SYSTEM UNDER TEST	10
2.8.	DUTY CYCLE.....	13
3.	LABORATORY AND ACCREDITATIONS AND MEASUREMENT UNCERTAINTY	149
3.1.	LABORATORY	149
3.2.	ACCREDITATIONS	149
3.3.	MEASUREMENT UNCERTAINTY	149
4.	LIST OF USED TEST EQUIPMENT AT GRGT	151
5.	CONDUCTED EMISSION MEASUREMENT	152
5.1.	LIMITS.....	152
5.2.	TEST PROCEDURES	152
5.3.	TEST SETUP	153
5.4.	DATA SAMPLE	153
5.5.	TEST RESULTS	154
6.	RADIATED SPURIOUS EMISSIONS	158
6.1.	LIMITS.....	158
6.2.	TEST PROCEDURES	159
6.3.	TEST SETUP	161
6.4.	DATA SAMPLE	162
6.5.	TEST RESULTS	163
7.	RESTRICTED BANDS OF OPERATION.....	239
7.1.	LIMITS.....	239
7.2.	TEST PROCEDURES	239
7.3.	TEST SETUP	240
7.4.	TEST RESULTS	241
8.	6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	358
8.1.	LIMITS.....	358
8.2.	TEST PROCEDURES	358
8.3.	TEST SETUP	359
8.4.	TEST RESULTS	360
9.	OUTPUT POWER	639
9.1.	LIMITS.....	639
9.2.	TEST PROCEDURES	639
9.3.	TEST SETUP	639

9.4.	TEST RESULTS	640
10.	POWER SPECTRAL DENSITY	649
10.1.	LIMITS.....	649
10.2.	TEST PROCEDURES	649
10.3.	TEST SETUP	649
10.4.	TEST RESULTS	650
11.	FREQUENCY STABILITY	791
11.1.	LIMITS.....	791
11.2.	TEST PROCEDURES	791
11.3.	TEST SETUP	792
11.4.	TEST RESULTS	793
APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM		798

----- The following blanks -----

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E202212085403-02-2	Original Issue	2023/03/21

----- The following blanks -----

1. TEST RESULT SUMMARY

Standard	Item	Limit / Severity	Result
CFR 47, FCC Part 15 Subpart E (§15.407)	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
	AC Power Line Conducted Emissions	15.207 15.407(b)(6)	PASS
	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
	Output Power	15.407(a)	PASS
	Peak Power Spectral Density	15.407(a)	PASS
	Frequency Stability	15.407(g)	PASS
	Antenna Requirement	15.203	PASS ¹⁾

Note: ¹⁾ The EUT have three antennas. The antenna is Internal Antenna.

The max gain of antenna is 3.88dBi, which accordance 15.203 is considered sufficient to comply with the provisions of this section.

----- The following blanks -----

2. GENERAL DESCRIPTION OF EUT

2.1. APPLICANT

Name: Fiberhome Telecommunication Technologies Co., Ltd.
Address: No.88 Youkeyuan Road, Hongshan District, Wuhan,Hubei, China

2.2. MANUFACTURER

Name: Fiberhome Telecommunication Technologies Co., Ltd.
Address: No.88 Youkeyuan Road, Hongshan District, Wuhan,Hubei, China

2.3. FACTORY

Name: Fiberhome Telecommunication Technologies Co., Ltd.
Address: No.67,Chuangye Street,East Lake High-tech Development Zone,Wuhan City,Hubei Province,P.R.China

2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Product Name: Wireless Router
Product Model: SR1021F
Adding Model: /
FCC ID: 2AV2N-SR1021F
Trade Name: FiberHome
Power Supply: DC12.0V power supplied by adapter
Adapter Specification: Adapter1: KL-WA120100-D
Input:100-240V~50/60Hz 0.5A Max
Output:12V  1.0A
Adapter2: RD1201000-C55-35MGD
Input:100-240V~50/60Hz 0.6A Max
Output:12V  1A
Frequency Band: U-NII-1: 5180 MHz~5240 MHz
U-NII-2A: 5260 MHz~5320 MHz
U-NII-2C: 5500 MHz~5700 MHz
U-NII-3: 5745 MHz~5825 MHz
Modulation Type: OFDM, OFDMA
Antenna Specification: Internal antenna
U-NII-1:
PCB antenna 1 with 3.26dBi gain (Max.)
PCB antenna 2 with 3.26dBi gain (Max.)
On Board antenna 3 with 3.58dBi gain (Max.)
U-NII-2A:
PCB antenna 1 with 3.20dBi gain (Max.)
PCB antenna 2 with 3.20dBi gain (Max.)

	On Board antenna 3 with 3.36dBi gain (Max.)
	U-NII-2C:
	PCB antenna 1 with 3.26dBi gain (Max.)
	PCB antenna 2 with 3.26dBi gain (Max.)
	On Board antenna 3 with 3.25dBi gain (Max.)
	U-NII-3:
	PCB antenna 1 with 3.75dBi gain (Max.)
	PCB antenna 2 with 3.75dBi gain (Max.)
	On Board antenna 3 with 3.88dBi gain (Max.)
Number Of	U-NII-1:
Channel	IEEE 802.11a / n HT20 / ac VHT20 / ax HE20: 4 Channels
	IEEE 802.11n HT40 / ac VHT40 / ax HE40: 2 Channels
	IEEE 802.11ac VHT80 / ax HE80: 1 Channel
	U-NII-2A:
	IEEE 802.11a / n HT20 / ac VHT20 / ax HE20: 4 Channels
	IEEE 802.11n HT40 / ac VHT40 / ax HE40: 2 Channels
	IEEE 802.11ac VHT80 / ax HE80: 1 Channel
	IEEE 802.11ax HE160: 1 Channel
	U-NII-2C:
	IEEE 802.11a / n HT20 / ac VHT20 / ax HE20: 11 Channels
	IEEE 802.11n HT40 / ac VHT40 / ax HE40: 5 Channels
	IEEE 802.11ac VHT80 / ax HE80: 2 Channel
	IEEE 802.11ax HE160: 1 Channel
	U-NII-3:
	IEEE 802.11a / n HT20 / ac VHT20 / ax HE20: 5 Channels
	IEEE 802.11n HT40 / ac VHT40 / ax HE40: 2 Channels
	IEEE 802.11ac VHT80 / ax HE80: 1 Channel
Channels Spacing:	IEEE 802.11a: 20MHz
	IEEE 802.11n HT20: 20MHz
	IEEE 802.11n HT40: 40MHz
	IEEE 802.11ac VHT20: 20MHz
	IEEE 802.11ac VHT40: 40MHz
	IEEE 802.11ac VHT80: 80MHz
	IEEE 802.11ax HE20: 20MHz
	IEEE 802.11ax HE40: 40MHz
	IEEE 802.11ax HE80: 80MHz
	IEEE 802.11ax HE160: 160MHz
Transmit Power:	U-NII-1:
	9.06dBm for IEEE 802.11a
	13.18dBm for IEEE 802.11n HT20
	13.4dBm for IEEE 802.11ac VHT20
	8.6dBm for IEEE 802.11ax HE20
	11.85dBm for IEEE 802.11n HT40
	12.02dBm for IEEE 802.11ac VHT40
	8.56dBm for IEEE 802.11ax HE40
	9.12dBm for IEEE 802.11ac VHT80
	8.98dBm for IEEE 802.11ax HE80

U-NII-2A:

9.97dBm for IEEE 802.11a
13.9dBm for IEEE 802.11n HT20
13.62dBm for IEEE 802.11ac VHT20
12.92dBm for IEEE 802.11ax HE20
11.85dBm for IEEE 802.11n HT40
11.78dBm for IEEE 802.11ac VHT40
8.88dBm for IEEE 802.11ax HE40
8.97dBm for IEEE 802.11ac VHT80
8.78dBm for IEEE 802.11ax HE80
9.07dBm for IEEE 802.11ax HE160

U-NII-2C:

9.06dBm for IEEE 802.11a
13.29dBm for IEEE 802.11n HT20
13.49dBm for IEEE 802.11ac VHT20
8.09dBm for IEEE 802.11ax HE20
11.79dBm for IEEE 802.11n HT40
11.78dBm for IEEE 802.11ac VHT40
8.81dBm for IEEE 802.11ax HE40
9.23dBm for IEEE 802.11ac VHT80
8.84dBm for IEEE 802.11ax HE80
9.02dBm for IEEE 802.11ax HE160

U-NII-3:

9.73dBm for IEEE 802.11a
13.63dBm for IEEE 802.11n HT20
13.83dBm for IEEE 802.11ac VHT20
8.52dBm for IEEE 802.11ax HE20
11.93dBm for IEEE 802.11n HT40
11.69dBm for IEEE 802.11ac VHT40
8.81dBm for IEEE 802.11ax HE40
9.2dBm for IEEE 802.11ac VHT80
8.96dBm for IEEE 802.11ax HE80

Temperature Range: -5°C~45°C

Hardware
Version: /

Software
Version: V1.0

Sample submitting way: ☒ Provided by customer ☐ Sampling

Sample No: E202212085403-02-0014, E202212085403-02-0015

Note: \

2.5. TEST OPERATION MODE


Mode No.	Description of the modes
1	5G Wi-Fi TX mode

Note: The items of radiated emission just record the worst case of 20MHz/40MHz/80MHz/160MHz bandwidth.

2.6. LOCAL SUPPORTIVEINSTRUMENTS

ID	Name of Equipment	Manufacturer	Model	Serial Number	Note
A	Notebook	LENOVO	ZHAOYANG K4e-IML	LRX00A41	Provided by Lab
1	RJ45 LAN Cable	/	/	/	UnShielded,1.93m(for conducted test),accessory of EUT
2	RJ45 LAN Cable	/	/	/	UnShielded,10.0m(for radiated test),provided by Lab

2.7. CONFIGURATION OF SYSTEM UNDER TEST

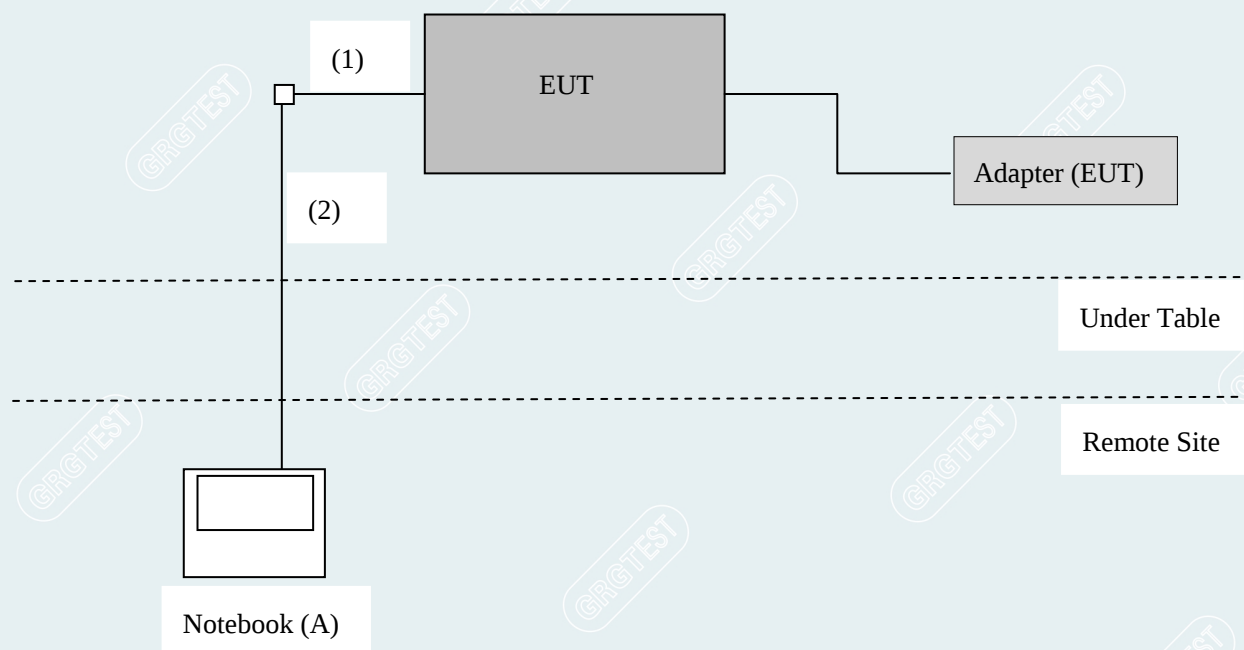

Test software:

Software version
QA Tool V0.0.6.00

Mode	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting
IEEE 802.11a	5180	9	5500	9
	5200	9	5580	9
	5240	9	5700	9
	5260	9	5745	9
	5300	9	5785	9
	5320	9	5825	9

Mode	Frequency (MHz)	Power Setting	Mode	Frequency (MHz)	Power Setting
IEEE 802.11n HT20	5180	9	IEEE 802.11ac VHT20	5180	9
	5200	9		5200	9
	5240	9		5240	9
	5260	9		5260	9
	5300	9		5300	9
	5320	9		5320	9
	5500	9		5500	9
	5580	9		5580	9
	5700	9		5700	9
	5745	9		5745	9
	5785	9		5785	9
	5825	9		5825	9

Mode	Frequency (MHz)	Power Setting	Mode	Frequency (MHz)	Power Setting
IEEE 802.11n HT40	5190	9	IEEE 802.11ac VHT40	5190	9
	5230	9		5230	9
	5270	9		5270	9
	5310	9		5310	9
	5510	9		5510	9
	5550	9		5550	9
	5670	9		5670	9
	5755	9		5755	9
	5795	9		5795	9

Mode	Frequency (MHz)	Power Setting	Mode	Frequency (MHz)	Power Setting
IEEE 802.11ax HE20	5180	9	IEEE 802.11ax HE40	5190	9
	5200	9		5230	9
	5240	9		5270	9
	5260	9		5310	9

	5300	9		5510	9
	5320	9		5550	9
	5500	9		5670	9
	5580	9		5755	9
	5700	9		5795	9
	5745	9		/	/
	5785	9		/	/
	5825	9		/	/

Mode	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting
IEEE 802.11ac VHT80	5210	9	5610	9
	5290	9	5775	9
	5530	9	/	/

Mode	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting
IEEE 802.11ax HE80	5210	9	5610	9
	5290	9	5775	9
	5530	9	/	/

Mode	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting
IEEE 802.11ax HE160	5250	9	5670	9

----- The following blanks -----

2.8. DUTY CYCLE

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	20.9℃/47%RH/101.1kPa	Test Voltage	AC120V/60Hz
Tested By	Qin Tingting	Tested Date	2023/02/28~2023/03/15

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	96.21	0.17	0.72
NVNT	a	5180	Ant2	96.15	0.17	0.72
NVNT	a	5180	Ant3	96.15	0.17	0.72
NVNT	a	5200	Ant1	96.15	0.17	0.72
NVNT	a	5200	Ant2	96.15	0.17	0.72
NVNT	a	5200	Ant3	96.15	0.17	0.72
NVNT	a	5240	Ant1	96.15	0.17	0.72
NVNT	a	5240	Ant2	96.21	0.17	0.72
NVNT	a	5240	Ant3	96.15	0.17	0.72
NVNT	n20	5180	Ant1	95.97	0.18	0.76
NVNT	n20	5180	Ant2	95.9	0.18	0.76
NVNT	n20	5180	Ant3	95.9	0.18	0.76
NVNT	n20	5200	Ant1	95.9	0.18	0.76
NVNT	n20	5200	Ant2	95.97	0.18	0.76
NVNT	n20	5200	Ant3	95.97	0.18	0.76
NVNT	n20	5240	Ant1	95.9	0.18	0.76
NVNT	n20	5240	Ant2	95.9	0.18	0.76
NVNT	n20	5240	Ant3	95.97	0.18	0.76
NVNT	n40	5190	Ant1	92.2	0.35	1.54
NVNT	n40	5190	Ant2	92.06	0.36	1.54
NVNT	n40	5190	Ant3	92.19	0.35	1.54
NVNT	n40	5230	Ant1	92.2	0.35	1.54
NVNT	n40	5230	Ant2	92.2	0.35	1.54
NVNT	n40	5230	Ant3	92.06	0.36	1.54
NVNT	ac20	5180	Ant1	95.92	0.18	0.76
NVNT	ac20	5180	Ant2	95.92	0.18	0.76
NVNT	ac20	5180	Ant3	95.92	0.18	0.76
NVNT	ac20	5200	Ant1	95.92	0.18	0.76
NVNT	ac20	5200	Ant2	95.92	0.18	0.76
NVNT	ac20	5200	Ant3	95.99	0.18	0.76
NVNT	ac20	5240	Ant1	95.92	0.18	0.76
NVNT	ac20	5240	Ant2	95.92	0.18	0.76
NVNT	ac20	5240	Ant3	95.99	0.18	0.76
NVNT	ac40	5190	Ant1	92.29	0.35	1.52
NVNT	ac40	5190	Ant2	92.15	0.36	1.52
NVNT	ac40	5190	Ant3	92.15	0.36	1.52
NVNT	ac40	5230	Ant1	92.15	0.36	1.52
NVNT	ac40	5230	Ant2	92.15	0.36	1.52
NVNT	ac40	5230	Ant3	92.15	0.36	1.52
NVNT	ac80	5210	Ant1	85.3	0.69	3.08
NVNT	ac80	5210	Ant2	85.56	0.68	3.07
NVNT	ac80	5210	Ant3	85.3	0.69	3.08
NVNT	ax20	5180	Ant1	85.25	0.69	3.14
NVNT	ax20	5180	Ant2	85.25	0.69	3.14
NVNT	ax20	5180	Ant3	84.99	0.71	3.15

NVNT	ax20	5200	Ant1	84.99	0.71	3.15
NVNT	ax20	5200	Ant2	85.25	0.69	3.14
NVNT	ax20	5200	Ant3	84.99	0.71	3.15
NVNT	ax20	5240	Ant1	84.95	0.71	3.16
NVNT	ax20	5240	Ant2	85.22	0.69	3.15
NVNT	ax20	5240	Ant3	84.95	0.71	3.16
NVNT	ax40	5190	Ant1	85.09	0.7	3.18
NVNT	ax40	5190	Ant2	84.82	0.72	3.19
NVNT	ax40	5190	Ant3	85.09	0.7	3.18
NVNT	ax40	5230	Ant1	85.09	0.7	3.18
NVNT	ax40	5230	Ant2	84.82	0.72	3.19
NVNT	ax40	5230	Ant3	84.82	0.72	3.19
NVNT	ax80	5210	Ant1	84.18	0.75	3.36
NVNT	ax80	5210	Ant2	84.18	0.75	3.36
NVNT	ax80	5210	Ant3	84.46	0.73	3.34
NVNT	a	5260	Ant1	96.15	0.17	0.72
NVNT	a	5260	Ant2	96.15	0.17	0.72
NVNT	a	5260	Ant3	96.15	0.17	0.72
NVNT	a	5280	Ant1	96.15	0.17	0.72
NVNT	a	5280	Ant2	96.15	0.17	0.72
NVNT	a	5280	Ant3	96.21	0.17	0.72
NVNT	a	5320	Ant1	96.15	0.17	0.72
NVNT	a	5320	Ant2	96.15	0.17	0.72
NVNT	a	5320	Ant3	96.21	0.17	0.72
NVNT	n20	5260	Ant1	95.96	0.18	0.77
NVNT	n20	5260	Ant2	95.96	0.18	0.77
NVNT	n20	5260	Ant3	95.89	0.18	0.77
NVNT	n20	5280	Ant1	95.89	0.18	0.77
NVNT	n20	5280	Ant2	95.89	0.18	0.77
NVNT	n20	5280	Ant3	95.89	0.18	0.77
NVNT	n20	5320	Ant1	95.96	0.18	0.77
NVNT	n20	5320	Ant2	95.89	0.18	0.77
NVNT	n20	5320	Ant3	95.89	0.18	0.77
NVNT	n40	5270	Ant1	92.2	0.35	1.54
NVNT	n40	5270	Ant2	92.06	0.36	1.54
NVNT	n40	5270	Ant3	92.06	0.36	1.54
NVNT	n40	5310	Ant1	92.06	0.36	1.54
NVNT	n40	5310	Ant2	92.06	0.36	1.54
NVNT	n40	5310	Ant3	92.06	0.36	1.54
NVNT	ac20	5260	Ant1	95.99	0.18	0.76
NVNT	ac20	5260	Ant2	95.92	0.18	0.76
NVNT	ac20	5260	Ant3	95.92	0.18	0.76
NVNT	ac20	5280	Ant1	95.92	0.18	0.76
NVNT	ac20	5280	Ant2	95.99	0.18	0.76
NVNT	ac20	5280	Ant3	95.99	0.18	0.76
NVNT	ac20	5320	Ant1	95.92	0.18	0.76
NVNT	ac20	5320	Ant2	95.92	0.18	0.76
NVNT	ac20	5320	Ant3	95.92	0.18	0.76
NVNT	ac40	5270	Ant1	92.15	0.36	1.52
NVNT	ac40	5270	Ant2	92.29	0.35	1.52
NVNT	ac40	5270	Ant3	92.15	0.36	1.52
NVNT	ac40	5310	Ant1	92.15	0.36	1.52
NVNT	ac40	5310	Ant2	92.15	0.36	1.52
NVNT	ac40	5310	Ant3	92.16	0.35	1.52
NVNT	ac80	5290	Ant1	85.3	0.69	3.08

NVNT	ac80	5290	Ant2	85.3	0.69	3.08
NVNT	ac80	5290	Ant3	85.3	0.69	3.08
NVNT	ax80	5250	Ant1	84.46	0.73	3.34
NVNT	ax80	5250	Ant2	84.42	0.74	3.36
NVNT	ax80	5250	Ant3	84.42	0.74	3.36
NVNT	ax20	5260	Ant1	84.99	0.71	3.15
NVNT	ax20	5260	Ant2	94.83	0.23	0.97
NVNT	ax20	5260	Ant3	94.83	0.23	0.97
NVNT	ax20	5280	Ant1	84.99	0.71	3.15
NVNT	ax20	5280	Ant2	94.84	0.23	0.97
NVNT	ax20	5280	Ant3	94.84	0.23	0.97
NVNT	ax20	5320	Ant1	84.99	0.71	3.15
NVNT	ax20	5320	Ant2	94.83	0.23	0.97
NVNT	ax20	5320	Ant3	94.93	0.23	0.97
NVNT	ax40	5270	Ant1	84.82	0.72	3.19
NVNT	ax40	5270	Ant2	84.82	0.72	3.19
NVNT	ax40	5270	Ant3	84.82	0.72	3.19
NVNT	ax40	5310	Ant1	84.82	0.72	3.19
NVNT	ax40	5310	Ant2	84.86	0.71	3.18
NVNT	ax40	5310	Ant3	84.82	0.72	3.19
NVNT	ax80	5290	Ant1	84.46	0.73	3.34
NVNT	ax80	5290	Ant2	84.18	0.75	3.36
NVNT	ax80	5290	Ant3	84.18	0.75	3.36
NVNT	a	5500	Ant1	96.15	0.17	0.72
NVNT	a	5500	Ant2	96.21	0.17	0.72
NVNT	a	5500	Ant3	96.15	0.17	0.72
NVNT	a	5600	Ant1	96.15	0.17	0.72
NVNT	a	5600	Ant2	96.15	0.17	0.72
NVNT	a	5600	Ant3	96.15	0.17	0.72
NVNT	a	5700	Ant1	96.15	0.17	0.72
NVNT	a	5700	Ant2	96.15	0.17	0.72
NVNT	a	5700	Ant3	96.15	0.17	0.72
NVNT	n20	5500	Ant1	95.9	0.18	0.76
NVNT	n20	5500	Ant2	95.97	0.18	0.76
NVNT	n20	5500	Ant3	95.9	0.18	0.76
NVNT	n20	5600	Ant1	95.9	0.18	0.76
NVNT	n20	5600	Ant2	95.97	0.18	0.76
NVNT	n20	5600	Ant3	95.9	0.18	0.76
NVNT	n20	5700	Ant1	95.9	0.18	0.76
NVNT	n20	5700	Ant2	95.97	0.18	0.76
NVNT	n20	5700	Ant3	95.9	0.18	0.76
NVNT	n40	5510	Ant1	92.06	0.36	1.54
NVNT	n40	5510	Ant2	92.06	0.36	1.54
NVNT	n40	5510	Ant3	92.06	0.36	1.54
NVNT	n40	5590	Ant1	92.2	0.35	1.54
NVNT	n40	5590	Ant2	92.06	0.36	1.54
NVNT	n40	5590	Ant3	92.2	0.35	1.54
NVNT	n40	5670	Ant1	92.2	0.35	1.54
NVNT	n40	5670	Ant2	92.2	0.35	1.54
NVNT	n40	5670	Ant3	92.06	0.36	1.54
NVNT	ac20	5500	Ant1	95.92	0.18	0.76
NVNT	ac20	5500	Ant2	95.92	0.18	0.76
NVNT	ac20	5500	Ant3	95.99	0.18	0.76
NVNT	ac20	5600	Ant1	95.92	0.18	0.76
NVNT	ac20	5600	Ant2	95.99	0.18	0.76

NVNT	ac20	5600	Ant3	95.92	0.18	0.76
NVNT	ac20	5700	Ant1	95.92	0.18	0.76
NVNT	ac20	5700	Ant2	95.99	0.18	0.76
NVNT	ac20	5700	Ant3	95.99	0.18	0.76
NVNT	ac40	5510	Ant1	92.28	0.35	1.52
NVNT	ac40	5510	Ant2	92.29	0.35	1.52
NVNT	ac40	5510	Ant3	92.15	0.36	1.52
NVNT	ac40	5590	Ant1	92.29	0.35	1.52
NVNT	ac40	5590	Ant2	92.29	0.35	1.52
NVNT	ac40	5590	Ant3	92.28	0.35	1.52
NVNT	ac40	5670	Ant1	92.15	0.36	1.52
NVNT	ac40	5670	Ant2	92.29	0.35	1.52
NVNT	ac40	5670	Ant3	92.29	0.35	1.52
NVNT	ac80	5530	Ant1	85.3	0.69	3.08
NVNT	ac80	5530	Ant2	85.53	0.68	3.08
NVNT	ac80	5530	Ant3	85.56	0.68	3.07
NVNT	ac80	5610	Ant1	85.3	0.69	3.08
NVNT	ac80	5610	Ant2	85.3	0.69	3.08
NVNT	ac80	5610	Ant3	85.3	0.69	3.08
NVNT	ax160	5570	Ant1	84.42	0.74	3.36
NVNT	ax160	5570	Ant2	84.18	0.75	3.36
NVNT	ax160	5570	Ant3	84.18	0.75	3.36
NVNT	ax20	5500	Ant1	84.99	0.71	3.15
NVNT	ax20	5500	Ant2	84.99	0.71	3.15
NVNT	ax20	5500	Ant3	84.99	0.71	3.15
NVNT	ax20	5600	Ant1	84.99	0.71	3.15
NVNT	ax20	5600	Ant2	84.99	0.71	3.15
NVNT	ax20	5600	Ant3	85.25	0.69	3.14
NVNT	ax20	5700	Ant1	84.99	0.71	3.15
NVNT	ax20	5700	Ant2	84.99	0.71	3.15
NVNT	ax20	5700	Ant3	85.25	0.69	3.14
NVNT	ax40	5510	Ant1	84.82	0.72	3.19
NVNT	ax40	5510	Ant2	84.82	0.72	3.19
NVNT	ax40	5510	Ant3	84.82	0.72	3.19
NVNT	ax40	5590	Ant1	84.86	0.71	3.18
NVNT	ax40	5590	Ant2	85.09	0.7	3.18
NVNT	ax40	5590	Ant3	84.82	0.72	3.19
NVNT	ax40	5670	Ant1	85.09	0.7	3.18
NVNT	ax40	5670	Ant2	85.05	0.7	3.19
NVNT	ax40	5670	Ant3	84.82	0.72	3.19
NVNT	ax80	5530	Ant1	84.18	0.75	3.36
NVNT	ax80	5530	Ant2	84.46	0.73	3.34
NVNT	ax80	5530	Ant3	99.3	0	3.53
NVNT	ax80	5610	Ant1	84.46	0.73	3.34
NVNT	ax80	5610	Ant2	84.46	0.73	3.34
NVNT	ax80	5610	Ant3	84.18	0.75	3.36
NVNT	a	5745	Ant1	98.01	0	0.36
NVNT	a	5745	Ant2	98.01	0	0.36
NVNT	a	5745	Ant3	98.01	0	0.36
NVNT	a	5785	Ant1	98.01	0	0.36
NVNT	a	5785	Ant2	98.01	0	0.36
NVNT	a	5785	Ant3	98.01	0	0.36
NVNT	a	5825	Ant1	98.01	0	0.36
NVNT	a	5825	Ant2	97.98	0.09	0.36
NVNT	a	5825	Ant3	98.01	0	0.36

NVNT	n20	5745	Ant1	95.89	0.18	0.77
NVNT	n20	5745	Ant2	95.89	0.18	0.77
NVNT	n20	5745	Ant3	95.81	0.19	0.77
NVNT	n20	5785	Ant1	95.89	0.18	0.77
NVNT	n20	5785	Ant2	95.89	0.18	0.77
NVNT	n20	5785	Ant3	95.89	0.18	0.77
NVNT	n20	5825	Ant1	95.81	0.19	0.77
NVNT	n20	5825	Ant2	95.89	0.18	0.77
NVNT	n20	5825	Ant3	95.89	0.18	0.77
NVNT	n40	5755	Ant1	92.2	0.35	1.54
NVNT	n40	5755	Ant2	92.19	0.35	1.54
NVNT	n40	5755	Ant3	92.2	0.35	1.54
NVNT	n40	5795	Ant1	92.2	0.35	1.54
NVNT	n40	5795	Ant2	92.06	0.36	1.54
NVNT	n40	5795	Ant3	92.06	0.36	1.54
NVNT	ac20	5745	Ant1	95.92	0.18	0.76
NVNT	ac20	5745	Ant2	95.92	0.18	0.76
NVNT	ac20	5745	Ant3	95.92	0.18	0.76
NVNT	ac20	5785	Ant1	95.92	0.18	0.76
NVNT	ac20	5785	Ant2	95.92	0.18	0.76
NVNT	ac20	5785	Ant3	95.92	0.18	0.76
NVNT	ac20	5825	Ant1	95.92	0.18	0.76
NVNT	ac20	5825	Ant2	95.92	0.18	0.76
NVNT	ac20	5825	Ant3	95.85	0.18	0.76
NVNT	ac40	5755	Ant1	92.15	0.36	1.52
NVNT	ac40	5755	Ant2	92.16	0.35	1.52
NVNT	ac40	5755	Ant3	92.29	0.35	1.52
NVNT	ac40	5795	Ant1	92.29	0.35	1.52
NVNT	ac40	5795	Ant2	92.15	0.36	1.52
NVNT	ac40	5795	Ant3	92.15	0.36	1.52
NVNT	ac80	5775	Ant1	85.56	0.68	3.07
NVNT	ac80	5775	Ant2	85.56	0.68	3.07
NVNT	ac80	5775	Ant3	85.53	0.68	3.08
NVNT	ax20	5745	Ant1	84.99	0.71	3.15
NVNT	ax20	5745	Ant2	84.99	0.71	3.15
NVNT	ax20	5745	Ant3	84.99	0.71	3.15
NVNT	ax20	5785	Ant1	84.99	0.71	3.15
NVNT	ax20	5785	Ant2	84.95	0.71	3.16
NVNT	ax20	5785	Ant3	84.99	0.71	3.15
NVNT	ax20	5825	Ant1	84.99	0.71	3.15
NVNT	ax20	5825	Ant2	84.76	0.72	3.15
NVNT	ax20	5825	Ant3	84.99	0.71	3.15
NVNT	ax40	5755	Ant1	84.82	0.72	3.19
NVNT	ax40	5755	Ant2	84.82	0.72	3.19
NVNT	ax40	5755	Ant3	84.82	0.72	3.19
NVNT	ax40	5795	Ant1	84.82	0.72	3.19
NVNT	ax40	5795	Ant2	85.09	0.7	3.18
NVNT	ax40	5795	Ant3	85.09	0.7	3.18
NVNT	ax80	5775	Ant1	84.46	0.73	3.34
NVNT	ax80	5775	Ant2	84.18	0.75	3.36
NVNT	ax80	5775	Ant3	84.46	0.73	3.34

----- The following blanks -----

