




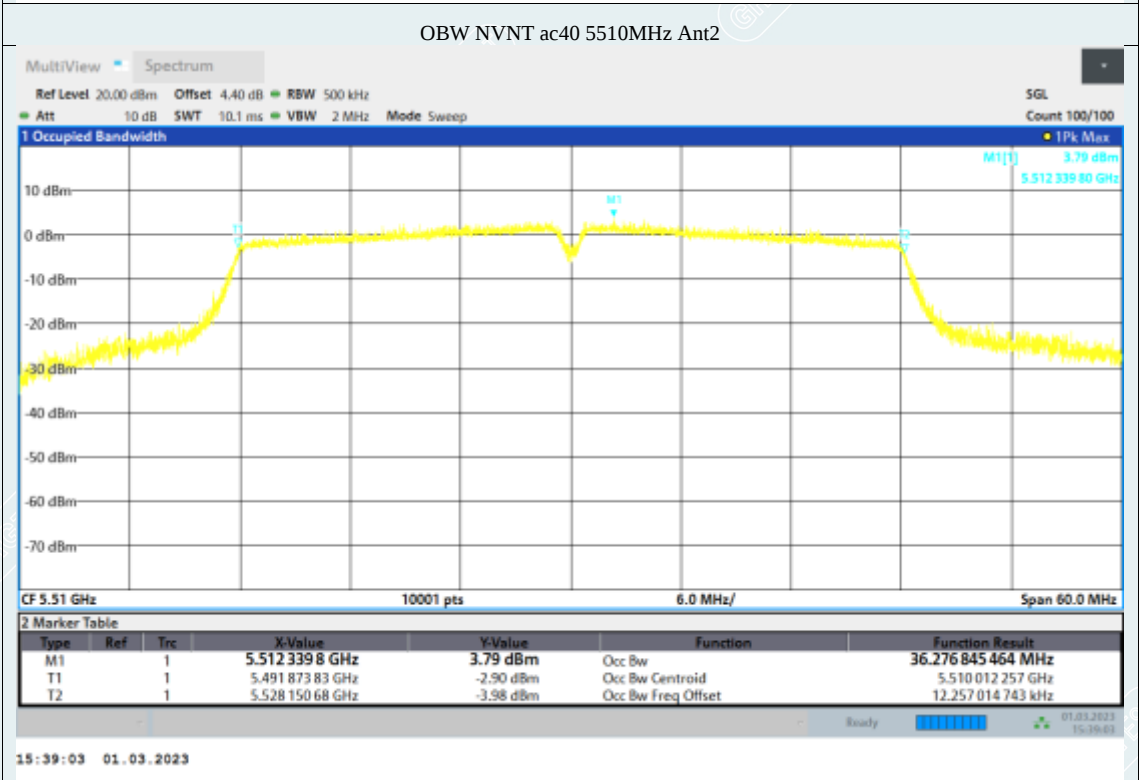
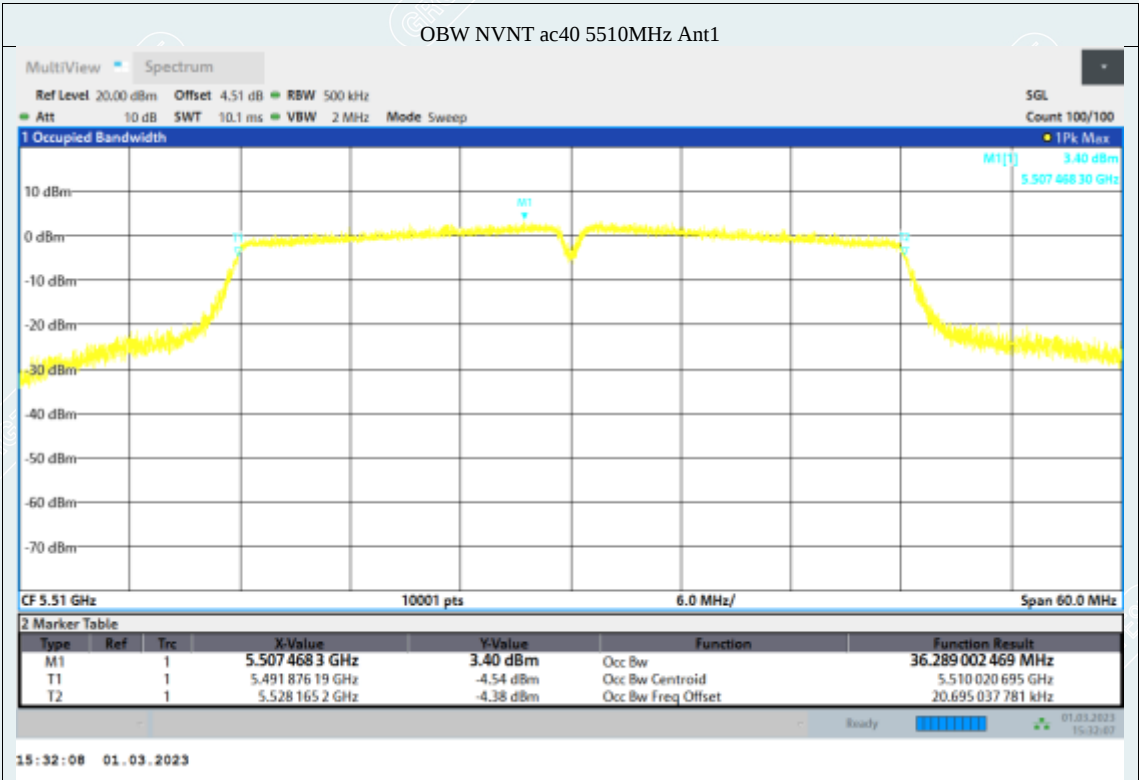
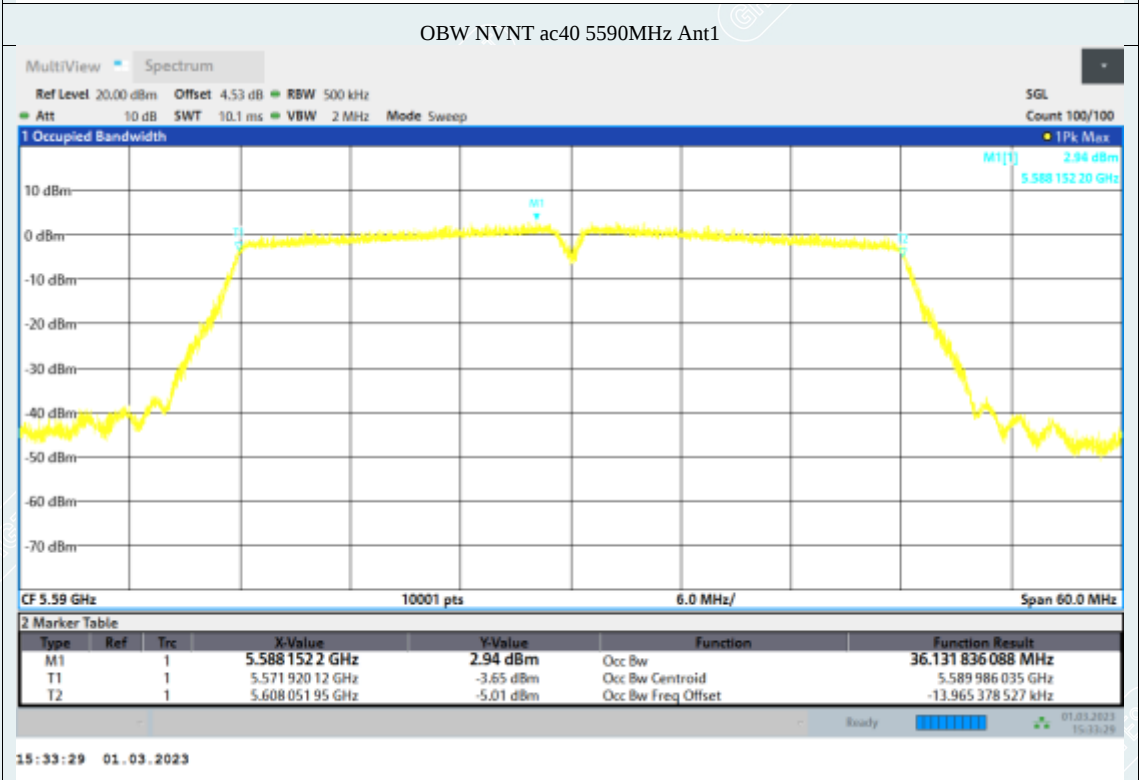
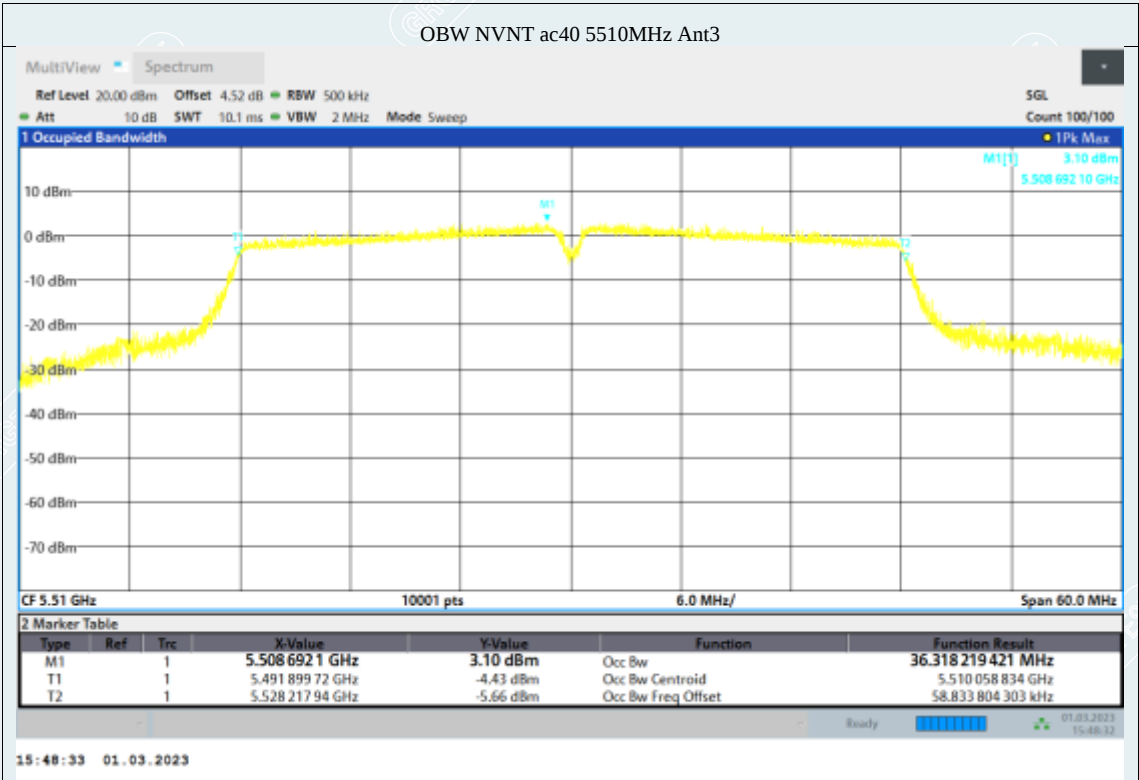
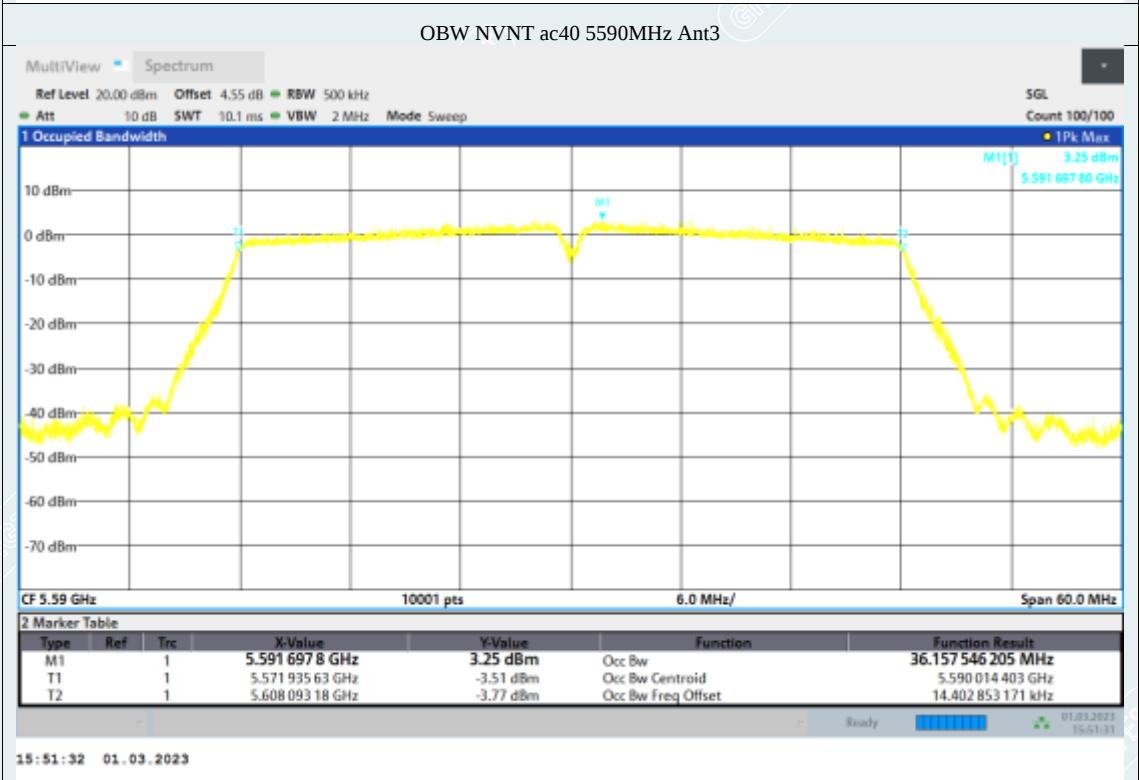



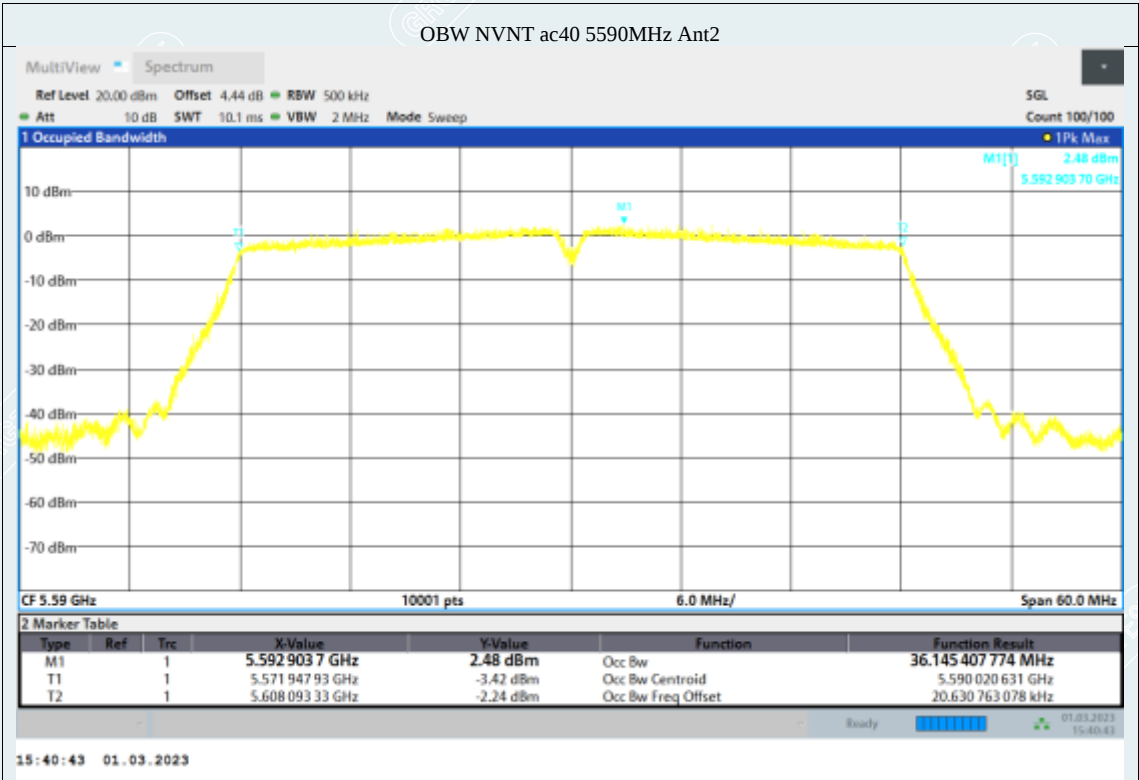



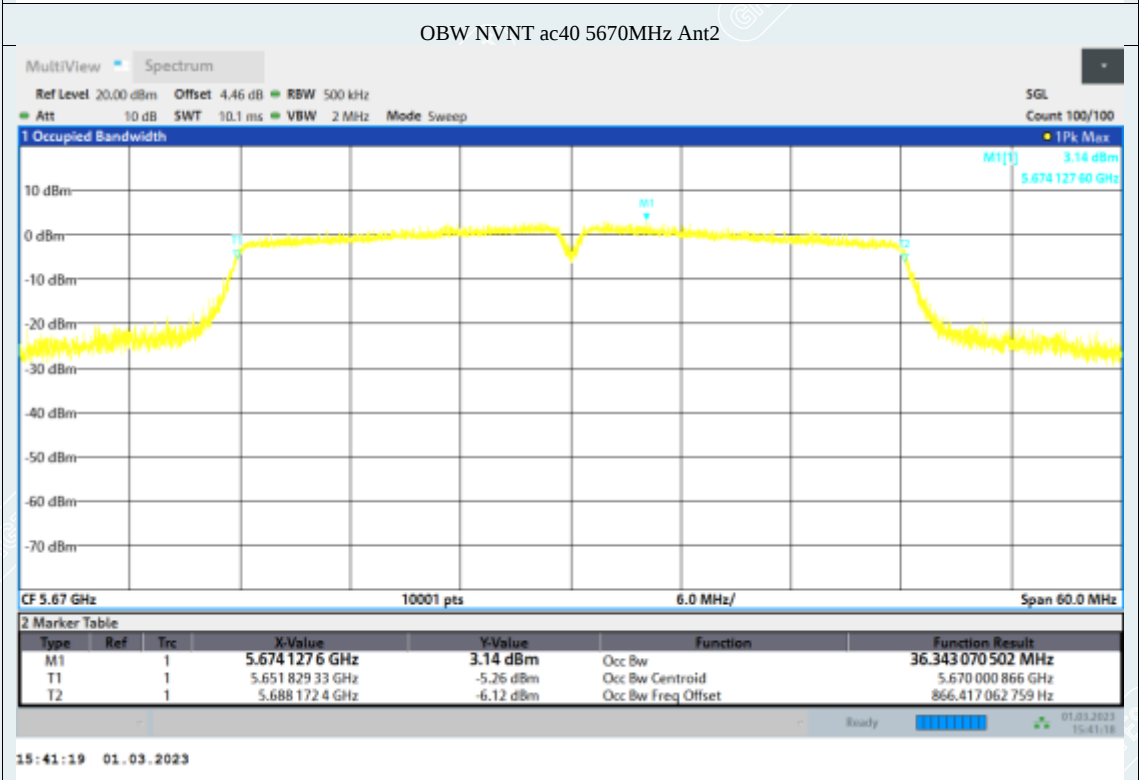



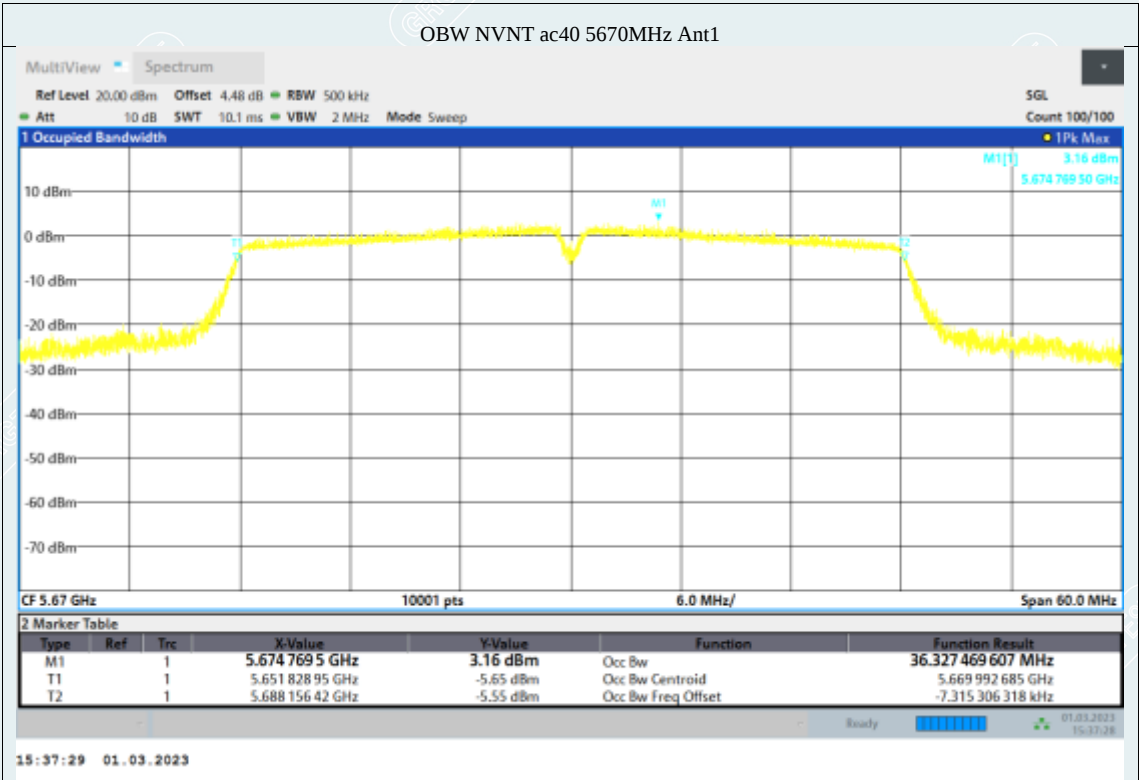



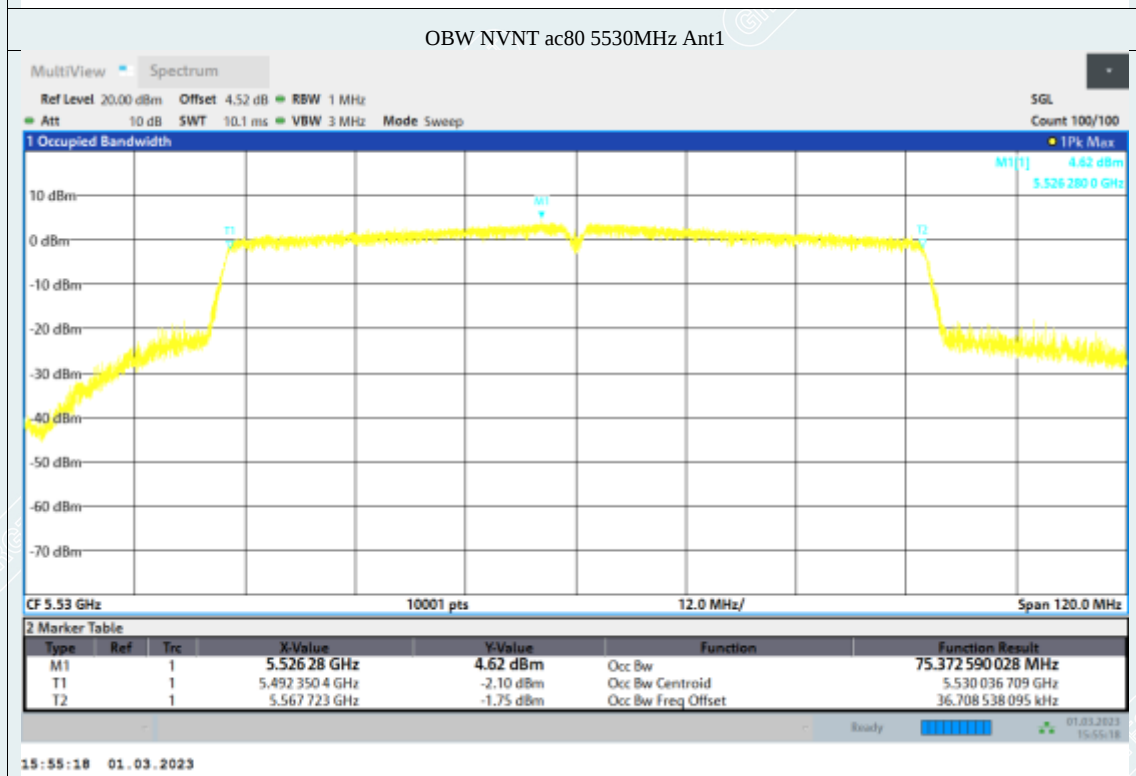



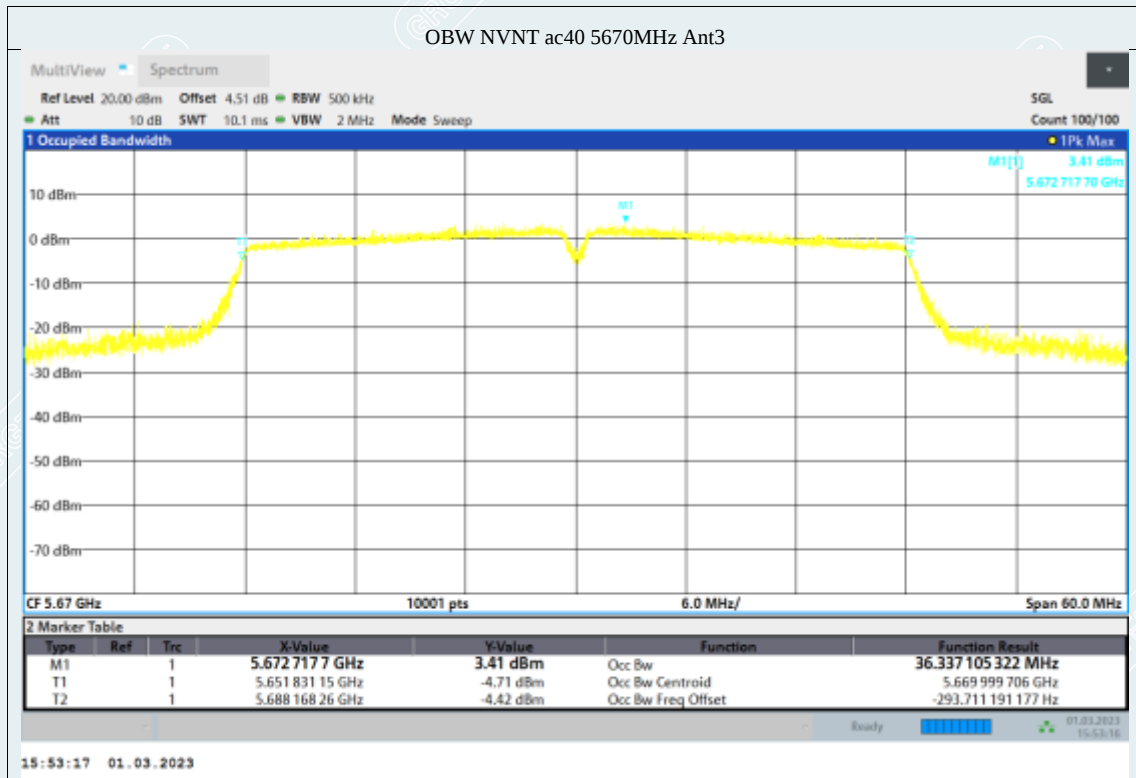


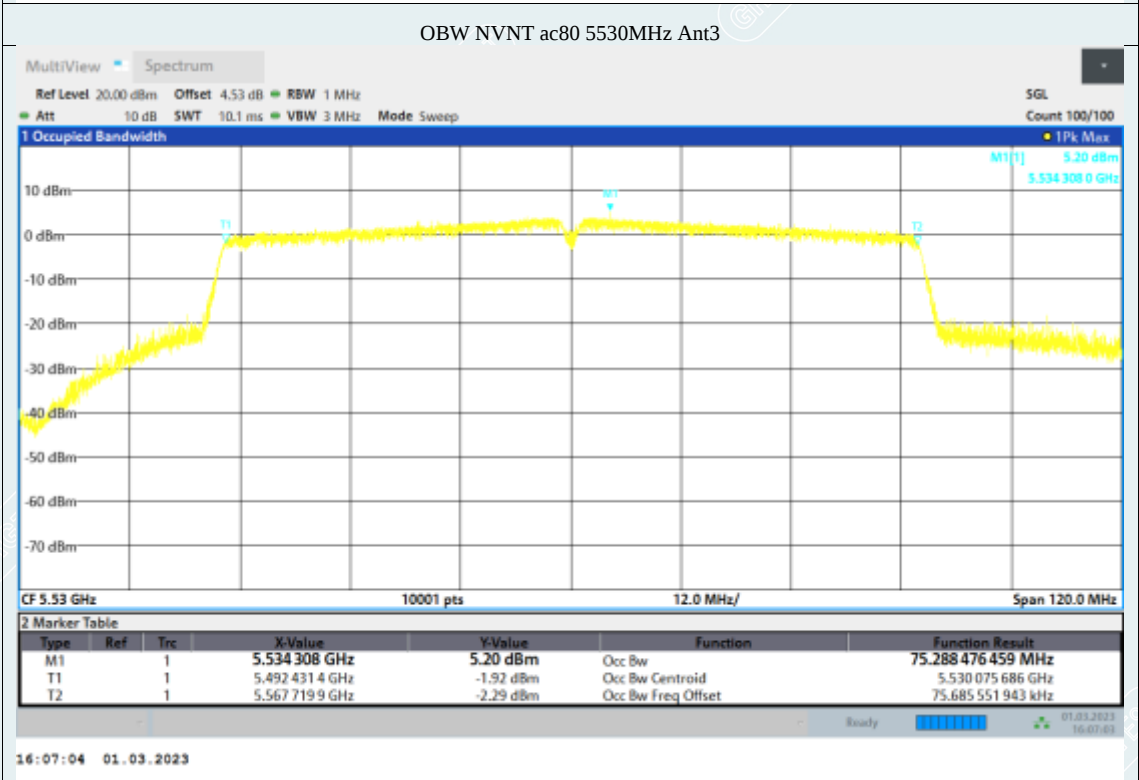
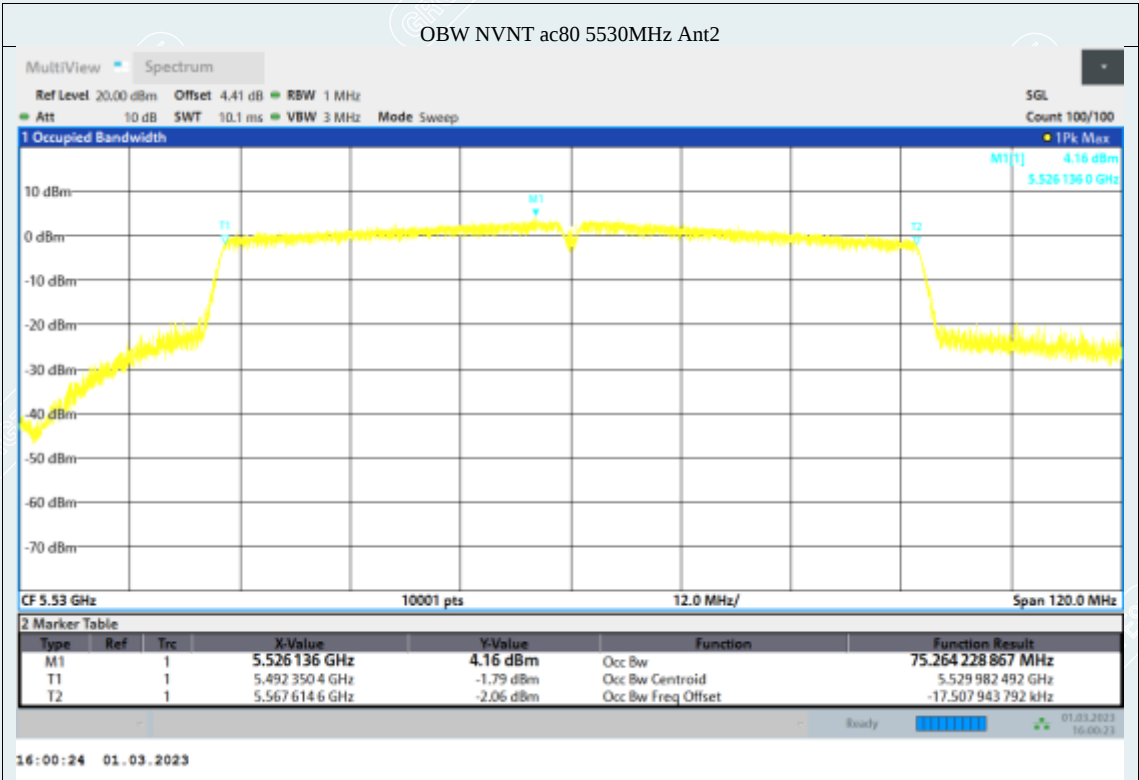


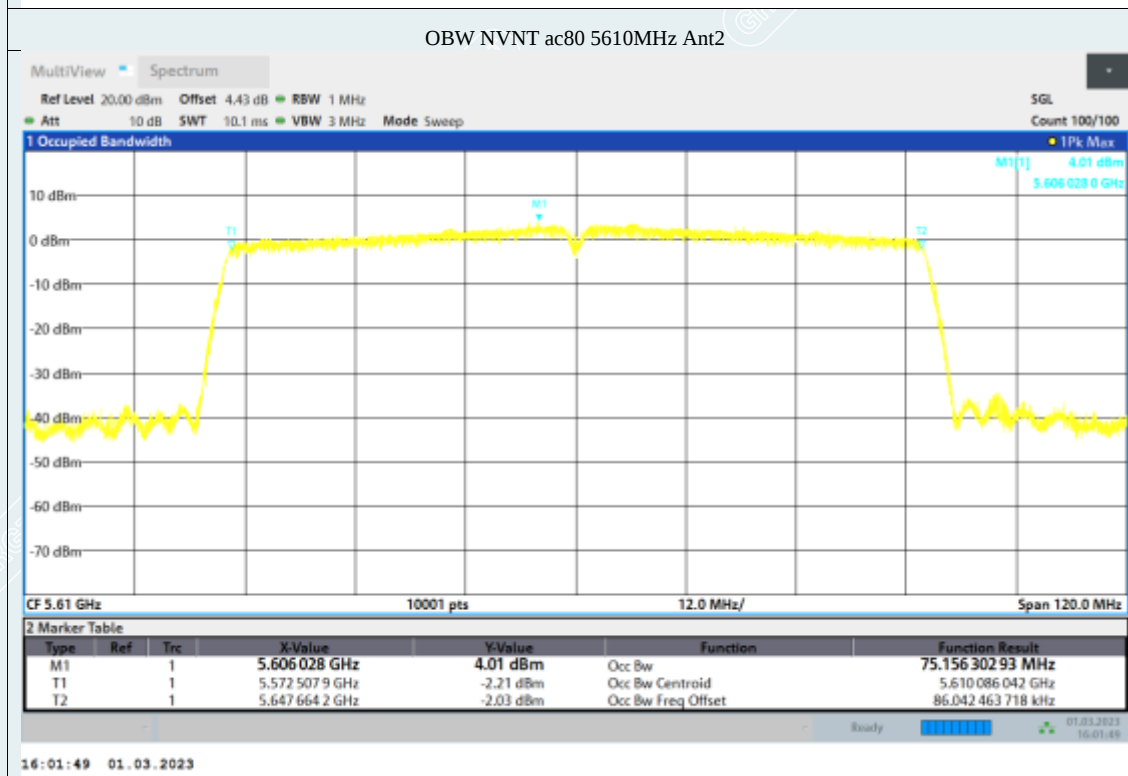
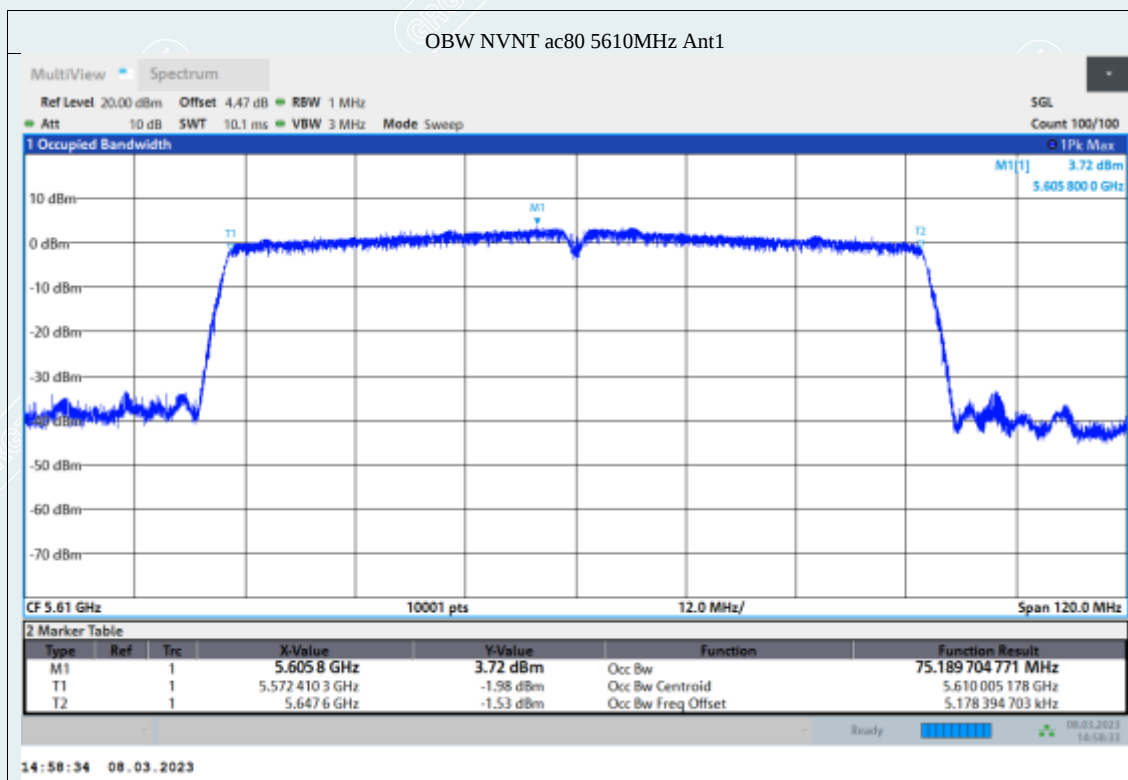


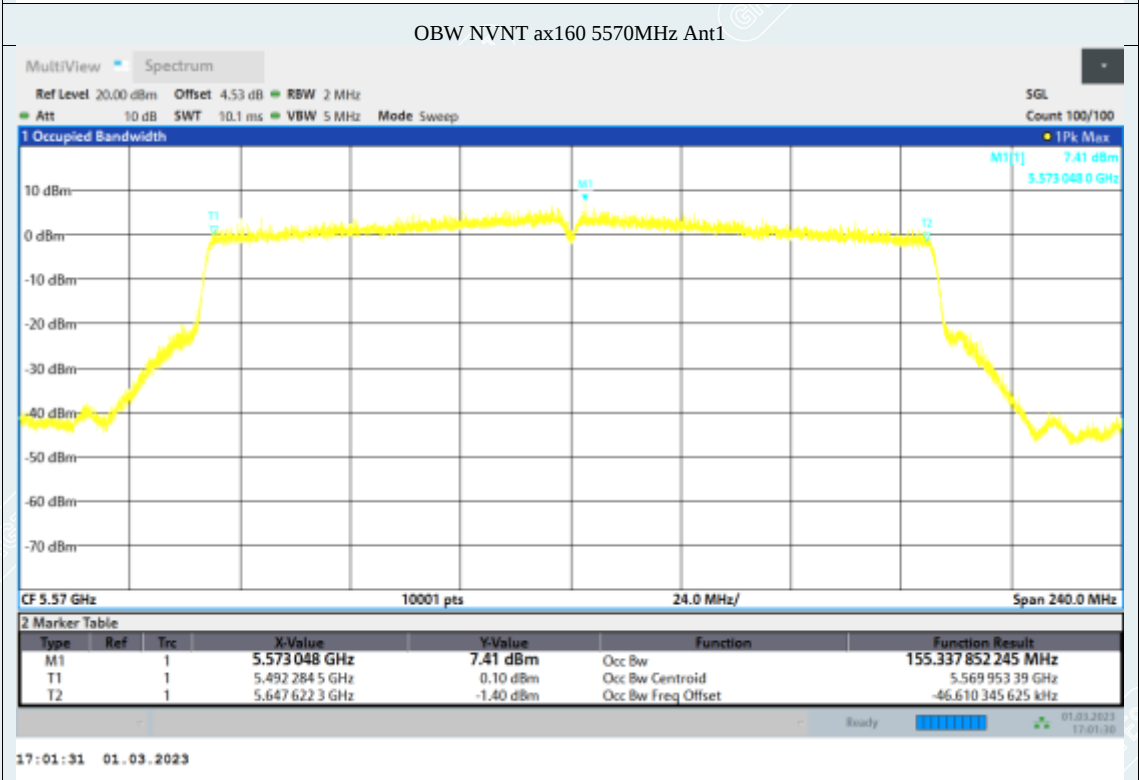
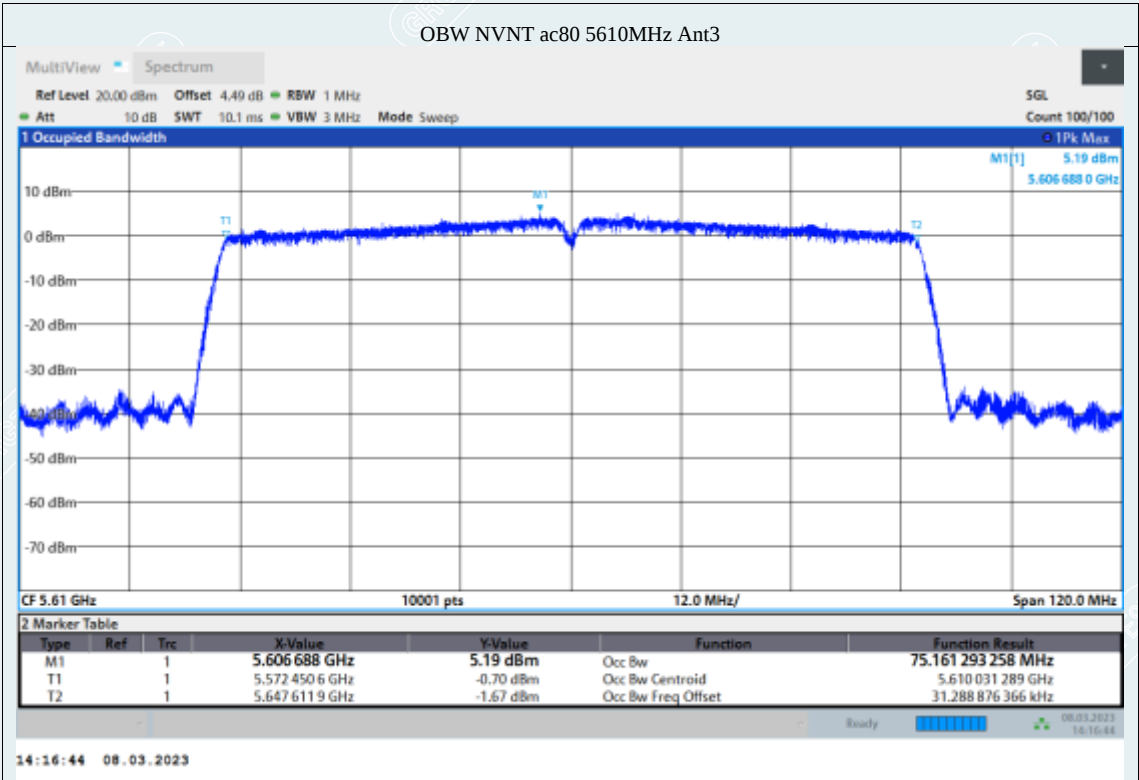


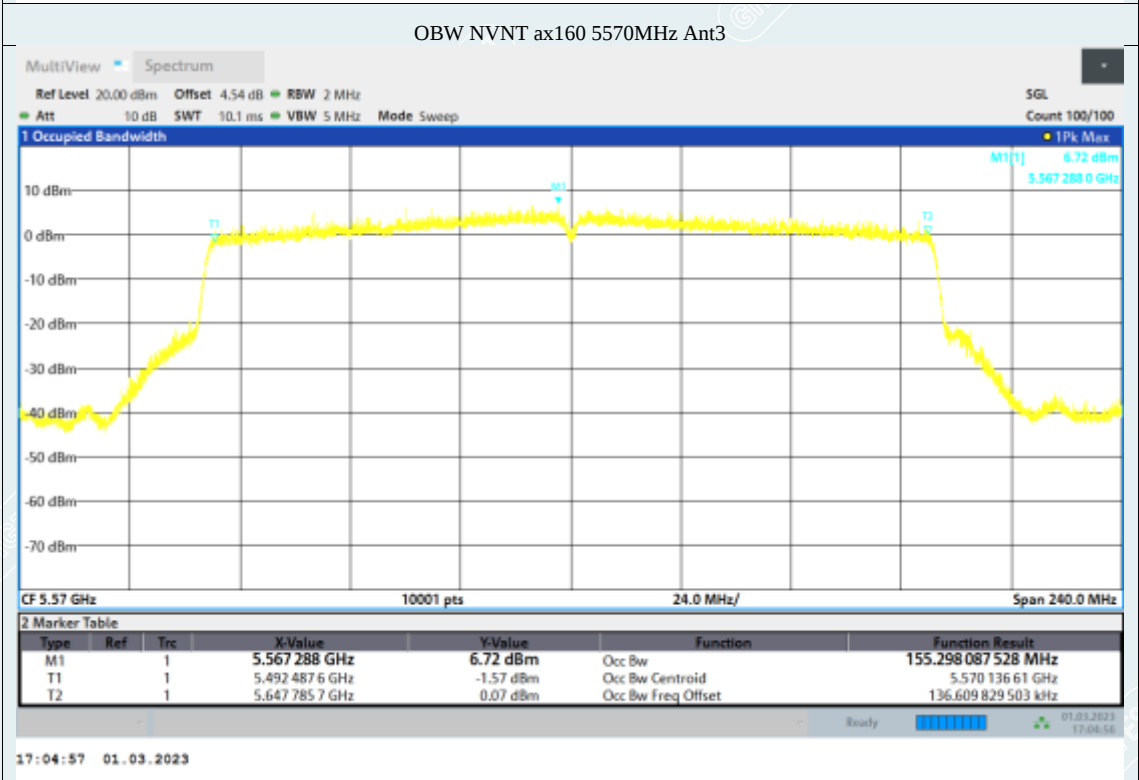
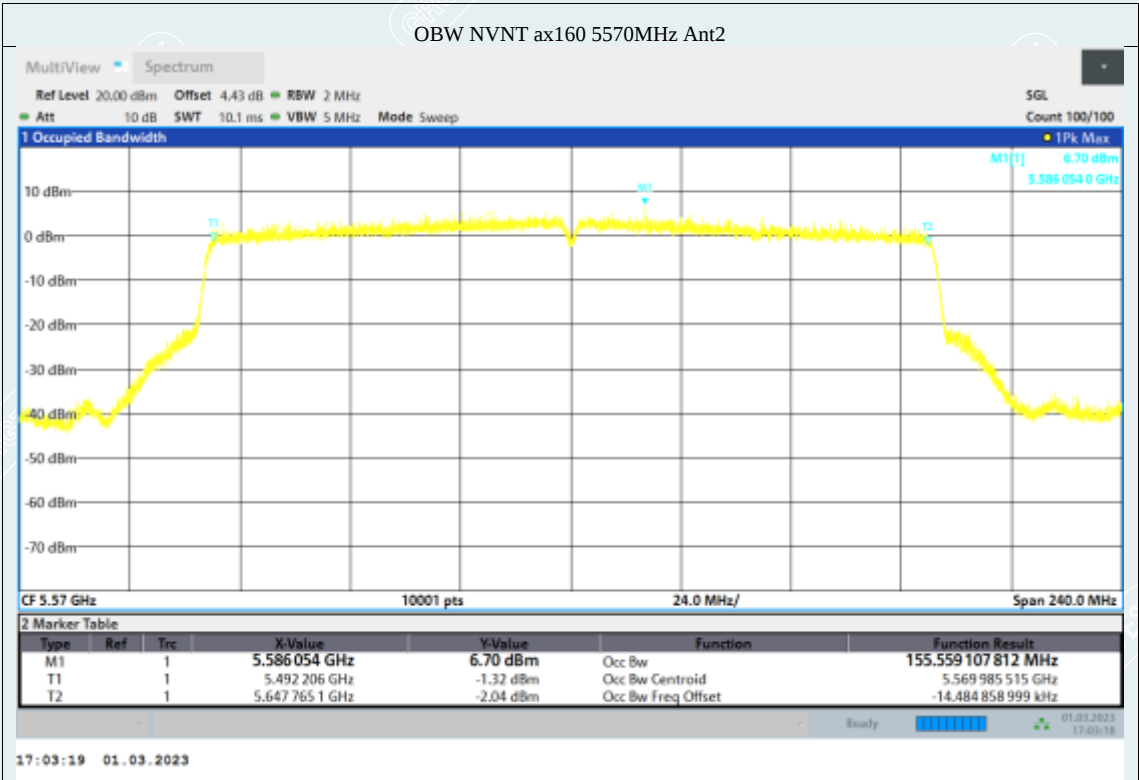


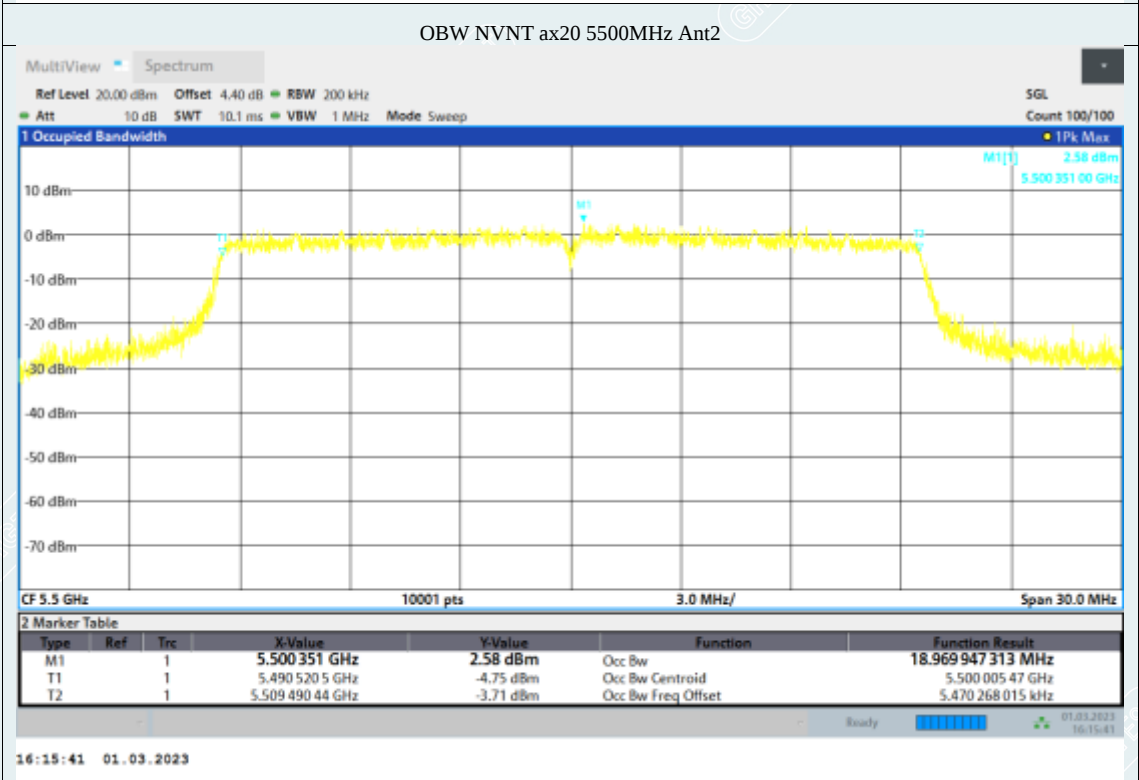
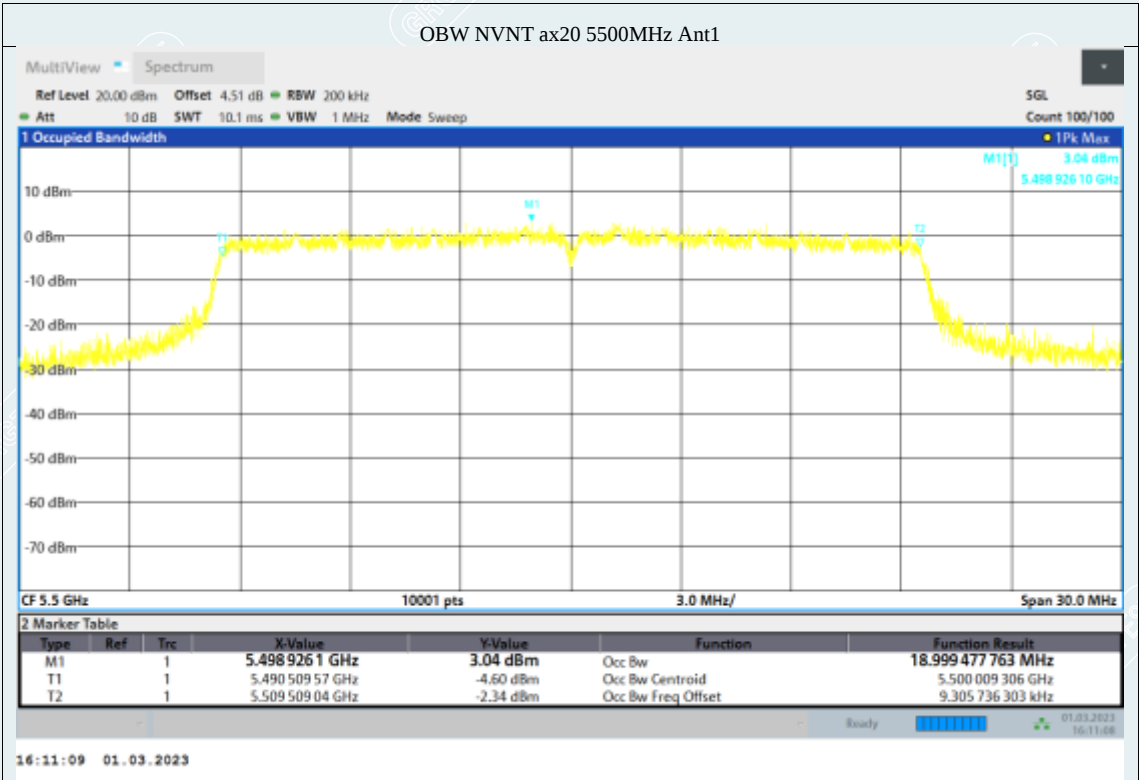


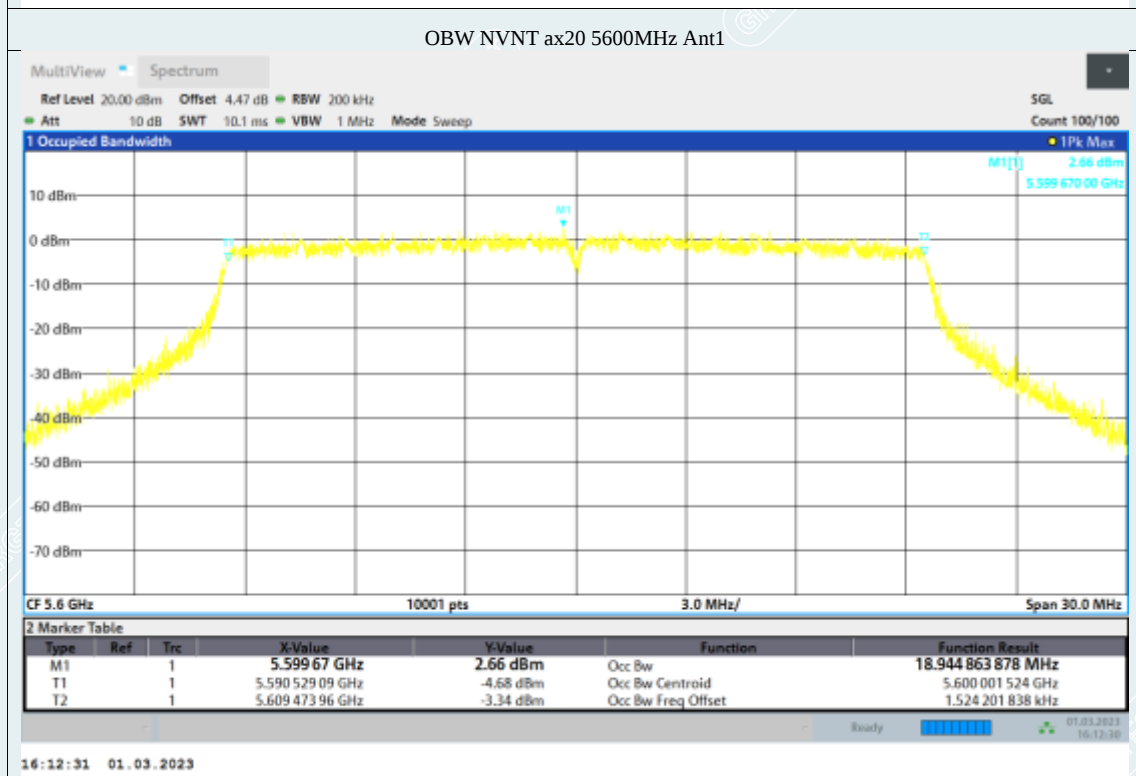
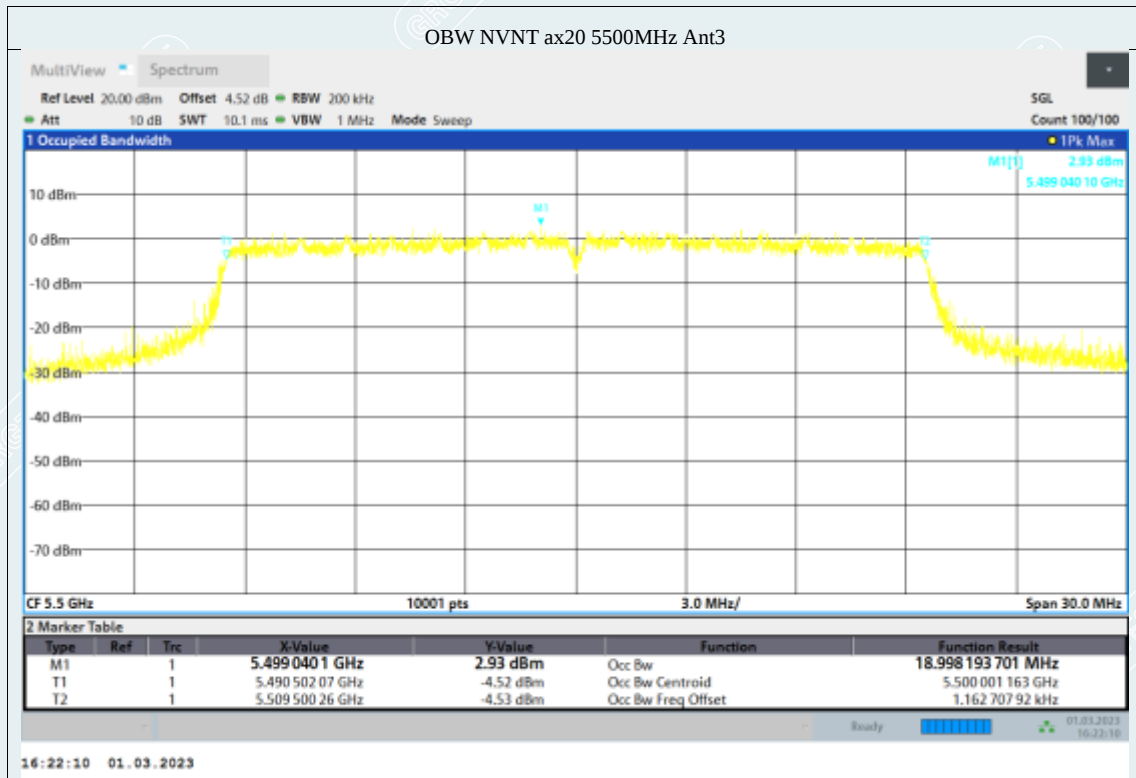


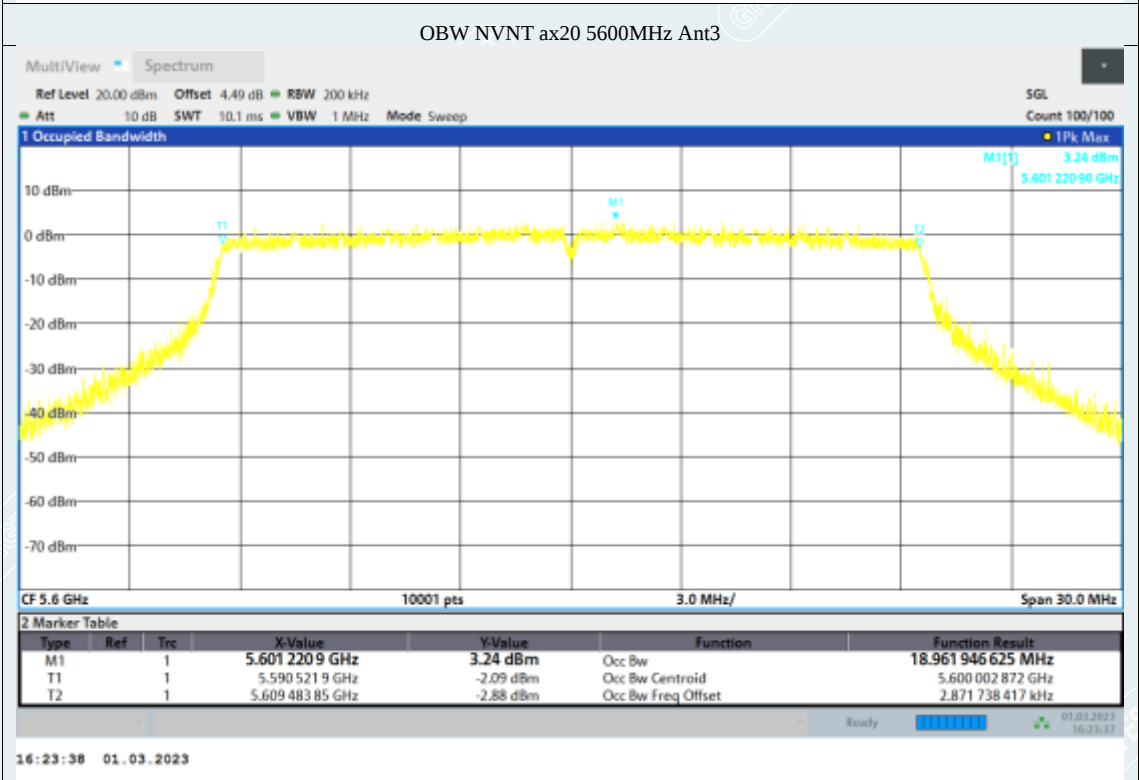
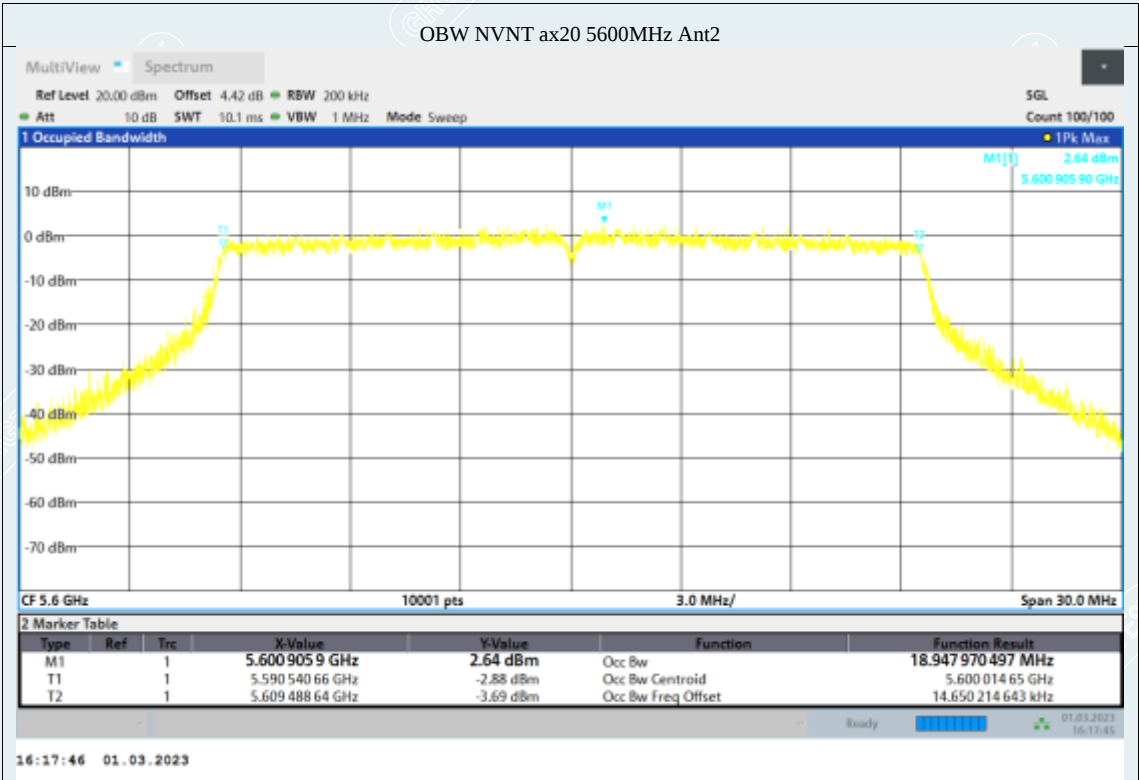


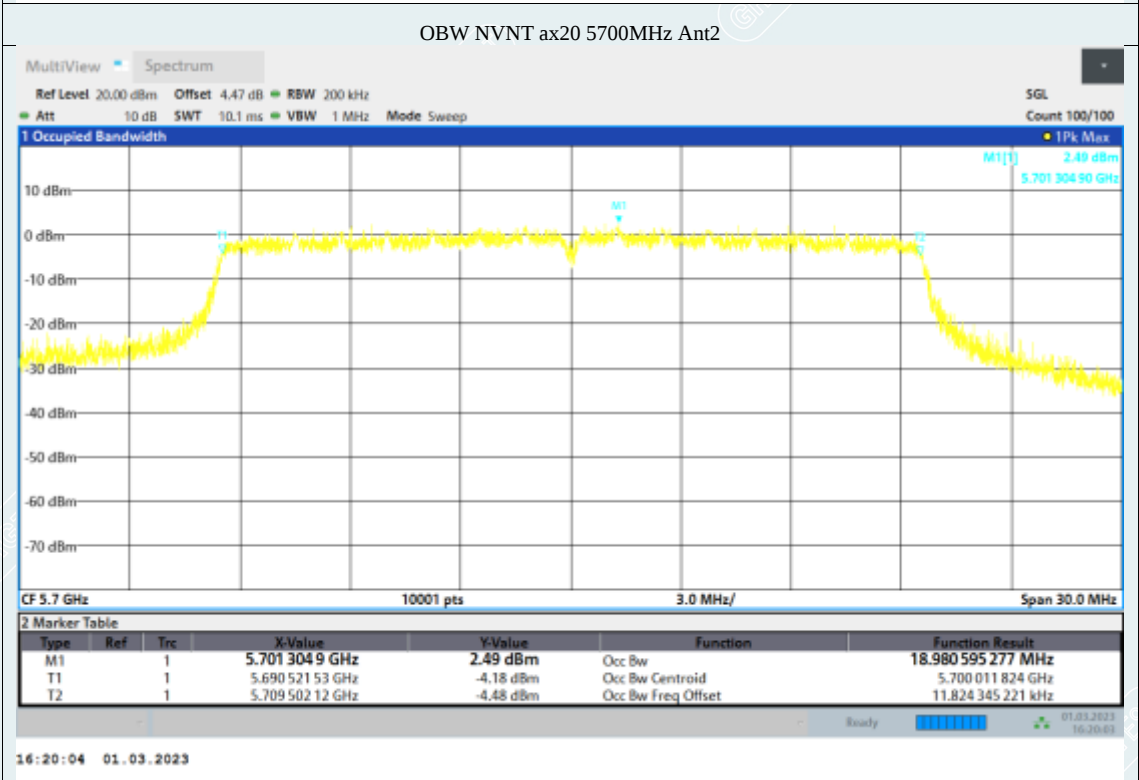
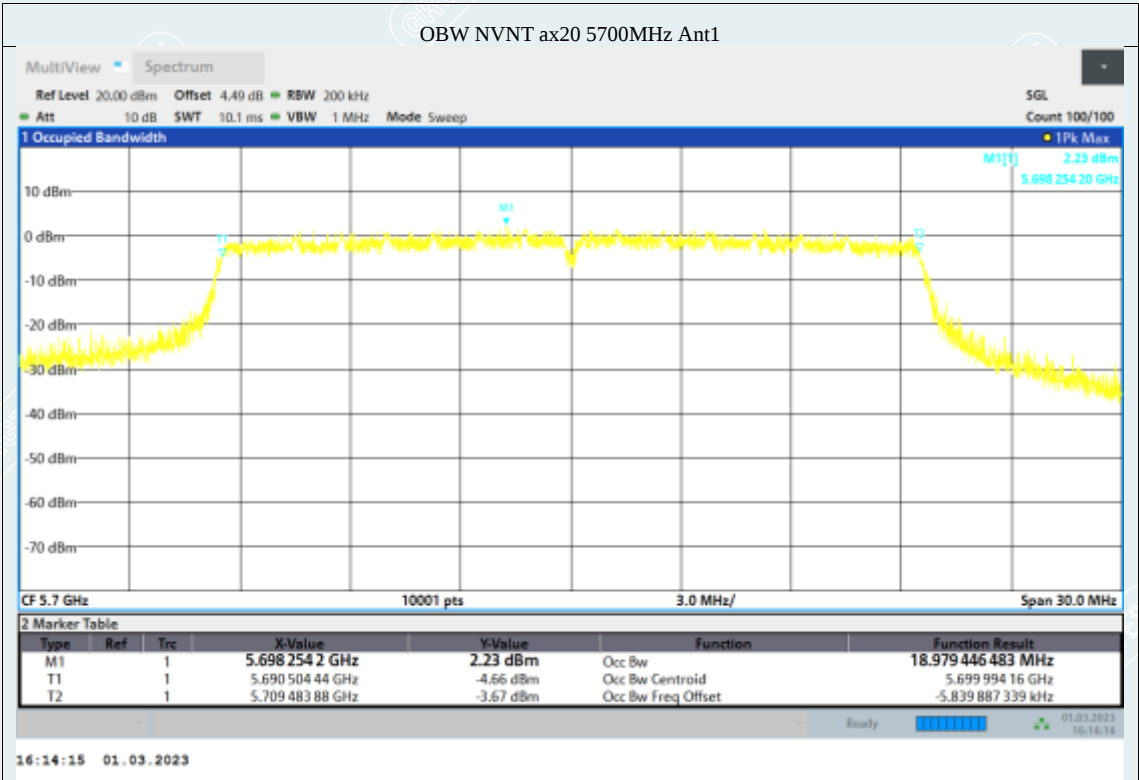


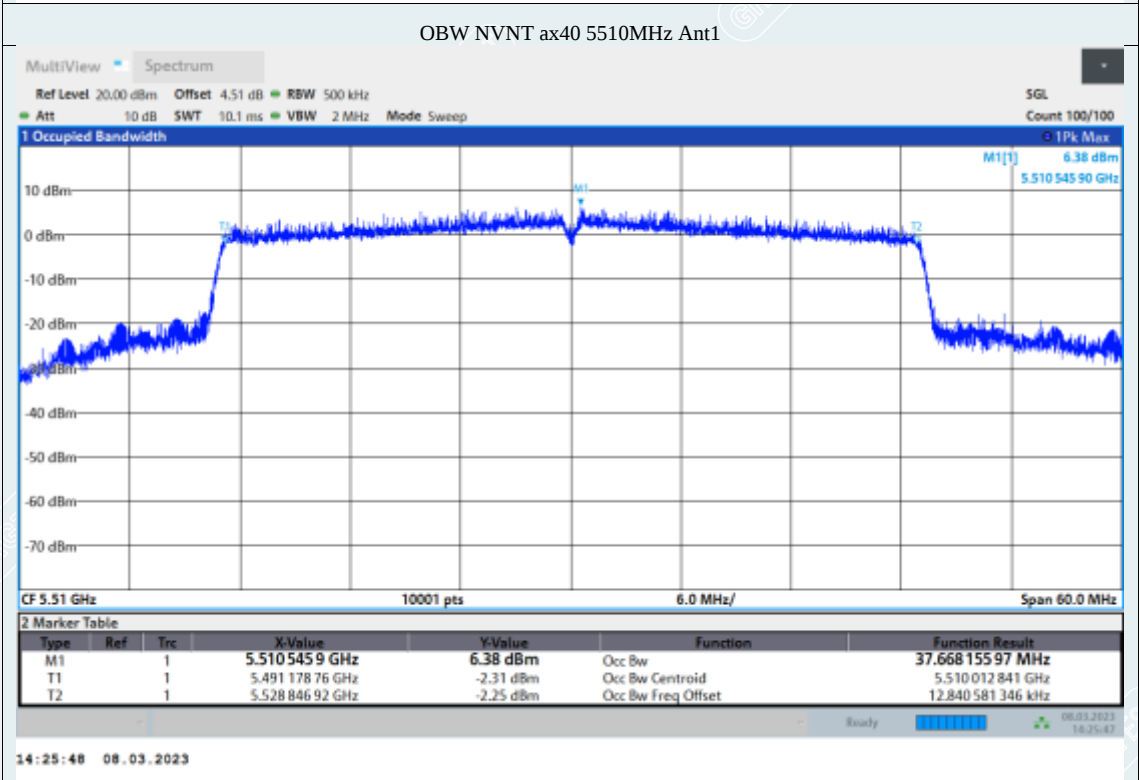
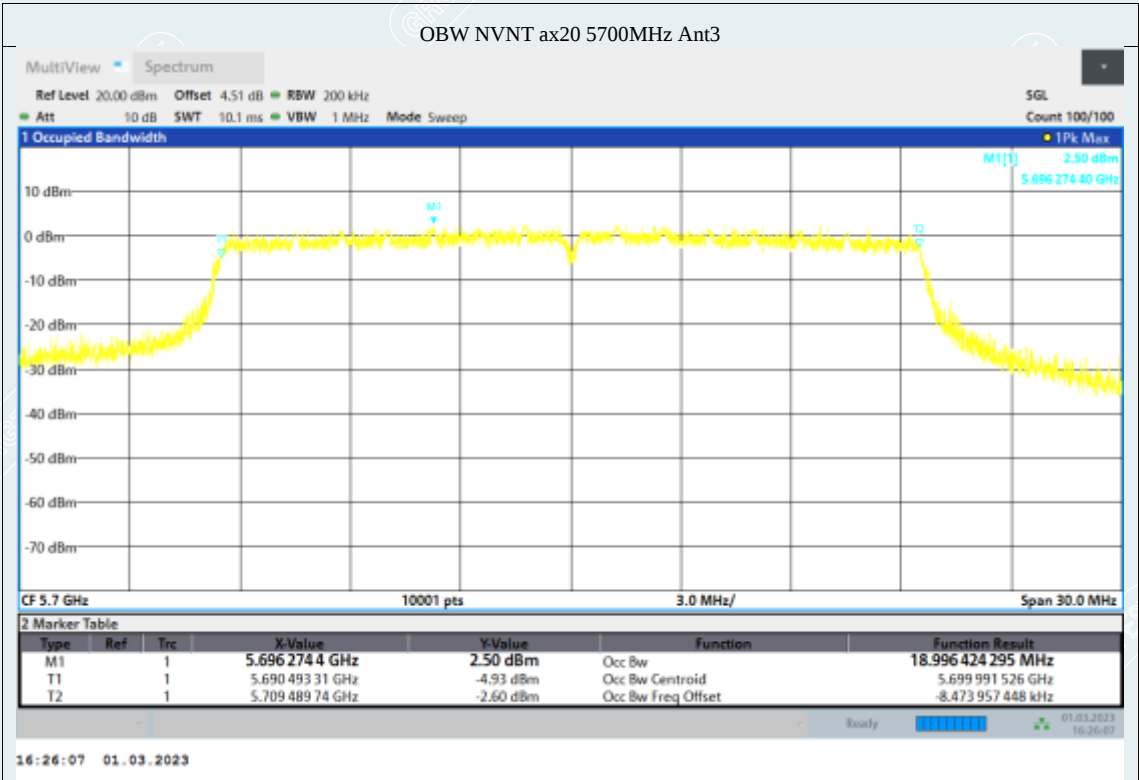


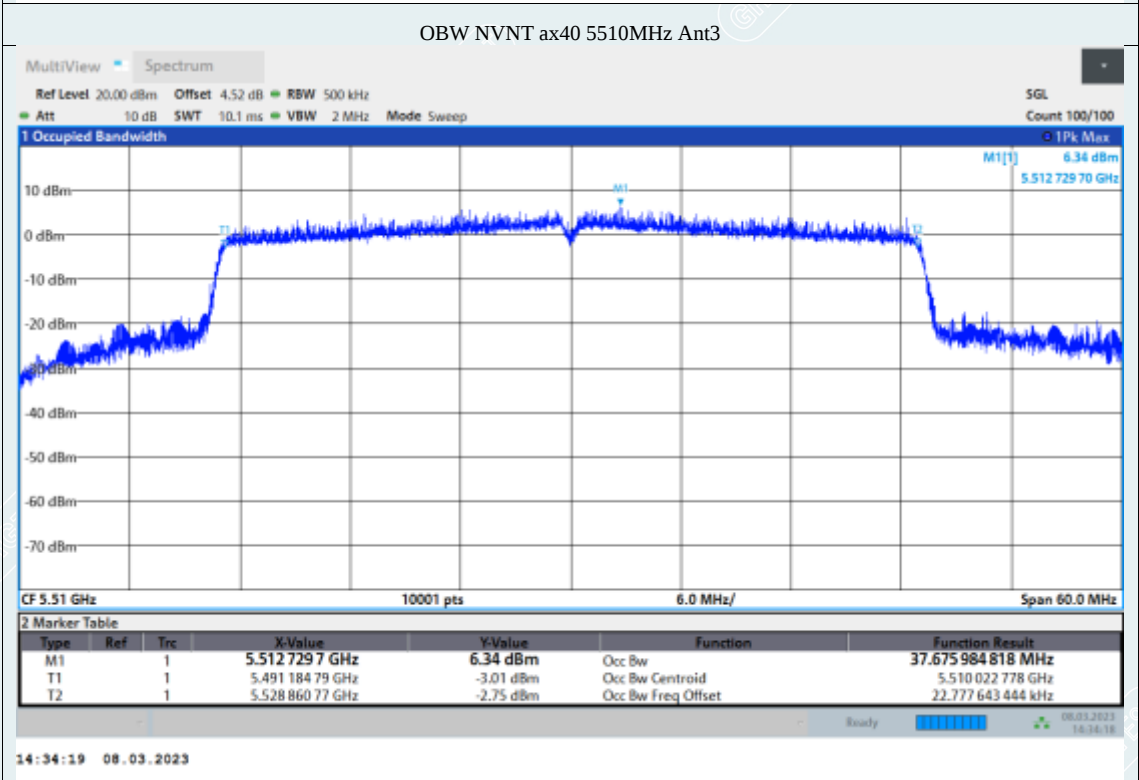
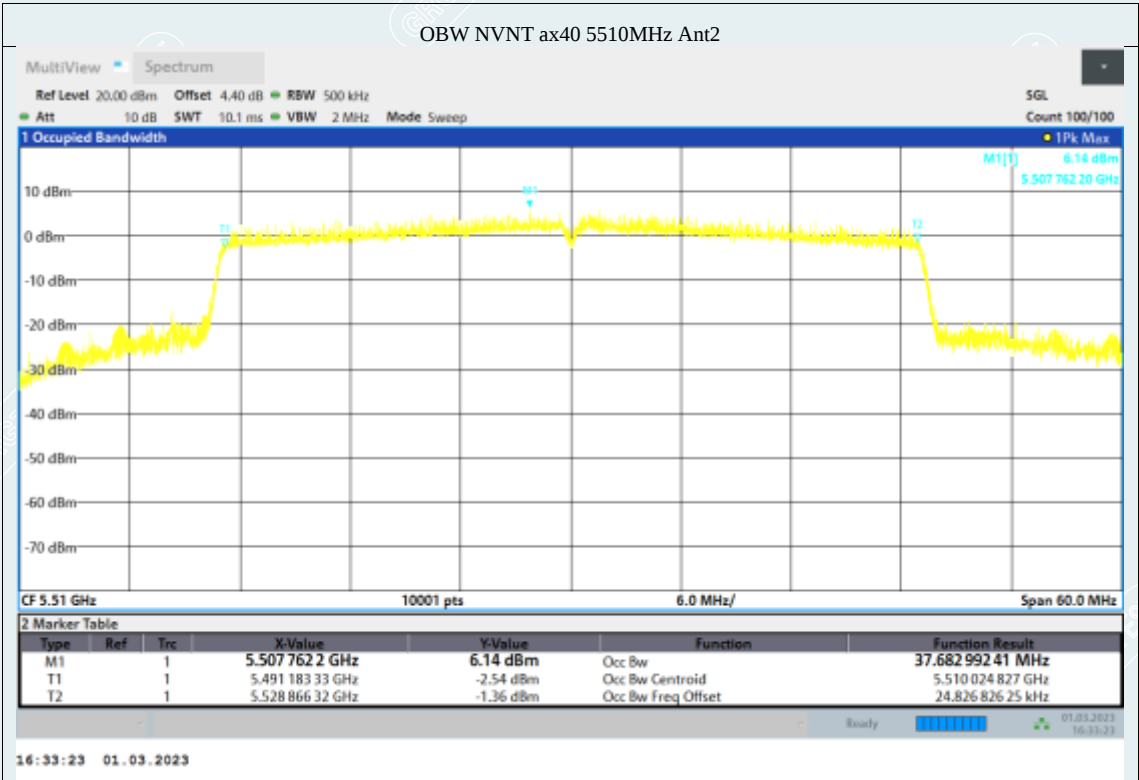


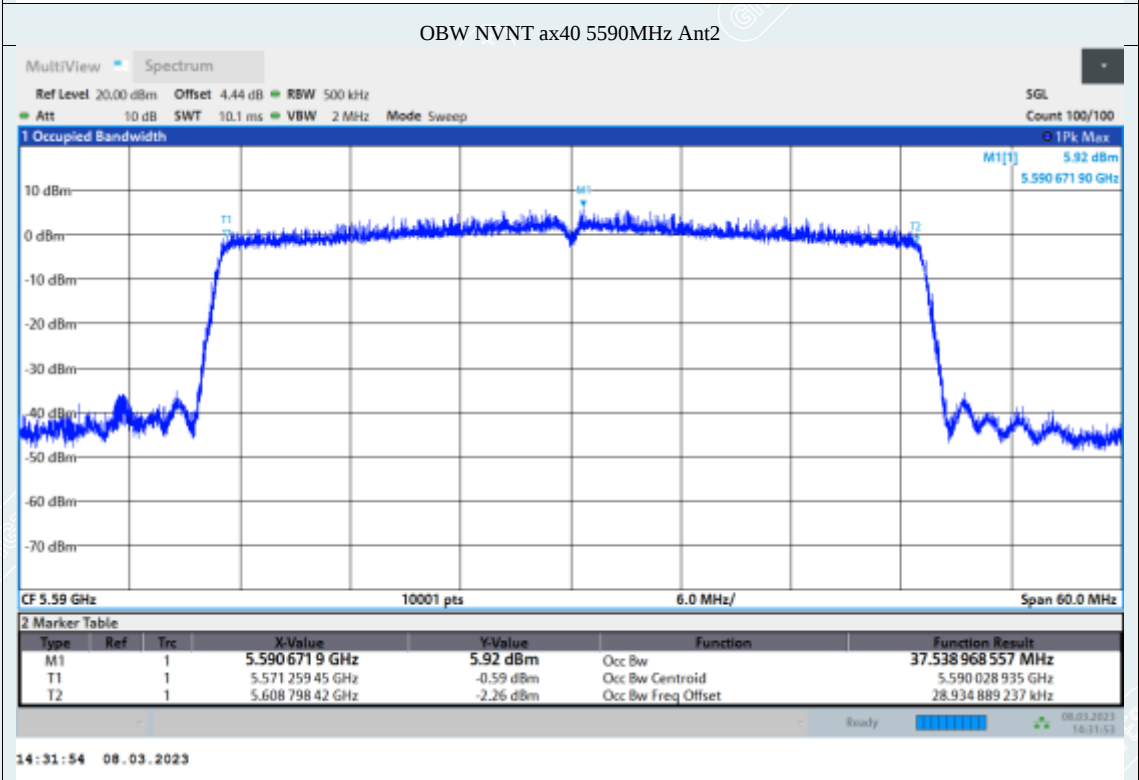
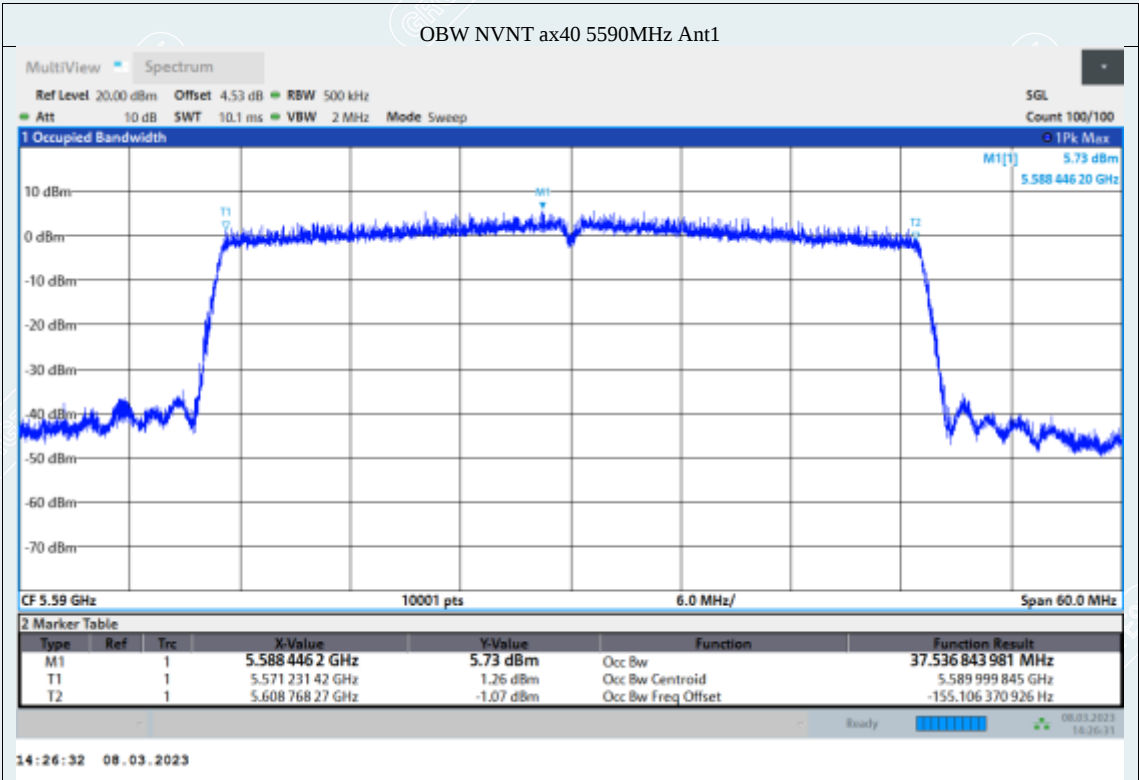


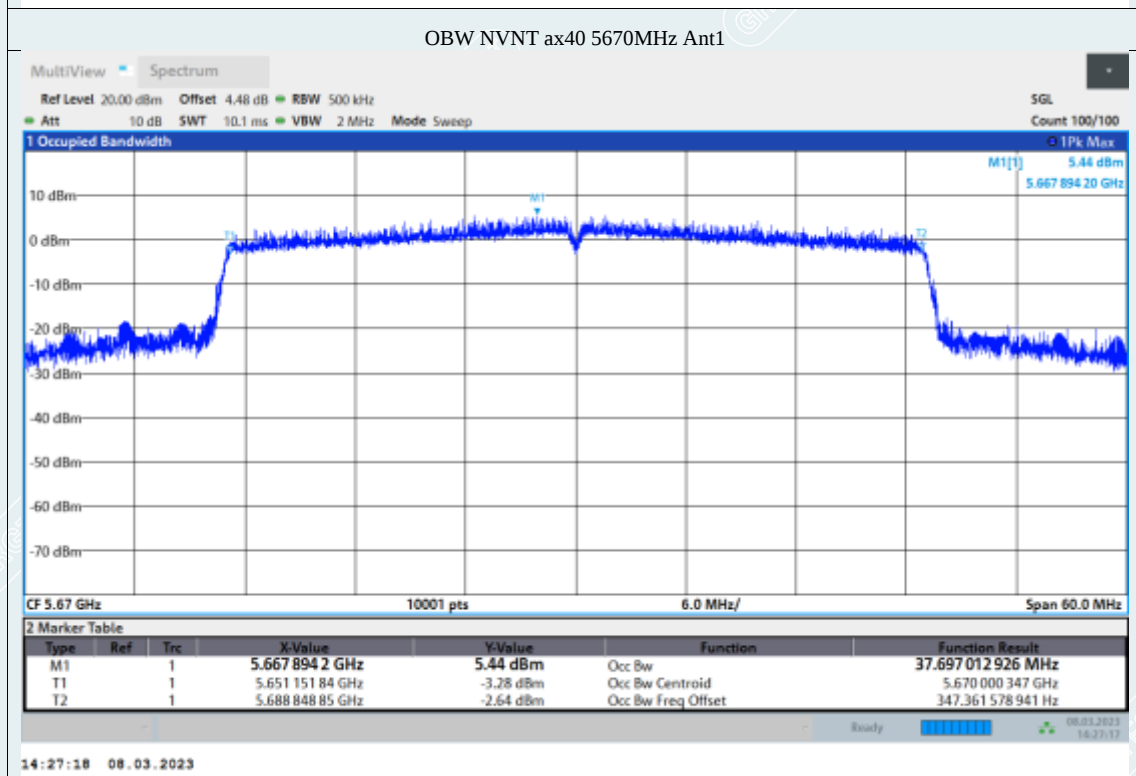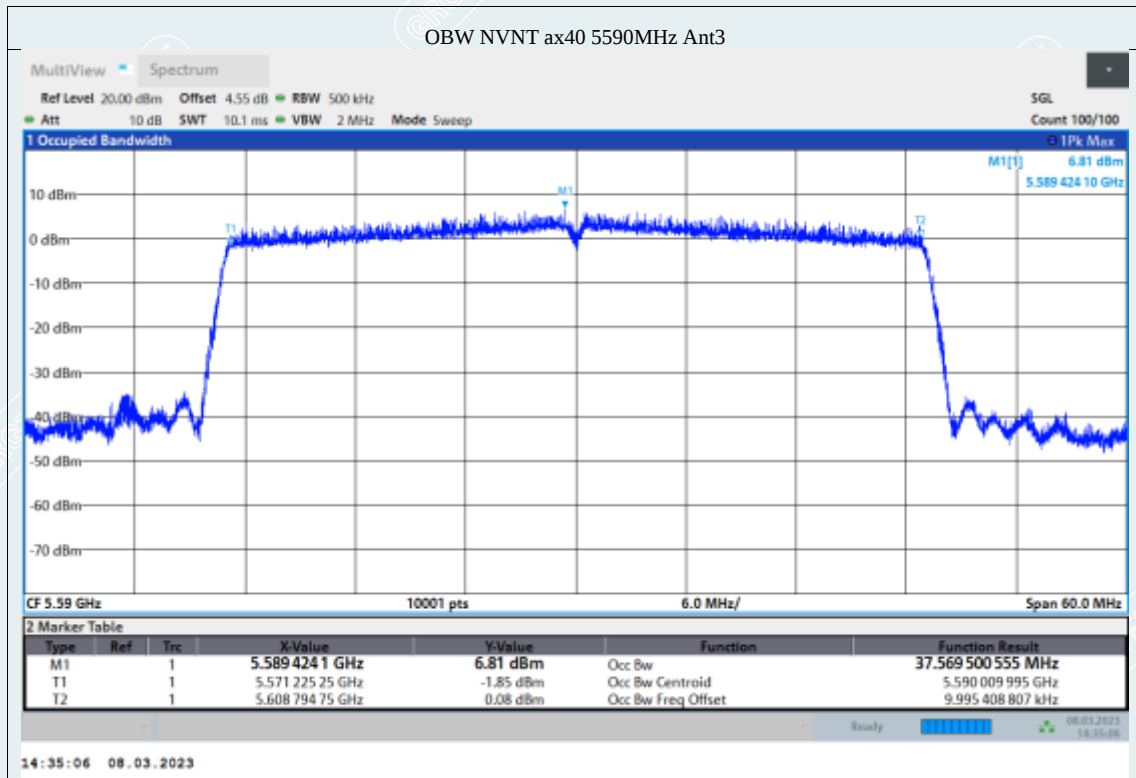

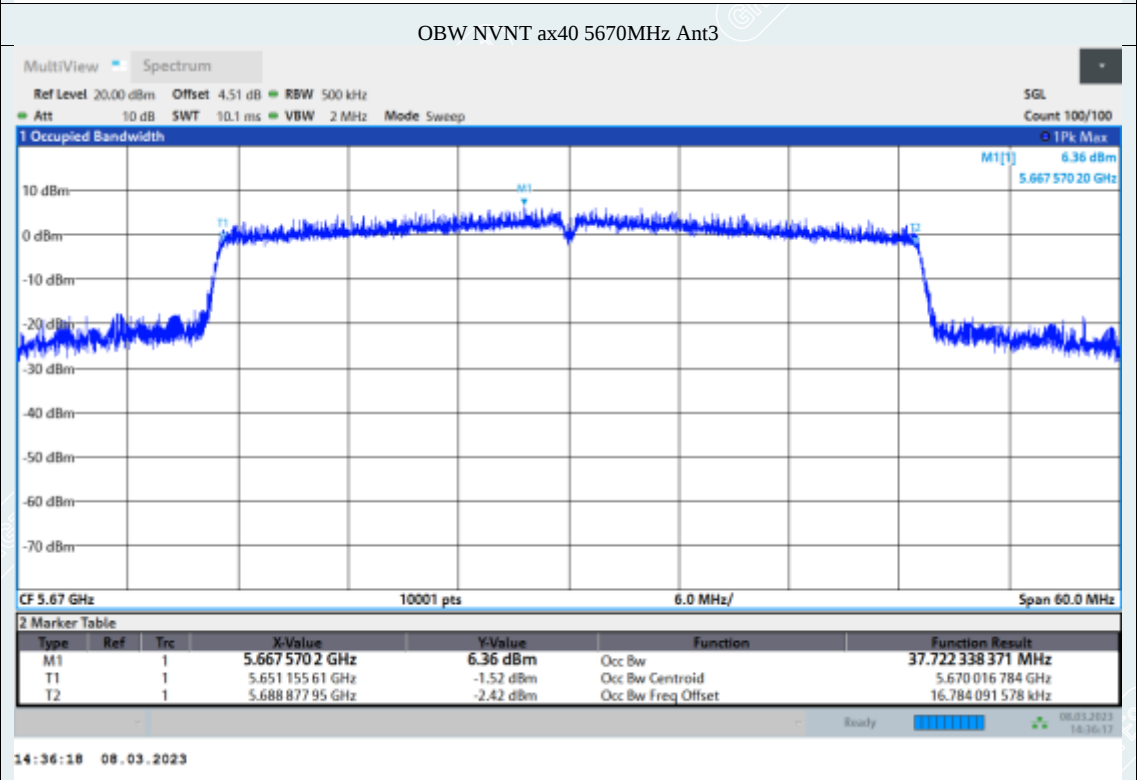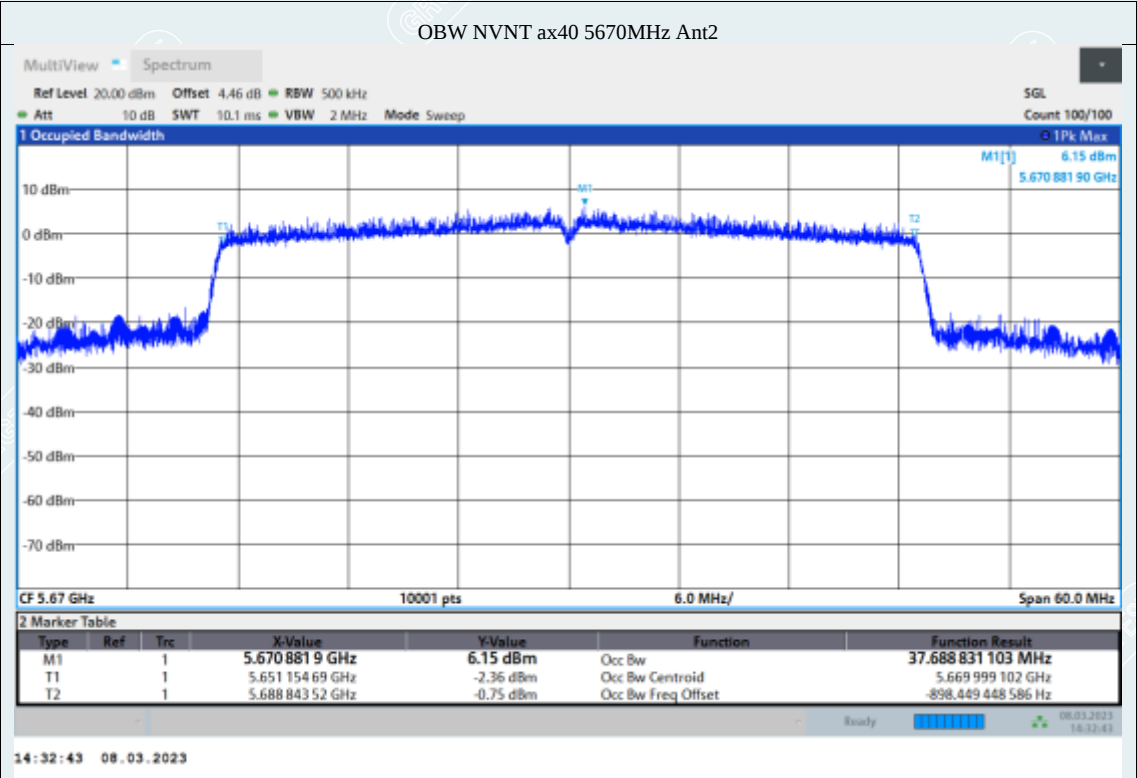

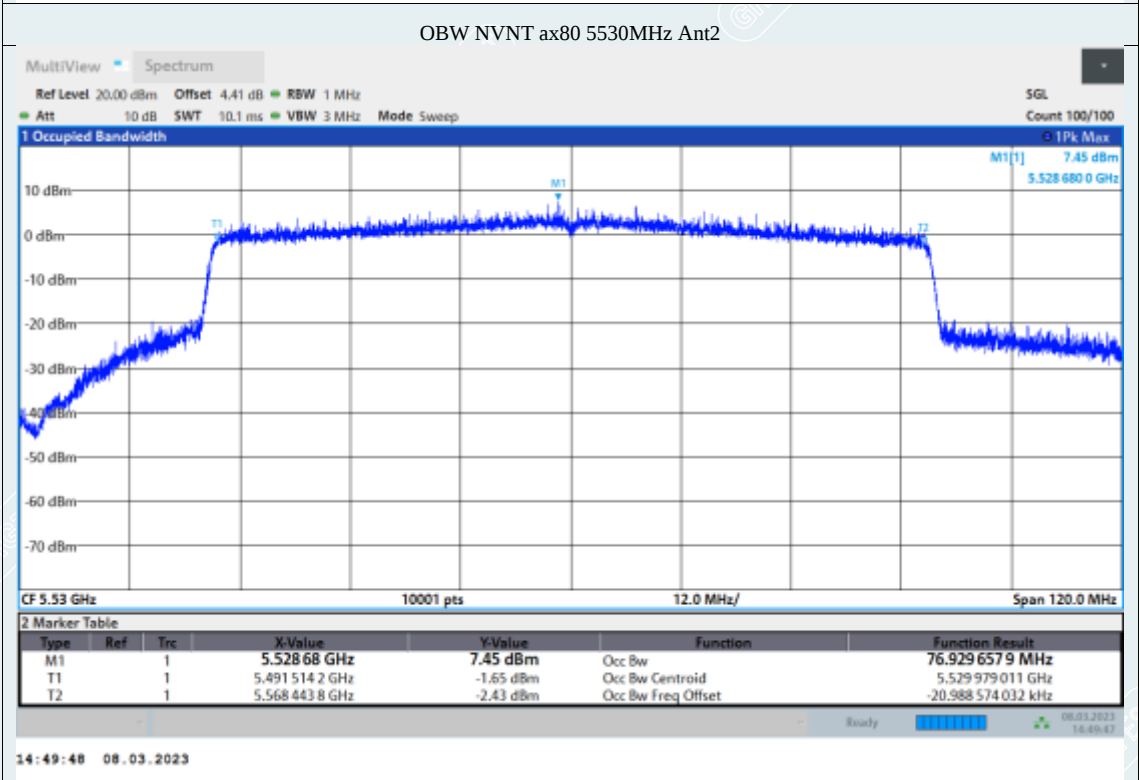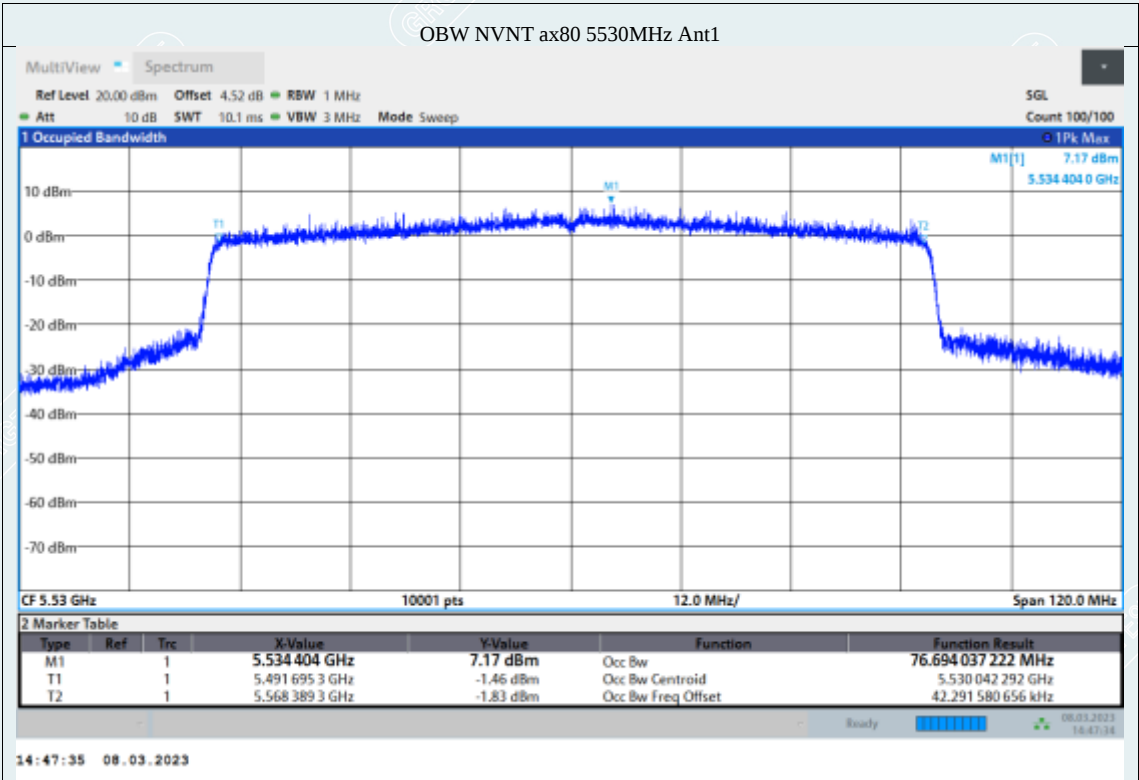

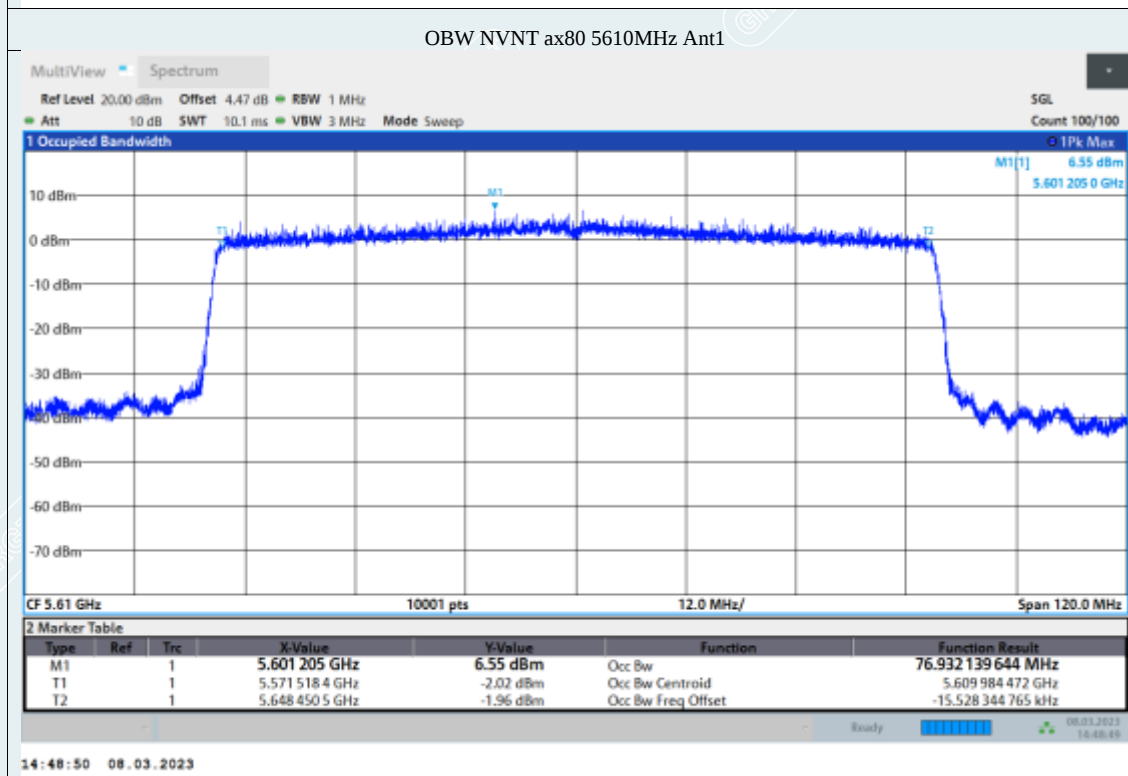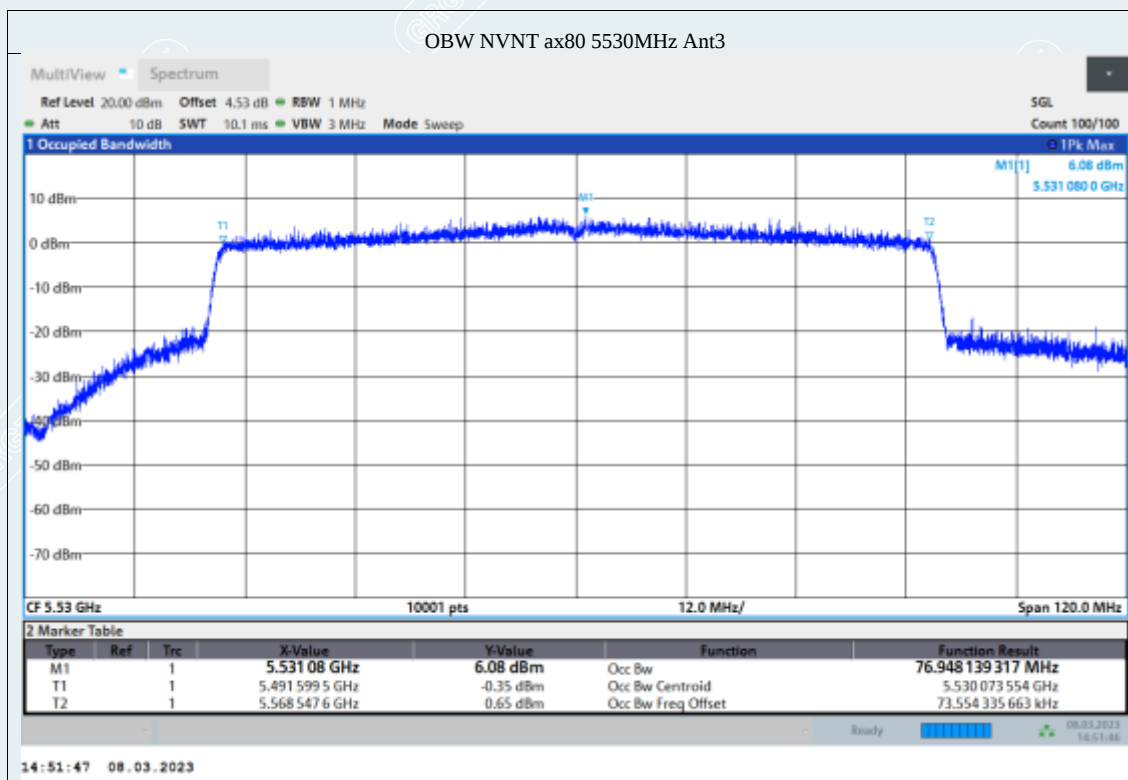

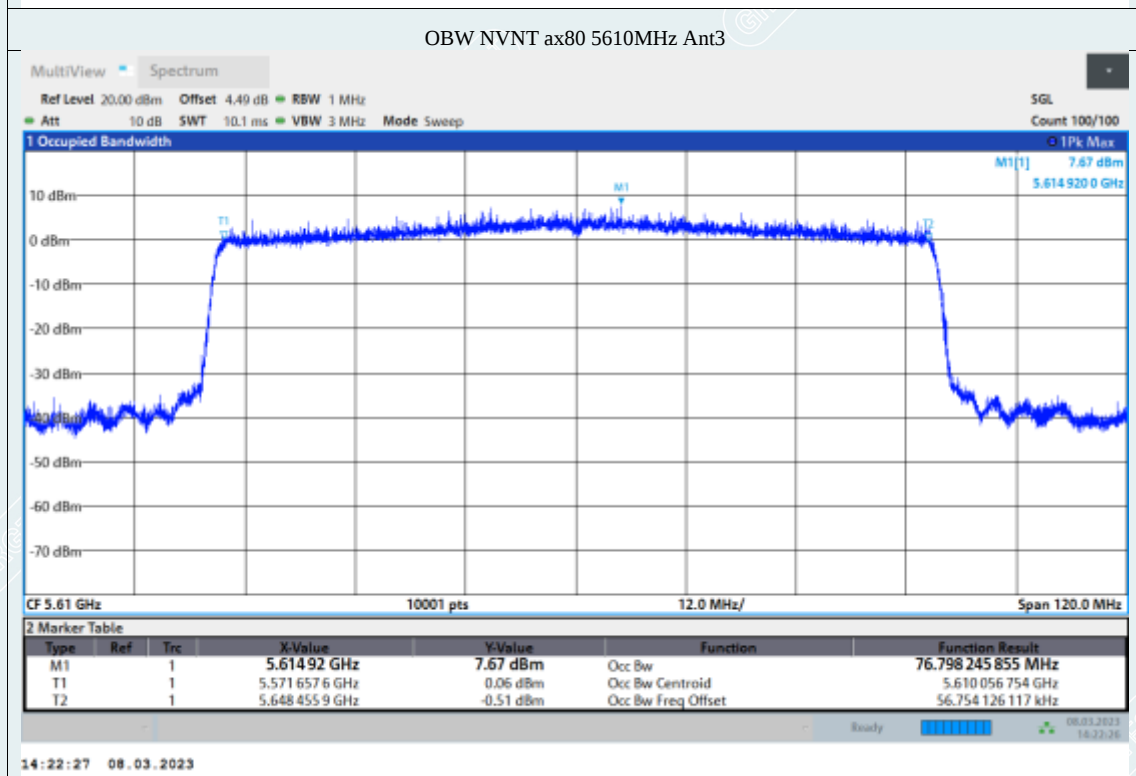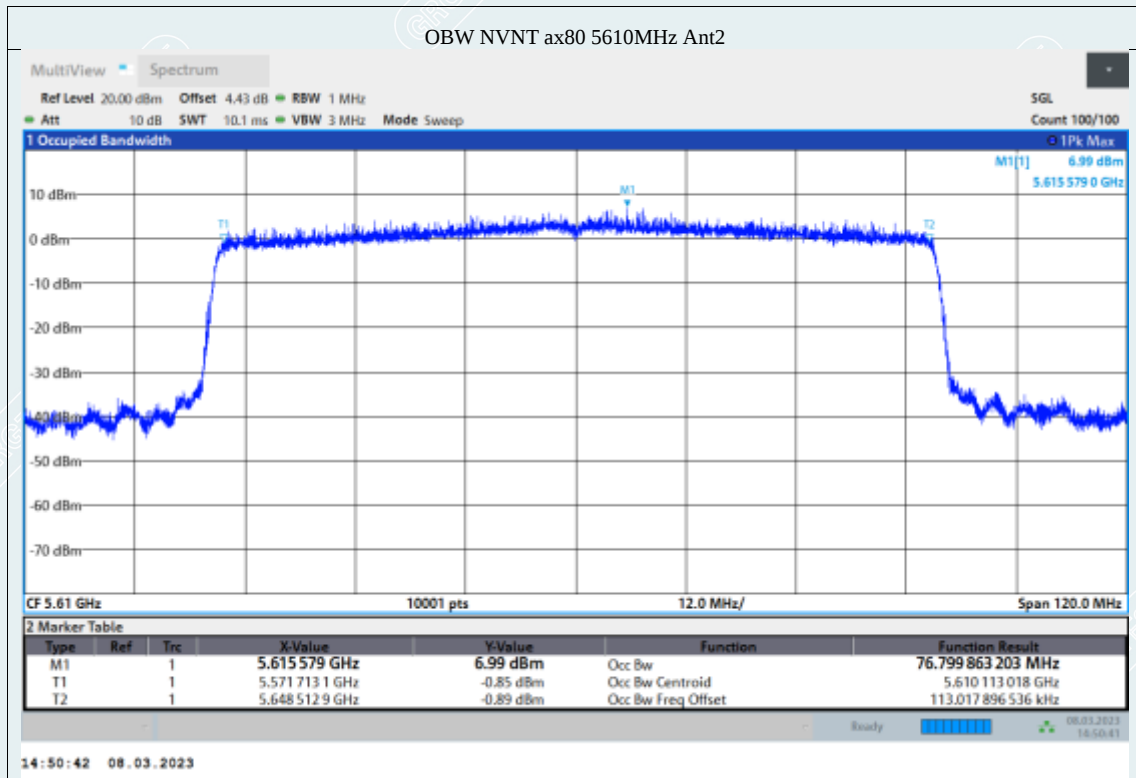


----- The following blanks -----



99% Occupied Bandwidth: U-NII-3



Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
a	5745	Ant1	16.616
a	5745	Ant2	16.61
a	5745	Ant3	16.606
a	5785	Ant1	16.53
a	5785	Ant2	16.511
a	5785	Ant3	16.526
a	5825	Ant1	16.631
a	5825	Ant2	16.619
a	5825	Ant3	16.625
n20	5745	Ant1	17.759
n20	5745	Ant2	17.772
n20	5745	Ant3	17.744
n20	5785	Ant1	17.687
n20	5785	Ant2	17.687
n20	5785	Ant3	17.694
n20	5825	Ant1	17.788
n20	5825	Ant2	17.774
n20	5825	Ant3	17.788
n40	5755	Ant1	36.236
n40	5755	Ant2	36.231
n40	5755	Ant3	36.269
n40	5795	Ant1	36.121
n40	5795	Ant2	36.112
n40	5795	Ant3	36.118
ac20	5745	Ant1	17.77
ac20	5745	Ant2	17.777
ac20	5745	Ant3	17.772
ac20	5785	Ant1	17.693
ac20	5785	Ant2	17.688
ac20	5785	Ant3	17.697
ac20	5825	Ant1	17.802
ac20	5825	Ant2	17.779
ac20	5825	Ant3	17.79
ac40	5755	Ant1	36.274
ac40	5755	Ant2	36.273
ac40	5755	Ant3	36.28
ac40	5795	Ant1	36.104
ac40	5795	Ant2	36.097
ac40	5795	Ant3	36.128
ac80	5775	Ant1	75.001



ac80	5775	Ant2	75.04
ac80	5775	Ant3	75.198
ax20	5745	Ant1	18.961
ax20	5745	Ant2	18.973
ax20	5745	Ant3	18.973
ax20	5785	Ant1	18.932
ax20	5785	Ant2	18.947
ax20	5785	Ant3	18.937
ax20	5825	Ant1	18.974
ax20	5825	Ant2	18.989
ax20	5825	Ant3	18.987
ax40	5755	Ant1	37.626
ax40	5755	Ant2	37.625
ax40	5755	Ant3	37.667
ax40	5795	Ant1	37.529
ax40	5795	Ant2	37.526
ax40	5795	Ant3	37.523
ax80	5775	Ant1	76.72
ax80	5775	Ant2	76.754
ax80	5775	Ant3	76.915



----- The following blanks -----


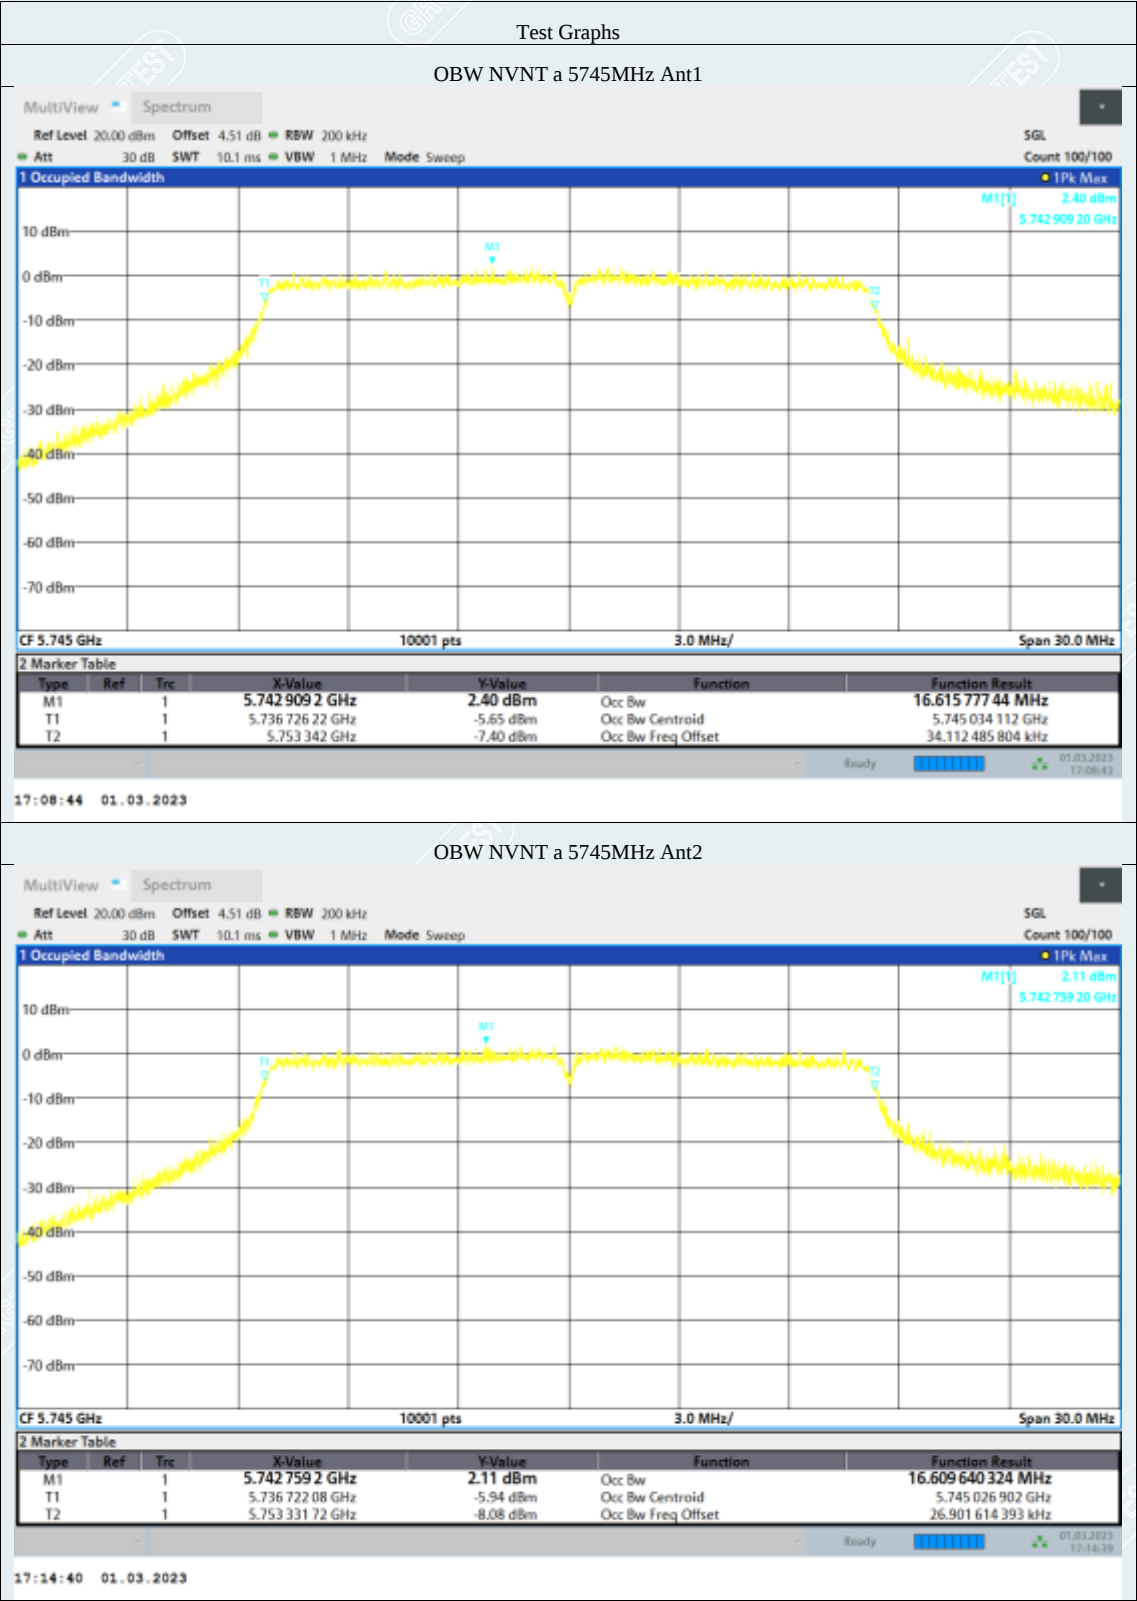


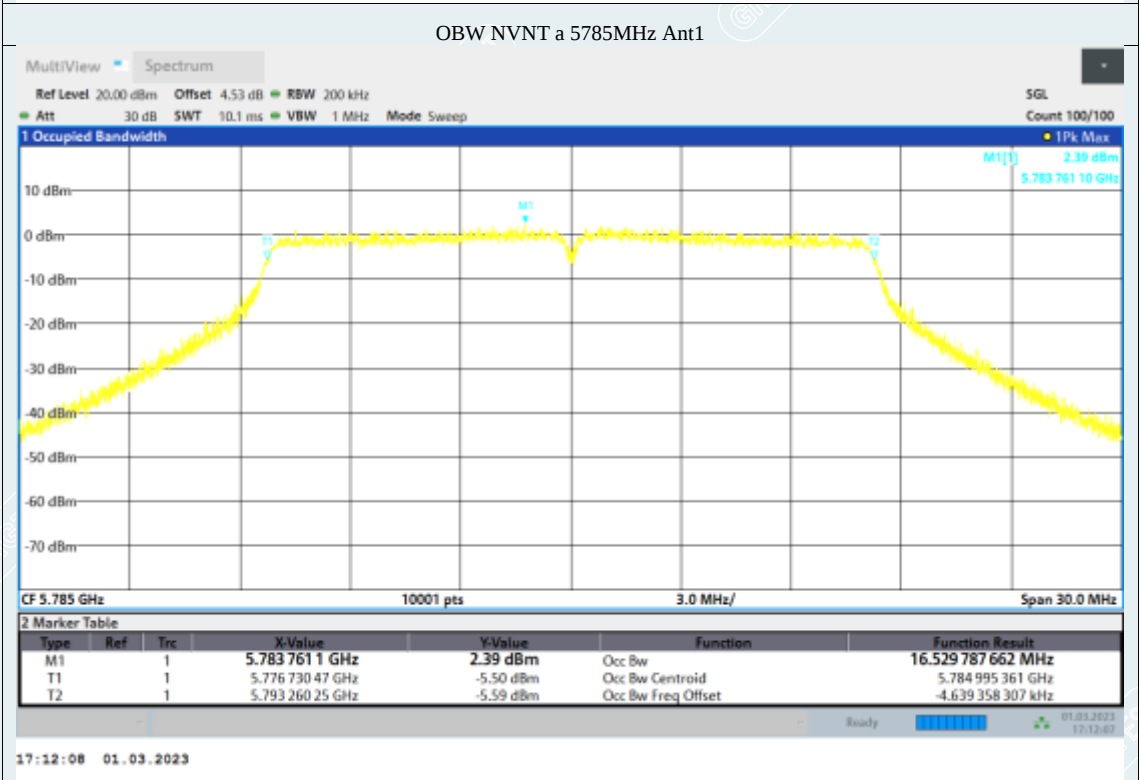
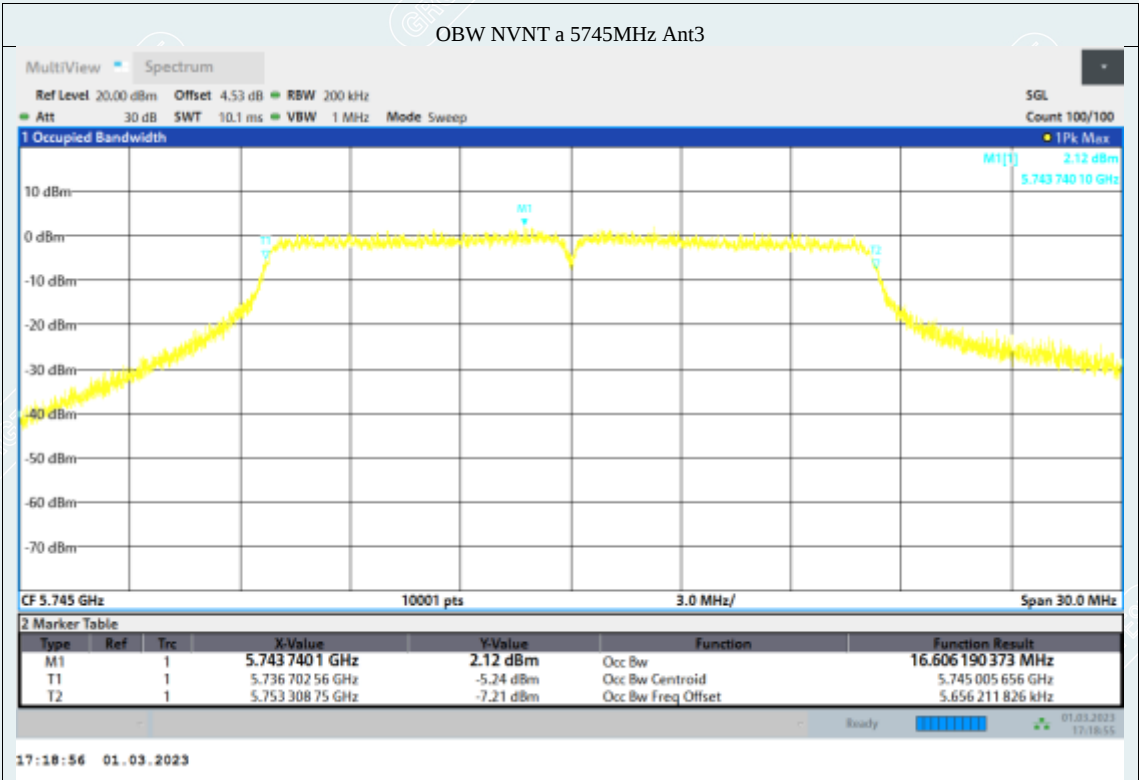


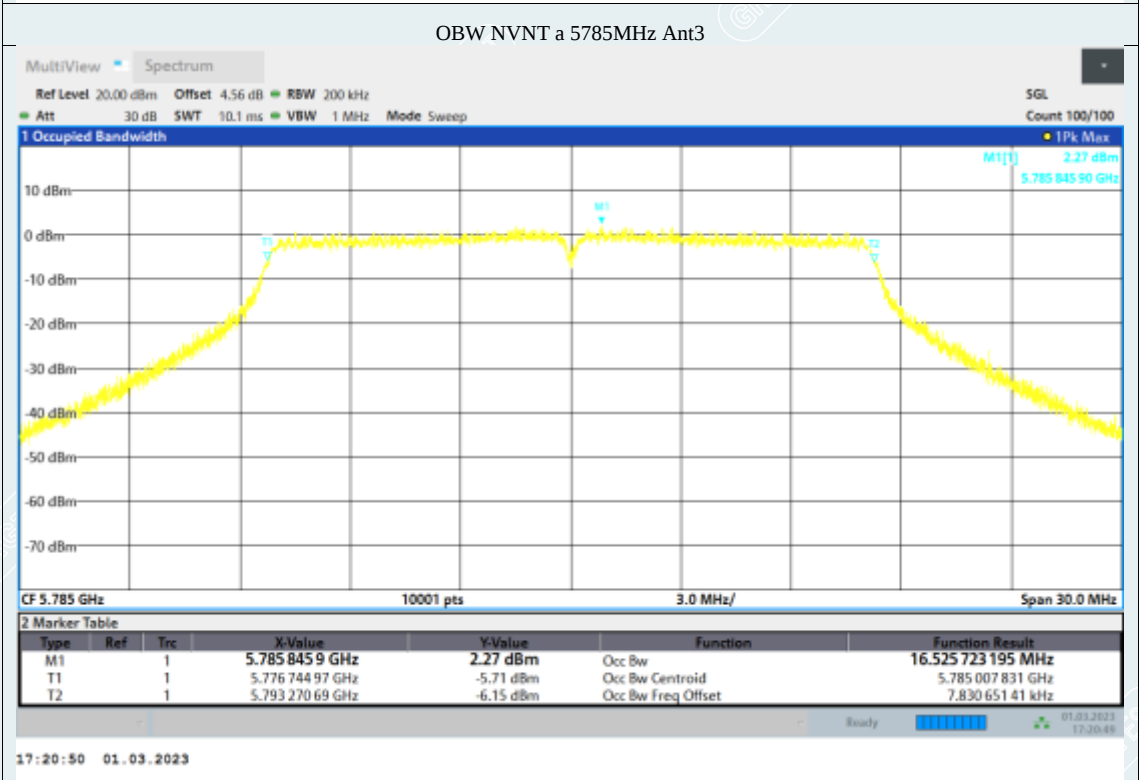
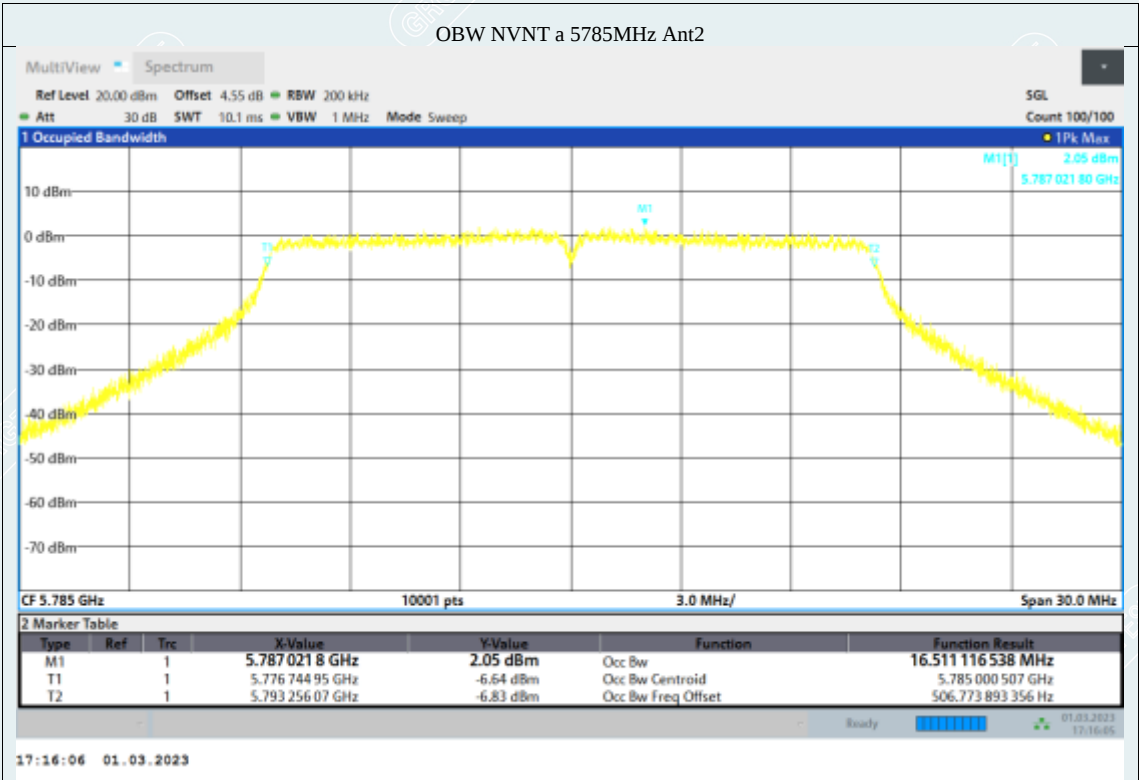


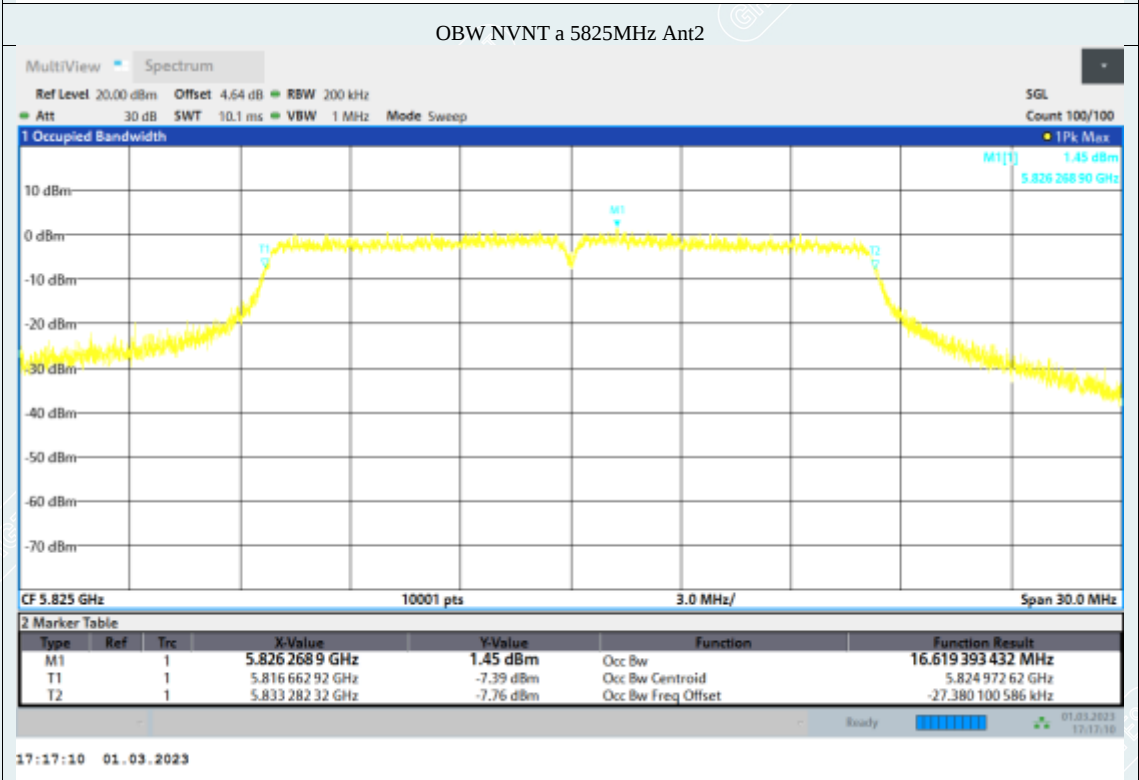
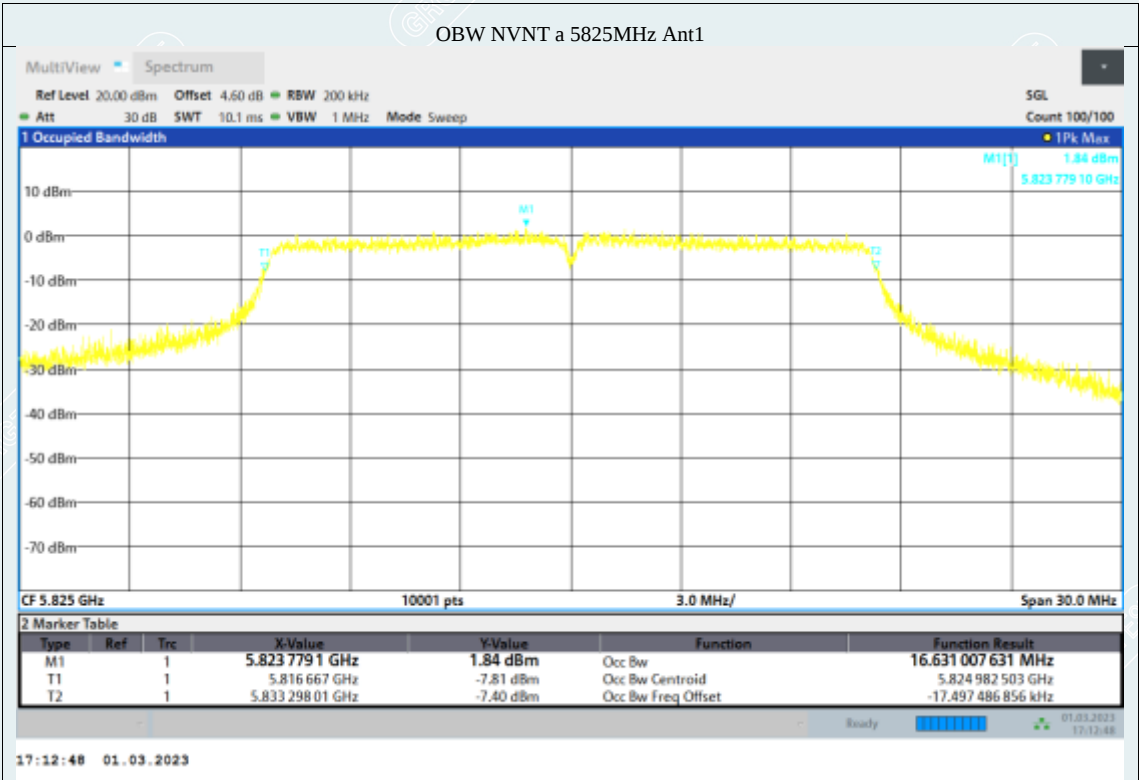


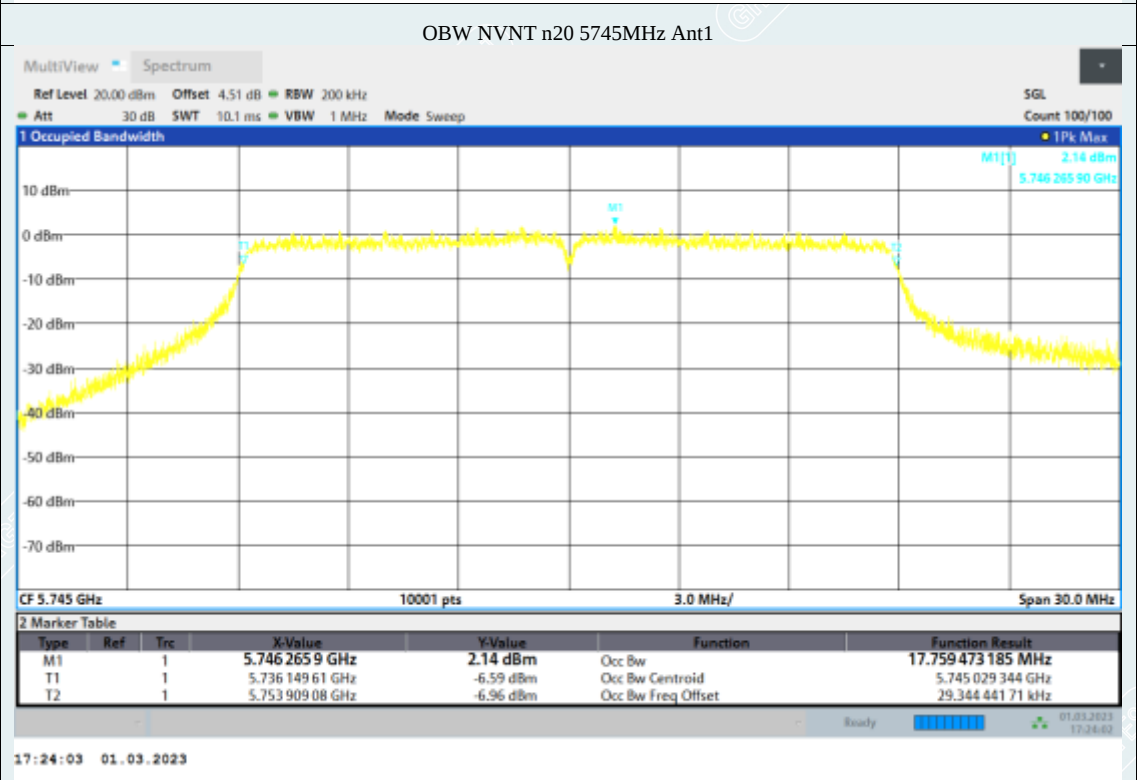
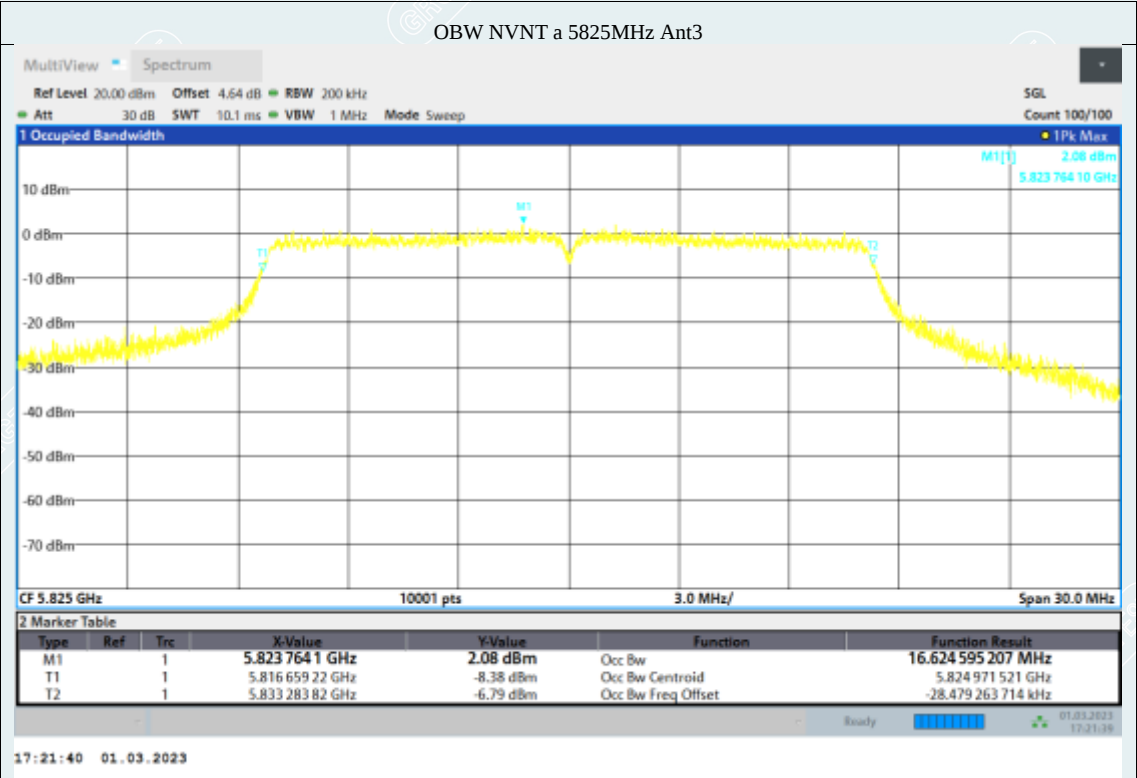


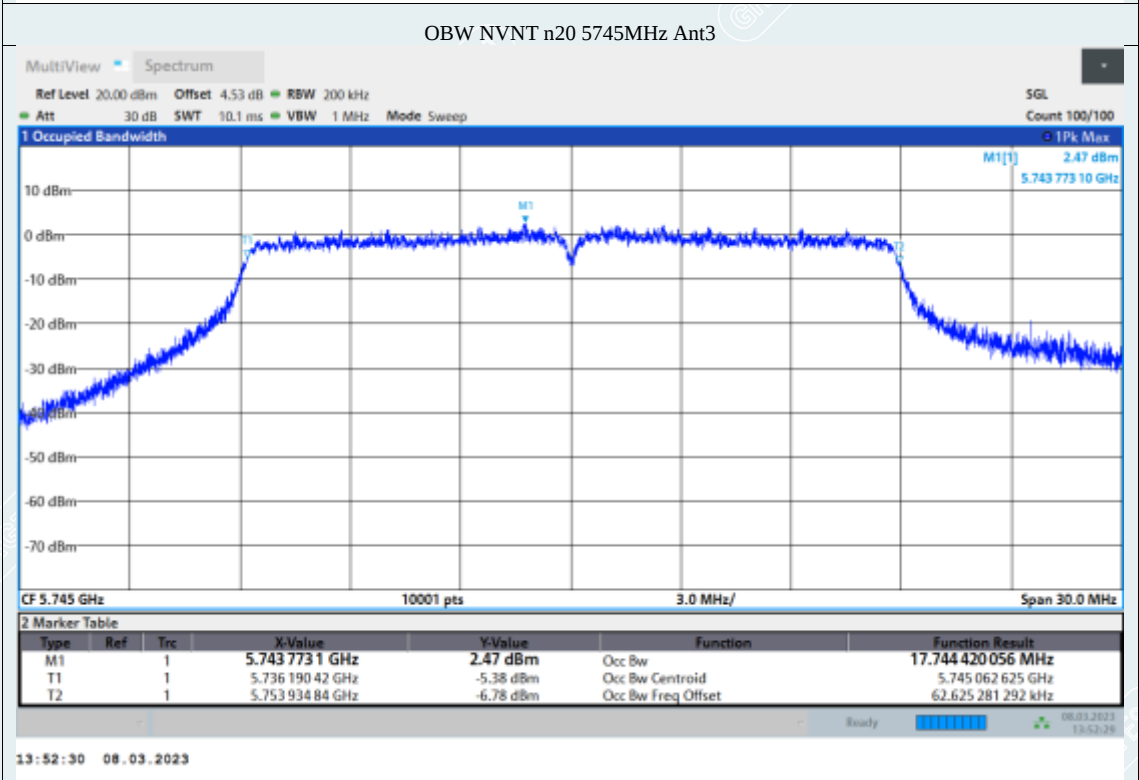
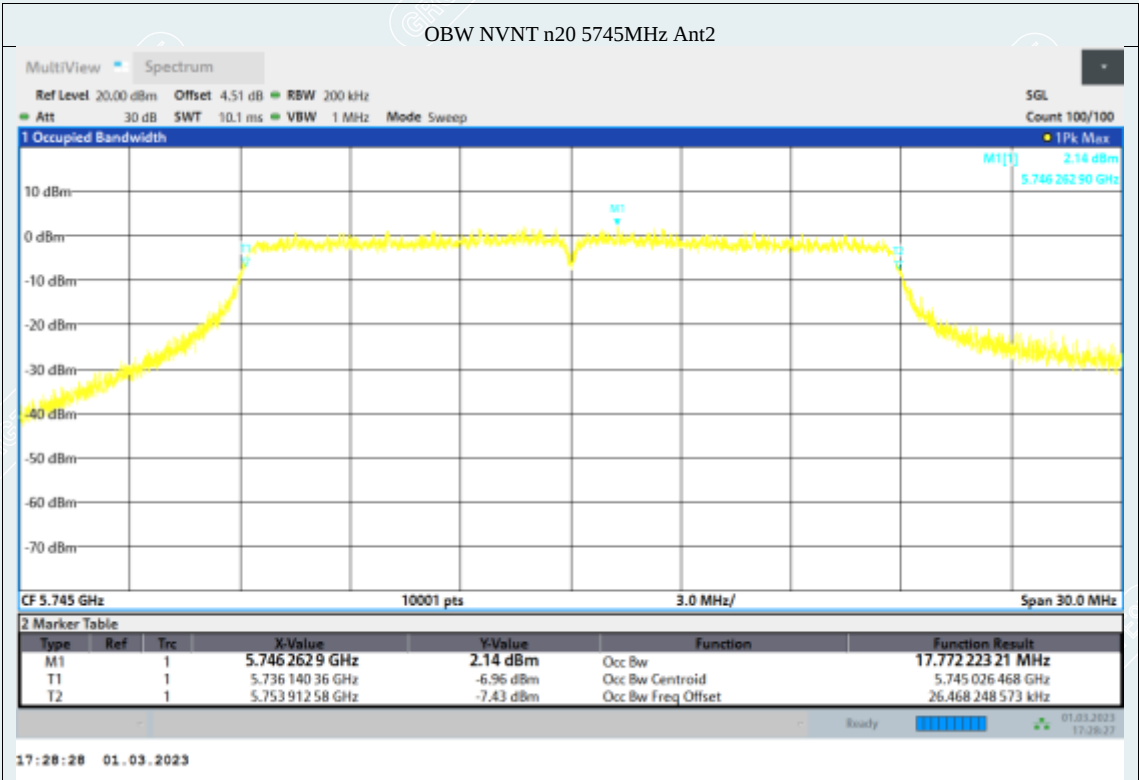


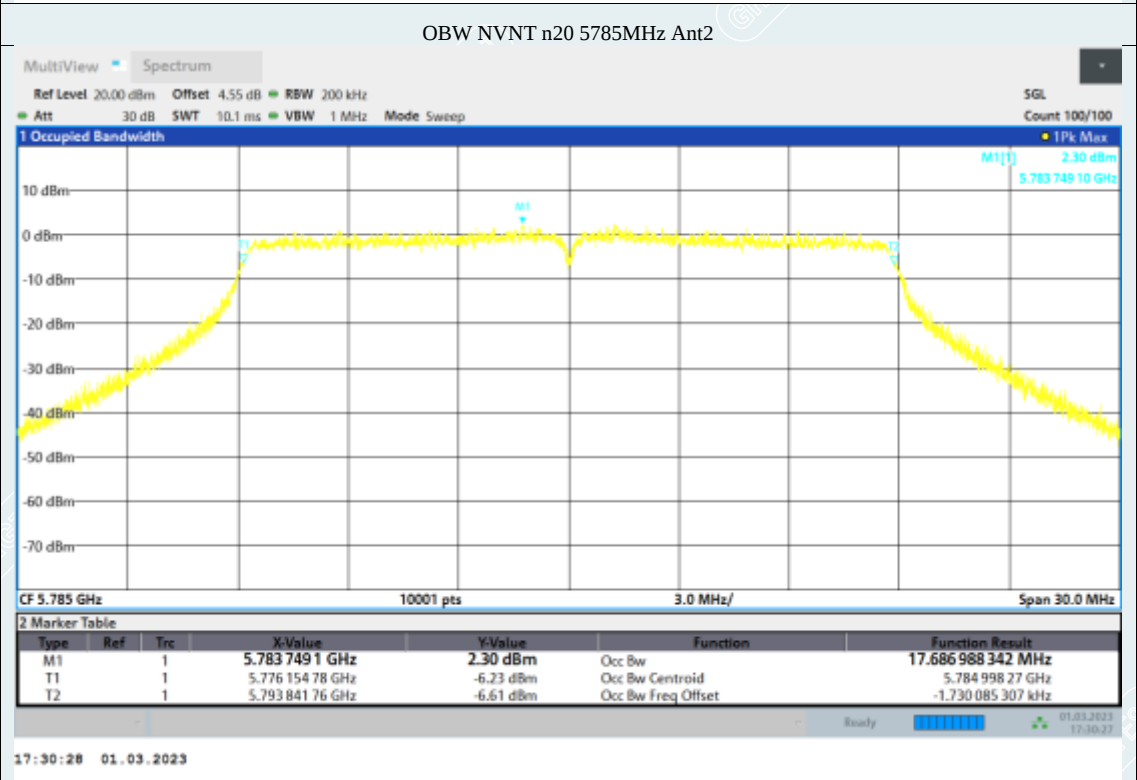
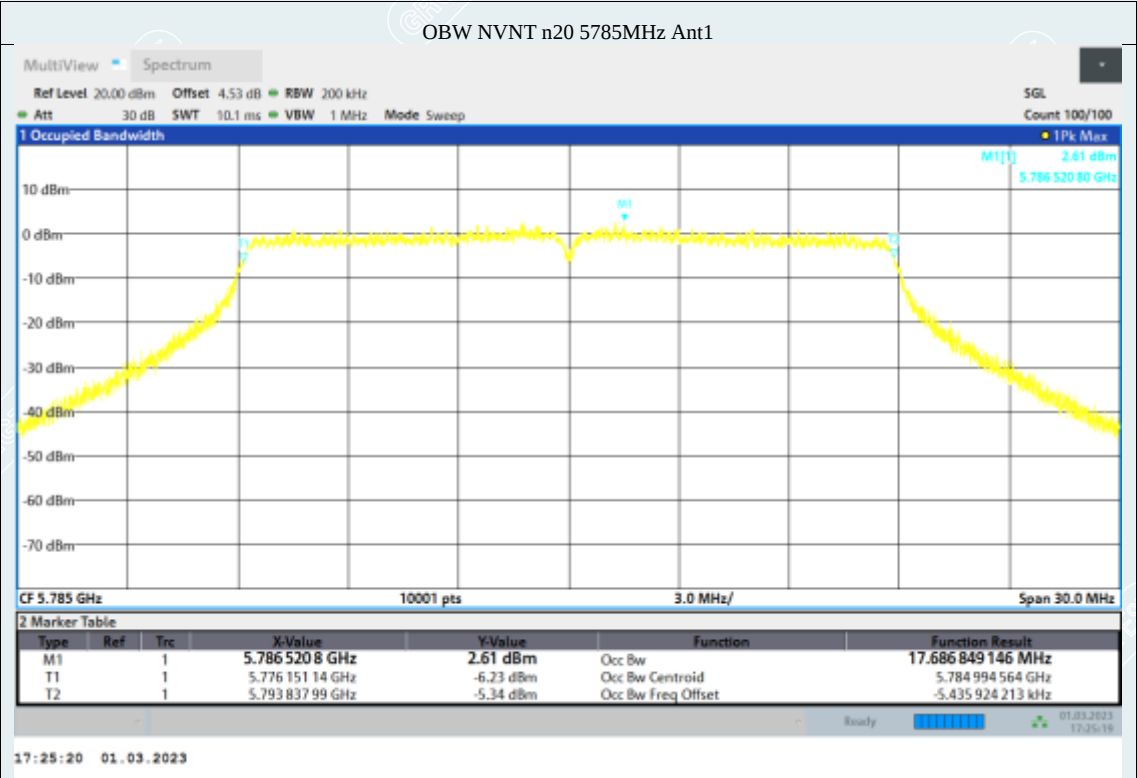


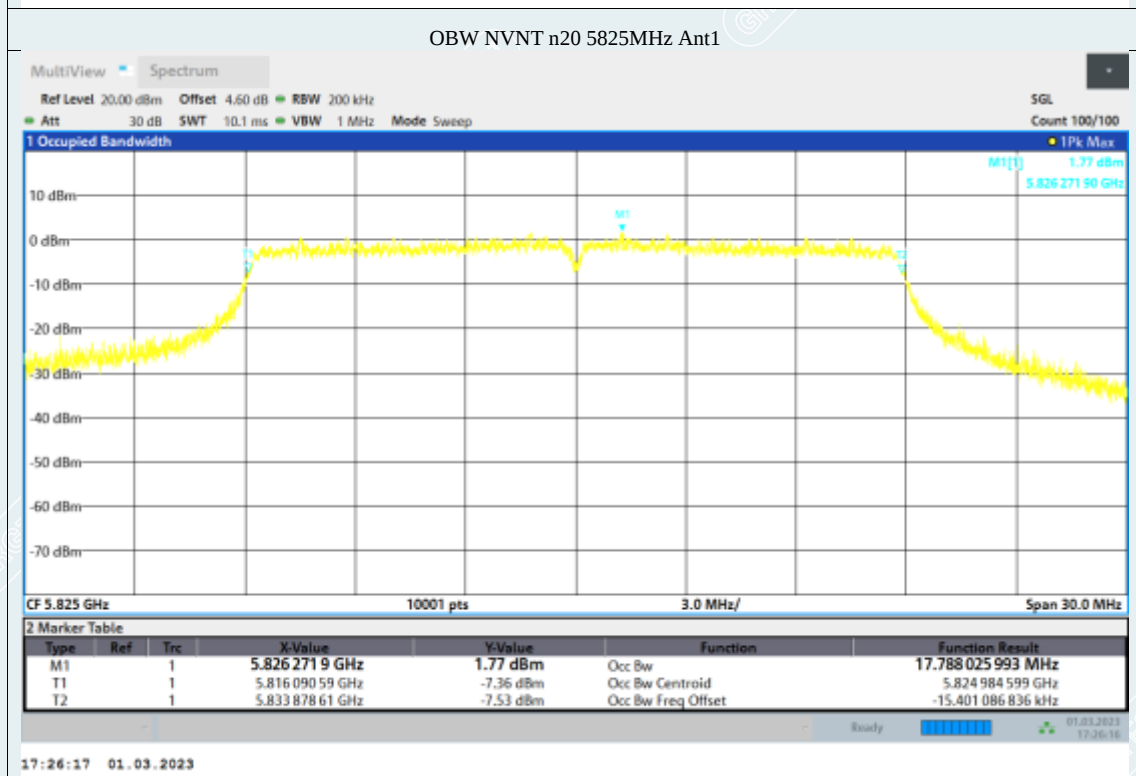
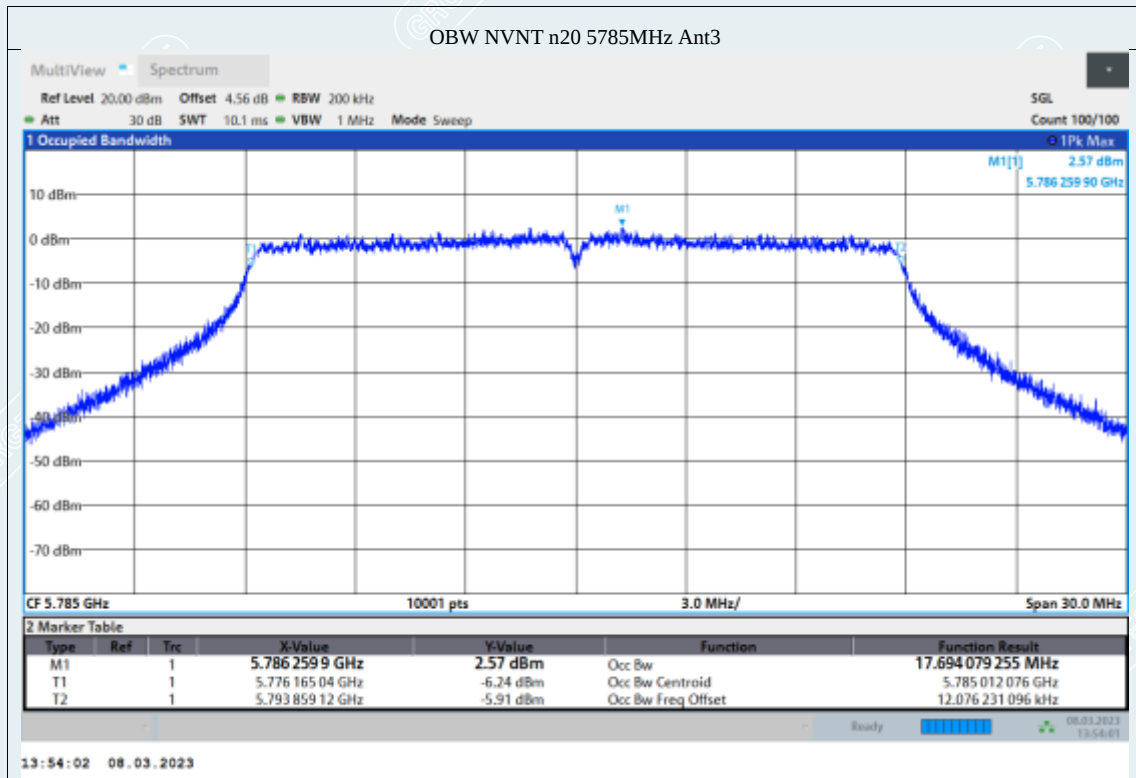


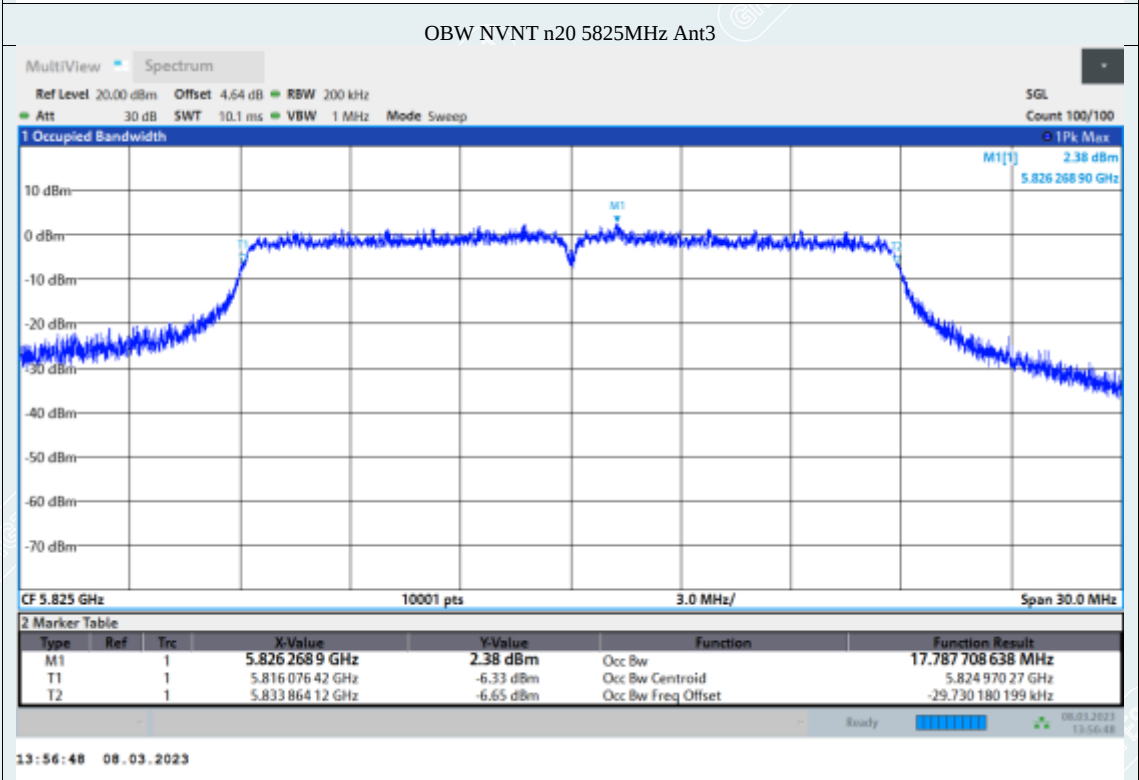
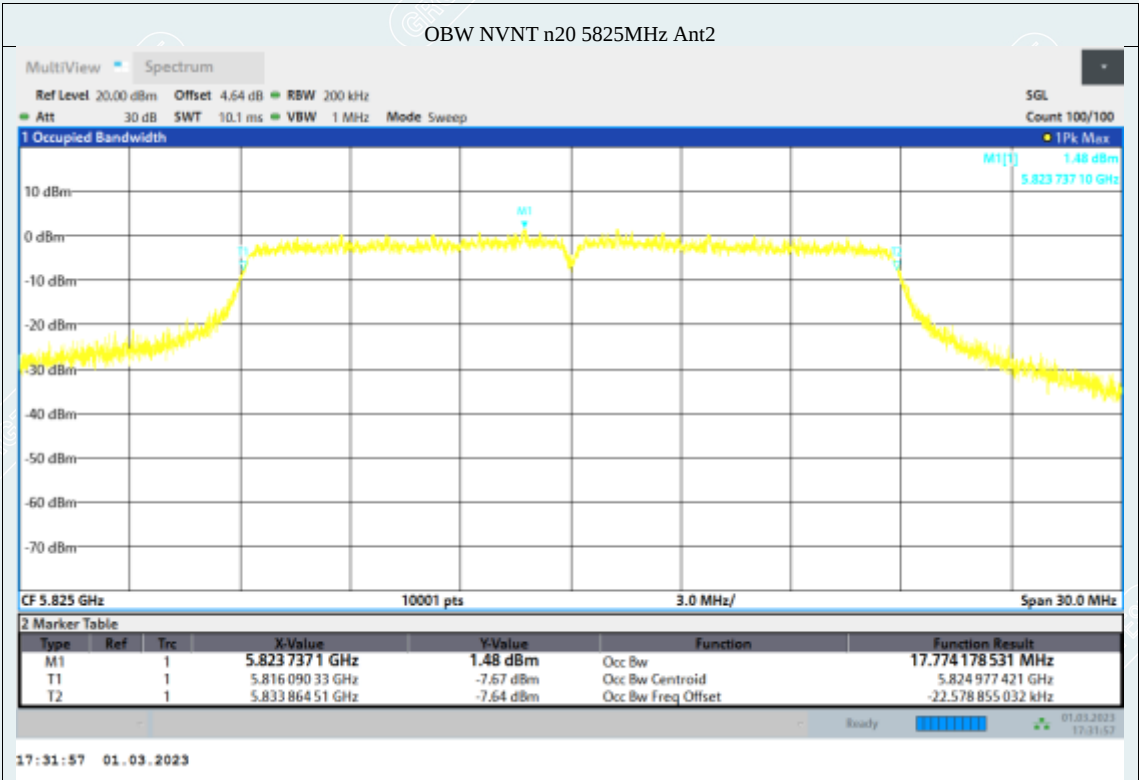


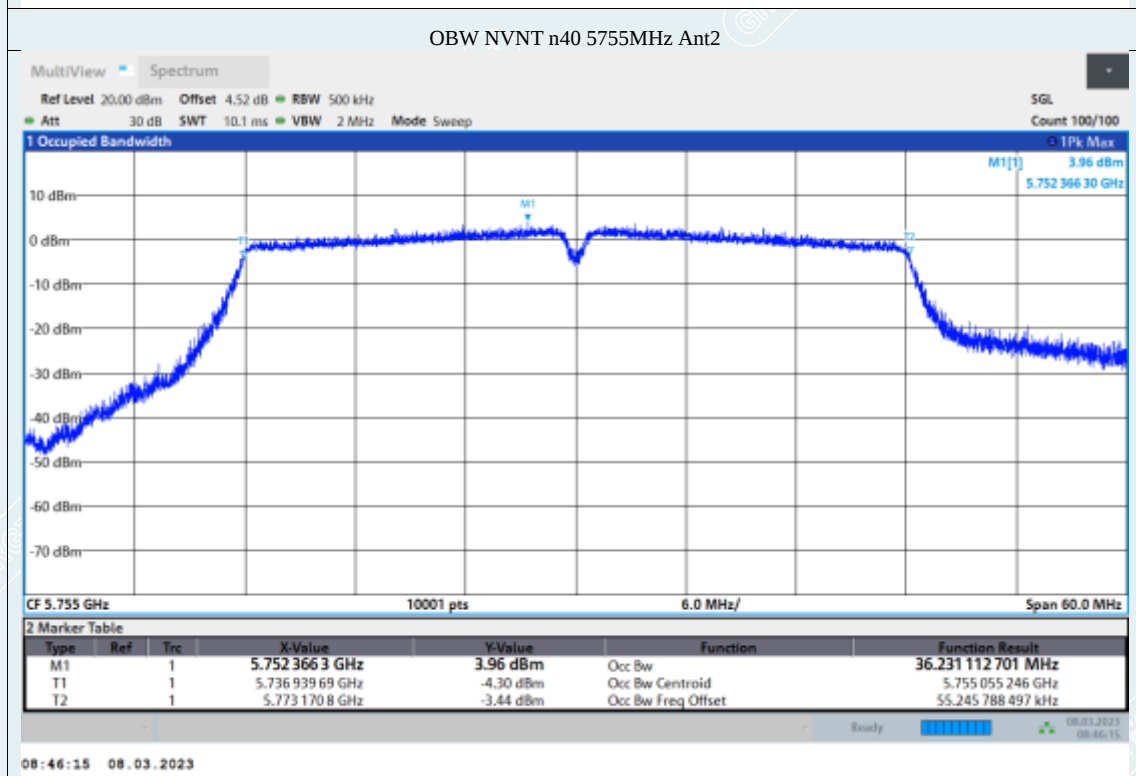
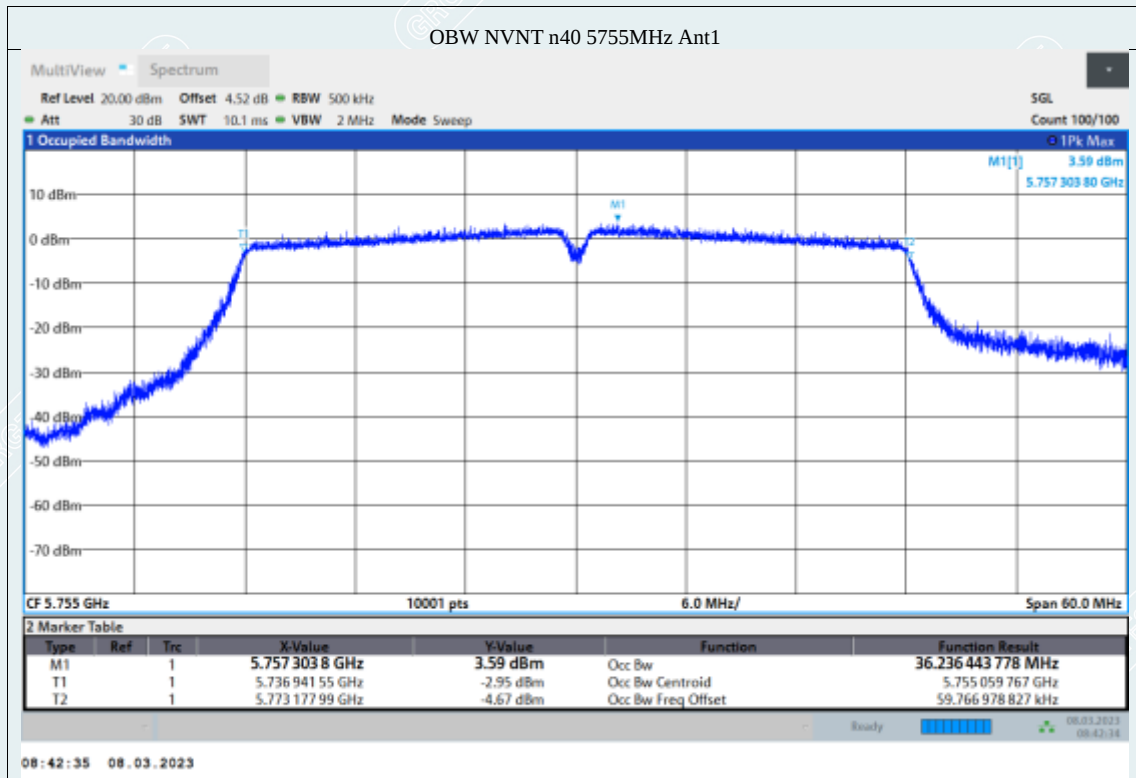


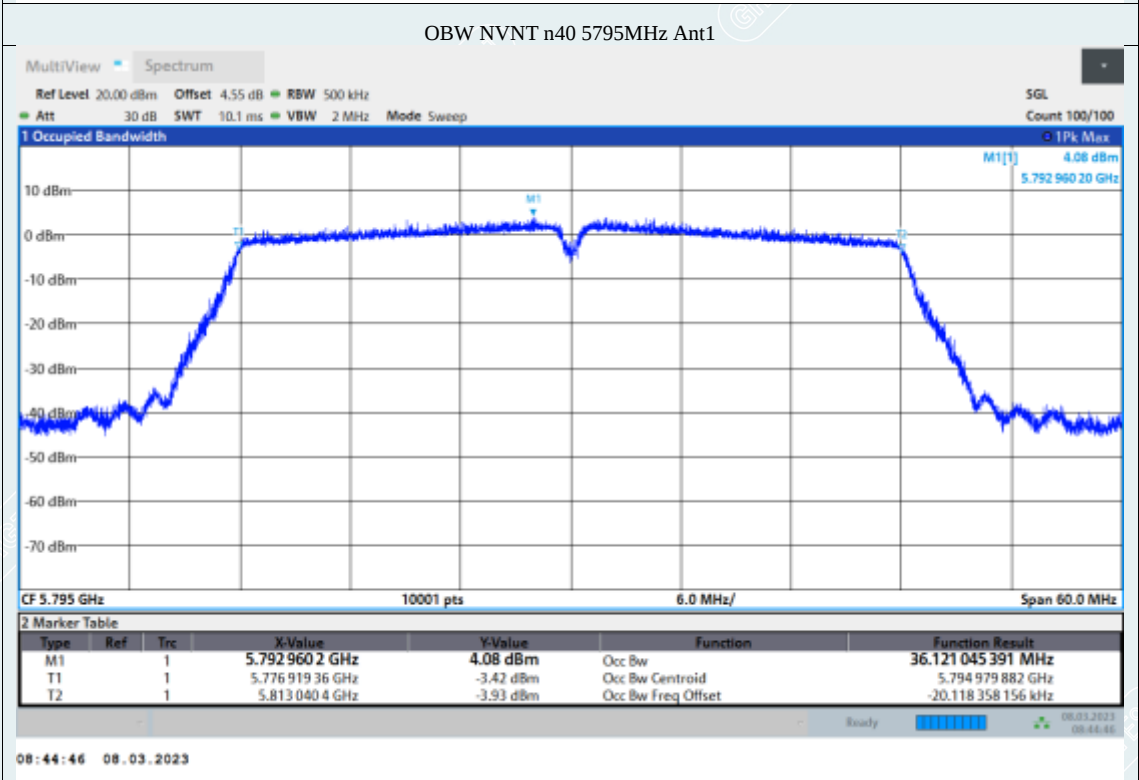
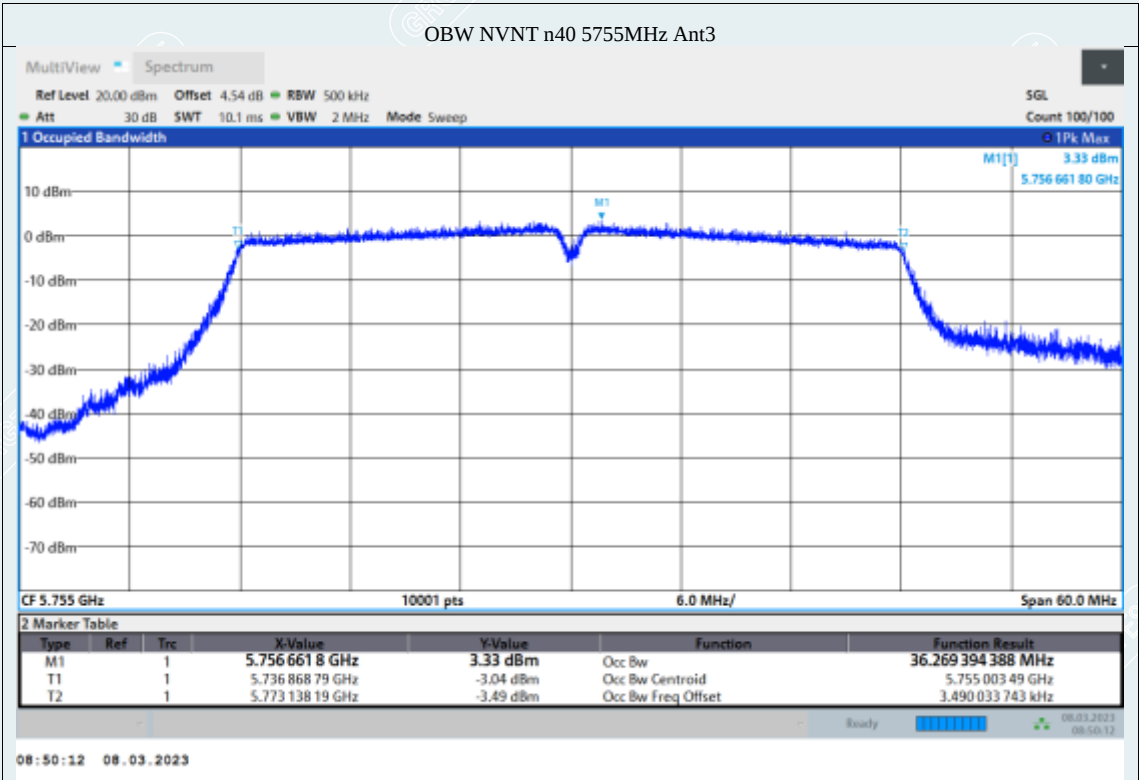


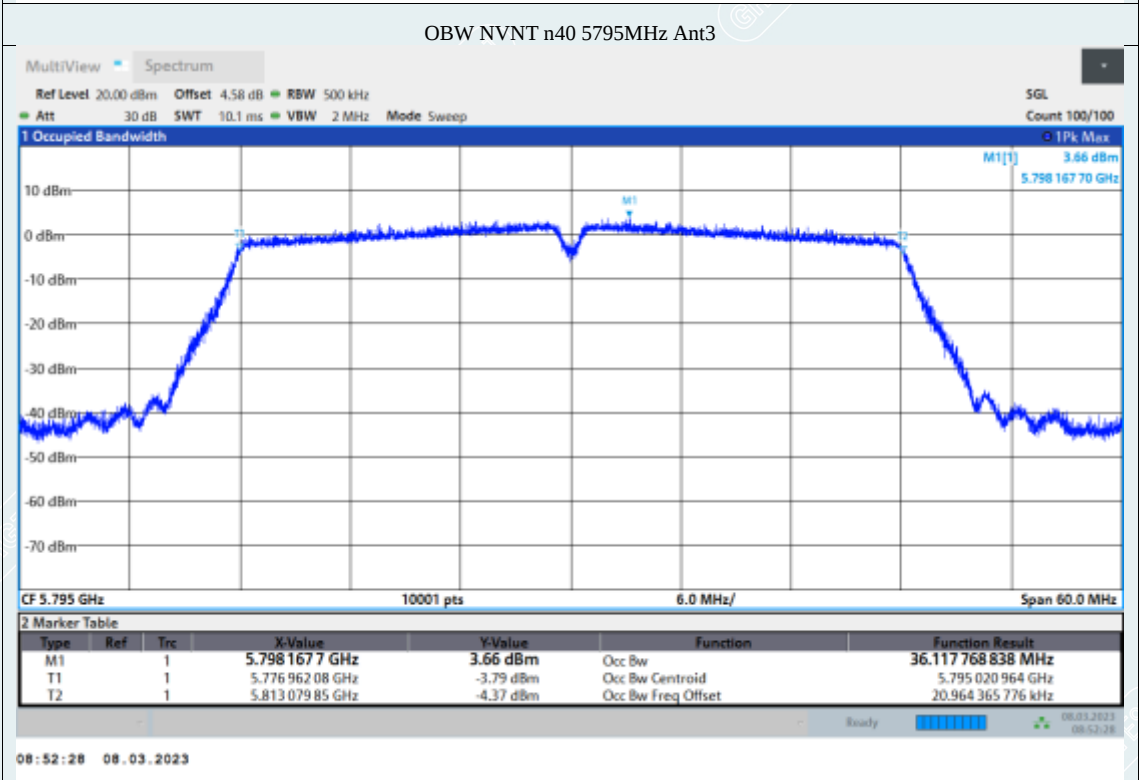
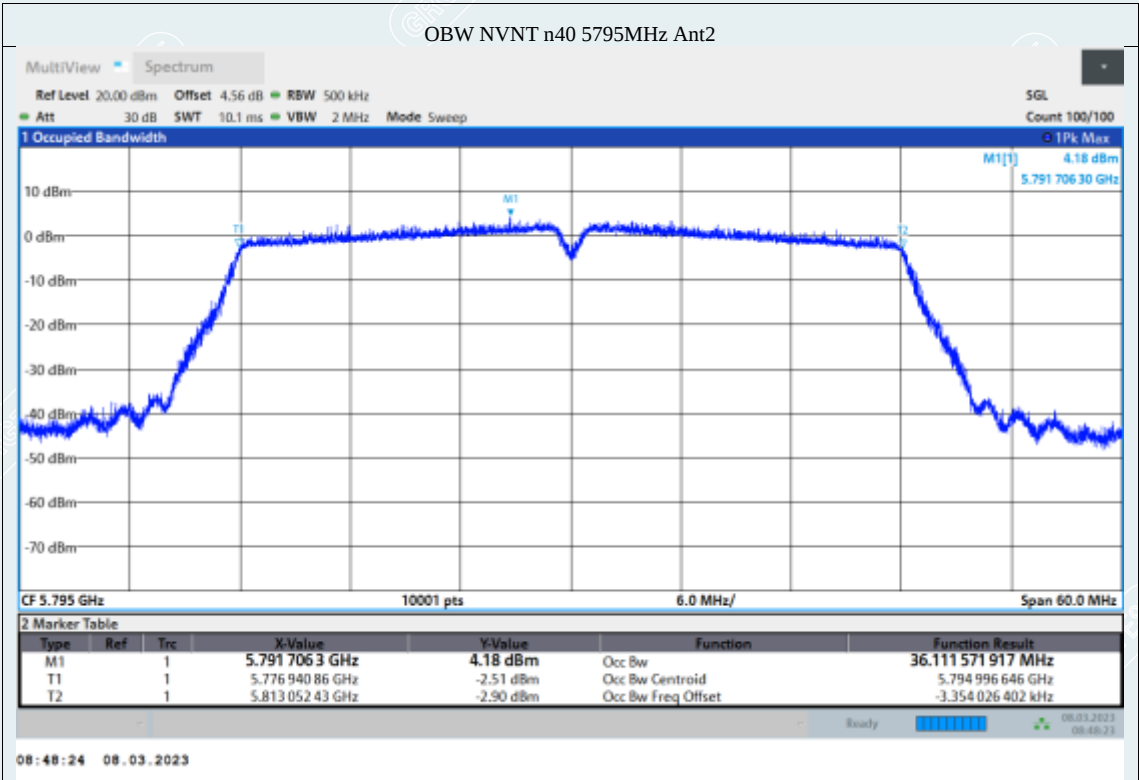


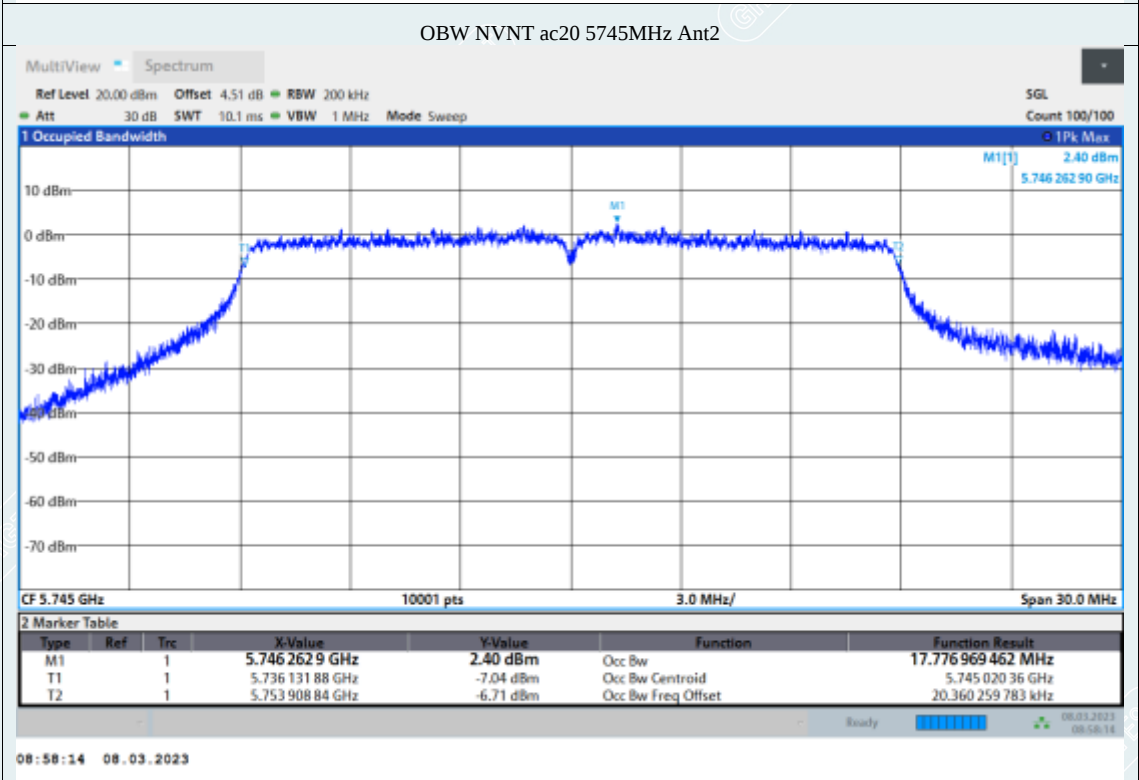
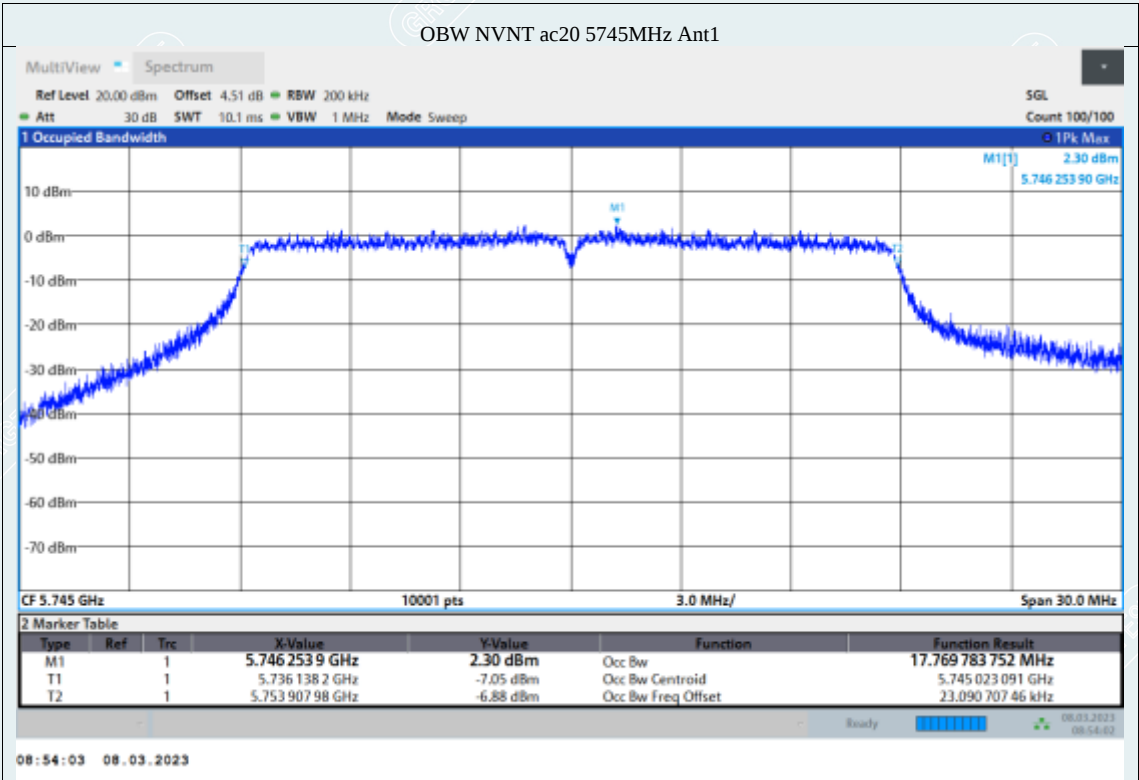


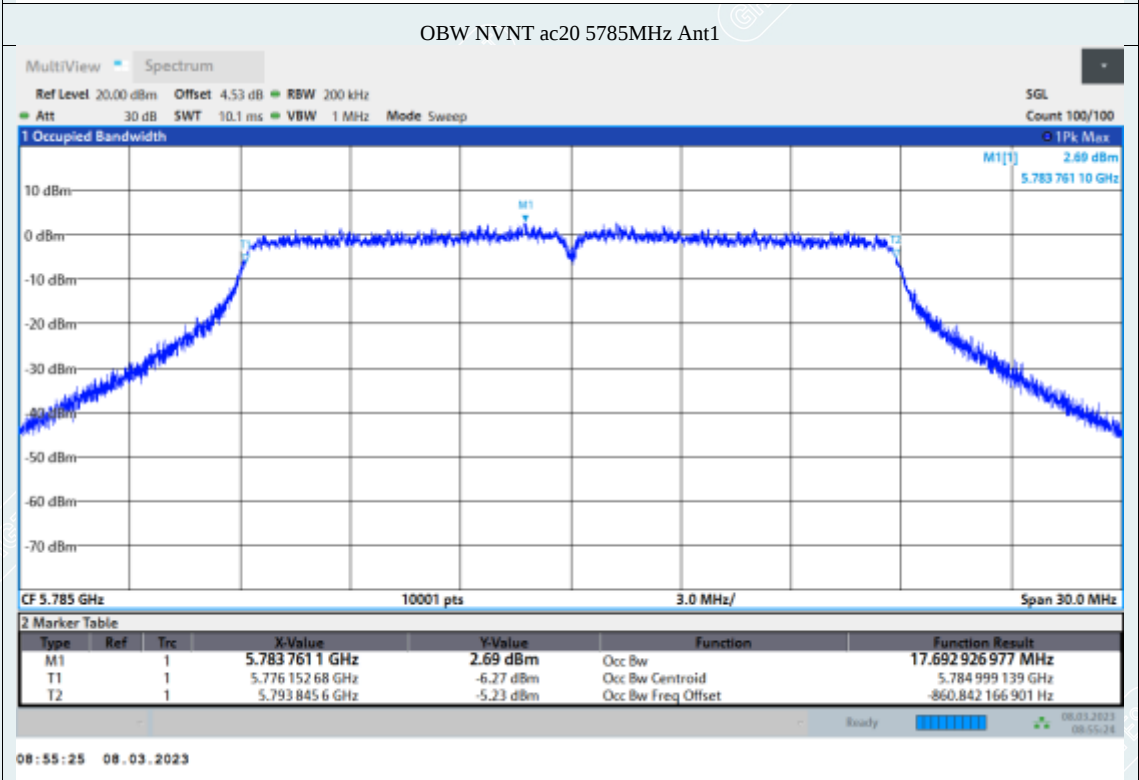
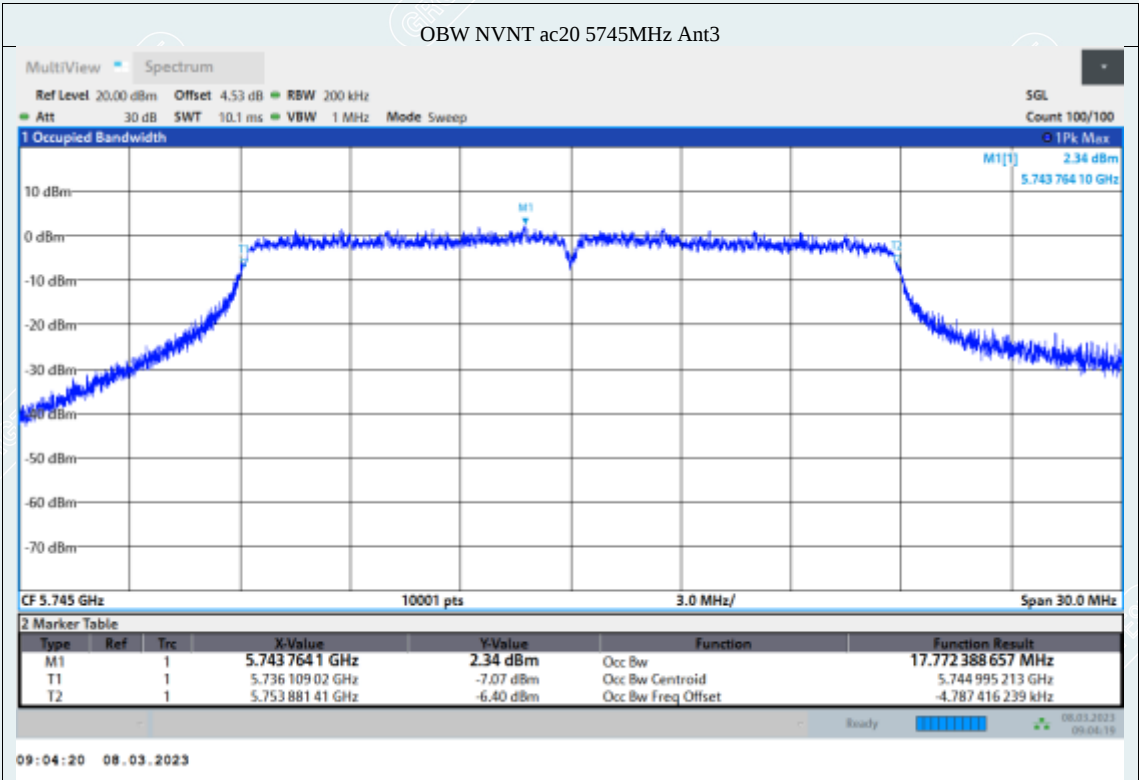


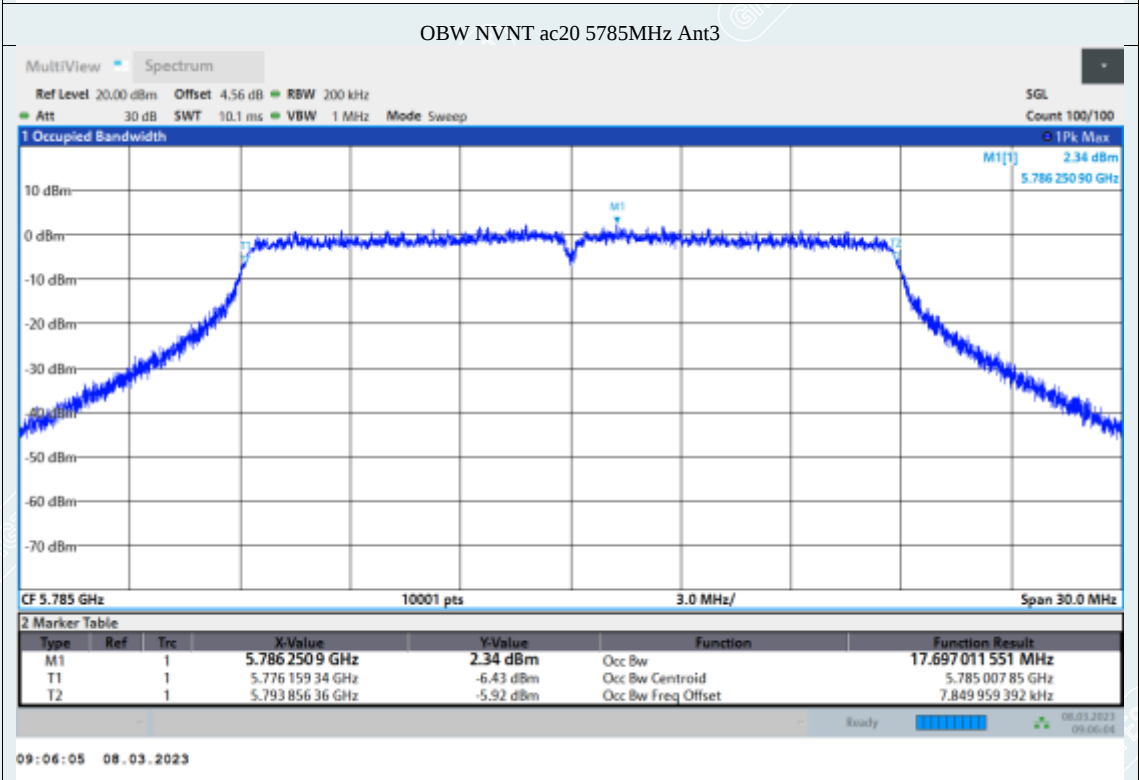
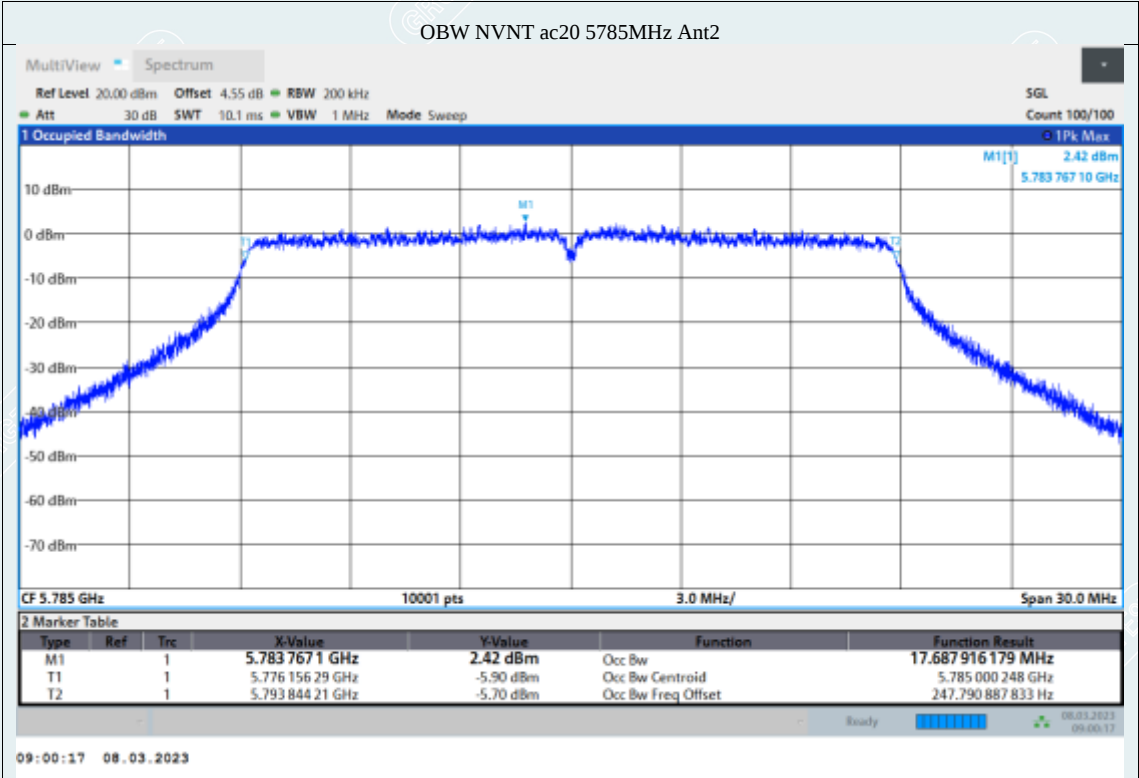


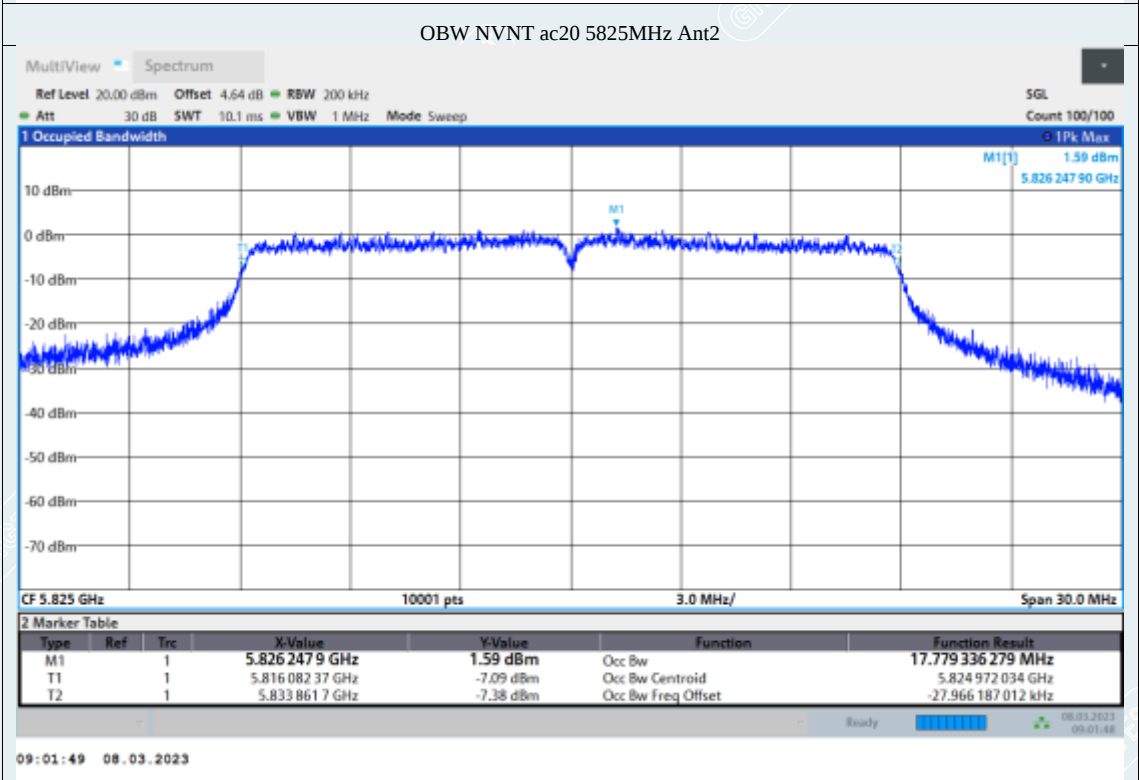
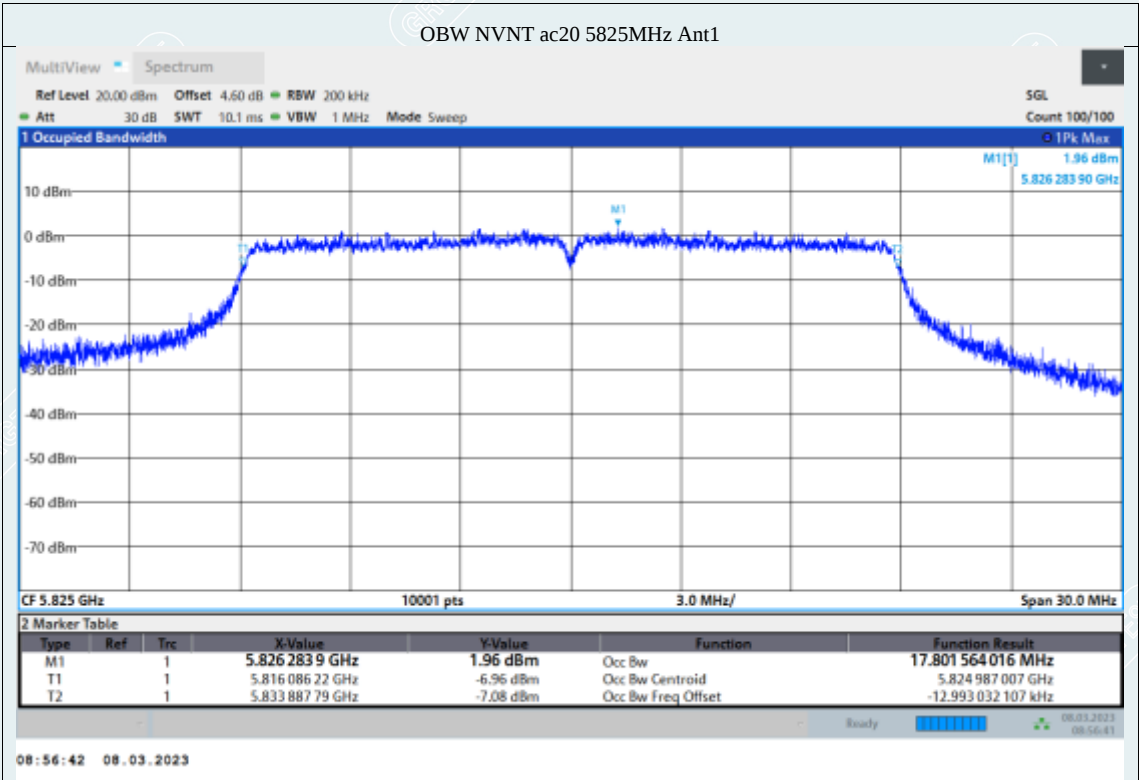


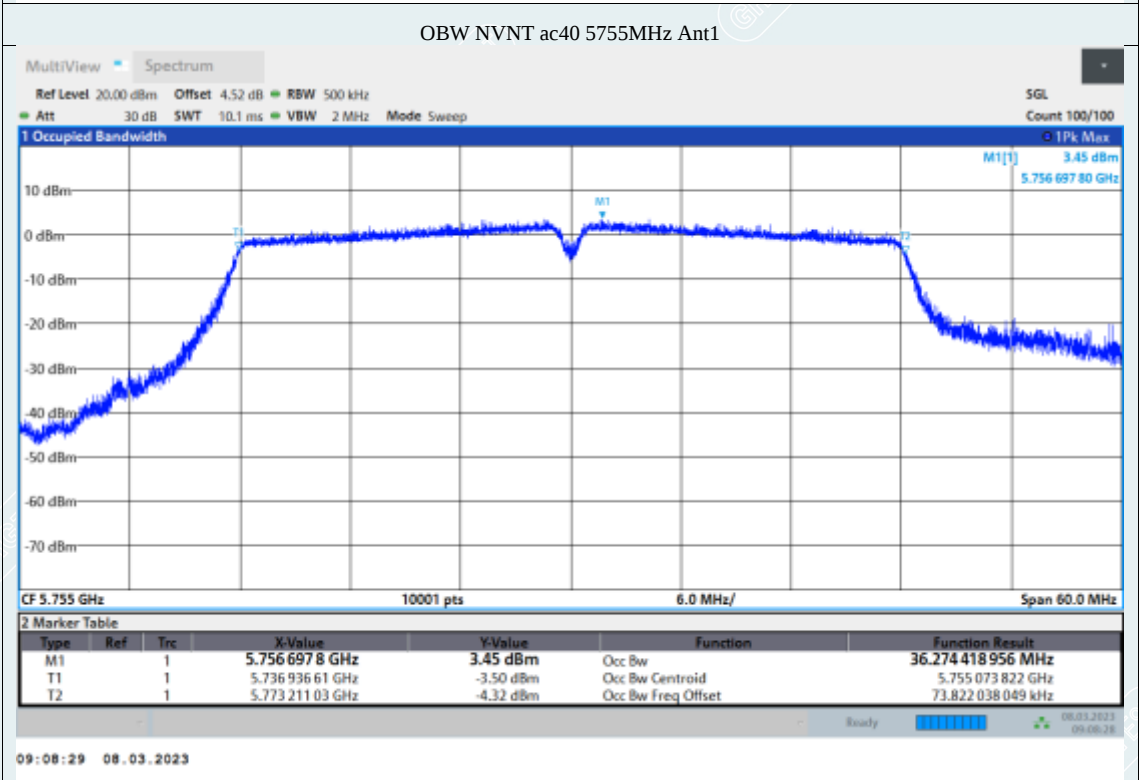
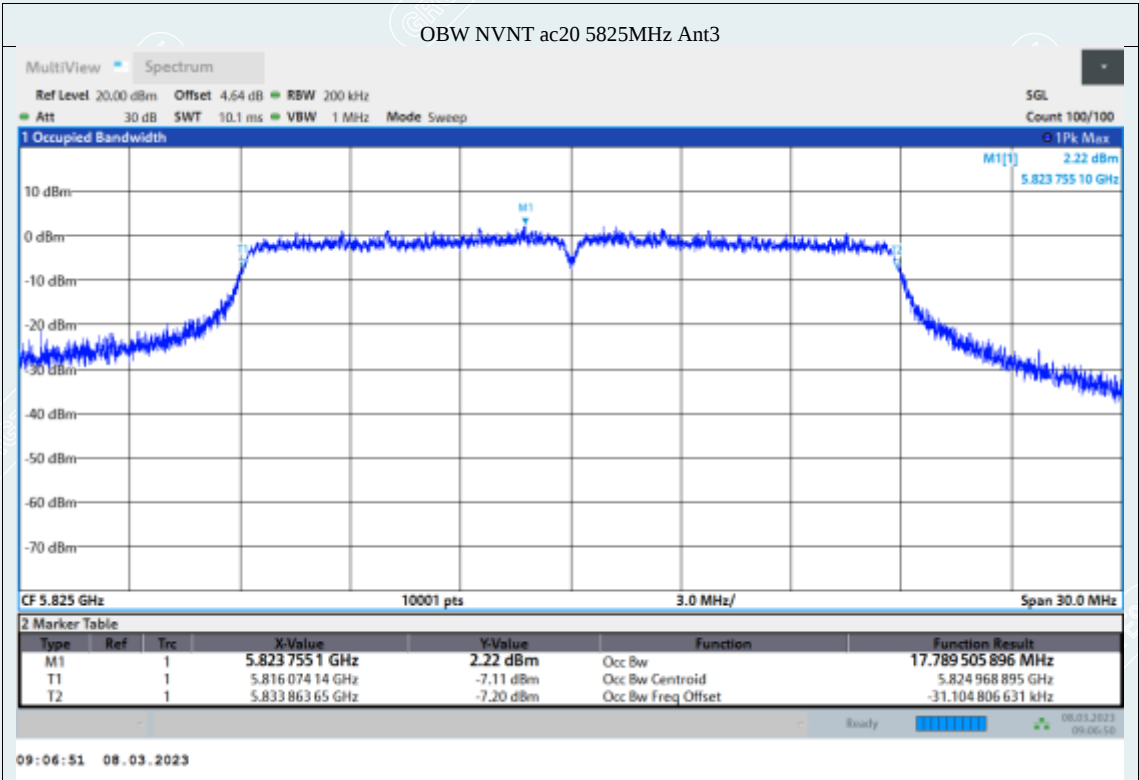


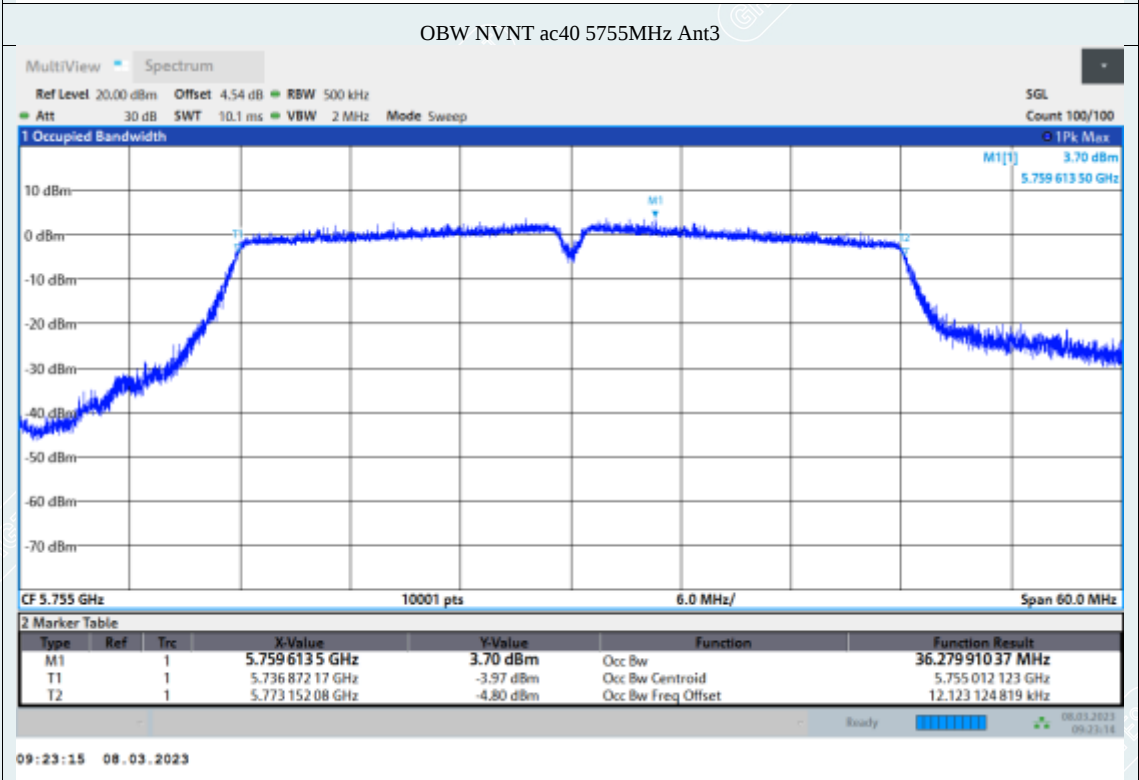
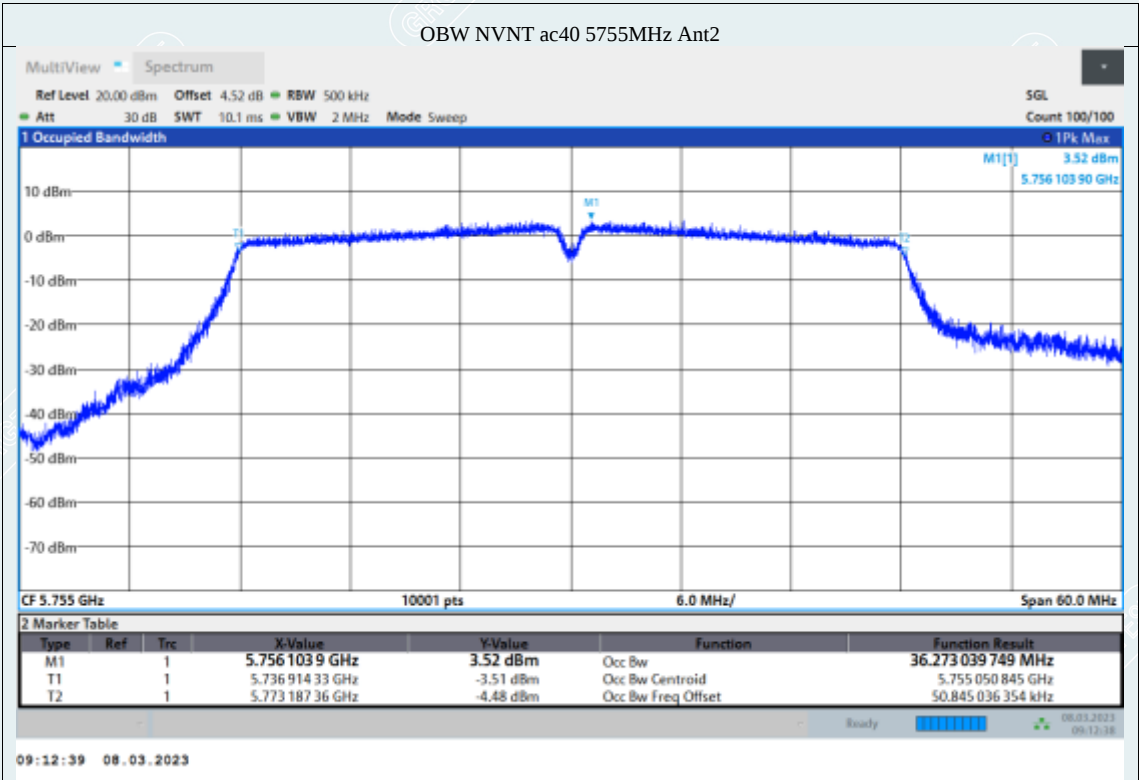


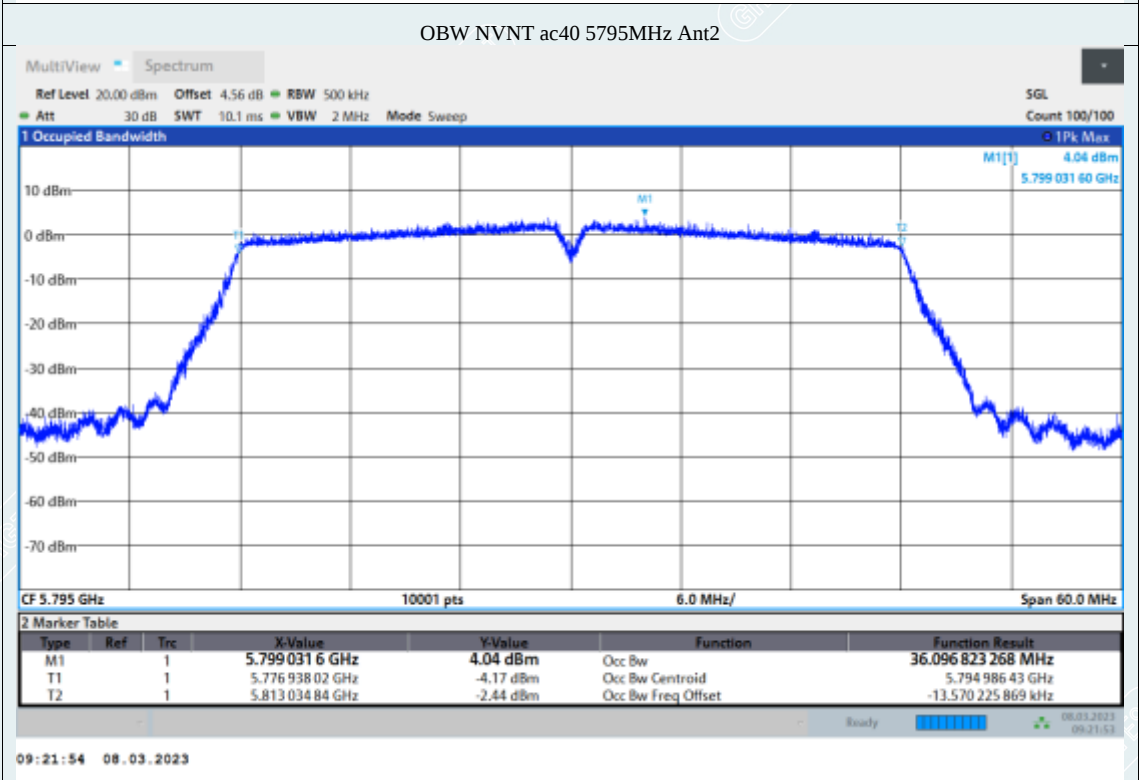
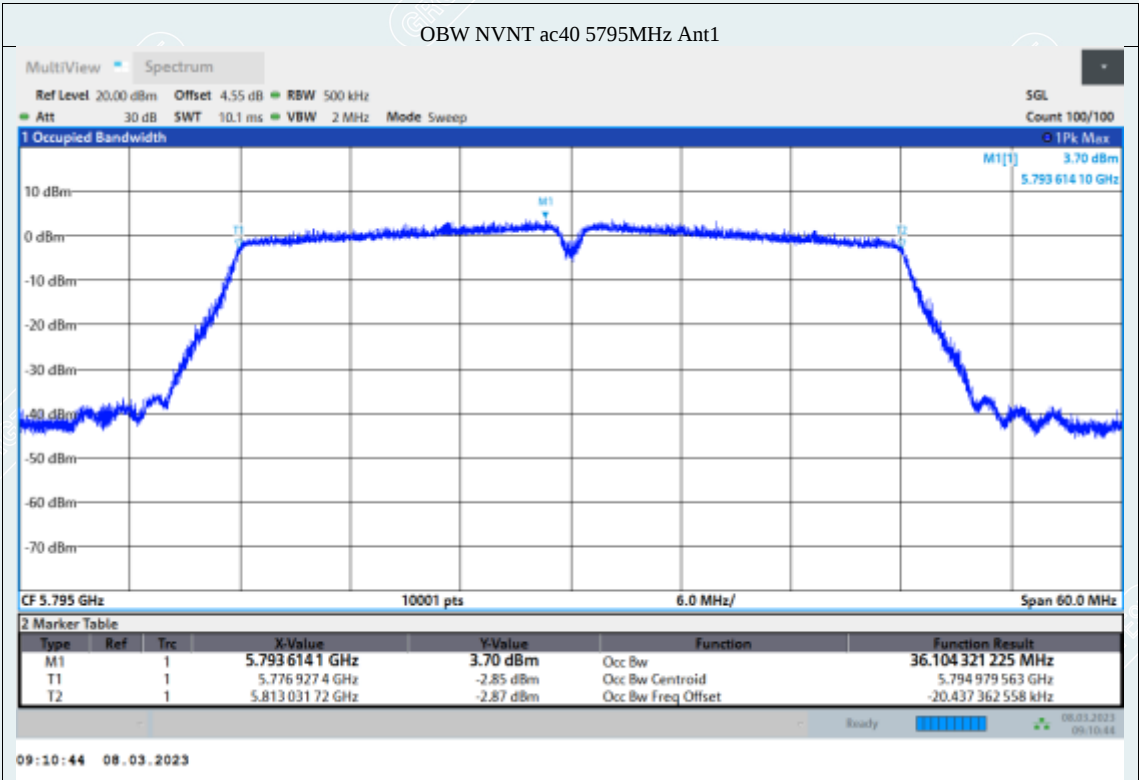


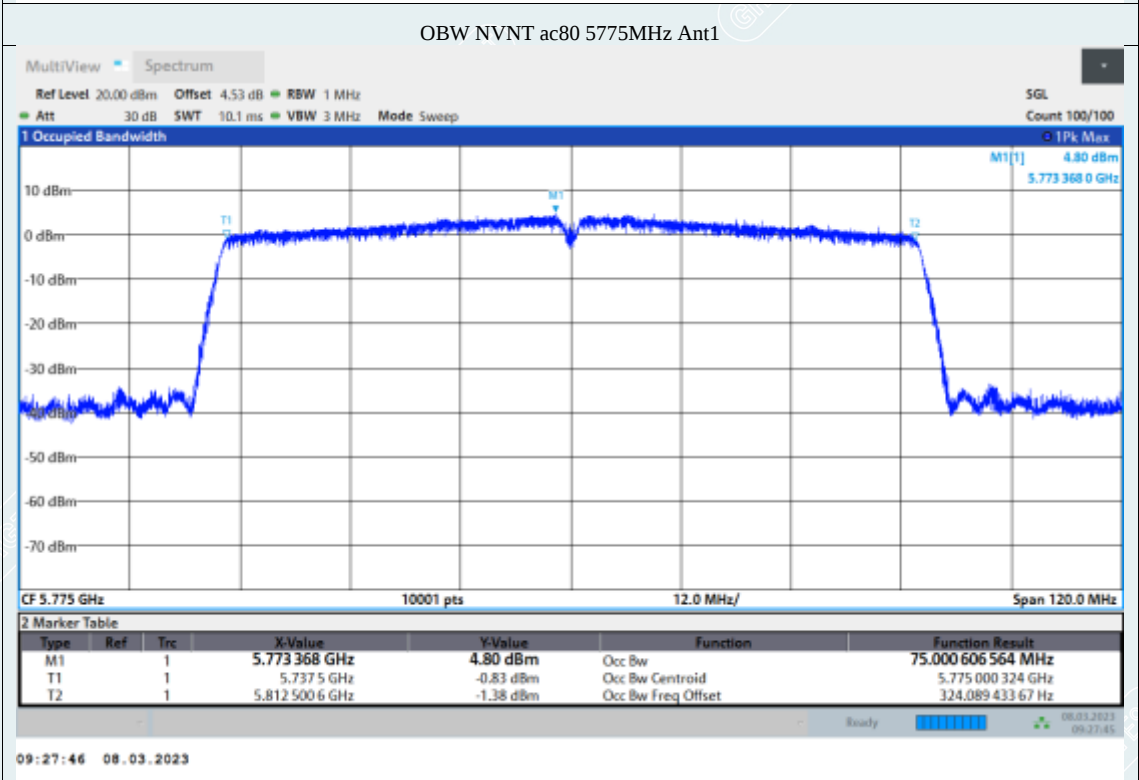
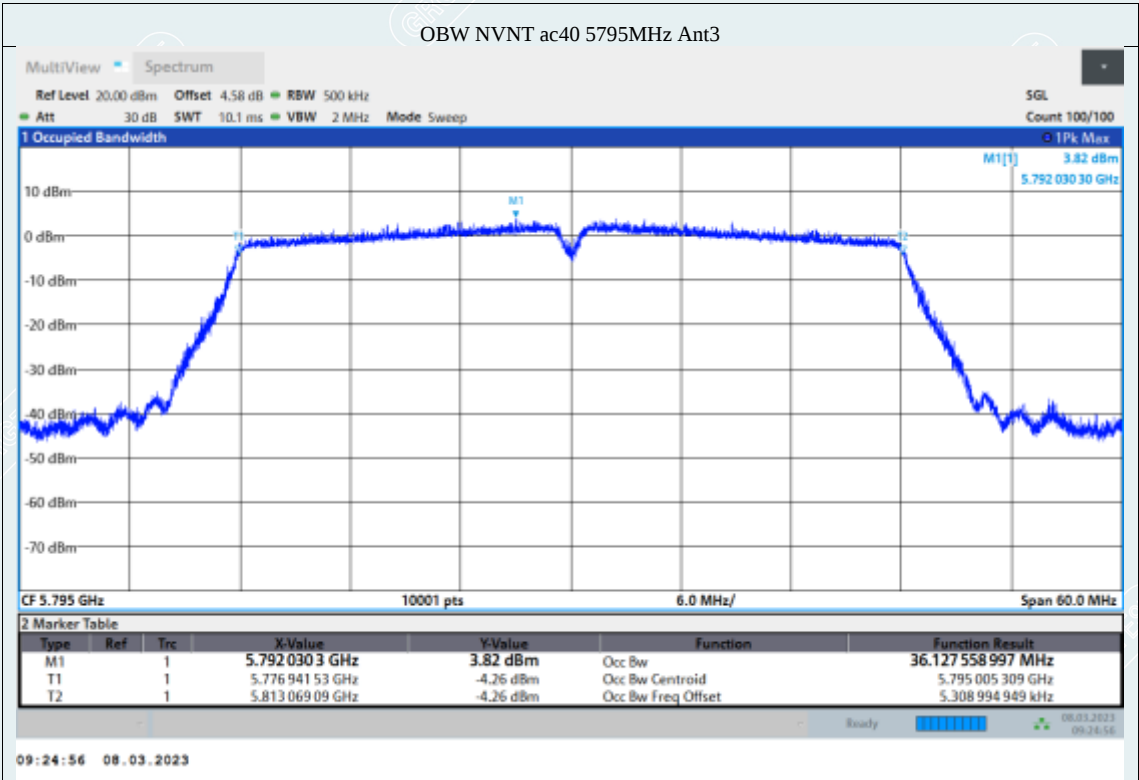


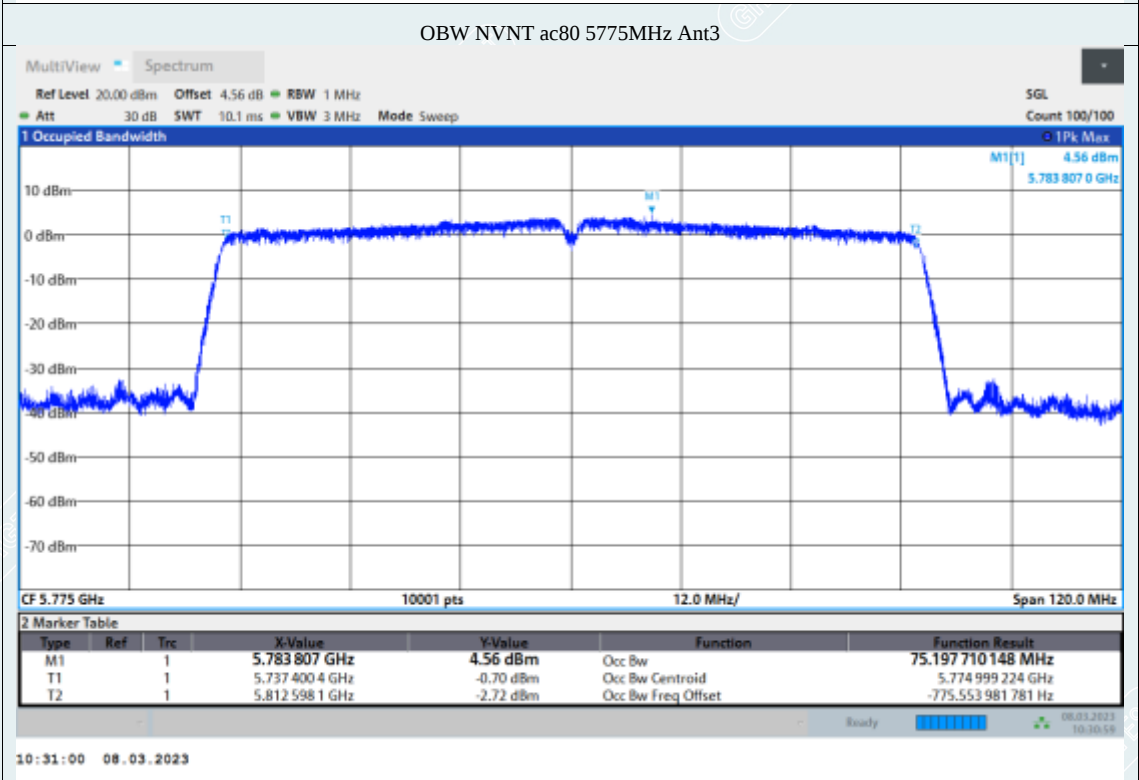
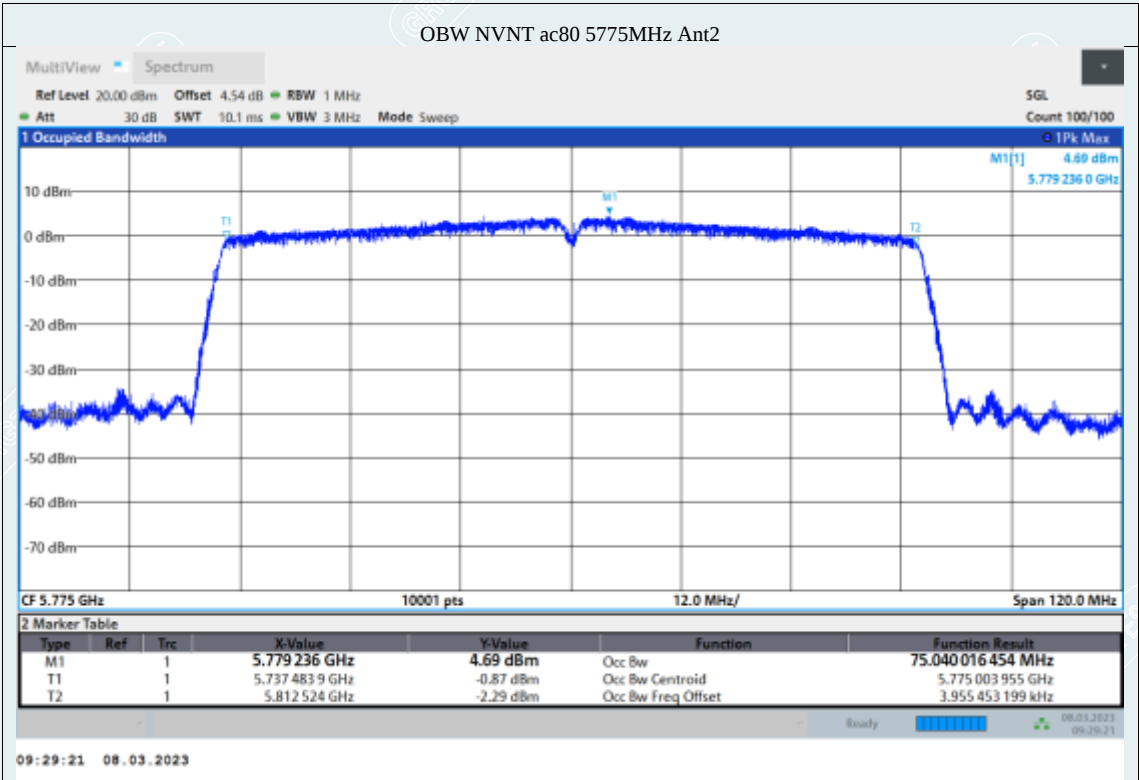


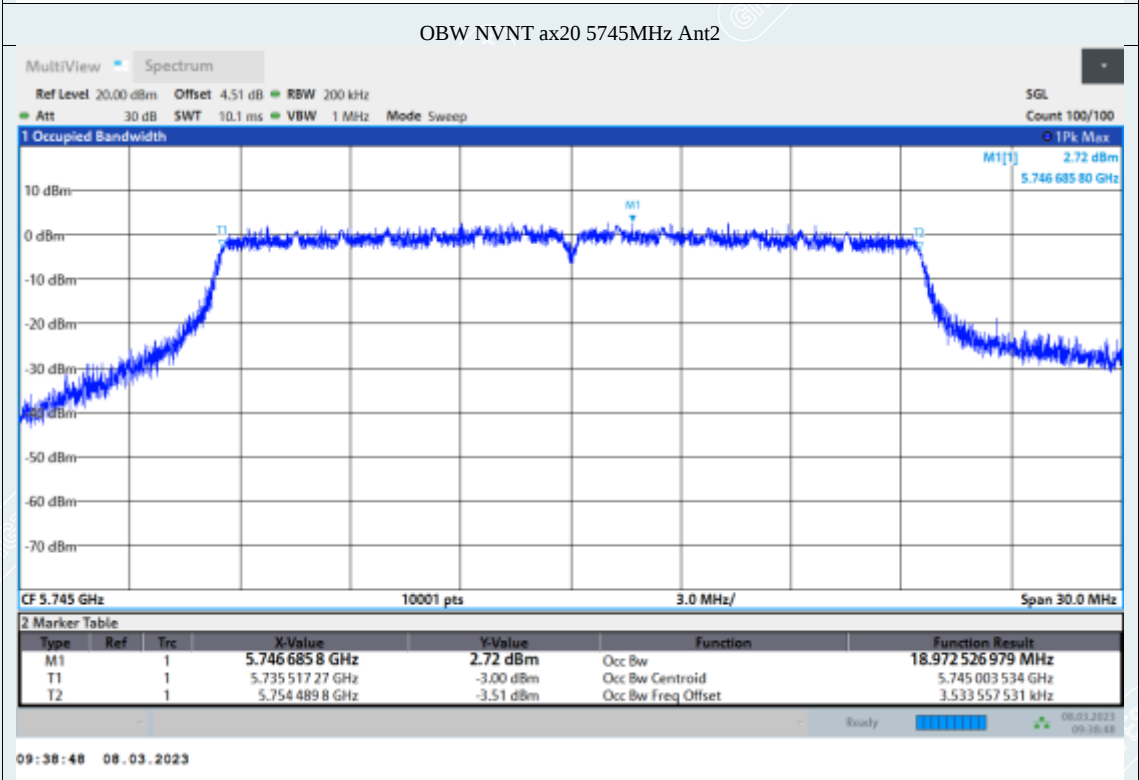
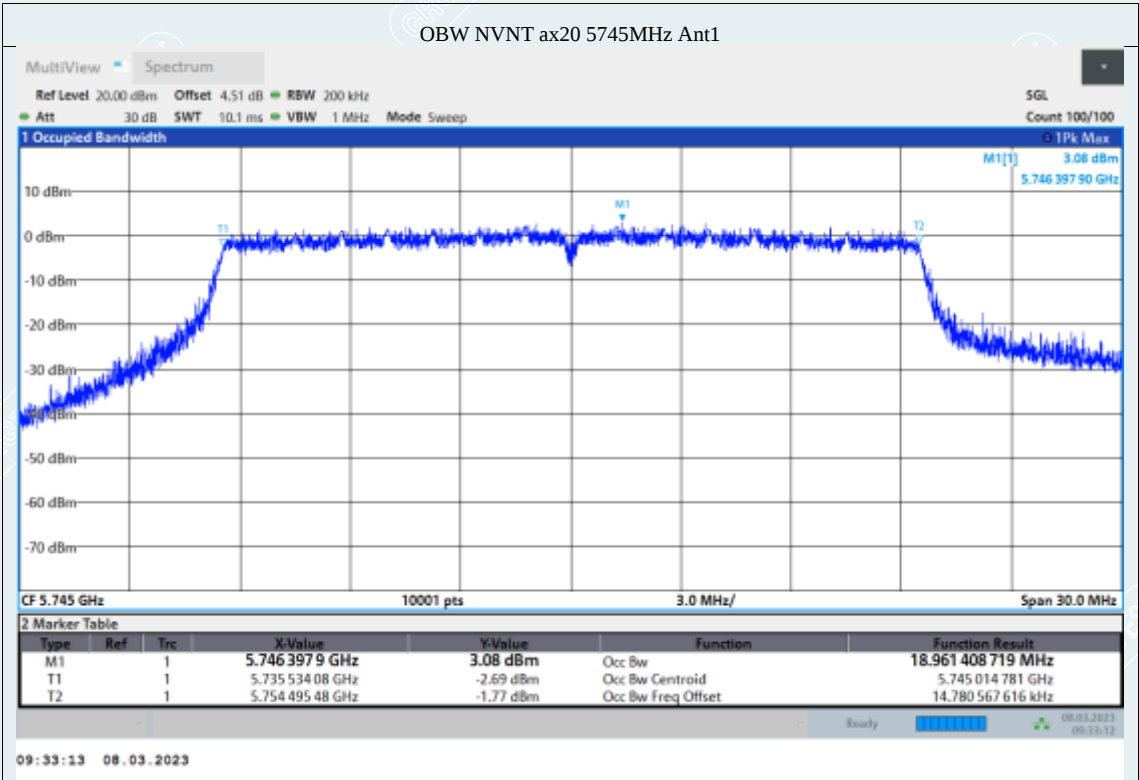


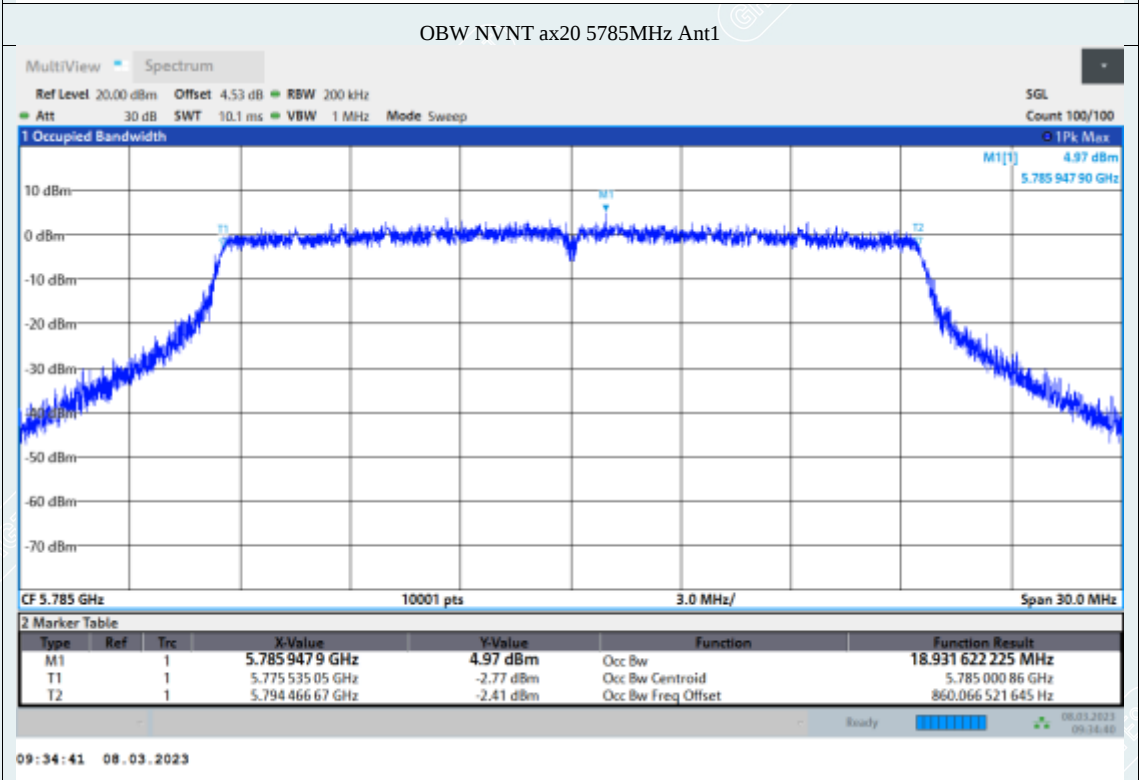
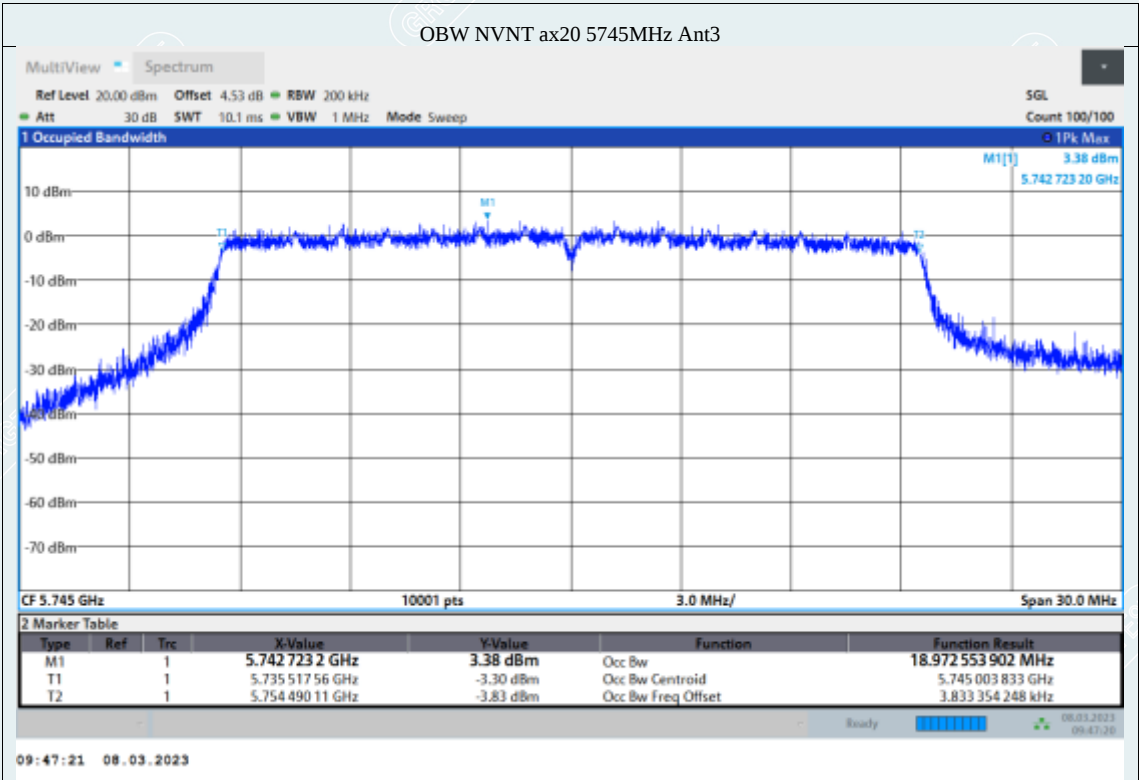


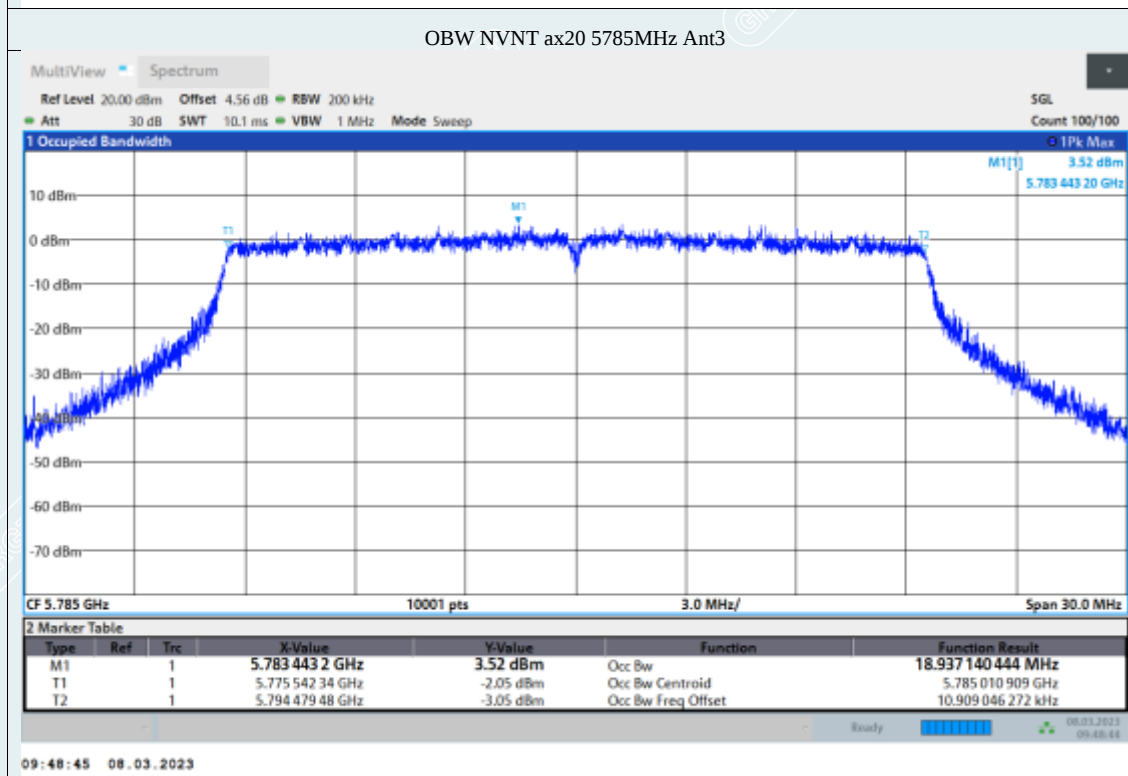
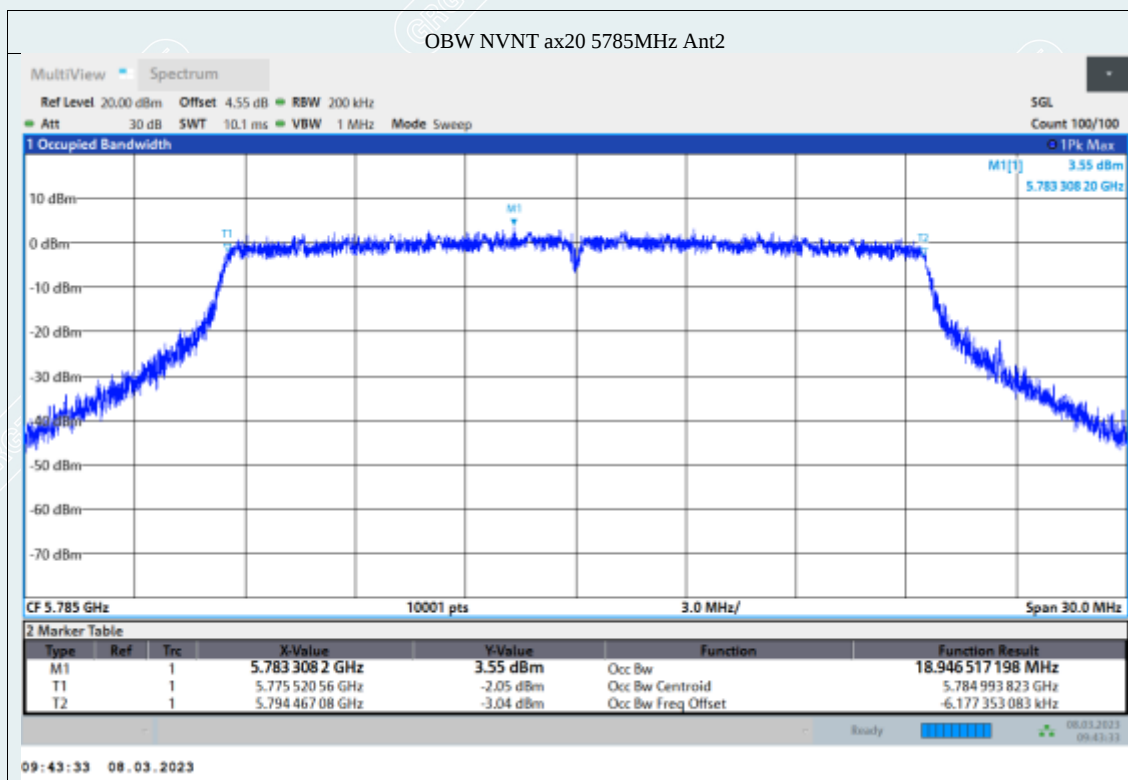


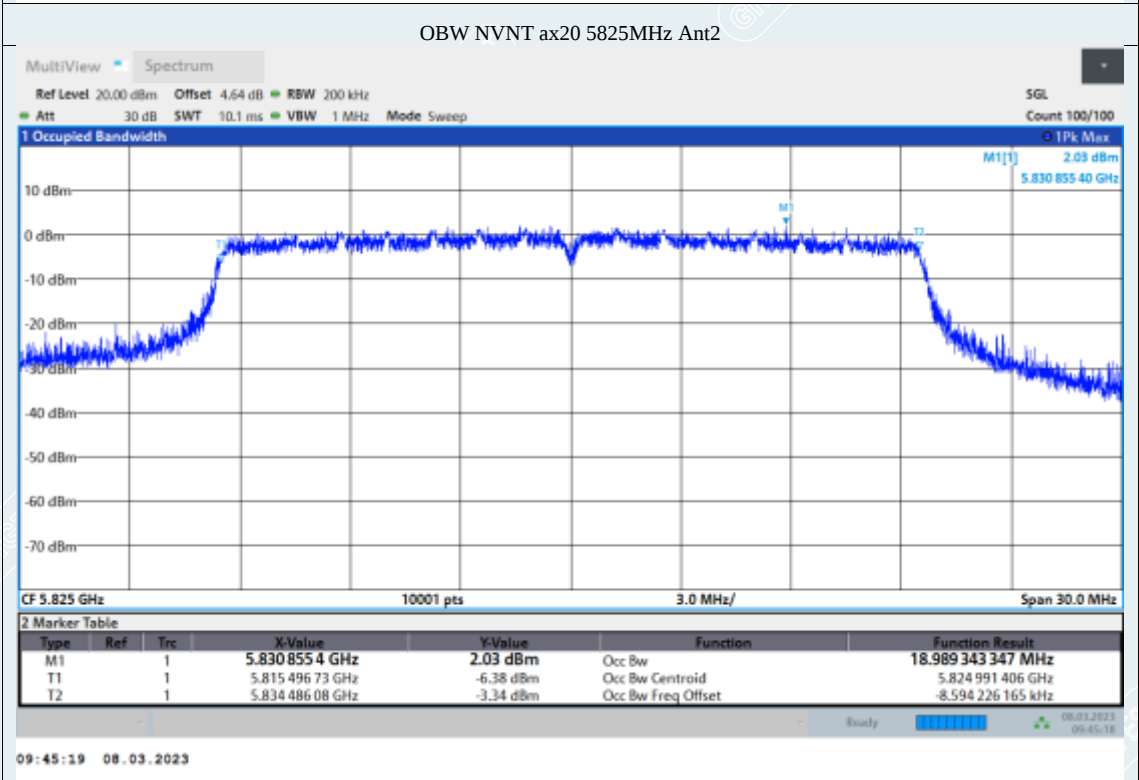
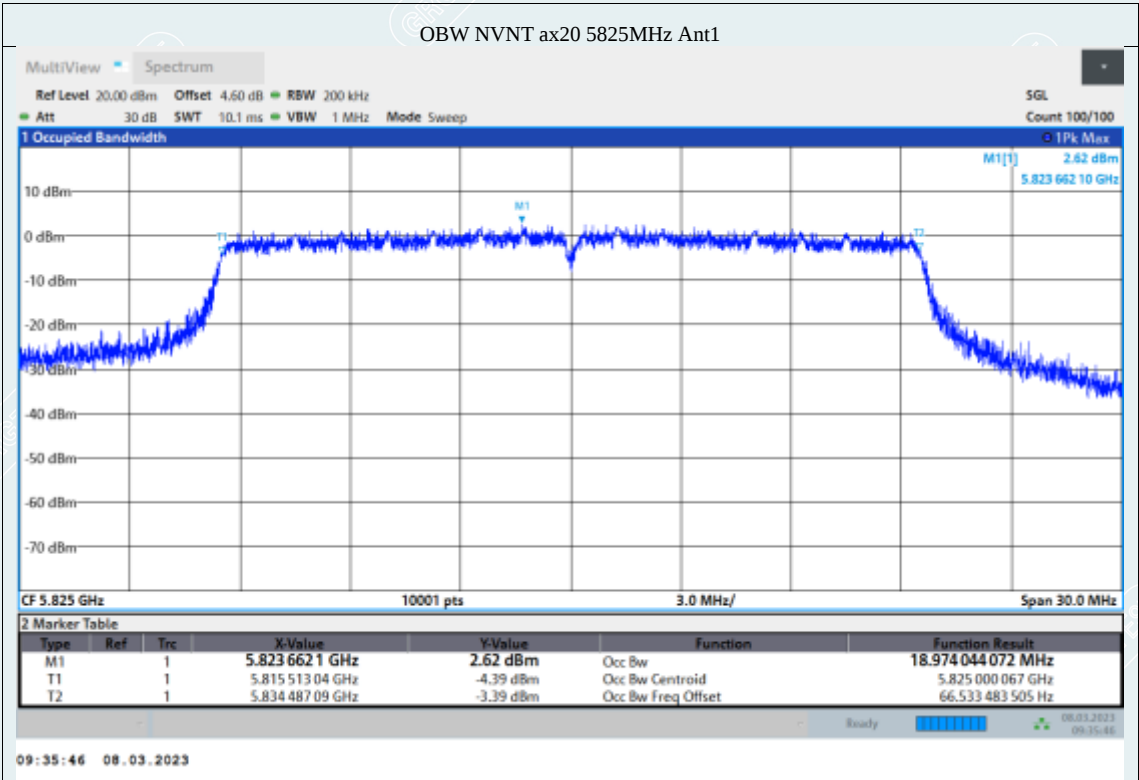


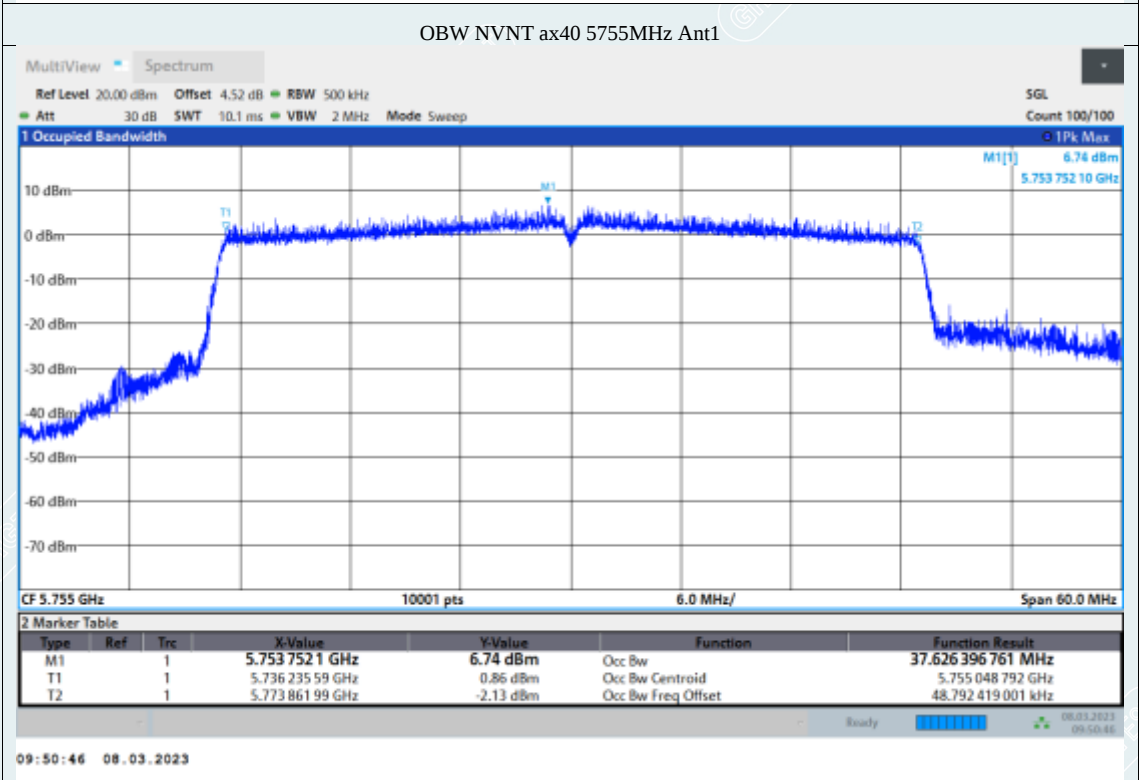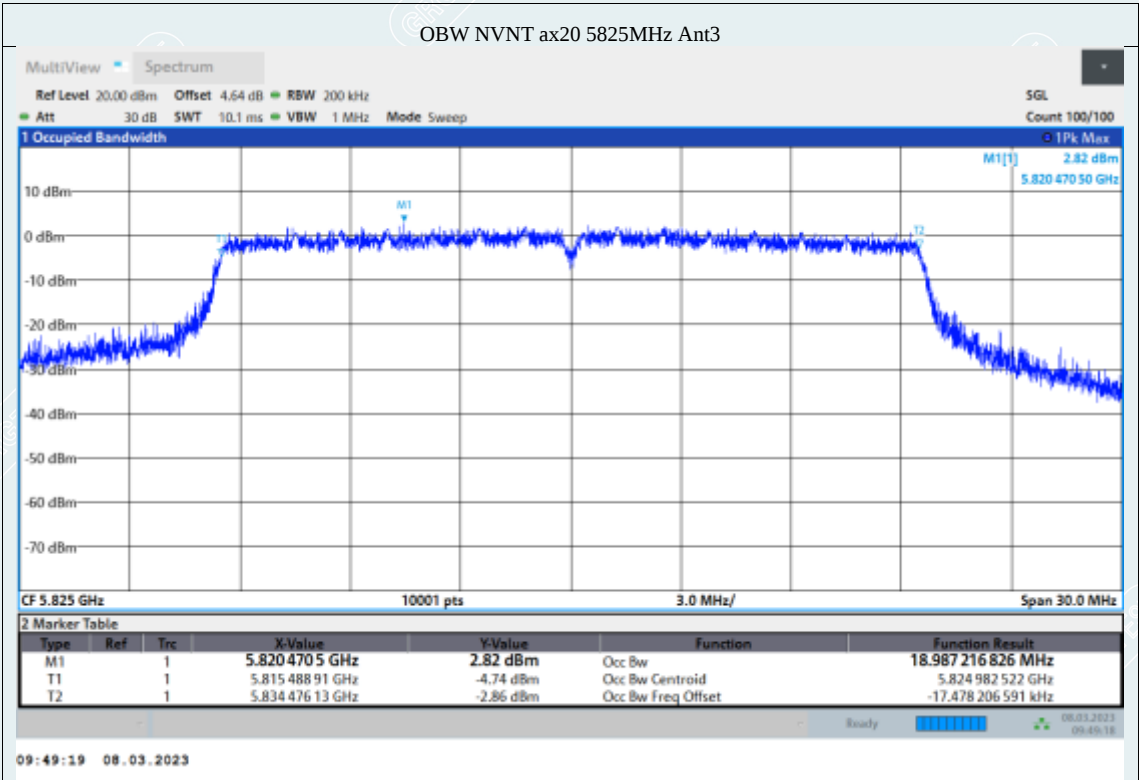

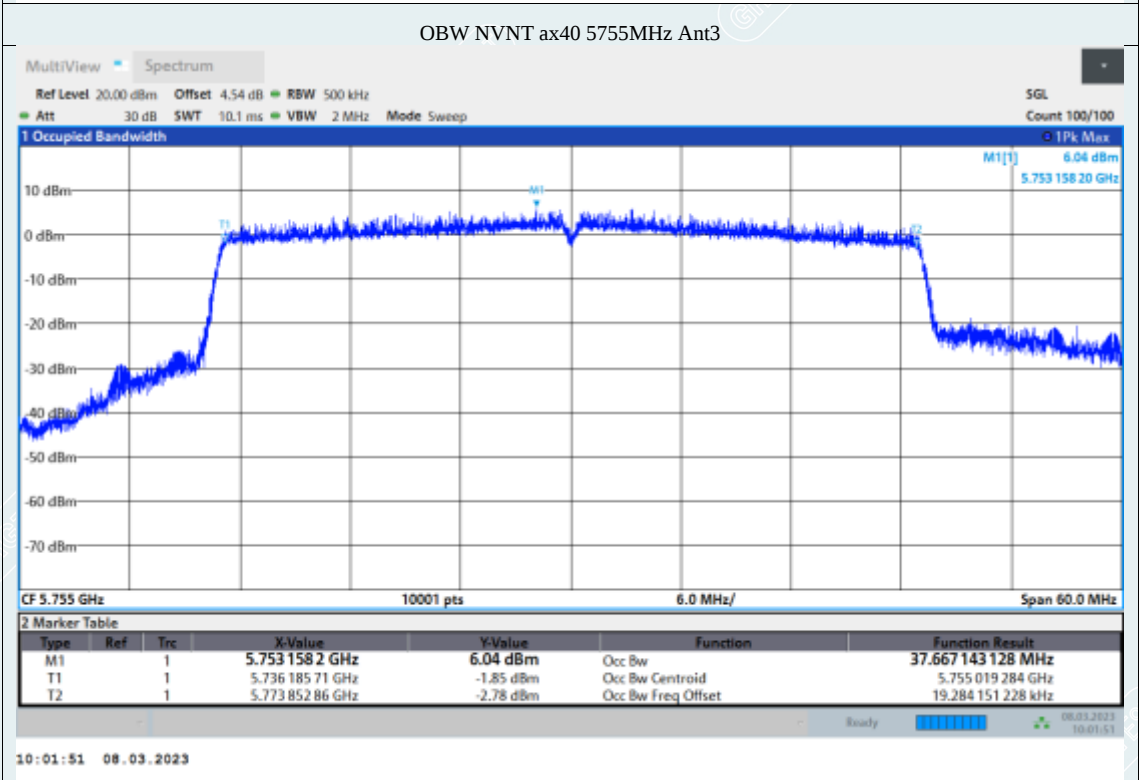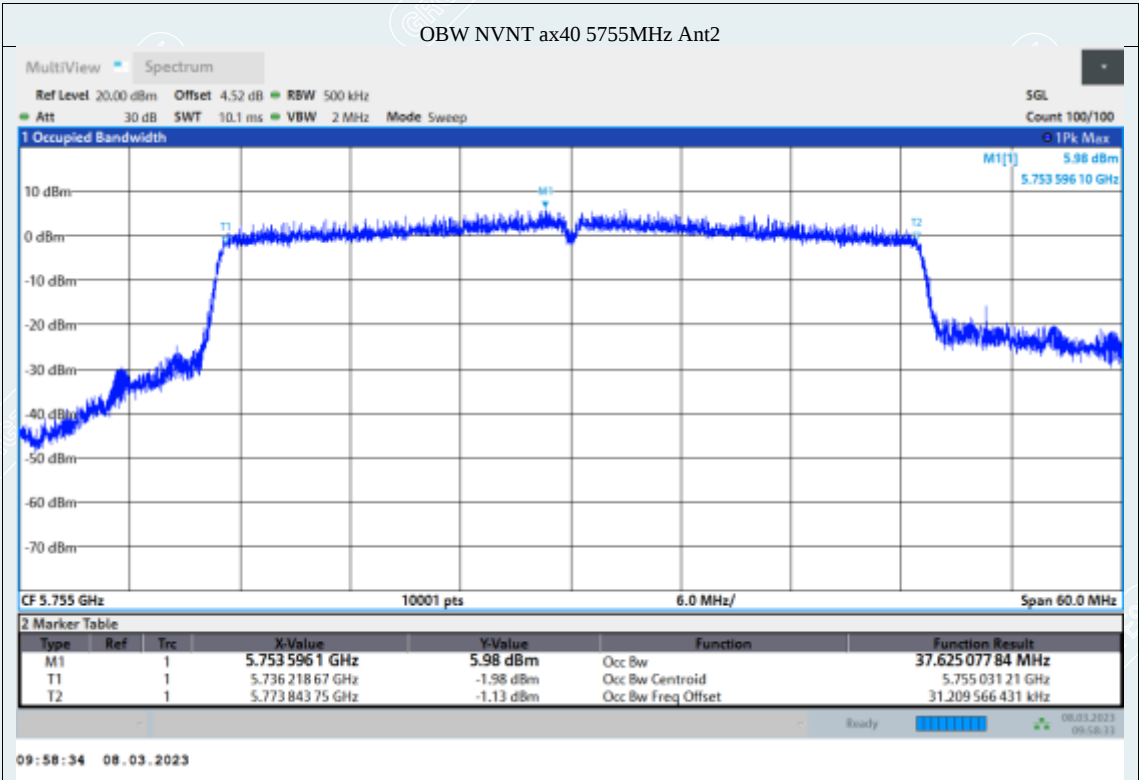

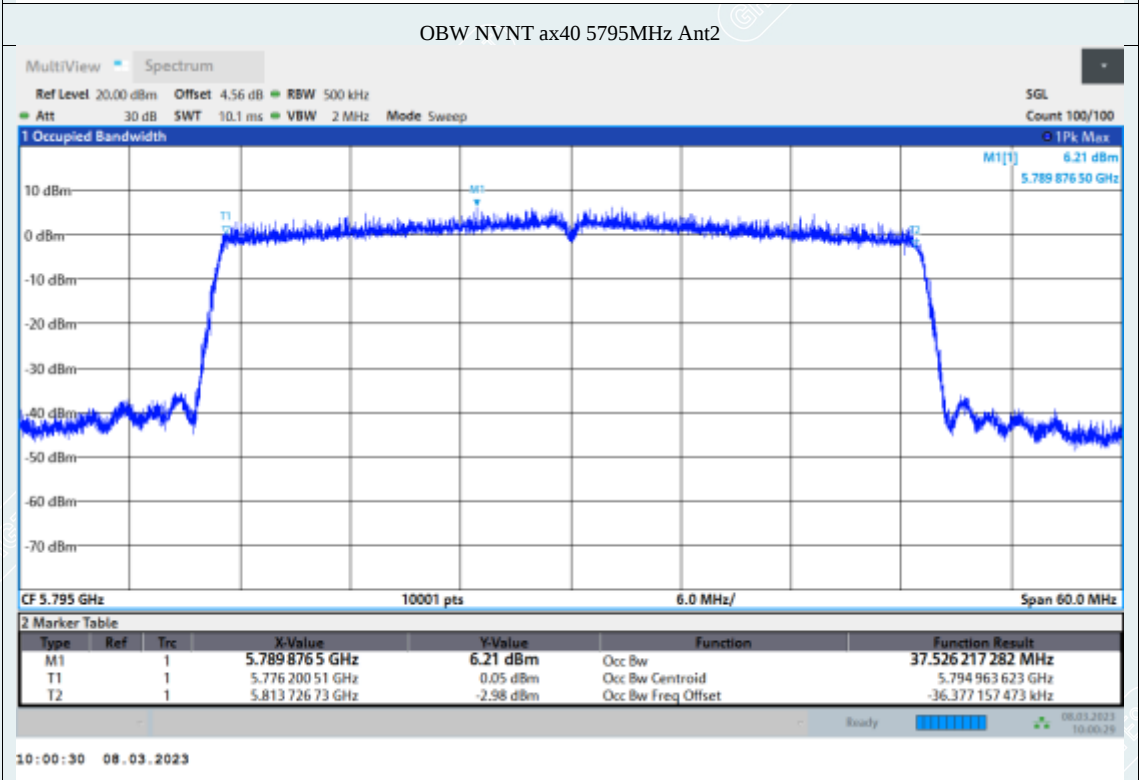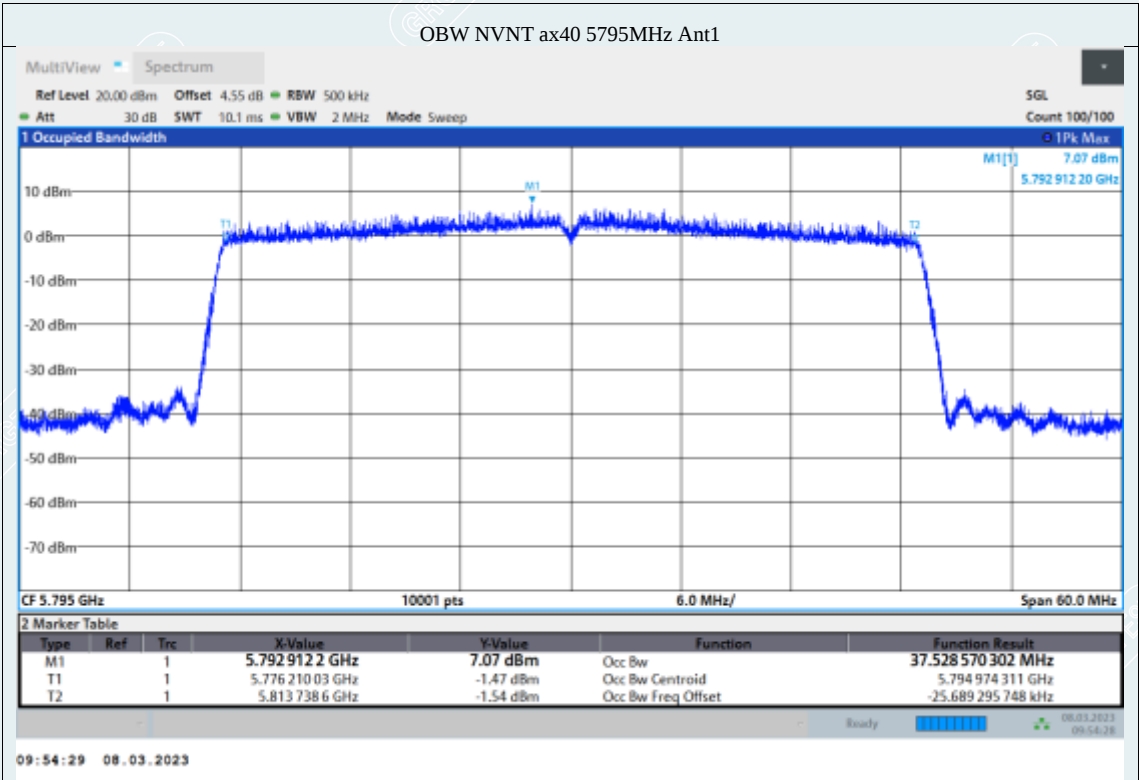

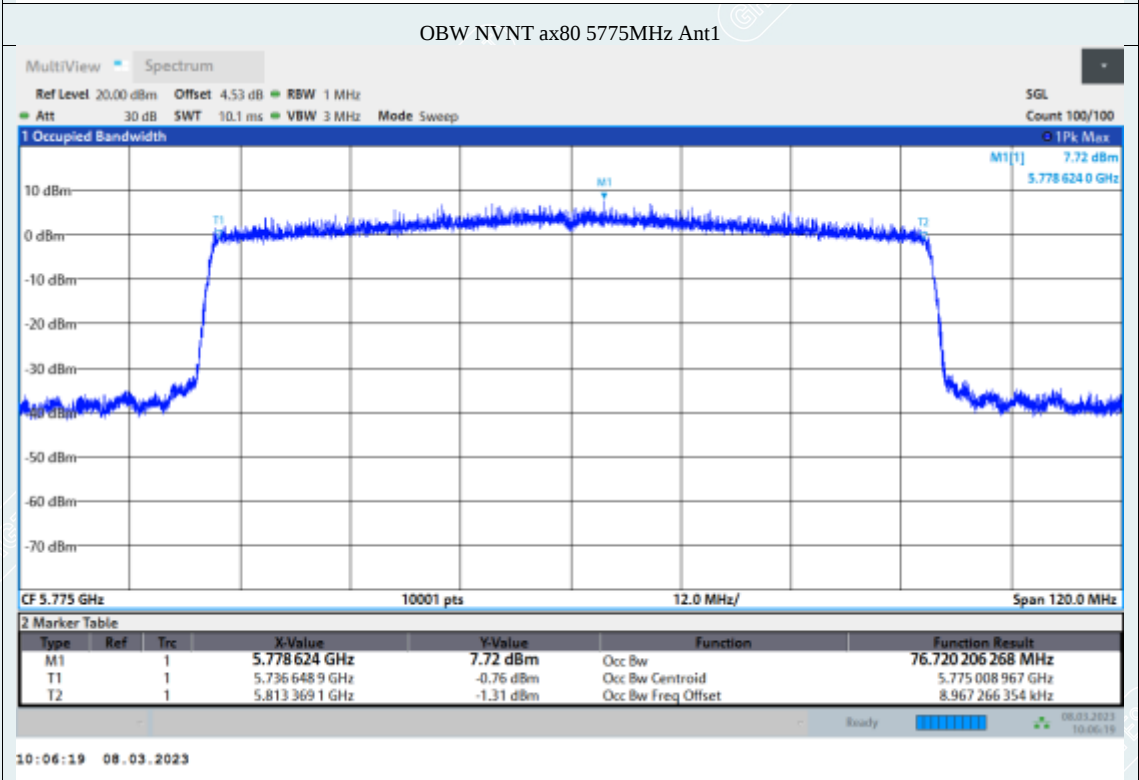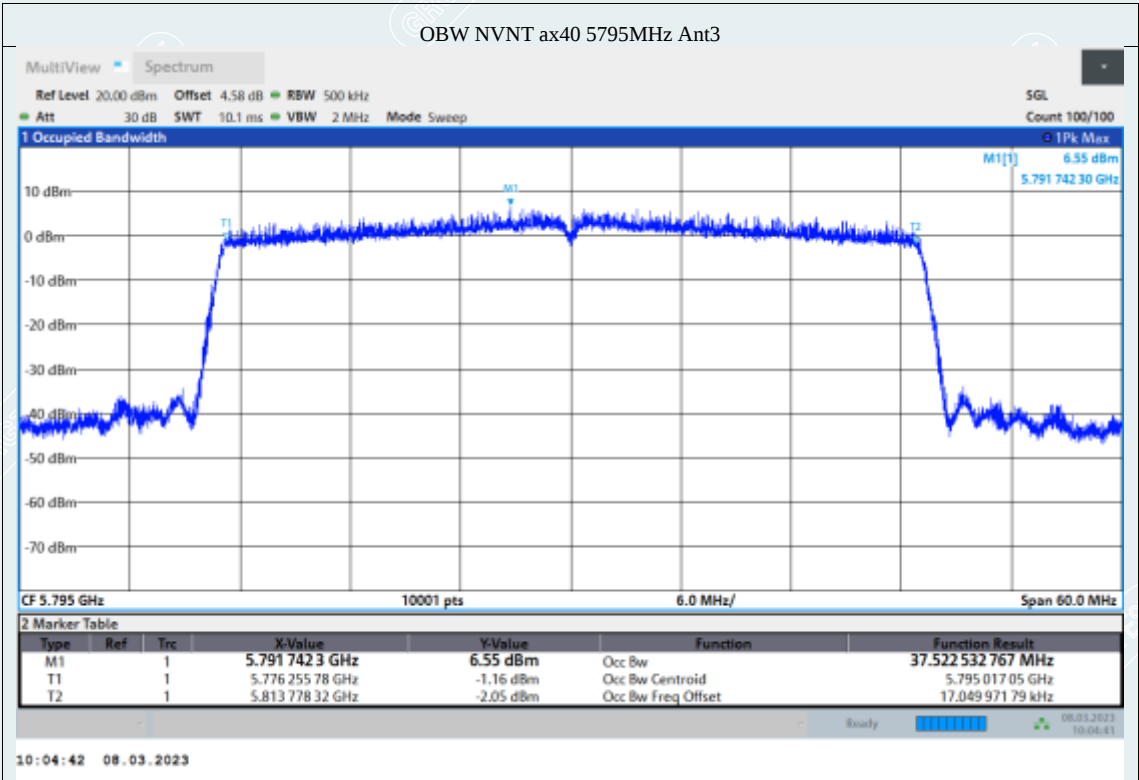

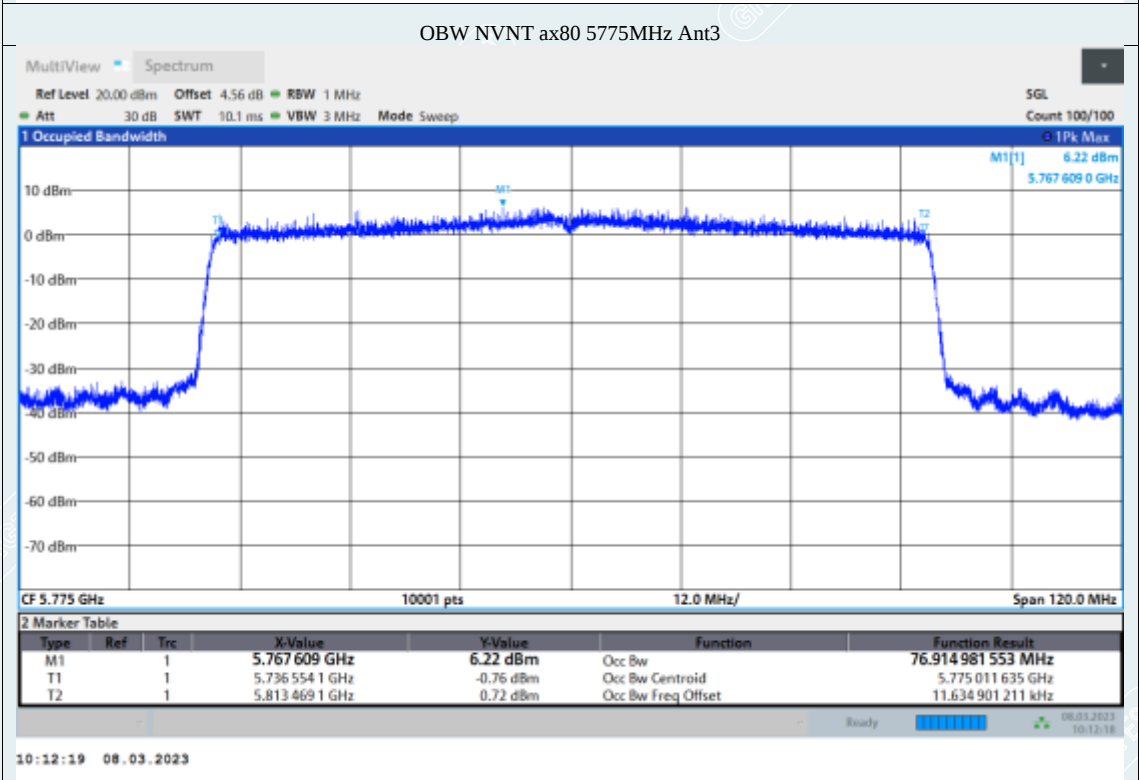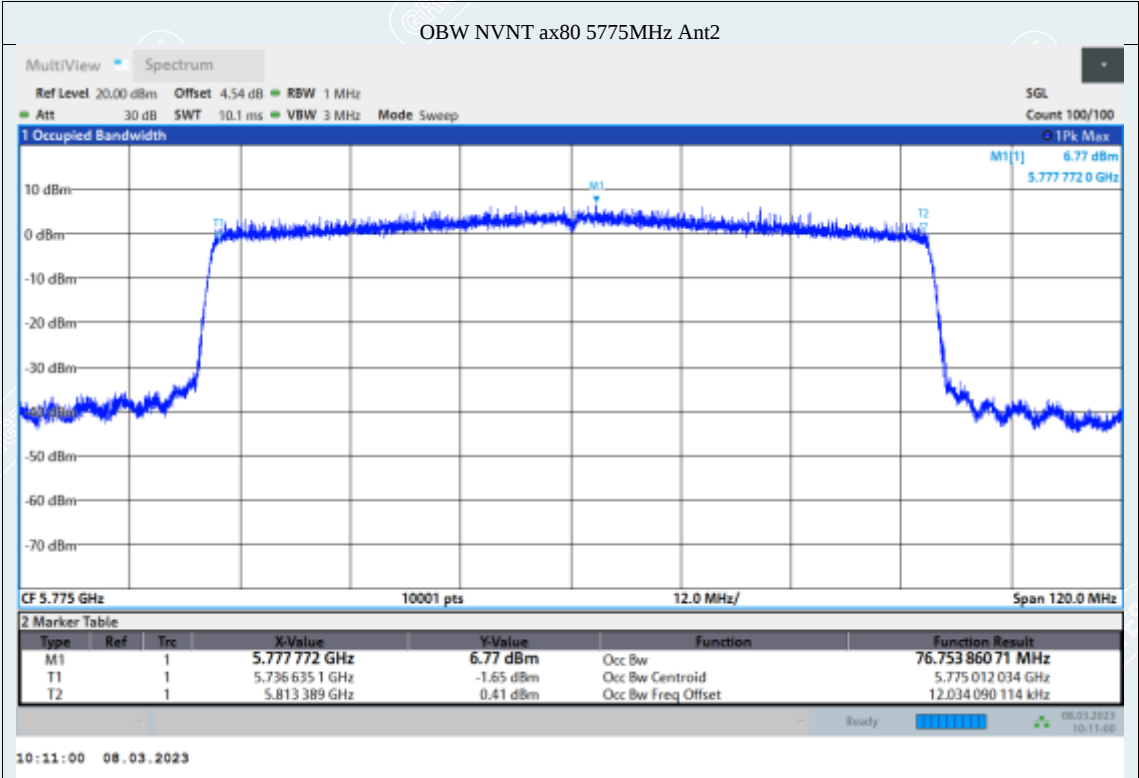

----- The following blanks -----

9. OUTPUT POWER

9.1. LIMITS

The FCC 15.407(a), The maximum conducted output power should not exceed:

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	1W(30dBm) (Max. e.i.r.p $\leq$ 125mW at any elevation angle above 30 degrees as measured from the horizon)
	Indoor Access Point	1W(30dBm)
	Fixed point-to-point Access Point	1W(30dBm)
	Mobile and Portable Client Device	250mW(23.98dBm)
U-NII-2A	All Device	250mW(23.98dBm) or 11dBm+10 log B*, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-2C	All Device	250mW(23.98dBm) or 11dBm+10 log B*, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-3	All Device	1W(30dBm)

Note:

The EUT is indoor access point.


The U-NII-2A minimum 26dB bandwidth is 21.108MHz

The U-NII-2C minimum 26dB bandwidth is 21.24MHz

9.2. TEST PROCEDURES

- 1) The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2) Set to the maximum power setting and enable the EUT transmit continuously.
- 3) Measure the conducted average output power and record the results in the test report.

9.3. TEST SETUP

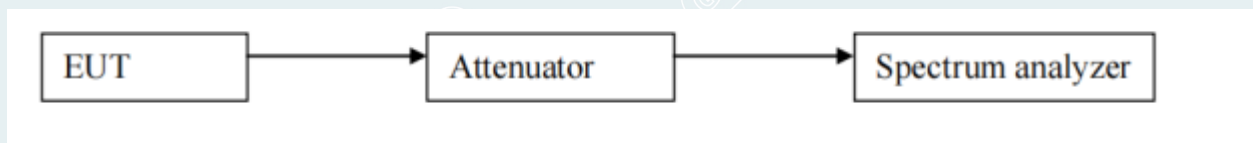

----- The following blanks -----

9.4. TEST RESULTS

Environmental Conditions	20.9℃/47%RH/101.1kPa	Test Voltage	AC120V/60Hz
Tested By	Qin Tingting	Tested Date	2023/02/28~2023/03/15

BAND U-NII-1:

Mode	Frequency (MHz)	Antenna	AVG Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	Ant1	8.68	0.17	8.85	30	Pass
a	5180	Ant2	8.89	0.17	9.06	30	Pass
a	5180	Ant3	8.64	0.17	8.81	30	Pass
a	5200	Ant1	7.99	0.17	8.16	30	Pass
a	5200	Ant2	8.73	0.17	8.9	30	Pass
a	5200	Ant3	8.87	0.17	9.04	30	Pass
a	5240	Ant1	8.6	0.17	8.77	30	Pass
a	5240	Ant2	8.66	0.17	8.83	30	Pass
a	5240	Ant3	8.82	0.17	8.99	30	Pass
n20	5180	Ant1	8.23	0.18	8.41	30	Pass
n20	5180	Ant2	8.1	0.18	8.28	30	Pass
n20	5180	Ant3	8.28	0.18	8.46	30	Pass
n20	5180	Sum	12.98	-	13.16	30	Pass
n20	5200	Ant1	7.69	0.18	7.87	30	Pass
n20	5200	Ant2	8.37	0.18	8.55	30	Pass
n20	5200	Ant3	8.35	0.18	8.53	30	Pass
n20	5200	Sum	12.92	-	13.1	30	Pass
n20	5240	Ant1	7.49	0.18	7.67	30	Pass
n20	5240	Ant2	8.37	0.18	8.55	30	Pass
n20	5240	Ant3	8.73	0.18	8.91	30	Pass
n20	5240	Sum	13	-	13.18	30	Pass
n40	5190	Ant1	6.32	0.35	6.67	30	Pass
n40	5190	Ant2	6.15	0.36	6.51	30	Pass
n40	5190	Ant3	6.8	0.35	7.15	30	Pass
n40	5190	Sum	11.21	-	11.56	30	Pass
n40	5230	Ant1	6.38	0.35	6.73	30	Pass
n40	5230	Ant2	6.8	0.35	7.15	30	Pass
n40	5230	Ant3	6.96	0.36	7.32	30	Pass
n40	5230	Sum	11.49	-	11.85	30	Pass
ac20	5180	Ant1	8.64	0.18	8.82	30	Pass
ac20	5180	Ant2	8.45	0.18	8.63	30	Pass
ac20	5180	Ant3	8.24	0.18	8.42	30	Pass
ac20	5180	Sum	13.22	-	13.4	30	Pass
ac20	5200	Ant1	8.63	0.18	8.81	30	Pass
ac20	5200	Ant2	7.96	0.18	8.14	30	Pass

ac20	5200	Ant3	7.46	0.18	7.64	30	Pass
ac20	5200	Sum	12.82	-	13	30	Pass
ac20	5240	Ant1	7.66	0.18	7.84	30	Pass
ac20	5240	Ant2	8.49	0.18	8.67	30	Pass
ac20	5240	Ant3	8.35	0.18	8.53	30	Pass
ac20	5240	Sum	12.96	-	13.14	30	Pass
ac40	5190	Ant1	6.49	0.35	6.84	30	Pass
ac40	5190	Ant2	6.12	0.36	6.48	30	Pass
ac40	5190	Ant3	6.43	0.36	6.79	30	Pass
ac40	5190	Sum	11.12	-	11.47	30	Pass
ac40	5230	Ant1	5.87	0.36	6.23	30	Pass
ac40	5230	Ant2	7.56	0.36	7.92	30	Pass
ac40	5230	Ant3	7.06	0.36	7.42	30	Pass
ac40	5230	Sum	11.66	-	12.02	30	Pass
ac80	5210	Ant1	3.2	0.69	3.89	30	Pass
ac80	5210	Ant2	3.77	0.68	4.45	30	Pass
ac80	5210	Ant3	3.97	0.69	4.66	30	Pass
ac80	5210	Sum	8.43	-	9.12	30	Pass
ax20	5180	Ant1	2.54	0.69	3.23	30	Pass
ax20	5180	Ant2	2.31	0.69	3	30	Pass
ax20	5180	Ant3	3.19	0.71	3.9	30	Pass
ax20	5180	Sum	7.47	-	8.17	30	Pass
ax20	5200	Ant1	2.23	0.71	2.94	30	Pass
ax20	5200	Ant2	2.36	0.69	3.05	30	Pass
ax20	5200	Ant3	2.7	0.71	3.41	30	Pass
ax20	5200	Sum	7.21	-	7.91	30	Pass
ax20	5240	Ant1	2.39	0.71	3.1	30	Pass
ax20	5240	Ant2	3.87	0.69	4.56	30	Pass
ax20	5240	Ant3	2.98	0.71	3.69	30	Pass
ax20	5240	Sum	7.89	-	8.6	30	Pass
ax40	5190	Ant1	2.98	0.7	3.68	30	Pass
ax40	5190	Ant2	2.75	0.72	3.47	30	Pass
ax40	5190	Ant3	3.23	0.7	3.93	30	Pass
ax40	5190	Sum	7.76	-	8.47	30	Pass
ax40	5230	Ant1	2.57	0.7	3.27	30	Pass
ax40	5230	Ant2	3.16	0.72	3.88	30	Pass
ax40	5230	Ant3	3.44	0.72	4.16	30	Pass
ax40	5230	Sum	7.85	-	8.56	30	Pass
ax80	5210	Ant1	3.35	0.75	4.1	30	Pass
ax80	5210	Ant2	3.23	0.75	3.98	30	Pass
ax80	5210	Ant3	3.79	0.73	4.52	30	Pass
ax80	5210	Sum	8.23	-	8.98	30	Pass

BAND U-NII-2A:

Mode	Frequency (MHz)	Antenna	AVG Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5260	Ant1	8.58	0.17	8.75	23.98	Pass
a	5260	Ant2	8.8	0.17	8.97	23.98	Pass
a	5260	Ant3	9.45	0.17	9.62	23.98	Pass
a	5280	Ant1	8.31	0.17	8.48	23.98	Pass
a	5280	Ant2	9.24	0.17	9.41	23.98	Pass
a	5280	Ant3	9.8	0.17	9.97	23.98	Pass
a	5320	Ant1	8.26	0.17	8.43	23.98	Pass
a	5320	Ant2	8.35	0.17	8.52	23.98	Pass
a	5320	Ant3	9.58	0.17	9.75	23.98	Pass
n20	5260	Ant1	8.51	0.18	8.69	23.98	Pass
n20	5260	Ant2	8.38	0.18	8.56	23.98	Pass
n20	5260	Ant3	7.93	0.18	8.11	23.98	Pass
n20	5260	Sum	13.05	-	13.23	23.98	Pass
n20	5280	Ant1	8.52	0.18	8.7	23.98	Pass
n20	5280	Ant2	8.78	0.18	8.96	23.98	Pass
n20	5280	Ant3	9.5	0.18	9.68	23.98	Pass
n20	5280	Sum	13.72	-	13.9	23.98	Pass
n20	5320	Ant1	7.53	0.18	7.71	23.98	Pass
n20	5320	Ant2	8.4	0.18	8.58	23.98	Pass
n20	5320	Ant3	8.27	0.18	8.45	23.98	Pass
n20	5320	Sum	12.86	-	13.04	23.98	Pass
n40	5270	Ant1	6.41	0.35	6.76	23.98	Pass
n40	5270	Ant2	6.57	0.36	6.93	23.98	Pass
n40	5270	Ant3	7.13	0.36	7.49	23.98	Pass
n40	5270	Sum	11.49	-	11.85	23.98	Pass
n40	5310	Ant1	5.8	0.36	6.16	23.98	Pass
n40	5310	Ant2	6.47	0.36	6.83	23.98	Pass
n40	5310	Ant3	7.23	0.36	7.59	23.98	Pass
n40	5310	Sum	11.31	-	11.67	23.98	Pass
ac20	5260	Ant1	7.57	0.18	7.75	23.98	Pass
ac20	5260	Ant2	8.51	0.18	8.69	23.98	Pass
ac20	5260	Ant3	8.97	0.18	9.15	23.98	Pass
ac20	5260	Sum	13.16	-	13.34	23.98	Pass
ac20	5280	Ant1	8.36	0.18	8.54	23.98	Pass
ac20	5280	Ant2	8.37	0.18	8.55	23.98	Pass
ac20	5280	Ant3	9.2	0.18	9.38	23.98	Pass
ac20	5280	Sum	13.44	-	13.62	23.98	Pass
ac20	5320	Ant1	8.05	0.18	8.23	23.98	Pass
ac20	5320	Ant2	7.85	0.18	8.03	23.98	Pass

ac20	5320	Ant3	9.32	0.18	9.5	23.98	Pass
ac20	5320	Sum	13.23	-	13.41	23.98	Pass
ac40	5270	Ant1	6.03	0.36	6.39	23.98	Pass
ac40	5270	Ant2	6.88	0.35	7.23	23.98	Pass
ac40	5270	Ant3	6.99	0.36	7.35	23.98	Pass
ac40	5270	Sum	11.43	-	11.78	23.98	Pass
ac40	5310	Ant1	5.98	0.36	6.34	23.98	Pass
ac40	5310	Ant2	6.4	0.36	6.76	23.98	Pass
ac40	5310	Ant3	7.3	0.35	7.65	23.98	Pass
ac40	5310	Sum	11.37	-	11.73	23.98	Pass
ac80	5290	Ant1	3.01	0.69	3.7	23.98	Pass
ac80	5290	Ant2	3.74	0.69	4.43	23.98	Pass
ac80	5290	Ant3	3.73	0.69	4.42	23.98	Pass
ac80	5290	Sum	8.28	-	8.97	23.98	Pass
ax20	5260	Ant1	7.57	0.23	7.8	23.98	Pass
ax20	5260	Ant2	8.29	0.23	8.52	23.98	Pass
ax20	5260	Ant3	7.75	0.23	7.98	23.98	Pass
ax20	5260	Sum	12.66	-	12.89	23.98	Pass
ax20	5280	Ant1	7.59	0.23	7.82	23.98	Pass
ax20	5280	Ant2	8.56	0.23	8.79	23.98	Pass
ax20	5280	Ant3	7.53	0.23	7.76	23.98	Pass
ax20	5280	Sum	12.69	-	12.92	23.98	Pass
ax20	5320	Ant1	7.6	0.23	7.83	23.98	Pass
ax20	5320	Ant2	7.98	0.23	8.21	23.98	Pass
ax20	5320	Ant3	7.34	0.23	7.57	23.98	Pass
ax20	5320	Sum	12.42	-	12.65	23.98	Pass
ax40	5270	Ant1	2.93	0.72	3.65	23.98	Pass
ax40	5270	Ant2	3.56	0.72	4.28	23.98	Pass
ax40	5270	Ant3	3.63	0.72	4.35	23.98	Pass
ax40	5270	Sum	8.16	-	8.88	23.98	Pass
ax40	5310	Ant1	2.82	0.72	3.54	23.98	Pass
ax40	5310	Ant2	3.1	0.71	3.81	23.98	Pass
ax40	5310	Ant3	3.37	0.72	4.09	23.98	Pass
ax40	5310	Sum	7.87	-	8.59	23.98	Pass
ax80	5290	Ant1	2.73	0.73	3.46	23.98	Pass
ax80	5290	Ant2	3.58	0.75	4.33	23.98	Pass
ax80	5290	Ant3	3.43	0.75	4.18	23.98	Pass
ax80	5290	Sum	8.04	-	8.78	23.98	Pass
ax160	5250	Ant1	3.34	0.73	4.07	23.98	Pass
ax160	5250	Ant2	3.59	0.74	4.33	23.98	Pass
ax160	5250	Ant3	3.74	0.74	4.48	23.98	Pass
ax160	5250	Sum	8.33	-	9.07	23.98	Pass

BAND U-NII-2C:

Mode	Frequency (MHz)	Antenna	AVG Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5500	Ant1	8.29	0.17	8.46	23.98	Pass
a	5500	Ant2	8.64	0.17	8.81	23.98	Pass
a	5500	Ant3	7.83	0.17	8	23.98	Pass
a	5600	Ant1	7.94	0.17	8.11	23.98	Pass
a	5600	Ant2	8.04	0.17	8.21	23.98	Pass
a	5600	Ant3	8.89	0.17	9.06	23.98	Pass
a	5700	Ant1	8.06	0.17	8.23	23.98	Pass
a	5700	Ant2	7.83	0.17	8	23.98	Pass
a	5700	Ant3	8.59	0.17	8.76	23.98	Pass
n20	5500	Ant1	8.84	0.18	9.02	23.98	Pass
n20	5500	Ant2	8.36	0.18	8.54	23.98	Pass
n20	5500	Ant3	7.75	0.18	7.93	23.98	Pass
n20	5500	Sum	13.11	-	13.29	23.98	Pass
n20	5600	Ant1	7.64	0.18	7.82	23.98	Pass
n20	5600	Ant2	7.96	0.18	8.14	23.98	Pass
n20	5600	Ant3	8.67	0.18	8.85	23.98	Pass
n20	5600	Sum	12.88	-	13.06	23.98	Pass
n20	5700	Ant1	8.12	0.18	8.3	23.98	Pass
n20	5700	Ant2	7.49	0.18	7.67	23.98	Pass
n20	5700	Ant3	7.89	0.18	8.07	23.98	Pass
n20	5700	Sum	12.61	-	12.79	23.98	Pass
n40	5510	Ant1	6.63	0.36	6.99	23.98	Pass
n40	5510	Ant2	6.23	0.36	6.59	23.98	Pass
n40	5510	Ant3	6.39	0.36	6.75	23.98	Pass
n40	5510	Sum	11.19	-	11.55	23.98	Pass
n40	5590	Ant1	5.7	0.35	6.05	23.98	Pass
n40	5590	Ant2	6.03	0.36	6.39	23.98	Pass
n40	5590	Ant3	7.32	0.35	7.67	23.98	Pass
n40	5590	Sum	11.18	-	11.53	23.98	Pass
n40	5670	Ant1	6.17	0.35	6.52	23.98	Pass
n40	5670	Ant2	7.1	0.35	7.45	23.98	Pass
n40	5670	Ant3	6.69	0.36	7.05	23.98	Pass
n40	5670	Sum	11.44	-	11.79	23.98	Pass
ac20	5500	Ant1	7.69	0.18	7.87	23.98	Pass
ac20	5500	Ant2	8.24	0.18	8.42	23.98	Pass
ac20	5500	Ant3	8.13	0.18	8.31	23.98	Pass
ac20	5500	Sum	12.8	-	12.98	23.98	Pass
ac20	5600	Ant1	8.41	0.18	8.59	23.98	Pass
ac20	5600	Ant2	7.86	0.18	8.04	23.98	Pass
ac20	5600	Ant3	9.25	0.18	9.43	23.98	Pass

ac20	5600	Sum	13.31	-	13.49	23.98	Pass
ac20	5700	Ant1	7.74	0.18	7.92	23.98	Pass
ac20	5700	Ant2	8.34	0.18	8.52	23.98	Pass
ac20	5700	Ant3	8.64	0.18	8.82	23.98	Pass
ac20	5700	Sum	13.03	-	13.21	23.98	Pass
ac40	5510	Ant1	6.75	0.35	7.1	23.98	Pass
ac40	5510	Ant2	6.16	0.35	6.51	23.98	Pass
ac40	5510	Ant3	7	0.36	7.36	23.98	Pass
ac40	5510	Sum	11.42	-	11.78	23.98	Pass
ac40	5590	Ant1	6.08	0.35	6.43	23.98	Pass
ac40	5590	Ant2	6.49	0.35	6.84	23.98	Pass
ac40	5590	Ant3	7.14	0.35	7.49	23.98	Pass
ac40	5590	Sum	11.36	-	11.71	23.98	Pass
ac40	5670	Ant1	6.06	0.36	6.42	23.98	Pass
ac40	5670	Ant2	6.25	0.35	6.6	23.98	Pass
ac40	5670	Ant3	6.45	0.35	6.8	23.98	Pass
ac40	5670	Sum	11.03	-	11.38	23.98	Pass
ac80	5530	Ant1	3.8	0.69	4.49	23.98	Pass
ac80	5530	Ant2	3.42	0.68	4.1	23.98	Pass
ac80	5530	Ant3	3.45	0.68	4.13	23.98	Pass
ac80	5530	Sum	8.33	-	9.02	23.98	Pass
ac80	5610	Ant1	3.24	0.69	3.93	23.98	Pass
ac80	5610	Ant2	3.96	0.69	4.65	23.98	Pass
ac80	5610	Ant3	4.05	0.69	4.74	23.98	Pass
ac80	5610	Sum	8.54	-	9.23	23.98	Pass
ax20	5500	Ant1	2.78	0.71	3.49	23.98	Pass
ax20	5500	Ant2	2.61	0.71	3.32	23.98	Pass
ax20	5500	Ant3	2.41	0.71	3.12	23.98	Pass
ax20	5500	Sum	7.38	-	8.09	23.98	Pass
ax20	5600	Ant1	2.22	0.71	2.93	23.98	Pass
ax20	5600	Ant2	2.28	0.71	2.99	23.98	Pass
ax20	5600	Ant3	2.89	0.69	3.58	23.98	Pass
ax20	5600	Sum	7.25	-	7.95	23.98	Pass
ax20	5700	Ant1	2.18	0.71	2.89	23.98	Pass
ax20	5700	Ant2	2.12	0.71	2.83	23.98	Pass
ax20	5700	Ant3	2.98	0.69	3.67	23.98	Pass
ax20	5700	Sum	7.22	-	7.92	23.98	Pass
ax40	5510	Ant1	3.37	0.72	4.09	23.98	Pass
ax40	5510	Ant2	3.06	0.72	3.78	23.98	Pass
ax40	5510	Ant3	3.5	0.72	4.22	23.98	Pass
ax40	5510	Sum	8.09	-	8.81	23.98	Pass
ax40	5590	Ant1	2.93	0.71	3.64	23.98	Pass
ax40	5590	Ant2	2.89	0.7	3.59	23.98	Pass