


成至 LTE 系列无人机数字语音广播说明书

Instructions for the Chengzhi LTE series of UAV digital voice broadcasting

MP130 LTE

MP118 LTE



型号 model	MP130 LTE
尺寸 size	140mm*140mm*132mm
重量 weight	560g
最大声压 Maximum sound pressure	130dB
声音传播距离 Sound propagation distance	500m
功率 power	25w
俯仰角度 Pitch Angle	0° ---90°
通信链路 Communications link	4G
载荷接口 Load interface	成至通用接口 Common interface of Chengzhi
控制距离 Control distance	∞
工作温度 Working temperature	-20C° -----40C°
App 支持系统 App support system	Android5.0 及以上 Android5.0 and above

喊话方式

Play mode

音频文件储存格式

Audio file storage format

其他

The other

实时喊话 Real-time express

录音广播 Upload the recording

文字转语音 text-to-speech

内存播放 Use SD card to play

混合播放 Mixed play

MP3/WAV

支持 AUX 输入音频流

AUX input audio streams are supported

型号 model	MP118 LTE
尺寸 size	73mm*73mm*70mm
重量 weight	260g
最大声压 Maximum sound pressure	118dB
声音传播距离 Sound propagation distance	100m
功率 power	15w
俯仰角度 Pitch Angle	固定角度 Fixed Angle
防护等级 Protection grade	IP67
通信链路 Communications link	4G
载荷接口 Load interface	M2 螺纹孔 M2 threaded hole
控制距离 Control distance	∞
工作温度 Working temperature	-20C° -----40C°
App 支持系统 App support system	Android5.0 及以上 Android5.0 and above

<p>喊话方式</p> <p>Play mode</p> <p>音频文件储存格式</p> <p>Audio file storage format</p>	<p>实时喊话 Real-time express</p> <p>录音上传 Upload the recording</p> <p>文字转语音 text-to-speech</p> <p>内存播放 Use SD card to play</p> <p>混合播放 Mixed play</p> <p>MP3/WAV</p>
<p>其他 The other</p>	<p>内置电池时间大于 1.5h</p> <p>The built-in battery lasts longer than 1.5 hours</p>

软件使用教程 Tutorial on using software

Android 下载地址 Android download address



（请使用浏览器下载）(please use browser to download)

使用流程 Using the process

1. app 注册登陆，邮箱或者手机注册

1. Open the app, register by email or mobile phone and log in.



2. 喊话器绑定和解绑 Loudspeaker binding and untying app

扫码或者手动输入 Scan code or enter it manually



3. 功能使用 Use of functions

文字转语音，可以编辑文本或者快速复制粘贴微信或者网页等内容，TTS 发音清晰，避免公众场合发音问题。

Text to speech, can edit text or quickly copy and paste WeChat or web pages and other content, TTS clear pronunciation, avoid public pronunciation problems.



录音喊话，可以将喊话内容保存起来，重复播放。可以重命名，删除。
下次使用刷新目录，播放即可。

The recording upload broadcast function can save the message and play it again. It can also be renamed and deleted. Next time, refresh the directory and play.




实时广播，可以像对讲机一样按住快速喊话

The live broadcast function can shout as fast as a walkie-talkie.



背景音播放 ，可以播放警报声等一些常用的行业背景音

Background music playback function can play alarm and other common industry background sound.

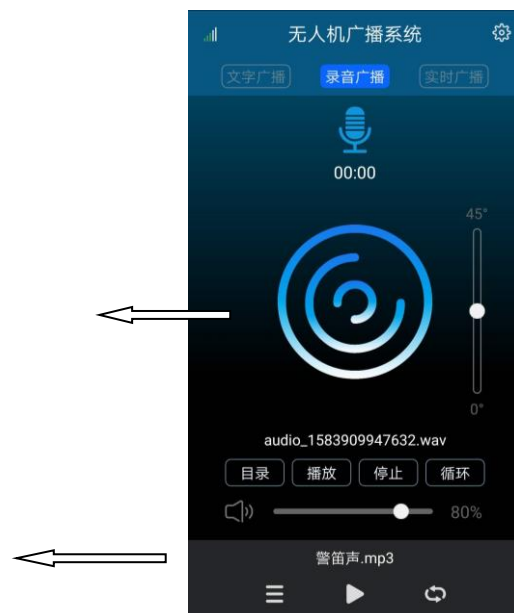

喊话器角度俯仰调节，可以让声音准确的传播到想要到达的方向

The Angle pitch adjustment function of the megaphone enables the sound to have an accurate propagation direction.

成至语音库，可以下载各种行业常用的警报声，音乐，以及各行业常

用的一些宣传用语。

Chengzhi audio library, you can download a variety of industry used alarm, music, as well as some of the industry used to promote the language.

If you have any questions or suggestions on the manual, please contact us through the following email: dev@gzczzn.com

Note: the product is only installed on the drone for use

FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.