



Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: Portable Outdoor Speaker

Test Model: Mirtune H1

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 23.8°C |
| Relative Humidity: | 52.1% |
| ATM Pressure: | 100.0 kPa |
| Test Engineer: | Jerry Chu |
| Supervised by: | Nick Peng |



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|--------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | 0.656 | ≥ 0.5 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | 0.692 | ≥ 0.5 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 0.647 | ≥ 0.5 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 1.136 | ≥ 0.5 | Pass |
| NVNT | BLE 2M | 2440 | Ant1 | 1.154 | ≥ 0.5 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 1.133 | ≥ 0.5 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

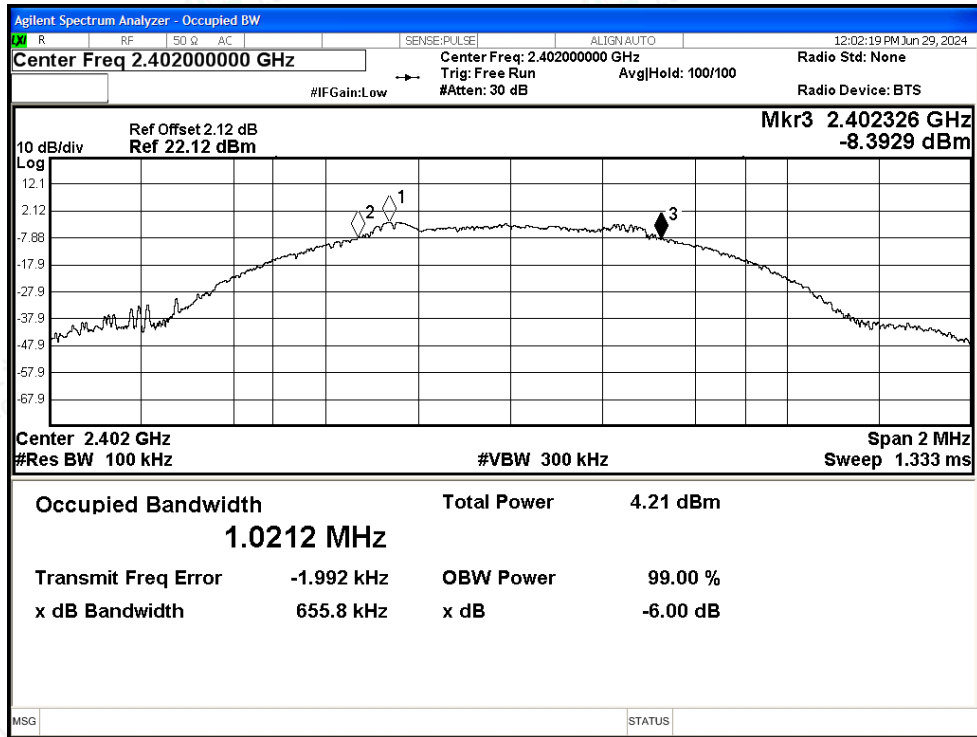


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

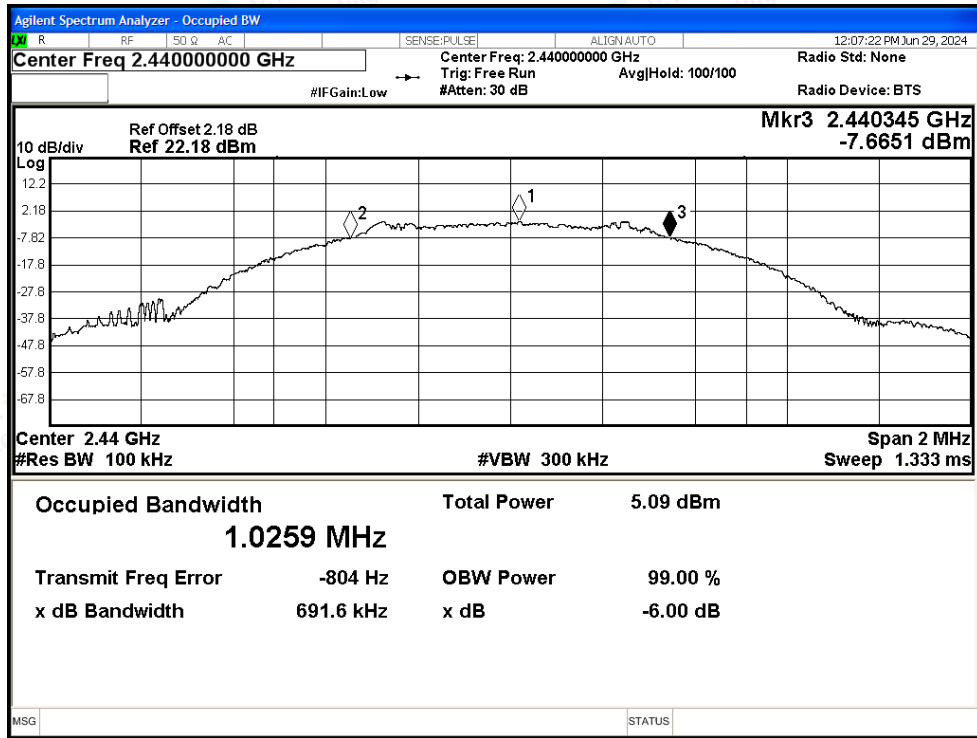




-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

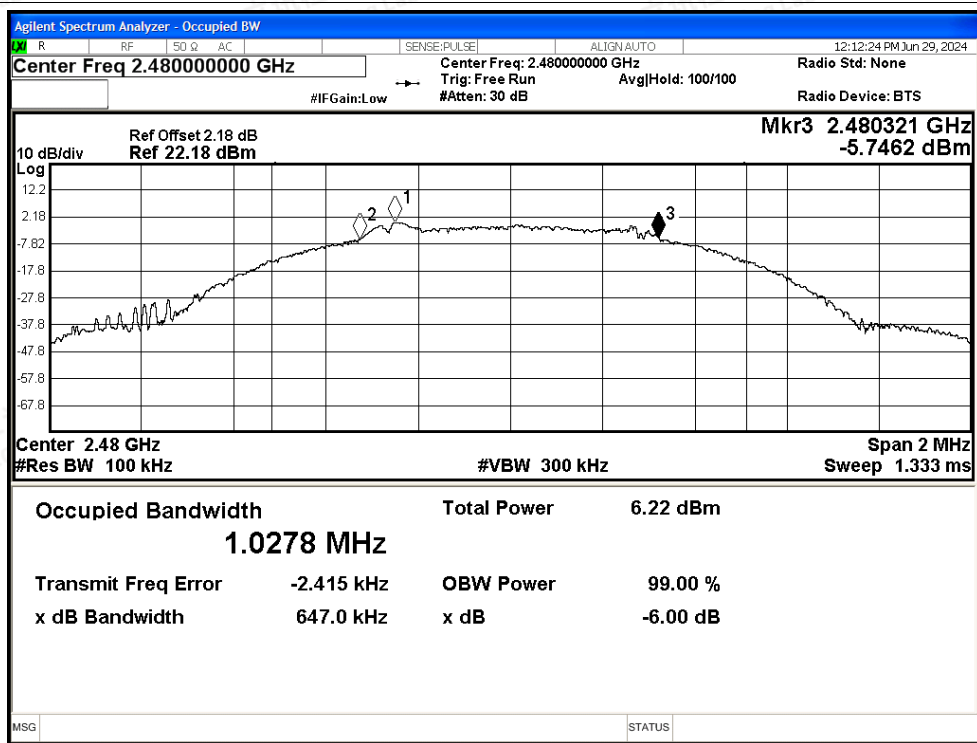


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

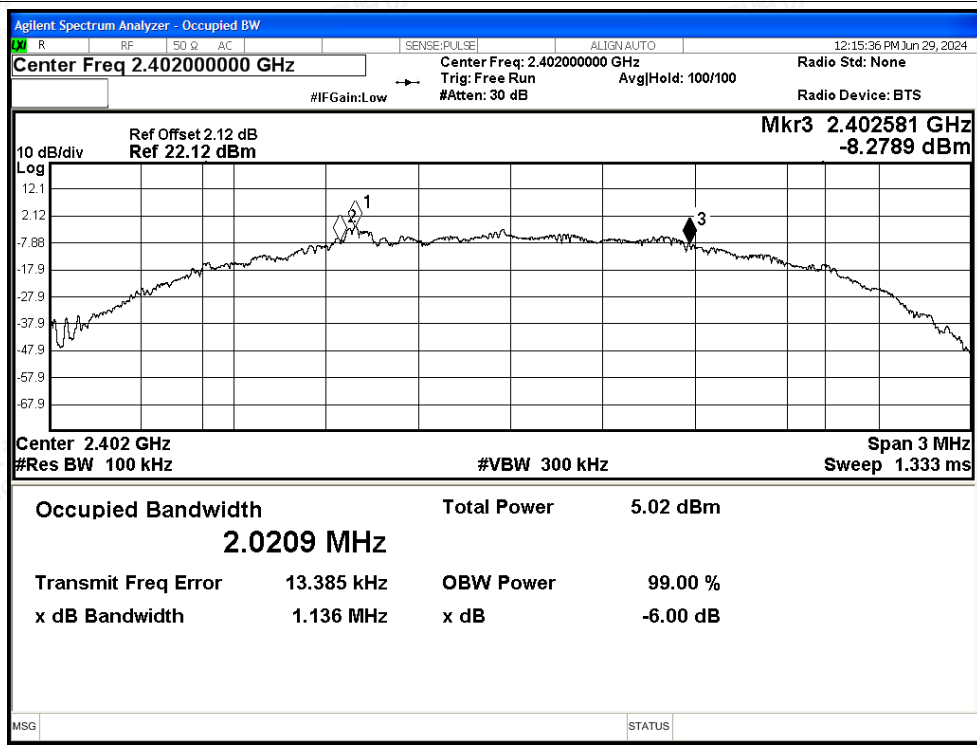




-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

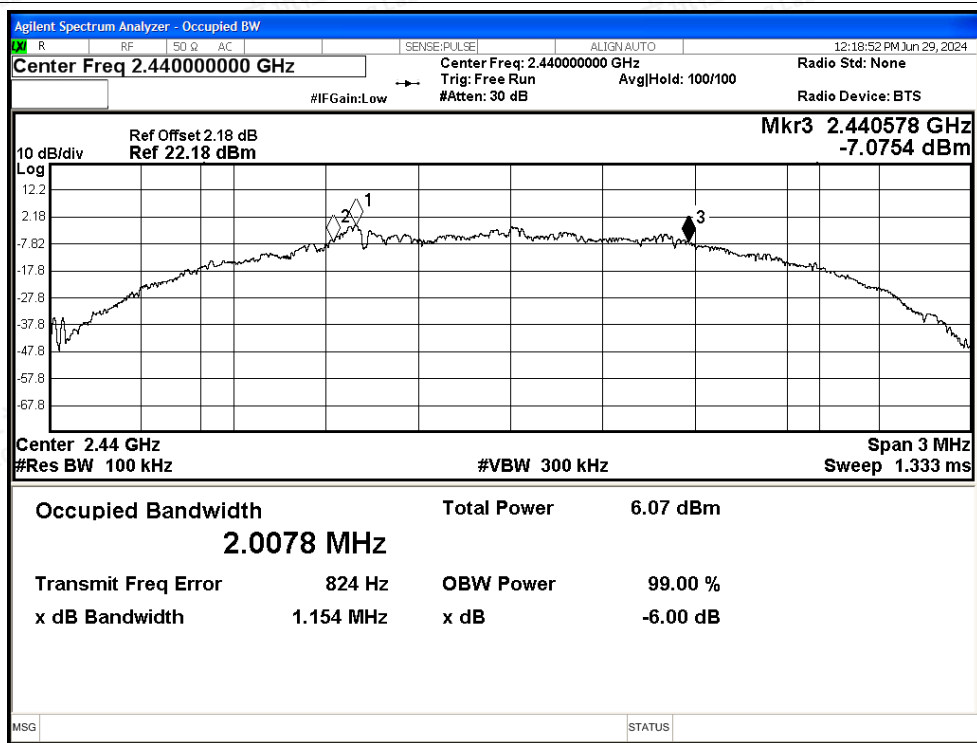

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

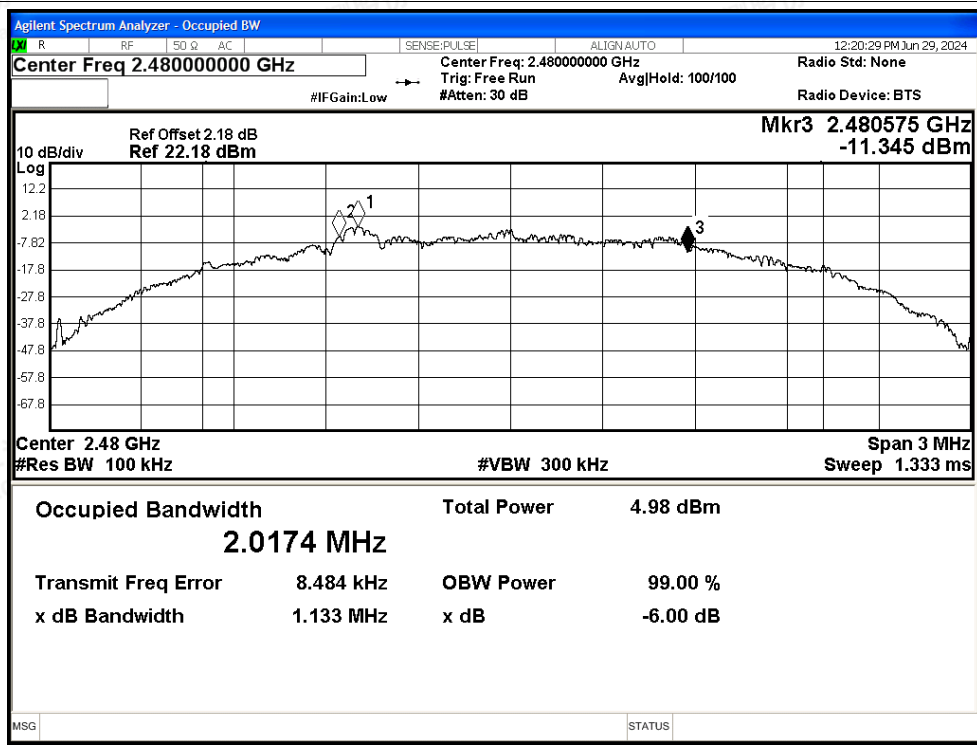



B.2 Maximum Peak Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|--------|-----------------|---------|-------------------|-------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | -1.64 | 30 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | -0.62 | 30 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 0.68 | 30 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -1.26 | 30 | Pass |
| NVNT | BLE 2M | 2440 | Ant1 | -0.29 | 30 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -1.42 | 30 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity






Test Graphs



Power NVNT BLE 1M 2402MHz Ant1

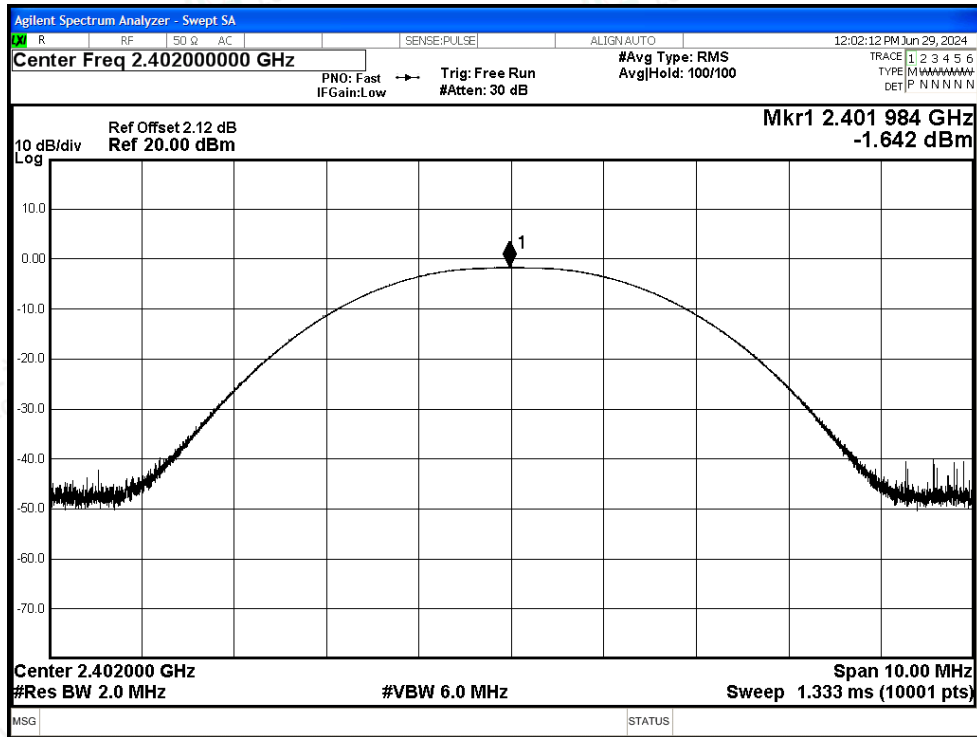

Power NVNT BLE 1M 2440MHz Ant1

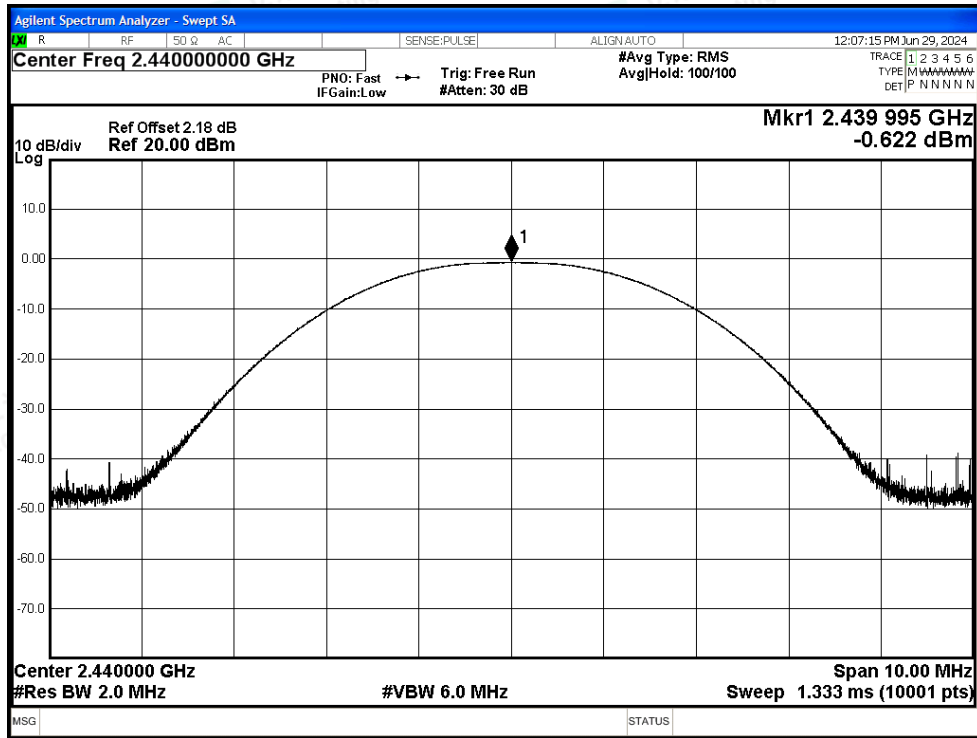

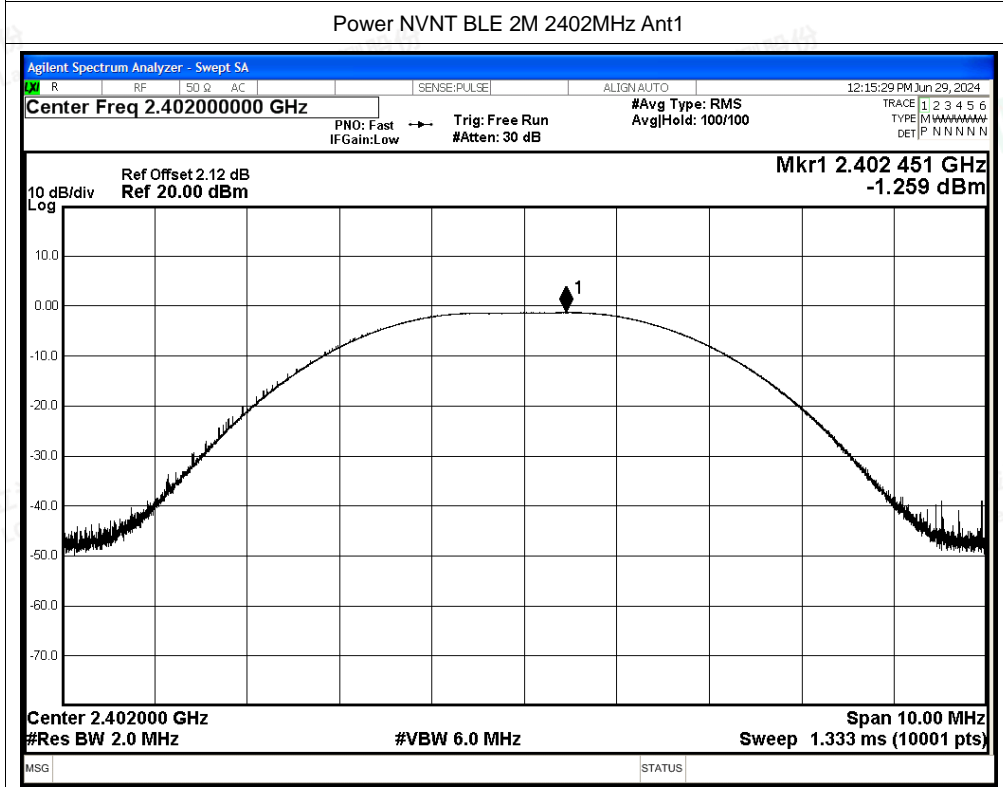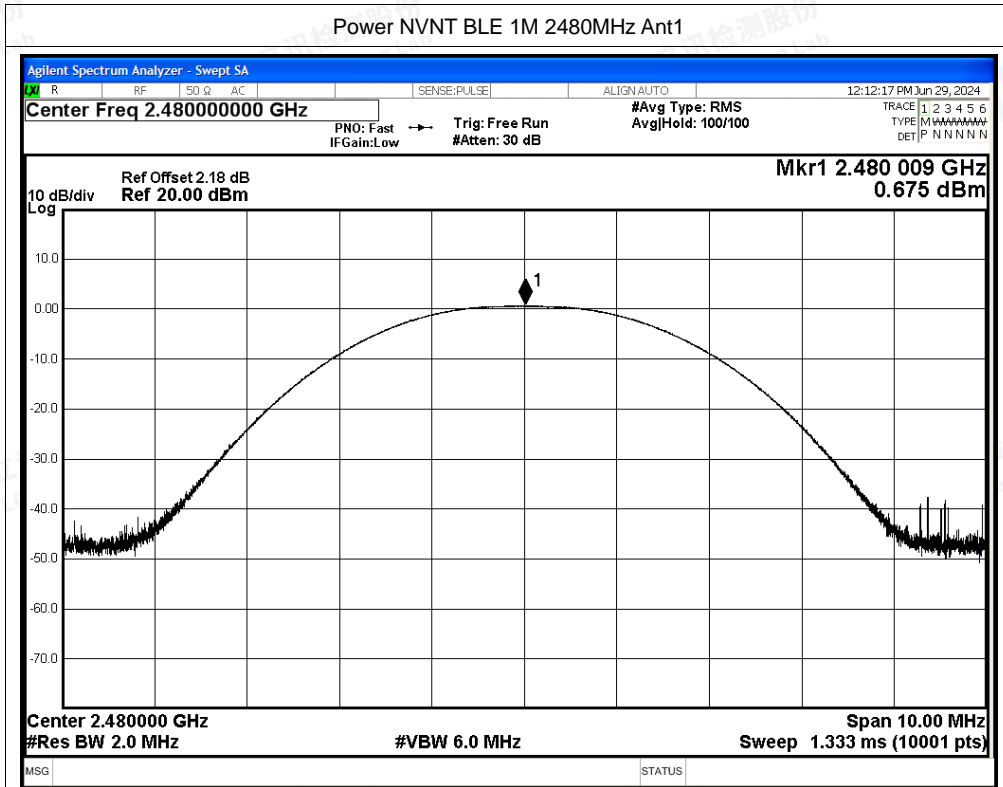

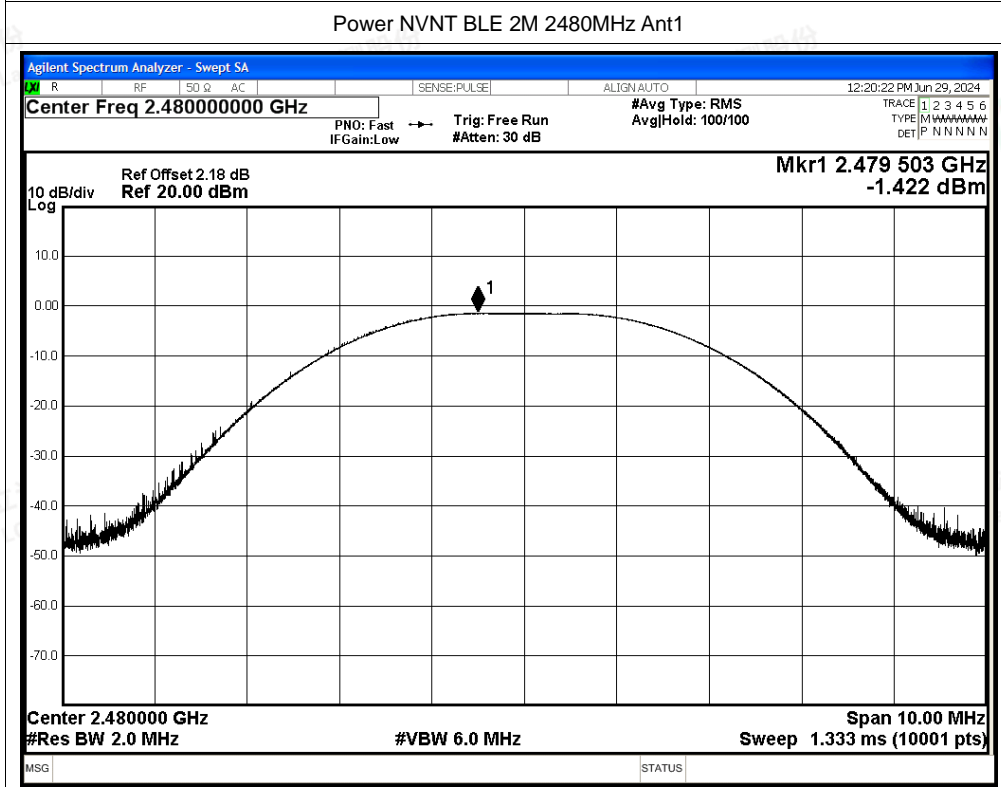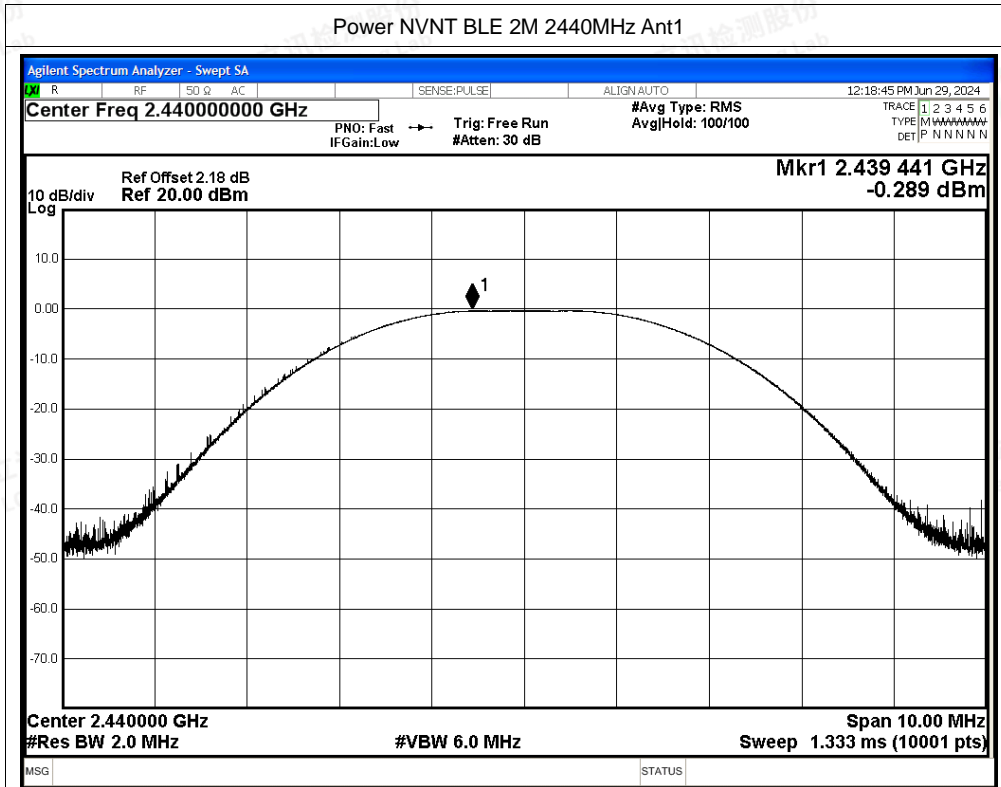



B.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|--------|-----------------|---------|----------------------|------------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | -17.98 | 8 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | -17.37 | 8 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -16.24 | 8 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -20.97 | 8 | Pass |
| NVNT | BLE 2M | 2440 | Ant1 | -20.27 | 8 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -20.79 | 8 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

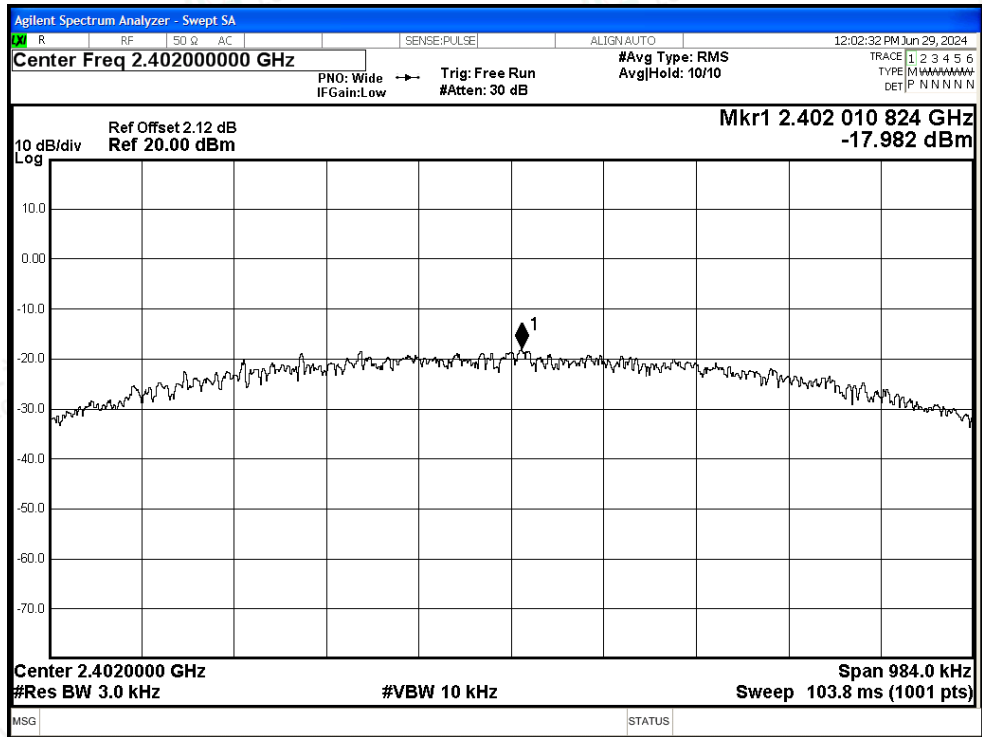


PSD NVNT BLE 1M 2440MHz Ant1

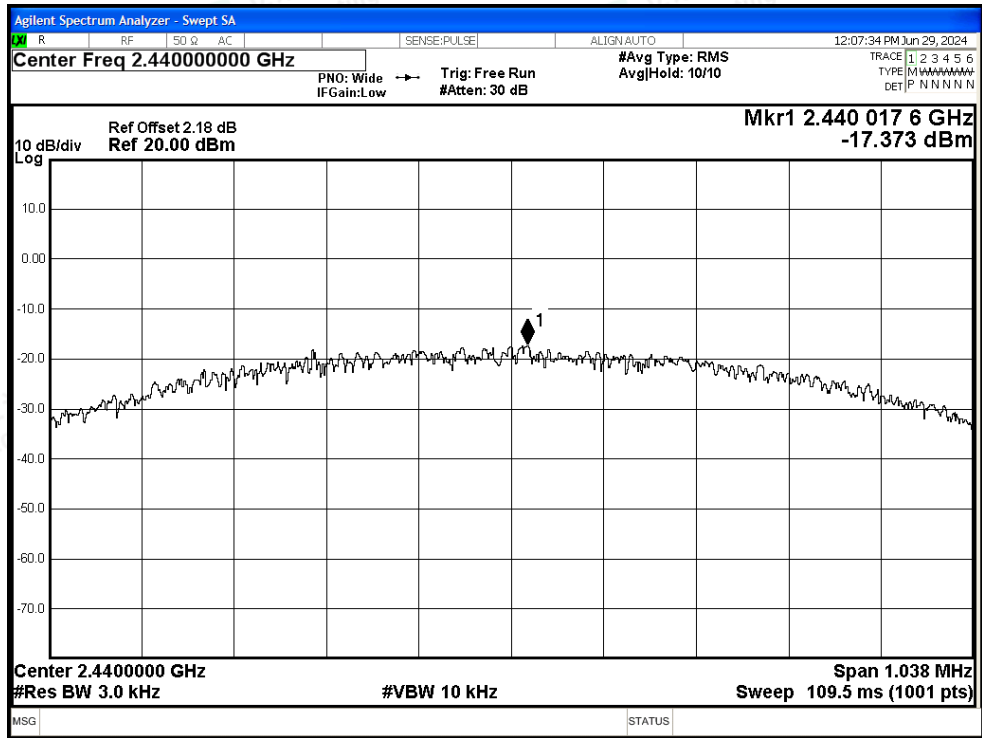




PSD NVNT BLE 1M 2480MHz Ant1

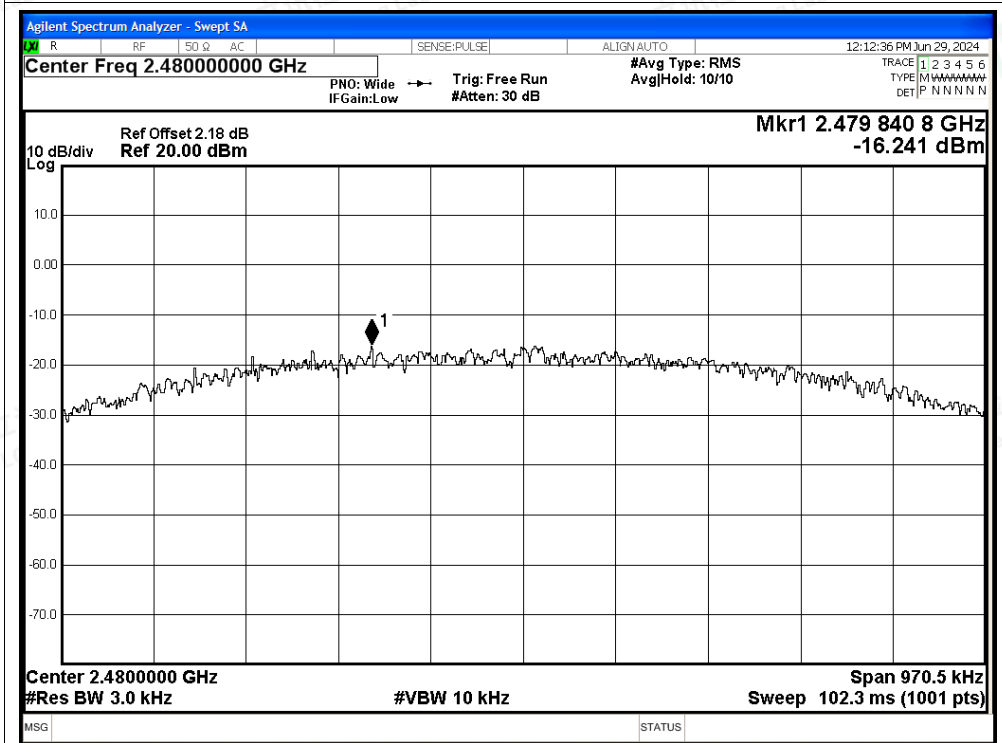


PSD NVNT BLE 2M 2402MHz Ant1

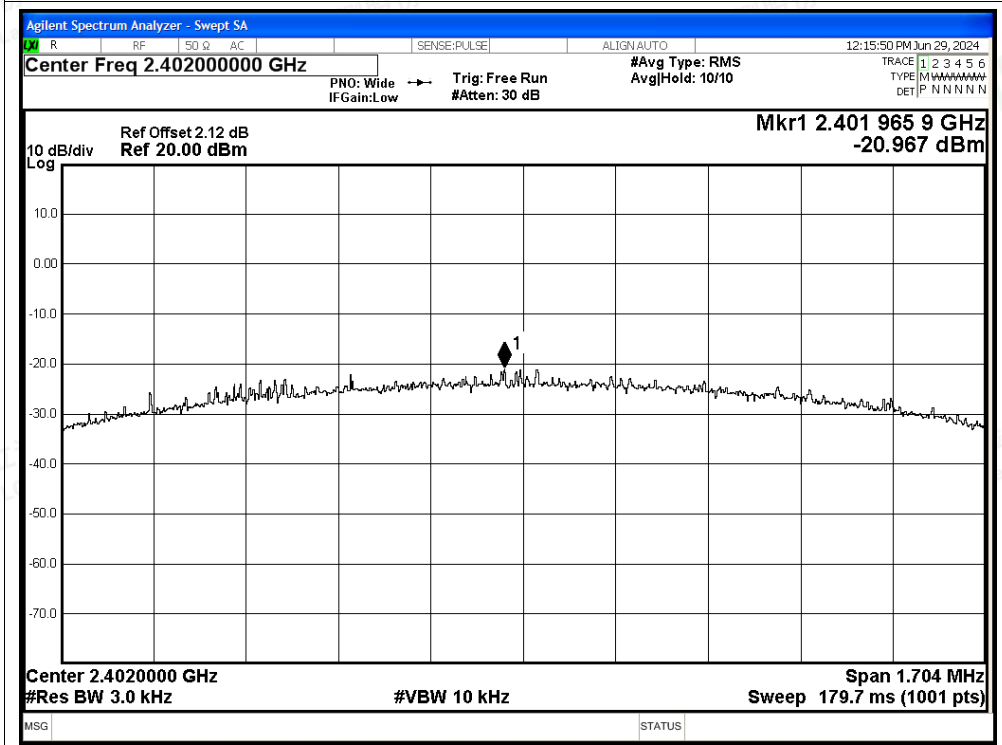




PSD NVNT BLE 2M 2440MHz Ant1

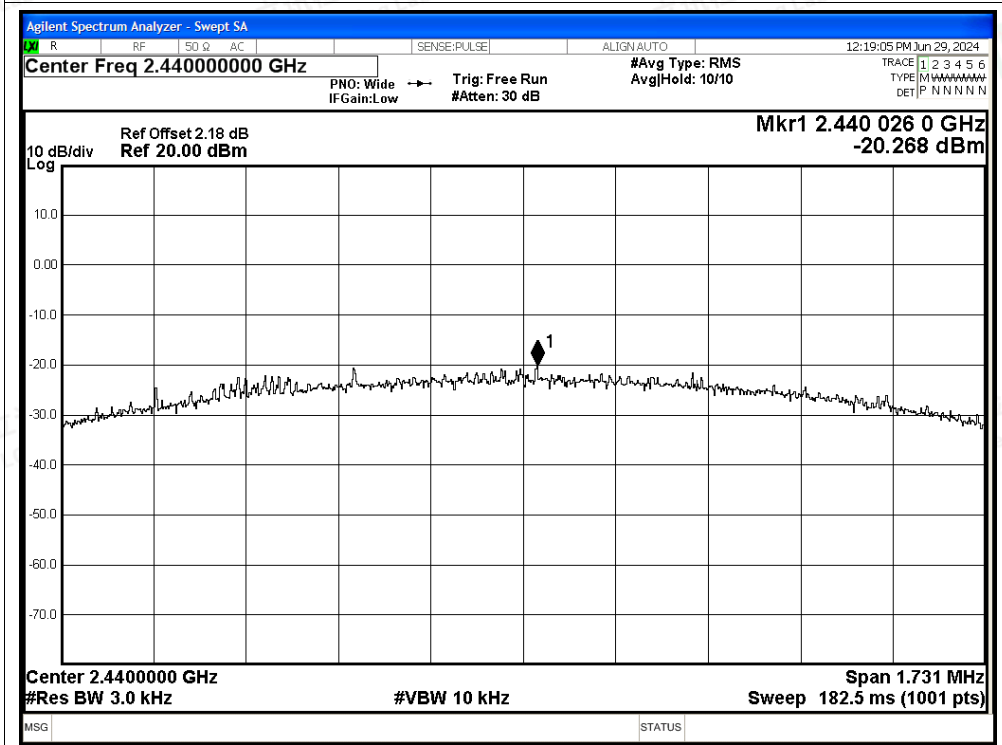

PSD NVNT BLE 2M 2480MHz Ant1

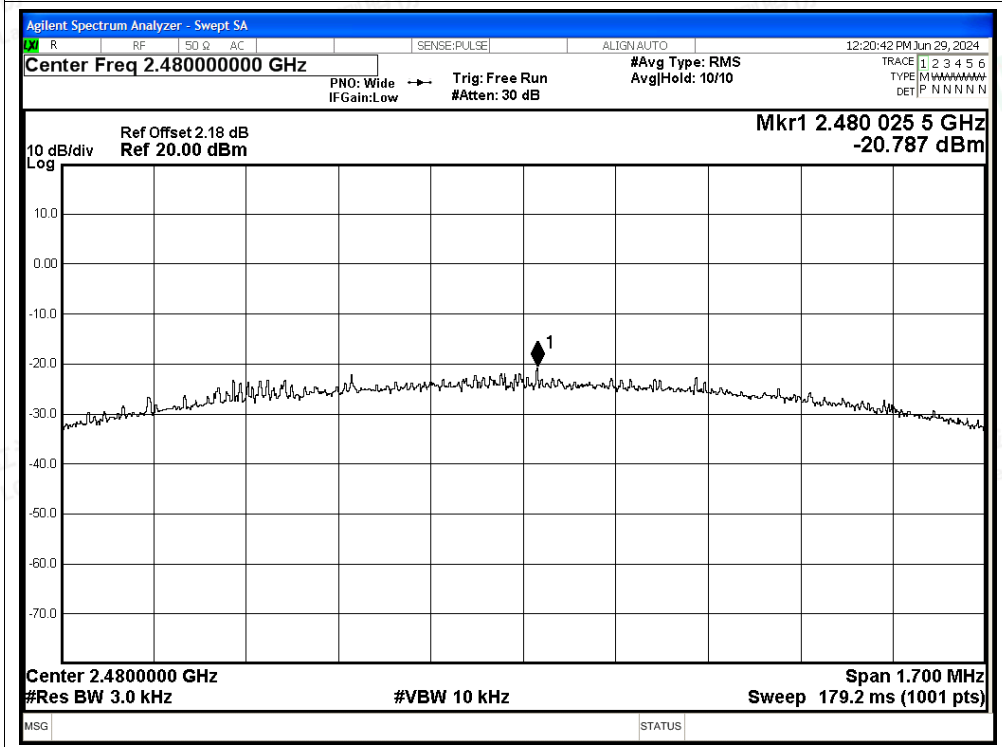



B.4 Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | -54.99 | -20 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -57.12 | -20 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -45.13 | -20 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -53.12 | -20 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

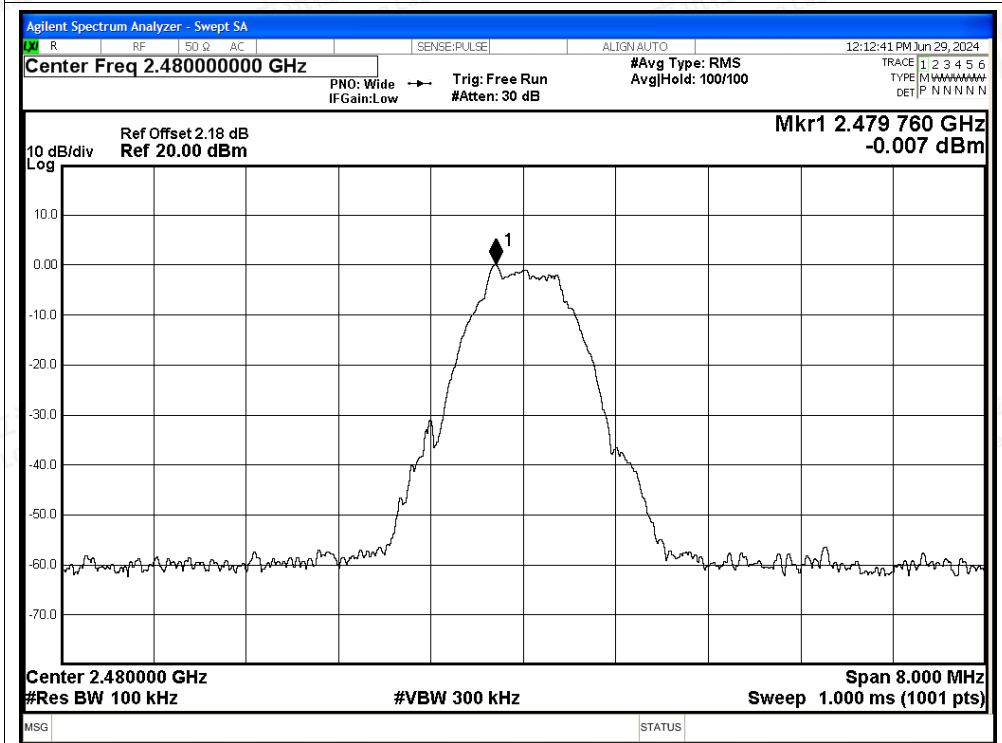


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

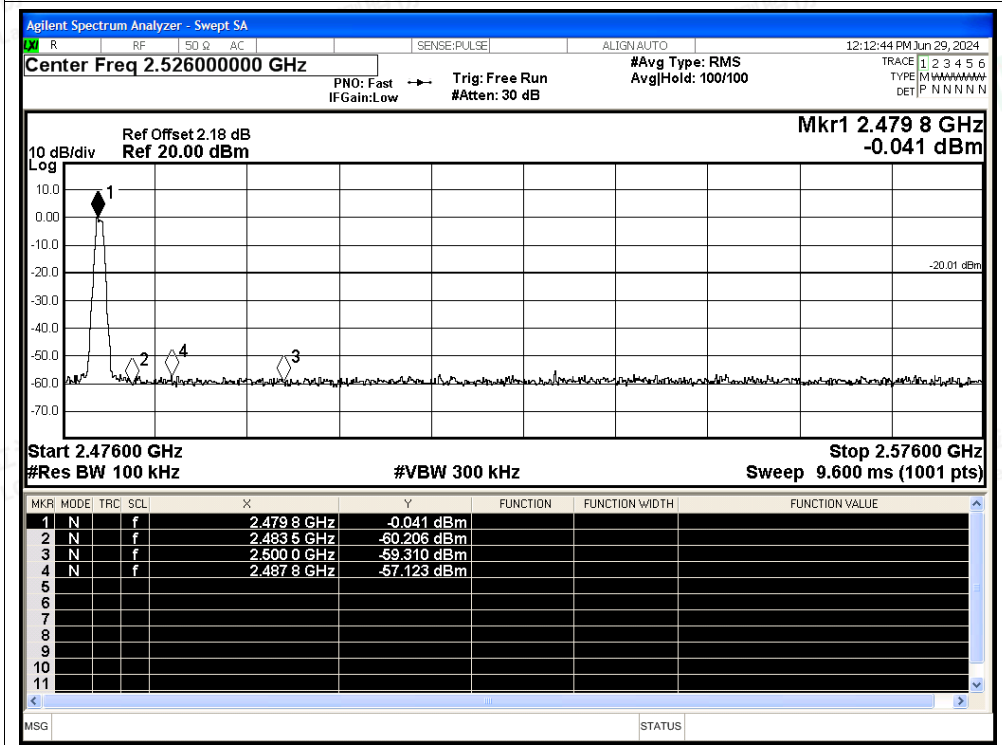




Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

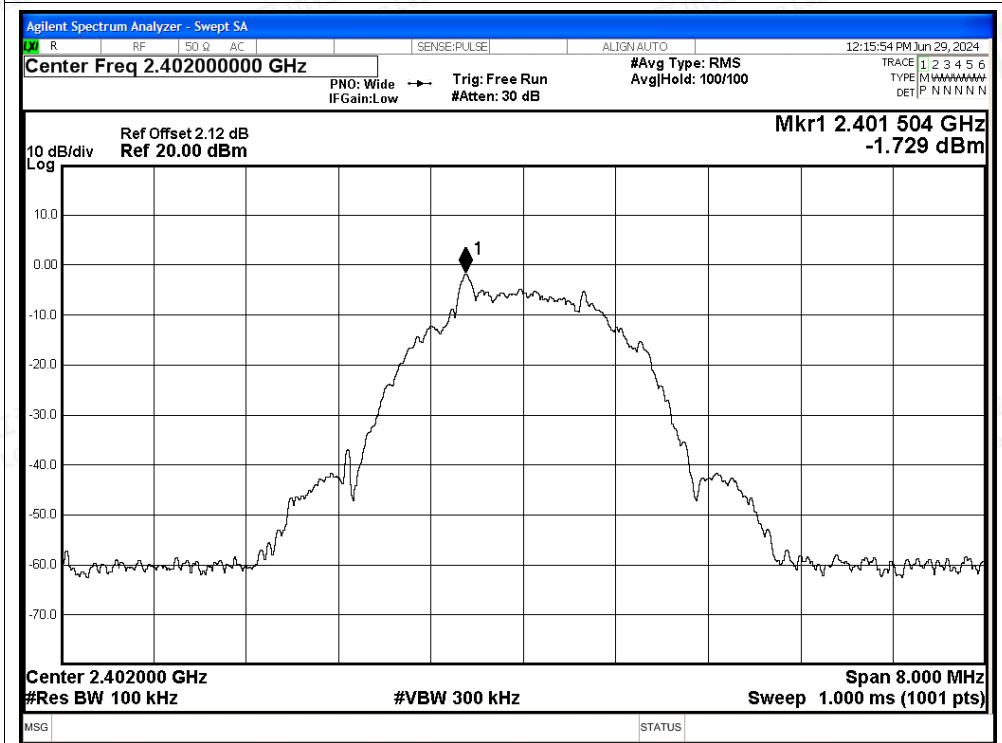


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

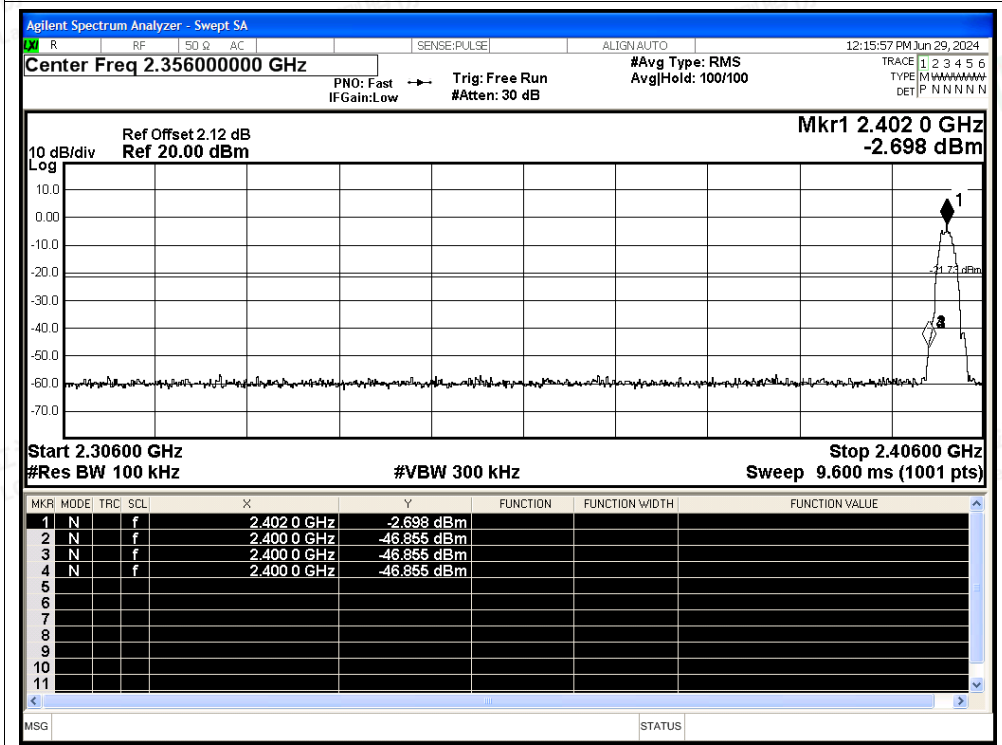




Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

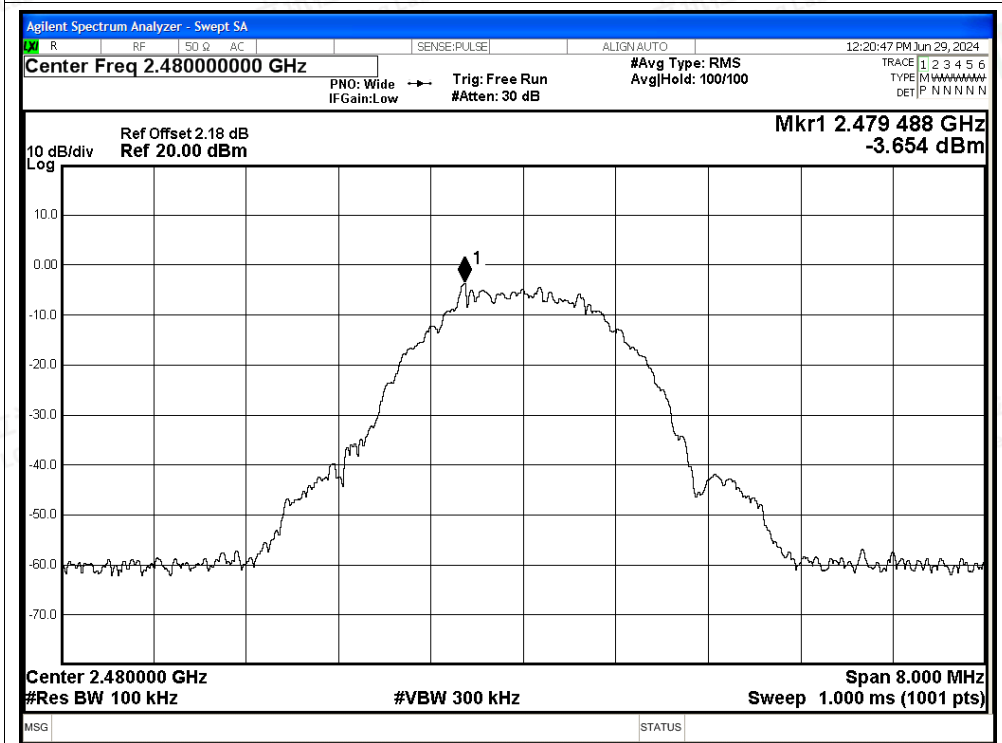

Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

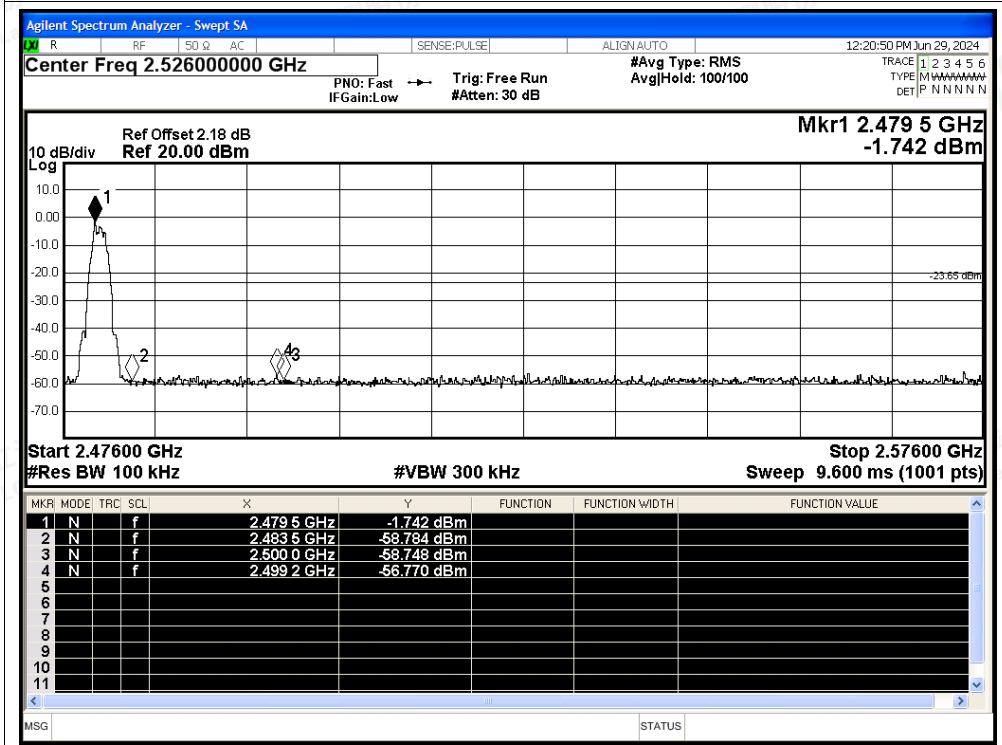



B.5 Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | -48.17 | -20 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | -49.8 | -20 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -55.37 | -20 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -50.74 | -20 | Pass |
| NVNT | BLE 2M | 2440 | Ant1 | -54.4 | -20 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -52.35 | -20 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

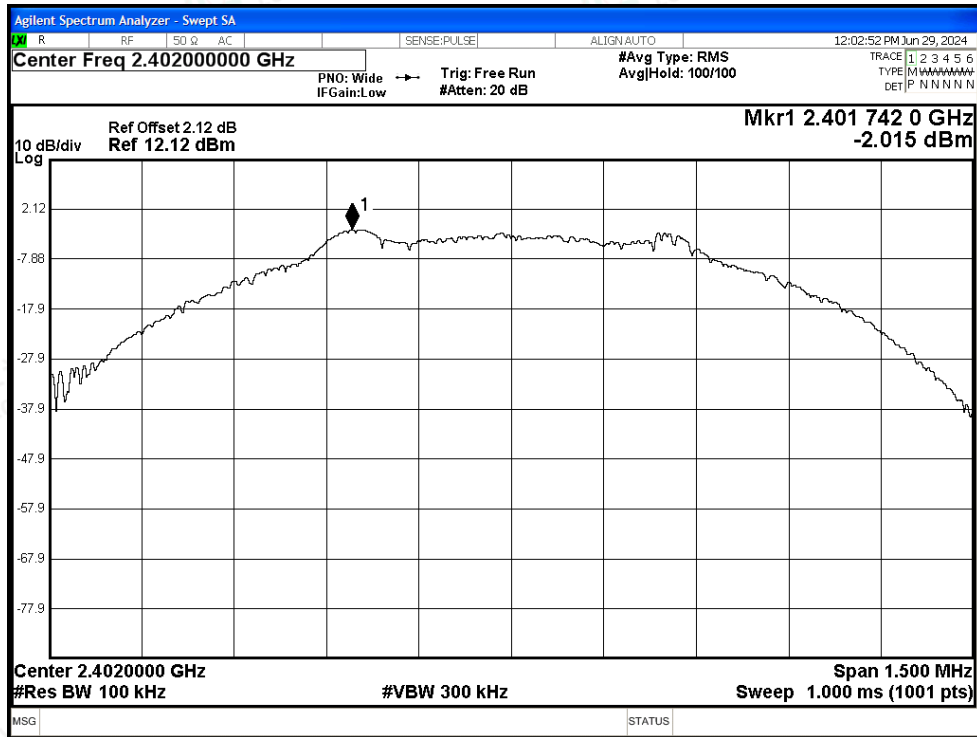


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

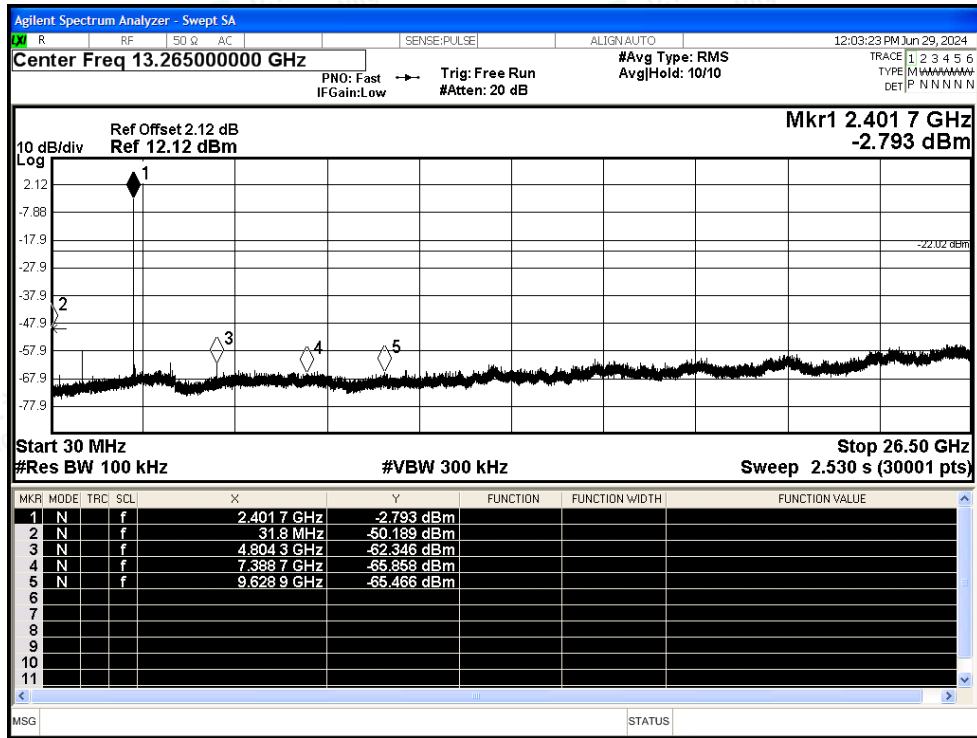




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

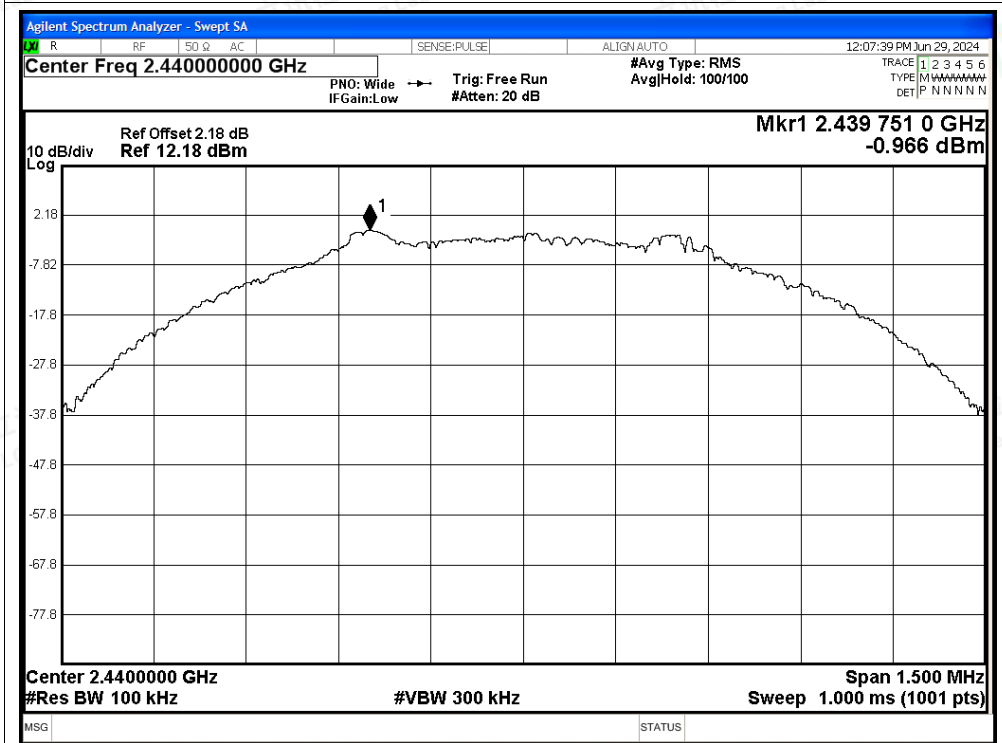


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

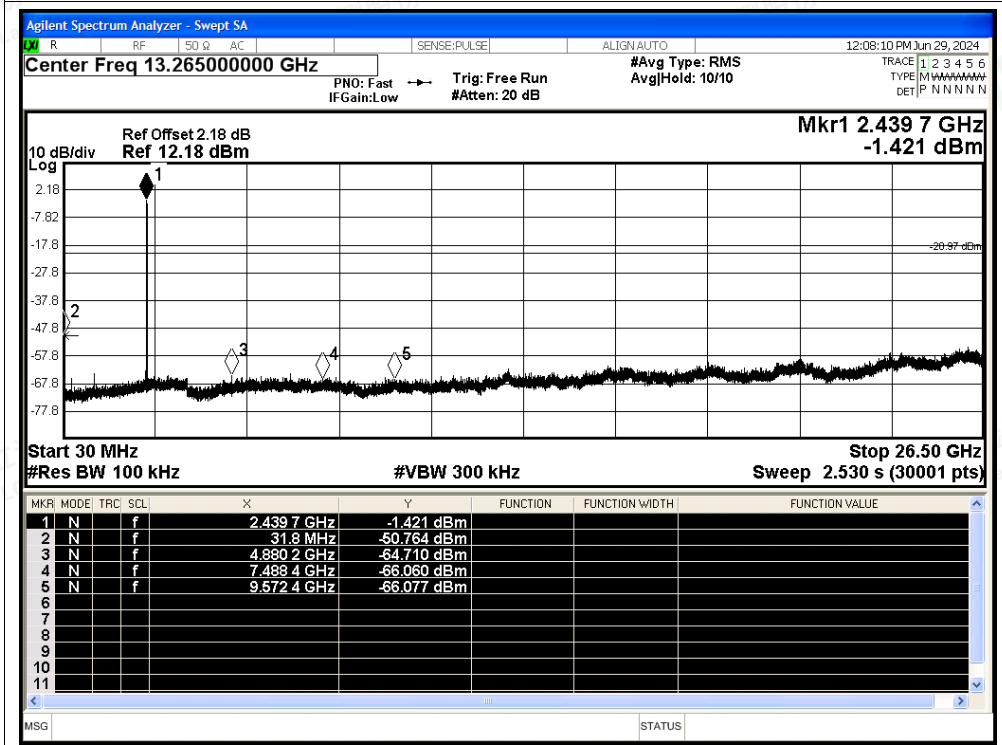




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

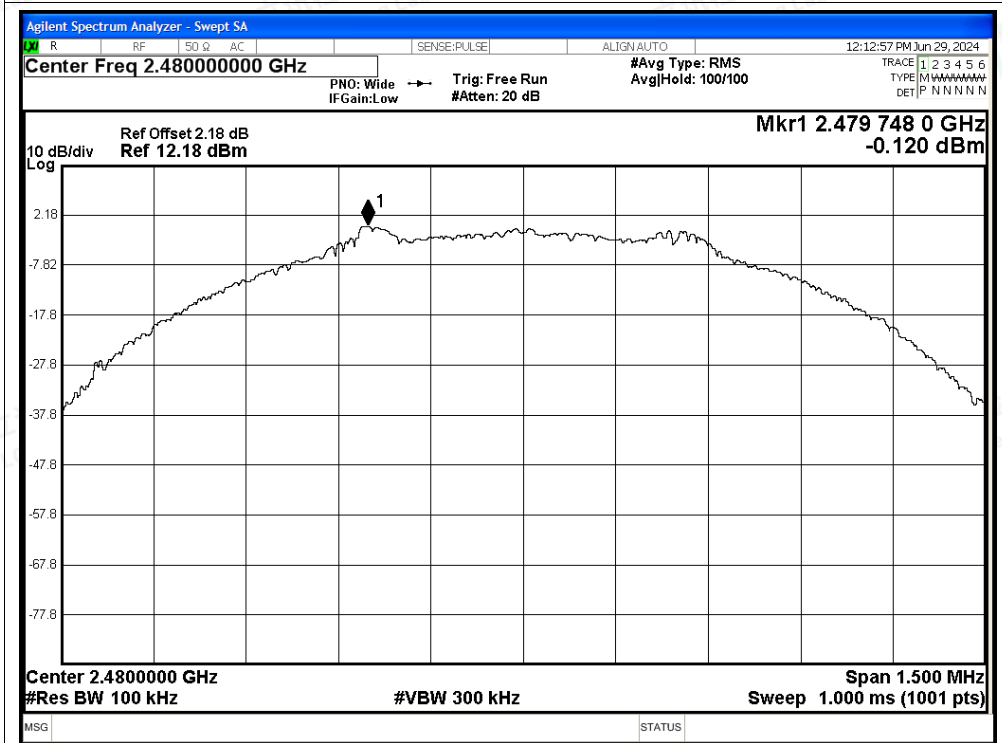


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

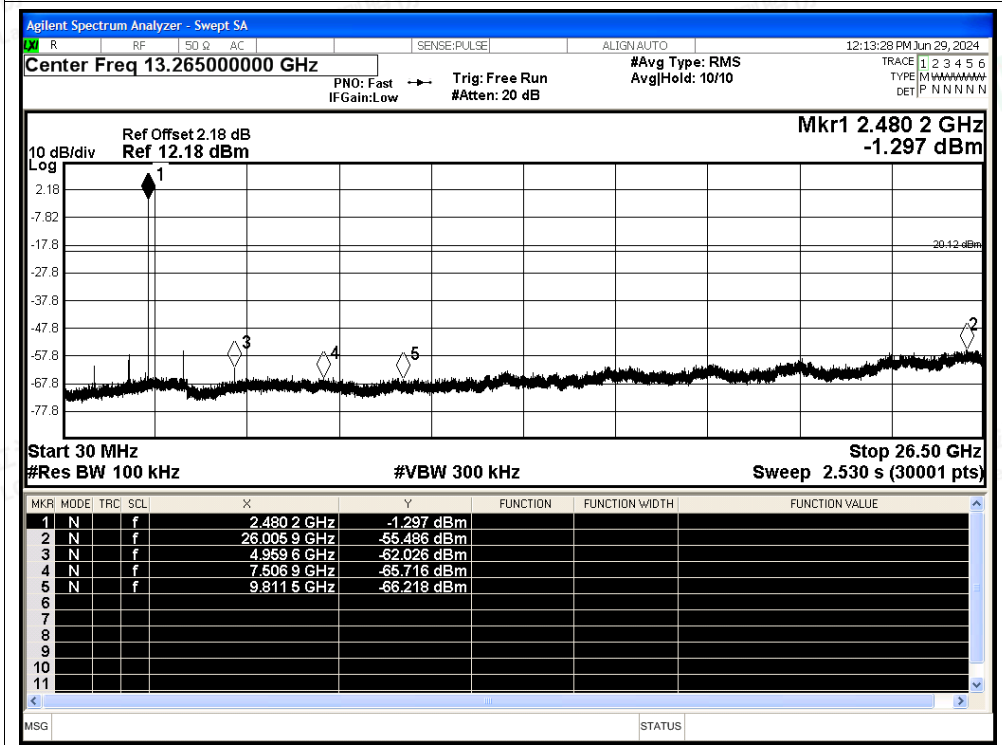




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

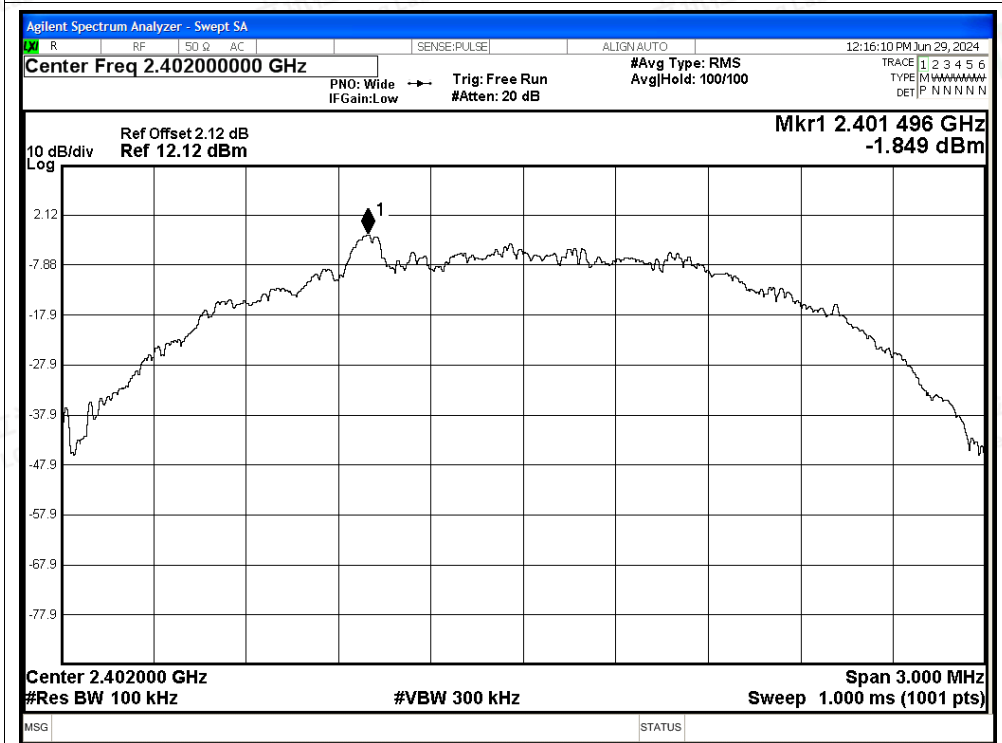


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

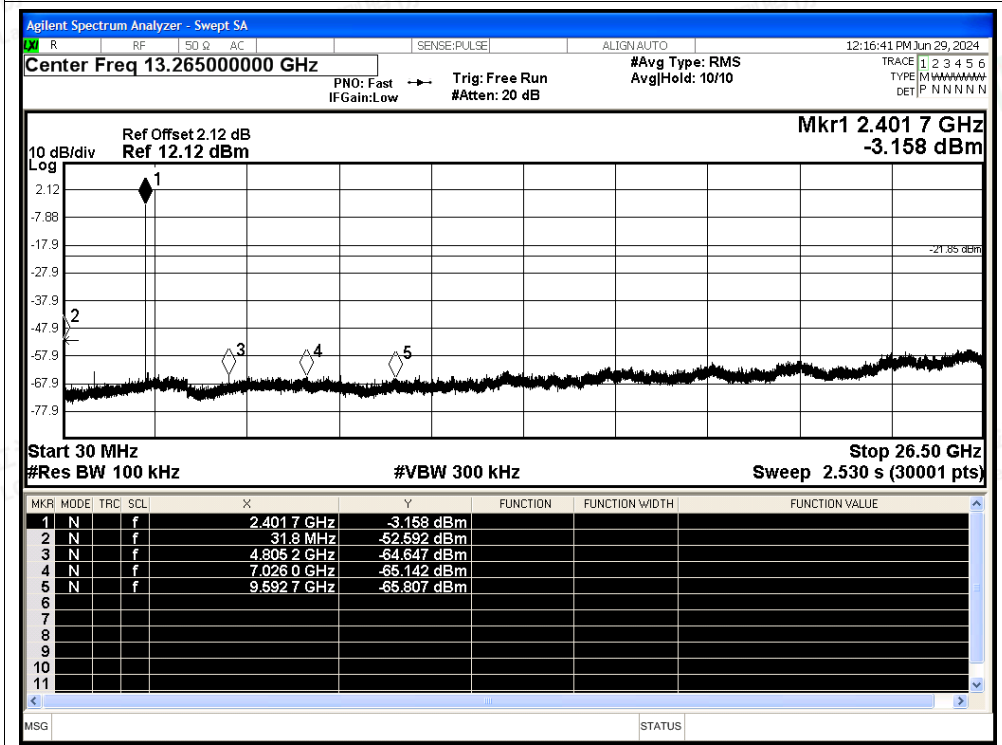




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

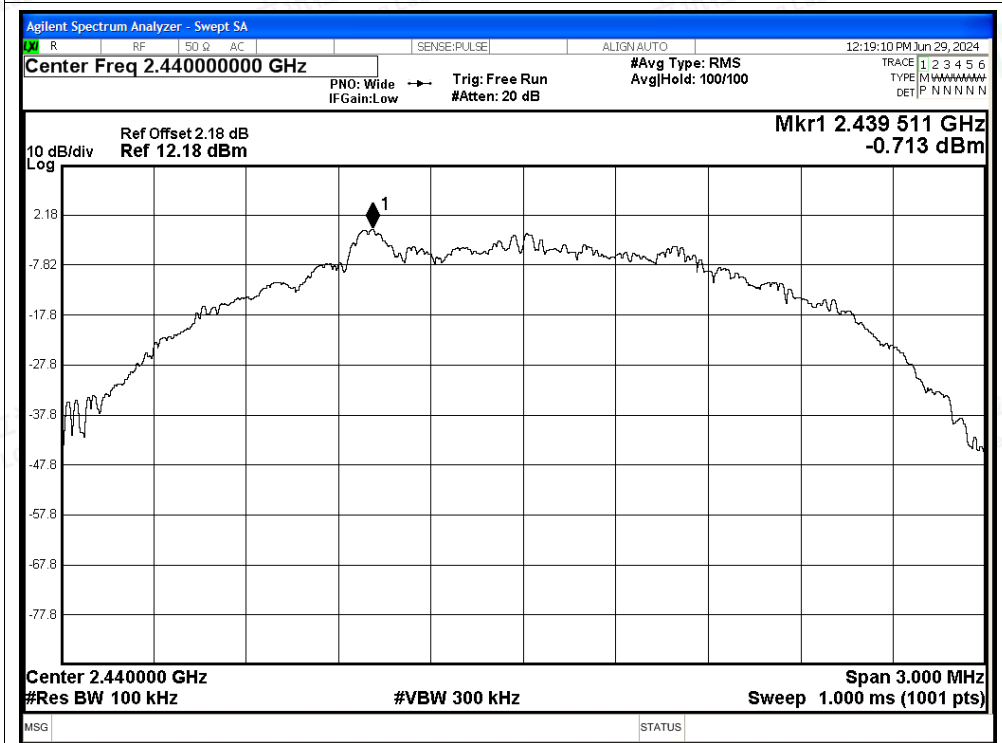

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

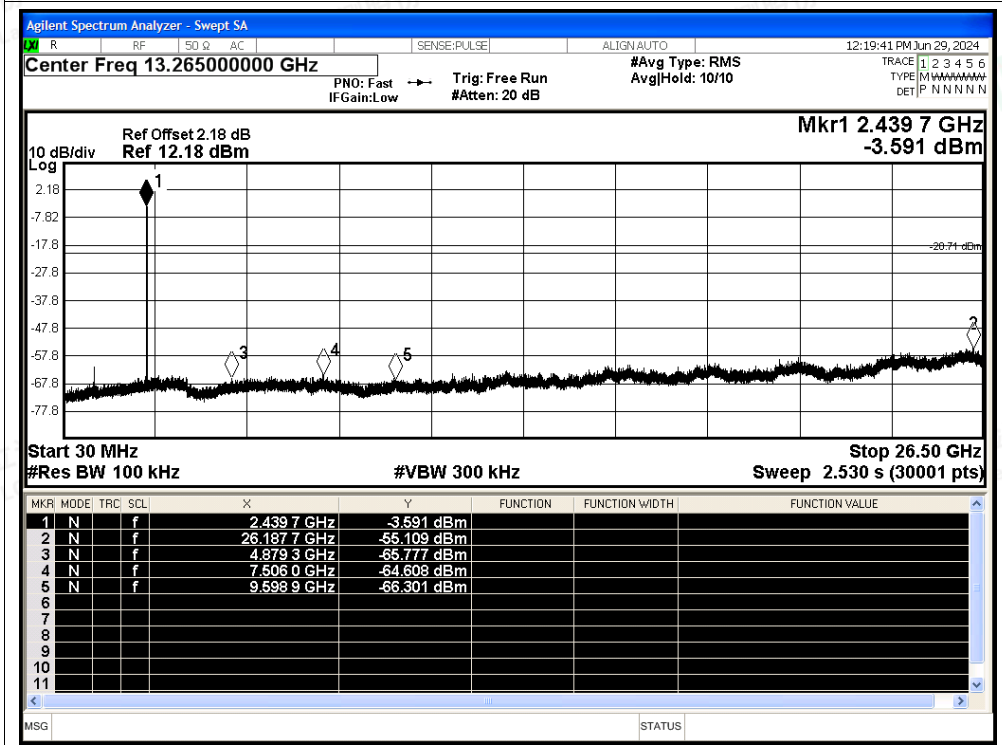




Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

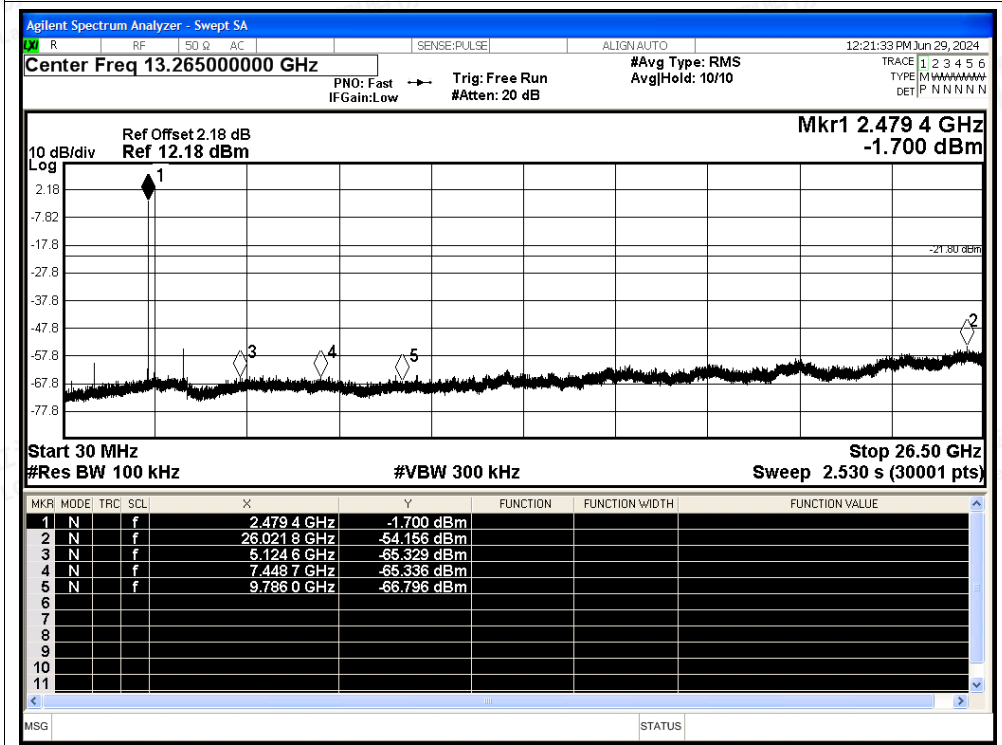



B.6 Duty Cycle

| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|--------|-----------------|---------|----------------|------------------------|-----------|
| NVNT | BLE 1M | 2402 | Ant1 | 87.36 | 0.59 | 0.61 |
| NVNT | BLE 1M | 2440 | Ant1 | 87.39 | 0.59 | 0.61 |
| NVNT | BLE 1M | 2480 | Ant1 | 87.39 | 0.59 | 0.61 |
| NVNT | BLE 2M | 2402 | Ant1 | 65.92 | 1.81 | 1.21 |
| NVNT | BLE 2M | 2440 | Ant1 | 65.93 | 1.81 | 1.21 |
| NVNT | BLE 2M | 2480 | Ant1 | 65.96 | 1.81 | 1.21 |




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

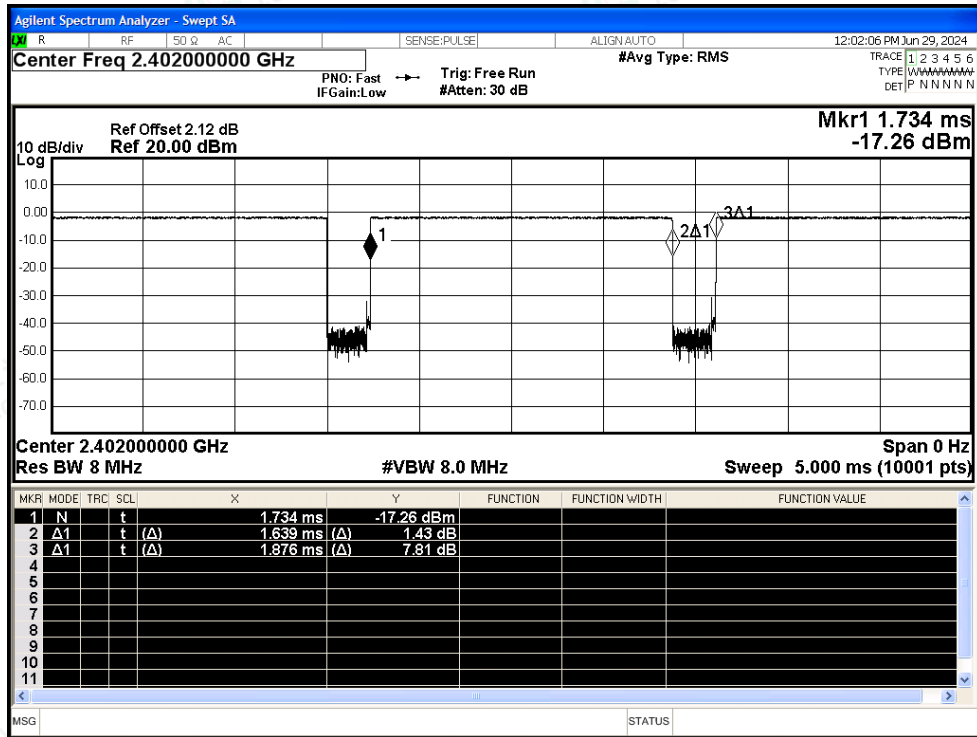


Duty Cycle NVNT BLE 1M 2440MHz Ant1

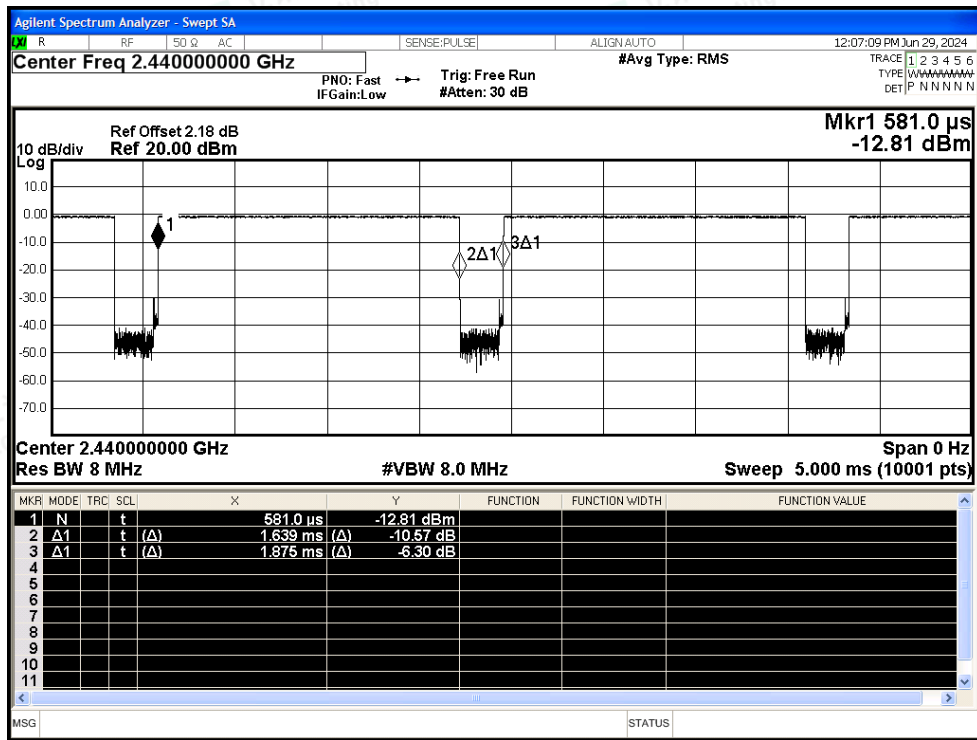




Duty Cycle NVNT BLE 1M 2480MHz Ant1

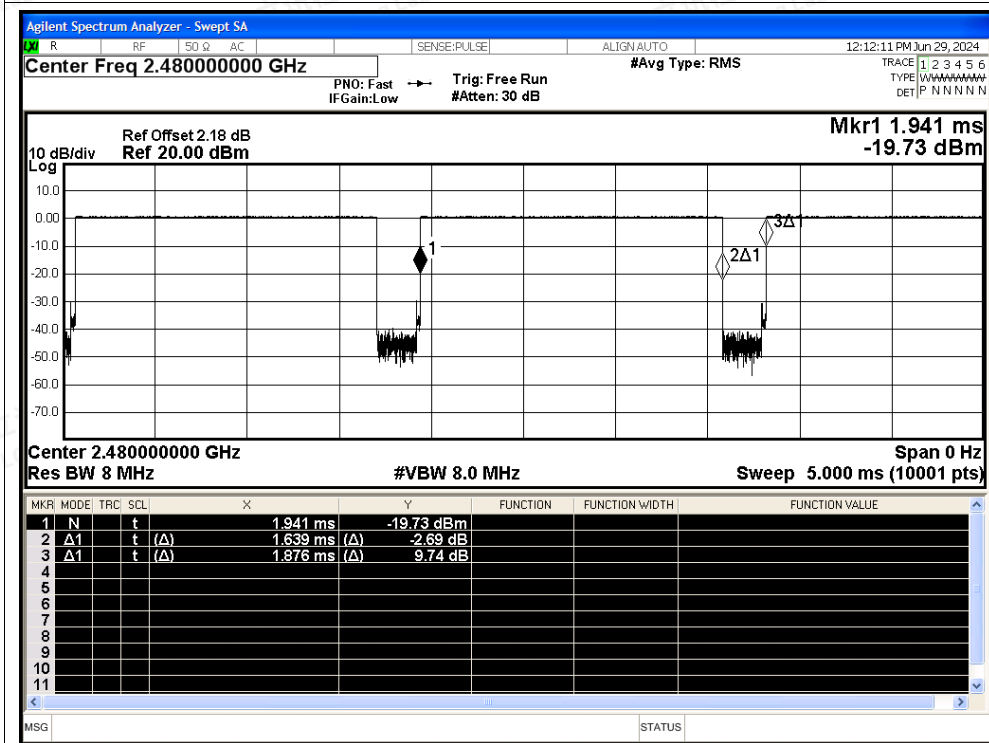


Duty Cycle NVNT BLE 2M 2402MHz Ant1

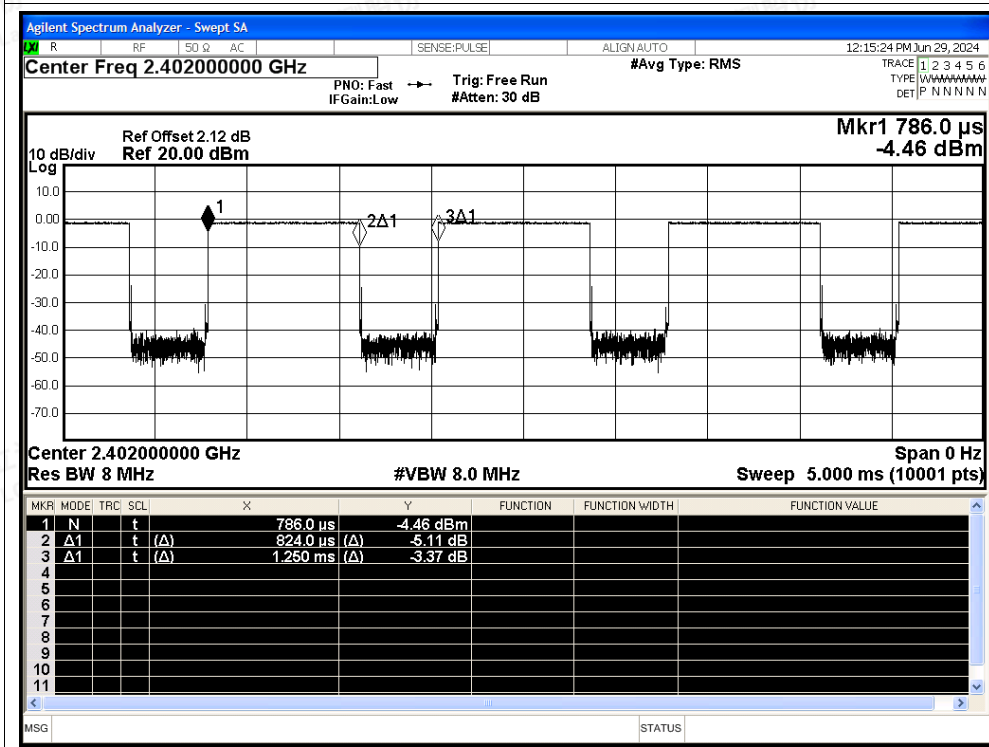




Duty Cycle NVNT BLE 2M 2440MHz Ant1

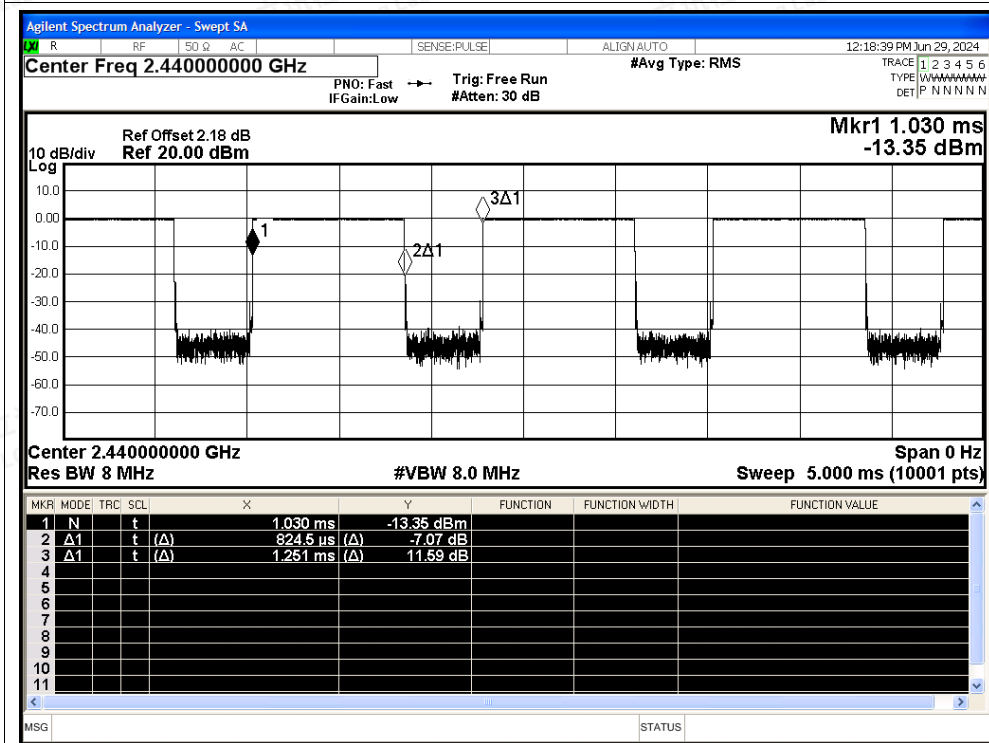

Duty Cycle NVNT BLE 2M 2480MHz Ant1

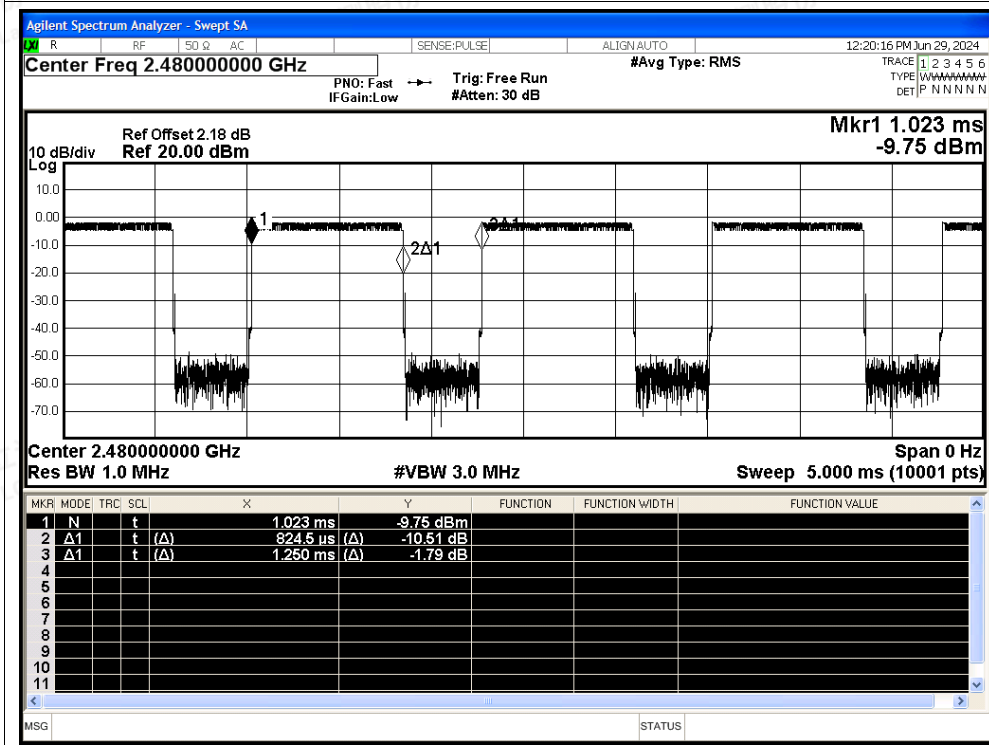



B.7 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | 2310 | -51.33 | 2 | - | 45.93 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2310 | -58.48 | 2 | 0.59 | 39.37 | Average | 54 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2374.512 | -46.79 | 2 | - | 50.47 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2388.624 | -57.63 | 2 | 0.59 | 40.22 | Average | 54 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2390 | -51.76 | 2 | - | 45.5 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2390 | -58.5 | 2 | 0.59 | 39.35 | Average | 54 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2483.5 | -48.35 | 2 | - | 48.91 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2483.5 | -57.48 | 2 | 0.59 | 40.37 | Average | 54 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2484.184 | -43.1 | 2 | - | 54.16 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2499.976 | -56.73 | 2 | 0.59 | 41.12 | Average | 54 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2500 | -49.48 | 2 | - | 47.78 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2500 | -57.46 | 2 | 0.59 | 40.39 | Average | 54 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2310 | -51.14 | 2 | - | 46.12 | Peak | 74 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2310 | -58.34 | 2 | 1.81 | 40.73 | Average | 54 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2317.584 | -47.09 | 2 | - | 50.17 | Peak | 74 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2381.424 | -57.53 | 2 | 1.81 | 41.54 | Average | 54 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2390 | -49.95 | 2 | - | 47.31 | Peak | 74 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2390 | -57.87 | 2 | 1.81 | 41.2 | Average | 54 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2483.5 | -47.27 | 2 | - | 49.99 | Peak | 74 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2483.5 | -57.82 | 2 | 1.81 | 41.25 | Average | 54 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2484.088 | -44.66 | 2 | - | 52.6 | Peak | 74 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2485.528 | -56.99 | 2 | 1.81 | 42.08 | Average | 54 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2500 | -49.12 | 2 | - | 48.14 | Peak | 74 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2500 | -57.42 | 2 | 1.81 | 41.65 | Average | 54 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

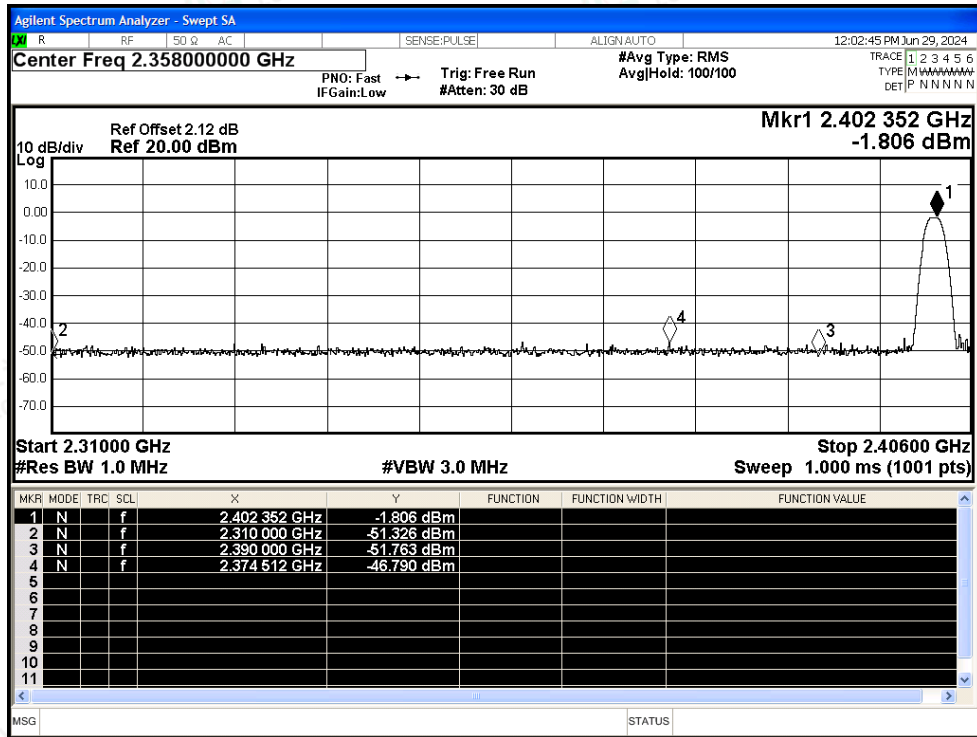


Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

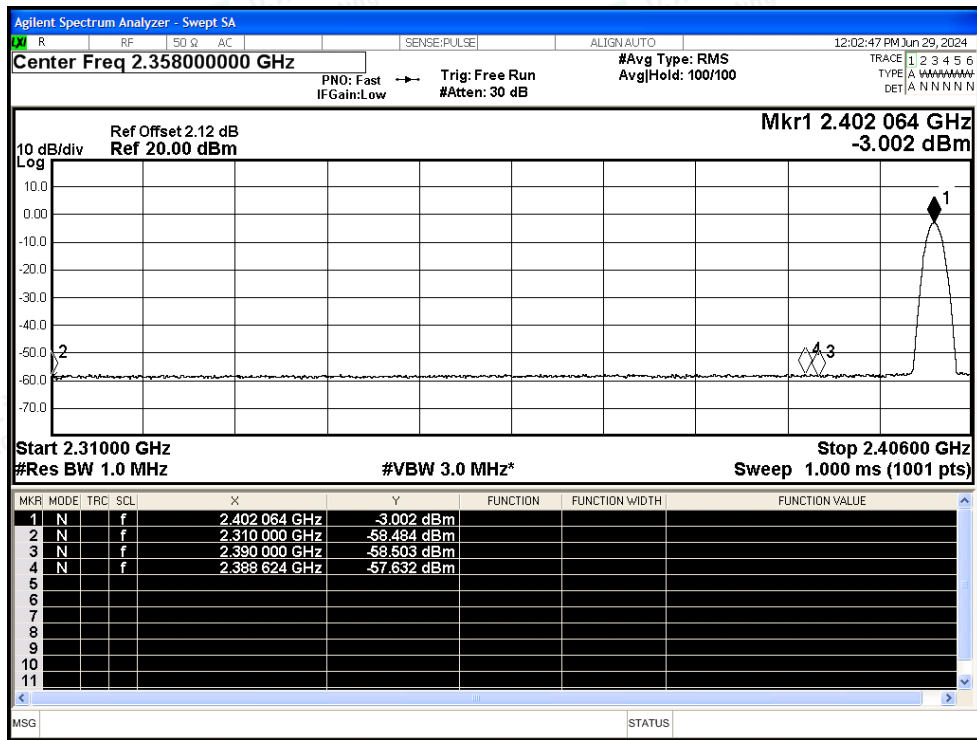




Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

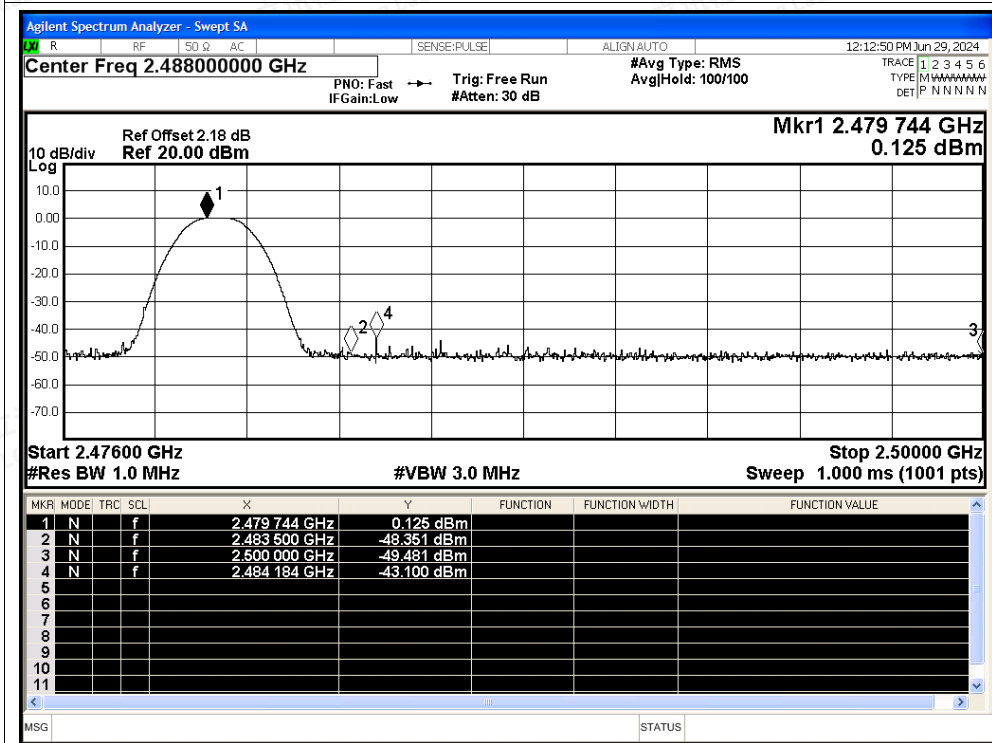


Restrict Band NVNT BLE 1M 2480MHz Ant1 Average

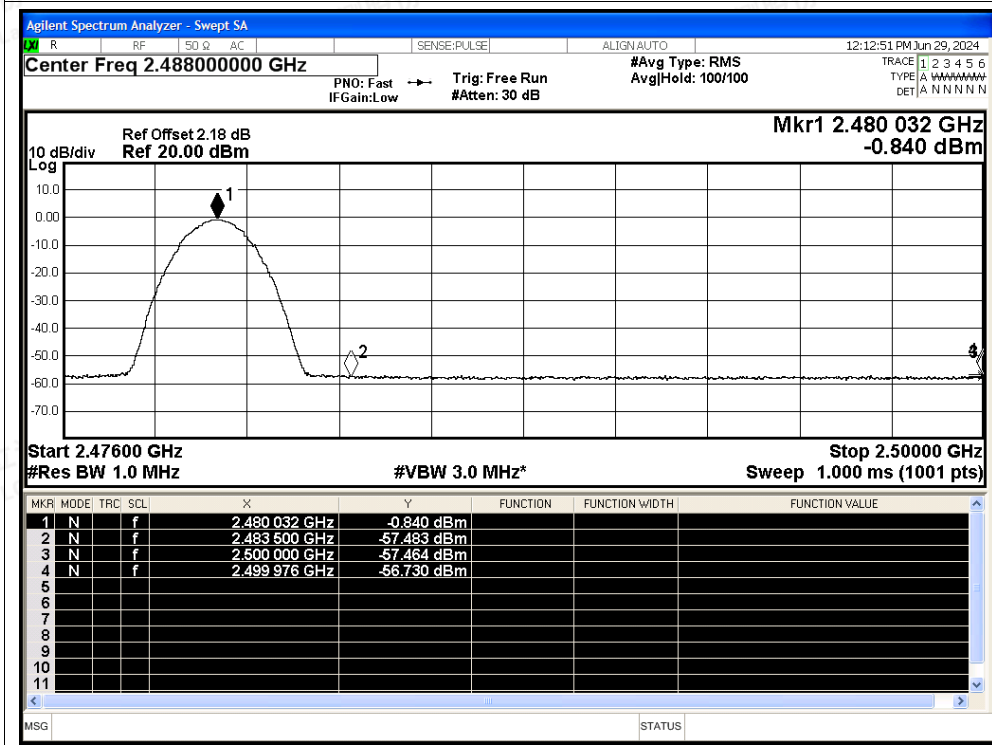




Restrict Band NVNT BLE 2M 2402MHz Ant1 Peak

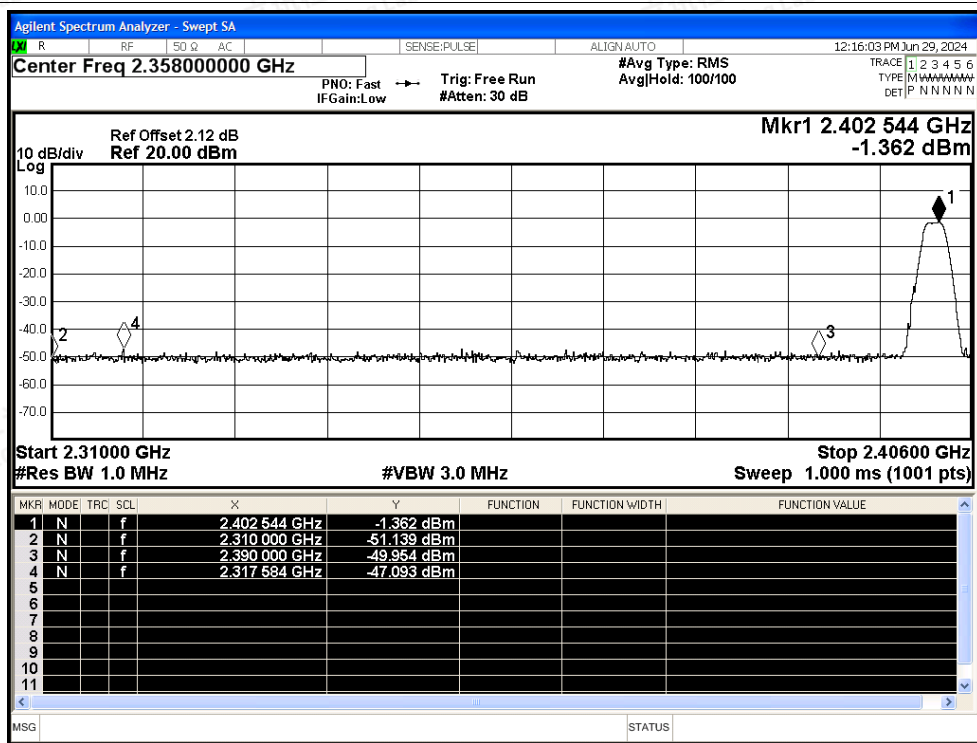


Restrict Band NVNT BLE 2M 2402MHz Ant1 Average

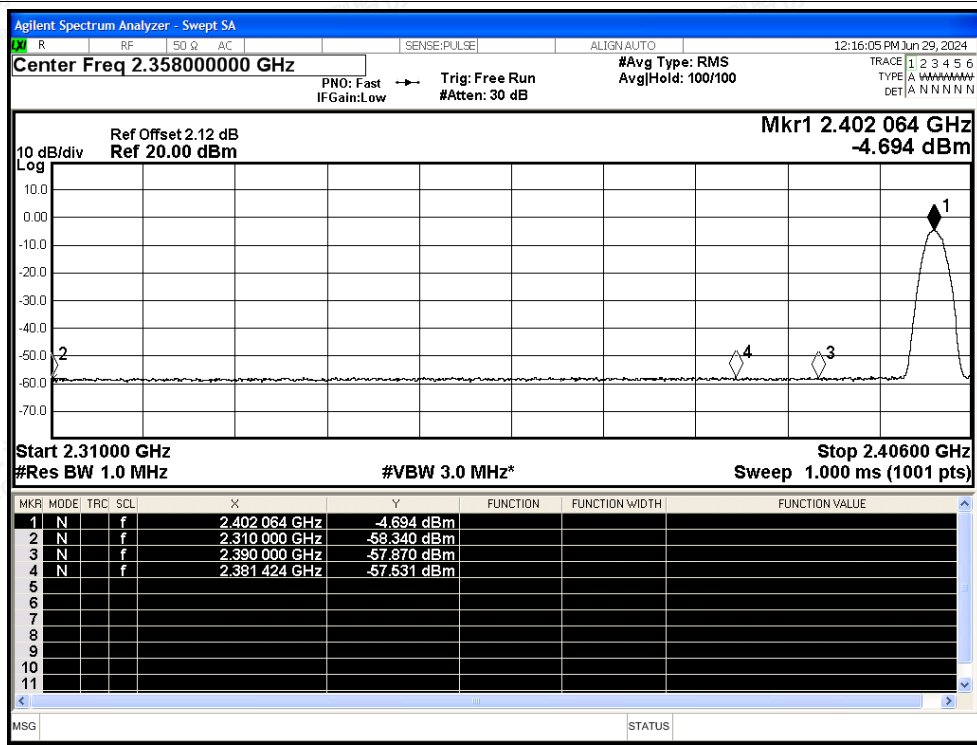




Restrict Band NVNT BLE 2M 2480MHz Ant1 Peak

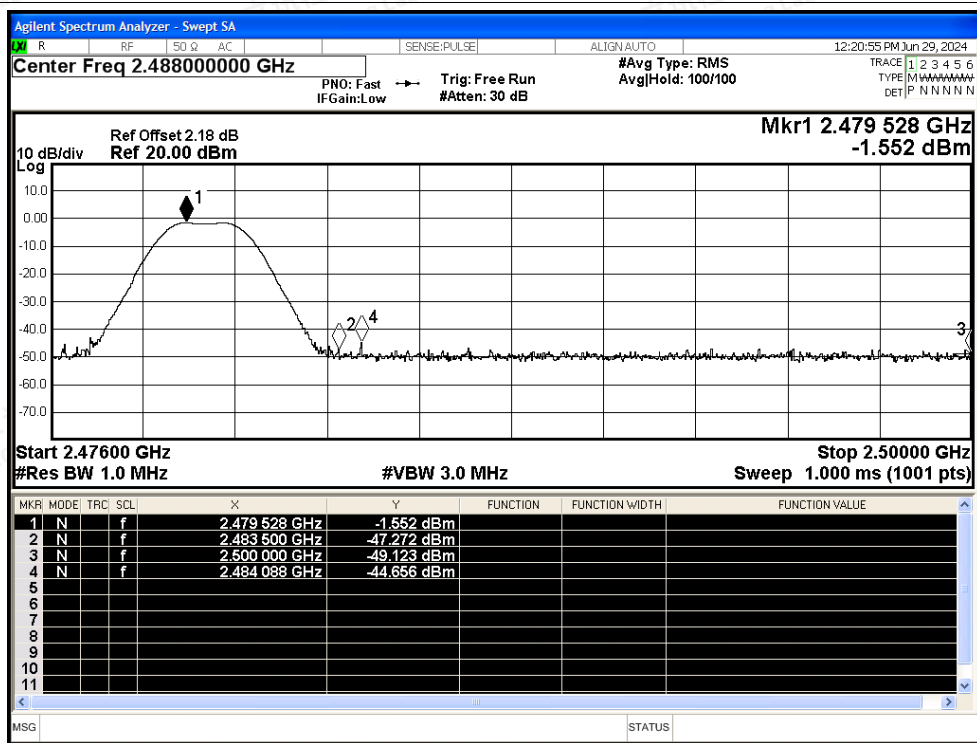

Restrict Band NVNT BLE 2M 2480MHz Ant1 Average

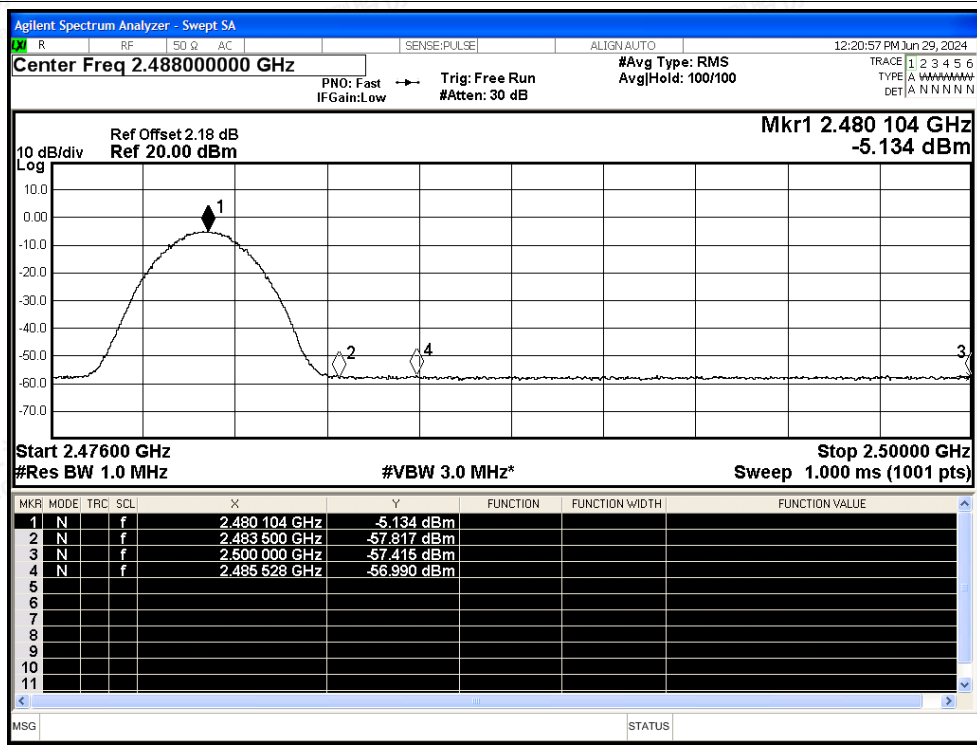

Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity