



No.:
FCCSZ2024-0001-RF2

TEST REPORT

FCC ID : 2A3WD-AQ4

NAME OF SAMPLE : Quantum Access Q4

APPLICANT : QUAMTUM CONNECTIVITY DE MEXICO, S.A. DE C.V.

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: QUAMTUM CONNECTIVITY DE MEXICO, S.A. DE C.V. Address: Torcuato Tasso 245, Despacho 403, Oficina 21Col. Polanco V Sección, C.P. 11560 Alcaldía Miguel Hidalgo, CDMX, México	
Manufacturer		Name: QUAMTUM CONNECTIVITY DE MEXICO, S.A. DE C.V. Address: Torcuato Tasso 245, Despacho 403, Oficina 21Col. Polanco V Sección, C.P. 11560 Alcaldía Miguel Hidalgo, CDMX, México	
Equipment Under Test		Name: Quantum Access Q4 Model/Type: Quantum Access Q4 Brand: Quantum Serial NO.: N/A Sample NO.: 4-2	
Date of Receipt.	2024.01.04	Date of Testing	2024.01.04 ~ 2024.02.21
Test Specification		Test Result	
FCC 47 CFR Part 2, 22(H), 24(E), 27 ANSI/TIA-603-E ANSI C63.26-2015		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: 2024.02.21	
Tested by:  Zhu Yulin Name Signature		Reviewed by:  Huang Meng Name Signature	Approved by:  Dong Sanbi Name Signature
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

1 SUMMARY OF TEST RESULTS	5
1.1 WCDMA BAND 2 / BAND 5	5
1.2 LTE BAND 2	6
1.3 LTE BAND 4	6
1.4 LTE BAND 5	7
1.5 LTE BAND 7	7
1.6 LTE BAND 66	8
1.7 LIST OF TEST AND MEASUREMENT INSTRUMENTS	9
2 GENERAL INFORMATION	10
2.1 GENERAL PRODUCT INFORMATION	10
2.2 DESCRIPTION OF ACCESSORIES	10
2.3 ANTENNA TYPE AND GAIN	11
2.4 OPERATING FREQUENCY AND MAX CONDUTED POWER	11
2.5 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
2.7 DESCRIPTION OF SUPPORT UNITS	15
2.8 MEASUREMENT UNCERTAINTY	16
2.9 TEST LOCATION	16
3 TEST TYPES AND RESULTS	17
3.1 RADIATED EMISSION MEASUREMENT	17
3.2 OUT POWER MEASUREMENT	27
3.3 FREQUENCY STABILITY	28
3.4 OCCUPIED BANDWIDTH MEASUREMENT	29
3.5 BAND EDGE MEASUREMENT	30
3.6 CONDUCTED SPURIOUS EMISSIONS	31
3.7 PEAK TO AVERAGE RATIO	32
4 PHOTOGRAPHS OF TEST SETUP	33



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2024-0001-RF2	Original release	2024.02.21



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications

1.1 WCDMA Band 2 / Band 5

FCC STANDARD SECTION	TEST TYPE	LIMIT	REPORT SECTION	RESULT
§2.1046	Conducted Power Output	---	Annex A of FCCSZ2024-0001-RF2-A1	Report Only
§22.913(a)(5)	Effective Radiated Power (WCDMA B5)	ERP < 7 Watt	Annex A of FCCSZ2024-0001-RF2-A1	PASS
§24.232(c)	Equivalent Isotropic Radiated Power (WCDMA B2)	EIRP < 2Watt		
§2.1049	Occupied Bandwidth	---	Annex C of FCCSZ2024-0001-RF2-A1	Report Only
§24.232(d)	Peak-to-Average Power Ratio	<13 dB	Annex B of FCCSZ2024-0001-RF2-A1	PASS
§2.1055 §22.355	Frequency Stability	< 2.5 ppm	Annex F of FCCSZ2024-0001-RF2-A1	PASS
§2.1055 §24.235		Within authorized bands of operation/frequency block.		
§2.1051 §22.917 §24.238(a)	Band Edge Compliance	< 43+10log10(P[Watts])	Annex D of FCCSZ2024-0001-RF2-A1	PASS
§2.1051 §22.917 §24.238(a)	Conducted Spurious Emission	< 43+10log10(P[Watts])	Annex E of FCCSZ2024-0001-RF2-A1	PASS
§2.1051 §22.917 §24.238(a)	Radiates Spurious Emission	< 43+10log10(P[Watts])	See section 3.1	PASS



1.2 LTE Band 2

FCC PART SECTION	TEST TYPE	LIMIT	REPORT SECTION	RESULT
§2.1046	Conducted Power Output	---	Annex A of FCCSZ2024-0001-RF2-A2	Report Only
§24.232(c)	Equivalent Isotropic Radiated Power	EIRP < 2Watt	Annex A of FCCSZ2024-0001-RF2-A2	PASS
§2.1049	Occupied Bandwidth	---	Annex C of FCCSZ2024-0001-RF2-A2	Report Only
---	Peak-to-Average Power Ratio	<13 dB	Annex B of FCCSZ2024-0001-RF2-A2	PASS
§2.1055 24.235	Frequency Stability	Within authorized bands of operation/frequency block.	Annex F of FCCSZ2024-0001-RF2-A2	PASS
§2.1051 §24.238(a)	Band Edge Compliance	< 43+10log10(P[Watts])	Annex D of FCCSZ2024-0001-RF2-A2	PASS
§2.1051 §24.238(a)	Conducted Spurious Emission	< 43+10log10(P[Watts])	Annex E of FCCSZ2024-0001-RF2-A2	PASS
§2.1051 §24.238(a)	Radiates Spurious Emission	< 43+10log10(P[Watts])	See section 3.1	PASS

1.3 LTE Band 4

FCC PART SECTION	TEST TYPE	LIMIT	REPORT SECTION	RESULT
§2.1046	Conducted Power Output	---	Annex A of FCCSZ2024-0001-RF2-A3	Report Only
§27.50(d)(4)	Equivalent Isotropic Radiated Power	EIRP < 1Watt	Annex A of FCCSZ2024-0001-RF2-A3	PASS
§2.1049	Occupied Bandwidth	---	Annex C of FCCSZ2024-0001-RF2-A3	Report Only
---	Peak-to-Average Power Ratio	<13 dB	Annex B of FCCSZ2024-0001-RF2-A3	PASS
§2.1055 §27.54	Frequency Stability	Within authorized bands of operation/frequency block.	Annex F of FCCSZ2024-0001-RF2-A3	PASS
§2.1051 §27.53(h)	Band Edge Compliance	< 43+10log10(P[Watts])	Annex D of FCCSZ2024-0001-RF2-A3	PASS
§2.1051 §27.53(h)	Conducted Spurious Emission	< 43+10log10(P[Watts])	Annex E of FCCSZ2024-0001-RF2-A3	PASS
§2.1051 §27.53(h)	Radiates Spurious Emission	< 43+10log10(P[Watts])	See section 3.1	PASS



1.4 LTE Band 5

FCC PART SECTION	TEST TYPE	LIMIT	REPORT SECTION	RESULT
§2.1046	Conducted Power Output	---	Annex A of FCCSZ2024-0001-RF2-A4	Report Only
§22.913(a)(5)	Equivalent Radiated Power	EIRP < 7Watt	Annex A of FCCSZ2024-0001-RF2-A4	PASS
§2.1049	Occupied Bandwidth	---	Annex C of FCCSZ2024-0001-RF2-A4	Report Only
---	Peak-to-Average Power Ratio	<13 dB	Annex B of FCCSZ2024-0001-RF2-A4	PASS
§2.1055 §22.355	Frequency Stability	< 2.5 ppm	Annex F of FCCSZ2024-0001-RF2-A4	PASS
§2.1051 §22.917	Band Edge Compliance	< 43+10log10(P[Watts])	Annex D of FCCSZ2024-0001-RF2-A4	PASS
§2.1051 §22.917	Conducted Spurious Emission	< 43+10log10(P[Watts])	Annex E of FCCSZ2024-0001-RF2-A4	PASS
§2.1051 §22.917	Radiates Spurious Emission	< 43+10log10(P[Watts])	See section 3.1	PASS

1.5 LTE Band 7

FCC PART SECTION	TEST TYPE	LIMIT	REPORT SECTION	RESULT
§2.1046	Conducted Power Output	---	Annex A of FCCSZ2024-0001-RF2-A5	Report Only
§27.50(h)(2)	Equivalent Isotropic Radiated Power	EIRP < 2Watt	Annex A of FCCSZ2024-0001-RF2-A5	PASS
§2.1049	Occupied Bandwidth	>1MHz	Annex C of FCCSZ2024-0001-RF2-A5	Report Only
---	Peak-to-Average Power Ratio	<13 dB	Annex B of FCCSZ2024-0001-RF2-A5	PASS
§2.1055 §27.54	Frequency Stability	Within authorized bands of operation/frequency block.	Annex F of FCCSZ2024-0001-RF2-A5	PASS
§2.1051 §27.53(m4)	Band Edge Compliance	For mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least: (i) 40 + 10 log10 p from the channel edges to 5 MHz away (ii) 43 + 10 log10 p between 5 MHz and X MHz from the channel edges,	Annex D of FCCSZ2024-0001-RF2-A5	PASS
§2.1051 §27.53(m4)	Conducted Spurious Emission		Annex E of FCCSZ2024-0001-RF2-A5	PASS
§2.1051 §27.53(m4)	Radiates Spurious Emission		See section 3.1	PASS



		and (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges In addition, the attenuation shall not be less than $43 + 10 \log(p)$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz		
--	--	--	--	--

1.6 LTE Band 66

FCC PART SECTION	TEST TYPE	LIMIT	REPORT SECTION	RESULT
§2.1046	Conducted Power Output	---	Annex A of FCCSZ2024-0001-RF2-A6	Report Only
§27.50(d)(4)	Equivalent Isotropic Radiated Power	EIRP < 1Watt	Annex A of FCCSZ2024-0001-RF2-A6	PASS
§2.1049	Occupied Bandwidth	---	Annex C of FCCSZ2024-0001-RF2-A6	Report Only
---	Peak-to-Average Power Ratio	<13 dB	Annex B of FCCSZ2024-0001-RF2-A6	PASS
§2.1055 §27.54	Frequency Stability	Within authorized bands of operation/frequency block.	Annex F of FCCSZ2024-0001-RF2-A6	PASS
§2.1051 §27.53(h)	Band Edge Compliance	< $43 + 10 \log_{10}(P[\text{Watts}])$	Annex D of FCCSZ2024-0001-RF2-A6	PASS
§2.1051 §27.53(h)	Conducted Spurious Emission	< $43 + 10 \log_{10}(P[\text{Watts}])$	Annex E of FCCSZ2024-0001-RF2-A6	PASS
§2.1051 §27.53(h)	Radiates Spurious Emission	< $43 + 10 \log_{10}(P[\text{Watts}])$	See section 3.1	PASS



1.7 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Antenna Port Conducted Test					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2024.5.21
#4Shielding room	MORI	443	N/A	3 year	2026.5.16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168588	1 year	2024.5.25
Analog signal Generator(100kHz~12.75GHz)	Rohde&Schwarz	SMB 100A	181882	1 year	2024.5.21
Vector signal Generator(8kHz~6GHz)	Rohde&Schwarz	SMBV 100B	101846	1 year	2024.5.21
DC power supply	Rohde&Schwarz	HMC8041-G	101203	1 year	2024.5.21
RF control unit(2/3/4/5G)	Tonscend	JS0806-1	CS0300027	1 year	2024.5.21
Automatic filter bank(2/3/4G)	Tonscend	JS0806-F	CS0300028	1 year	2024.5.21
Automatic filter bank(5G)	Tonscend	JS0806-F-5G NR	N/A	1 year	2024.5.21
Temperature and humidity meter	UNI-T	A10T	C193561464	1 year	2024.5.21
Radio Communication Analyzer	Anritsu	MT8821C	6272374548	1 year	2025.1.09
Constant temperature humidity chamber	TEELONG	TL-HW-225B	20220518-01	1 year	2024.5.25
Radio Communication Test Station	Anritsu	MT8000A	6272354169	1 year	2025.1.09
Radiation Spurious Test - 3M Chamber #2					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2024.5.21
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2024.5.25
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2024.2.21
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2024.3.25
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2024.3.25
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2024.5.21
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2024.5.21
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100299	1 year	2024.5.21
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2024.5.21
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2024.5.21
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2024.5.21
#2 control room	MORI	433	CS0300028	3 year	2024.5.21
Temperature and humidity meter	/	C193561517	C193561517	1 year	2024.5.21
Radiation Spurious Test - 3M Chamber #1					
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2024.5.25
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2024.5.26
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	1132	1 year	2024.2.14
Horn antenna(1GHz-18GHz)	ETS	3117	227634	1 year	2024.3.25
Horn antenna(18GHz-40GHz)	SCHWARZBECK	BBHA 9170	01003	1 year	2024.3.25
3m anechoic chamber	MORI	966	CS0200019	3 year	2026.5.18
Attenuator	/	SJ-5dB	607684	1 year	2024.2.21
#1 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561473	CS0200071	1 year	2024.5.21



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Quantum Access Q4		
BRAND	Quantum		
MODEL	Quantum Access Q4		
FCC ID	2A3WD-AQ4		
POWER SUPPLY	DC 5V from Adapter		
MODULATION TYPE	WCDMA		BPSK, QPSK
	LTE	UL	QPSK, 16QAM
		DL	QPSK, 16QAM, 64QAM
WCDMA BAND	B2 / B5		
LTE BAND	B2 / B4 / B5 / B7 / B66		
OPERATING FREQUENCY	See section 2.4		
MAXIMUM OUTPUT POWER	See section 2.4		
ANTENNA TYPE AND GAIN Remark 4/5)	See section 2.3		
HARDWARE VERSION:	1.0		
SOFTWARE VERSION:	Quantum Access Q4_Ver 1.0		
I/O PORTS	Refer to user's manual		
CABLE SUPPLIED	RJ45, unshielded, 1.5m		
Remark:			
1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.			
3. Please refer to the EUT photo document (Reference No.: FCCSZ2024-0001-EUT) for detailed product photo.			
4. Please refer to the antenna report.			
5. Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.			

2.2 DESCRIPTION OF ACCESSORIES

Adapter	
BRAND	N/A
Model No.:	KFL-T41
Input:	100-240 V ~ 50/60Hz 0.3A
Output:	5.0 V $\equiv$ 2 A 10.0W
AC Cable:	N/A
DC Cable:	1.20 Meter, Unshielded without ferrite



2.3 ANTENNA TYPE AND GAIN

Mode	Band	Antenna Type		Antenna Gain(dBi)	
		Main	Diversity	Main	Diversity
WCDMA	WCDMA B2	External Rod Antenna	External Rod Antenna	5.1	5.1
	WCDMA B5	External Rod Antenna	External Rod Antenna	2.4	2.4
LTE	LTE B2	External Rod Antenna	External Rod Antenna	5.1	5.1
	LTE B4	External Rod Antenna	External Rod Antenna	3.4	3.4
	LTE B5	External Rod Antenna	External Rod Antenna	2.4	2.4
	LTE B7	External Rod Antenna	External Rod Antenna	6.3	6.3
	LTE B66	External Rod Antenna	External Rod Antenna	3.4	3.4

2.4 OPERATING FREQUENCY AND MAX CONDUTED POWER

Mode	Band	TX(MHz)	RX(MHz)	Maximum Output Power (dBm)
WCDMA	WCDMA B2	1850 ~ 1910	1930 ~ 1990	22.88
	WCDMA B5	824 ~ 849	869 ~ 894	22.56
LTE	LTE B2	1850 ~ 1910	1930 ~ 1990	23.07
	LTE B4	1710 ~ 1755	2110 ~ 2155	22.75
	LTE B5	824 ~ 849	869 ~ 894	23.74
	LTE B7	2500 ~ 2570	2620 ~ 2690	23.43
	LTE B66	1710 ~ 1780	2110 ~ 2180	22.95



2.5 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

EUT CONFIGURE MODE	DESCRIPTION
-	EUT + Adapter + with WCDMA or LTE link

Test modes are chosen as the worst case configuration below for WCDMA

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
RF power output	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
	4132 to 4233	4132, 4182, 4233	WCDMA Band 5
Equivalent Isotropic Radiated Power	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
Effective Radiated Power	4132 to 4233	4132, 4182, 4233	WCDMA Band 5
Frequency Stability	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
	4132 to 4233	4132, 4182, 4233	WCDMA Band 5
Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
	4132 to 4233	4132, 4182, 4233	WCDMA Band 5
Band Edge Compliance	9262 to 9538	9262, 9538	WCDMA Band 2
	4132 to 4233	4132, 4233	WCDMA Band 5
Conducted Spurious Emission	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
	4132 to 4233	4132, 4182, 4233	WCDMA Band 5
Radiates Spurious Emission	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
	4132 to 4233	4132, 4182, 4233	WCDMA Band 5
Peak-to-Average Power Ratio	9262 to 9538	9262, 9400, 9538	WCDMA Band 2
	4132 to 4233	4132, 4182, 4233	WCDMA Band 5



Test modes are chosen as the worst case configuration below for LTE

Test items	LTE Band	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1%	50%	100%	L	M	H
RF power output	2	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	5	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
	66	O	O	O	O	O	O	O	O	O	O	O	O	O	O
ERP/ EIRP	2	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	5	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
	66	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	2	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	5	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	66	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing. 3. Only the worst case was shown in test report														

Test items	LTE	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1%	50%	100%	L	M	H
Band Edge Compliance	2	O	O	O	O	O	O	O	-	O	-	O	O	-	O
	4	O	O	O	O	O	O	O	-	O	-	O	O	-	O
	5	O	O	O	O	-	-	O	-	O	-	O	O	-	O
	7	-	-	O	O	O	O	O	-	O	-	O	O	-	O
	66	O	O	O	O	O	O	O	-	O	-	O	O	-	O
Peak-to-Average Power Ratio	2	O	O	O	O	O	O	O	O	O	-	O	O	O	O
	4	O	O	O	O	O	O	O	O	O	-	O	O	O	O
	5	O	O	O	O	-	-	O	O	O	-	O	O	O	O
	7	-	-	O	O	O	O	O	O	O	-	O	O	O	O
	66	O	O	O	O	O	O	O	O	O	-	O	O	O	O



Frequency Stability	2	-	-	-	-	-	O	O	-	-	-	O	O	O	O
	4	-	-	-	-	-	O	O	-	-	-	O	O	O	O
	5	-	-	-	O	-	-	O	-	-	-	O	O	O	O
	7	-	-	-	-	-	O	O	-	-	-	O	O	O	O
	66	-	-	-	-	-	O	O	-	-	-	O	O	O	O
Conducted Spurious Emission	2	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	5	O	O	O	O	-	-	O	-	O	-	-	O	O	O
	7	-	-	O	O	O	O	O	-	O	-	-	O	O	O
	66	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission (Note3)	2	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	5	O	O	O	O	-	-	O	-	O	-	-	O	O	O
	7	-	-	O	O	O	O	O	-	O	-	-	O	O	O
	66	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing. 3. Only the worst case was shown in test report														

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RF power output	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Effective Radiated Power	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Equivalent Isotropic Radiated Power	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Frequency Stability	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Occupied Bandwidth	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Band Edge Compliance	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Conducted Spurious Emission	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin
Radiates Spurious Emission	24.6deg. C, 53%RH	DC 5V from Adapter	Liu Yuan
Peak-to-Average Power Ratio	25.3deg. C, 57%RH	DC 5V from Adapter	Zhu Yulin



2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC 47 CFR PART 2

FCC 47 CFR PART 22

FCC 47 CFR PART 24

FCC 47 CFR PART 27

KDB 971168 D01 POWER MEAS LICENSE DIGITAL SYSTEMS V03R01

ANSI/TIA-603-E

ANSI C63.26-2015

ANSI C63.4-2014

Note: All test items have been performed and recorded as per the above standards

2.7 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	Notebook	HP	HP ProBook 440 GB Notebook PC	N/A	Lab		
2	Notebook	HP	HP ZHAN 66 Pro 14 G4 Notebook PC	N/A	Lab		
3	Mobile Phone	Samsung	S21	N/A	Lab		
Support Cable							
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A



2.8 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	± 1.86 %
2	RF output power, conducted	± 0.9 dB
3	Power Spectral Density, conducted	± 0.8 dB
4	Conducted emission test	± 2.7 dB
5	Radiated emission 9kHz-30MHz	± 5.6 dB
	Radiated emission 30MHz-1GHz	± 4.6 dB
	Radiated emission 1GHz-18GHz	± 4.4 dB
	Radiated emission 18GHz-40GHz	± 5.1 dB
6	Temperature	± 0.73 °C
7	Humidity	± 3.90 %
8	Supply voltages	± 0.37 %
9	Time	± 0.27 %
Remark: 95% Confidence Levels, k=2.		

2.9 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province 518110 P.R.China

Post Code: 518110 Tel: 0755-23763060-8805
Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn
FCC(Test firm designation number: CN1363)
IC(Test firm CAB identifier number: CN0137)
CNAS(Test firm designation number: L16091)



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION MEASUREMENT

3.6.1 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $EIRP(dBm) = S.G.POWER - TX \text{ cable loss} + \text{Antenna gain.}$
- d. $E.R.P(dBm) = E.I.P.R - 2.15dBi.$

NOTE:


- 1.The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
- 2.Only the worst case was shown in test report

3.6.2 TEST SETUP

Below 1GHz Test Setup:

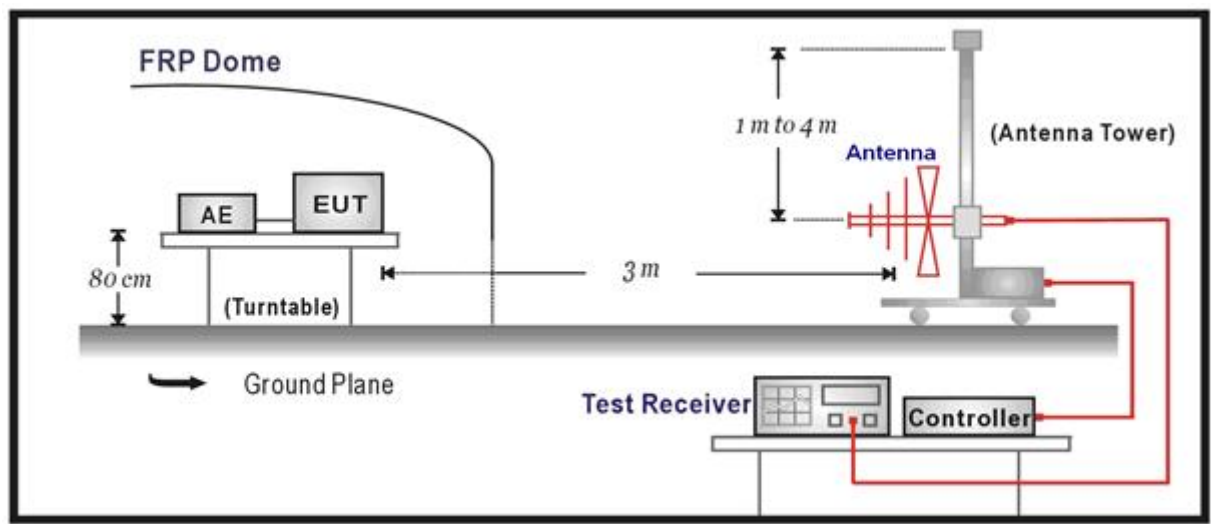

Above 1GHz Test Setup:

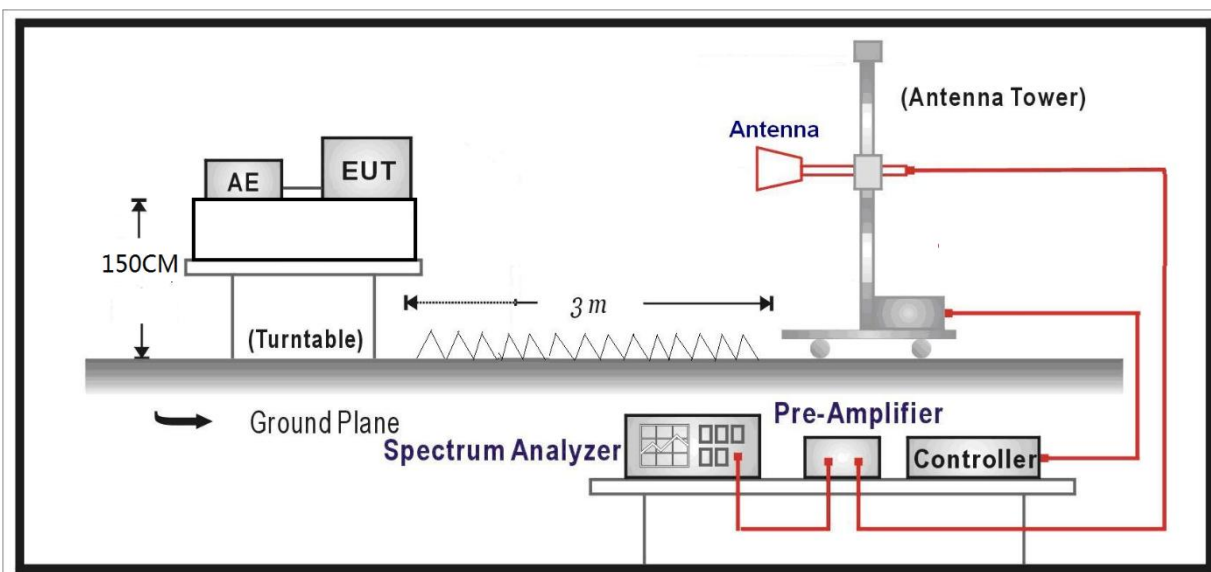

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.3 TEST RESULTS

THE WORST CASE DATA

Test Mode		WCDMA B2		Channel		CH 9400	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	162.2652	-85.86	-60.99	-13.00	47.99	24.87	296
2	1081.4871	-91.58	-52.36	-13.00	39.36	39.22	53
3	3131.0231	-60.96	-44.13	-13.00	31.13	16.83	321
4	5960.396	-61.17	-40.74	-13.00	27.74	20.43	73
5	7520.432	-64.12	-45.81	-13.00	32.81	18.31	234
6	16959.766	-79.51	-44.97	-13.00	31.97	34.54	112
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	1099.786	-92.02	-52.55	-13.00	39.55	39.47	133
2	1353.1306	-58.08	-53.10	-13.00	40.10	4.98	133
3	3548.1848	-58.84	-44.67	-13.00	31.67	14.17	295
4	6123.4323	-61.42	-40.95	-13.00	27.95	20.47	233
5	7525.1125	-61.41	-43.24	-13.00	30.24	18.17	135
6	16387.5788	-78.19	-43.87	-13.00	30.87	34.32	73
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		WCDMA B2		Channel		CH 9400	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	162.2652	-85.86	-60.99	-13.00	47.99	24.87	296
2	1081.4871	-91.58	-52.36	-13.00	39.36	39.22	53
3	3131.0231	-60.96	-44.13	-13.00	31.13	16.83	321
4	5960.396	-61.17	-40.74	-13.00	27.74	20.43	73
5	7520.432	-64.12	-45.81	-13.00	32.81	18.31	234
6	16959.766	-79.51	-44.97	-13.00	31.97	34.54	112
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	1099.786	-92.02	-52.55	-13.00	39.55	39.47	133
2	1353.1306	-58.08	-53.10	-13.00	40.10	4.98	133
3	3548.1848	-58.84	-44.67	-13.00	31.67	14.17	295
4	6123.4323	-61.42	-40.95	-13.00	27.95	20.47	233
5	7525.1125	-61.41	-43.24	-13.00	30.24	18.17	135
6	16387.5788	-78.19	-43.87	-13.00	30.87	34.32	73
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		WCDMA B5		Channel		CH 4182	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	161.1951	-86.61	-61.31	-13.00	48.31	25.30	318
2	249.907	-86.57	-61.87	-13.00	48.87	24.70	196
3	2202.6005	-58.76	-48.22	-13.00	35.22	10.54	258
4	3134.9835	-59.80	-43.24	-13.00	30.24	16.56	0
5	6182.1782	-60.81	-40.22	-13.00	27.22	20.59	236
6	17352.9253	-79.36	-44.40	-13.00	31.40	34.96	134
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	59.963	-88.86	-61.94	-13.00	48.94	26.92	237
2	160.446	-88.87	-62.75	-13.00	49.75	26.12	298
3	235.1395	-86.00	-62.38	-13.00	49.38	23.62	175
4	2125.8252	-55.77	-48.08	-13.00	35.08	7.69	175
5	3764.6865	-60.03	-45.12	-13.00	32.12	14.91	360
6	6067.9868	-60.72	-40.17	-13.00	27.17	20.55	197
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		LTE B2-QPSK-20MHz		Channel		CH 18700	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	167.4017	-84.62	-59.18	-13.00	46.18	25.44	298
2	1095.1845	-91.76	-52.43	-13.00	39.43	39.33	117
3	3129.703	-59.51	-42.66	-13.00	29.66	16.85	131
4	4417.1617	-60.04	-43.84	-13.00	30.84	16.20	131
5	7000.9001	-55.63	-37.14	-13.00	24.14	18.49	298
6	8609.811	-66.88	-47.45	-13.00	34.45	19.43	238
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	1093.4723	-90.95	-51.69	-13.00	38.69	39.26	360
2	3129.703	-60.08	-44.63	-13.00	31.63	15.45	238
3	6097.0297	-60.85	-40.41	-13.00	27.41	20.44	58
4	7000.9001	-52.73	-34.81	-13.00	21.81	17.92	250
5	8609.811	-61.93	-42.65	-13.00	29.65	19.28	310
6	16388.7489	-78.63	-44.17	-13.00	31.17	34.46	190
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		LTE B4-QPSK-1.4MHz		Channel		CH 20393	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	168.1508	-84.54	-58.99	-13.00	45.99	25.55	311
2	1055.3765	-90.81	-51.97	-13.00	38.97	38.84	190
3	3133.3333	-60.46	-43.79	-13.00	30.79	16.67	58
4	5353.7954	-61.17	-42.12	-13.00	29.12	19.05	298
5	7014.9415	-56.63	-38.19	-13.00	25.19	18.44	360
6	8616.8317	-66.47	-47.10	-13.00	34.10	19.37	251
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	166.2246	-86.18	-61.35	-13.00	48.35	24.83	357
2	1057.3027	-91.32	-52.63	-13.00	39.63	38.69	56
3	3129.3729	-59.78	-44.37	-13.00	31.37	15.41	70
4	4310.8911	-60.34	-45.19	-13.00	32.19	15.15	190
5	7014.9415	-52.15	-34.21	-13.00	21.21	17.94	56
6	8616.8317	-61.69	-42.56	-13.00	29.56	19.13	296
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		LTE B5-QPSK-5MHz		Channel		CH 20425	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	160.018	-84.76	-59.23	-13.00	46.23	25.53	296
2	610.5331	-92.78	-59.00	-13.00	46.00	33.78	175
3	1897.7796	-51.05	-44.99	-13.00	31.99	6.06	55
4	2455.7311	-53.46	-42.67	-13.00	29.67	10.79	357
5	3129.3729	-60.77	-43.97	-13.00	30.97	16.80	311
6	6211.8812	-60.83	-40.54	-13.00	27.54	20.29	251
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	58.7859	-89.07	-61.61	-13.00	48.61	27.46	178
2	2473.2146	-55.71	-46.92	-13.00	33.92	8.79	298
3	3297.0297	-53.37	-39.89	-13.00	26.89	13.48	312
4	4121.4521	-53.54	-39.33	-13.00	26.33	14.21	131
5	4945.8746	-57.31	-39.07	-13.00	26.07	18.24	71
6	6221.4521	-60.27	-40.47	-13.00	27.47	19.80	360
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		LTE B7-QPSK-20MHz		Channel		CH 20850	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	1085.6606	-91.32	-52.12	-25.00	27.12	39.20	193
2	2125.4451	-55.35	-47.92	-25.00	22.92	7.43	315
3	5823.1023	-59.95	-40.43	-25.00	15.43	19.52	112
4	7502.8803	-63.00	-44.85	-25.00	19.85	18.15	197
5	10004.5905	-61.43	-40.33	-25.00	15.33	21.10	135
6	16955.0855	-78.36	-44.13	-25.00	19.13	34.23	73
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	159.911	-88.36	-62.05	-25.00	37.05	26.31	358
2	1095.8266	-91.70	-52.36	-25.00	27.36	39.34	298
3	6101.9802	-61.26	-40.83	-25.00	15.83	20.43	257
4	7502.8803	-57.65	-39.29	-25.00	14.29	18.36	177
5	10003.4203	-57.94	-37.34	-25.00	12.34	20.60	0
6	16380.5581	-78.35	-44.88	-25.00	19.88	33.47	0
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



Test Mode		LTE B66-QPSK-20MHz		Channel		CH 132322	
Horizontal							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	160.446	-85.78	-60.33	-13.00	47.33	25.45	314
2	1071.1071	-91.65	-52.52	-13.00	39.52	39.13	132
3	3123.1023	-59.70	-43.91	-13.00	30.91	15.79	113
4	6025.4125	-60.32	-40.53	-13.00	27.53	19.79	175
5	6983.3483	-55.92	-37.70	-13.00	24.70	18.22	360
6	8619.1719	-68.39	-49.03	-13.00	36.03	19.36	259
Vertical							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]
1	1069.93	-90.74	-51.74	-13.00	38.74	39.00	358
2	2779.5559	-54.91	-43.78	-13.00	30.78	11.13	297
3	5238.2838	-58.71	-40.70	-13.00	27.70	18.01	71
4	6983.3483	-51.78	-33.93	-13.00	20.93	17.85	56
5	8619.1719	-64.08	-44.99	-13.00	31.99	19.09	237
6	16391.0891	-78.77	-44.31	-13.00	31.31	34.46	56
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBm) = Reading (dBm) + Factor (dB). 3. Margin(dB) = Limit[dBm] - Level [dBm]							



3.2 OUT POWER MEASUREMENT

3.1.1 TEST PROCEDURES

Subclause 5.6 of Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$EIRP = PT + GT - LC$, $ERP = EIRP - 2.15\text{dBi}$, where

PT = transmitter output power dBm;

GT = gain of the transmitting antenna dBi;

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.2 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:




3.3 FREQUENCY STABILITY

3.2.1 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.2 TEST SETUP

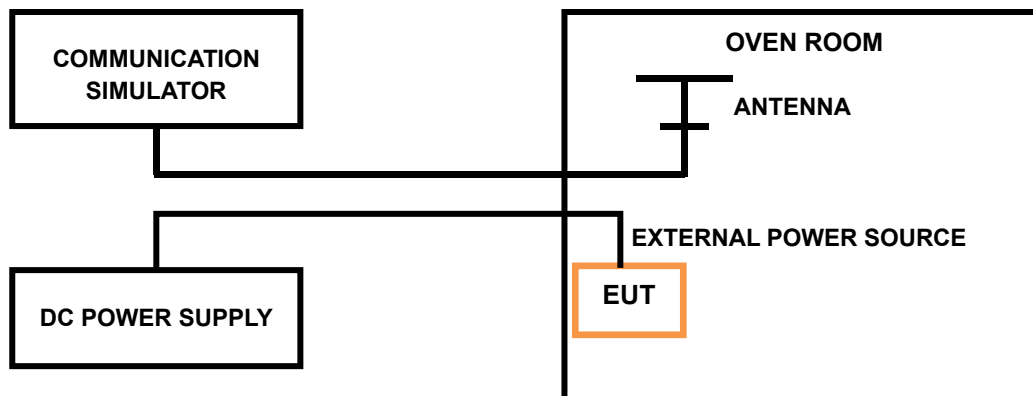


3.4 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

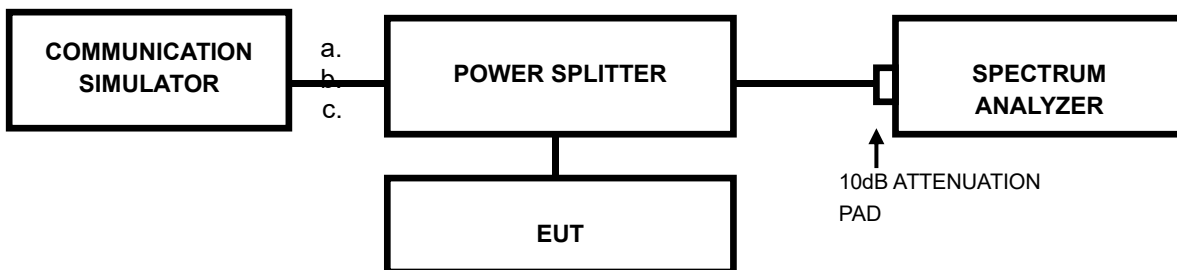


3.5 BAND EDGE MEASUREMENT

3.4.1 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 1.4MHz).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 5MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 600kHz. (LTE bandwidth 15MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 300kHz and VBW of the spectrum is 1000kHz. (LTE bandwidth 20MHz).
- h. Set the spectrum with RMS detector.
- i. Record the AVG trace plot into the test report.

3.4.2 TEST SETUP

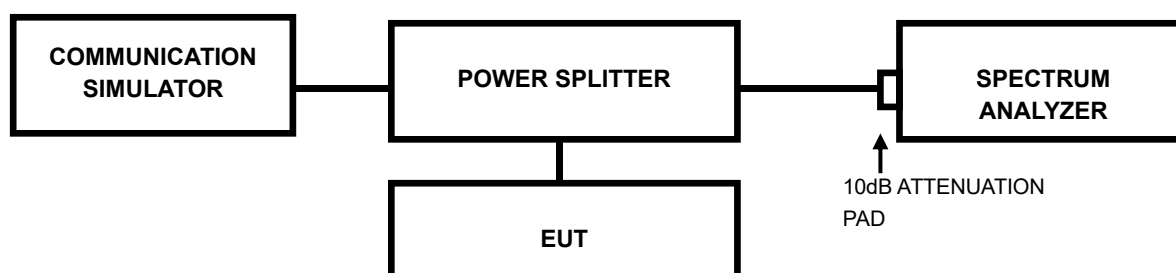


3.6 CONDUCTED SPURIOUS EMISSIONS

3.5.1 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30 MHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.2 TEST SETUP

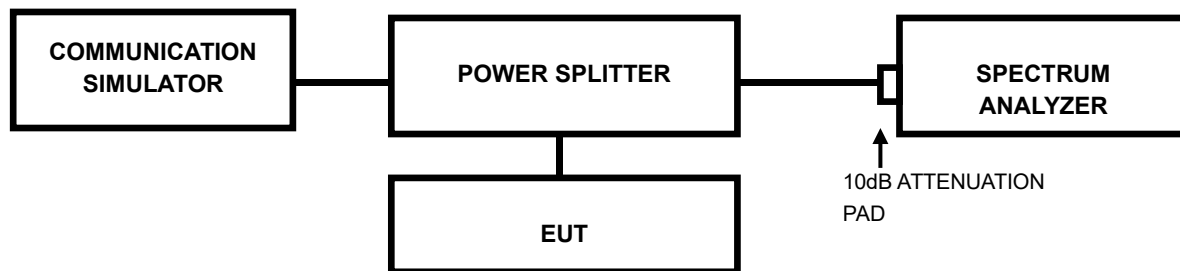




3.7 PEAK TO AVERAGE RATIO

3.7.1 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.2 TEST SETUP

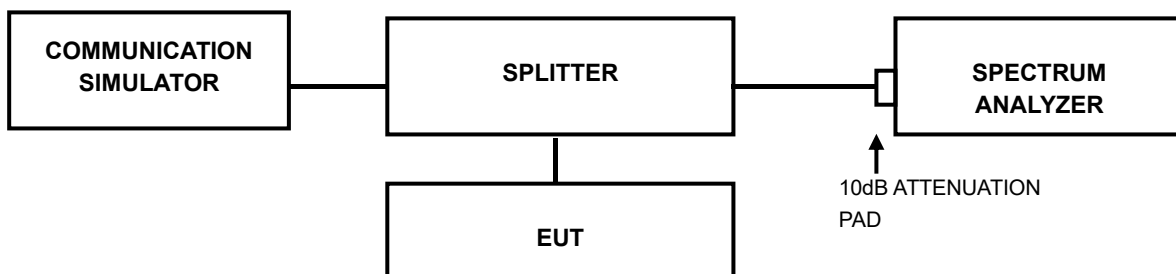



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).

----- End of the Report -----



Important

- (1) The test report is valid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street,
Longhua District, Shenzhen, Guangdong, 518110, P. R. China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>