

# FCC REPORT

## (WIFI)

**Applicant:** Shenzhen Peicheng Technology Co., Ltd

**Address of Applicant:** 5th Floor, B Building, Baotian Industrial Zone, Qianjin 2nd road, Xixiang, Bao'an District, Shenzhen, Guangdong, China 518102

**Equipment Under Test (EUT)**

Product Name: Tablet pc

Model No.: K75, K76, K77, K78, K79, K80

Trade mark: SMART TEK

**FCC ID:** 2AV6Y-K75

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** 02 Sep., 2020

**Date of Test:** 02 Sep., to 20 Oct., 2020

**Date of report issued:** 20 Oct., 2020

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**2 Version**

Version No.	Date	Description
00	20 Oct., 2020	Original

**Tested by:***Mike.ou***Test Engineer****Date:***20 Oct., 2020***Reviewed by:***Winner Zhang***Project Engineer****Date:***20 Oct., 2020*

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION.....</b>	<b>2</b>
<b>3 CONTENTS.....</b>	<b>3</b>
<b>4 TEST SUMMARY.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE.....	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 LABORATORY FACILITY.....	6
5.7 LABORATORY LOCATION.....	6
5.8 TEST INSTRUMENTS LIST.....	7
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>8</b>
6.1 ANTENNA REQUIREMENT.....	8
6.2 CONDUCTED EMISSION.....	9
6.3 CONDUCTED OUTPUT POWER.....	12
6.4 OCCUPY BANDWIDTH.....	13
6.5 POWER SPECTRAL DENSITY.....	14
6.6 BAND EDGE.....	15
6.6.1 Conducted Emission Method.....	15
6.6.2 Radiated Emission Method.....	16
6.7 SPURIOUS EMISSION.....	33
6.7.1 Conducted Emission Method.....	33
6.7.2 Radiated Emission Method.....	34
<b>7 TEST SETUP PHOTO.....</b>	<b>42</b>
<b>8 EUT CONSTRUCTIONAL DETAILS.....</b>	<b>43</b>
<b>APPENDIX A - WIFI.....</b>	<b>44</b>

## 4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247 (d)	Pass
Spurious Emission	15.205 & 15.209	Pass
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. Pass: The EUT complies with the essential requirements in the standard.</li> <li>2. N/A: Not Applicable.</li> <li>3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).</li> </ol>		
<b>Test Method:</b>	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	

## 5 General Information

### 5.1 Client Information

Applicant:	Shenzhen Peicheng Technology Co., Ltd
Address:	5th Floor, B Building, Baotian Industrial Zone, Qianjin 2nd road, Xixiang, Bao'an District, Shenzhen, Guangdong, China 518102
Manufacturer/Factory:	Shenzhen Peicheng Technology Co., Ltd
Address:	5th Floor, B Building, Baotian Industrial Zone, Qianjin 2nd road, Xixiang, Bao'an District, Shenzhen, Guangdong, China 518102

### 5.2 General Description of E.U.T.

Product Name:	Tablet pc
Model No.:	K75, K76, K77, K78, K79, K80
Operation Frequency:	2412MHz~2462MHz: 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz: 802.11n(HT40)
Channel numbers:	11: 802.11b/802.11g/802.11(HT20) 7: 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0.8dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V, 3000mAh
AC adapter:	Model: FX2U-0501150U Input: AC100-220V, 50/60Hz, 0.4A Output: DC 5.0V, 1.5A
Remark:	Model No.: K75, K76, K77, K78, K79, K80 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(HT20, HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

- For 802.11n-HT40 mode, the channel number is from 3 to 9;
- Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.

## 5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation (Dutycycle>98%)
<p>Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate, the follow list were the worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

## 5.4 Description of Support Units

The EUT has been tested as an independent unit.

## 5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

## 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

## 5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-21-2020	07-20-2021
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-20-2020	06-19-2021
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	06-18-2020	07-17-2021
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		

## 6 Test results and Measurement Data

### 6.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part 15 C Section 15.203 /247(b)
<p>15.203 requirement:                  An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:                  (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>E.U.T Antenna:</b>	
<p>The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 0.8 dBi.</p>	




## 6.2 Conducted Emission

Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBUV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement.</li> </ol>		
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

**Measurement Data:**

<b>Product name:</b>	Tablet pc	<b>Product model:</b>	K75
<b>Test by:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Line
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Huni: 55%

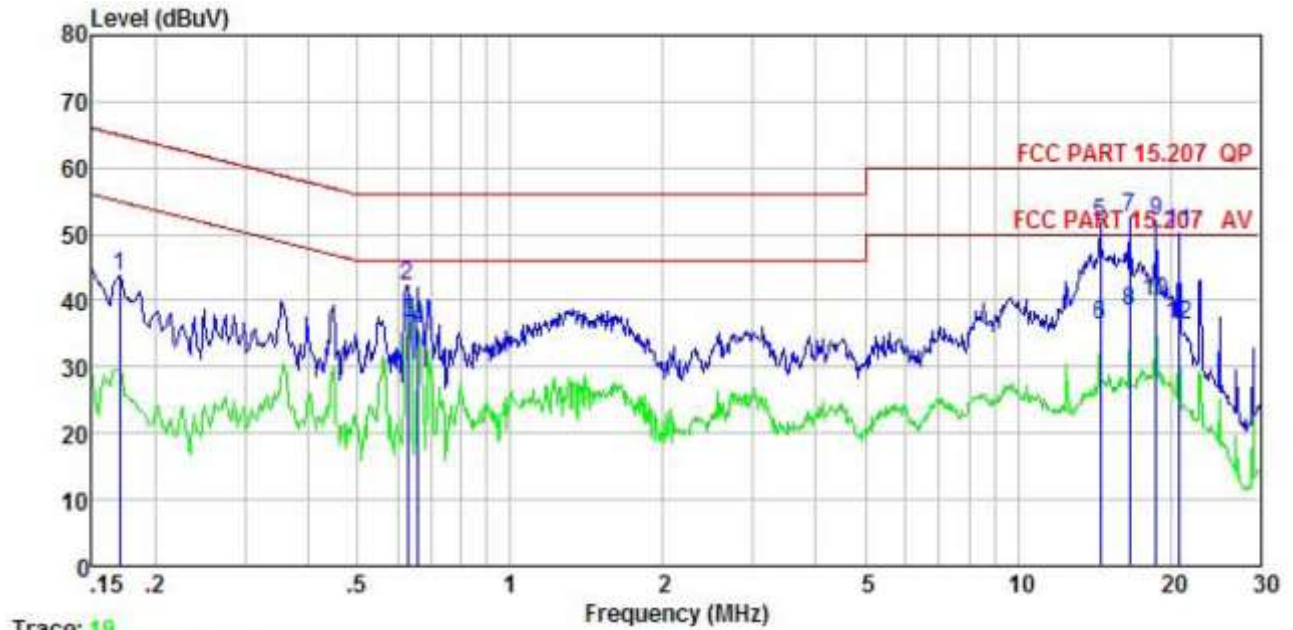


Trace 10

	Freq	Read Level	LISN Factor	Cable Loss	Aux Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.170	33.64	-0.58	10.77	-0.10	43.73	64.94	-21.21	QP
2	0.627	32.43	-0.50	10.77	-0.38	42.32	56.00	-13.68	QP
3	0.630	26.69	-0.50	10.77	-0.38	36.58	46.00	-9.42	Average
4	0.658	25.79	-0.51	10.77	-0.39	35.66	46.00	-10.34	Average
5	14.517	38.00	-0.69	10.90	3.48	51.69	60.00	-8.31	QP
6	14.517	22.73	-0.69	10.90	3.48	36.42	50.00	-13.58	Average
7	16.573	39.83	-0.75	10.91	2.68	52.67	60.00	-7.33	QP
8	16.573	25.46	-0.75	10.91	2.68	38.30	50.00	-11.70	Average
9	18.721	40.39	-0.83	10.92	1.51	51.99	60.00	-8.01	QP
10	18.721	28.14	-0.83	10.92	1.51	39.74	50.00	-10.26	Average
11	20.814	39.41	-0.91	10.92	0.91	50.33	60.00	-9.67	QP
12	20.814	25.44	-0.91	10.92	0.91	36.36	50.00	-13.64	Average

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

<b>Product name:</b>	Tablet pc	<b>Product model:</b>	K75
<b>Test by:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Huni: 55%

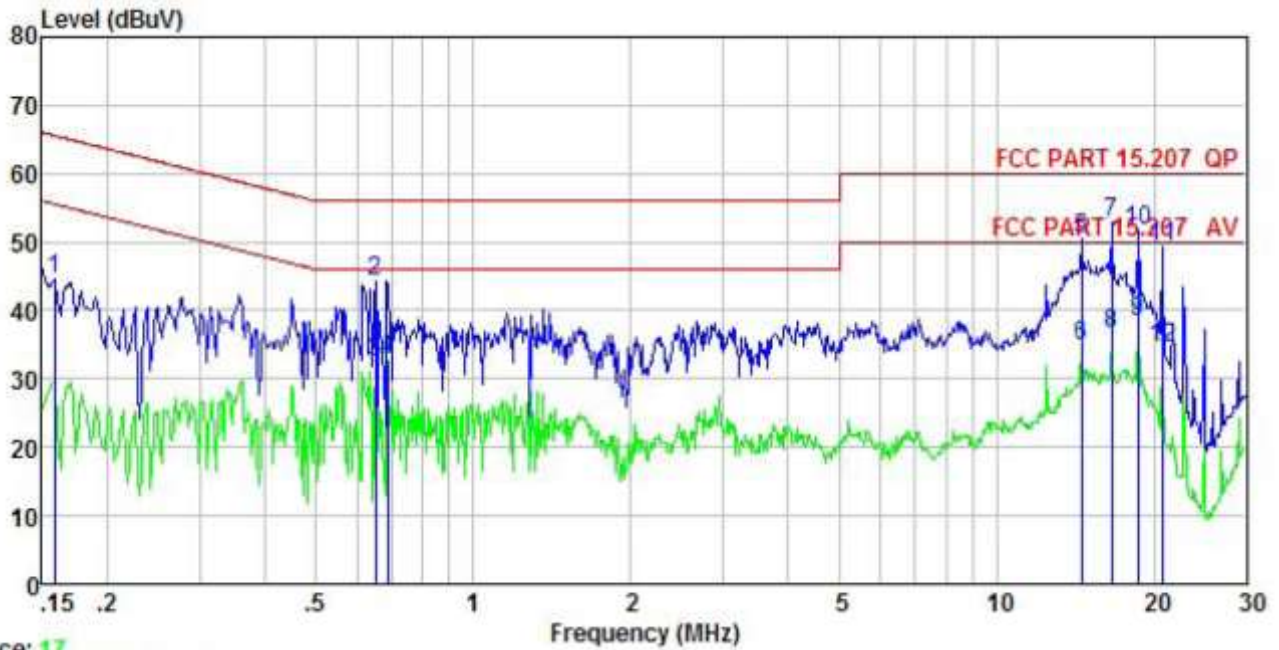


Page: 17

	Freq	Read Level	LISN Factor	Cable Loss	Aux Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.158	34.43	-0.69	10.77	0.01	44.52	65.56	-21.04	QP
2	0.651	34.18	-0.64	10.77	0.04	44.35	56.00	-11.65	QP
3	0.651	22.41	-0.64	10.77	0.04	32.58	46.00	-13.42	Average
4	0.686	22.51	-0.64	10.77	0.04	32.68	46.00	-13.32	Average
5	14.517	37.41	-0.81	10.90	2.98	50.48	60.00	-9.52	QP
6	14.517	21.64	-0.81	10.90	2.98	34.71	50.00	-15.29	Average
7	16.573	40.75	-0.97	10.91	2.13	52.82	60.00	-7.18	QP
8	16.573	24.44	-0.97	10.91	2.13	36.51	50.00	-13.49	Average
9	18.622	27.64	-1.16	10.92	0.97	38.37	50.00	-11.63	Average
10	18.721	41.11	-1.17	10.92	0.89	51.75	60.00	-8.25	QP
11	20.704	39.48	-1.29	10.92	0.30	49.41	60.00	-10.59	QP
12	20.704	24.60	-1.29	10.92	0.30	34.53	50.00	-15.47	Average

**Notes:**


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

## 6.3 Conducted Output Power

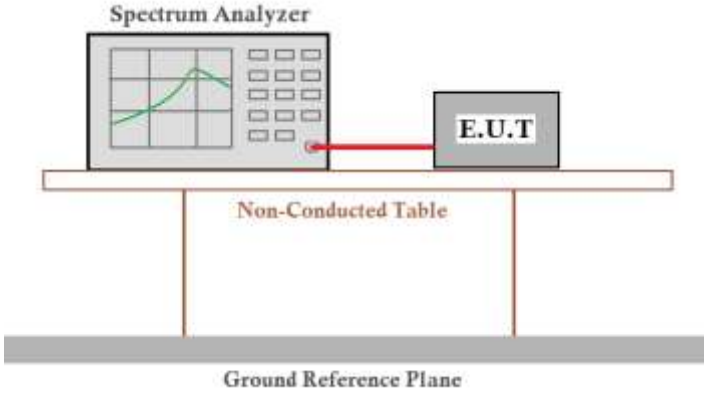Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


**Measurement Data:** Refer to Appendix A - WIFI

## 6.4 Occupy Bandwidth

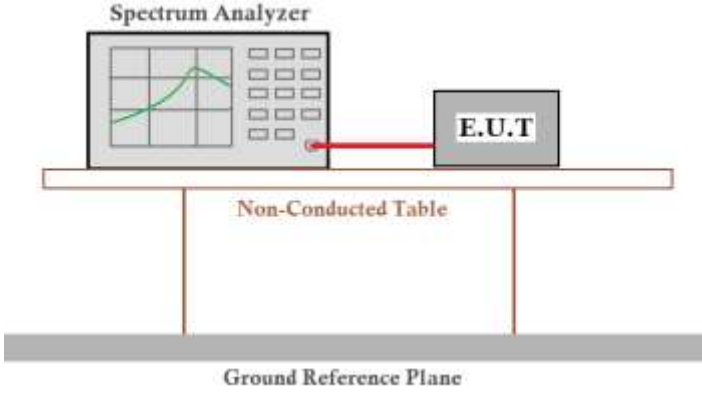Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	>500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:** Refer to Appendix A - WIFI


## 6.5 Power Spectral Density

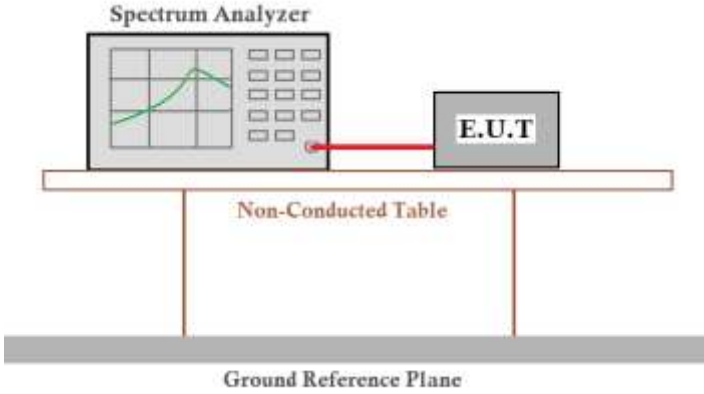Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:** Refer to Appendix A - WIFI

## 6.6 Band Edge

### 6.6.1 Conducted Emission Method

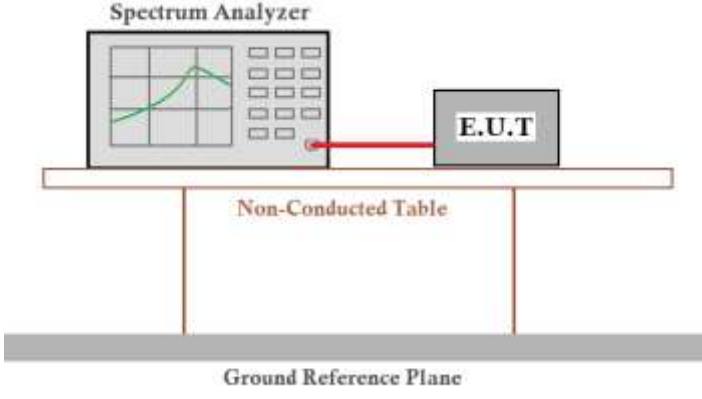Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:** Refer to Appendix A - WIFI




## 6.6.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00		Average Value	
		74.00		Peak Value	
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>				
Test setup:					
Test Instruments:	Refer to section 5.9 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				



802.11b mode:

Product Name:	Tablet pc	Product Model:	K75
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

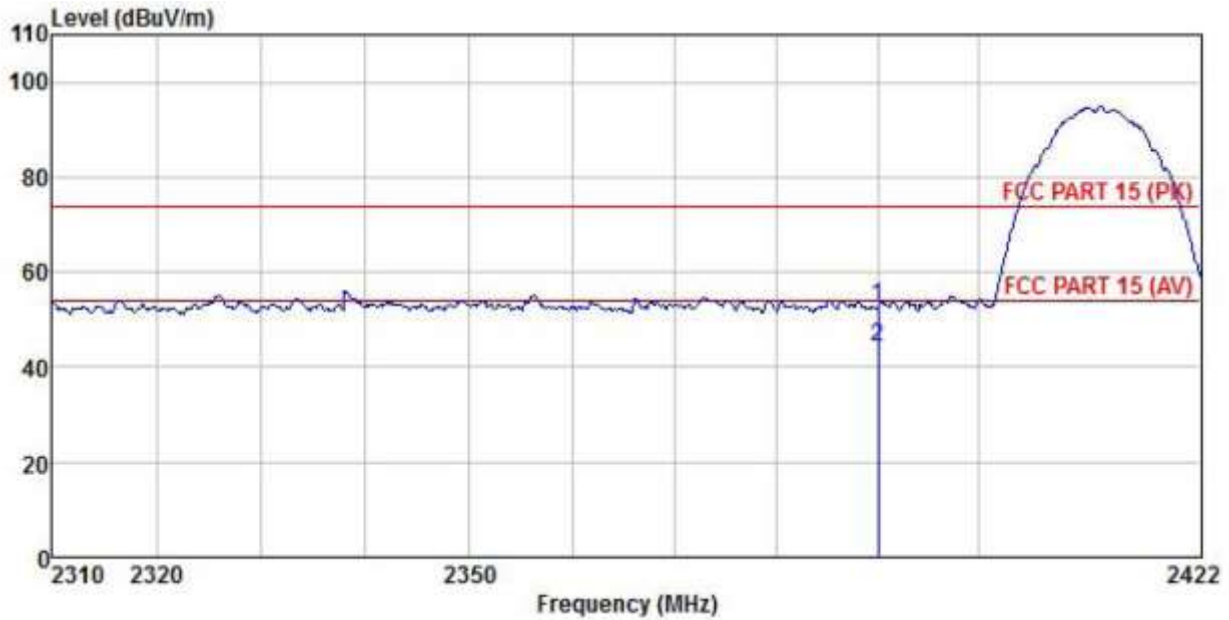


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.72	27.03	4.28	1.68	0.00	52.71	74.00	-21.29 Peak
2	2390.000	11.15	27.03	4.28	1.68	0.00	44.14	54.00	-9.86 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

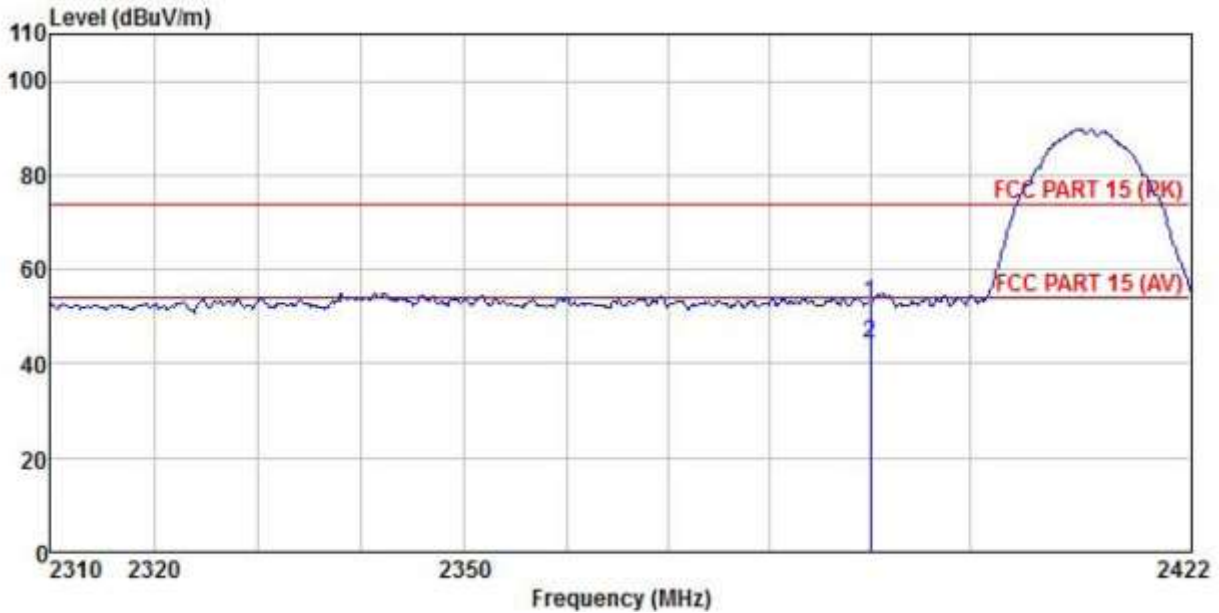


	ReadAntenna	Cable	Aux	Preamp	Limit	Over			
Freq	Level	Loss	Factor	Factor	Line	Limit	Remark		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.92	27.03	4.28	1.68	0.00	52.91	74.00	-21.09 Peak
2	2390.000	11.09	27.03	4.28	1.68	0.00	44.08	54.00	-9.92 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

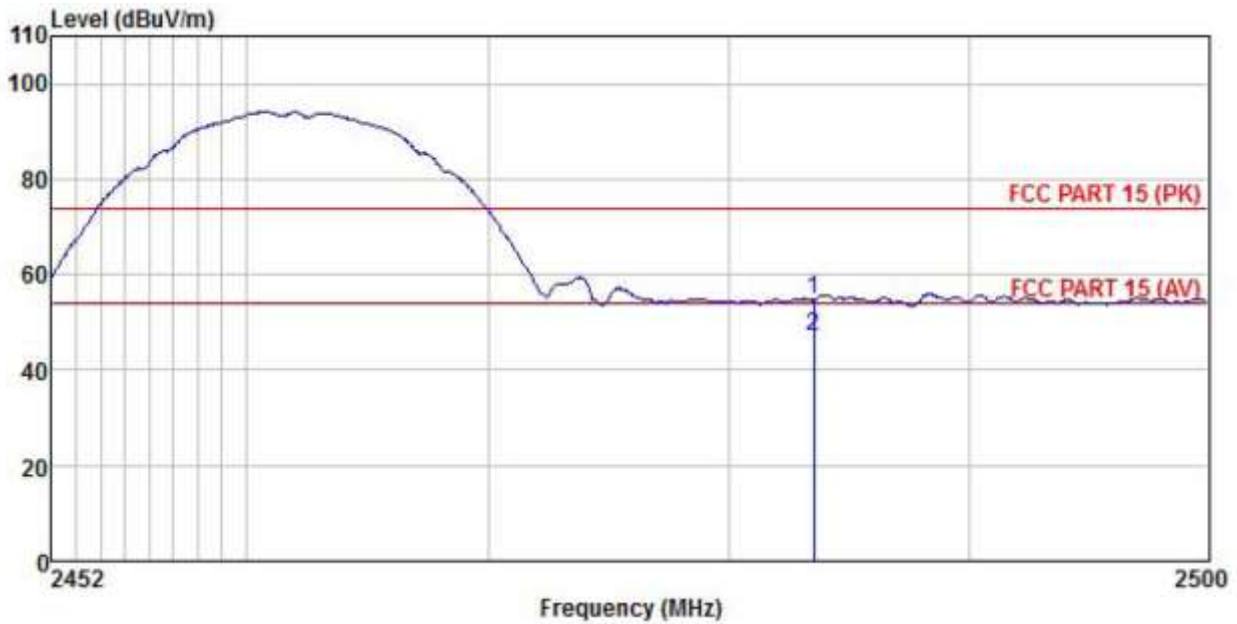


	Read	Antenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
-----	Freq	Level	Loss	Factor	Factor	-----	Line	Limit	-----
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	21.33	27.27	4.38	1.70	0.00	54.68	74.00	-19.32 Peak
2	2483.500	13.84	27.27	4.38	1.70	0.00	47.19	54.00	-6.81 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

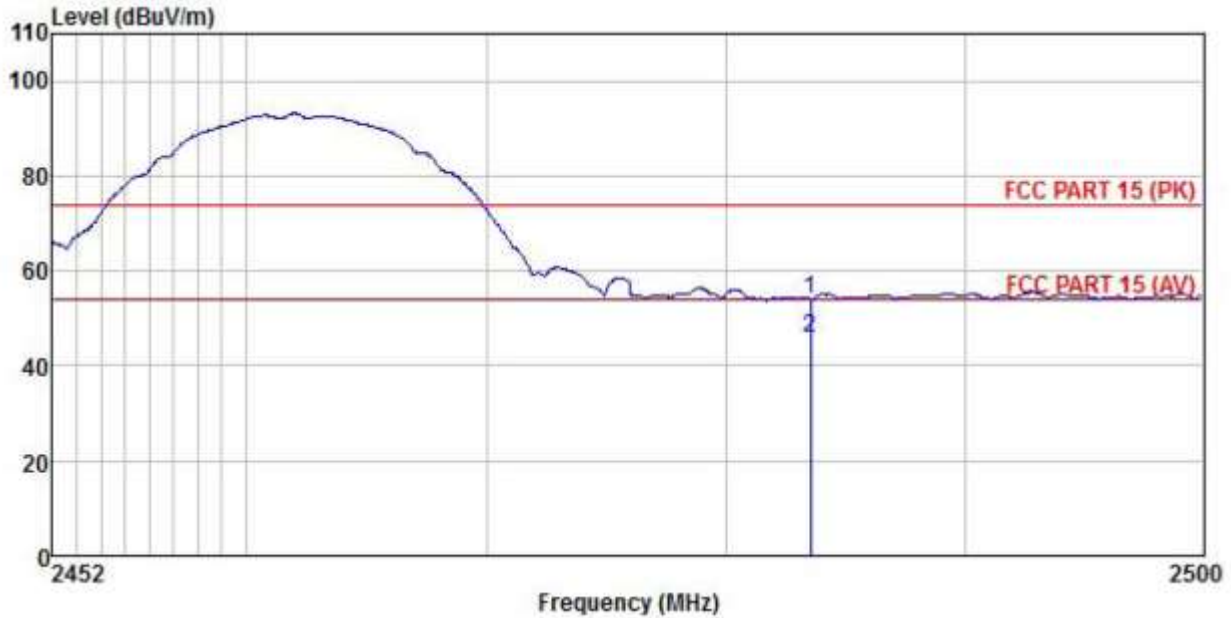


	Read	Antenna	Cable	Aux	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.67	27.27	4.38	1.70	0.00	54.02	74.00	-19.98 Peak
2	2483.500	12.64	27.27	4.38	1.70	0.00	45.99	54.00	-8.01 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

Product Name:	Tablet pc	Product Model:	K75
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

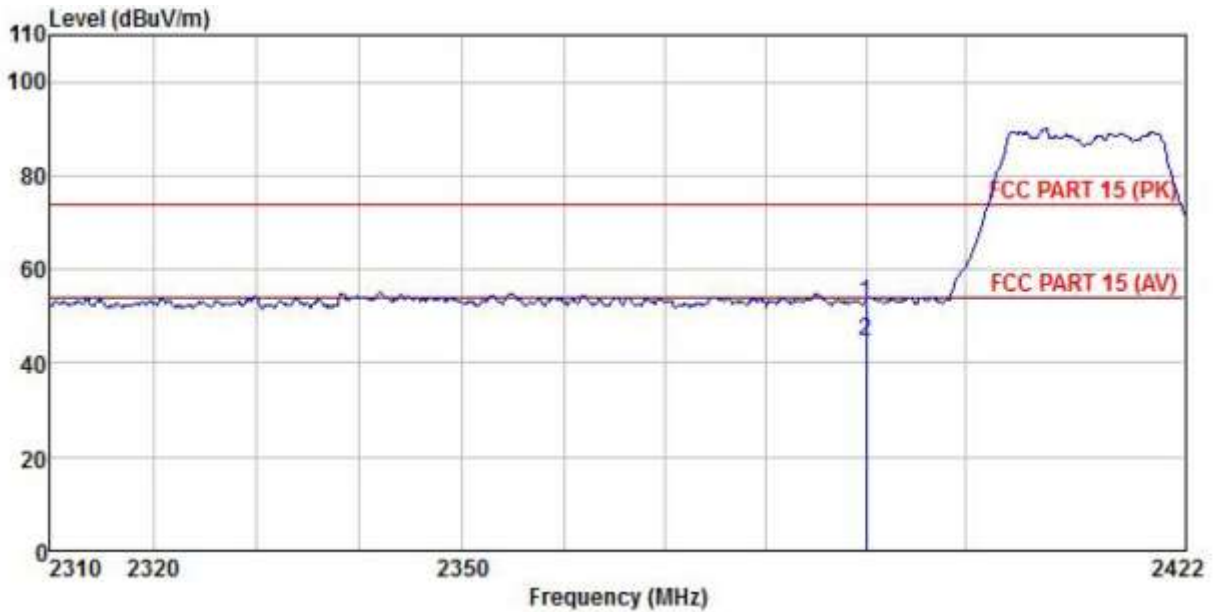


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.74	27.03	4.28	1.68	0.00	52.73	74.00	-21.27	Peak
2	2390.000	11.52	27.03	4.28	1.68	0.00	44.51	54.00	-9.49	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

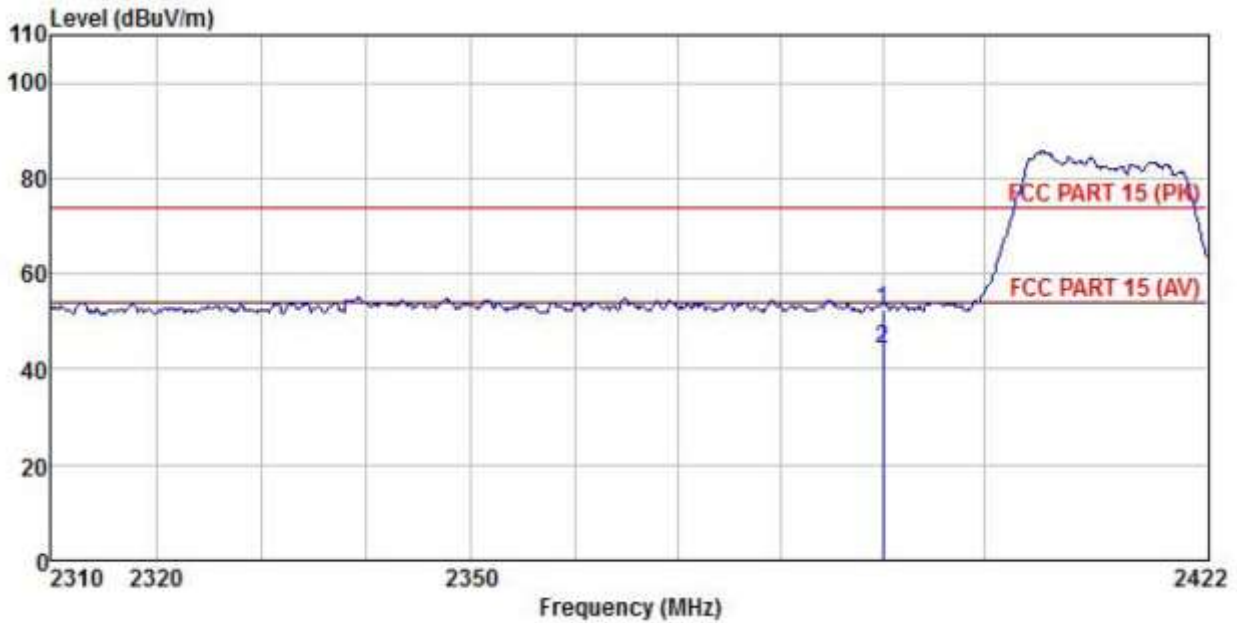


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.43	27.03	4.28	1.68	0.00	52.42	74.00	-21.58 Peak
2	2390.000	11.38	27.03	4.28	1.68	0.00	44.37	54.00	-9.63 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

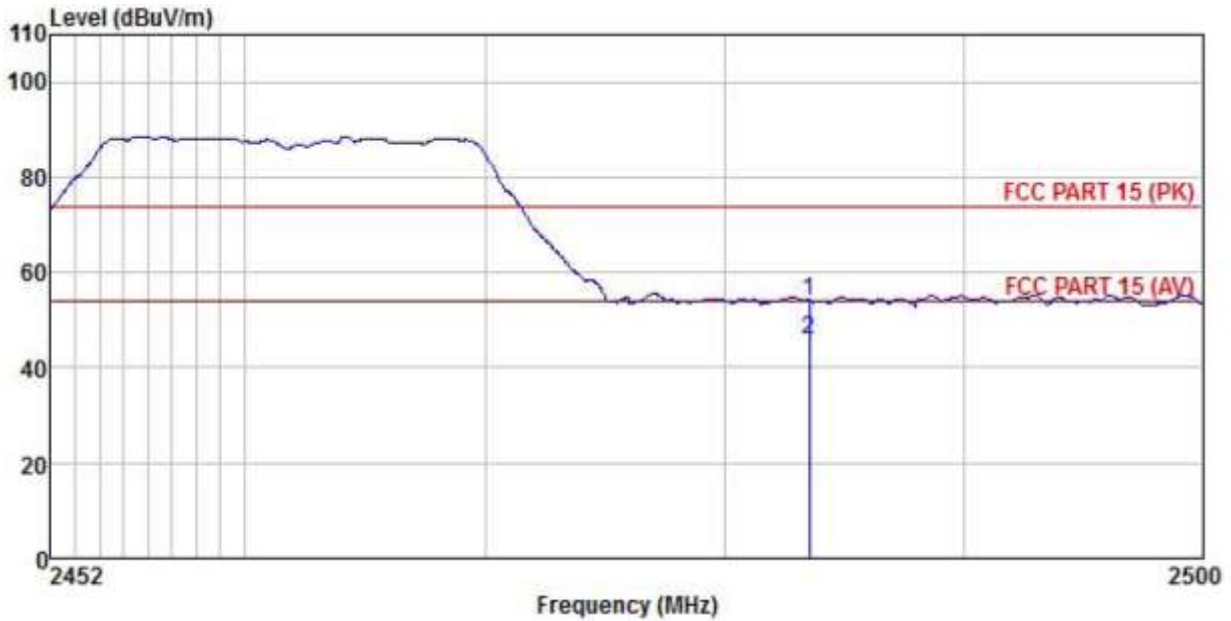


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	20.74	27.27	4.38	1.70	0.00	54.09	74.00	-19.91 Peak
2	2483.500	12.71	27.27	4.38	1.70	0.00	46.06	54.00	-7.94 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preampifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

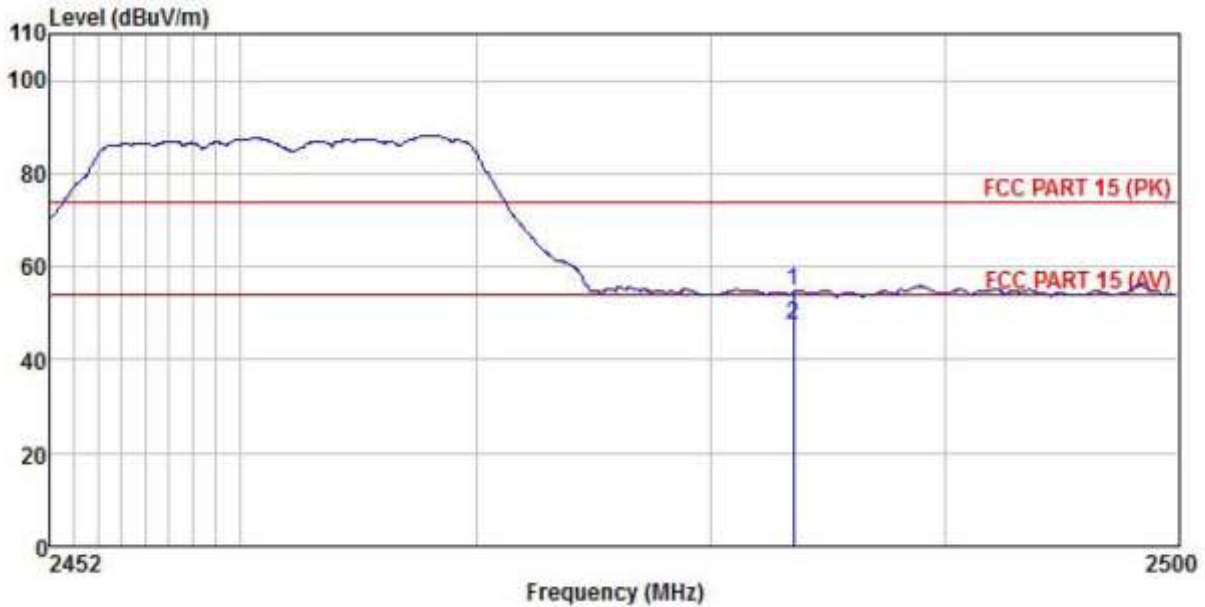

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.27	27.27	4.38	1.70	0.00	54.62	74.00	-19.38	Peak
2	2483.500	13.97	27.27	4.38	1.70	0.00	47.32	54.00	-6.68	Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



802.11n(HT20):

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

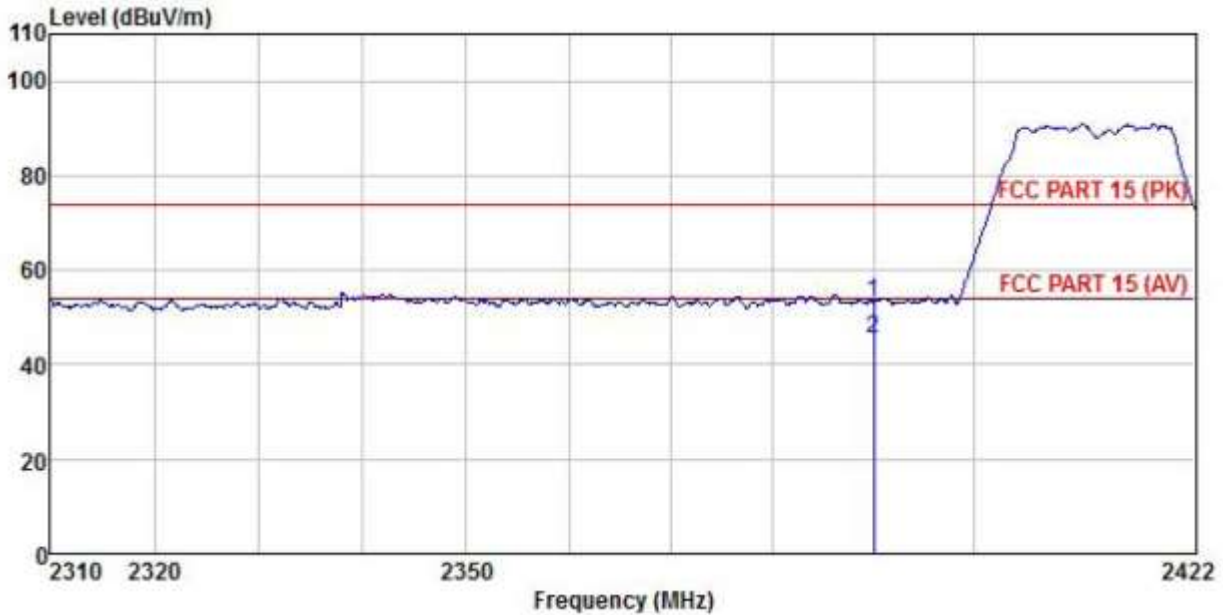


	Read	Antenna	Cable	Aux	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.04	27.03	4.28	1.68	0.00	53.03	74.00	-20.97 Peak
2	2390.000	12.34	27.03	4.28	1.68	0.00	45.33	54.00	-8.67 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C      Humi: 57%

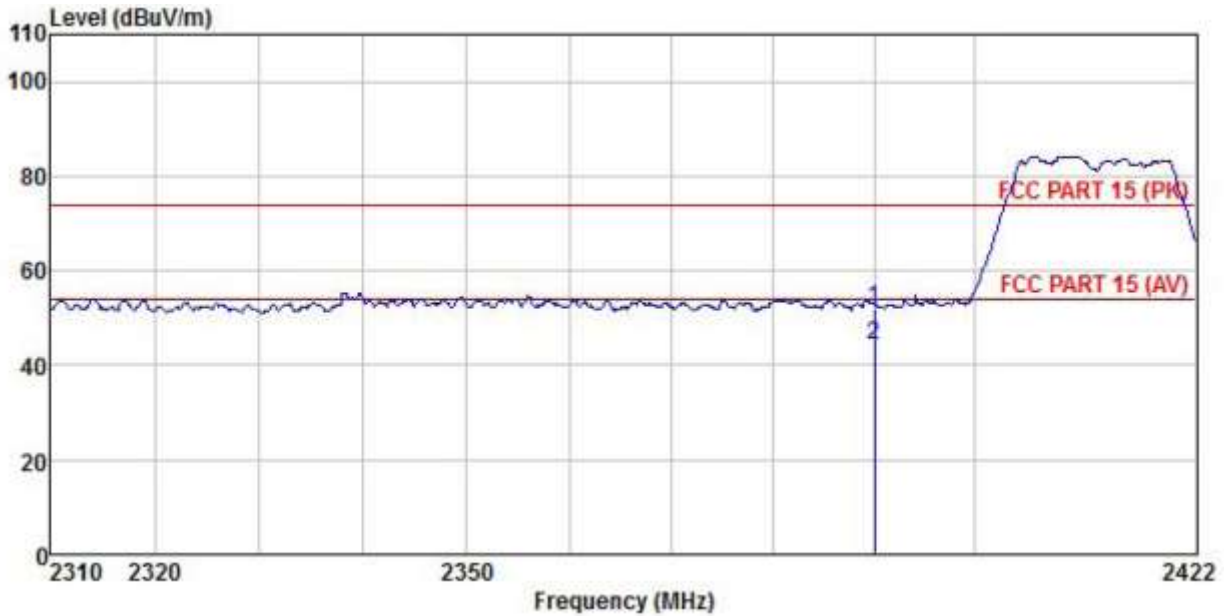


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.14	27.03	4.28	1.68	0.00	52.13	74.00	-21.87 Peak
2	2390.000	11.41	27.03	4.28	1.68	0.00	44.40	54.00	-9.60 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

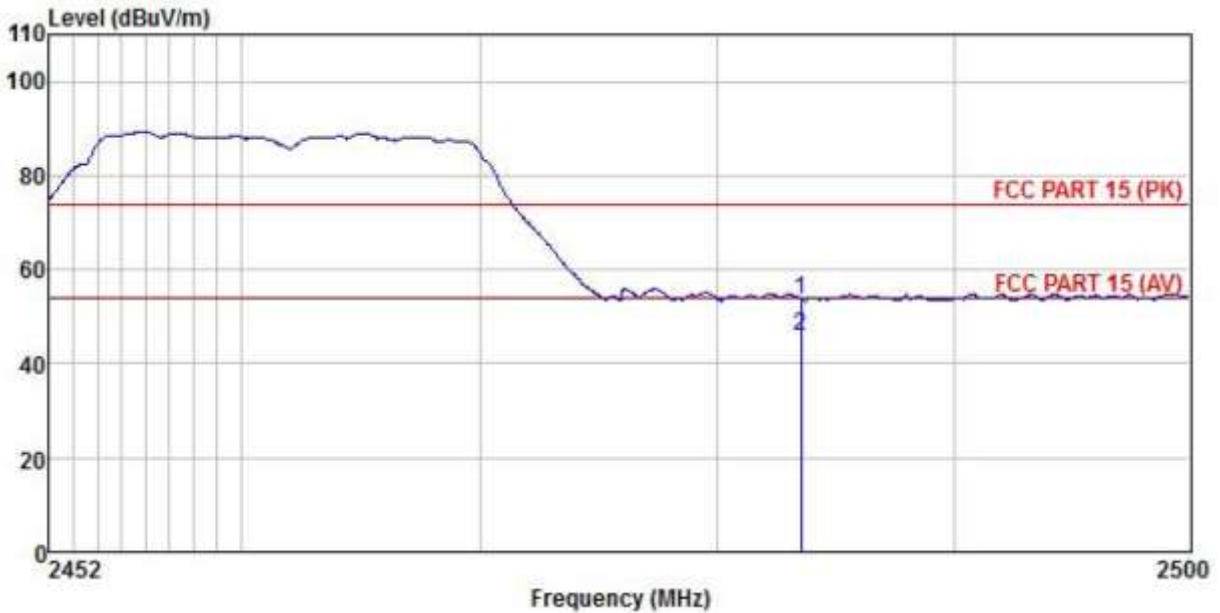


	Read	Antenna	Cable	Aux	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.31	27.27	4.38	1.70	0.00	53.66	74.00	-20.34 Peak
2	2483.500	12.48	27.27	4.38	1.70	0.00	45.83	54.00	-8.17 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

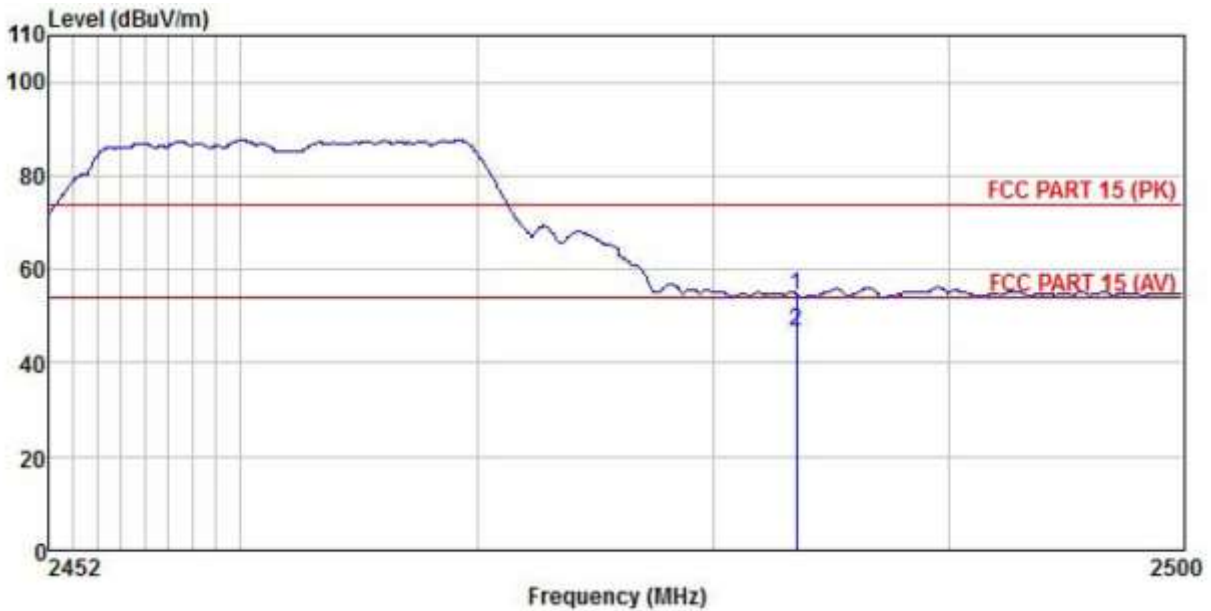


	ReadAntenna	Cable	Aux Preamp	Level	Limit	Over	Remark
Freq	Level	Factor	Loss	Factor	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dB	dB	
1	2483.500	21.13	27.27	4.38	1.70	0.00	54.48 74.00 -19.52 Peak
2	2483.500	13.38	27.27	4.38	1.70	0.00	46.73 54.00 -7.27 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

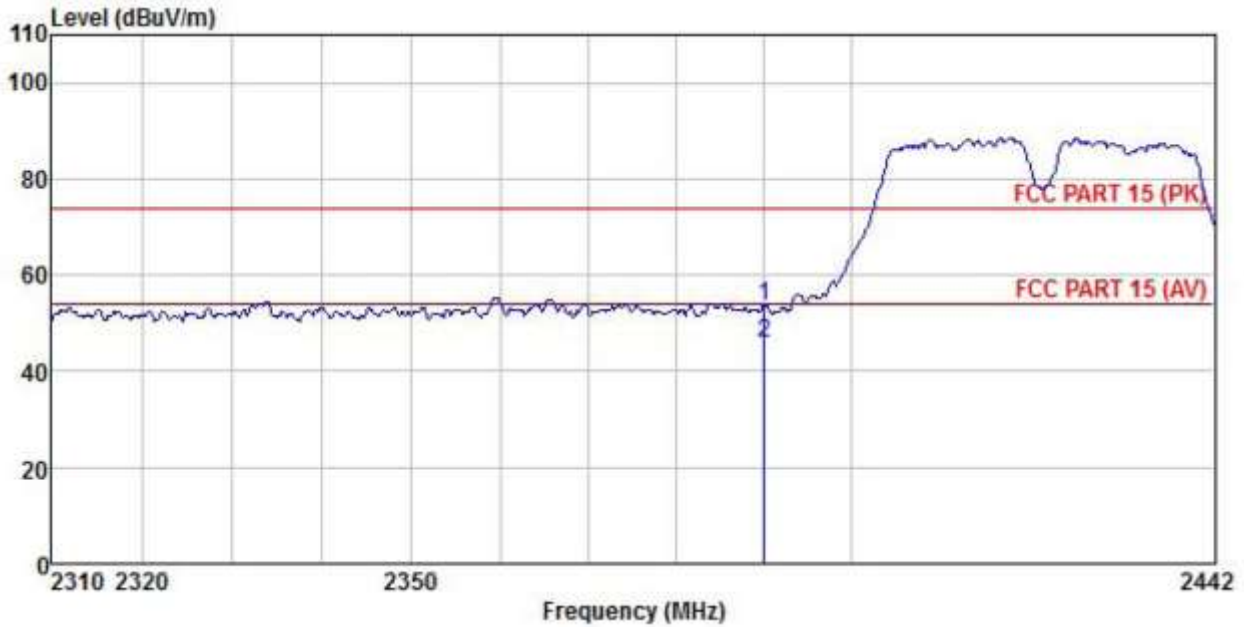


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	2390.000	20.79	27.03	4.28	1.68	0.00	53.78	74.00	-20.22 Peak
2	2390.000	12.82	27.03	4.28	1.68	0.00	45.81	54.00	-8.19 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

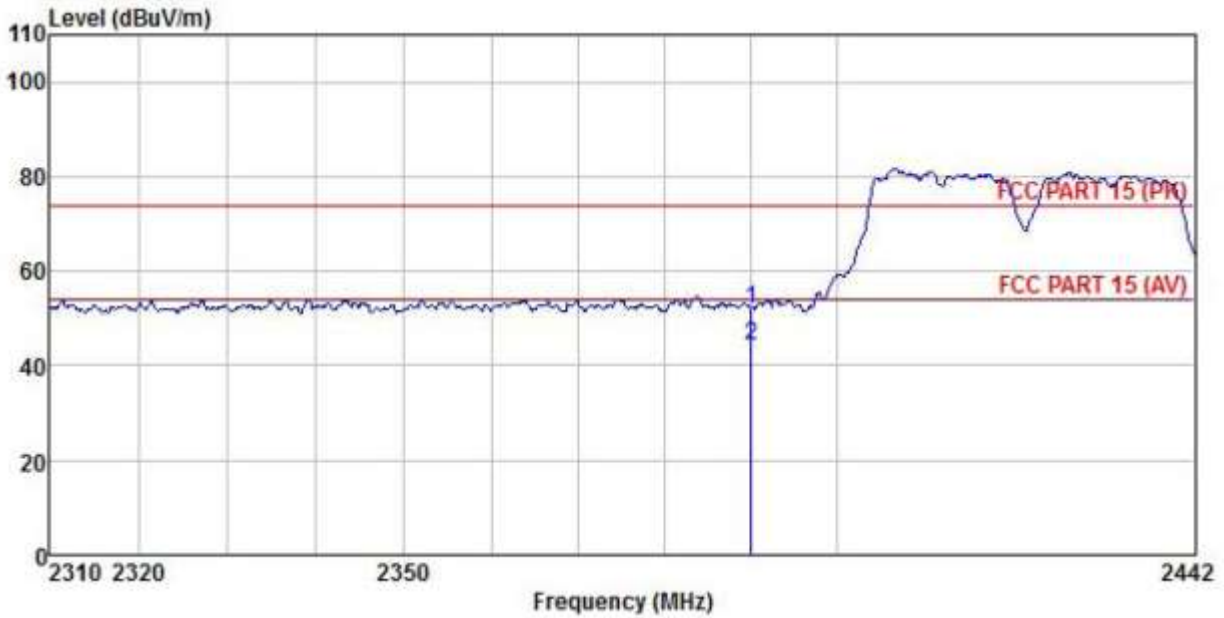


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.09	27.03	4.28	1.68	0.00	52.08	74.00	-21.92	Peak
2	2390.000	11.05	27.03	4.28	1.68	0.00	44.04	54.00	-9.96	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

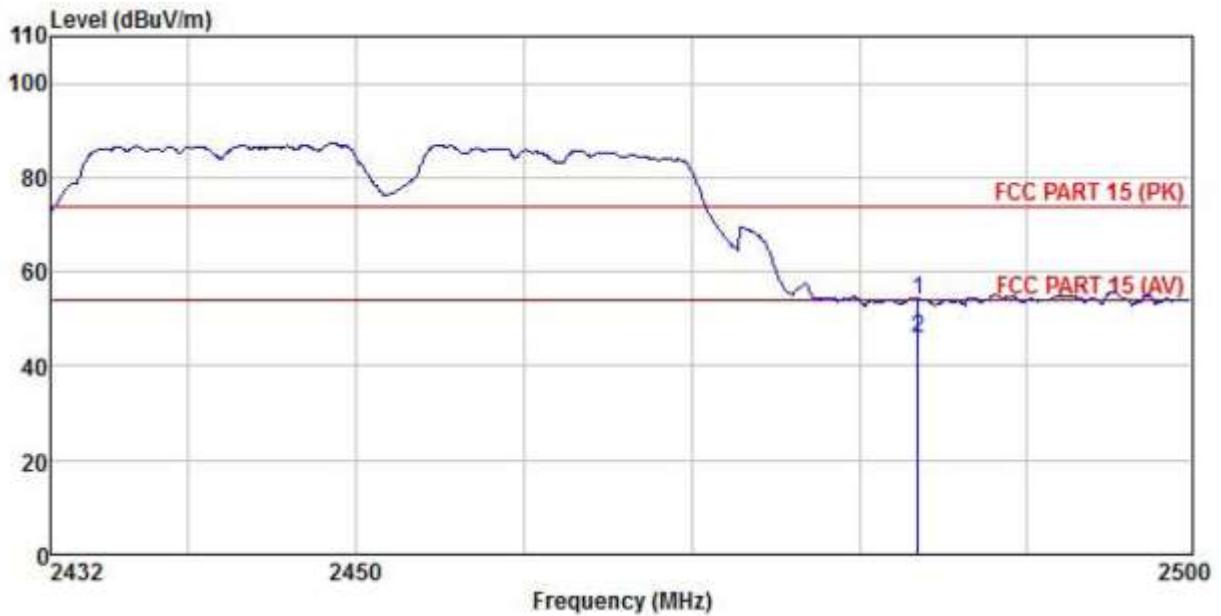


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	Loss	Factor	Factor	dB	dB	dB
1	2483.500	20.78	27.27	4.38	1.70	0.00	54.13	74.00	-19.87 Peak
2	2483.500	12.46	27.27	4.38	1.70	0.00	45.81	54.00	-8.19 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

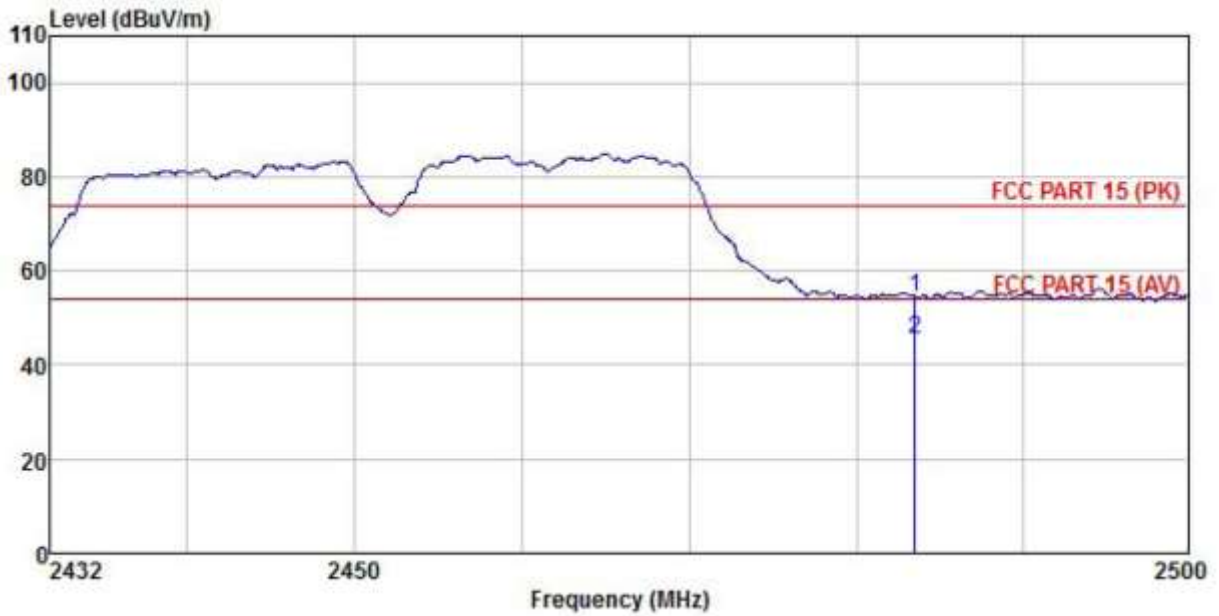

	ReadAntenna	Cable	Aux	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.86	27.27	4.38	1.70	0.00	54.21	74.00	-19.79 Peak
2	2483.500	12.06	27.27	4.38	1.70	0.00	45.41	54.00	-8.59 Average


**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



## 6.7 Spurious Emission


### 6.7.1 Conducted Emission Method

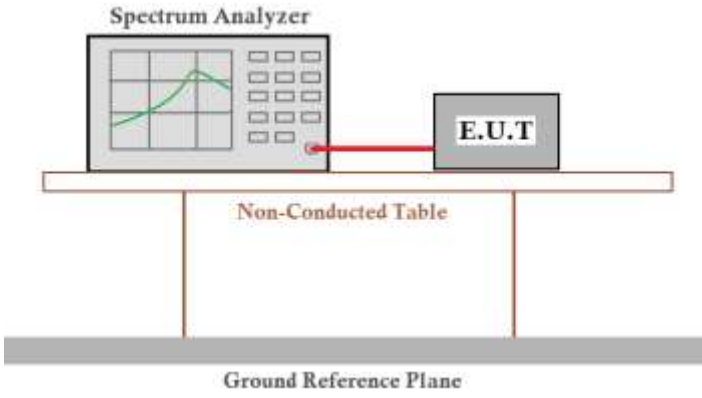Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:** Refer to Appendix A - WIFI

## 6.7.2 Radiated Emission Method


Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>				
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>				

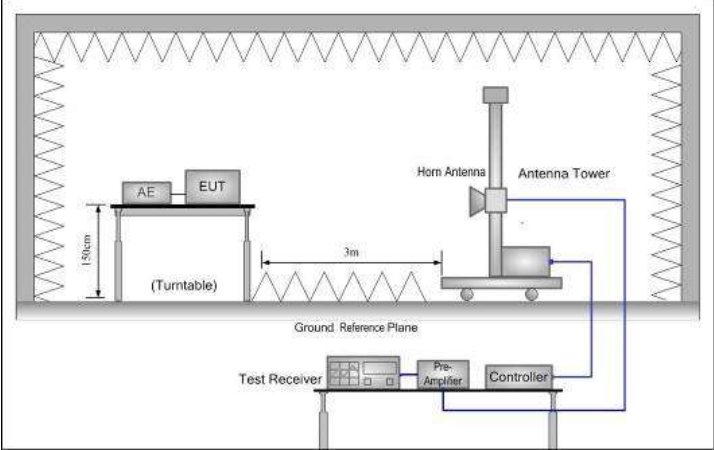	
<p>Test Instruments:</p>	<p>Refer to section 5.9 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>
<p>Remark:</p>	<ol style="list-style-type: none"> <li>1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.</li> <li>2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.</li> </ol>

**Measurement Data (worst case):**

**Below 1GHz:**

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

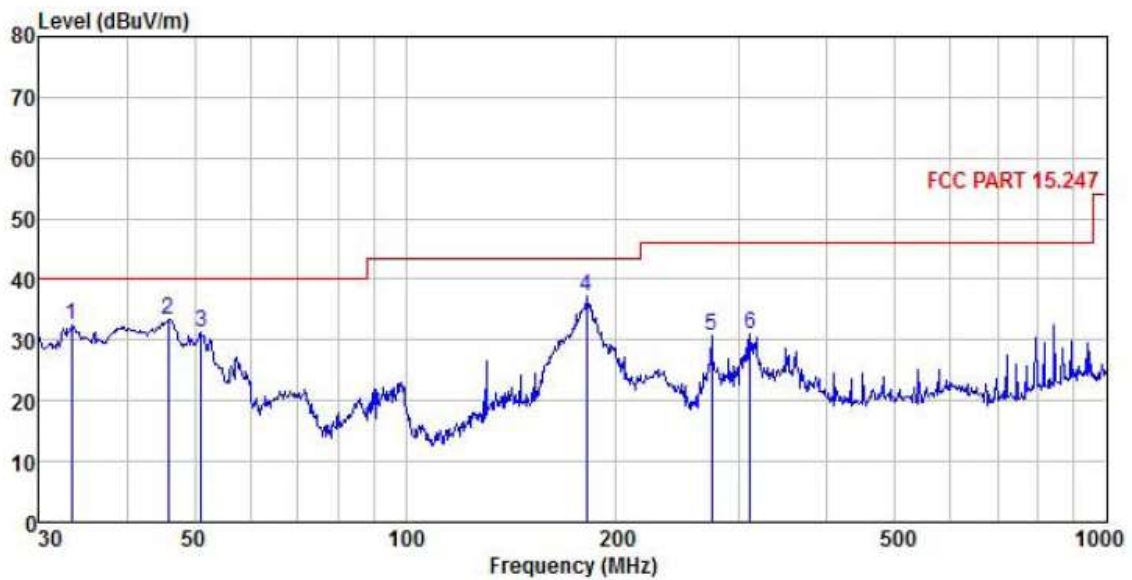


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	33.328	49.60	12.35	0.36	0.00	29.96	32.35	40.00	-7.65 QP
2	45.855	49.91	12.95	0.38	0.00	29.85	33.39	40.00	-6.61 QP
3	51.121	47.80	12.78	0.39	0.00	29.82	31.15	40.00	-8.85 QP
4	181.283	48.57	16.98	0.68	0.00	28.96	37.27	43.50	-6.23 QP
5	273.234	39.66	18.60	0.83	0.00	28.50	30.59	46.00	-15.41 QP
6	309.998	39.99	18.72	0.87	0.00	28.47	31.11	46.00	-14.89 QP

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

<b>Product Name:</b>	Tablet pc	<b>Product Model:</b>	K75
<b>Test By:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

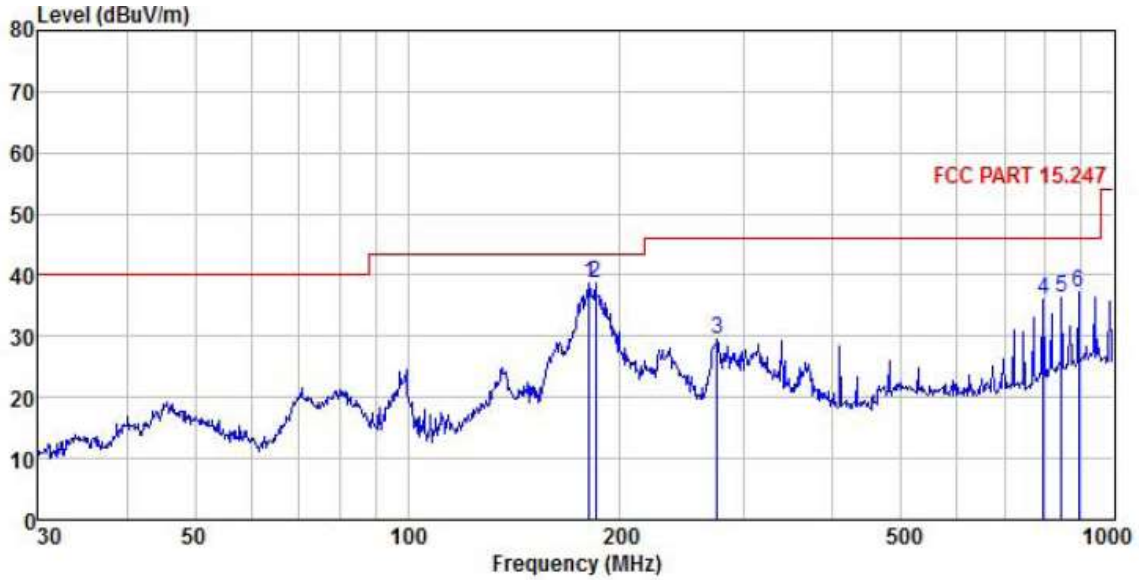

	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over		
Freq	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	180.649	50.15	16.94	0.68	0.00	28.97	38.80	43.50	-4.70 QP
2	184.490	49.77	17.16	0.69	0.00	28.94	38.68	43.50	-4.82 QP
3	274.194	38.71	18.60	0.83	0.00	28.50	29.64	46.00	-16.36 QP
4	793.396	41.95	20.87	1.39	0.00	28.23	35.98	46.00	-10.02 QP
5	842.130	41.61	21.32	1.42	0.00	28.03	36.32	46.00	-9.68 QP
6	890.728	41.39	22.38	1.47	0.00	27.90	37.34	46.00	-8.66 QP

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

**Above 1GHz**

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	54.07	30.81	6.81	2.46	41.82	52.33	74.00	-21.67	Vertical
4824.00	55.24	30.81	6.81	2.46	41.82	53.50	74.00	-20.50	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.45	30.81	6.81	2.46	41.82	46.71	54.00	-7.29	Vertical
4824.00	47.93	30.81	6.81	2.46	41.82	46.19	54.00	-7.81	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	53.41	30.93	6.85	2.47	41.84	51.82	74.00	-22.18	Vertical
4874.00	54.62	30.93	6.85	2.47	41.84	53.03	74.00	-20.97	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.33	30.93	6.85	2.47	41.84	46.74	54.00	-7.26	Vertical
4874.00	47.96	30.93	6.85	2.47	41.84	46.37	54.00	-7.63	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	55.68	31.05	6.89	2.48	41.86	54.24	74.00	-19.76	Vertical
4924.00	56.12	31.05	6.89	2.48	41.86	54.68	74.00	-19.32	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.76	31.05	6.89	2.48	41.86	47.32	54.00	-6.68	Vertical
4924.00	47.98	31.05	6.89	2.48	41.86	46.54	54.00	-7.46	Horizontal
<i>Remark:</i>									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	54.11	30.81	6.81	2.46	41.82	52.37	74.00	-21.63	Vertical
4824.00	53.98	30.81	6.81	2.46	41.82	52.24	74.00	-21.76	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.12	30.81	6.81	2.46	41.82	45.38	54.00	-8.62	Vertical
4824.00	47.35	30.81	6.81	2.46	41.82	45.61	54.00	-8.39	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	54.15	30.93	6.85	2.47	41.84	52.56	74.00	-21.44	Vertical
4874.00	53.84	30.93	6.85	2.47	41.84	52.25	74.00	-21.75	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.15	30.93	6.85	2.47	41.84	45.56	54.00	-8.44	Vertical
4874.00	47.42	30.93	6.85	2.47	41.84	45.83	54.00	-8.17	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	54.87	31.05	6.89	2.48	41.86	53.43	74.00	-20.57	Vertical
4924.00	55.31	31.05	6.89	2.48	41.86	53.87	74.00	-20.13	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.68	31.05	6.89	2.48	41.86	46.24	54.00	-7.76	Vertical
4924.00	48.06	31.05	6.89	2.48	41.86	46.62	54.00	-7.38	Horizontal
<b>Remark:</b> 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									



802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	54.23	30.81	6.81	2.46	41.82	52.49	74.00	-21.51	Vertical
4824.00	53.63	30.81	6.81	2.46	41.82	51.89	74.00	-22.11	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.42	30.81	6.81	2.46	41.82	45.68	54.00	-8.32	Vertical
4824.00	47.90	30.81	6.81	2.46	41.82	46.16	54.00	-7.84	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	54.20	30.93	6.85	2.47	41.84	52.61	74.00	-21.39	Vertical
4874.00	55.03	30.93	6.85	2.47	41.84	53.44	74.00	-20.56	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.83	30.93	6.85	2.47	41.84	46.24	54.00	-7.76	Vertical
4874.00	48.05	30.93	6.85	2.47	41.84	46.46	54.00	-7.54	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	53.10	31.05	6.89	2.48	41.86	51.66	74.00	-22.34	Vertical
4924.00	54.00	31.05	6.89	2.48	41.86	52.56	74.00	-21.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.53	31.05	6.89	2.48	41.86	47.09	54.00	-6.91	Vertical
4924.00	47.61	31.05	6.89	2.48	41.86	46.17	54.00	-7.83	Horizontal
<i>Remark:</i> 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									




802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	53.12	30.87	6.83	2.46	41.83	51.45	74.00	-22.55	Vertical
4844.00	53.06	30.87	6.83	2.46	41.83	51.39	74.00	-22.61	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	46.52	30.87	6.83	2.46	41.83	44.85	54.00	-9.15	Vertical
4844.00	46.80	30.87	6.83	2.46	41.83	45.13	54.00	-8.87	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	54.11	30.93	6.85	2.47	41.84	52.52	74.00	-21.48	Vertical
4874.00	53.86	30.93	6.85	2.47	41.84	52.27	74.00	-21.73	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.14	30.93	6.85	2.47	41.84	44.55	54.00	-9.45	Vertical
4874.00	46.82	30.93	6.85	2.47	41.84	45.23	54.00	-8.77	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	54.41	30.99	6.87	2.48	41.85	52.90	74.00	-21.10	Vertical
4904.00	53.21	30.99	6.87	2.48	41.85	51.70	74.00	-22.30	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	47.14	30.99	6.87	2.48	41.85	45.63	54.00	-8.37	Vertical
4904.00	46.98	30.99	6.87	2.48	41.85	45.47	54.00	-8.53	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

## Appendix A - WIFI


### Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	b	2412	Ant1	100	0
NVNT	b	2437	Ant1	100	0
NVNT	b	2462	Ant1	100	0
NVNT	g	2412	Ant1	100	0
NVNT	g	2437	Ant1	100	0
NVNT	g	2462	Ant1	100	0
NVNT	n20	2412	Ant1	100	0
NVNT	n20	2437	Ant1	100	0
NVNT	n20	2462	Ant1	100	0
NVNT	n40	2422	Ant1	100	0
NVNT	n40	2437	Ant1	100	0
NVNT	n40	2452	Ant1	100	0


Duty Cycle NVNT b 2412MHz Ant1

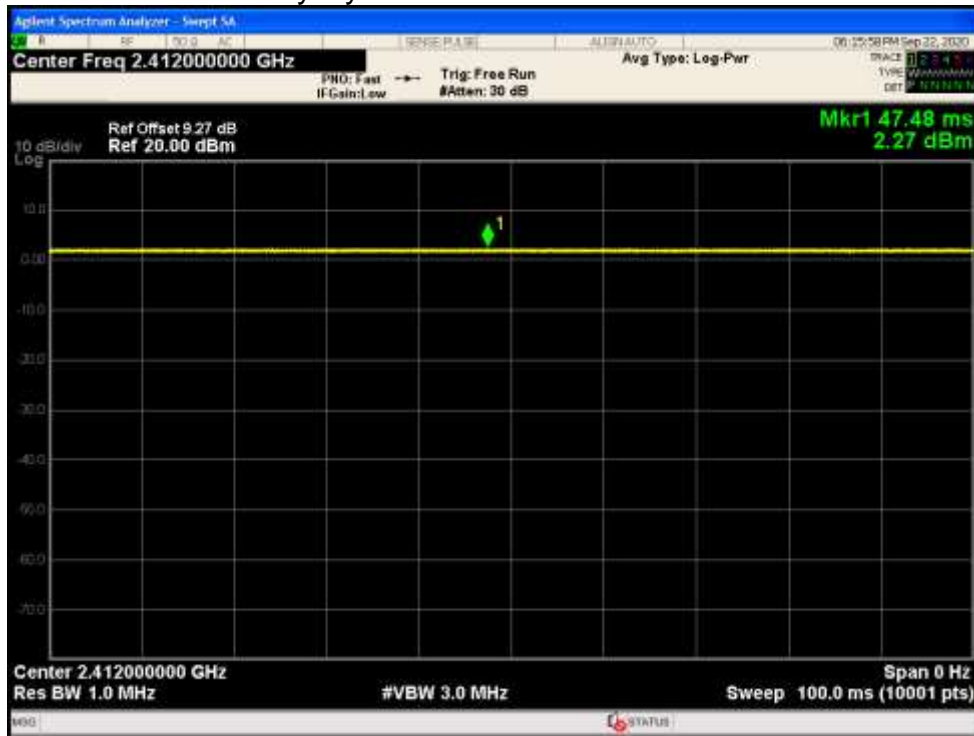


### Duty Cycle NVNT b 2437MHz Ant1

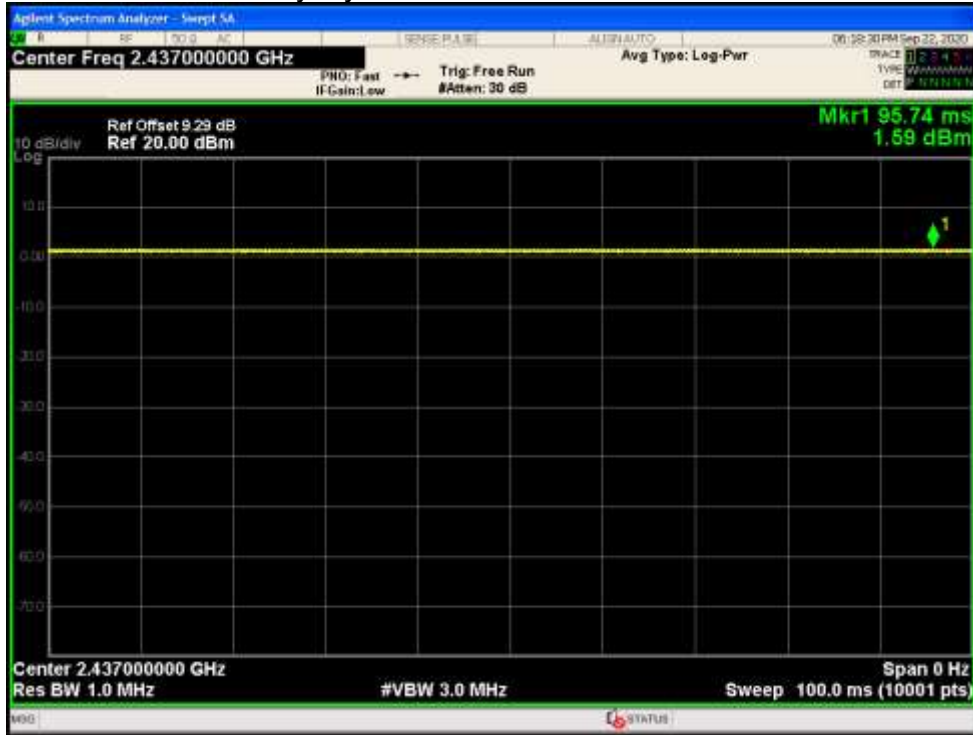


### Duty Cycle NVNT b 2462MHz Ant1

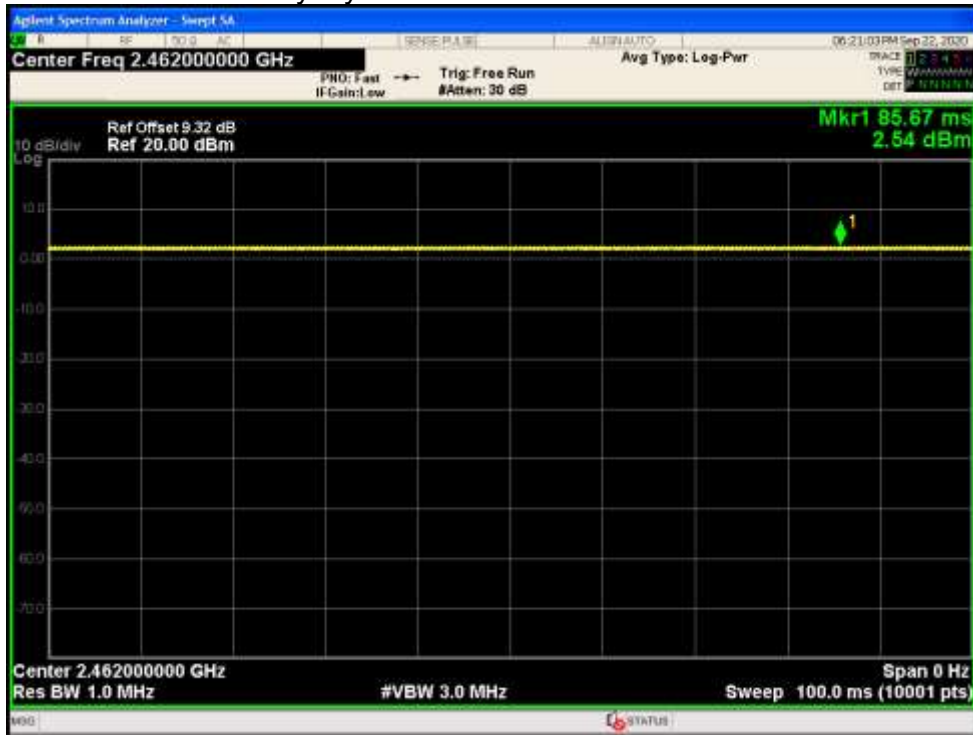


### Duty Cycle NVNT g 2412MHz Ant1

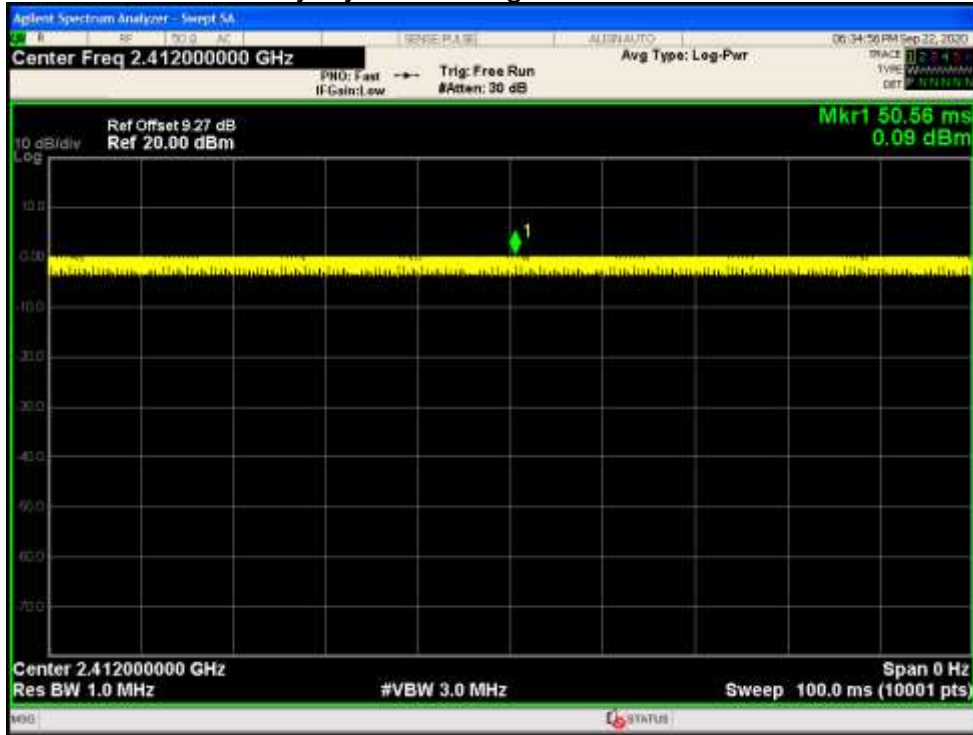


### Duty Cycle NVNT g 2437MHz Ant1

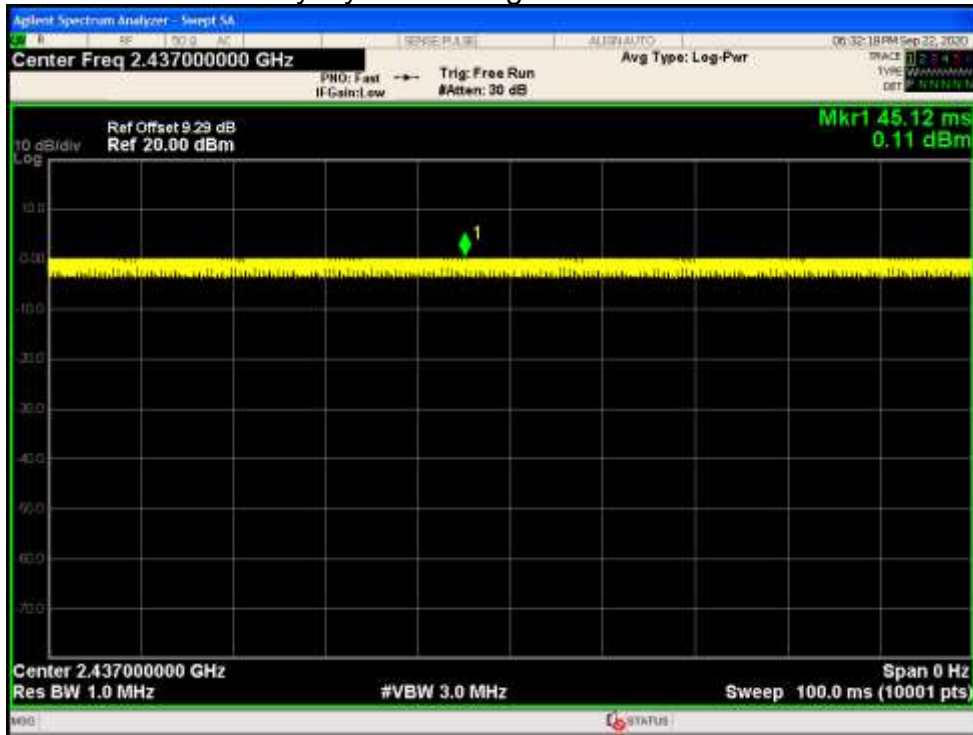


Duty Cycle NVNT g 2462MHz Ant1

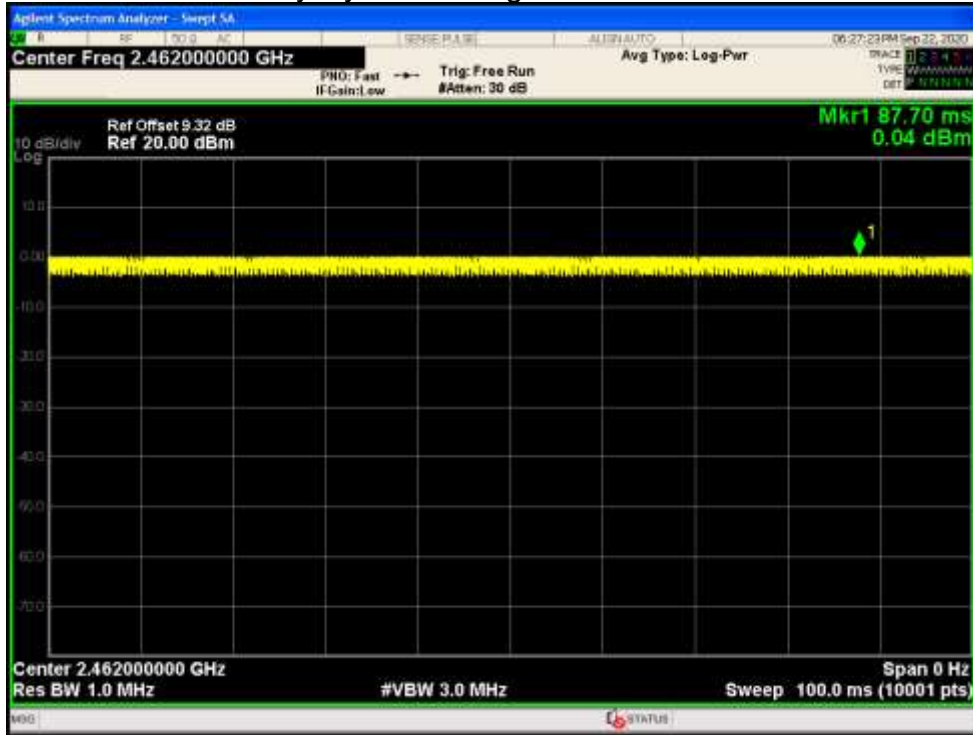


Duty Cycle NVNT n20 2412MHz Ant1

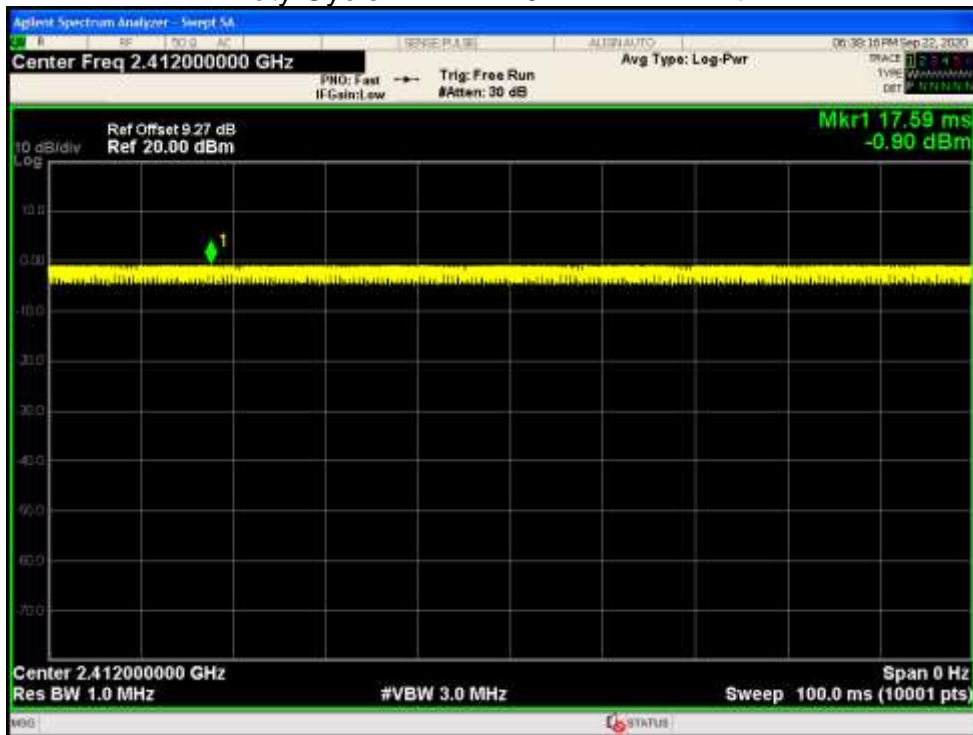

## Duty Cycle NVNT n20 2437MHz Ant1

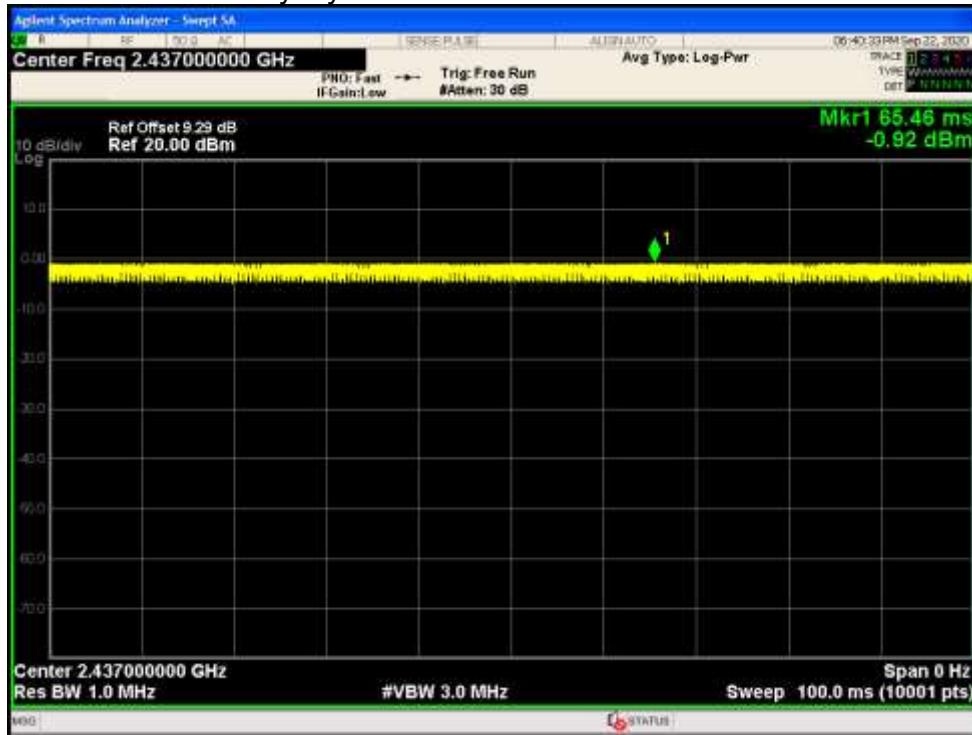


## Duty Cycle NVNT n20 2462MHz Ant1

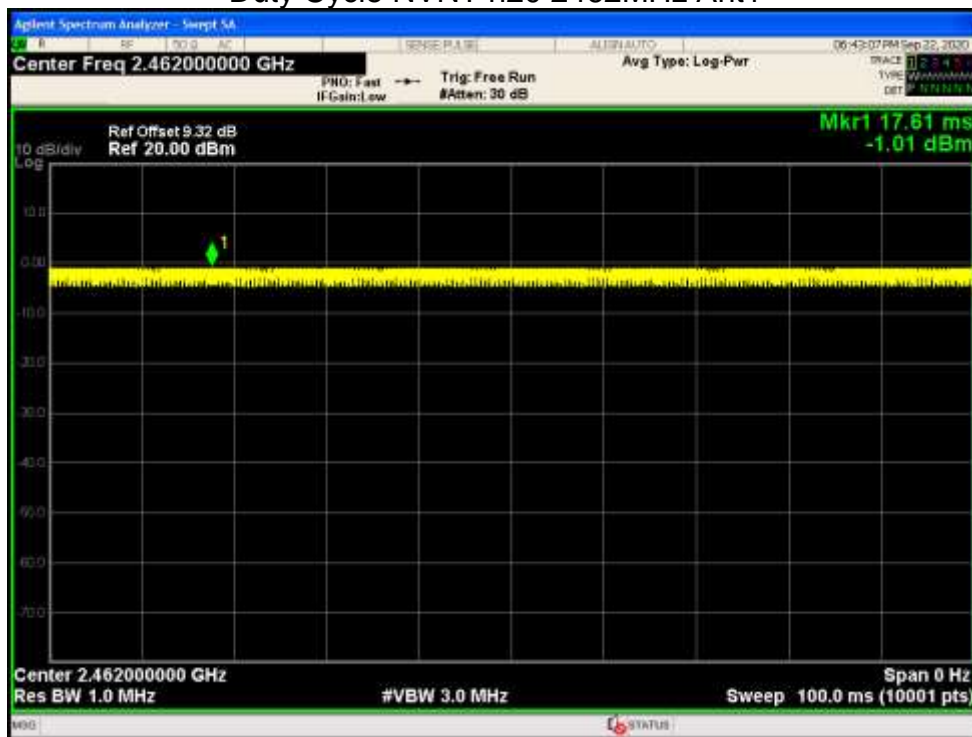




### Duty Cycle NVNT n40 2422MHz Ant1

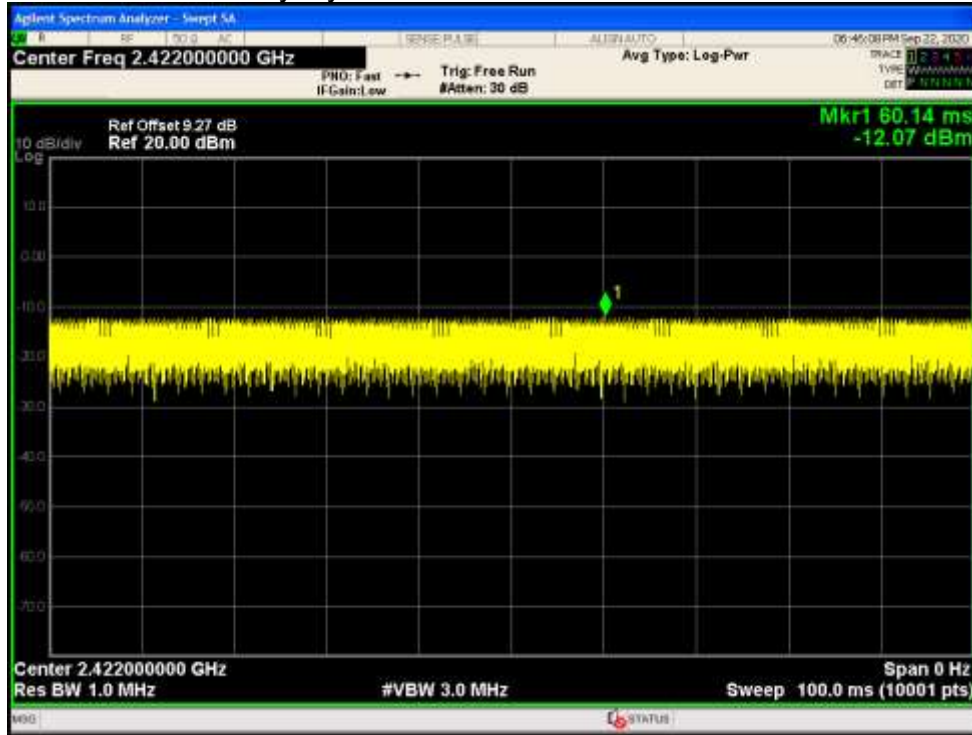


### Duty Cycle NVNT n40 2437MHz Ant1

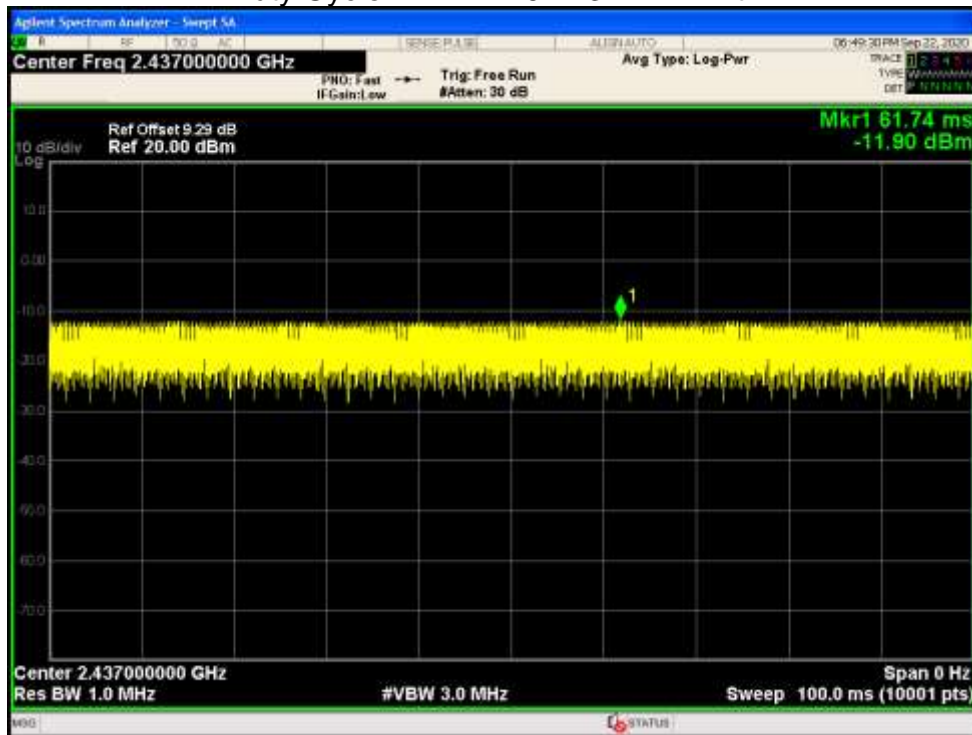



## Duty Cycle NVNT n40 2452MHz Ant1

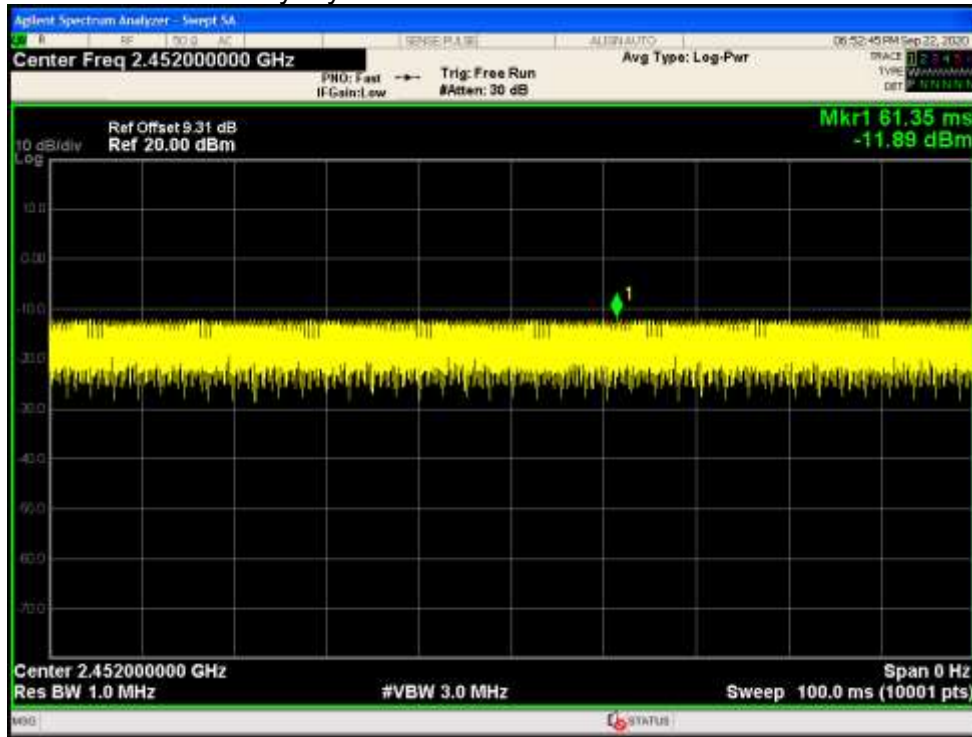

### Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	7.44	0	7.44	30	Pass
NVNT	b	2437	Ant1	7.27	0	7.27	30	Pass
NVNT	b	2462	Ant1	7.27	0	7.27	30	Pass
NVNT	g	2412	Ant1	6.61	0	6.61	30	Pass
NVNT	g	2437	Ant1	6.55	0	6.55	30	Pass
NVNT	g	2462	Ant1	6.53	0	6.53	30	Pass
NVNT	n20	2412	Ant1	5.57	0	5.57	30	Pass
NVNT	n20	2437	Ant1	5.5	0	5.50	30	Pass
NVNT	n20	2462	Ant1	5.44	0	5.44	30	Pass
NVNT	n40	2422	Ant1	4.91	0	4.91	30	Pass
NVNT	n40	2437	Ant1	4.86	0	4.86	30	Pass
NVNT	n40	2452	Ant1	4.88	0	4.88	30	Pass


**-6dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.057	0.5	Pass
NVNT	b	2437	Ant1	9.068	0.5	Pass
NVNT	b	2462	Ant1	9.017	0.5	Pass
NVNT	g	2412	Ant1	16.532	0.5	Pass
NVNT	g	2437	Ant1	16.560	0.5	Pass
NVNT	g	2462	Ant1	16.568	0.5	Pass
NVNT	n20	2412	Ant1	16.523	0.5	Pass
NVNT	n20	2437	Ant1	16.550	0.5	Pass
NVNT	n20	2462	Ant1	16.567	0.5	Pass
NVNT	n40	2422	Ant1	36.420	0.5	Pass
NVNT	n40	2437	Ant1	36.454	0.5	Pass
NVNT	n40	2452	Ant1	36.454	0.5	Pass

-6dB Bandwidth NVNT b 2412MHz Ant1




### -6dB Bandwidth NVNT b 2437MHz Ant1

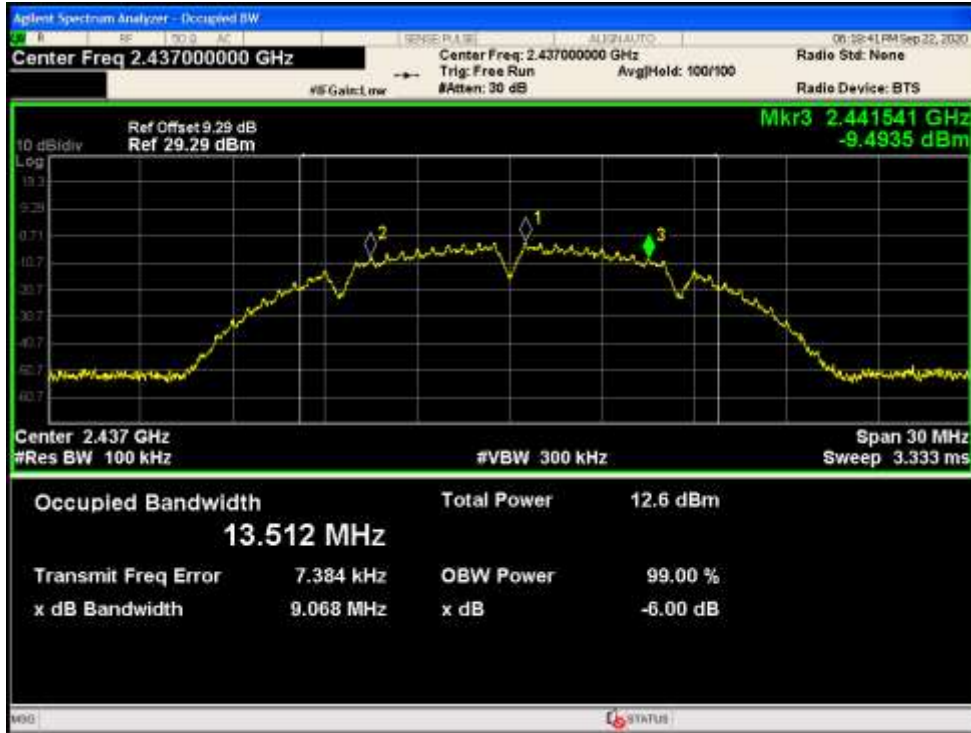


### -6dB Bandwidth NVNT b 2462MHz Ant1



### -6dB Bandwidth NVNT g 2412MHz Ant1

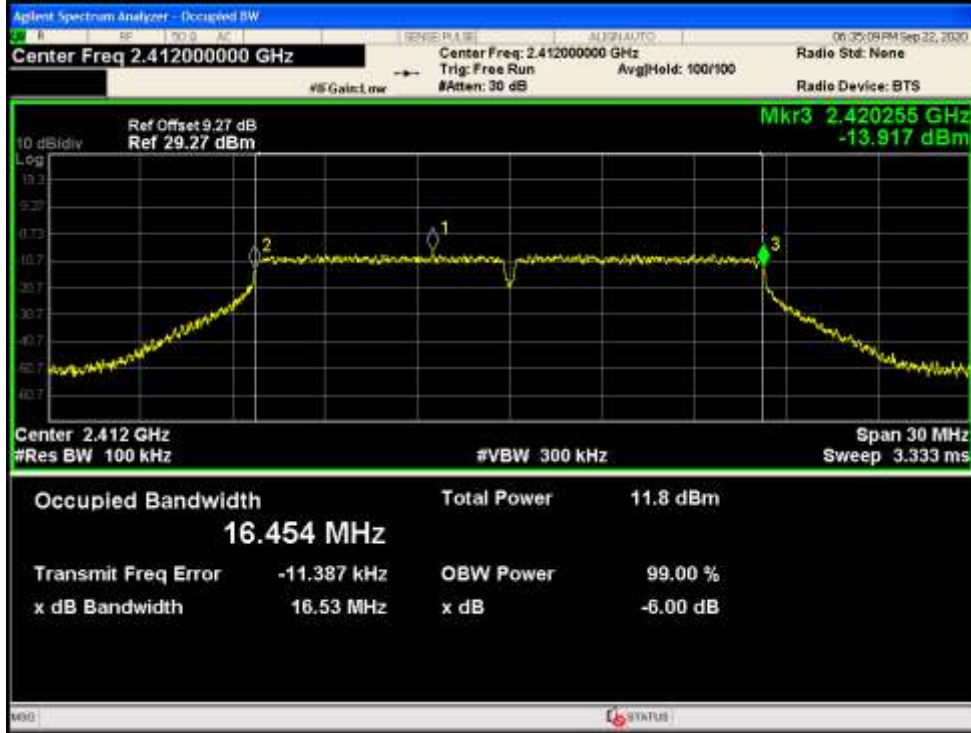

### -6dB Bandwidth NVNT g 2437MHz Ant1

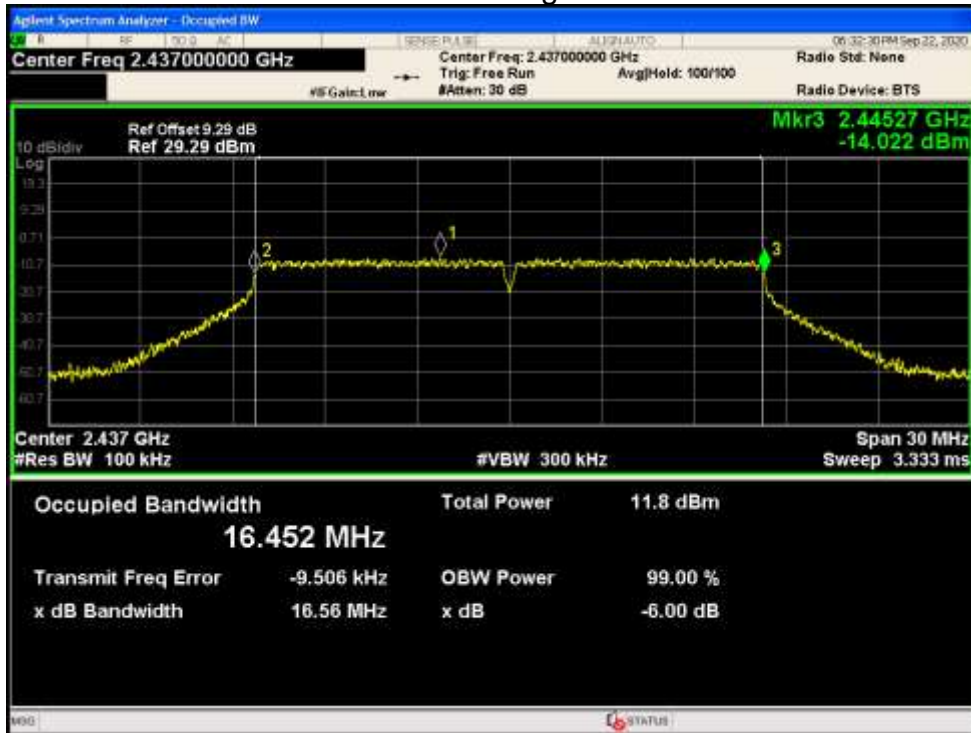

### -6dB Bandwidth NVNT g 2462MHz Ant1




### -6dB Bandwidth NVNT n20 2412MHz Ant1






### -6dB Bandwidth NVNT n20 2437MHz Ant1

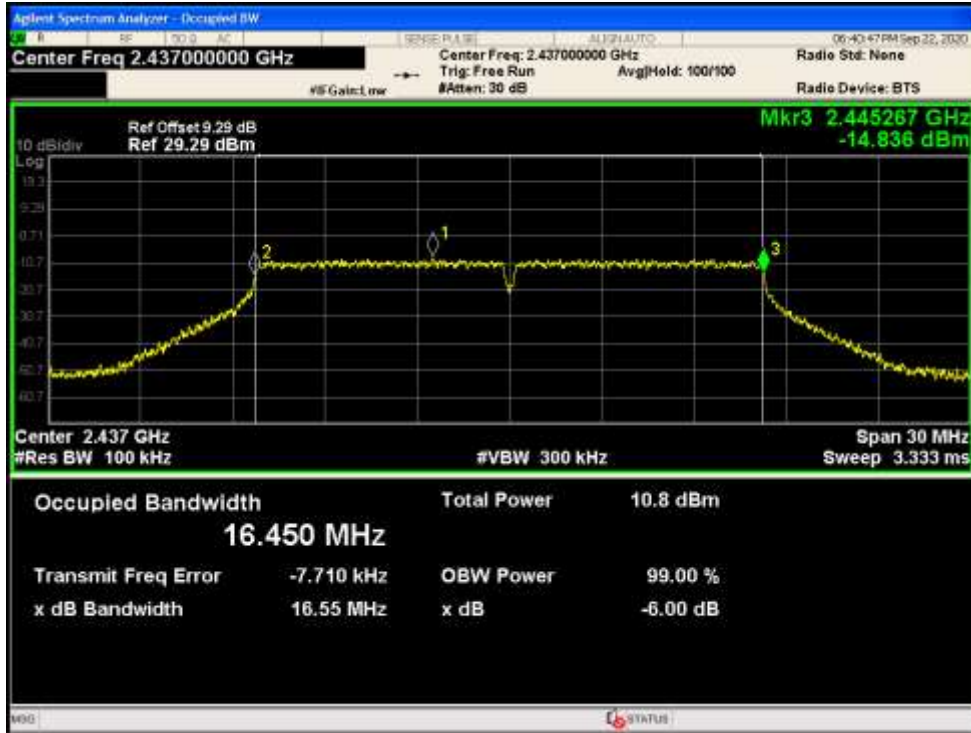

### -6dB Bandwidth NVNT n20 2462MHz Ant1



### -6dB Bandwidth NVNT n40 2422MHz Ant1

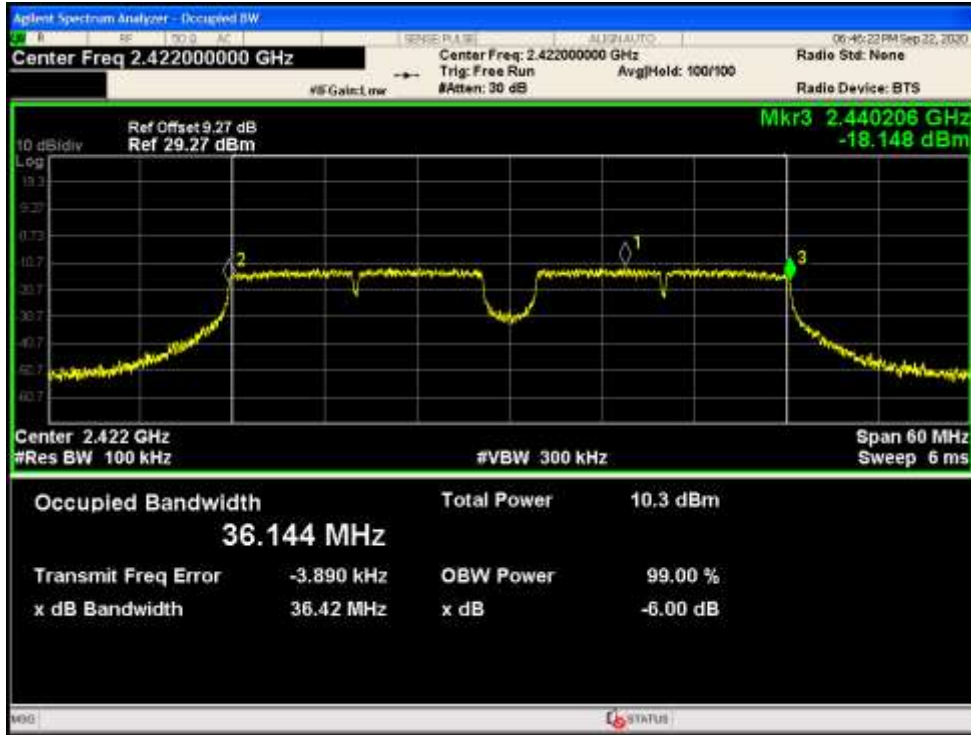


### -6dB Bandwidth NVNT n40 2437MHz Ant1





## -6dB Bandwidth NVNT n40 2452MHz Ant1

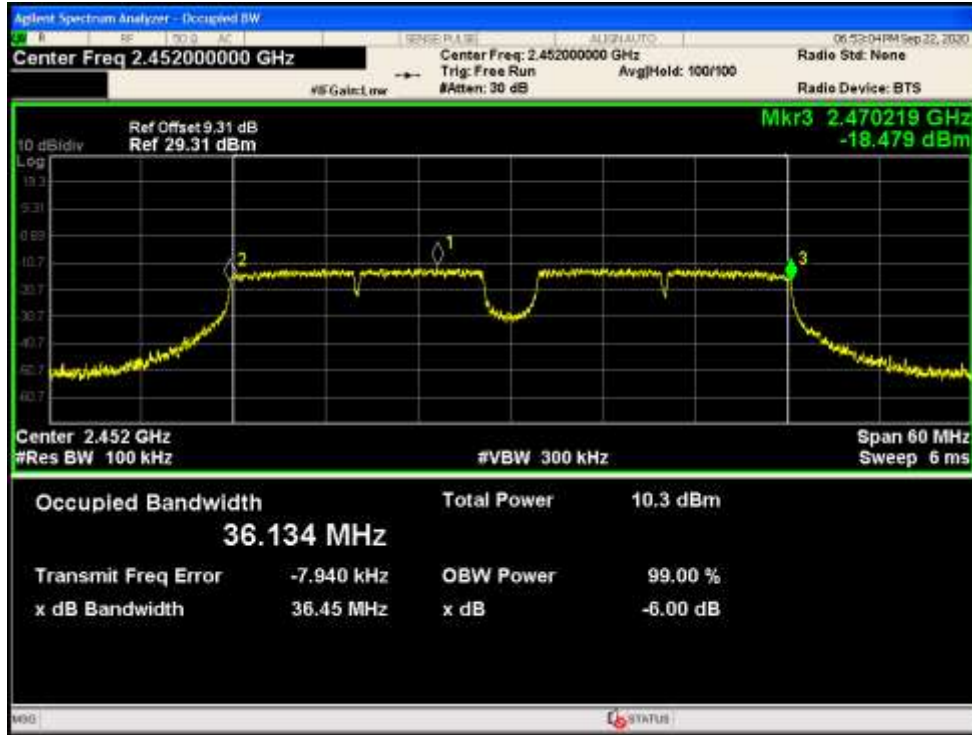

### Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.22135049
NVNT	b	2437	Ant1	13.51531378
NVNT	b	2462	Ant1	13.26190813
NVNT	g	2412	Ant1	16.56377966
NVNT	g	2437	Ant1	16.55109540
NVNT	g	2462	Ant1	16.54053365
NVNT	n20	2412	Ant1	16.53580802
NVNT	n20	2437	Ant1	16.53773096
NVNT	n20	2462	Ant1	16.54866306
NVNT	n40	2422	Ant1	36.32009343
NVNT	n40	2437	Ant1	36.30092541
NVNT	n40	2452	Ant1	36.29335199


## OBW NVNT b 2412MHz Ant1




## OBW NVNT b 2437MHz Ant1




## OBW NVNT b 2462MHz Ant1

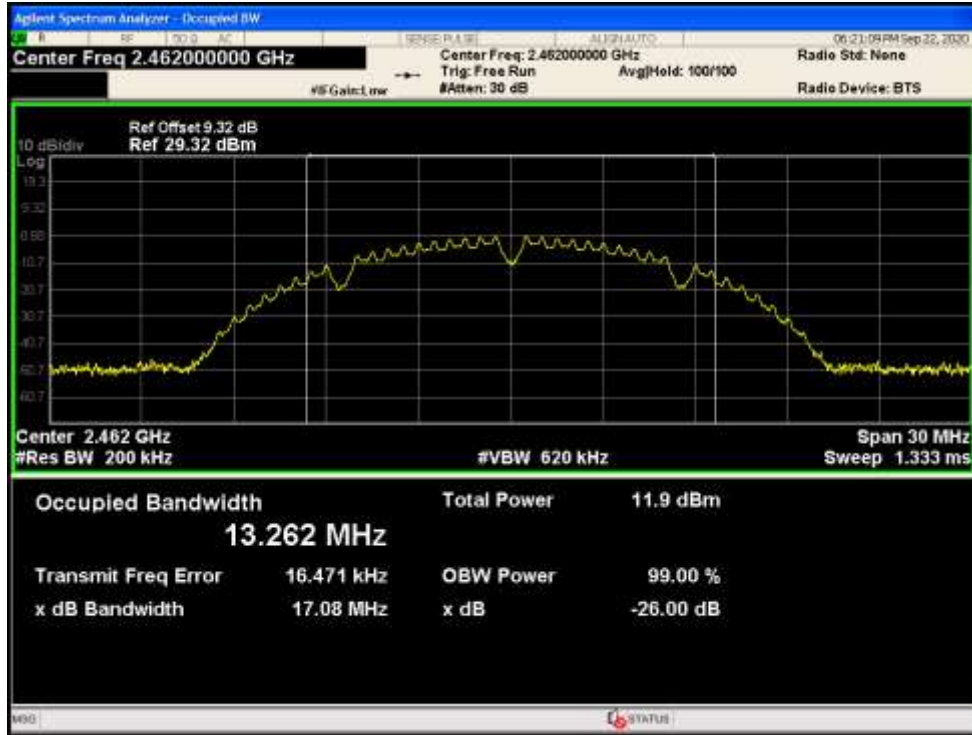


## OBW NVNT g 2412MHz Ant1

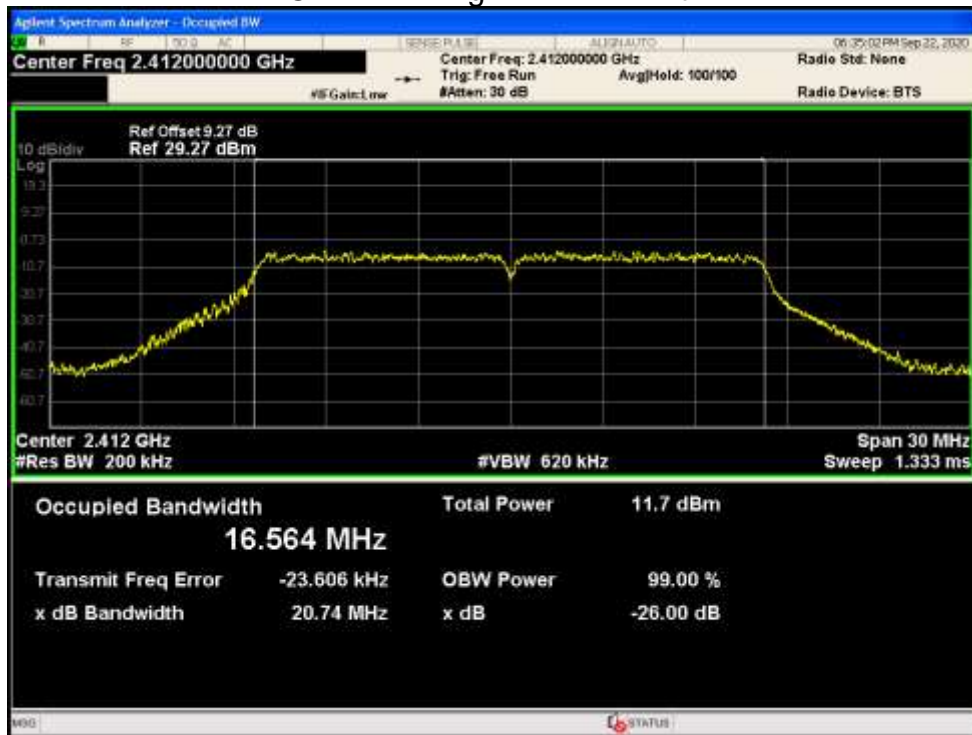


## OBW NVNT g 2437MHz Ant1

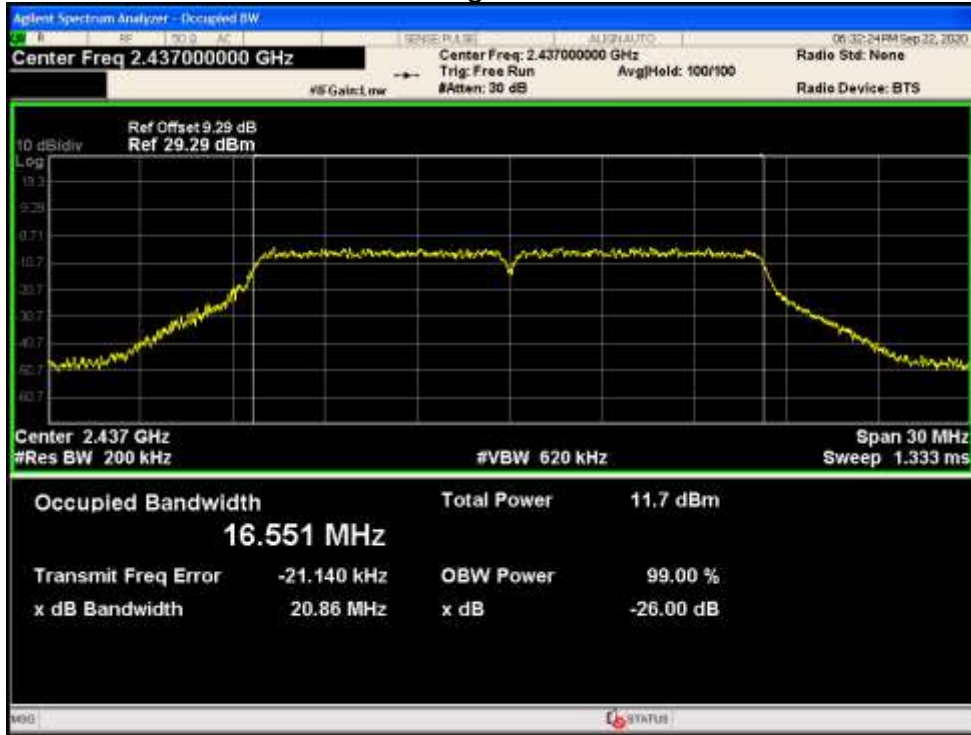


## OBW NVNT g 2462MHz Ant1

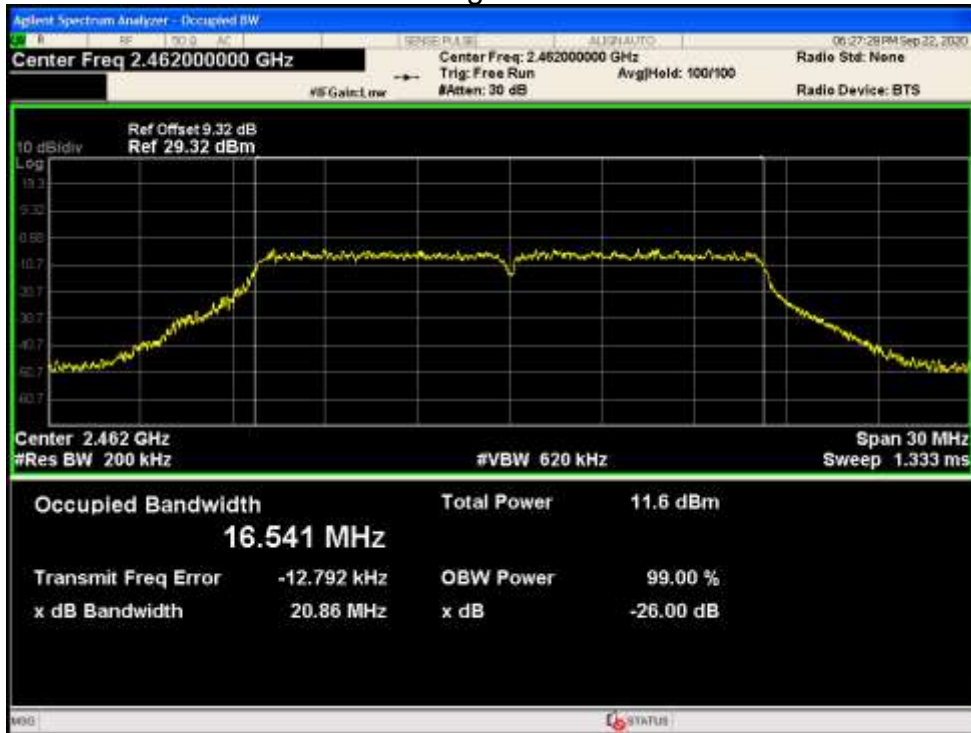

## OBW NVNT n20 2412MHz Ant1

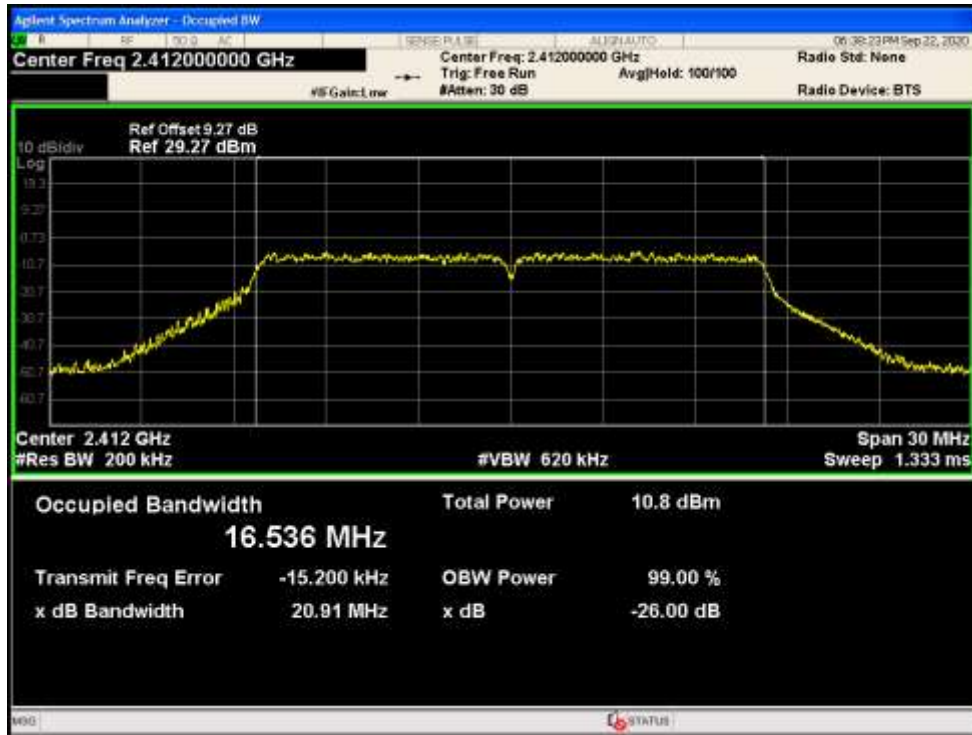


## OBW NVNT n20 2437MHz Ant1

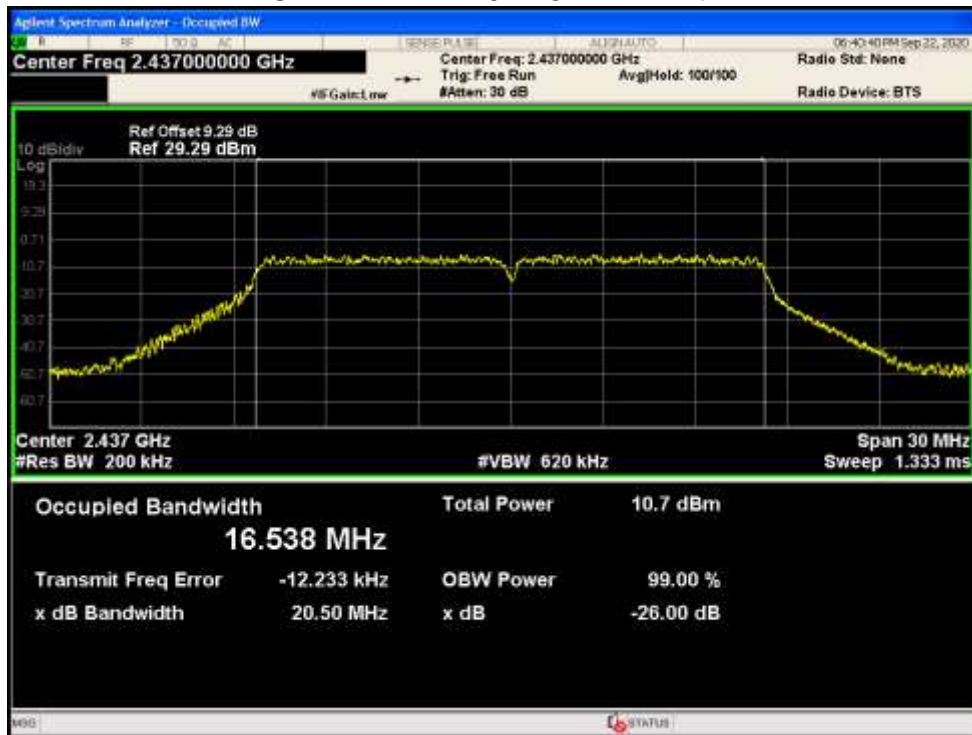





## OBW NVNT n20 2462MHz Ant1

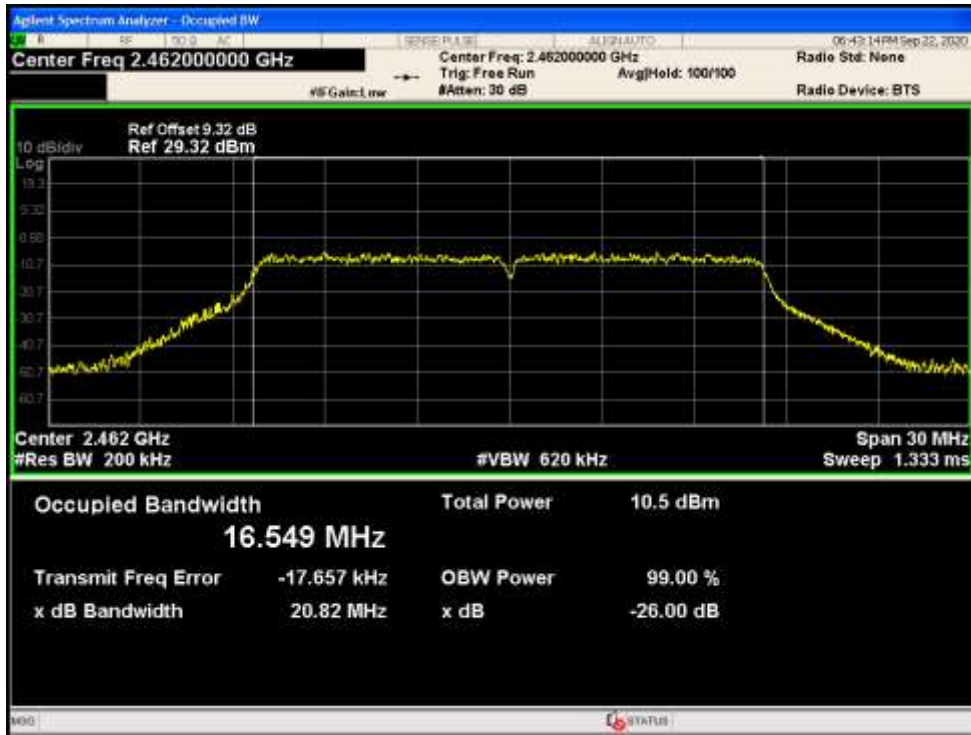

## OBW NVNT n40 2422MHz Ant1

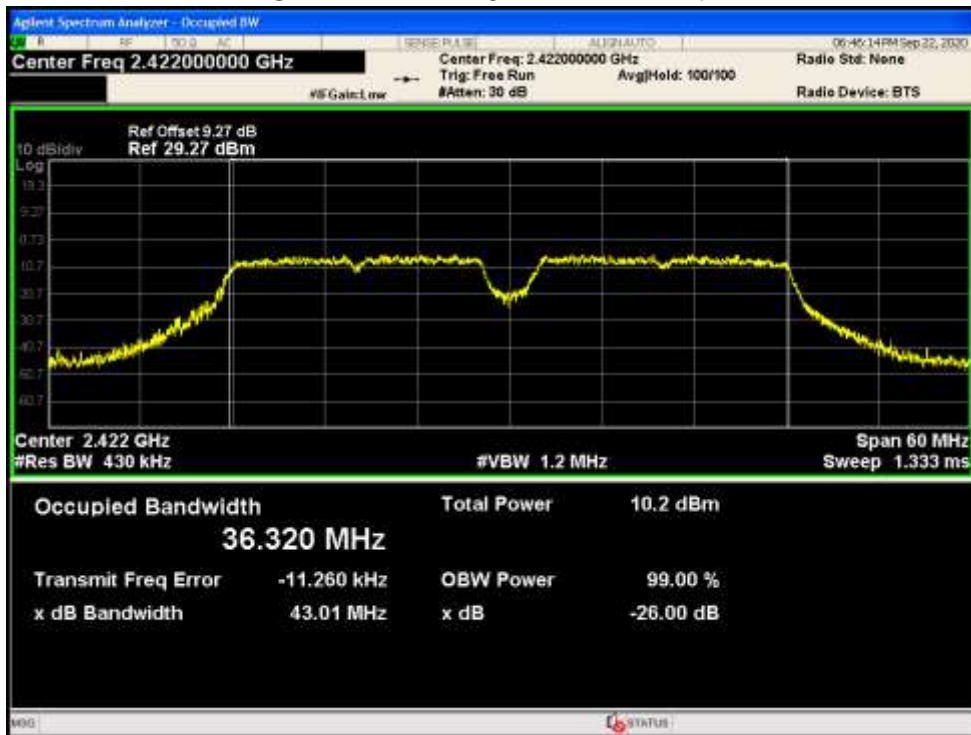

## OBW NVNT n40 2437MHz Ant1

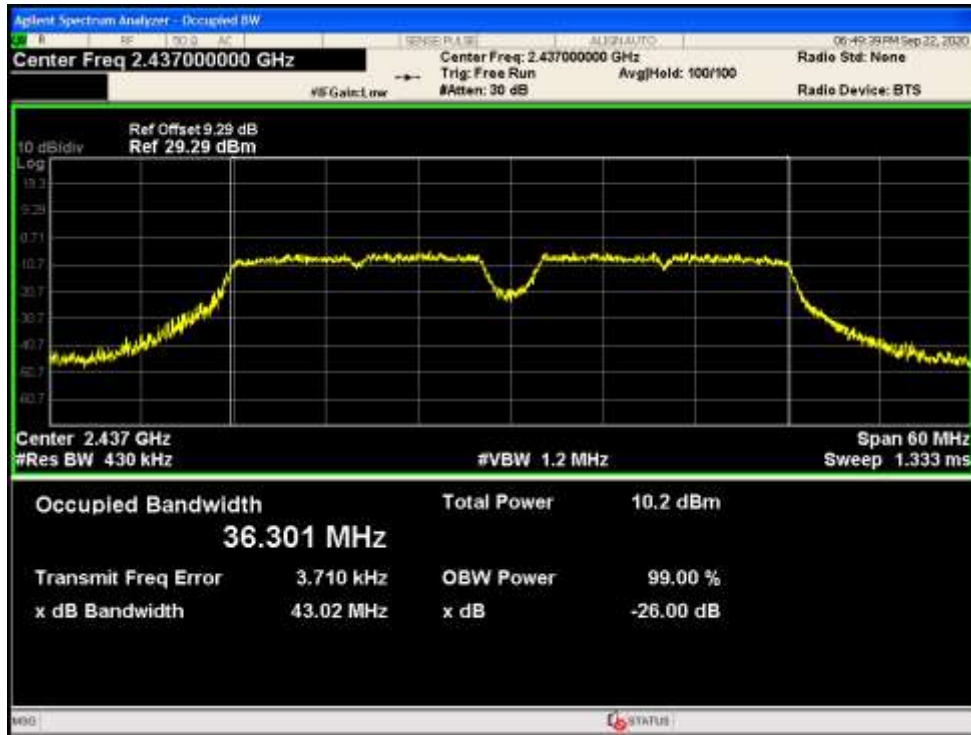

## OBW NVNT n40 2452MHz Ant1





### Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-25.349	8	Pass
NVNT	b	2437	Ant1	-26.001	8	Pass
NVNT	b	2462	Ant1	-25.088	8	Pass
NVNT	g	2412	Ant1	-28.642	8	Pass
NVNT	g	2437	Ant1	-28.224	8	Pass
NVNT	g	2462	Ant1	-28.574	8	Pass
NVNT	n20	2412	Ant1	-29.040	8	Pass
NVNT	n20	2437	Ant1	-29.411	8	Pass
NVNT	n20	2462	Ant1	-29.721	8	Pass
NVNT	n40	2422	Ant1	-33.514	8	Pass
NVNT	n40	2437	Ant1	-33.502	8	Pass
NVNT	n40	2452	Ant1	-33.327	8	Pass

PSD NVNT b 2412MHz Ant1



## PSD NVNT b 2437MHz Ant1




## PSD NVNT b 2462MHz Ant1




## PSD NVNT g 2412MHz Ant1




## PSD NVNT g 2437MHz Ant1

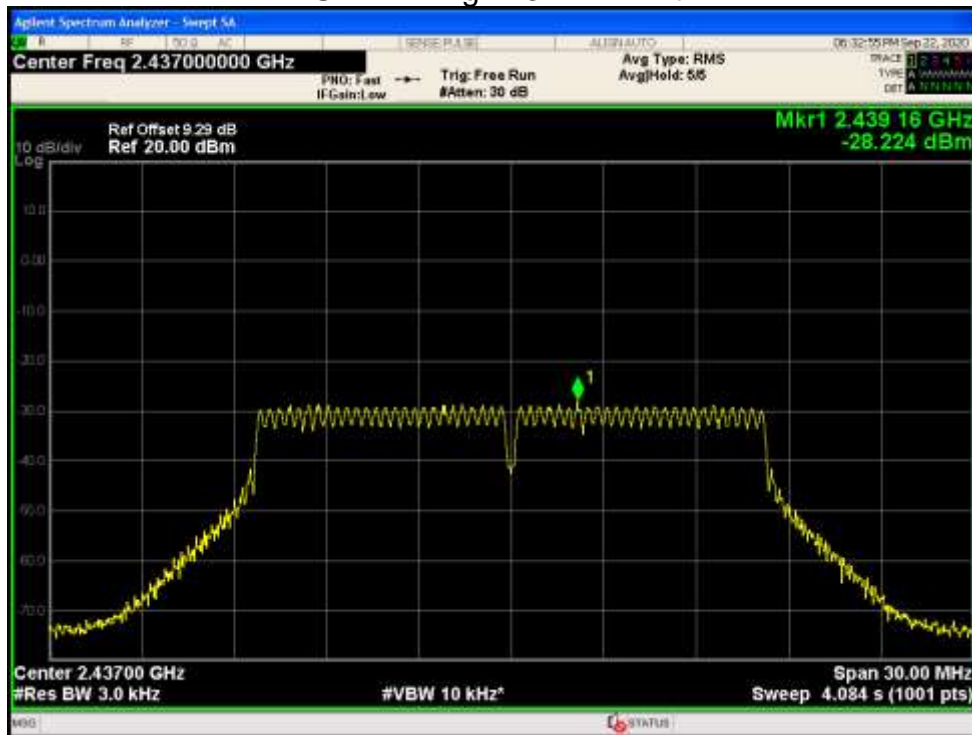


## PSD NVNT g 2462MHz Ant1

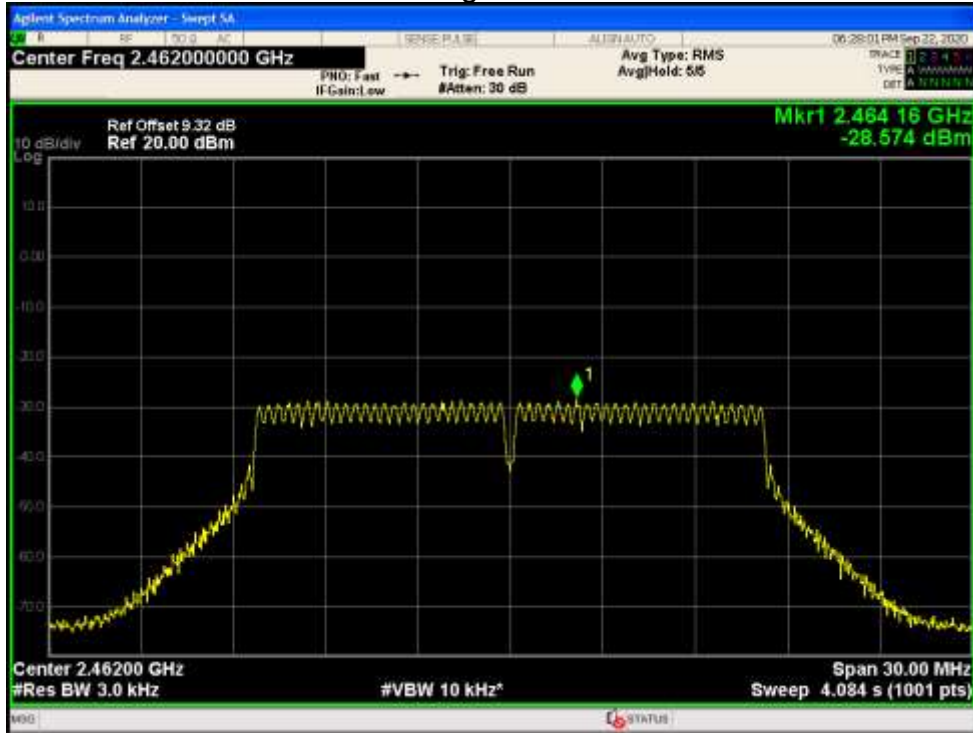


## PSD NVNT n20 2412MHz Ant1

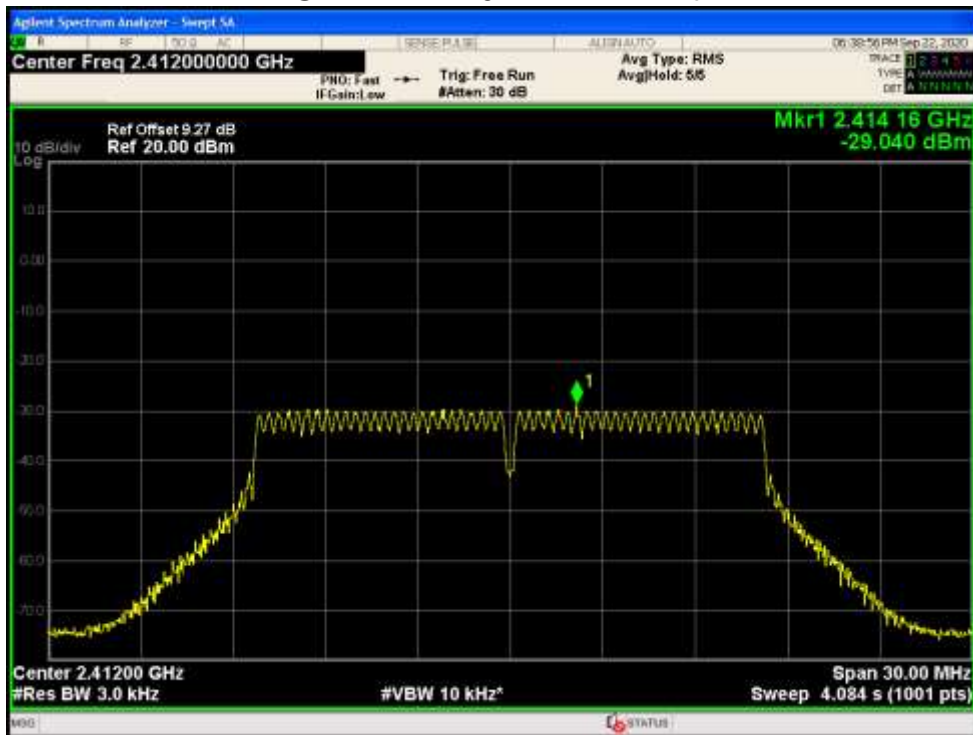

## PSD NVNT n20 2437MHz Ant1

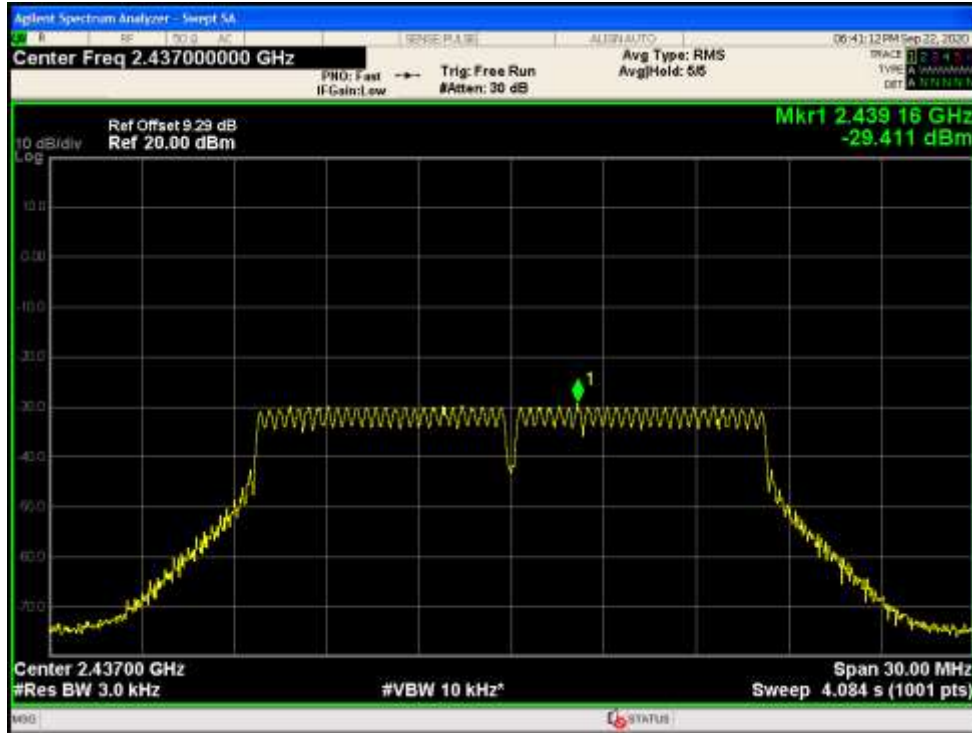


## PSD NVNT n20 2462MHz Ant1

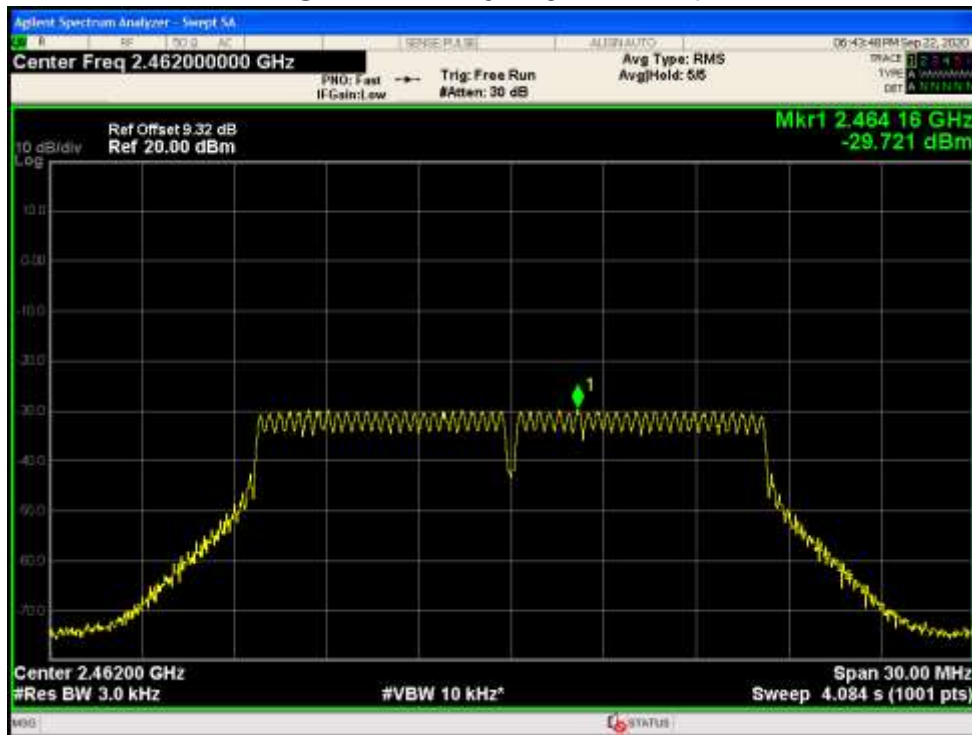





PSD NVNT n40 2422MHz Ant1

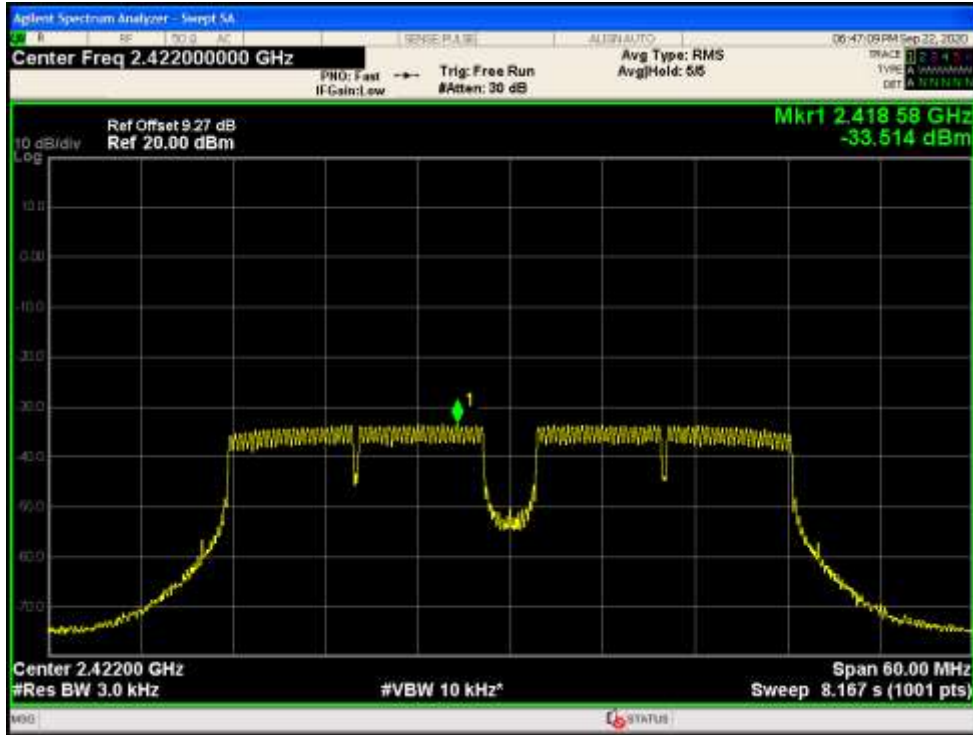

PSD NVNT n40 2437MHz Ant1

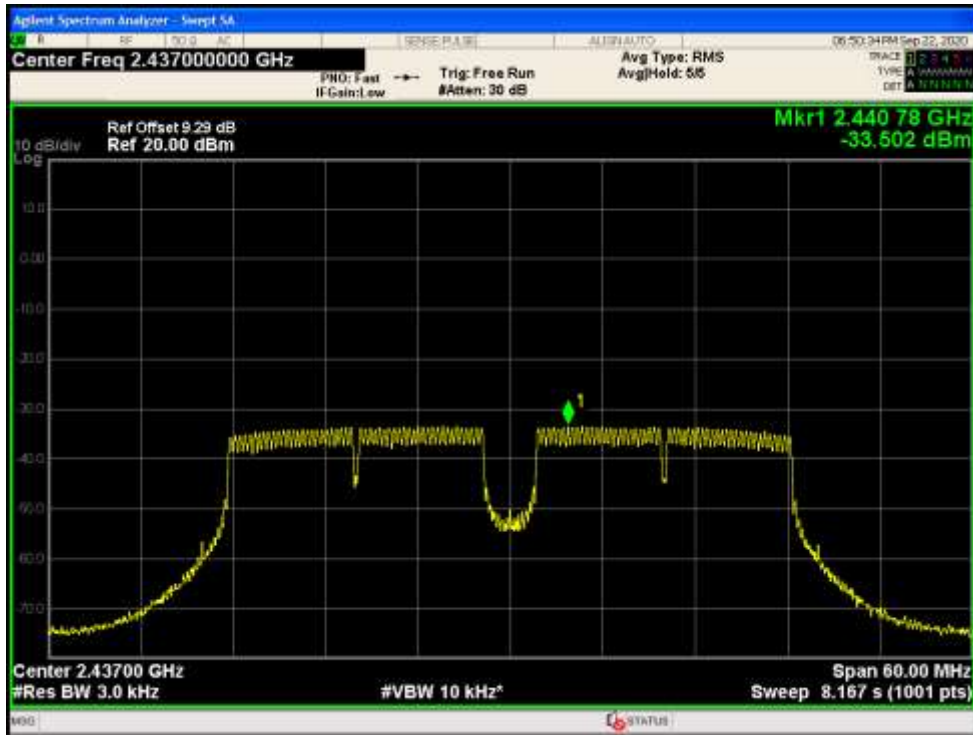

## PSD NVNT n40 2452MHz Ant1

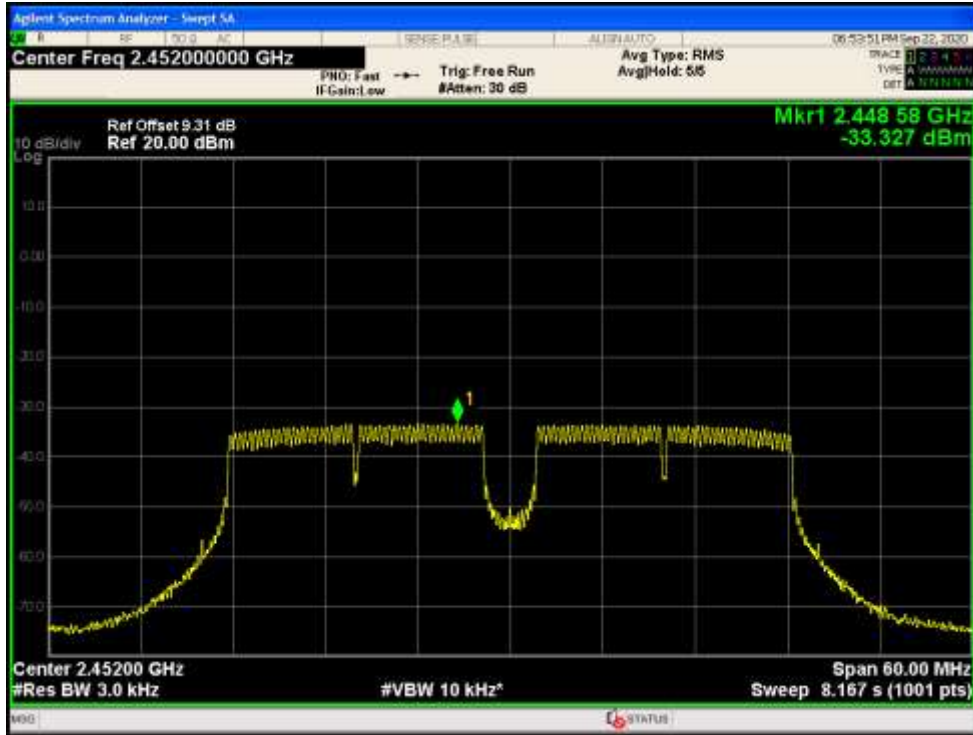





### Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-47.10	-30	Pass
NVNT	b	2462	Ant1	-47.37	-30	Pass
NVNT	g	2412	Ant1	-41.70	-30	Pass
NVNT	g	2462	Ant1	-40.72	-30	Pass
NVNT	n20	2412	Ant1	-40.51	-30	Pass
NVNT	n20	2462	Ant1	-40.20	-30	Pass
NVNT	n40	2422	Ant1	-36.19	-30	Pass
NVNT	n40	2452	Ant1	-36.01	-30	Pass

Band Edge NVNT b 2412MHz Ant1 Ref

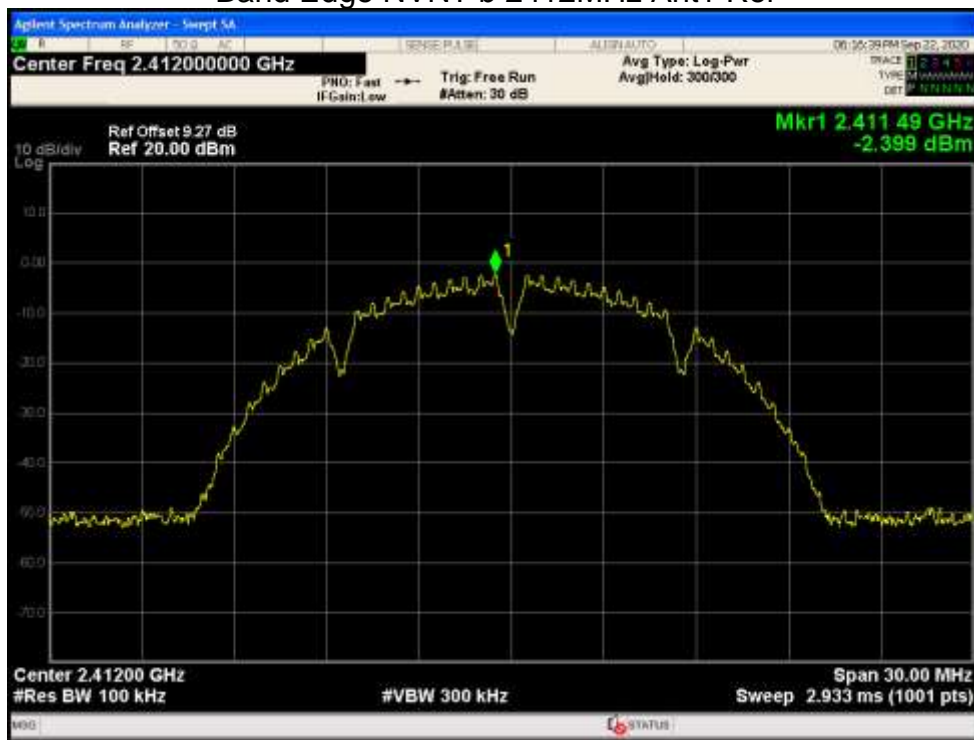


## Band Edge NVNT b 2412MHz Ant1 Emission

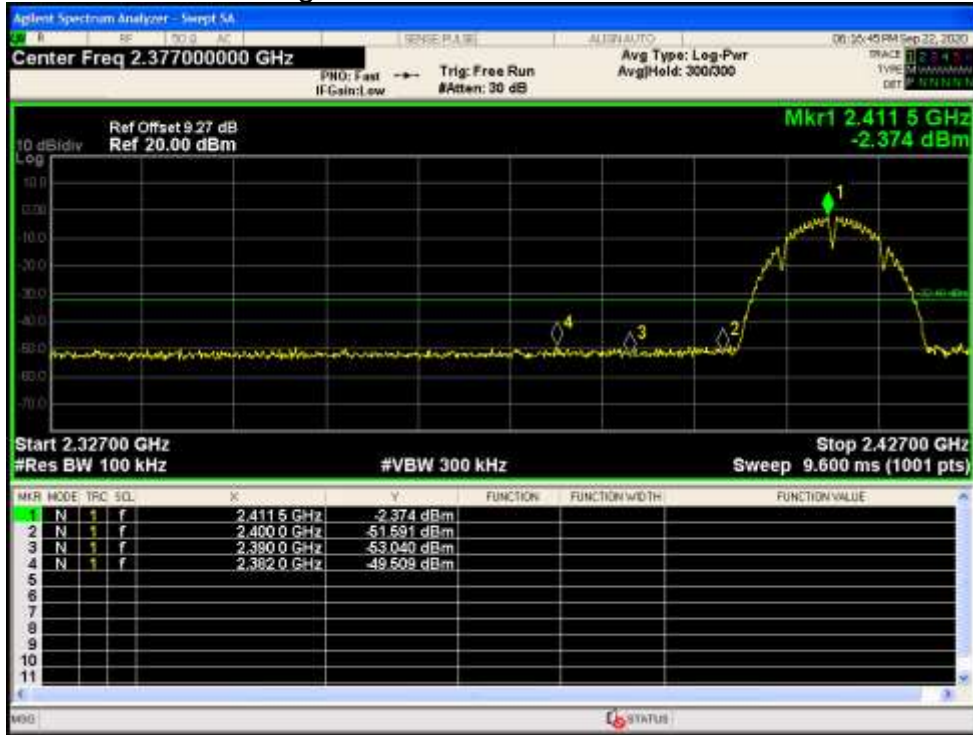


## Band Edge NVNT b 2462MHz Ant1 Ref




## Band Edge NVNT b 2462MHz Ant1 Emission

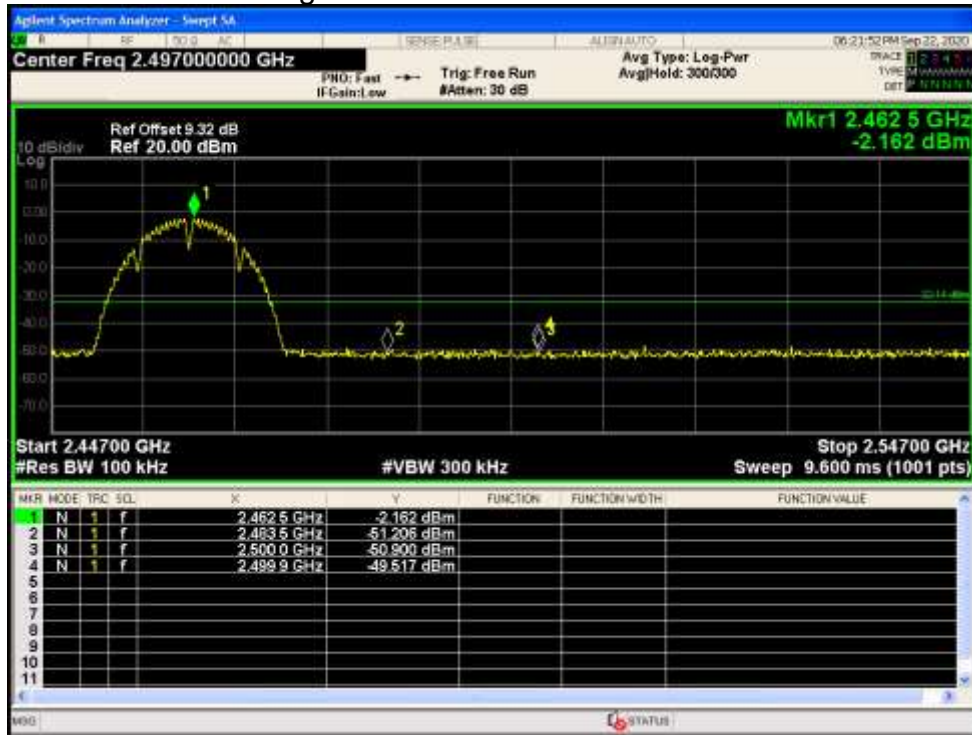

## Band Edge NVNT g 2412MHz Ant1 Ref

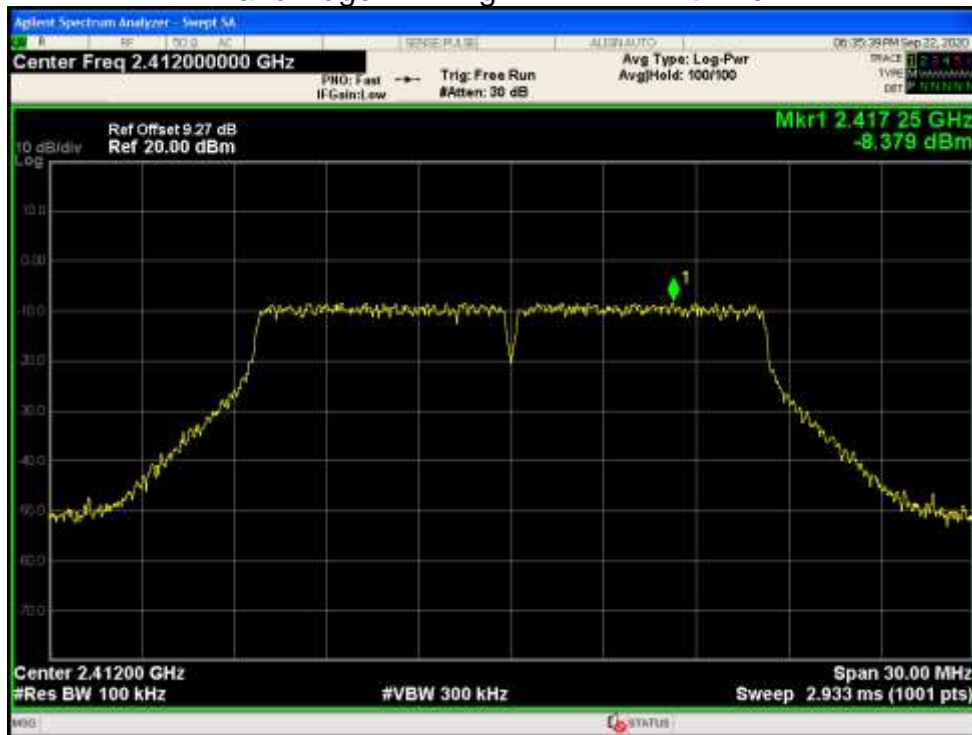


## Band Edge NVNT g 2412MHz Ant1 Emission

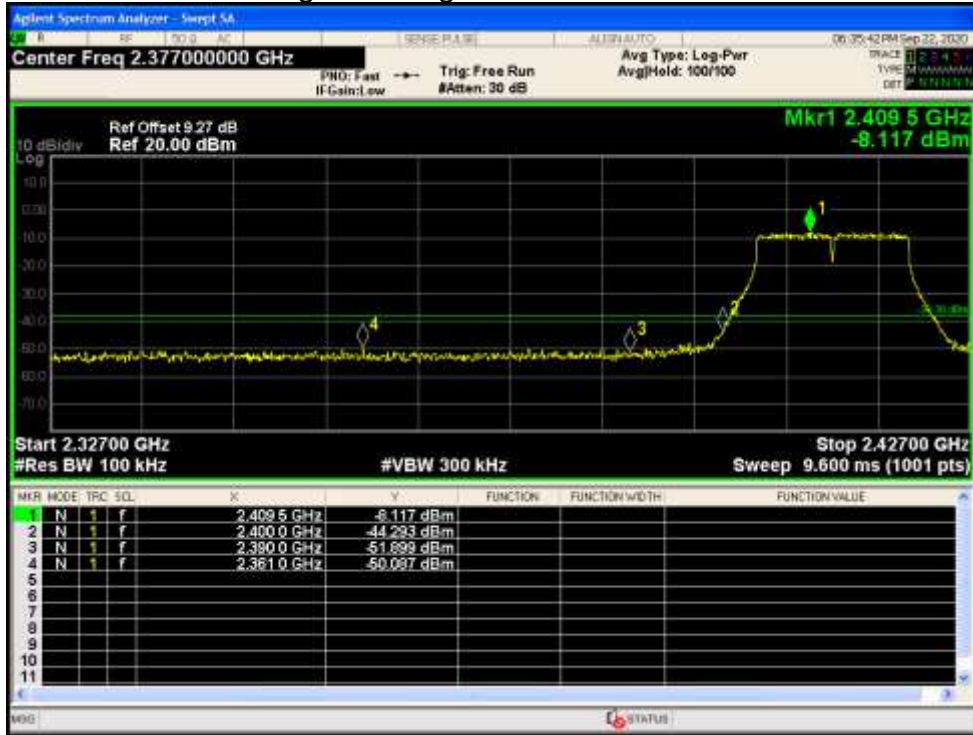

## Band Edge NVNT g 2462MHz Ant1 Ref



## Band Edge NVNT g 2462MHz Ant1 Emission

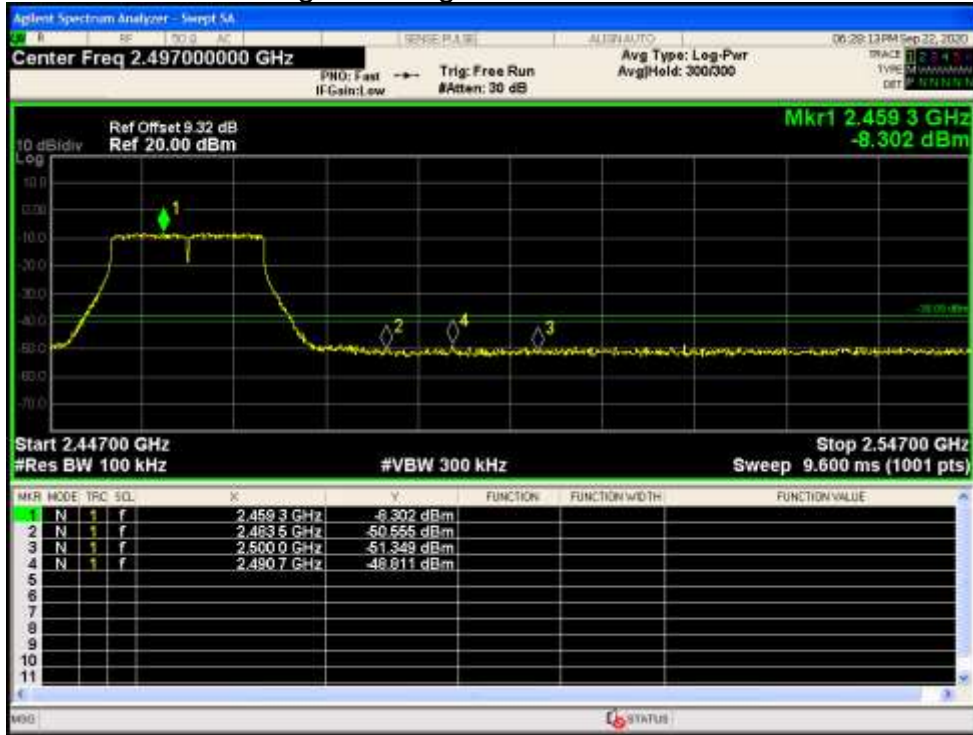


## Band Edge NVNT n20 2412MHz Ant1 Ref





## Band Edge NVNT n20 2412MHz Ant1 Emission

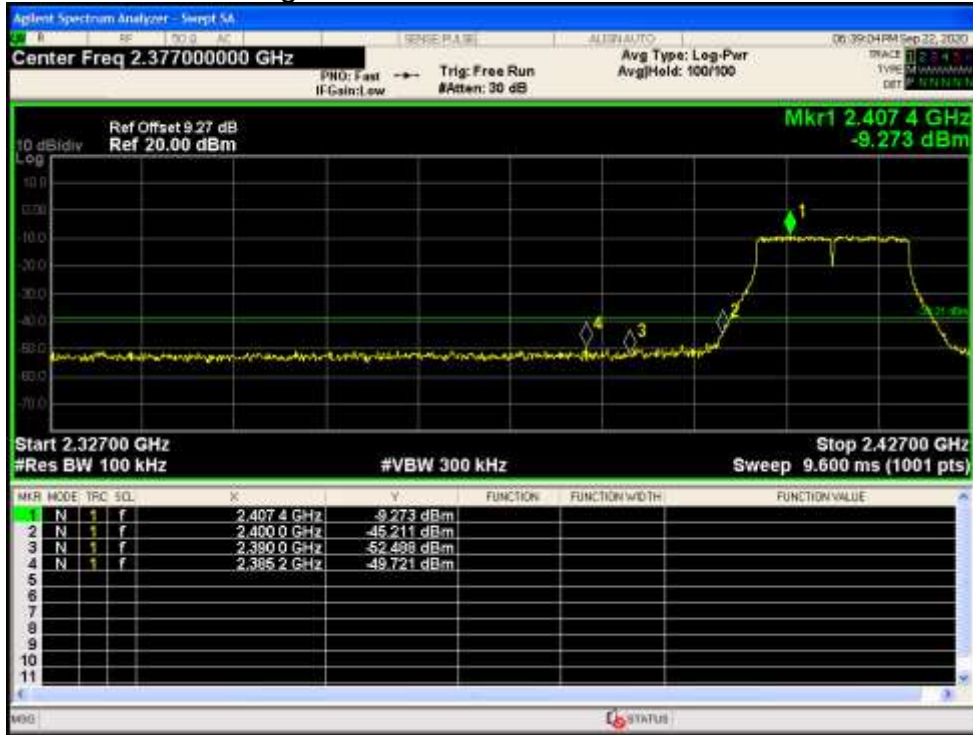


## Band Edge NVNT n20 2462MHz Ant1 Ref





## Band Edge NVNT n20 2462MHz Ant1 Emission

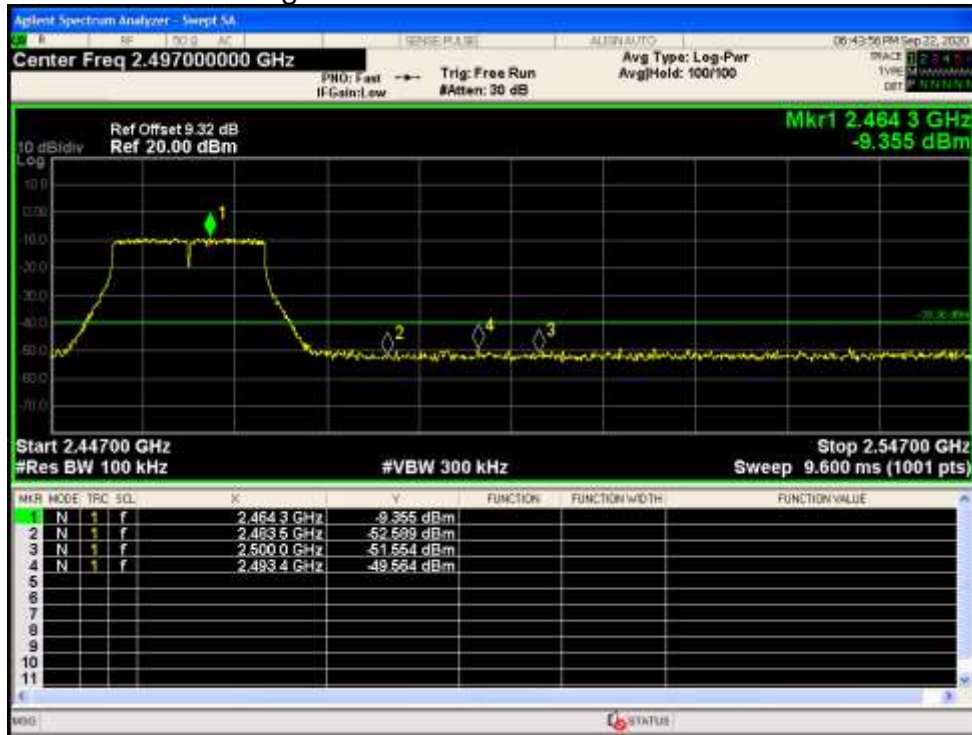

## Band Edge NVNT n40 2422MHz Ant1 Ref




## Band Edge NVNT n40 2422MHz Ant1 Emission



## Band Edge NVNT n40 2452MHz Ant1 Ref



## Band Edge NVNT n40 2452MHz Ant1 Emission

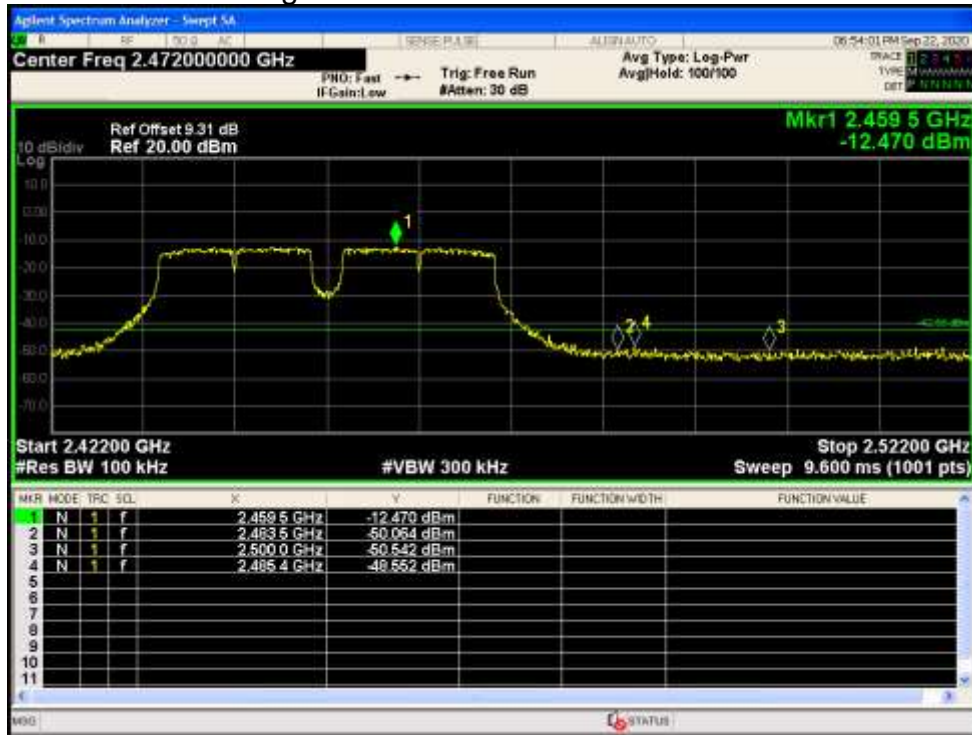


### Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-35.09	-30	Pass
NVNT	b	2437	Ant1	-34.56	-30	Pass
NVNT	b	2462	Ant1	-34.41	-30	Pass
NVNT	g	2412	Ant1	-38.19	-30	Pass
NVNT	g	2437	Ant1	-38.55	-30	Pass
NVNT	g	2462	Ant1	-37.47	-30	Pass
NVNT	n20	2412	Ant1	-37.53	-30	Pass
NVNT	n20	2437	Ant1	-36.38	-30	Pass
NVNT	n20	2462	Ant1	-37.45	-30	Pass
NVNT	n40	2422	Ant1	-34.13	-30	Pass
NVNT	n40	2437	Ant1	-34.73	-30	Pass
NVNT	n40	2452	Ant1	-34.03	-30	Pass

Tx. Spurious NVNT b 2412MHz Ant1 Ref



## Tx. Spurious NVNT b 2412MHz Ant1 Emission

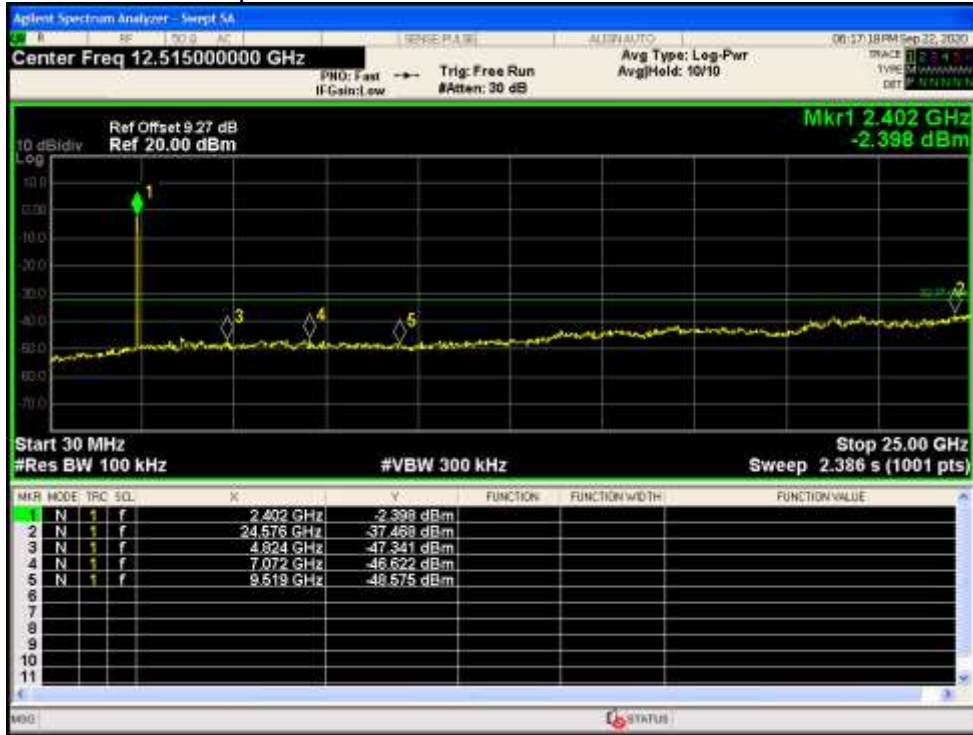


## Tx. Spurious NVNT b 2437MHz Ant1 Ref





## Tx. Spurious NVNT b 2437MHz Ant1 Emission

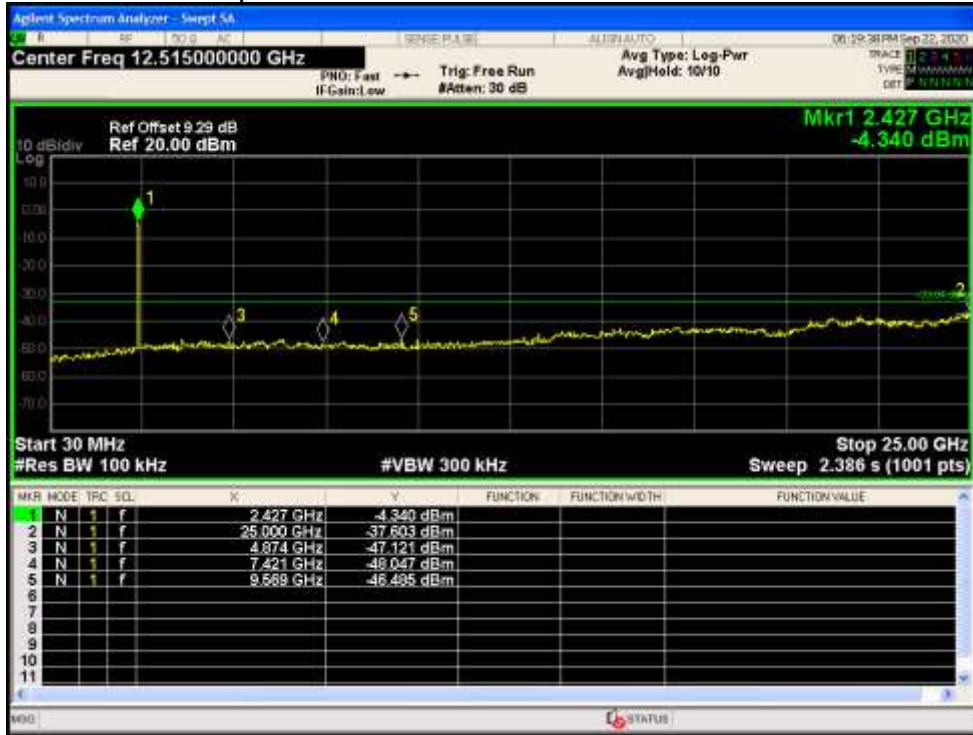


## Tx. Spurious NVNT b 2462MHz Ant1 Ref






### Tx. Spurious NVNT b 2462MHz Ant1 Emission

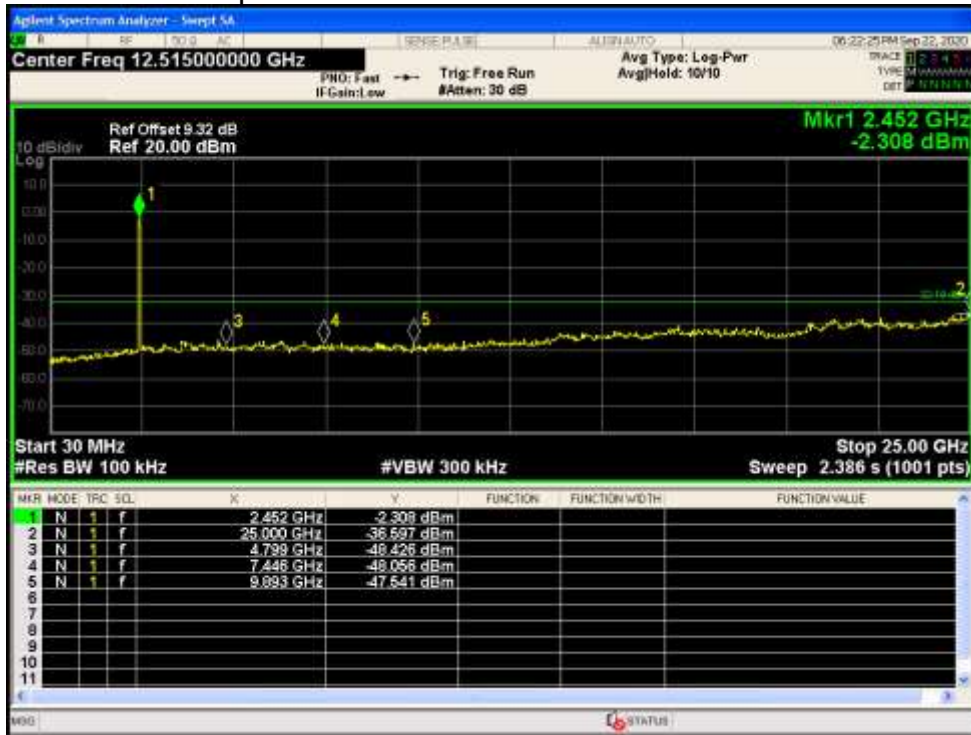

### Tx. Spurious NVNT g 2412MHz Ant1 Ref




## Tx. Spurious NVNT g 2412MHz Ant1 Emission

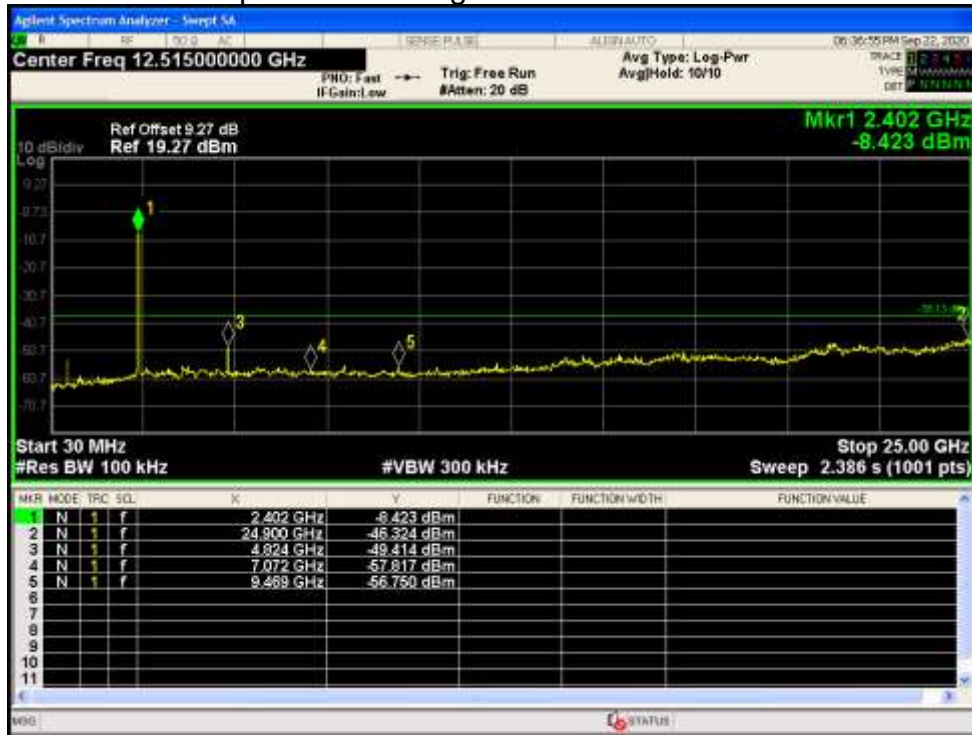

## Tx. Spurious NVNT g 2437MHz Ant1 Ref




## Tx. Spurious NVNT g 2437MHz Ant1 Emission

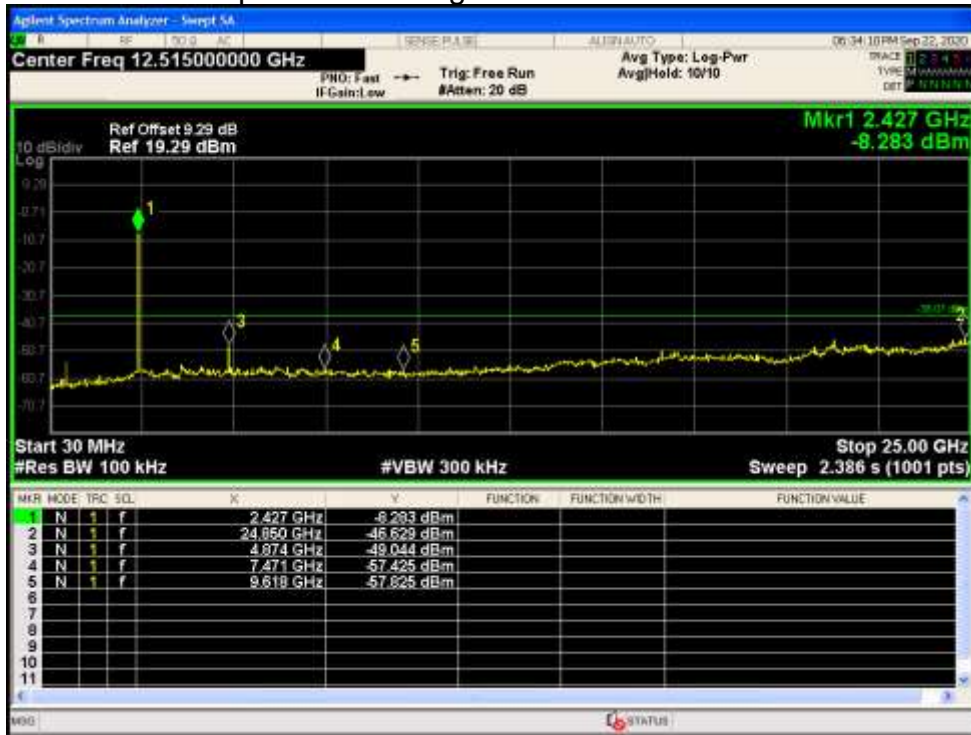


## Tx. Spurious NVNT g 2462MHz Ant1 Ref



### Tx. Spurious NVNT g 2462MHz Ant1 Emission

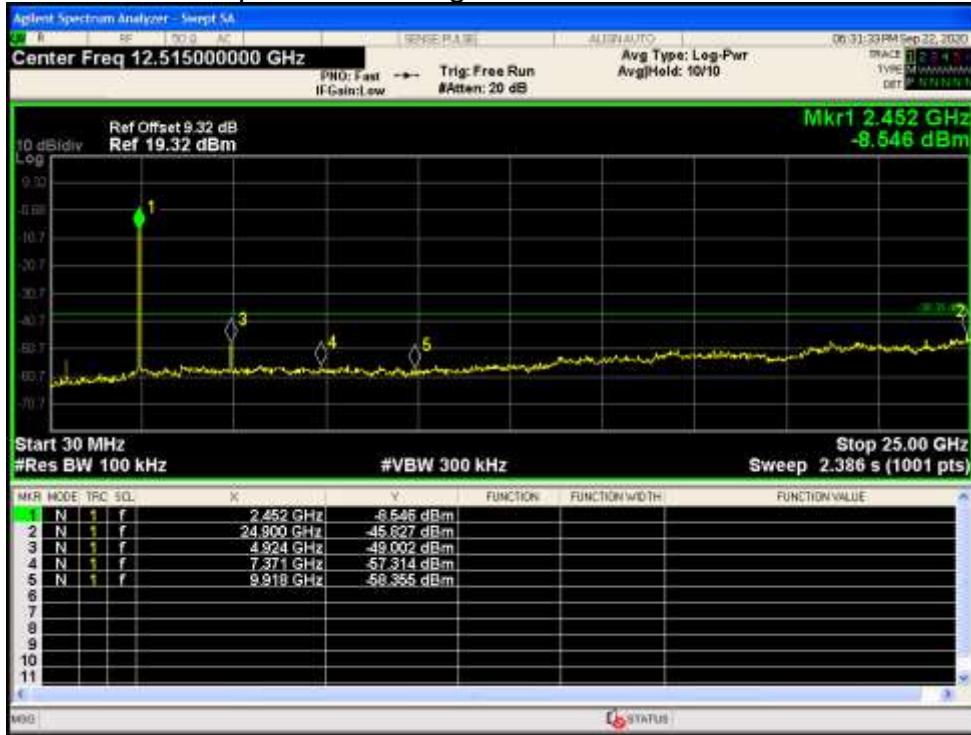


### Tx. Spurious NVNT n20 2412MHz Ant1 Ref

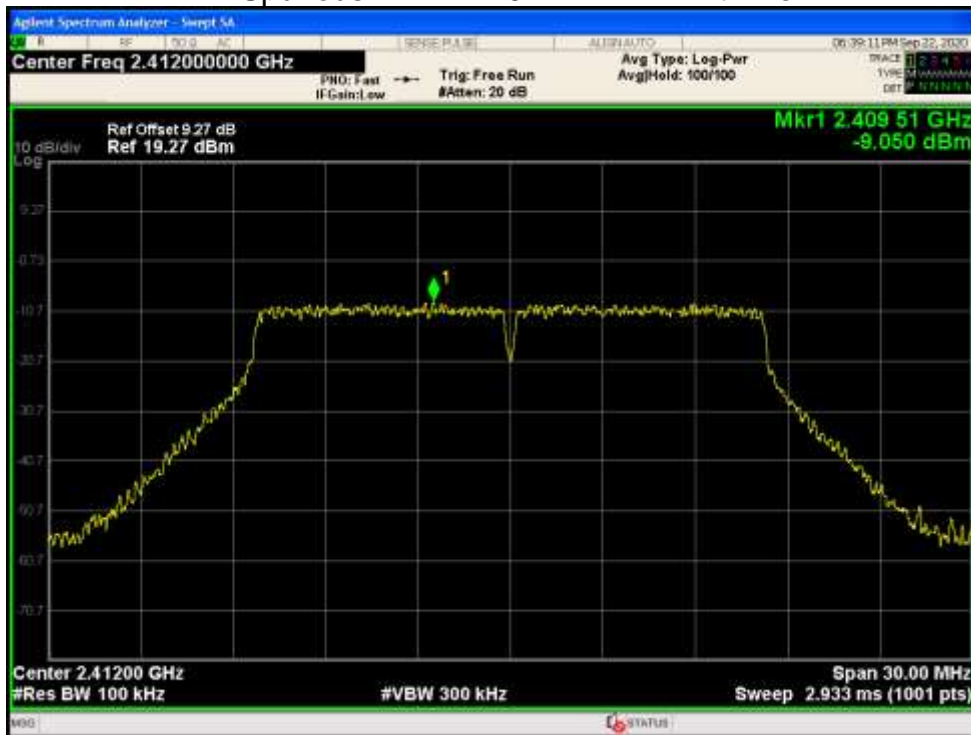




## Tx. Spurious NVNT n20 2412MHz Ant1 Emission

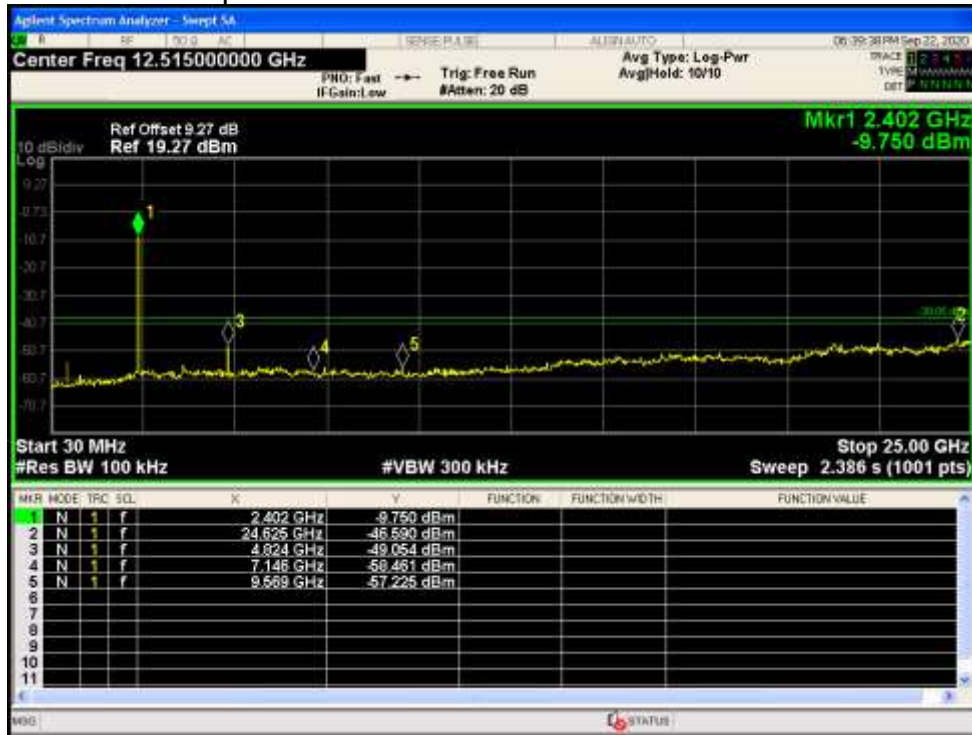

## Tx. Spurious NVNT n20 2437MHz Ant1 Ref



## Tx. Spurious NVNT n20 2437MHz Ant1 Emission

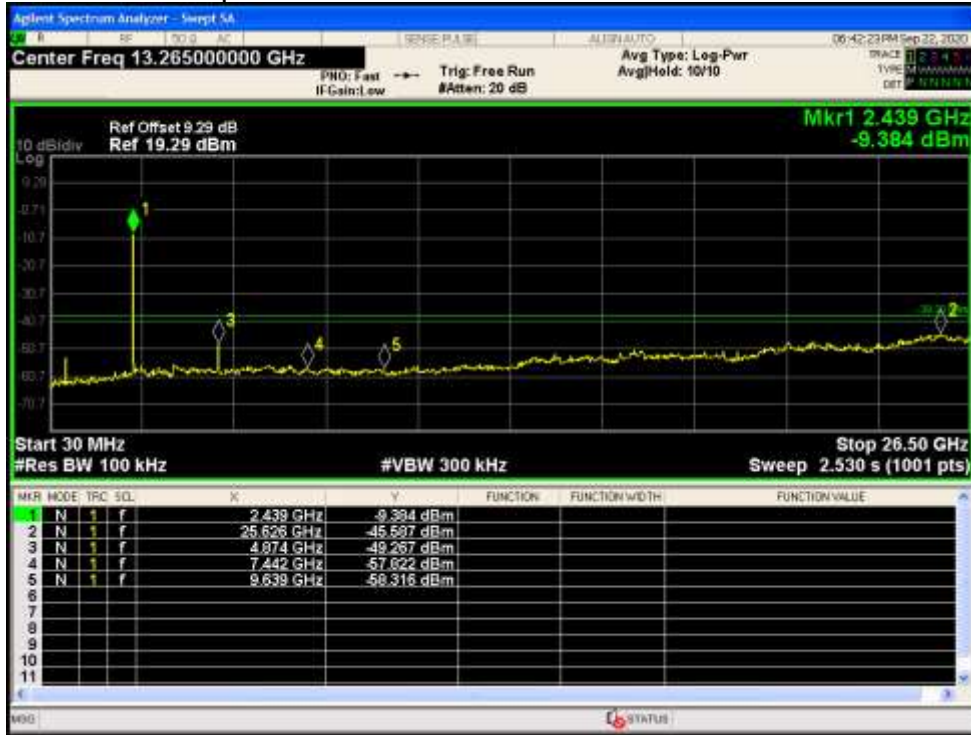


## Tx. Spurious NVNT n20 2462MHz Ant1 Ref






## Tx. Spurious NVNT n20 2462MHz Ant1 Emission

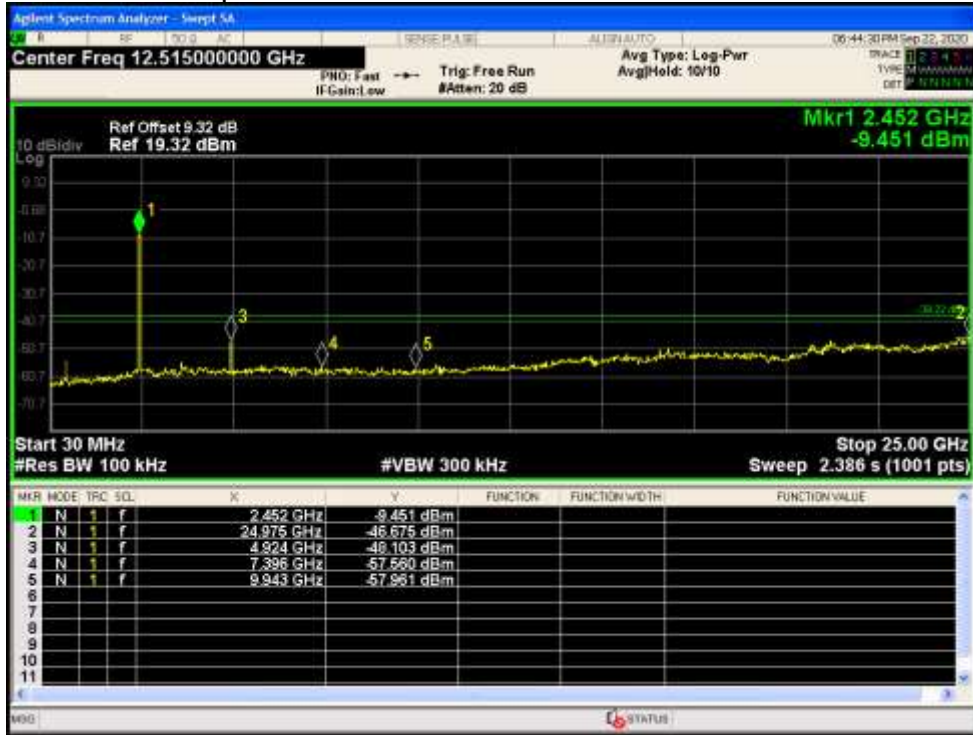

## Tx. Spurious NVNT n40 2422MHz Ant1 Ref




## Tx. Spurious NVNT n40 2422MHz Ant1 Emission

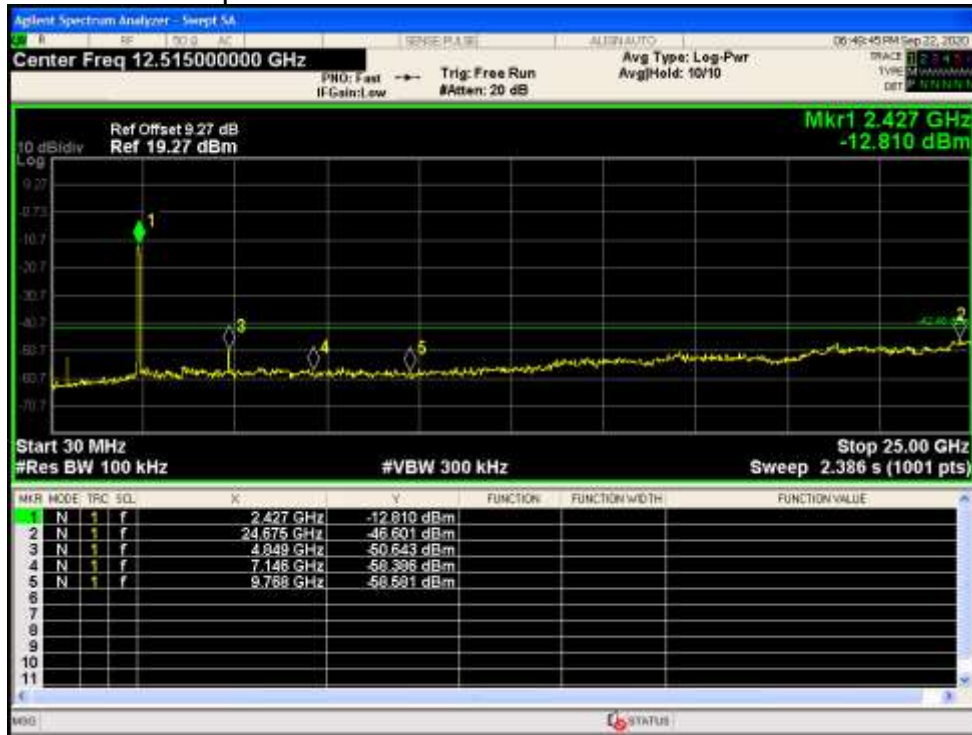

## Tx. Spurious NVNT n40 2437MHz Ant1 Ref




## Tx. Spurious NVNT n40 2437MHz Ant1 Emission

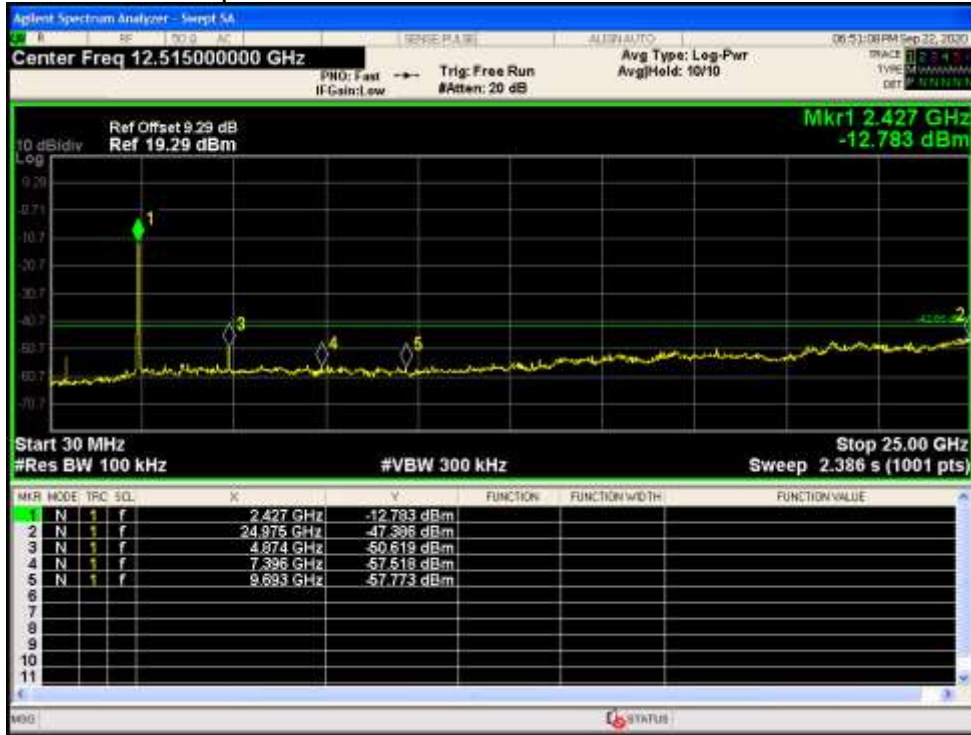

## Tx. Spurious NVNT n40 2452MHz Ant1 Ref



## Tx. Spurious NVNT n40 2452MHz Ant1 Emission

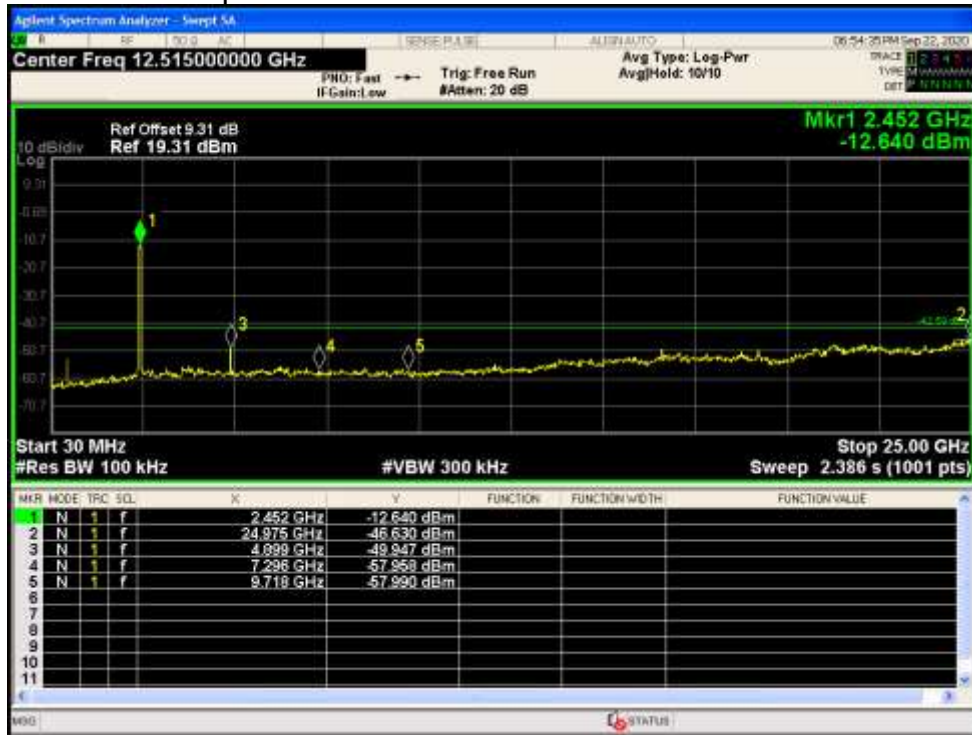

-----End of report-----