

TEST REPORT

Reference No...... : WTH21D08086492W001
FCC ID : 2A3WQ-FT06
Applicant..... : Shenzhen Fortune Culture Technology Co. , Ltd.
Address..... : 1301,Rujun building,105 Zhongxing Road, Bantian Street,
Longgang Shenzhen China
Manufacturer : The same as above
Address..... : The same as above
Product..... : Light curing printer
Model(s) : L6
Brand Name : N/A
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2021-11-30
Date of Test : 2021-11-30 to 2021-12-03
Date of Issue..... : 2021-12-03
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Levi Xiao

Levi Xiao / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Designated Reviewer

2 Contents

| | Page |
|--|-------------|
| 1 COVER PAGE..... | 1 |
| 2 CONTENTS | 2 |
| 3 REVISION HISTORY | 4 |
| 4 GENERAL INFORMATION..... | 5 |
| 4.1 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 4.2 DETAILS OF E.U.T. | 5 |
| 4.3 CHANNEL LIST | 6 |
| 4.4 TEST MODE | 7 |
| 5 TEST SUMMARY | 8 |
| 6 EQUIPMENT USED DURING TEST | 9 |
| 6.1 EQUIPMENTS LIST | 9 |
| 6.2 DESCRIPTION OF SUPPORT UNITS | 10 |
| 6.3 MEASUREMENT UNCERTAINTY | 10 |
| 6.4 TEST EQUIPMENT CALIBRATION | 10 |
| 7 CONDUCTED EMISSION | 11 |
| 7.1 E.U.T. OPERATION | 11 |
| 7.2 EUT SETUP..... | 11 |
| 7.3 MEASUREMENT DESCRIPTION | 12 |
| 7.4 CONDUCTED EMISSION TEST RESULT | 12 |
| 8 RADIATED EMISSIONS..... | 14 |
| 8.1 EUT OPERATION..... | 14 |
| 8.2 TEST SETUP | 15 |
| 8.3 SPECTRUM ANALYZER SETUP | 16 |
| 8.4 TEST PROCEDURE | 17 |
| 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION | 17 |
| 8.6 SUMMARY OF TEST RESULTS | 18 |
| 9 DUTY CYCLE..... | 31 |
| 10 CONDUCTED SPURIOUS EMISSIONS..... | 34 |
| 10.1 TEST PROCEDURE..... | 34 |
| 10.2 TEST RESULT | 35 |
| 11 BAND EDGE MEASUREMENT | 47 |
| 11.1 TEST PROCEDURE | 47 |
| 11.2 TEST RESULT | 48 |
| 12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT | 52 |
| 12.1 TEST PROCEDURE:..... | 52 |
| 12.2 TEST RESULT: | 52 |
| 13 MAXIMUM PEAK OUTPUT POWER | 65 |
| 13.1 TEST PROCEDURE:..... | 65 |
| 13.2 TEST RESULT: | 66 |
| 14 POWER SPECTRAL DENSITY | 73 |
| 14.1 TEST PROCEDURE:..... | 73 |
| 14.2 TEST RESULT: | 73 |
| 15 ANTENNA REQUIREMENT | 80 |
| 16 RF EXPOSURE..... | 81 |

17 PHOTOGRAPHS OF TEST SETUP AND EUT..... 82

3 Revision History

| Test report No. | Date of Receipt sample | Date of Test | Date of Issue | Purpose | Comment | Approved |
|------------------------|------------------------|--------------------------------|---------------|----------|---------|----------|
| WTH21D08086492 W001 | 2021-11-30 | 2021-11-30 to 2021-12-03 | 2021-12-03 | Original | - | Valid |

4 General Information

4.1 General Description of E.U.T.

| | |
|----------------------|------------------------------|
| Product: | Light curing printer |
| Model(s): | L6 |
| Model Description: | N/A |
| Wi-Fi Specification: | 2.4G-802.11b/g/n HT20/n HT40 |
| Note: | N/A |

4.2 Details of E.U.T.

| | |
|-----------------------|---|
| Operation Frequency: | WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz |
| Max. RF output power: | WiFi(2.4G): 13.81dBm |
| Type of Modulation: | WiFi: DSSS, OFDM |
| Antenna installation: | WiFi: internal permanent antenna |
| Antenna Gain: | WiFi(2.4G): 1.5dBi |
| Ratings: | Input: 24V===2.0A |
| Adapter Information: | Model:TDX48-2402000U Input: AC100-240V, 50/60Hz 2.0A Output: 24V===2.0A |

4.3 Channel List

WIFI

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 1 | 2412 | 2 | 2417 | 3 | 2422 | 4 | 2427 |
| 5 | 2432 | 6 | 2437 | 7 | 2442 | 8 | 2447 |
| 9 | 2452 | 10 | 2457 | 11 | 2462 | 12 | - |

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

| Test Items | Mode | Data Rate | Channel | TX/RX |
|--------------------------------|--------------|-----------|---------|-------|
| Maximum Peak Output Power | 802.11b | 11 Mbps | 1/6/11 | TX |
| | 802.11g | 54 Mbps | 1/6/11 | TX |
| | 802.11n HT20 | 108 Mbps | 1/6/11 | TX |
| | 802.11n HT40 | 150 Mbps | 3/6/9 | TX |
| Power Spectral Density | 802.11b | 11 Mbps | 1/6/11 | TX |
| | 802.11g | 54 Mbps | 1/6/11 | TX |
| | 802.11n HT20 | 108 Mbps | 1/6/11 | TX |
| | 802.11n HT40 | 150 Mbps | 3/6/9 | TX |
| 6dB Bandwidth | 802.11b | 11 Mbps | 1/6/11 | TX |
| | 802.11g | 54 Mbps | 1/6/11 | TX |
| | 802.11n HT20 | 108 Mbps | 1/6/11 | TX |
| | 802.11n HT40 | 150 Mbps | 3/6/9 | TX |
| Band Edge | 802.11b | 11 Mbps | 1/6/11 | TX |
| | 802.11g | 54 Mbps | 1/6/11 | TX |
| | 802.11n HT20 | 108 Mbps | 1/6/11 | TX |
| | 802.11n HT40 | 150 Mbps | 3/6/9 | TX |
| Transmitter Spurious Emissions | 802.11b | 11 Mbps | 1/6/11 | TX |
| | 802.11g | 54 Mbps | 1/6/11 | TX |
| | 802.11n HT20 | 108 Mbps | 1/6/11 | TX |
| | 802.11n HT40 | 150 Mbps | 3/6/9 | TX |

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5 Test Summary

| Test Items | Test Requirement | Result |
|---|-------------------------------------|--------|
| Radiated Spurious Emissions | 15.247(d) 15.205(a) 15.209(a) | PASS |
| Conducted Spurious Emissions | 15.247(d) | PASS |
| Conducted Emissions | 15.207(a) | PASS |
| 6dB Bandwidth | 15.247(a)(2) | PASS |
| Maximum Peak Output Power | 15.247(b)(3),(4) | PASS |
| Power Spectral Density | 15.247(e) | PASS |
| Band Edge | 15.247(d) | PASS |
| Antenna Requirement | 15.203 | PASS |
| Maximum Permissible Exposure (Exposure of Humans to RF Fields) | 1.1307(b)(1) | PASS |

6 Equipment Used during Test

6.1 Equipments List

| Conducted Emissions at Mains Terminals Disturbance Voltage (Conducted Emission) | | | | | | |
|---|----------------------------|----------------------|--------------|------------|-----------------------|----------------------|
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1 | EMI Test Receiver | R&S | ESCI | 100947 | 2021-07-26 | 2022-07-25 |
| 2 | LISN | R&S | ENV216 | 100115 | 2021-07-26 | 2022-07-25 |
| 3 | Cable | Top | TYPE16(3.5M) | - | 2021-07-26 | 2022-07-25 |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 1# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1 | Spectrum Analyzer | R&S | FSP30 | 100091 | 2021-04-26 | 2022-04-25 |
| 2 | Amplifier | Agilent | 8447D | 2944A10178 | 2021-07-26 | 2022-07-25 |
| 3 | Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 336 | 2021-08-23 | 2022-08-22 |
| 4 | Coaxial Cable (below 1GHz) | Top | TYPE16(13M) | - | 2021-04-26 | 2022-04-25 |
| 5 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9120 D | 667 | 2021-04-30 | 2022-04-29 |
| 6 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9170 | 335 | 2021-07-30 | 2022-07-29 |
| 7 | Broadband Preamplifier | COMPLIANCE DIRECTION | PAP-1G18 | 2004 | 2021-07-26 | 2022-07-25 |
| 8 | Coaxial Cable (above 1GHz) | ZT26-NJ-NJ-8M/FA | 1GHz-18GHz | NA | 2021-04-26 | 2022-04-25 |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 2# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No | Last Calibration Date | Calibration Due Date |
| 1 | Test Receiver | R&S | ESCI | 101296 | 2021-04-26 | 2022-04-25 |
| 2 | Trilog Broadband Antenna | SCHWARZBECK | VULB9160 | 9160-3325 | 2021-10-31 | 2022-10-29 |
| 3 | Active Loop Antenna | Com-Power Corp. | AL-130R | 10160007 | 2021-04-29 | 2022-04-28 |
| 4 | Amplifier | ANRITSU | MH648A | M43381 | 2021-04-26 | 2022-04-25 |
| 5 | Cable | HUBER+SUHNER | CBL2 | 525178 | 2021-04-26 | 2022-04-25 |
| RF Conducted Testing | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | EMC Analyzer (9k~26.5GHz) | Agilent | E7405A | MY45114943 | 2021-07-26 | 2022-07-25 |
| 2. | Spectrum Analyzer | R&S | FSP30 | 100091 | 2021-07-26 | 2022-07-25 |
| 3. | EXA Signal Analyzer | Malaysia Keysight | N9010A | MY50520207 | 2021-07-26 | 2022-07-25 |

6.2 Description of Support Units

| Equipment | Manufacturer | Model No. | Series No. |
|-----------|--------------|-----------|------------|
| / | / | / | / |

6.3 Measurement Uncertainty

| Parameter | Uncertainty |
|-----------------------------------|---|
| Radio Frequency | $\pm 1 \times 10^{-6}$ |
| RF Power | ± 1.0 dB |
| RF Power Density | ± 2.2 dB |
| Radiated Spurious Emissions test | ± 5.03 dB (Bilog antenna 30M~1000MHz) |
| | ± 5.47 dB (Horn antenna 1000M~25000MHz) |
| Conducted Emissions test | ± 3.64 dB (AC mains 150KHz~30MHz) |
| Conducted Spurious Emissions test | ± 3.12 dB (9kHz~30MHz) |
| | ± 4.21 dB (30M~1000MHz) |
| | ± 5.14 dB (1000M~26500MHz) |

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

| Frequency (MHz) | Conducted Limit (dB μ V) | |
|-----------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.5 | 66 to 56* | 56 to 46* |
| 0.5 to 5.0 | 56 | 46 |
| 5.0 to 30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.4 °C

Humidity: 53.7 % RH

Atmospheric Pressure: 101.8kPa


Test Voltage: AC 120V, 60Hz

EUT Operation:

The test was performed in Transmitting mode, the worst test data (802.11b High channel) were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

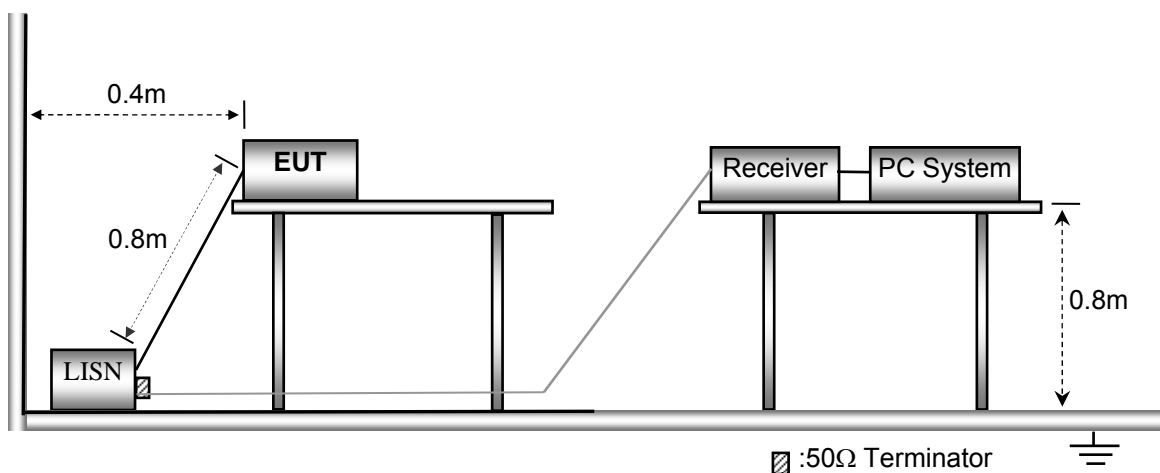


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

Live line:

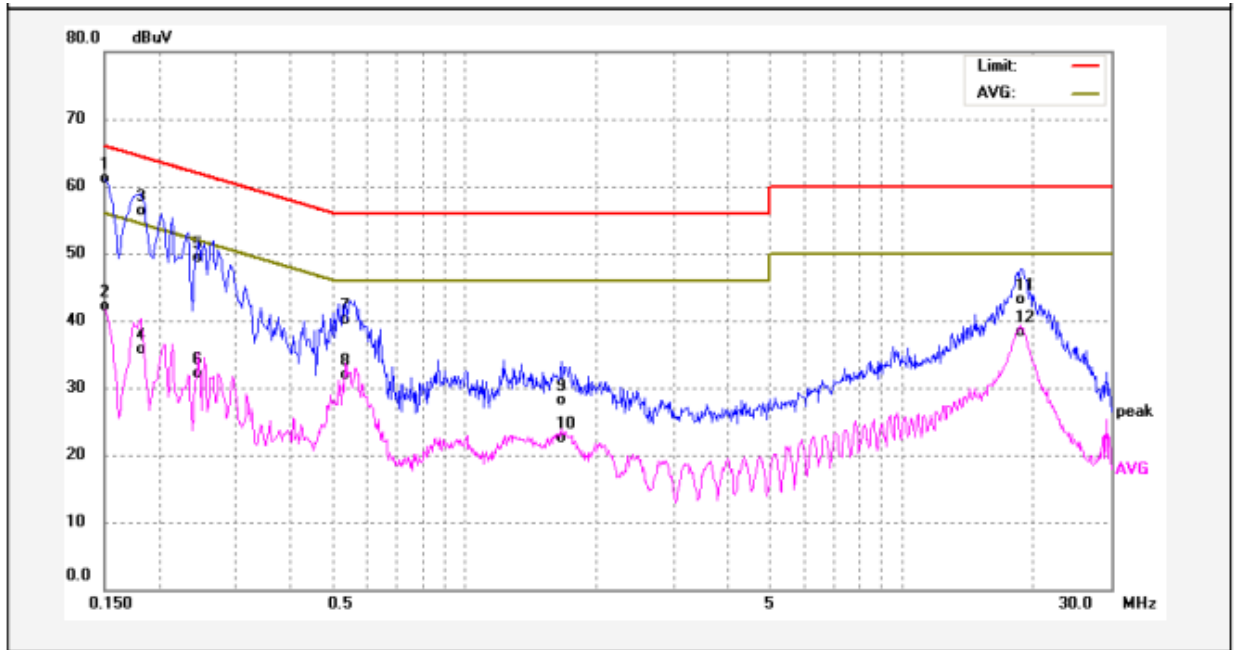

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1 | 0.1500 | 51.20 | 9.94 | 61.14 | 65.99 | -4.85 | QP | |
| 2 | 0.1500 | 32.17 | 9.94 | 42.11 | 55.99 | -13.88 | AVG | |
| 3 | 0.1819 | 46.43 | 9.90 | 56.33 | 64.39 | -8.06 | QP | |
| 4 | 0.1819 | 25.77 | 9.90 | 35.67 | 54.39 | -18.72 | AVG | |
| 5 | 0.2460 | 39.43 | 9.88 | 49.31 | 61.89 | -12.58 | QP | |
| 6 | 0.2460 | 22.26 | 9.88 | 32.14 | 51.89 | -19.75 | AVG | |
| 7 | 0.5340 | 30.21 | 9.89 | 40.10 | 56.00 | -15.90 | QP | |
| 8 | 0.5340 | 21.93 | 9.89 | 31.82 | 46.00 | -14.18 | AVG | |
| 9 | 1.6660 | 18.25 | 9.91 | 28.16 | 56.00 | -27.84 | QP | |
| 10 | 1.6660 | 12.65 | 9.91 | 22.56 | 46.00 | -23.44 | AVG | |
| 11 | 18.6940 | 32.38 | 10.82 | 43.20 | 60.00 | -16.80 | QP | |
| 12 | 18.6940 | 27.49 | 10.82 | 38.31 | 50.00 | -11.69 | AVG | |

Neutral line:

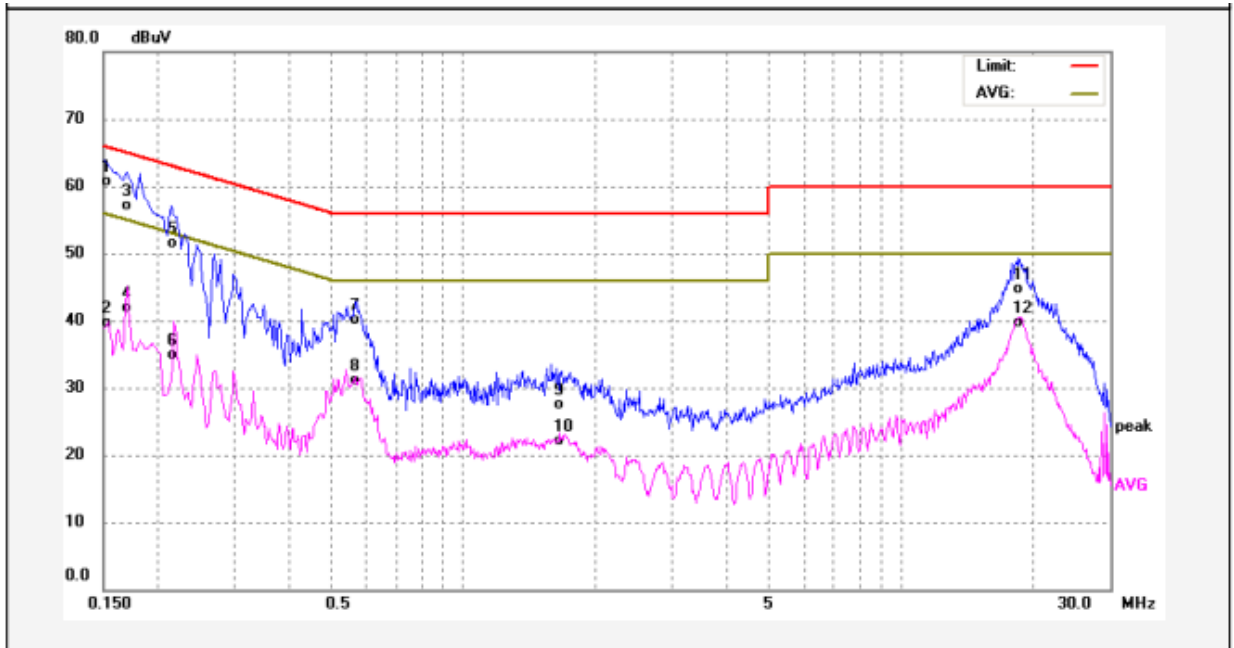

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-------------|----------|--------|
| 1 | 0.1500 | 50.77 | 10.02 | 60.79 | 65.99 | -5.20 | QP | |
| 2 | 0.1500 | 29.62 | 10.02 | 39.64 | 55.99 | -16.35 | AVG | |
| 3 | 0.1700 | 47.21 | 9.99 | 57.20 | 64.96 | -7.76 | QP | |
| 4 | 0.1700 | 31.89 | 9.99 | 41.88 | 54.96 | -13.08 | AVG | |
| 5 | 0.2180 | 41.60 | 9.96 | 51.56 | 62.89 | -11.33 | QP | |
| 6 | 0.2180 | 25.03 | 9.96 | 34.99 | 52.89 | -17.90 | AVG | |
| 7 | 0.5700 | 30.10 | 9.96 | 40.06 | 56.00 | -15.94 | QP | |
| 8 | 0.5700 | 21.12 | 9.96 | 31.08 | 46.00 | -14.92 | AVG | |
| 9 | 1.6540 | 17.47 | 10.00 | 27.47 | 56.00 | -28.53 | QP | |
| 10 | 1.6540 | 12.01 | 10.00 | 22.01 | 46.00 | -23.99 | AVG | |
| 11 | 18.4980 | 33.31 | 11.30 | 44.61 | 60.00 | -15.39 | QP | |
| 12 | 18.4980 | 28.36 | 11.30 | 39.66 | 50.00 | -10.34 | AVG | |

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency (MHz) | Field Strength | | Field Strength Limit at 3m Measurement Dist | |
|--------------------|----------------|-----------------|---|--------------------------------------|
| | uV/m | Distance (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 | 10000 * 2400/F(kHz) | 20log ^{(2400/F(kHz))} + 80 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 | 100 * 24000/F(kHz) | 20log ^{(24000/F(kHz))} + 40 |
| 1.705 ~ 30 | 30 | 30 | 100 * 30 | 20log ⁽³⁰⁾ + 40 |
| 30 ~ 88 | 100 | 3 | 100 | 20log ⁽¹⁰⁰⁾ |
| 88 ~ 216 | 150 | 3 | 150 | 20log ⁽¹⁵⁰⁾ |
| 216 ~ 960 | 200 | 3 | 200 | 20log ⁽²⁰⁰⁾ |
| Above 960 | 500 | 3 | 500 | 20log ⁽⁵⁰⁰⁾ |

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

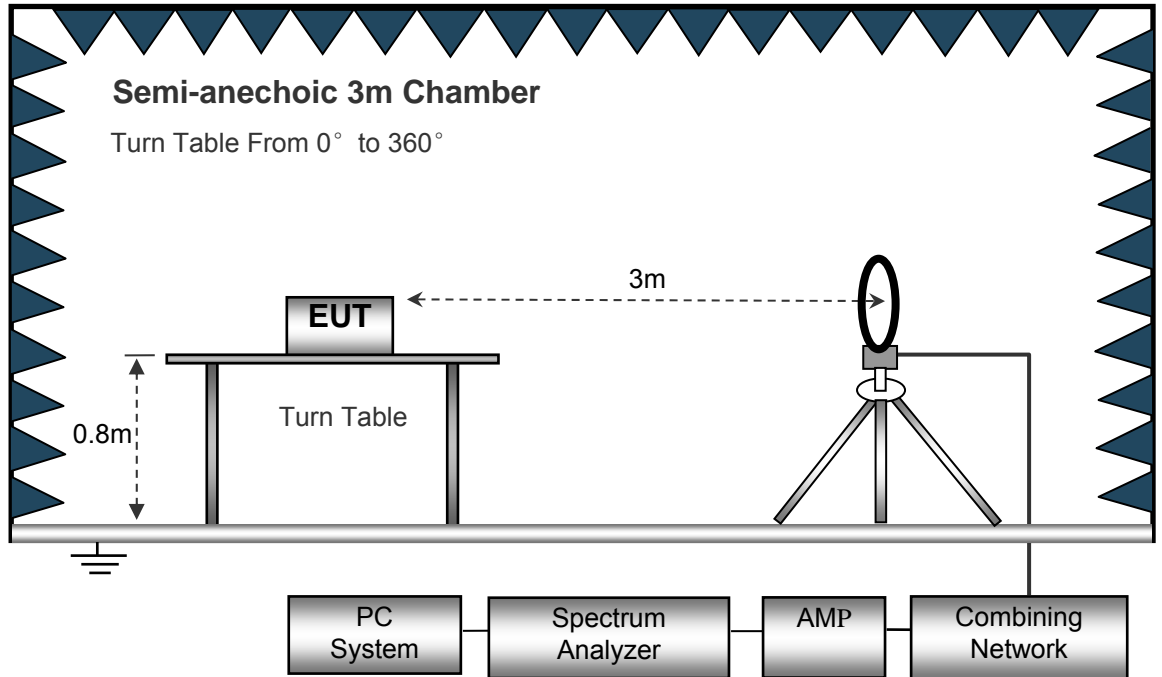

The test setup for emission measurement from 30 MHz to 1 GHz.

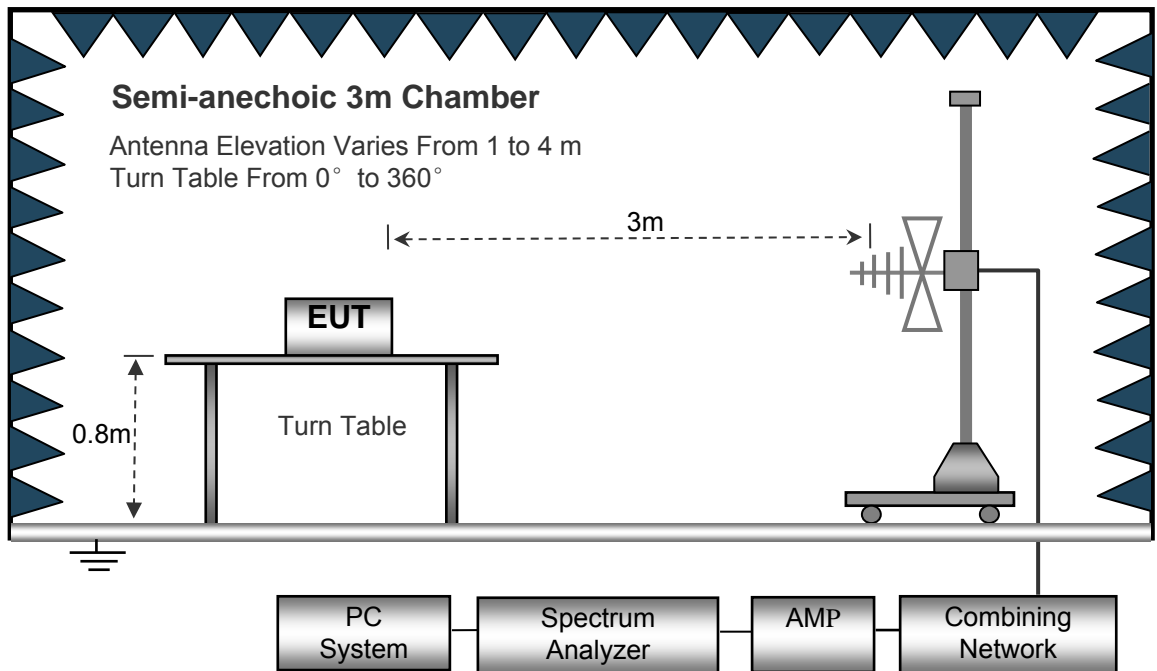

The test setup for emission measurement above 1 GHz.

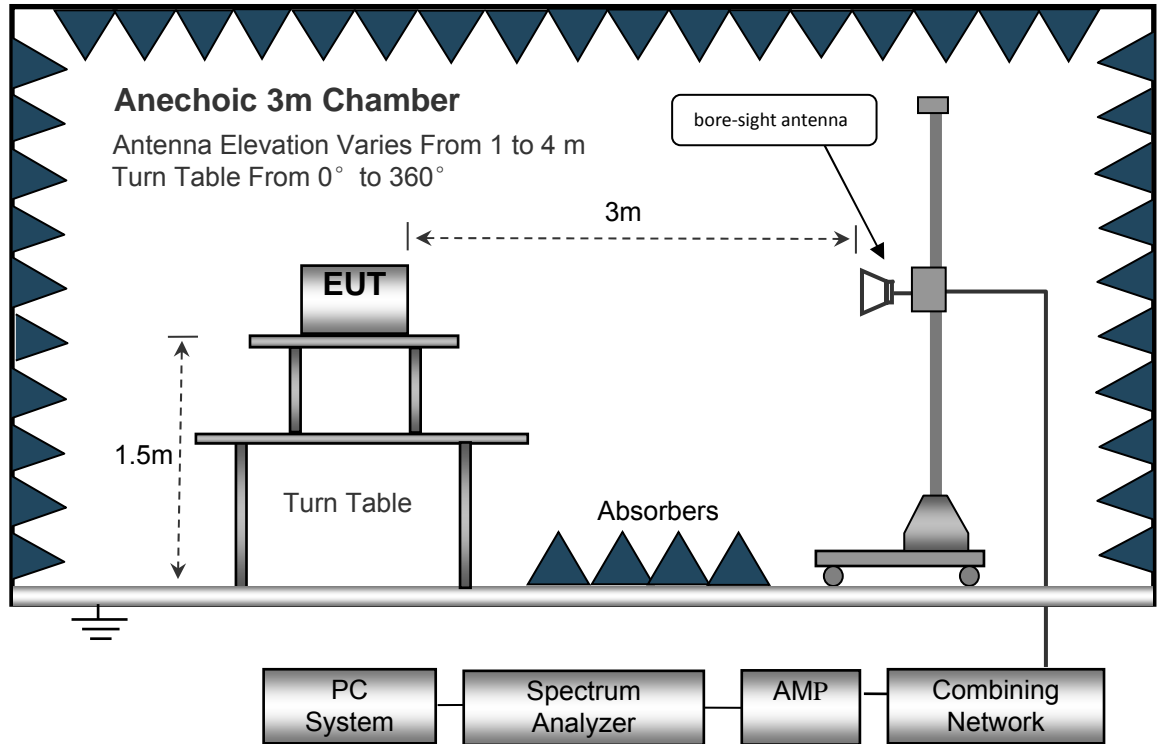

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Wifi:

Test Frequency: 9KHz~30MHz

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

| Frequency | Measurement results dB μ V @3m | Detector PK/QP | Correct factor dB/m | Extrapolation factor dB | Measurement results (calculated) dB μ V/m @30m | Limits dB μ V/m @30m | Margin dB |
|---------------|------------------------------------|----------------|---------------------|-------------------------|--|--------------------------|-----------|
| (MHz) | Measurement results | Detector | Correct factor | Extrapolation factor | Measurement results (calculated) | Limits | Margin |
| 802.11b | | | | | | | |
| 6.054 | 25.47 | QP | 21.84 | 40.00 | 7.31 | 29.54 | -22.23 |
| 15.140 | 24.36 | QP | 21.35 | 40.00 | 5.71 | 29.54 | -23.83 |
| 25.589 | 25.14 | QP | 20.67 | 40.00 | 5.81 | 29.54 | -23.73 |
| 802.11g | | | | | | | |
| 6.054 | 25.14 | QP | 21.84 | 40.00 | 6.98 | 29.54 | -22.56 |
| 15.640 | 25.85 | QP | 21.35 | 40.00 | 7.20 | 29.54 | -22.34 |
| 25.264 | 24.02 | QP | 20.67 | 40.00 | 4.69 | 29.54 | -24.85 |
| 802.11n(HT20) | | | | | | | |
| 6.054 | 24.32 | QP | 21.84 | 40.00 | 6.16 | 29.54 | -23.39 |
| 15.548 | 24.58 | QP | 21.35 | 40.00 | 5.93 | 29.54 | -23.61 |
| 25.147 | 25.36 | QP | 20.67 | 40.00 | 6.03 | 29.54 | -23.51 |
| 802.11n(HT40) | | | | | | | |
| 6.158 | 25.41 | QP | 21.84 | 40.00 | 7.25 | 29.54 | -22.29 |
| 15.476 | 25.14 | QP | 21.35 | 40.00 | 6.49 | 29.54 | -23.05 |
| 25.670 | 24.53 | QP | 20.67 | 40.00 | 5.20 | 29.54 | -24.34 |

Test Frequency : 30MHz ~ 8GHz

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|--------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11b: Low Channel 2412MHz | | | | | | | | | |
| 223.72 | 37.52 | QP | 126 | 1.5 | H | -11.62 | 25.90 | 46.00 | -20.10 |
| 223.72 | 31.14 | QP | 358 | 1.9 | V | -11.62 | 19.52 | 46.00 | -26.48 |
| 4824.00 | 50.89 | PK | 123 | 1.9 | V | -1.06 | 49.83 | 74.00 | -24.17 |
| 4824.00 | 48.17 | Ave | 123 | 1.9 | V | -1.06 | 47.11 | 54.00 | -6.89 |
| 7236.00 | 48.12 | PK | 263 | 1.2 | H | 1.33 | 49.45 | 74.00 | -24.55 |
| 7236.00 | 42.44 | Ave | 263 | 1.2 | H | 1.33 | 43.77 | 54.00 | -10.23 |
| 2313.59 | 46.69 | PK | 42 | 1.1 | V | -13.19 | 33.50 | 74.00 | -40.50 |
| 2313.59 | 39.14 | Ave | 42 | 1.1 | V | -13.19 | 25.95 | 54.00 | -28.05 |
| 2355.45 | 44.94 | PK | 2 | 1.6 | H | -13.14 | 31.80 | 74.00 | -42.20 |
| 2355.45 | 38.75 | Ave | 2 | 1.6 | H | -13.14 | 25.61 | 54.00 | -28.39 |
| 2488.40 | 43.34 | PK | 306 | 1.6 | V | -13.08 | 30.26 | 74.00 | -43.74 |
| 2488.40 | 36.12 | Ave | 306 | 1.6 | V | -13.08 | 23.04 | 54.00 | -30.96 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11b: Middle Channel 2437MHz | | | | | | | | | |
| 223.72 | 36.13 | QP | 313 | 1.3 | H | -11.62 | 24.51 | 46.00 | -21.49 |
| 223.72 | 32.57 | QP | 86 | 1.2 | V | -11.62 | 20.95 | 46.00 | -25.05 |
| 4874.00 | 50.91 | PK | 210 | 1.8 | V | -0.62 | 50.29 | 74.00 | -23.71 |
| 4874.00 | 48.01 | Ave | 210 | 1.8 | V | -0.62 | 47.39 | 54.00 | -6.61 |
| 7311.00 | 47.65 | PK | 86 | 1.6 | H | 2.21 | 49.86 | 74.00 | -24.14 |
| 7311.00 | 41.07 | Ave | 86 | 1.6 | H | 2.21 | 43.28 | 54.00 | -10.72 |
| 2340.49 | 45.14 | PK | 40 | 1.0 | V | -13.19 | 31.95 | 74.00 | -42.05 |
| 2340.49 | 37.53 | Ave | 40 | 1.0 | V | -13.19 | 24.34 | 54.00 | -29.66 |
| 2369.49 | 43.27 | PK | 346 | 1.3 | H | -13.14 | 30.13 | 74.00 | -43.87 |
| 2369.49 | 36.02 | Ave | 346 | 1.3 | H | -13.14 | 22.88 | 54.00 | -31.12 |
| 2498.11 | 42.52 | PK | 239 | 1.7 | V | -13.08 | 29.44 | 74.00 | -44.56 |
| 2498.11 | 37.79 | Ave | 239 | 1.7 | V | -13.08 | 24.71 | 54.00 | -29.29 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|---------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11b: High Channel 2462MHz | | | | | | | | | |
| 223.72 | 36.60 | QP | 148 | 1.8 | H | -11.62 | 24.98 | 46.00 | -21.02 |
| 223.72 | 33.53 | QP | 248 | 1.5 | V | -11.62 | 21.91 | 46.00 | -24.09 |
| 4924.00 | 49.55 | PK | 207 | 1.9 | V | -0.24 | 49.31 | 74.00 | -24.69 |
| 4924.00 | 48.62 | Ave | 207 | 1.9 | V | -0.24 | 48.38 | 54.00 | -5.62 |
| 7386.00 | 48.60 | PK | 56 | 1.6 | H | 2.84 | 51.44 | 74.00 | -22.56 |
| 7386.00 | 39.83 | Ave | 56 | 1.6 | H | 2.84 | 42.67 | 54.00 | -11.33 |
| 2349.18 | 45.52 | PK | 311 | 1.1 | V | -13.19 | 32.33 | 74.00 | -41.67 |
| 2349.18 | 37.79 | Ave | 311 | 1.1 | V | -13.19 | 24.60 | 54.00 | -29.40 |
| 2363.92 | 42.96 | PK | 68 | 1.6 | H | -13.14 | 29.82 | 74.00 | -44.18 |
| 2363.92 | 37.34 | Ave | 68 | 1.6 | H | -13.14 | 24.20 | 54.00 | -29.80 |
| 2498.73 | 42.38 | PK | 59 | 1.2 | V | -13.08 | 29.30 | 74.00 | -44.70 |
| 2498.73 | 36.09 | Ave | 59 | 1.2 | V | -13.08 | 23.01 | 54.00 | -30.99 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|--------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11g: Low Channel 2412MHz | | | | | | | | | |
| 223.72 | 37.99 | QP | 19 | 1.7 | H | -11.62 | 26.37 | 46.00 | -19.63 |
| 223.72 | 32.07 | QP | 145 | 2.0 | V | -11.62 | 20.45 | 46.00 | -25.55 |
| 4824.00 | 50.71 | PK | 90 | 2.0 | V | -1.06 | 49.65 | 74.00 | -24.35 |
| 4824.00 | 48.81 | Ave | 90 | 2.0 | V | -1.06 | 47.75 | 54.00 | -6.25 |
| 7236.00 | 50.08 | PK | 46 | 1.3 | H | 1.33 | 51.41 | 74.00 | -22.59 |
| 7236.00 | 38.89 | Ave | 46 | 1.3 | H | 1.33 | 40.22 | 54.00 | -13.78 |
| 2338.09 | 46.33 | PK | 179 | 1.1 | V | -13.19 | 33.14 | 74.00 | -40.86 |
| 2338.09 | 39.68 | Ave | 179 | 1.1 | V | -13.19 | 26.49 | 54.00 | -27.51 |
| 2389.98 | 42.04 | PK | 64 | 1.6 | H | -13.14 | 28.90 | 74.00 | -45.10 |
| 2389.98 | 36.12 | Ave | 64 | 1.6 | H | -13.14 | 22.98 | 54.00 | -31.02 |
| 2487.65 | 44.32 | PK | 128 | 1.1 | V | -13.08 | 31.24 | 74.00 | -42.76 |
| 2487.65 | 37.75 | Ave | 128 | 1.1 | V | -13.08 | 24.67 | 54.00 | -29.33 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11g: Middle Channel 2437MHz | | | | | | | | | |
| 223.72 | 37.55 | QP | 231 | 1.5 | H | -11.62 | 25.93 | 46.00 | -20.07 |
| 223.72 | 31.79 | QP | 59 | 1.4 | V | -11.62 | 20.17 | 46.00 | -25.83 |
| 4874.00 | 49.60 | PK | 146 | 1.1 | V | -0.62 | 48.98 | 74.00 | -25.02 |
| 4874.00 | 50.22 | Ave | 146 | 1.1 | V | -0.62 | 49.60 | 54.00 | -4.40 |
| 7311.00 | 50.63 | PK | 265 | 1.4 | H | 2.21 | 52.84 | 74.00 | -21.16 |
| 7311.00 | 38.19 | Ave | 265 | 1.4 | H | 2.21 | 40.40 | 54.00 | -13.60 |
| 2320.69 | 46.33 | PK | 294 | 1.4 | V | -13.19 | 33.14 | 74.00 | -40.86 |
| 2320.69 | 38.10 | Ave | 294 | 1.4 | V | -13.19 | 24.91 | 54.00 | -29.09 |
| 2357.79 | 42.58 | PK | 259 | 1.4 | H | -13.14 | 29.44 | 74.00 | -44.56 |
| 2357.79 | 38.64 | Ave | 259 | 1.4 | H | -13.14 | 25.50 | 54.00 | -28.50 |
| 2496.19 | 44.91 | PK | 56 | 1.3 | V | -13.08 | 31.83 | 74.00 | -42.17 |
| 2496.19 | 37.46 | Ave | 56 | 1.3 | V | -13.08 | 24.38 | 54.00 | -29.62 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|---------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11g: High Channel 2462MHz | | | | | | | | | |
| 223.72 | 36.52 | QP | 359 | 1.9 | H | -11.62 | 24.90 | 46.00 | -21.10 |
| 223.72 | 31.11 | QP | 250 | 1.0 | V | -11.62 | 19.49 | 46.00 | -26.51 |
| 4924.00 | 49.26 | PK | 203 | 1.4 | V | -0.24 | 49.02 | 74.00 | -24.98 |
| 4924.00 | 50.36 | Ave | 203 | 1.4 | V | -0.24 | 50.12 | 54.00 | -3.88 |
| 7386.00 | 50.34 | PK | 22 | 1.5 | H | 2.84 | 53.18 | 74.00 | -20.82 |
| 7386.00 | 39.06 | Ave | 22 | 1.5 | H | 2.84 | 41.90 | 54.00 | -12.10 |
| 2314.57 | 46.10 | PK | 62 | 1.5 | V | -13.19 | 32.91 | 74.00 | -41.09 |
| 2314.57 | 38.05 | Ave | 62 | 1.5 | V | -13.19 | 24.86 | 54.00 | -29.14 |
| 2360.85 | 42.43 | PK | 83 | 1.4 | H | -13.14 | 29.29 | 74.00 | -44.71 |
| 2360.85 | 36.23 | Ave | 83 | 1.4 | H | -13.14 | 23.09 | 54.00 | -30.91 |
| 2497.98 | 42.28 | PK | 64 | 1.7 | V | -13.08 | 29.20 | 74.00 | -44.80 |
| 2497.98 | 36.97 | Ave | 64 | 1.7 | V | -13.08 | 23.89 | 54.00 | -30.11 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11n20: Low Channel 2412MHz | | | | | | | | | |
| 223.72 | 35.22 | QP | 155 | 1.1 | H | -11.62 | 23.60 | 46.00 | -22.40 |
| 223.72 | 32.53 | QP | 50 | 1.5 | V | -11.62 | 20.91 | 46.00 | -25.09 |
| 4824.00 | 48.08 | PK | 305 | 1.9 | V | -1.06 | 47.02 | 74.00 | -26.98 |
| 4824.00 | 51.35 | Ave | 305 | 1.9 | V | -1.06 | 50.29 | 54.00 | -3.71 |
| 7236.00 | 49.31 | PK | 325 | 1.7 | H | 1.33 | 50.64 | 74.00 | -23.36 |
| 7236.00 | 39.51 | Ave | 325 | 1.7 | H | 1.33 | 40.84 | 54.00 | -13.16 |
| 2318.48 | 46.39 | PK | 47 | 1.5 | V | -13.19 | 33.20 | 74.00 | -40.80 |
| 2318.48 | 39.10 | Ave | 47 | 1.5 | V | -13.19 | 25.91 | 54.00 | -28.09 |
| 2374.78 | 42.05 | PK | 143 | 1.0 | H | -13.14 | 28.91 | 74.00 | -45.09 |
| 2374.78 | 38.67 | Ave | 143 | 1.0 | H | -13.14 | 25.53 | 54.00 | -28.47 |
| 2483.60 | 43.01 | PK | 191 | 1.9 | V | -13.08 | 29.93 | 74.00 | -44.07 |
| 2483.60 | 38.09 | Ave | 191 | 1.9 | V | -13.08 | 25.01 | 54.00 | -28.99 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11n20: Middle Channel 2437MHz | | | | | | | | | |
| 223.72 | 34.50 | QP | 48 | 1.7 | H | -11.62 | 22.88 | 46.00 | -23.12 |
| 223.72 | 32.03 | QP | 196 | 2.0 | V | -11.62 | 20.41 | 46.00 | -25.59 |
| 4874.00 | 47.91 | PK | 311 | 1.0 | V | -0.62 | 47.29 | 74.00 | -26.71 |
| 4874.00 | 51.47 | Ave | 311 | 1.0 | V | -0.62 | 50.85 | 54.00 | -3.15 |
| 7311.00 | 49.38 | PK | 190 | 1.3 | H | 2.21 | 51.59 | 74.00 | -22.41 |
| 7311.00 | 38.89 | Ave | 190 | 1.3 | H | 2.21 | 41.10 | 54.00 | -12.90 |
| 2317.38 | 46.14 | PK | 188 | 1.3 | V | -13.19 | 32.95 | 74.00 | -41.05 |
| 2317.38 | 37.24 | Ave | 188 | 1.3 | V | -13.19 | 24.05 | 54.00 | -29.95 |
| 2370.47 | 42.20 | PK | 304 | 1.0 | H | -13.14 | 29.06 | 74.00 | -44.94 |
| 2370.47 | 38.91 | Ave | 304 | 1.0 | H | -13.14 | 25.77 | 54.00 | -28.23 |
| 2499.94 | 44.20 | PK | 146 | 1.3 | V | -13.08 | 31.12 | 74.00 | -42.88 |
| 2499.94 | 38.51 | Ave | 146 | 1.3 | V | -13.08 | 25.43 | 54.00 | -28.57 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11n20: High Channel 2462MHz | | | | | | | | | |
| 223.72 | 33.93 | QP | 336 | 1.7 | H | -11.62 | 22.31 | 46.00 | -23.69 |
| 223.72 | 32.56 | QP | 37 | 1.4 | V | -11.62 | 20.94 | 46.00 | -25.06 |
| 4924.00 | 46.99 | PK | 278 | 1.2 | V | -0.24 | 46.75 | 74.00 | -27.25 |
| 4924.00 | 52.66 | Ave | 278 | 1.2 | V | -0.24 | 52.42 | 54.00 | -1.58 |
| 7386.00 | 50.54 | PK | 305 | 1.8 | H | 2.84 | 53.38 | 74.00 | -20.62 |
| 7386.00 | 38.09 | Ave | 305 | 1.8 | H | 2.84 | 40.93 | 54.00 | -13.07 |
| 2328.21 | 45.40 | PK | 181 | 1.4 | V | -13.19 | 32.21 | 74.00 | -41.79 |
| 2328.21 | 37.63 | Ave | 181 | 1.4 | V | -13.19 | 24.44 | 54.00 | -29.56 |
| 2373.98 | 44.03 | PK | 331 | 1.1 | H | -13.14 | 30.89 | 74.00 | -43.11 |
| 2373.98 | 36.90 | Ave | 331 | 1.1 | H | -13.14 | 23.76 | 54.00 | -30.24 |
| 2485.54 | 42.48 | PK | 322 | 1.7 | V | -13.08 | 29.40 | 74.00 | -44.60 |
| 2485.54 | 38.61 | Ave | 322 | 1.7 | V | -13.08 | 25.53 | 54.00 | -28.47 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11n40: Low Channel 2422MHz | | | | | | | | | |
| 223.72 | 34.38 | QP | 331 | 1.3 | H | -11.62 | 22.76 | 46.00 | -23.24 |
| 223.72 | 31.47 | QP | 99 | 1.7 | V | -11.62 | 19.85 | 46.00 | -26.15 |
| 4844.00 | 45.90 | PK | 64 | 1.0 | V | -1.06 | 44.84 | 74.00 | -29.16 |
| 4844.00 | 51.63 | Ave | 64 | 1.0 | V | -1.06 | 50.57 | 54.00 | -3.43 |
| 7266.00 | 48.22 | PK | 72 | 1.8 | H | 1.33 | 49.55 | 74.00 | -24.45 |
| 7266.00 | 35.59 | Ave | 72 | 1.8 | H | 1.33 | 36.92 | 54.00 | -17.08 |
| 2310.79 | 45.22 | PK | 144 | 1.2 | V | -13.19 | 32.03 | 74.00 | -41.97 |
| 2310.79 | 38.76 | Ave | 144 | 1.2 | V | -13.19 | 25.57 | 54.00 | -28.43 |
| 2381.75 | 44.98 | PK | 353 | 1.1 | H | -13.14 | 31.84 | 74.00 | -42.16 |
| 2381.75 | 38.84 | Ave | 353 | 1.1 | H | -13.14 | 25.70 | 54.00 | -28.30 |
| 2488.09 | 42.63 | PK | 60 | 2.0 | V | -13.08 | 29.55 | 74.00 | -44.45 |
| 2488.09 | 38.14 | Ave | 60 | 2.0 | V | -13.08 | 25.06 | 54.00 | -28.94 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11n40: Middle Channel 2437MHz | | | | | | | | | |
| 223.72 | 35.16 | QP | 45 | 1.5 | H | -11.62 | 23.54 | 46.00 | -22.46 |
| 223.72 | 30.78 | QP | 62 | 1.2 | V | -11.62 | 19.16 | 46.00 | -26.84 |
| 4874.00 | 46.72 | PK | 193 | 1.5 | V | -0.62 | 46.10 | 74.00 | -27.90 |
| 4874.00 | 51.17 | Ave | 193 | 1.5 | V | -0.62 | 50.55 | 54.00 | -3.45 |
| 7311.00 | 47.42 | PK | 115 | 1.6 | H | 2.21 | 49.63 | 74.00 | -24.37 |
| 7311.00 | 35.48 | Ave | 115 | 1.6 | H | 2.21 | 37.69 | 54.00 | -16.31 |
| 2343.31 | 46.25 | PK | 69 | 1.8 | V | -13.19 | 33.06 | 74.00 | -40.94 |
| 2343.31 | 37.92 | Ave | 69 | 1.8 | V | -13.19 | 24.73 | 54.00 | -29.27 |
| 2361.40 | 43.64 | PK | 286 | 1.2 | H | -13.14 | 30.50 | 74.00 | -43.50 |
| 2361.40 | 36.36 | Ave | 286 | 1.2 | H | -13.14 | 23.22 | 54.00 | -30.78 |
| 2495.62 | 43.15 | PK | 187 | 1.1 | V | -13.08 | 30.07 | 74.00 | -43.93 |
| 2495.62 | 37.40 | Ave | 187 | 1.1 | V | -13.08 | 24.32 | 54.00 | -29.68 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| 11n40: High Channel 2452MHz | | | | | | | | | |
| 223.72 | 35.18 | QP | 84 | 1.3 | H | -11.62 | 23.56 | 46.00 | -22.44 |
| 223.72 | 30.65 | QP | 225 | 1.6 | V | -11.62 | 19.03 | 46.00 | -26.97 |
| 4904.00 | 46.75 | PK | 267 | 1.3 | V | -0.24 | 46.51 | 74.00 | -27.49 |
| 4904.00 | 51.74 | Ave | 267 | 1.3 | V | -0.24 | 51.50 | 54.00 | -2.50 |
| 7356.00 | 47.80 | PK | 338 | 1.6 | H | 2.84 | 50.64 | 74.00 | -23.36 |
| 7356.00 | 35.65 | Ave | 338 | 1.6 | H | 2.84 | 38.49 | 54.00 | -15.51 |
| 2320.17 | 46.01 | PK | 160 | 1.3 | V | -13.19 | 32.82 | 74.00 | -41.18 |
| 2320.17 | 37.19 | Ave | 160 | 1.3 | V | -13.19 | 24.00 | 54.00 | -30.00 |
| 2370.15 | 43.12 | PK | 246 | 2.0 | H | -13.14 | 29.98 | 74.00 | -44.02 |
| 2370.15 | 38.79 | Ave | 246 | 2.0 | H | -13.14 | 25.65 | 54.00 | -28.35 |
| 2488.65 | 42.54 | PK | 196 | 1.5 | V | -13.08 | 29.46 | 74.00 | -44.54 |
| 2488.65 | 36.48 | Ave | 196 | 1.5 | V | -13.08 | 23.40 | 54.00 | -30.60 |

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Duty Cycle

| Type of Modulation | Packets | On time ms | Period ms | Duty Cycle linear | Duty Cycle % | Duty Cycle Factor(dB) | Average Factor(dB) |
|--------------------|-----------|------------|-----------|-------------------|--------------|-----------------------|--------------------|
| TX 11b | channel 1 | 9.7608 | 9.7608 | 1.00 | 100.00 | 0.00 | 0.00 |
| TX 11g | channel 1 | 9.7608 | 9.7608 | 1.00 | 100.00 | 0.00 | 0.00 |
| TX 11n HT20 | channel 1 | 9.7608 | 9.7608 | 1.00 | 100.00 | 0.00 | 0.00 |
| TX 11n HT40 | channel 3 | 9.7608 | 9.7608 | 1.00 | 100.00 | 0.00 | 0.00 |


Remark:

Duty cycle=On Time/period;


Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$


Mode: TX 11b channel 1

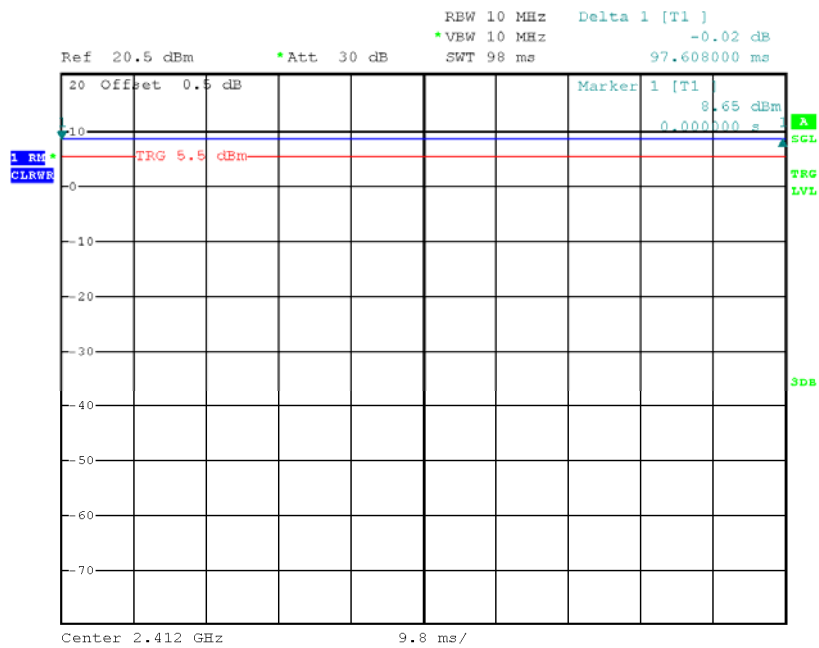


Mode: TX 11g channel 1

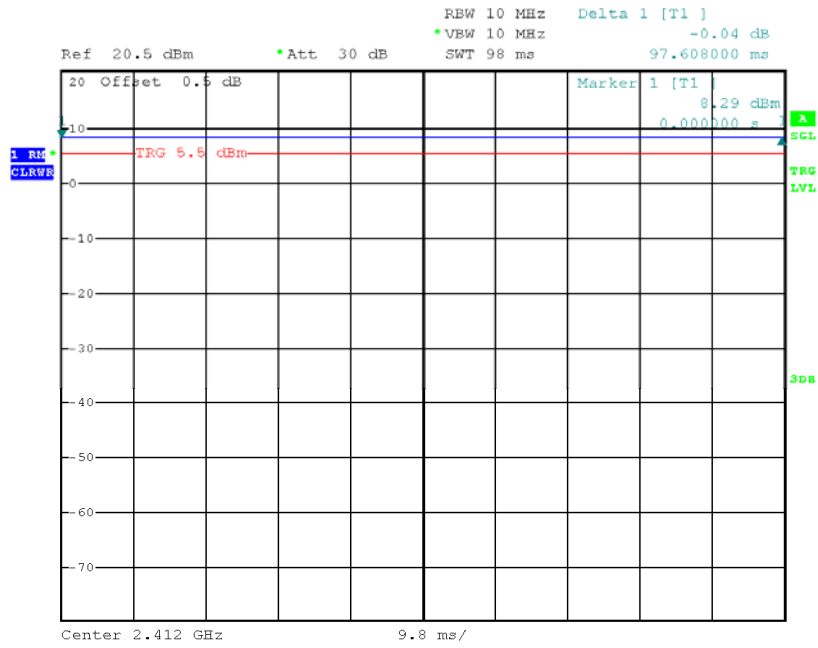

Mode: 11n HT20 channel 1

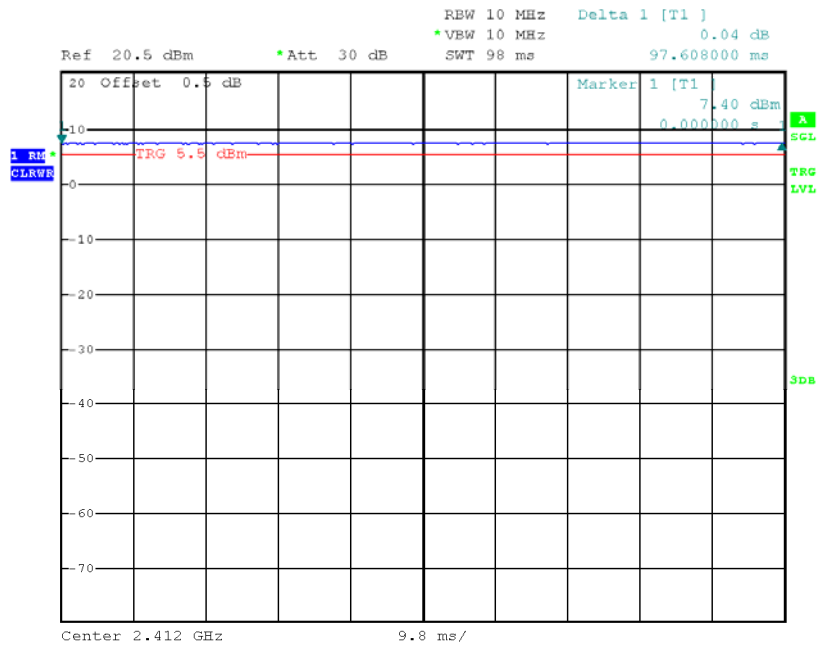

Mode: 11n HT40 channel 3

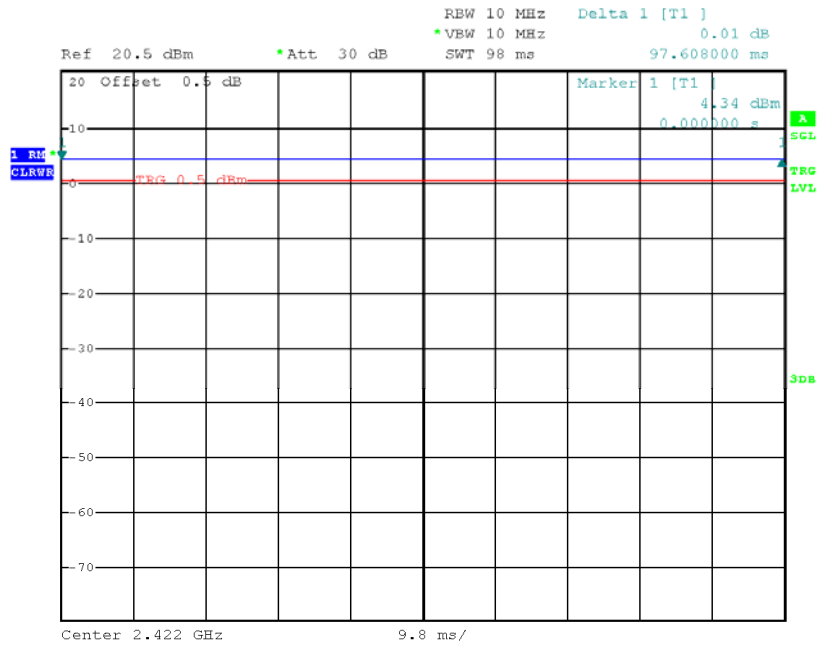

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≈ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\approx [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result


9KHz – 30MHz

802.11b


Low Channel

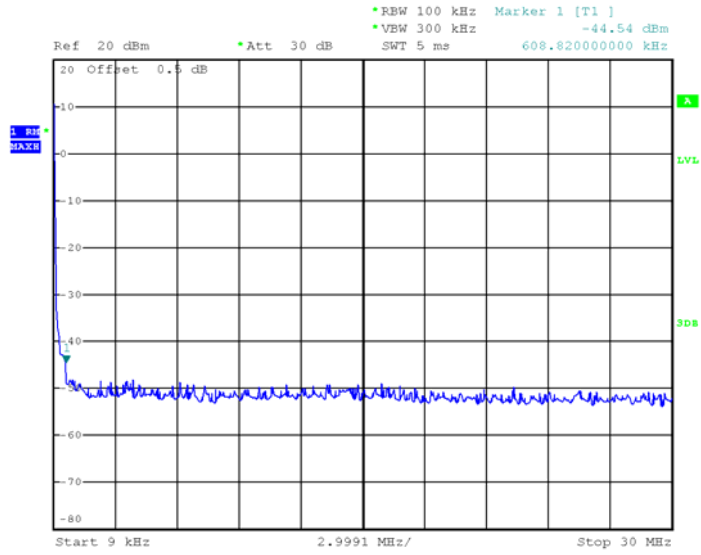

Middle Channel

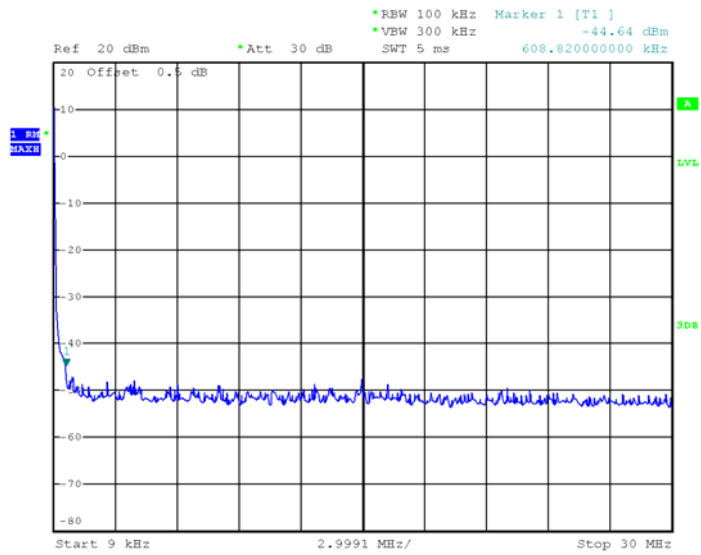


High Channel

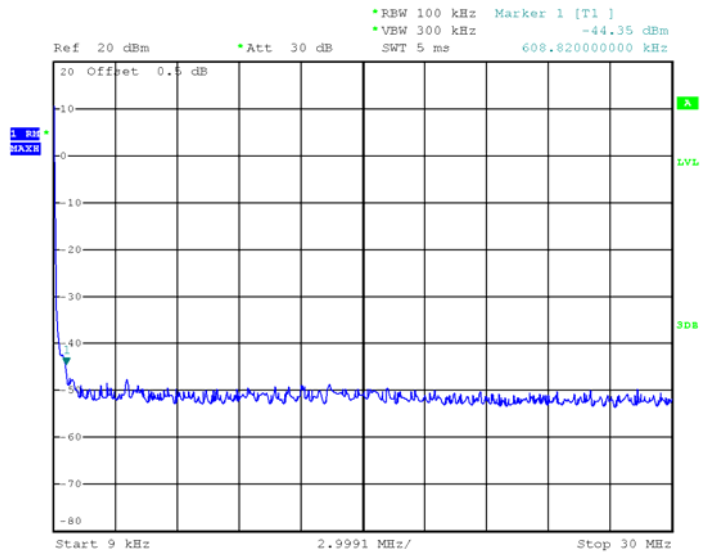


802.11g


Low Channel

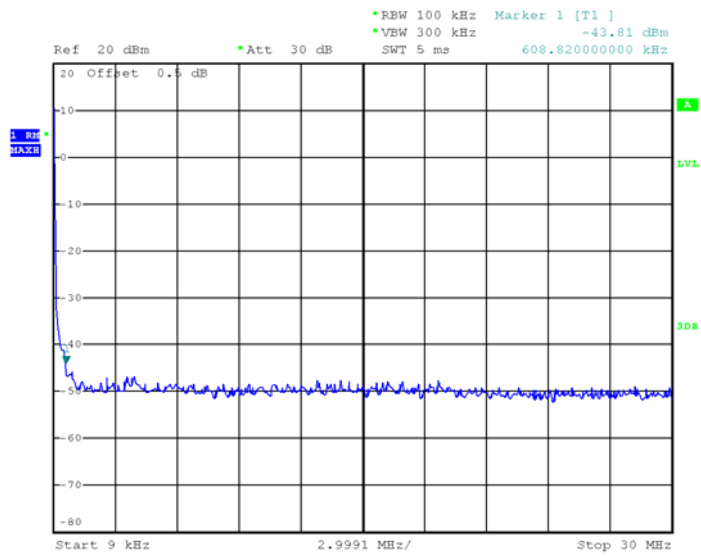

Middle Channel

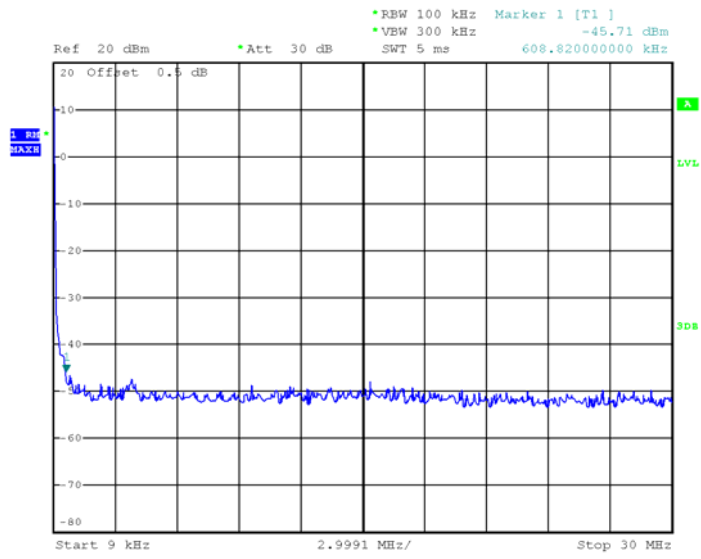


High Channel

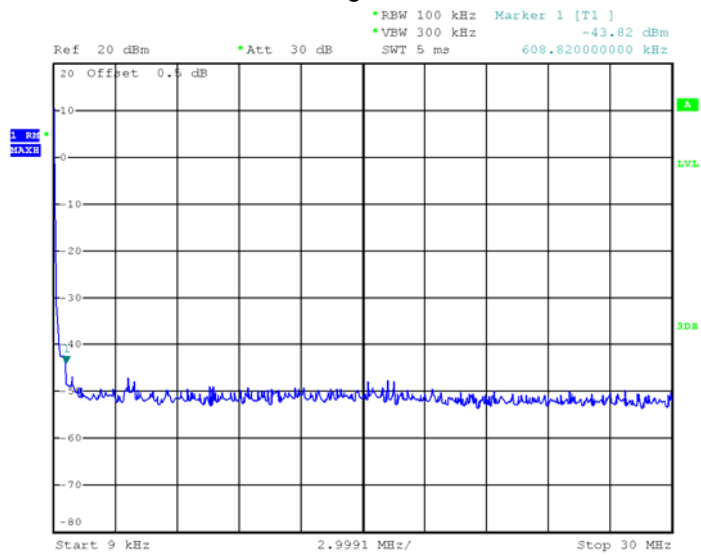


802.11n HT20


Low Channel

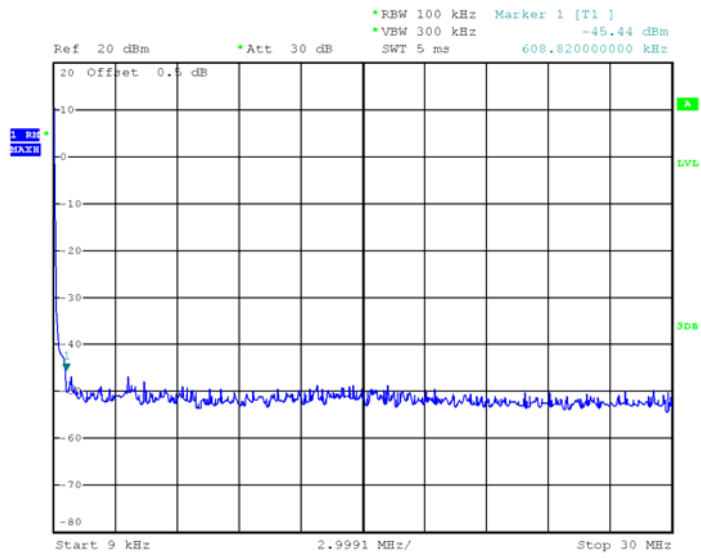

Middle Channel

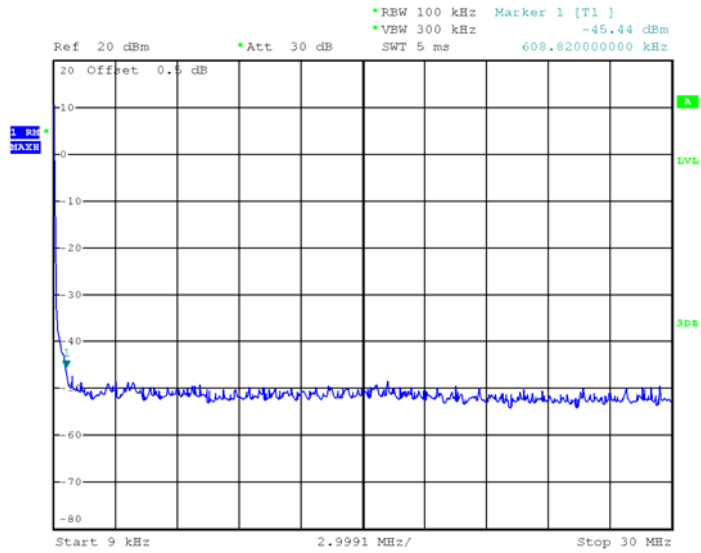


High Channel

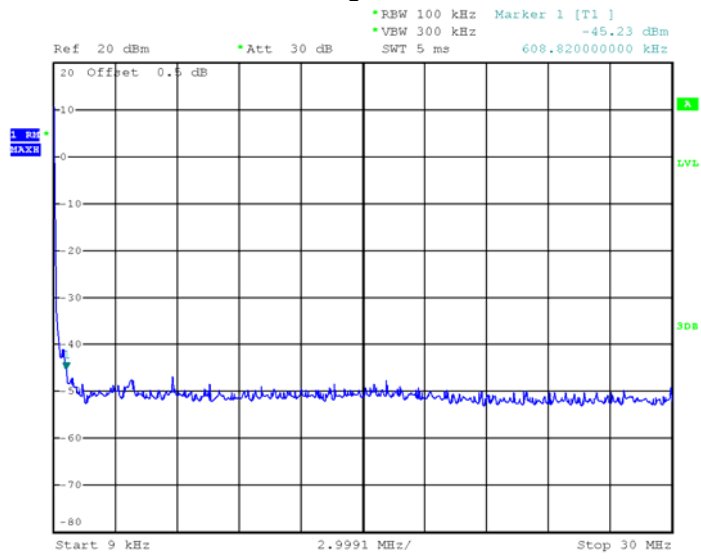


802.11n HT40


Low Channel

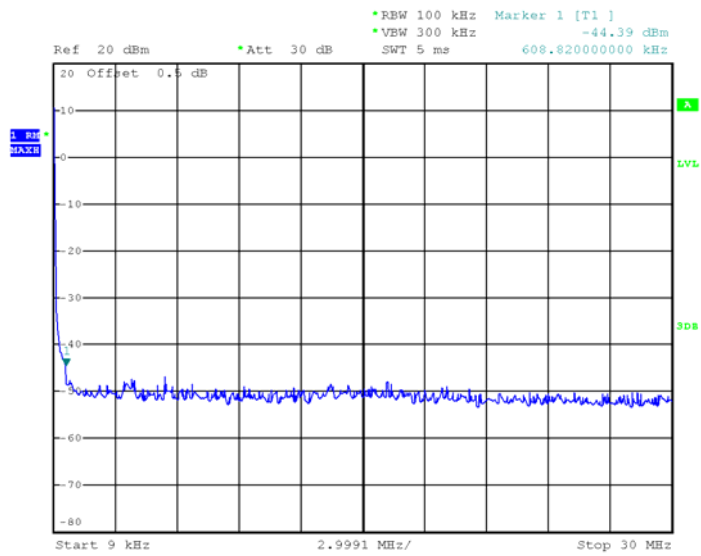

Middle Channel

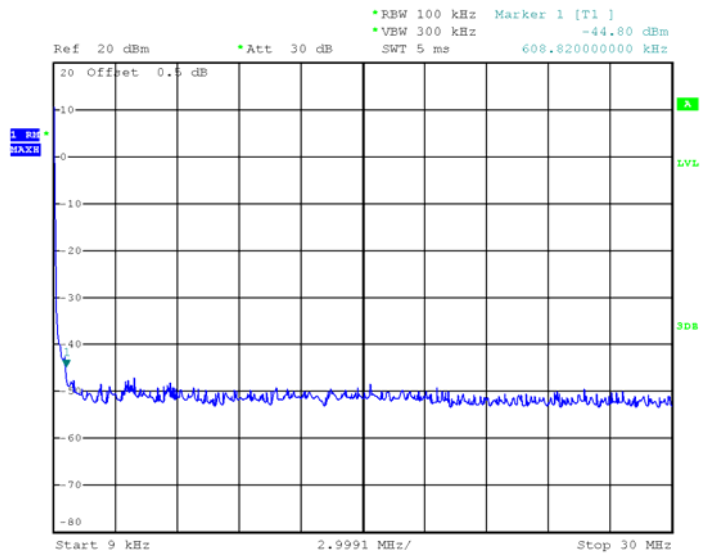

High Channel

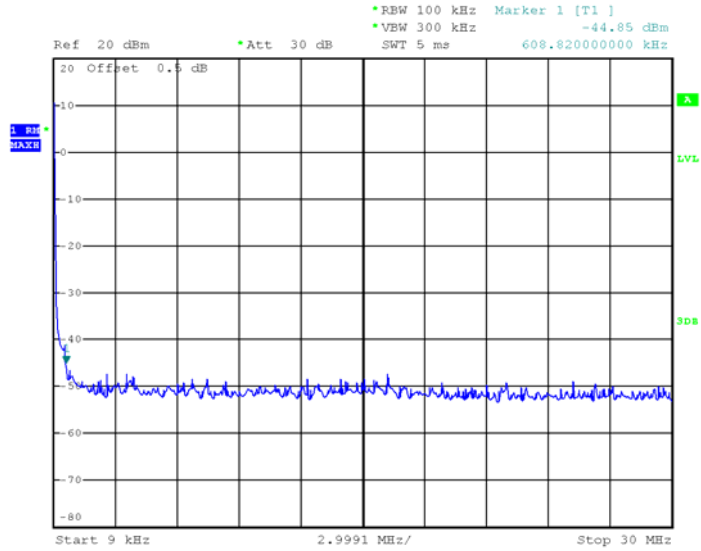


Above 30MHz

802.11b


Low Channel

Fundamental

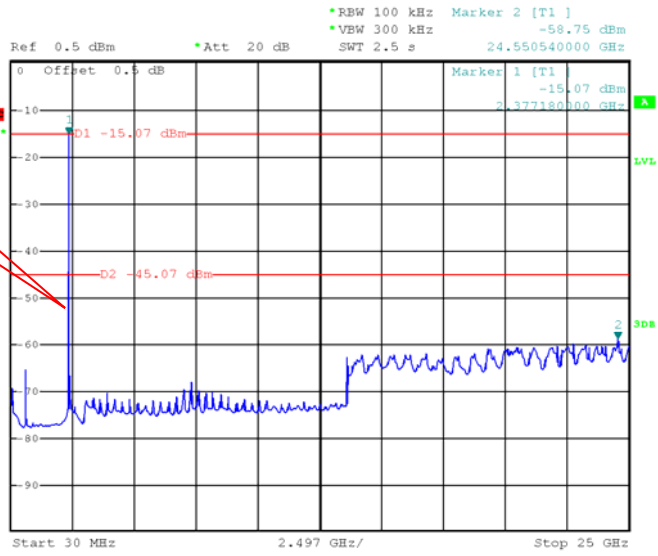


Middle Channel

Fundamental

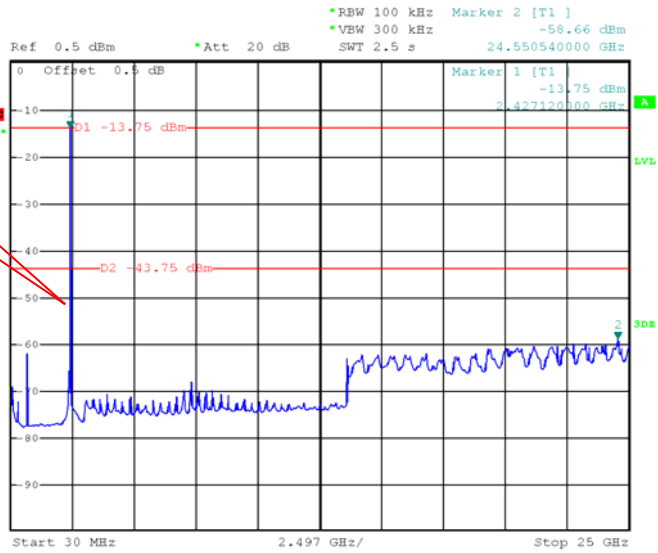

High Channel


Fundamental

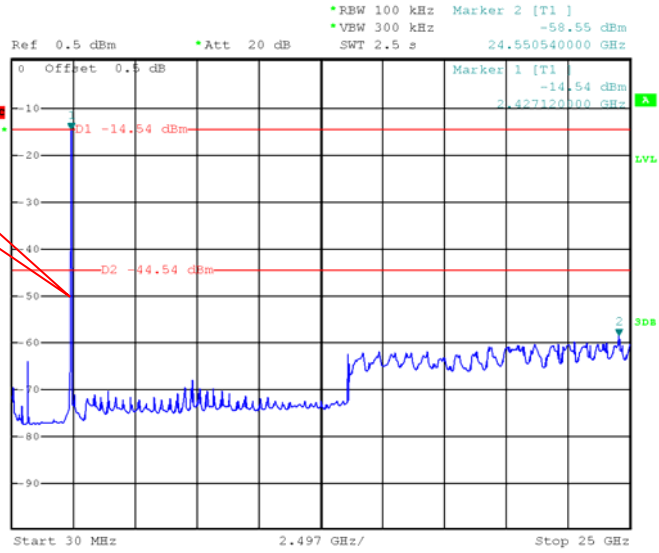

802.11g


Low Channel

Fundamental

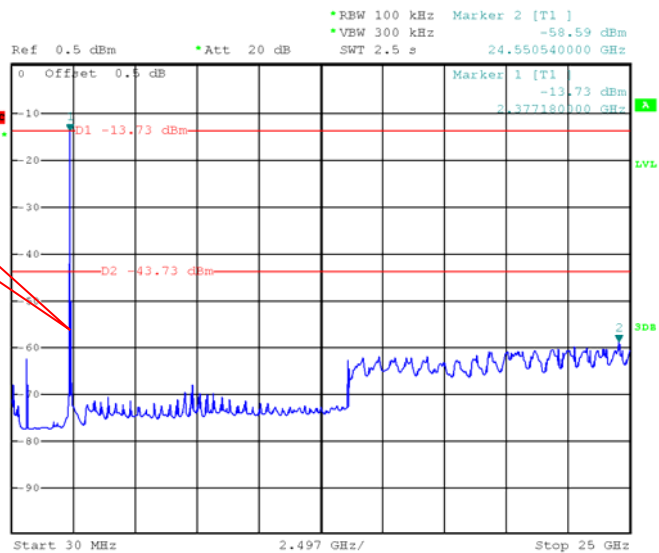


Middle Channel

Fundamental

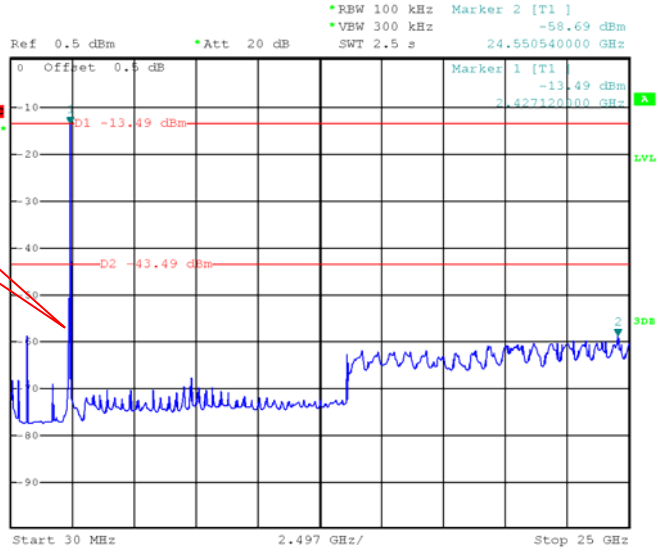

High Channel


Fundamental

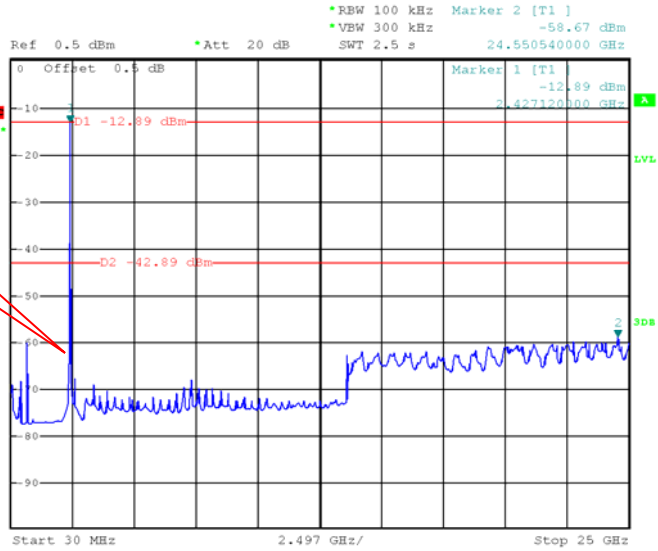

802.11n HT20


Low Channel

Fundamental

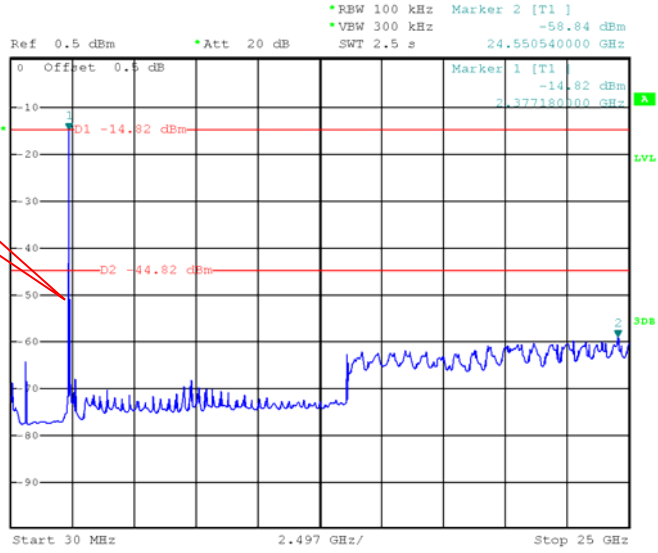


Middle Channel

Fundamental

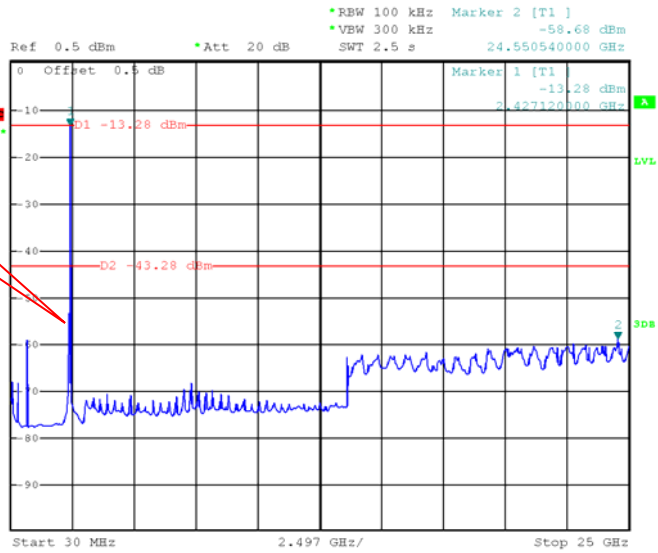

High Channel


Fundamental

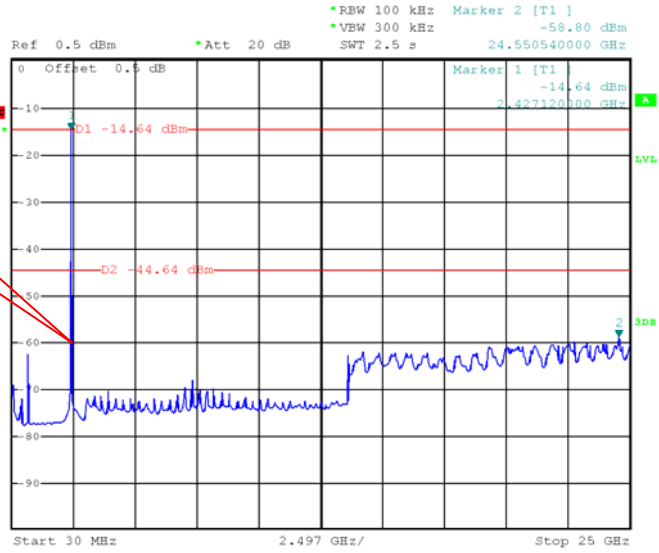

802.11n HT40


Low Channel

Fundamental

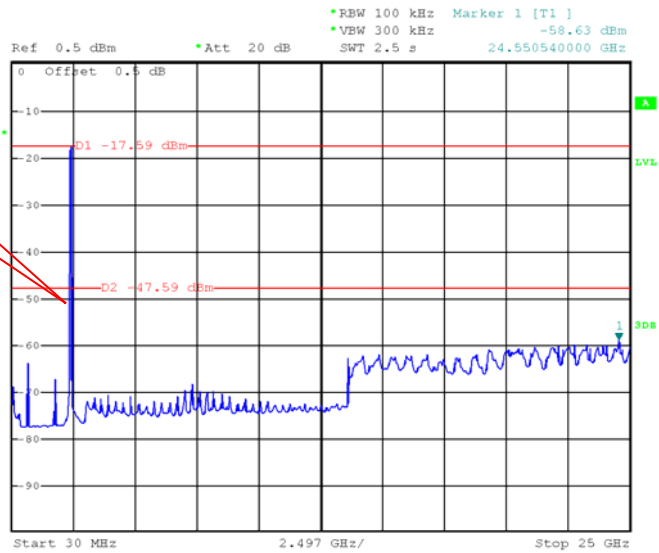


Middle Channel

Fundamental

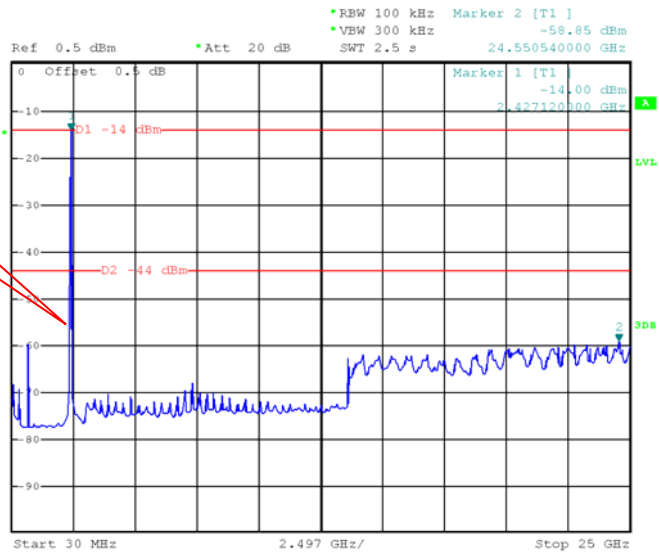

High Channel

Fundamental

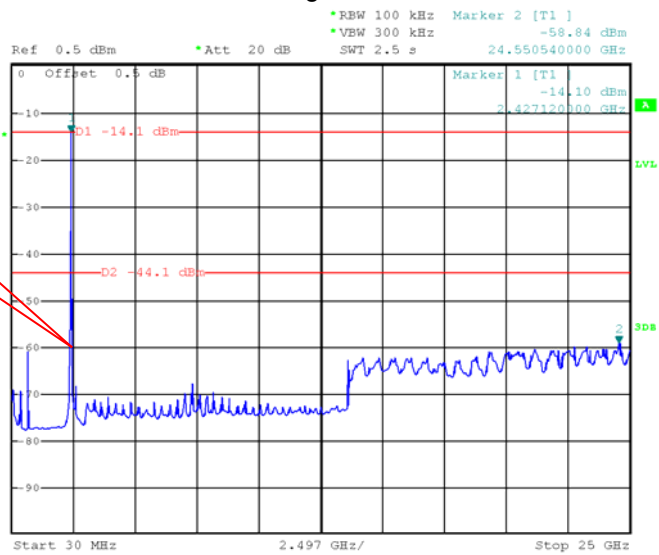

11 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


11.2 Test Result

Test result plots shown as follows:


TX 11b: Band edge-left side

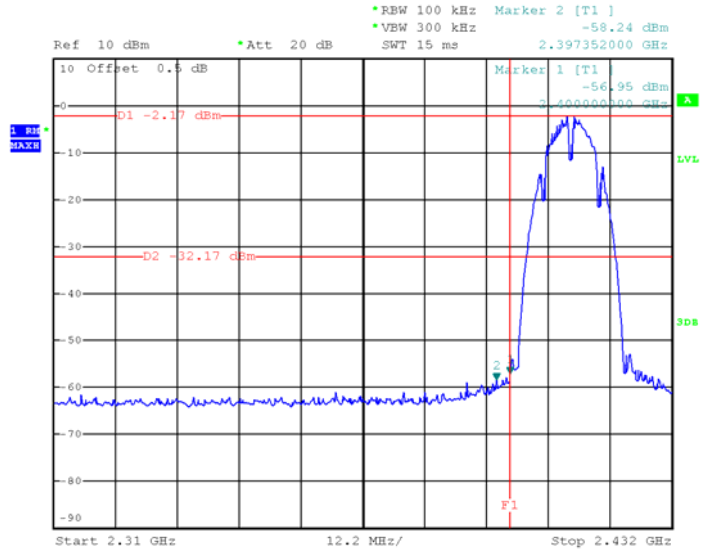


TX 11b: Band edge-right side

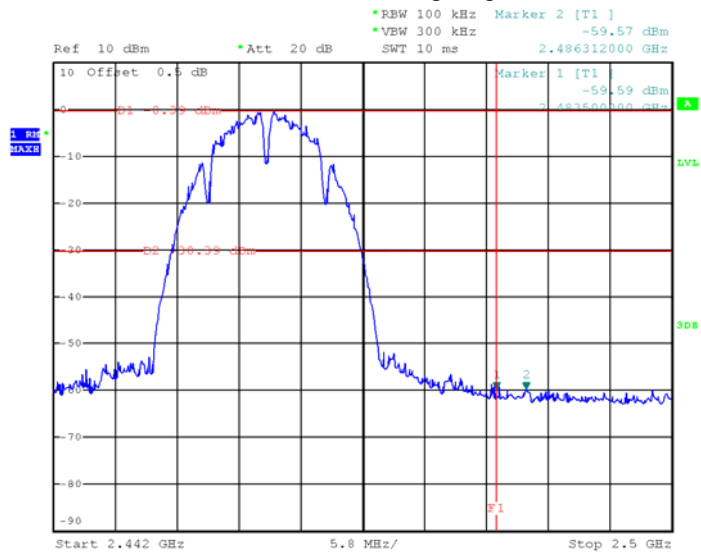


TX 11g: Band edge-left side

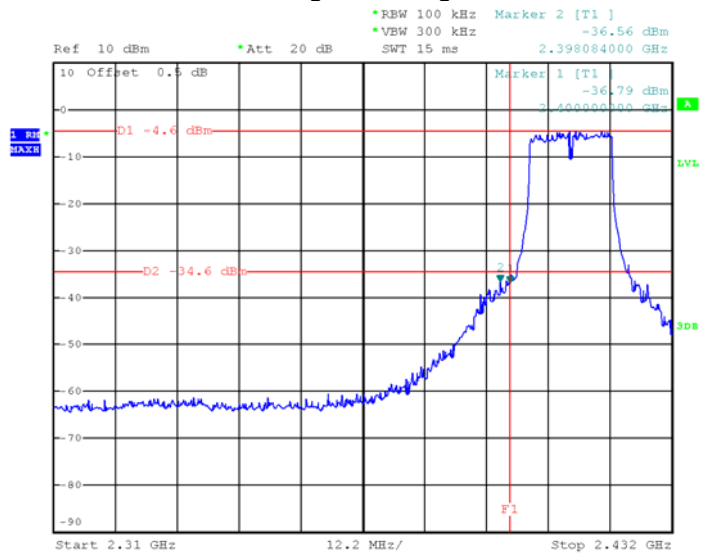


TX 11g: Band edge-right side

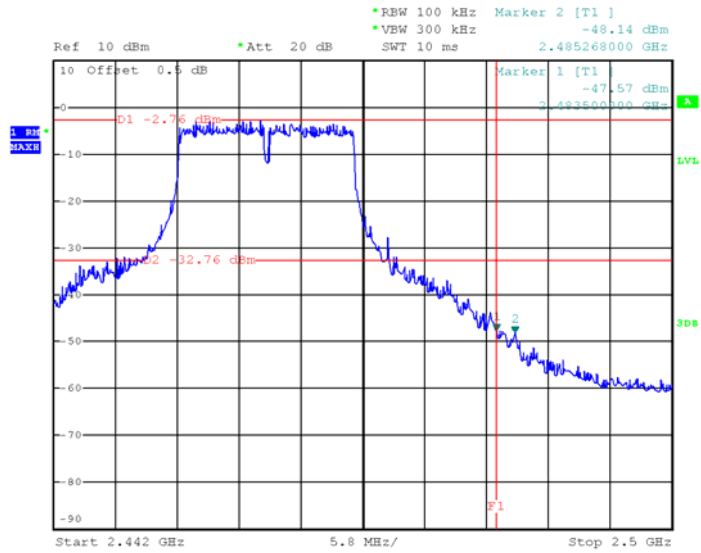


TX 11n HT20: Band edge-left side

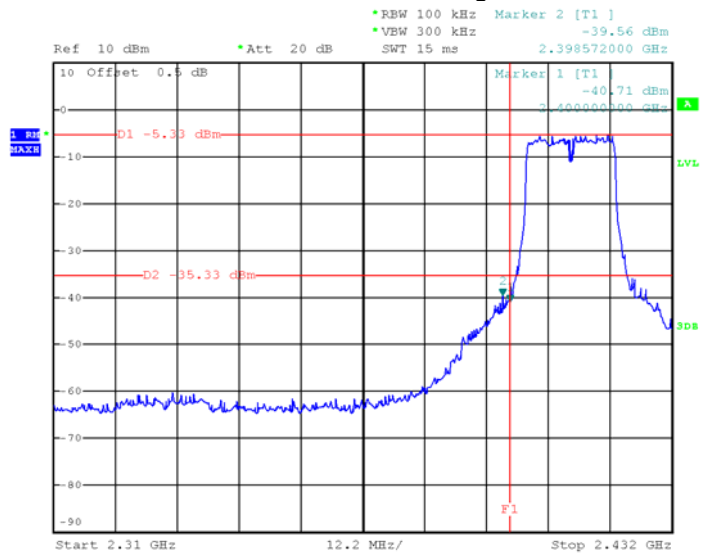


TX 11n HT20: Band edge-right side

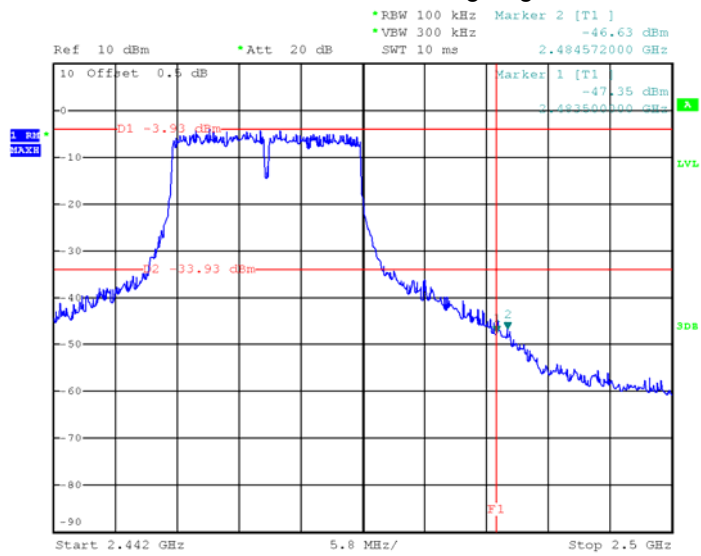

TX 11n HT40: Band edge-left side

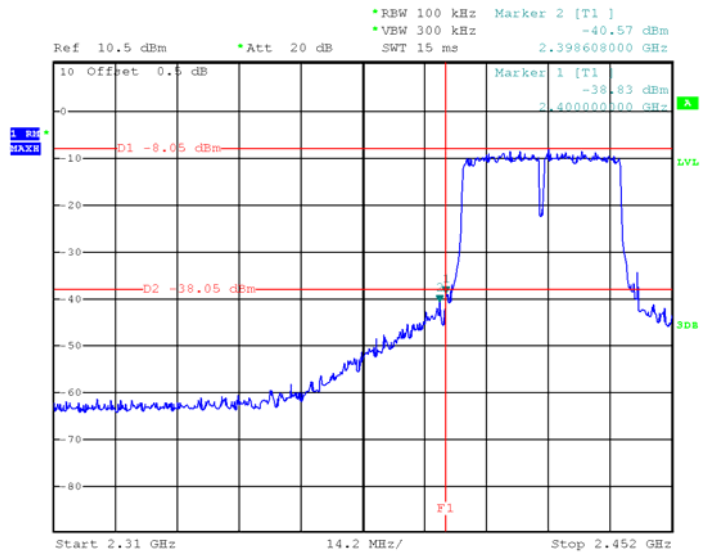

TX 11n HT40: Band edge-right side

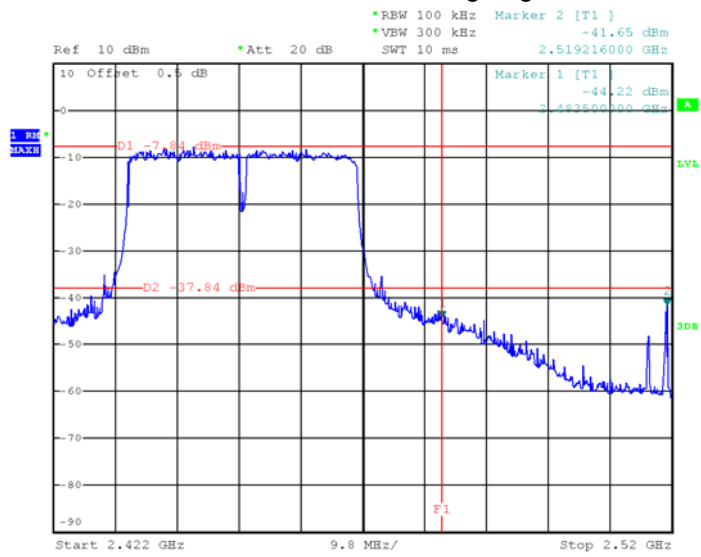

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
99% Bandwidth Set the spectrum analyzer : RBW = 1~5% DTS OBW, VBW = 3 RBW


12.2 Test Result:

| Operation mode | Test Channel | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|----------------|--------------|---------------------|---------------------|
| TX 11b | Channel 1 | 9.062 | 13.184 |
| | Channel 6 | 9.088 | 13.184 |
| | Channel 11 | 9.088 | 13.184 |
| TX 11g | Channel 1 | 16.60 | 16.950 |
| | Channel 6 | 16.60 | 16.950 |
| | Channel 11 | 16.60 | 16.950 |
| TX 11n HT20 | Channel 1 | 17.820 | 17.928 |
| | Channel 6 | 17.874 | 17.982 |
| | Channel 11 | 17.830 | 17.982 |
| TX 11n HT40 | Channel 3 | 36.520 | 36.850 |
| | Channel 6 | 36.480 | 36.960 |
| | Channel 9 | 36.520 | 37.070 |


Test result plot:

6dB Bandwidth


Mode: TX 11b channel 1

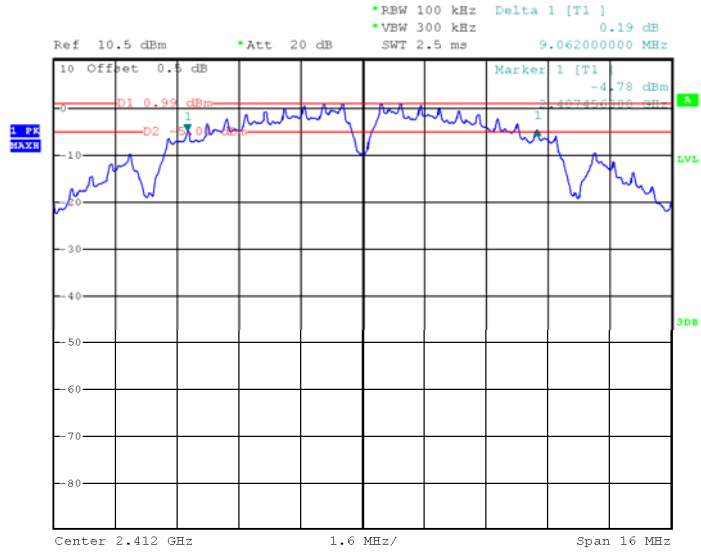


Mode: TX 11b channel 6

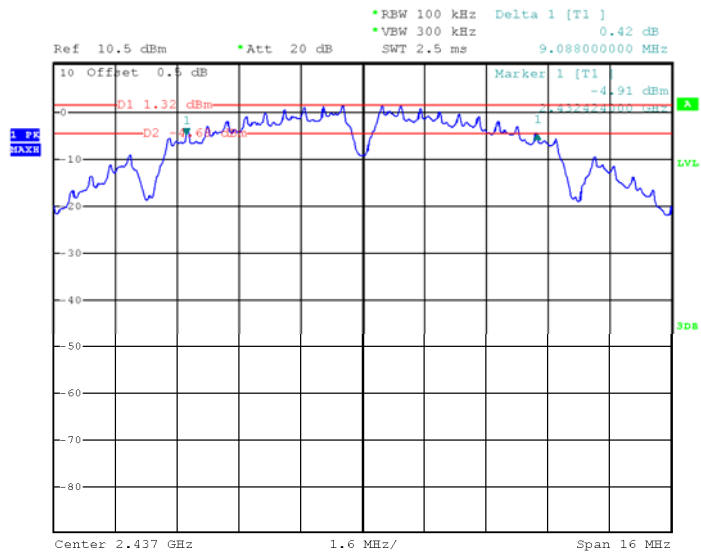


Mode: TX 11b channel 11

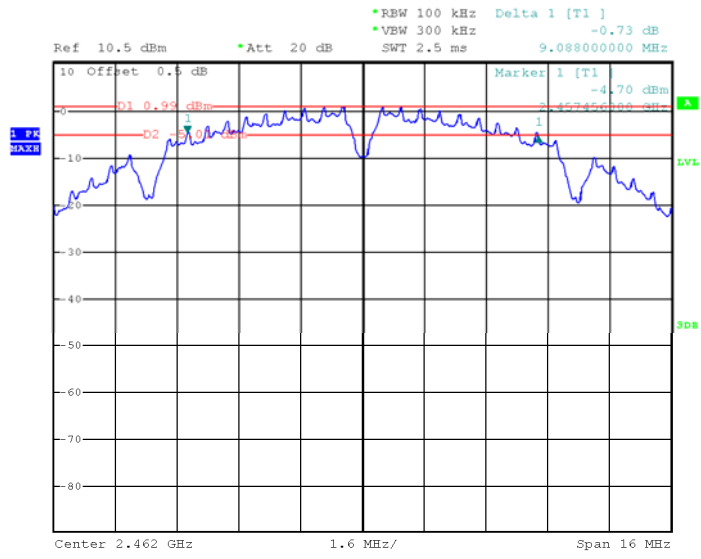


Mode: TX 11g channel 1

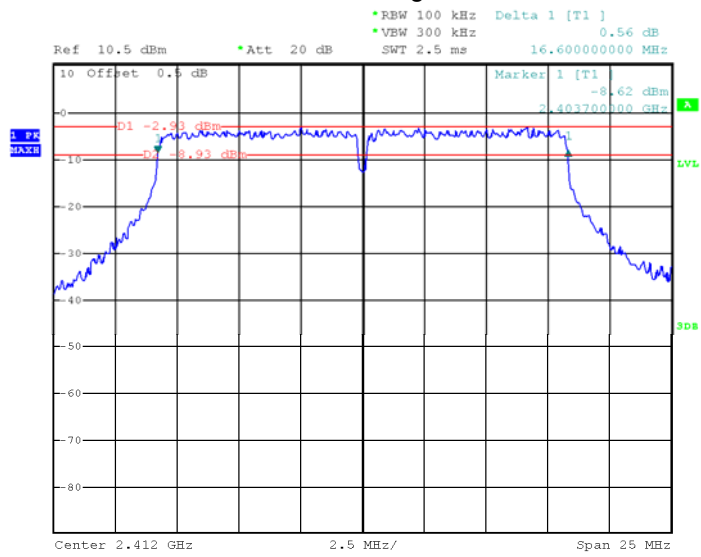


Mode: TX 11g channel 6

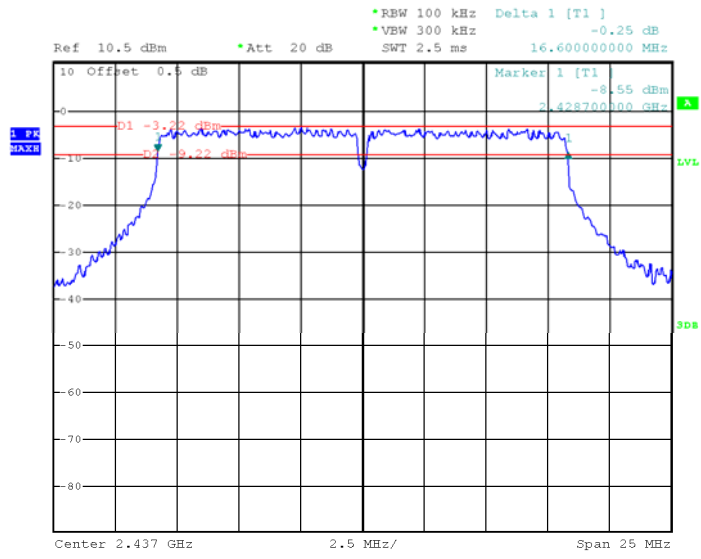


Mode: TX 11g channel 11

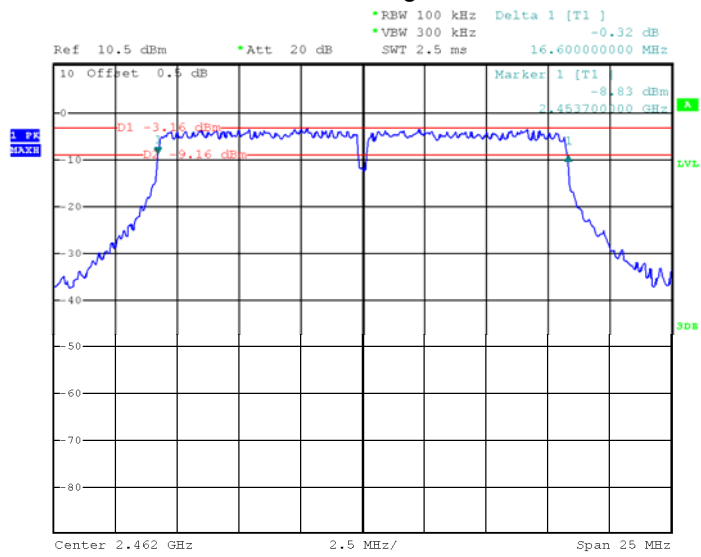


Mode: TX 11n HT20 channel 1

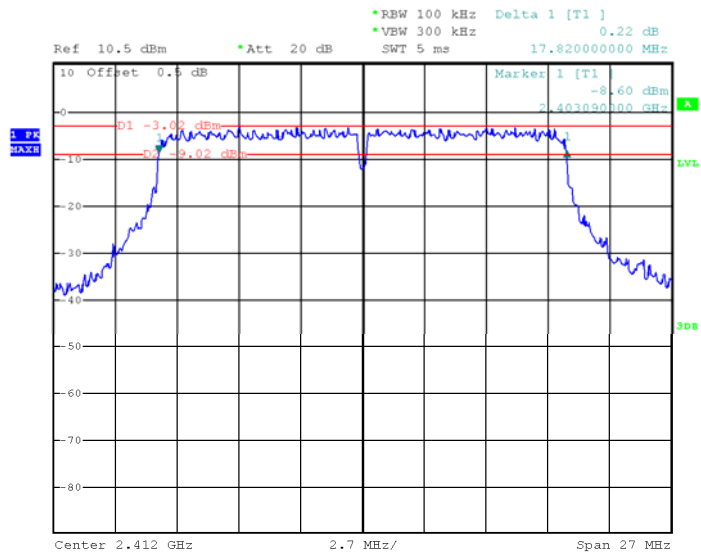


Mode: TX 11n HT20 channel 6

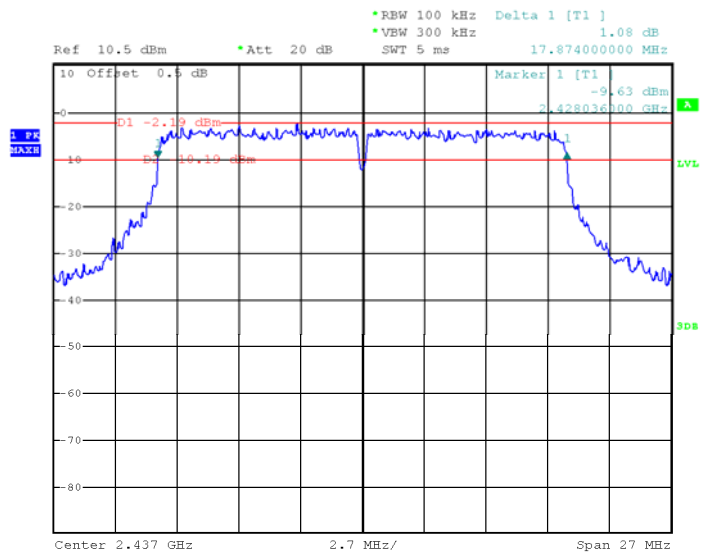


Mode: TX 11n HT20 channel 11

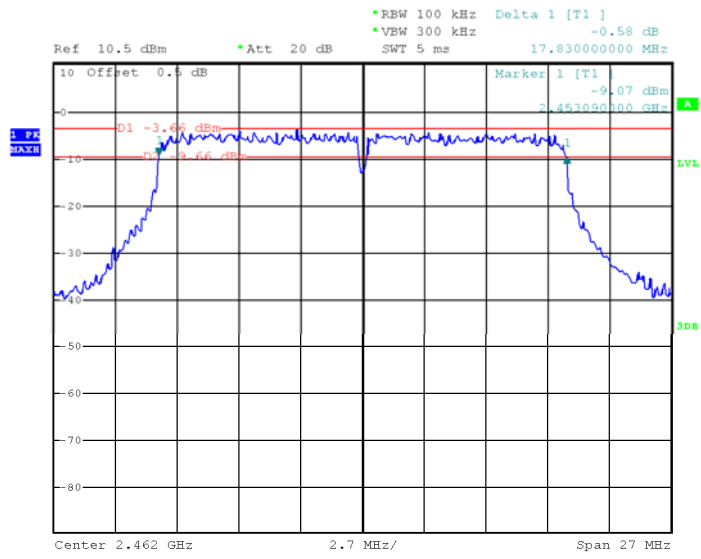


Mode: TX 11n HT40 channel 3

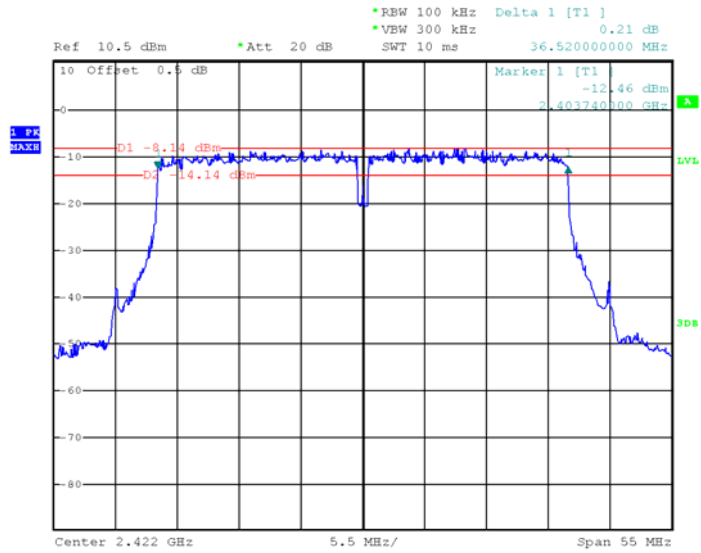

Mode: TX 11n HT40 channel 6

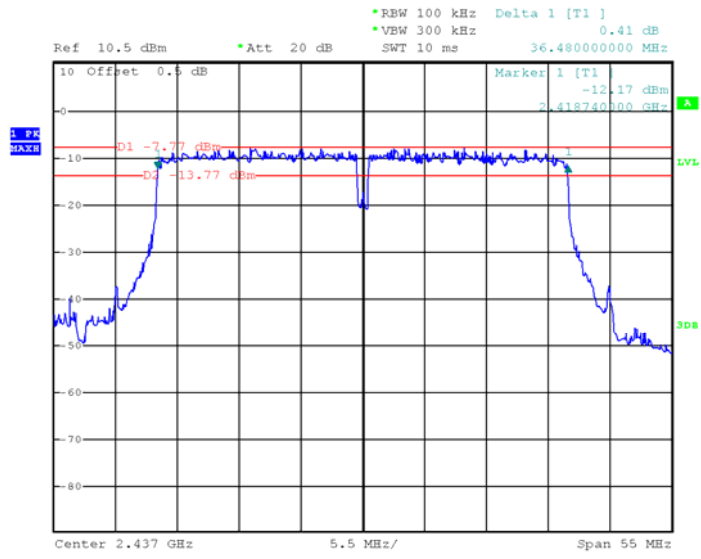


Mode: TX 11n HT40 channel 9

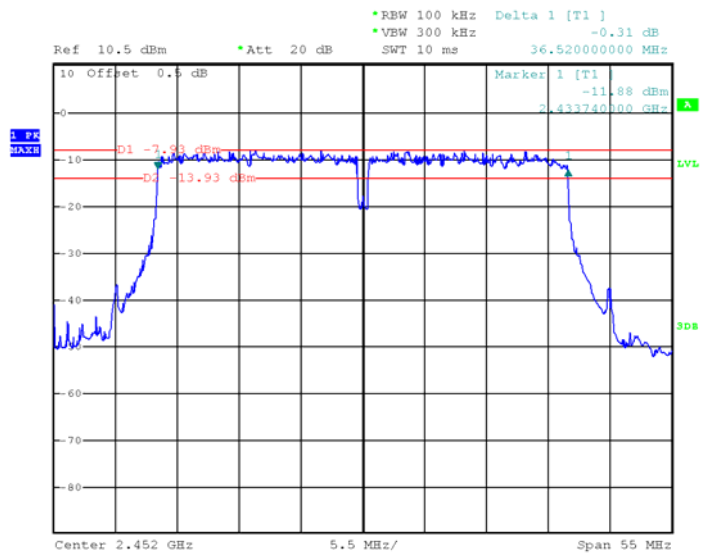


99% Bandwidth


Mode: TX 11b channel 1

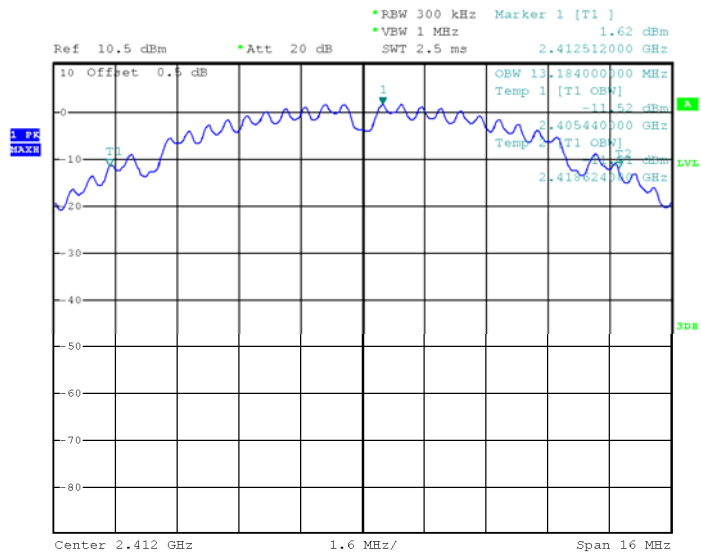


Mode: TX 11b channel 6

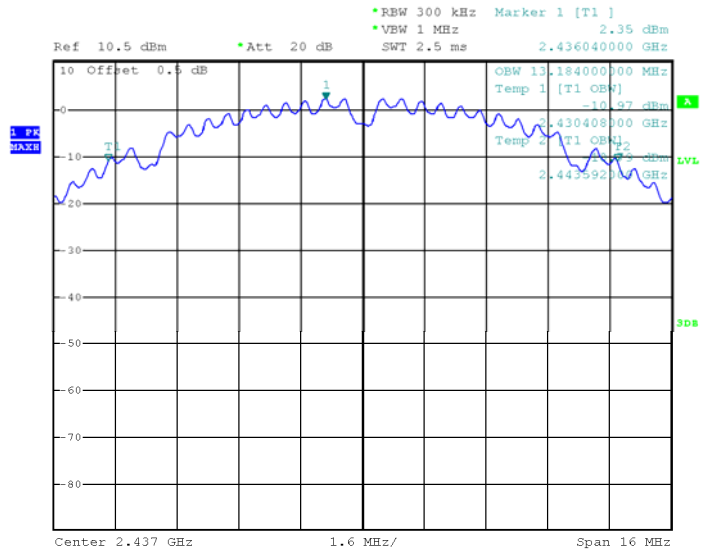


Mode: TX 11b channel 11

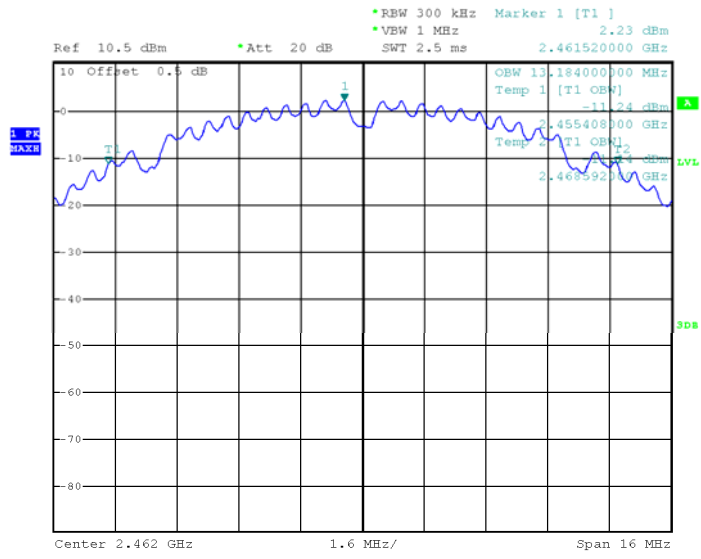


Mode: TX 11g channel 1

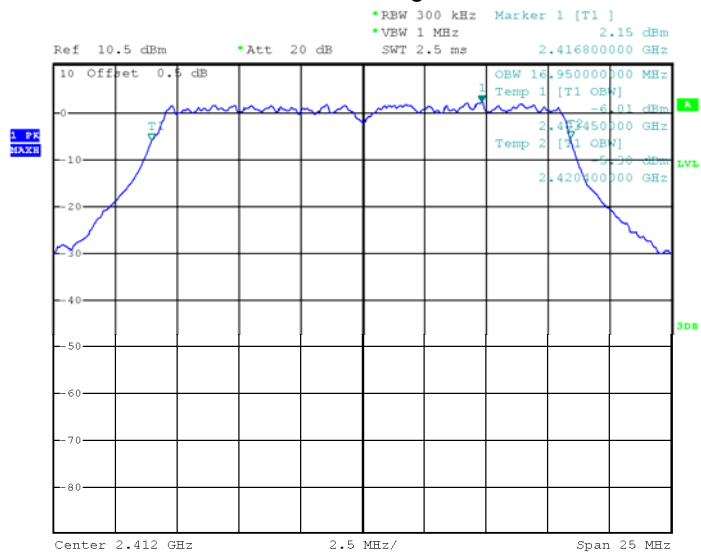


Mode: TX 11g channel 6

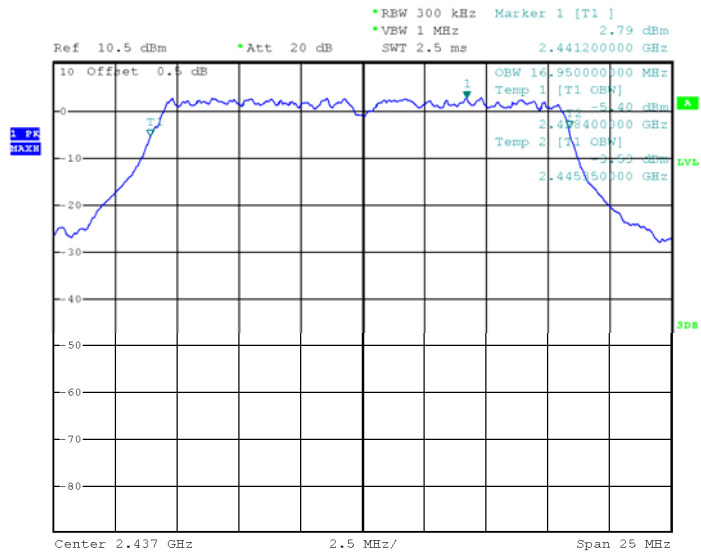


Mode: TX 11g channel 11

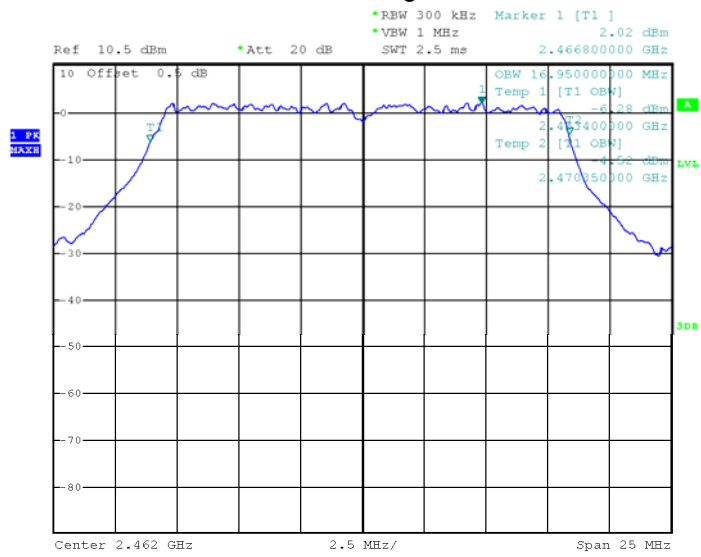


Mode: TX 11n HT20 channel 1

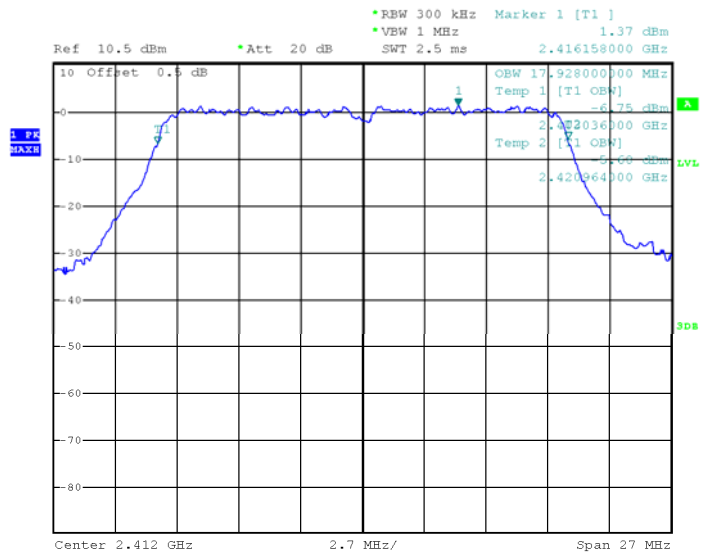


Mode: TX 11n HT20 channel 6

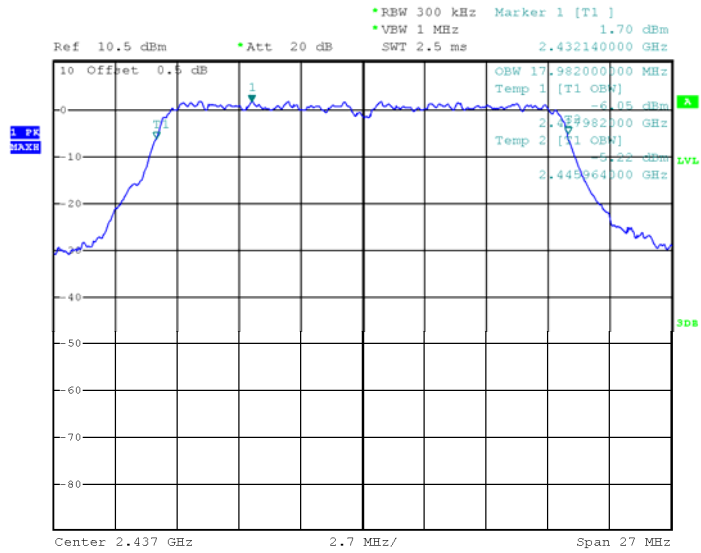


Mode: TX 11n HT20 channel 11

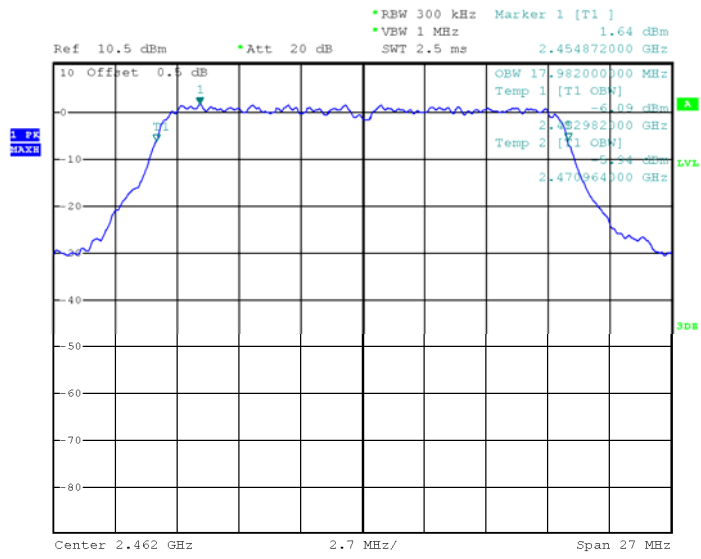


Mode: TX 11n HT40 channel 3

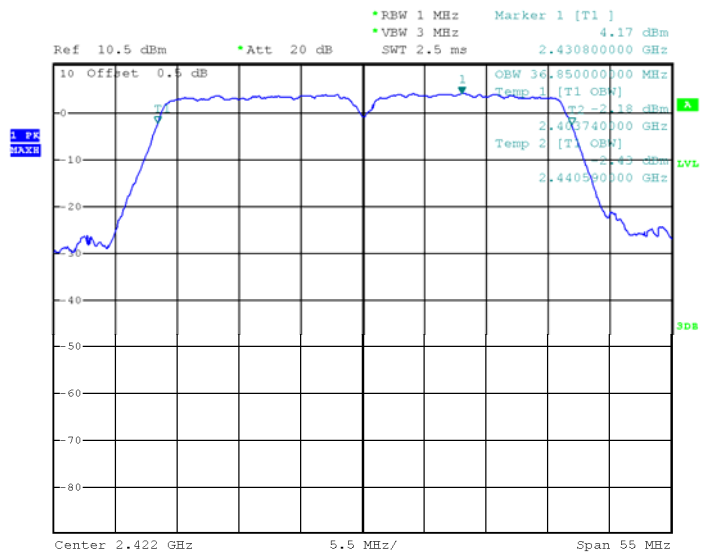

Mode: TX 11n HT40 channel 6

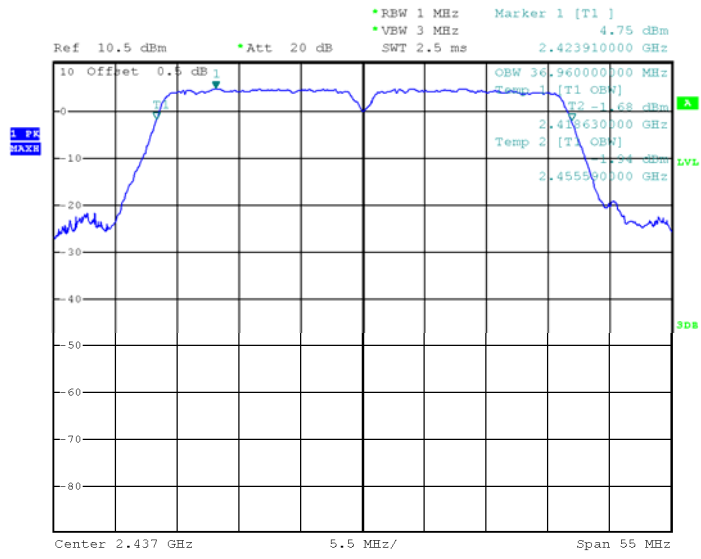

Mode: TX 11n HT40 channel 9

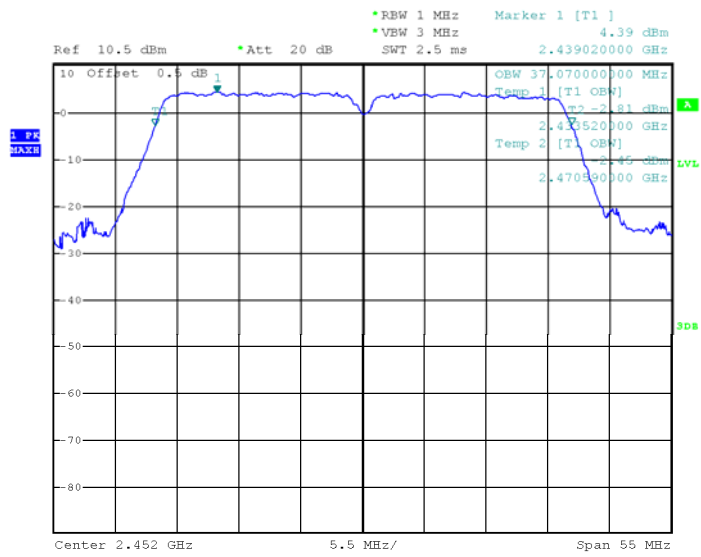

13 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

13.2 Test Result:


| Operation mode | Channel Frequency (MHz) | Maximum Peak Output Power (dBm) | Limit |
|----------------|-------------------------|---------------------------------|----------|
| TX 11b | Low-2412 | 9.92 | 1W/30dBm |
| | Middle-2437 | 10.71 | 1W/30dBm |
| | High-2462 | 10.73 | 1W/30dBm |
| TX 11g | Low-2412 | 12.14 | 1W/30dBm |
| | Middle-2437 | 13.15 | 1W/30dBm |
| | High-2462 | 13.03 | 1W/30dBm |
| TX 11n HT20 | Low-2412 | 12.73 | 1W/30dBm |
| | Middle-2437 | 13.81 | 1W/30dBm |
| | High-2462 | 13.59 | 1W/30dBm |
| TX 11n HT40 | Low-2422 | 11.80 | 1W/30dBm |
| | Middle-2437 | 12.27 | 1W/30dBm |
| | High-2452 | 12.11 | 1W/30dBm |

Test Plot


Mode: TX 11b channel 1

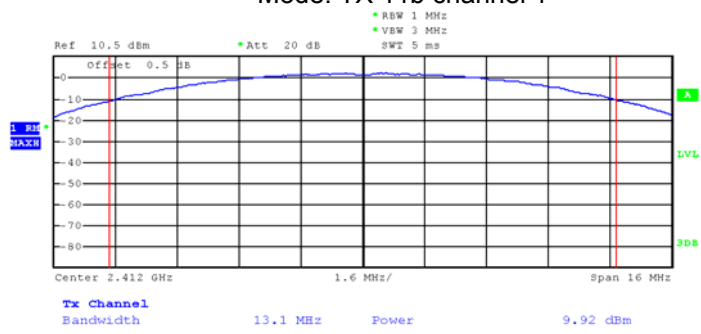


Mode: TX 11b channel 6

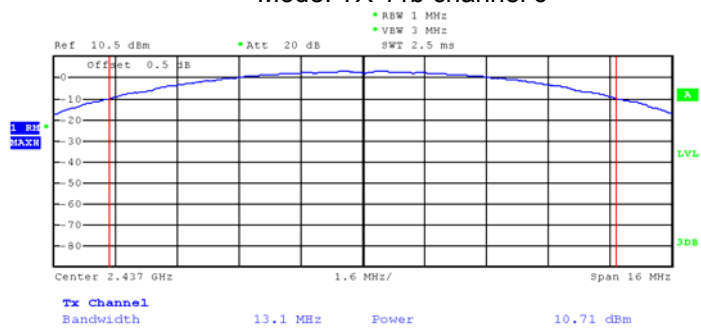


Mode: TX 11b channel 11

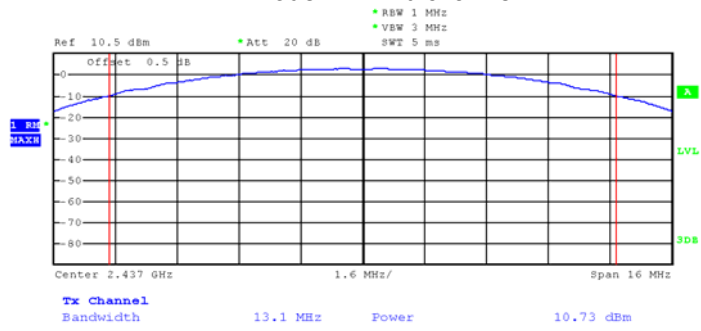


Mode :TX 11g channel 1

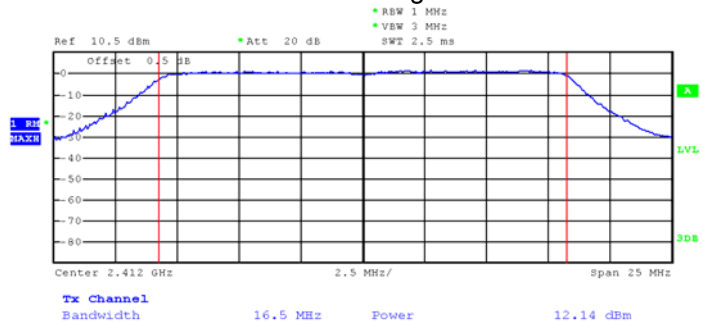


Mode :TX 11g channel 6

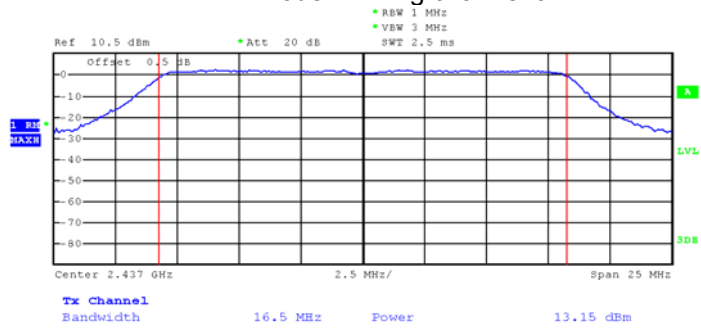


Mode :TX 11g channel 11

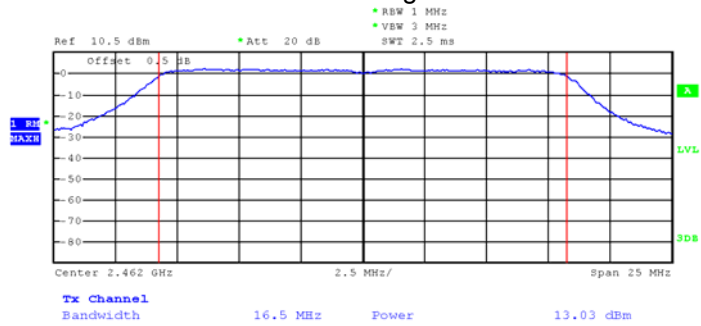


Mode: TX 11n HT20 channel 1

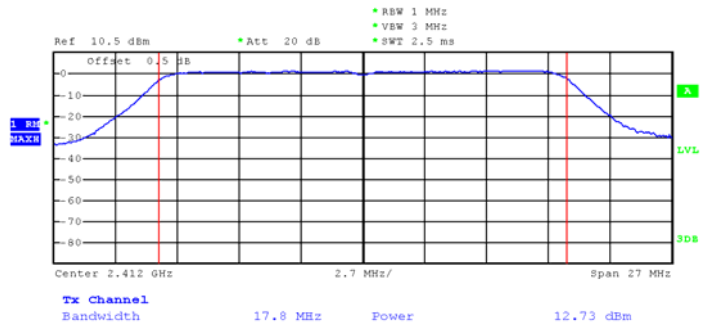


Mode: TX 11n HT20 channel 6

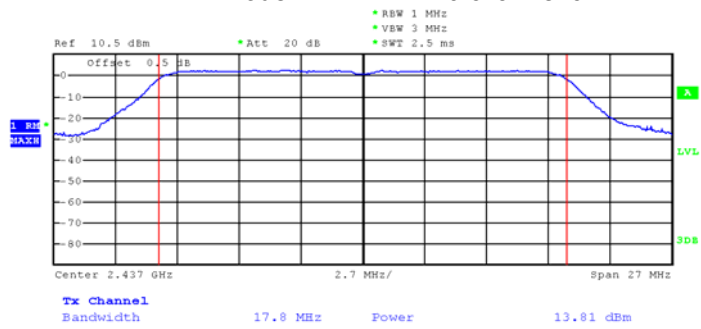


Mode: TX 11n HT20 channel 11

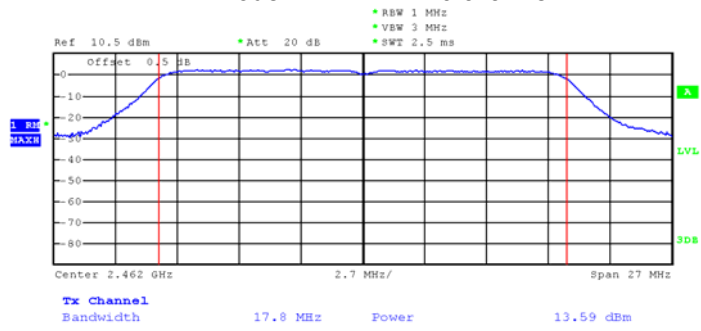


Mode: TX 11n HT40 channel 3

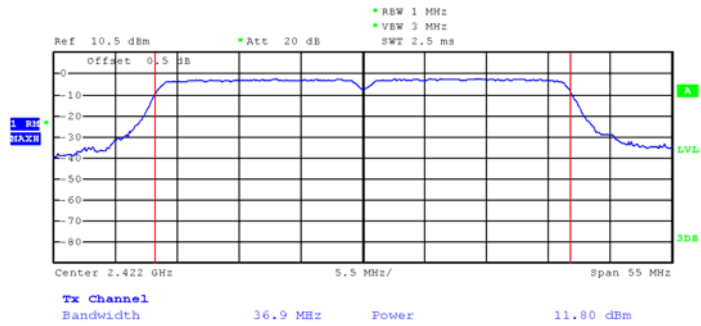

Mode: TX 11n HT40 channel 6

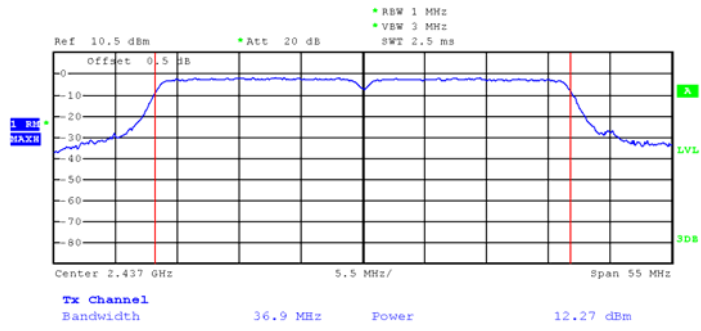

Mode: TX 11n HT40 channel 9

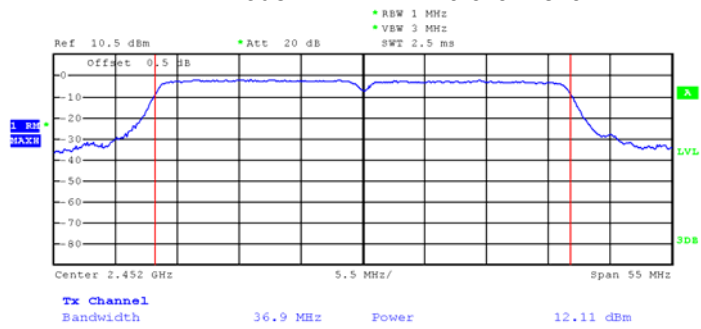

14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10:2013

14.1 Test Procedure:


KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


14.2 Test Result:

| Operation mode | Channel Frequency (MHz) | Power Spectral (dBm per 3kHz) | Limit |
|----------------|-------------------------|-------------------------------|---------------|
| TX 11b | Low-2412 | -22.13 | 8dBm per 3kHz |
| | Middle-2437 | -21.15 | 8dBm per 3kHz |
| | High-2462 | -21.07 | 8dBm per 3kHz |
| TX 11g | Low-2412 | -23.05 | 8dBm per 3kHz |
| | Middle-2437 | -22.56 | 8dBm per 3kHz |
| | High-2462 | -22.49 | 8dBm per 3kHz |
| TX 11n HT20 | Low-2412 | -24.38 | 8dBm per 3kHz |
| | Middle-2437 | -23.60 | 8dBm per 3kHz |
| | High-2462 | -23.19 | 8dBm per 3kHz |
| TX 11n HT40 | Low-2422 | -26.69 | 8dBm per 3kHz |
| | Middle-2437 | -26.17 | 8dBm per 3kHz |
| | High-2452 | -26.35 | 8dBm per 3kHz |


Test Plot Mode: TX 11b channel 1

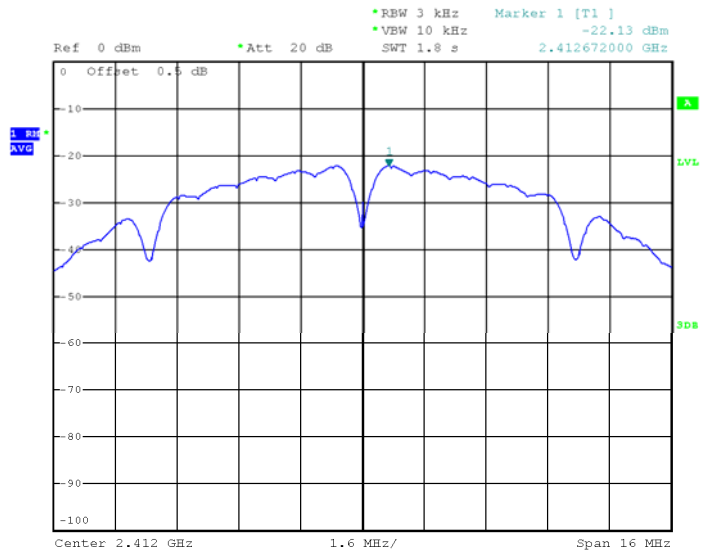


Mode: TX 11b channel 6

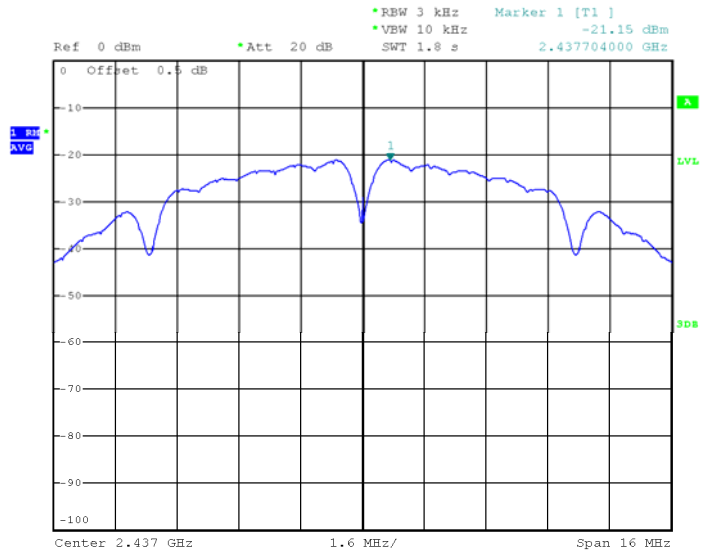


Mode: TX 11b channel 11

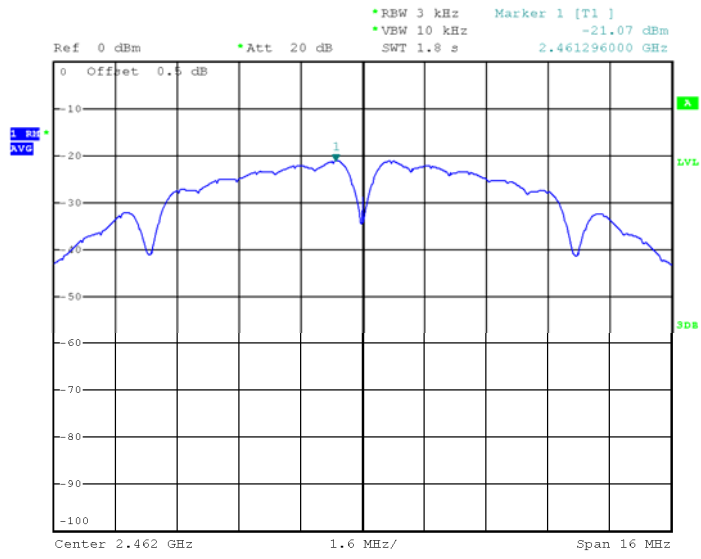


Mode :TX 11g channel 1

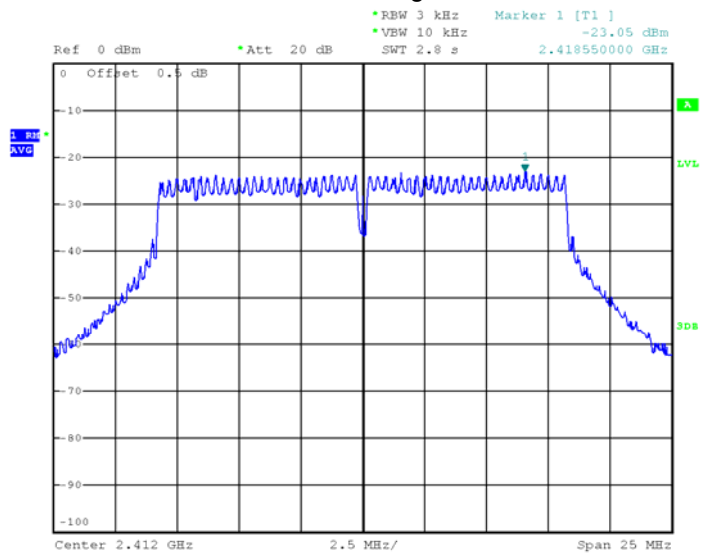


Mode :TX 11g channel 6

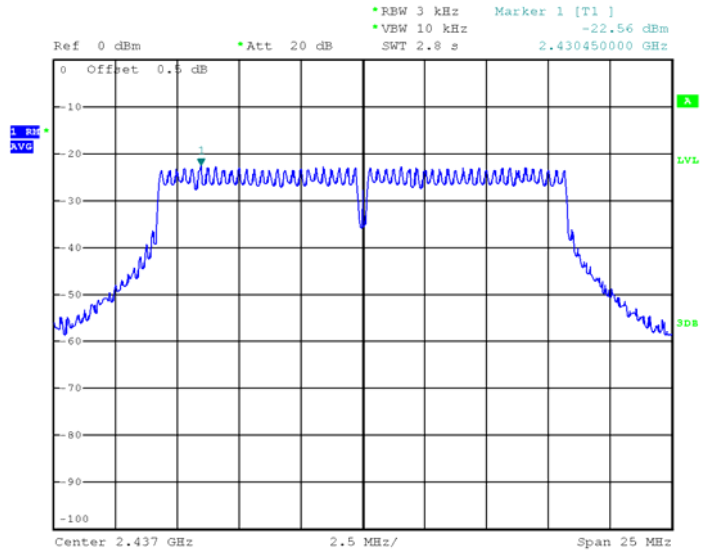


Mode :TX 11g channel 11

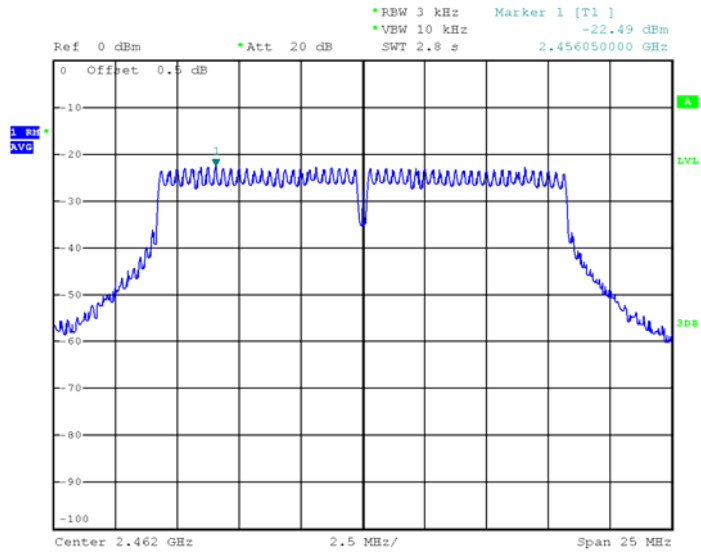


Mode: TX 11n HT20 channel 1

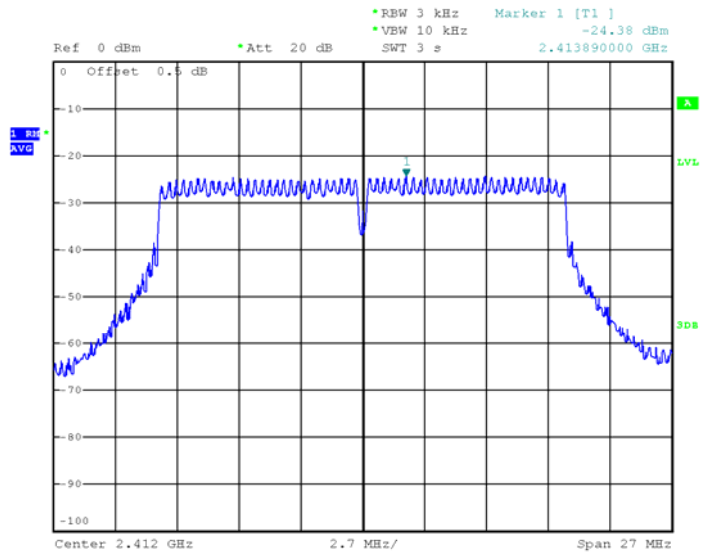


Mode: TX 11n HT20 channel 6

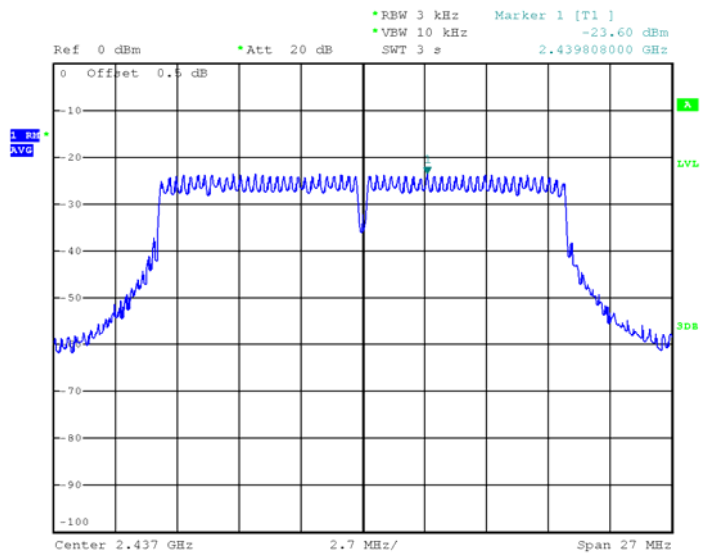


Mode: TX 11n HT20 channel 11

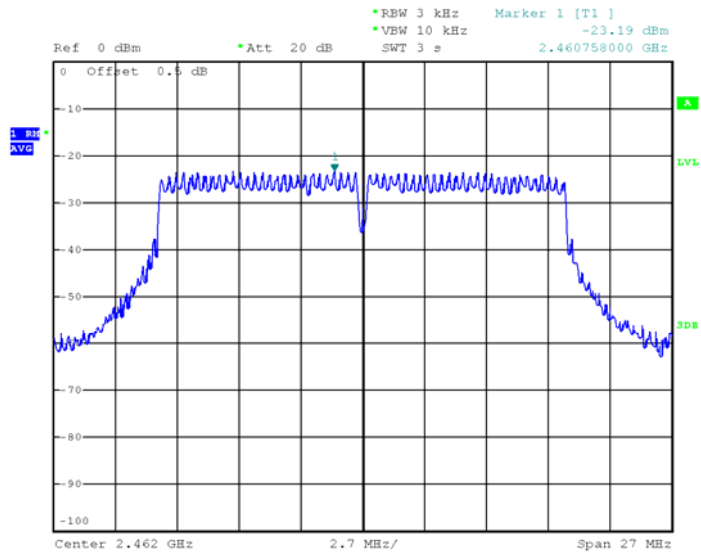


Mode: TX 11n HT40 channel 3

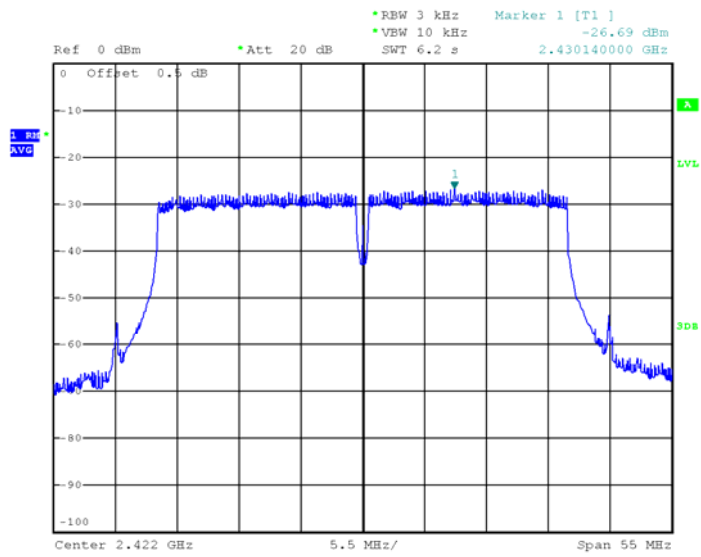

Mode: TX 11n HT40 channel 6

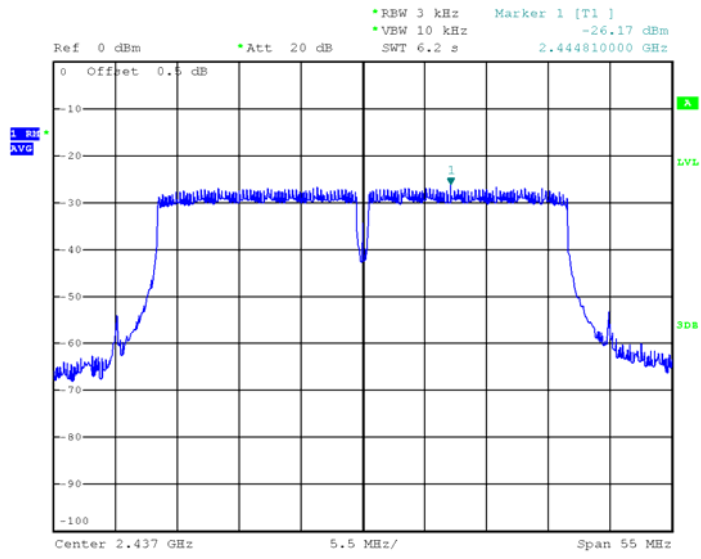

Mode: TX 11n HT40 channel 9

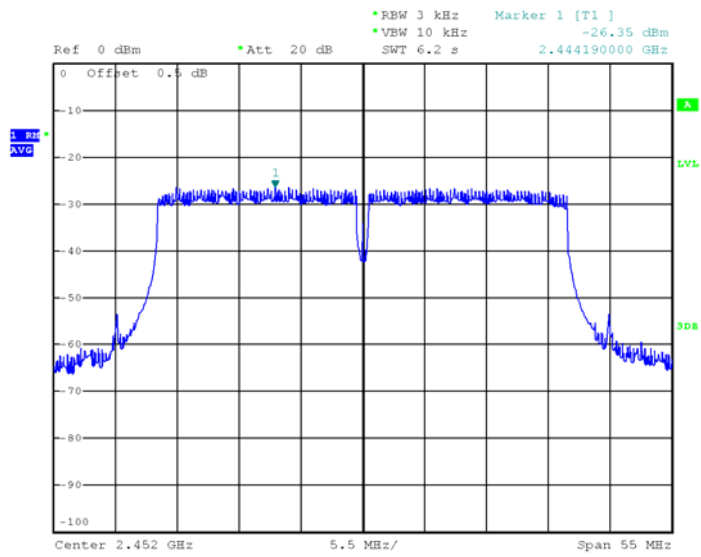

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

16 RF Exposure

Remark: refer to MPE test report: WTH21D08086492W002.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-L6-Photos.

=====**End of Report**=====