





Restrict Band NVNT ac40 5190MHz Ant1 Peak

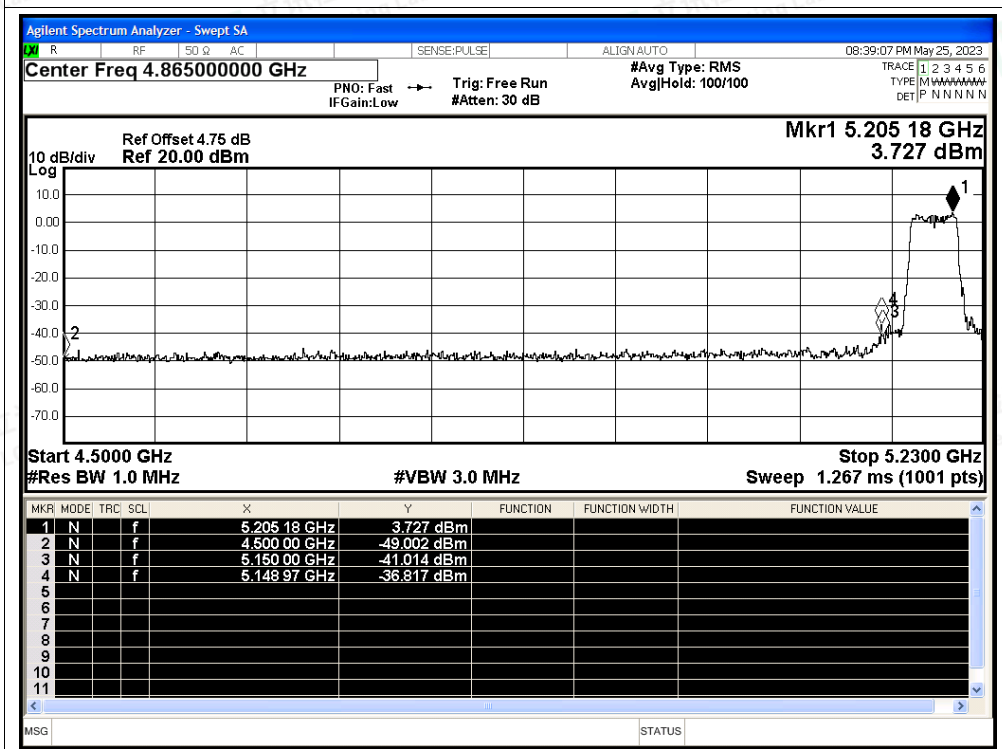


Restrict Band NVNT ac40 5190MHz Ant1 Average

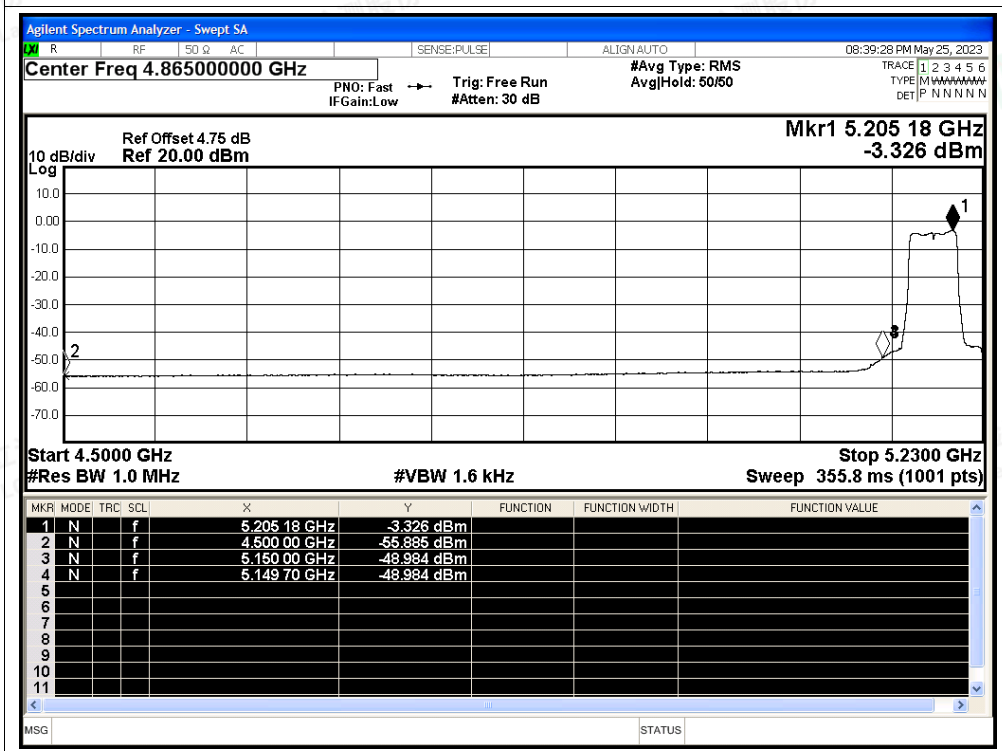




Restrict Band NVNT ac40 5230MHz Ant1 Peak

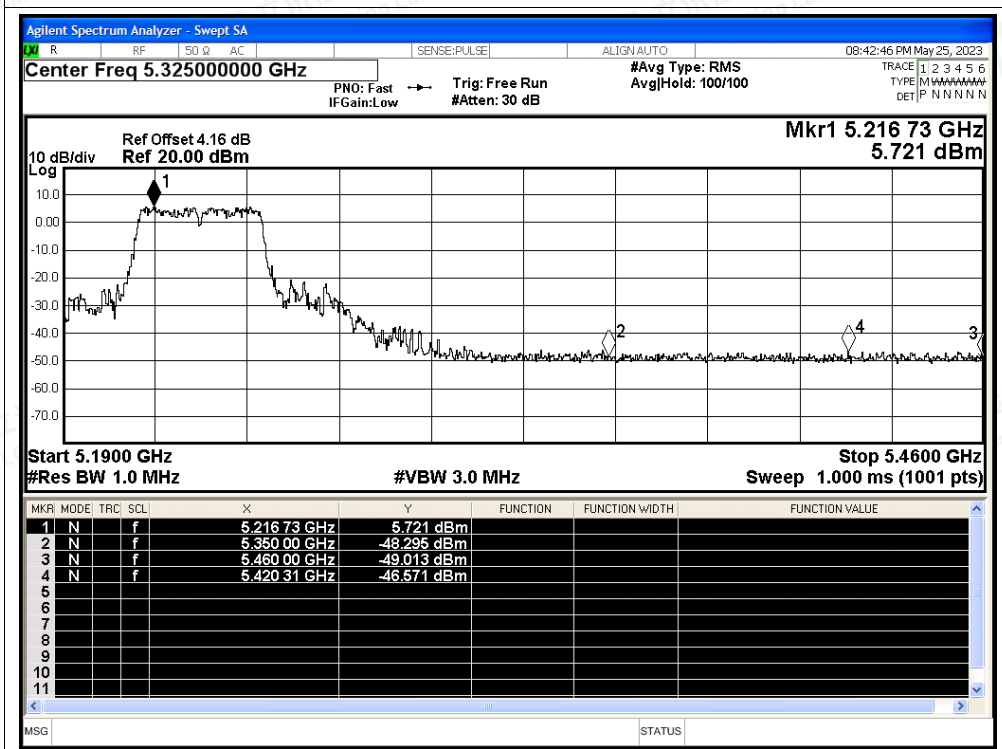


Restrict Band NVNT ac40 5230MHz Ant1 Average

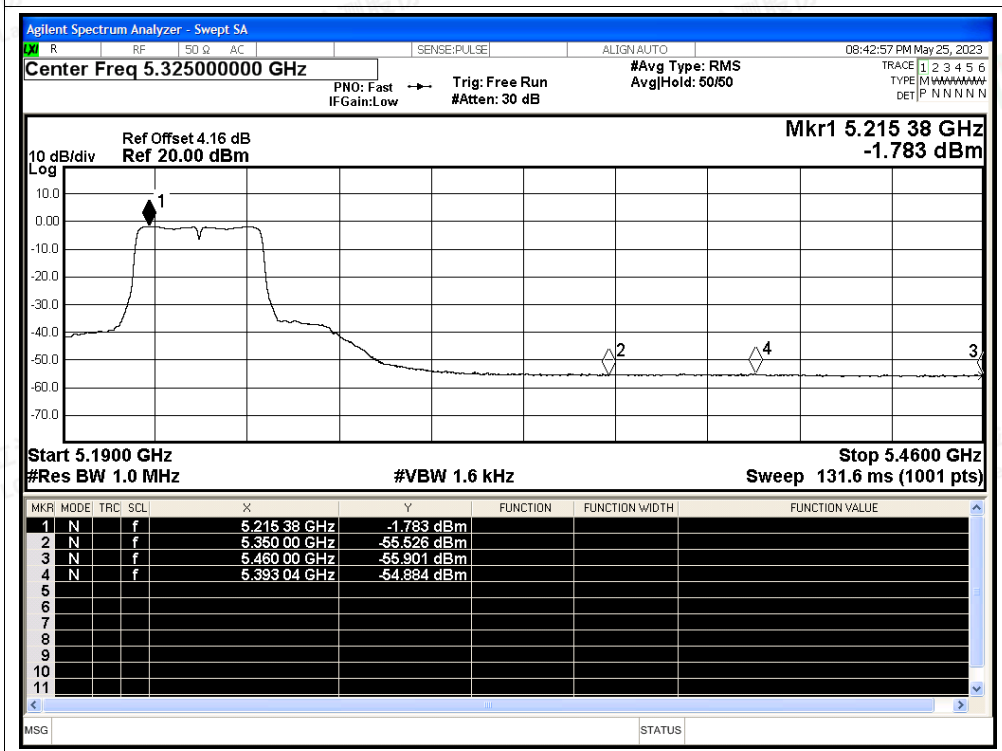




Restrict Band NVNT ac80 5210MHz Ant1 Peak

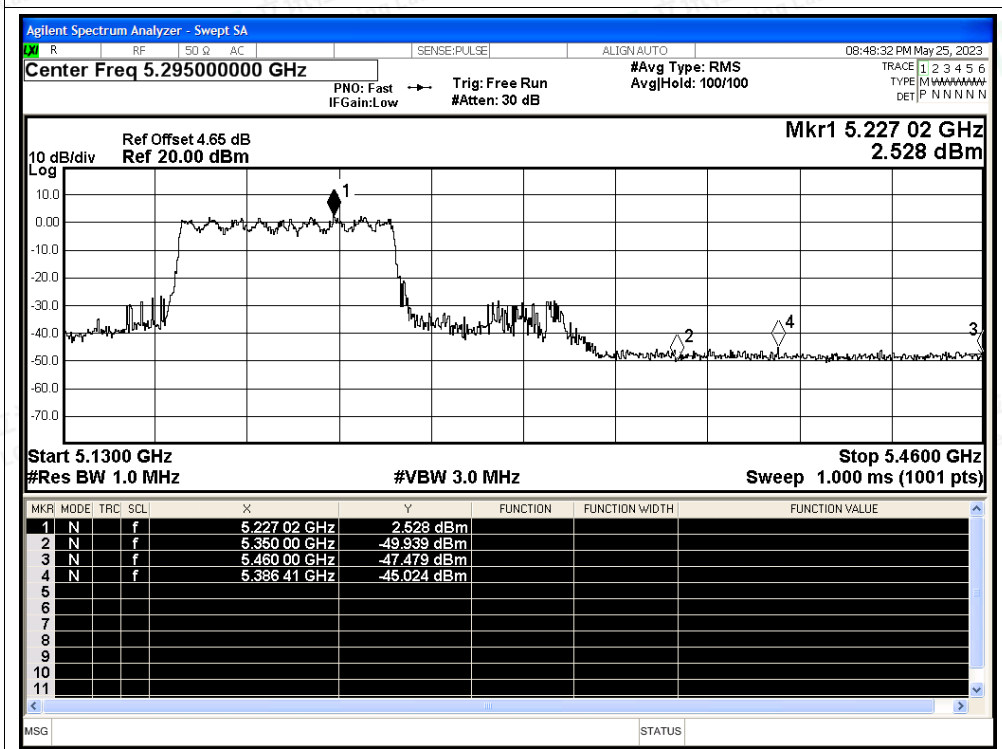


Restrict Band NVNT ac80 5210MHz Ant1 Average

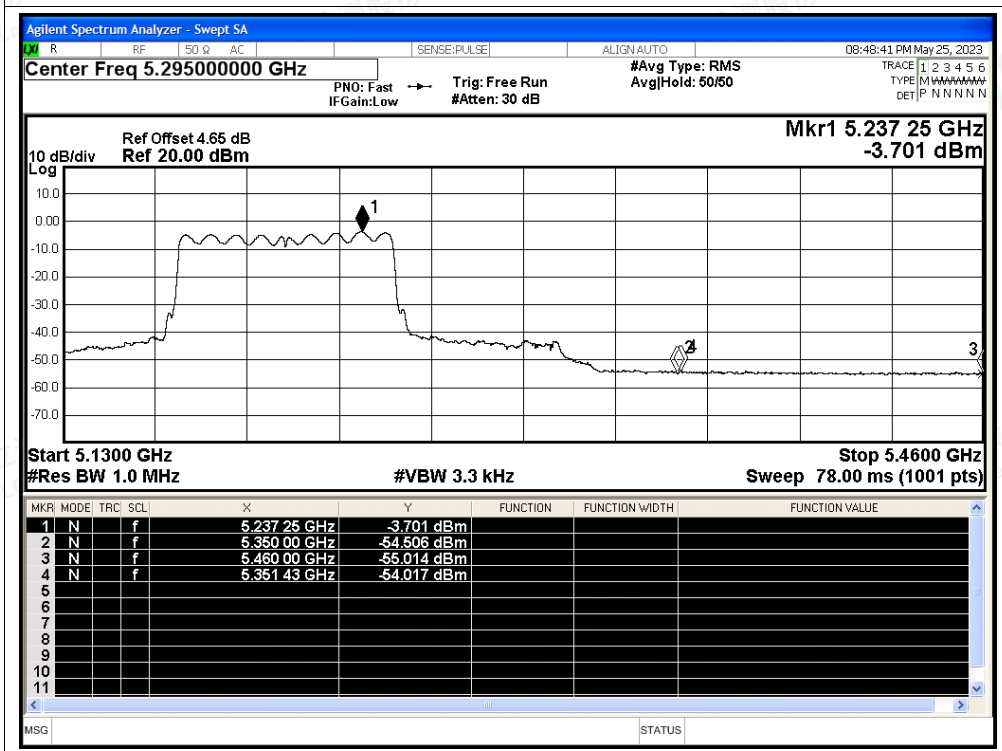




Restrict Band NVNT ac80 5210MHz Ant1 Peak

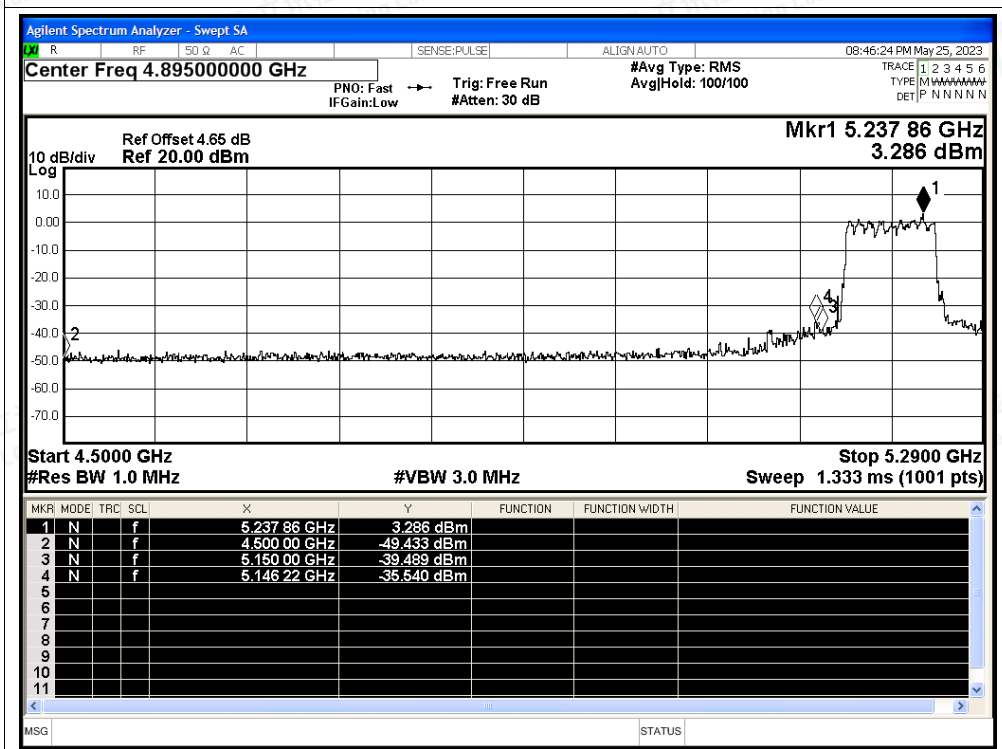

Restrict Band NVNT ac80 5210MHz Ant1 Average

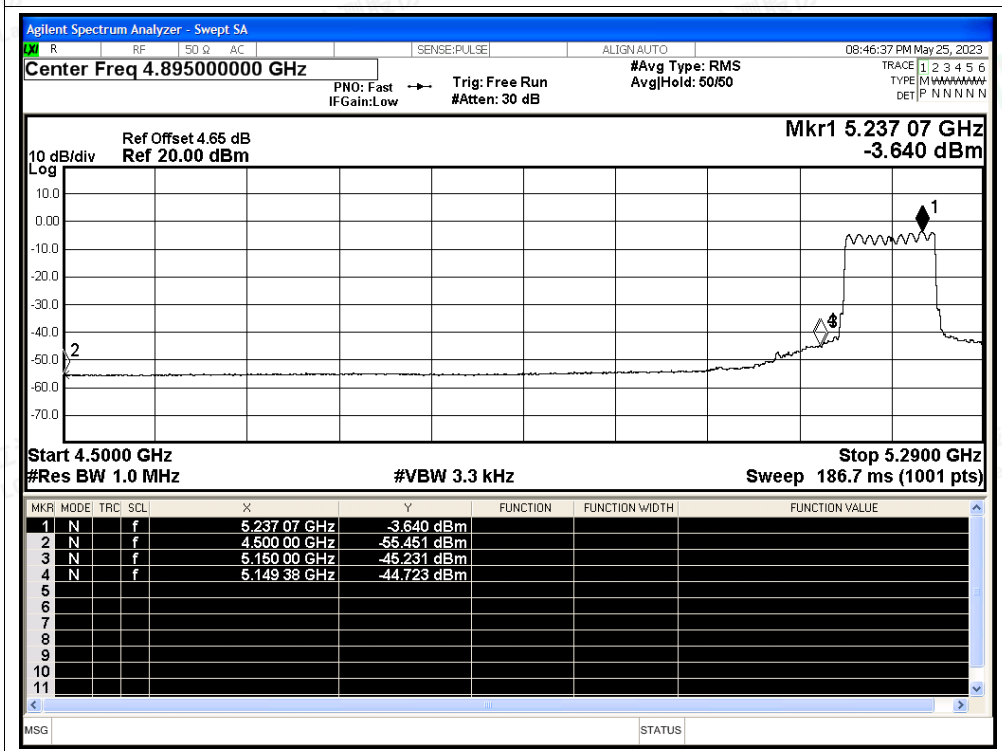



Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant2	4500	-45.04	2	52.19	Peak	68.2	Pass
NVNT	a	5180	Ant2	4500	-56.29	2	40.94	Average	54	Pass
NVNT	a	5180	Ant2	5149.6	-31.96	2	65.27	Peak	68.2	Pass
NVNT	a	5180	Ant2	5149.6	-44.39	2	52.84	Average	54	Pass
NVNT	a	5180	Ant2	5150	-38.02	2	59.21	Peak	68.2	Pass
NVNT	a	5180	Ant2	5150	-43.5	2	53.73	Average	54	Pass
NVNT	a	5240	Ant2	5350	-48.8	2	48.43	Peak	68.2	Pass
NVNT	a	5240	Ant2	5350	-56.33	2	40.9	Average	54	Pass
NVNT	a	5240	Ant2	5388.72	-46.04	2	51.19	Peak	68.2	Pass
NVNT	a	5240	Ant2	5384.4	-55.95	2	41.28	Average	54	Pass
NVNT	a	5240	Ant2	5460	-47.77	2	49.46	Peak	68.2	Pass
NVNT	a	5240	Ant2	5460	-56.2	2	41.03	Average	54	Pass
NVNT	n20	5180	Ant2	4500	-48.95	2	48.28	Peak	68.2	Pass
NVNT	n20	5180	Ant2	4500	-56.17	2	41.06	Average	54	Pass
NVNT	n20	5180	Ant2	5066.3	-45.14	2	52.09	Peak	68.2	Pass
NVNT	n20	5180	Ant2	5143.3	-54.39	2	42.84	Average	54	Pass
NVNT	n20	5180	Ant2	5150	-48.42	2	48.81	Peak	68.2	Pass
NVNT	n20	5180	Ant2	5150	-54.42	2	42.81	Average	54	Pass
NVNT	n20	5240	Ant2	5350	-50.03	2	47.2	Peak	68.2	Pass
NVNT	n20	5240	Ant2	5350	-56.38	2	40.85	Average	54	Pass
NVNT	n20	5240	Ant2	5430.24	-46.25	2	50.98	Peak	68.2	Pass
NVNT	n20	5240	Ant2	5444.16	-55.84	2	41.39	Average	54	Pass
NVNT	n20	5240	Ant2	5460	-49.78	2	47.45	Peak	68.2	Pass
NVNT	n20	5240	Ant2	5460	-56.1	2	41.13	Average	54	Pass
NVNT	n40	5190	Ant2	4500	-48.94	2	48.29	Peak	68.2	Pass
NVNT	n40	5190	Ant2	4500	-55.89	2	41.34	Average	54	Pass
NVNT	n40	5190	Ant2	4894.2	-44.64	2	52.59	Peak	68.2	Pass
NVNT	n40	5190	Ant2	5116.12	-54.09	2	43.14	Average	54	Pass
NVNT	n40	5190	Ant2	5150	-47.43	2	49.8	Peak	68.2	Pass
NVNT	n40	5190	Ant2	5150	-54.26	2	42.97	Average	54	Pass
NVNT	n40	5230	Ant2	5350	-49.15	2	48.08	Peak	68.2	Pass
NVNT	n40	5230	Ant2	5350	-55.96	2	41.27	Average	54	Pass
NVNT	n40	5230	Ant2	5413.83	-46.73	2	50.5	Peak	68.2	Pass
NVNT	n40	5230	Ant2	5434.35	-55.62	2	41.61	Average	54	Pass
NVNT	n40	5230	Ant2	5460	-48.04	2	49.19	Peak	68.2	Pass
NVNT	n40	5230	Ant2	5460	-55.66	2	41.57	Average	54	Pass
NVNT	ac20	5180	Ant2	4500	-48.71	2	48.52	Peak	68.2	Pass
NVNT	ac20	5180	Ant2	4500	-56.33	2	40.9	Average	54	Pass
NVNT	ac20	5180	Ant2	5064.9	-45.27	2	51.96	Peak	68.2	Pass






NVNT	ac20	5180	Ant2	5149.6	-54.3	2	42.93	Average	54	Pass
NVNT	ac20	5180	Ant2	5150	-46.4	2	50.83	Peak	68.2	Pass
NVNT	ac20	5180	Ant2	5150	-54.51	2	42.72	Average	54	Pass
NVNT	ac20	5240	Ant2	5350	-49.98	2	47.25	Peak	68.2	Pass
NVNT	ac20	5240	Ant2	5350	-56.27	2	40.96	Average	54	Pass
NVNT	ac20	5240	Ant2	5448.96	-46	2	51.23	Peak	68.2	Pass
NVNT	ac20	5240	Ant2	5380.08	-55.85	2	41.38	Average	54	Pass
NVNT	ac20	5240	Ant2	5460	-48.03	2	49.2	Peak	68.2	Pass
NVNT	ac20	5240	Ant2	5460	-56.18	2	41.05	Average	54	Pass
NVNT	ac40	5190	Ant2	4500	-48.55	2	48.68	Peak	68.2	Pass
NVNT	ac40	5190	Ant2	4500	-56.06	2	41.17	Average	54	Pass
NVNT	ac40	5190	Ant2	5077.43	-44.64	2	52.59	Peak	68.2	Pass
NVNT	ac40	5190	Ant2	5148.24	-54.19	2	43.04	Average	54	Pass
NVNT	ac40	5190	Ant2	5150	-47.45	2	49.78	Peak	68.2	Pass
NVNT	ac40	5190	Ant2	5150	-54.38	2	42.85	Average	54	Pass
NVNT	ac40	5230	Ant2	5350	-48.3	2	48.93	Peak	68.2	Pass
NVNT	ac40	5230	Ant2	5350	-55.99	2	41.24	Average	54	Pass
NVNT	ac40	5230	Ant2	5400.33	-46.05	2	51.18	Peak	68.2	Pass
NVNT	ac40	5230	Ant2	5371.98	-55.58	2	41.65	Average	54	Pass
NVNT	ac40	5230	Ant2	5460	-49.2	2	48.03	Peak	68.2	Pass
NVNT	ac40	5230	Ant2	5460	-55.98	2	41.25	Average	54	Pass
NVNT	ac80	5210	Ant2	5350	-49	2	48.23	Peak	68.2	Pass
NVNT	ac80	5210	Ant2	5350	-55.28	2	41.95	Average	54	Pass
NVNT	ac80	5210	Ant2	5381.46	-46.05	2	51.18	Peak	68.2	Pass
NVNT	ac80	5210	Ant2	5418.75	-54.57	2	42.66	Average	54	Pass
NVNT	ac80	5210	Ant2	5460	-48.41	2	48.82	Peak	68.2	Pass
NVNT	ac80	5210	Ant2	5460	-54.94	2	42.29	Average	54	Pass
NVNT	ac80	5210	Ant2	4500	-48.42	2	48.81	Peak	68.2	Pass
NVNT	ac80	5210	Ant2	4500	-55.77	2	41.46	Average	54	Pass
NVNT	ac80	5210	Ant2	5102.77	-45.48	2	51.75	Peak	68.2	Pass
NVNT	ac80	5210	Ant2	5149.38	-52.82	2	44.41	Average	54	Pass
NVNT	ac80	5210	Ant2	5150	-48.32	2	48.91	Peak	68.2	Pass
NVNT	ac80	5210	Ant2	5150	-53.08	2	44.15	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant2 Peak

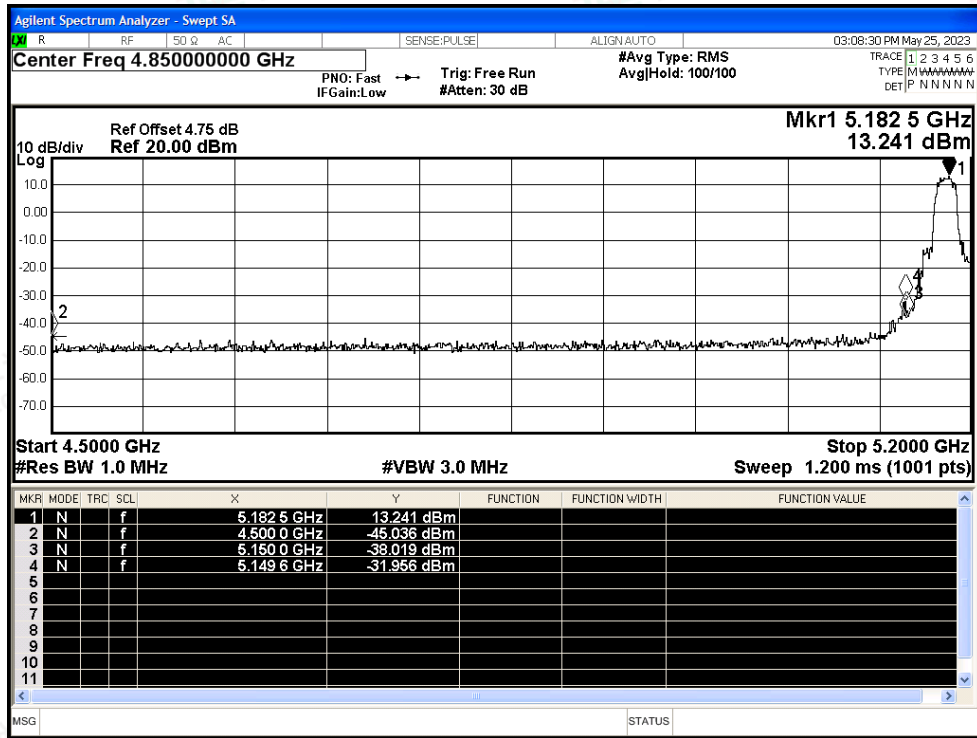


Restrict Band NVNT a 5180MHz Ant2 Average

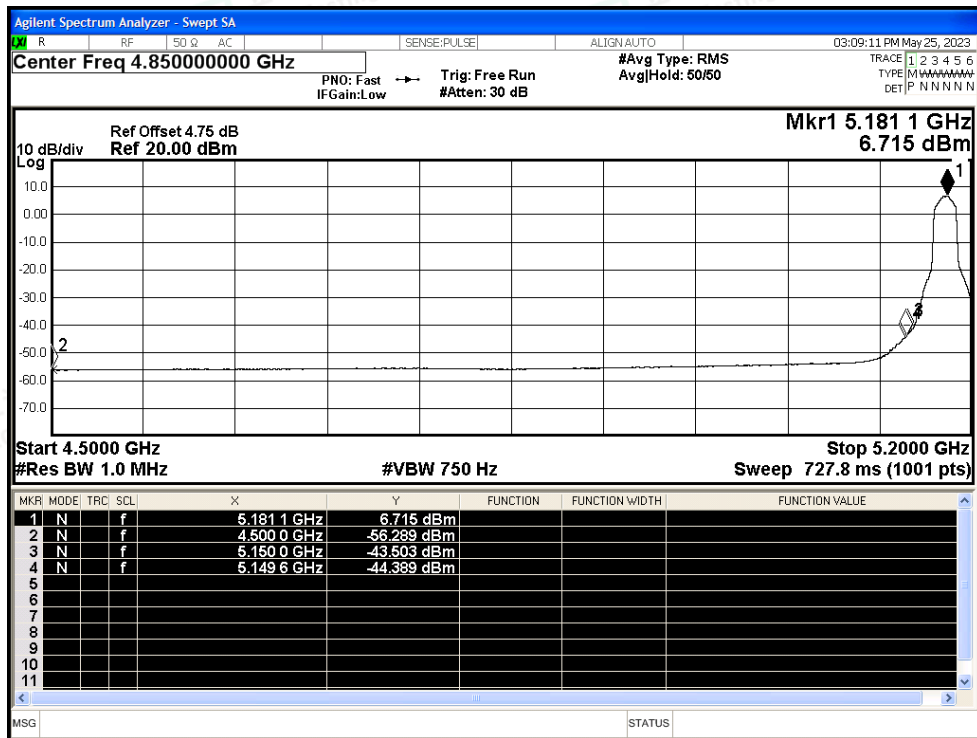




Restrict Band NVNT a 5240MHz Ant2 Peak

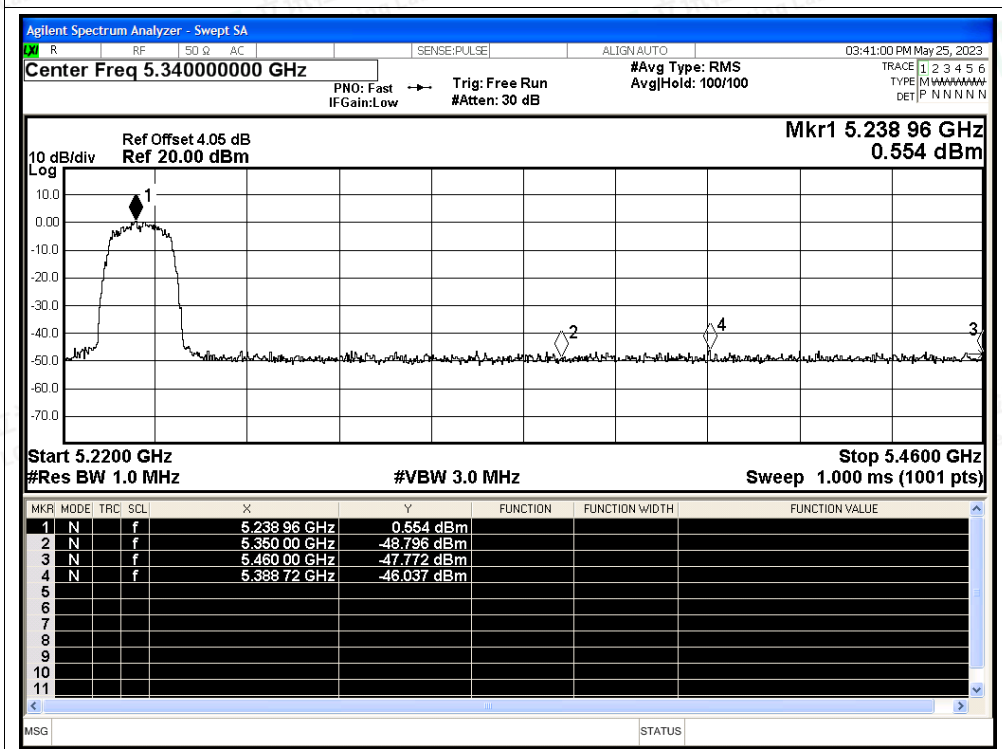


Restrict Band NVNT a 5240MHz Ant2 Average

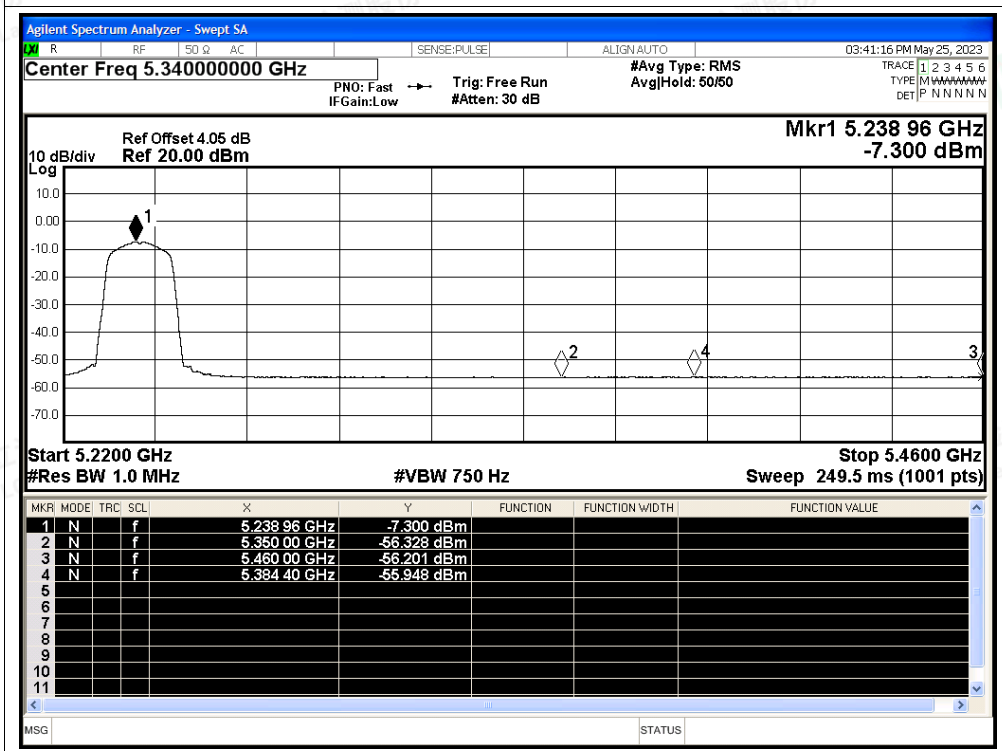




Restrict Band NVNT n20 5180MHz Ant2 Peak

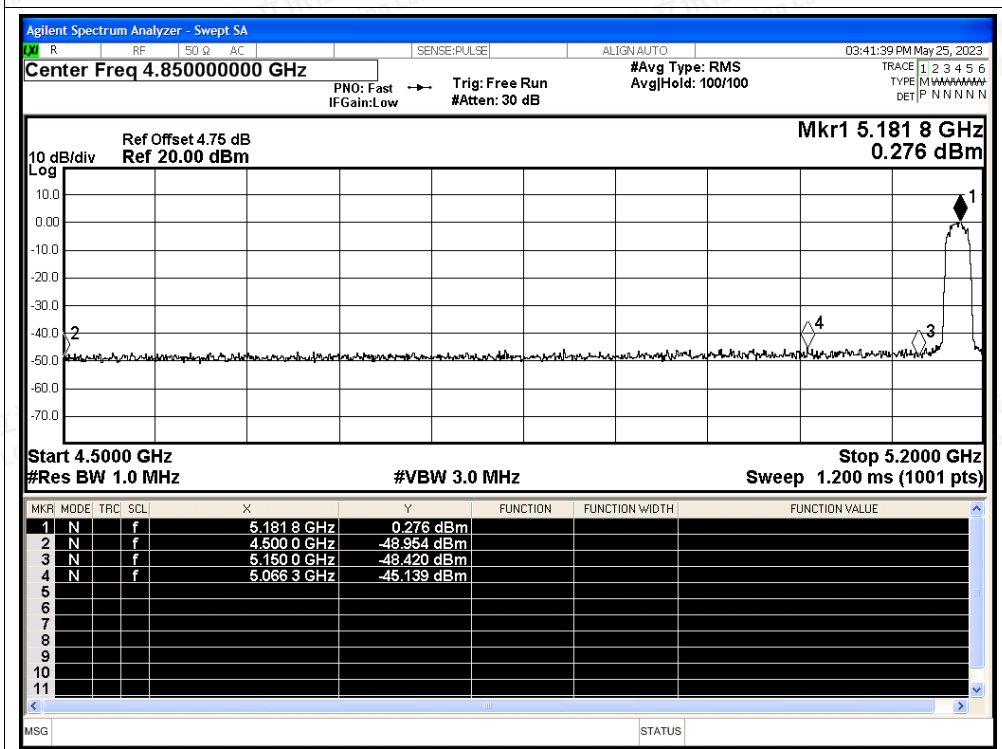


Restrict Band NVNT n20 5180MHz Ant2 Average

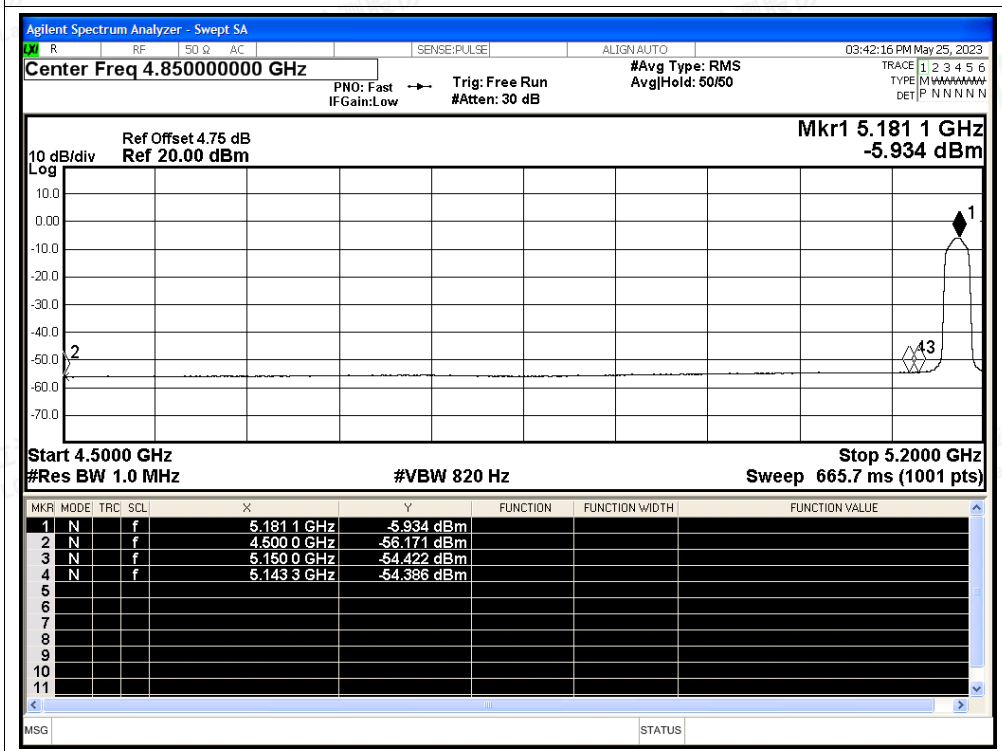




Restrict Band NVNT n20 5240MHz Ant2 Peak

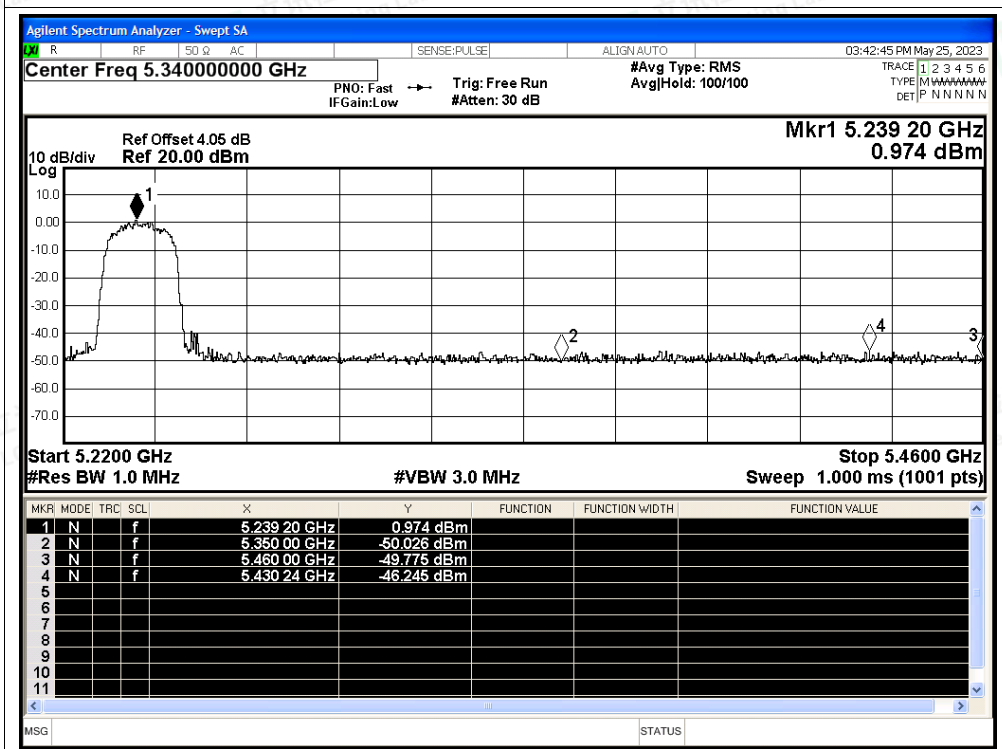


Restrict Band NVNT n20 5240MHz Ant2 Average

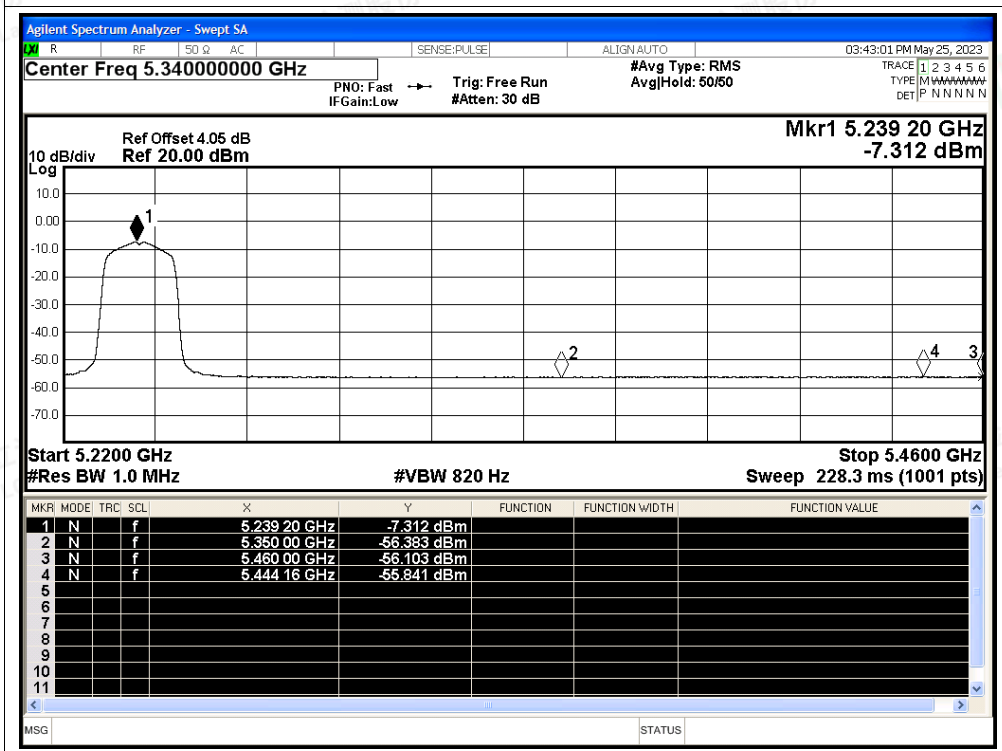




Restrict Band NVNT n40 5190MHz Ant2 Peak

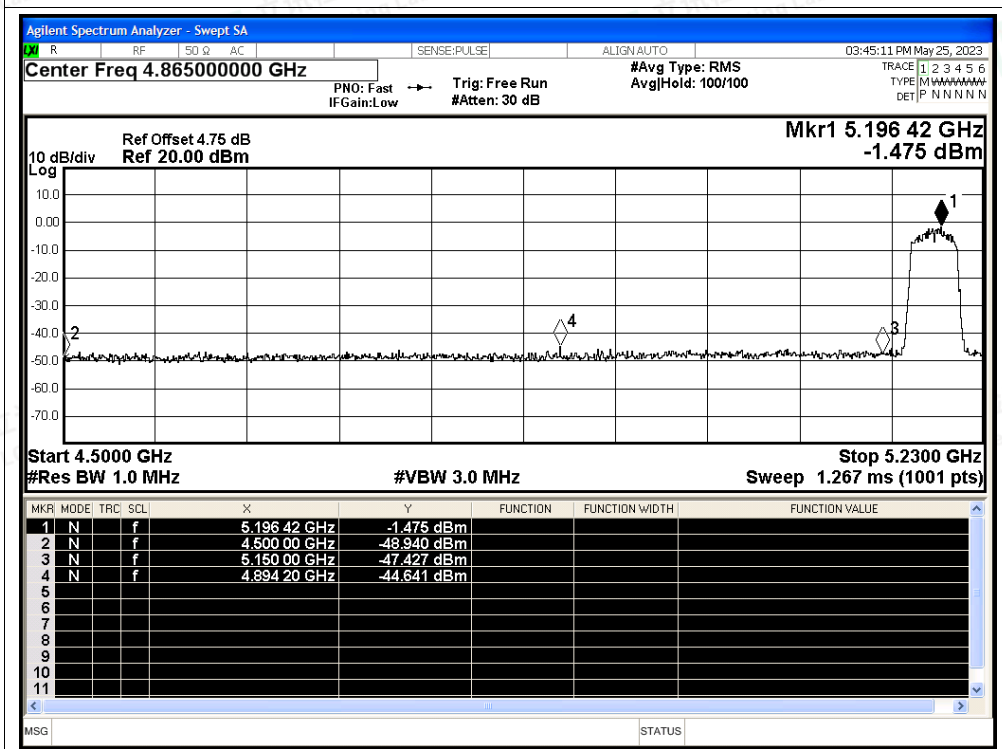


Restrict Band NVNT n40 5190MHz Ant2 Average

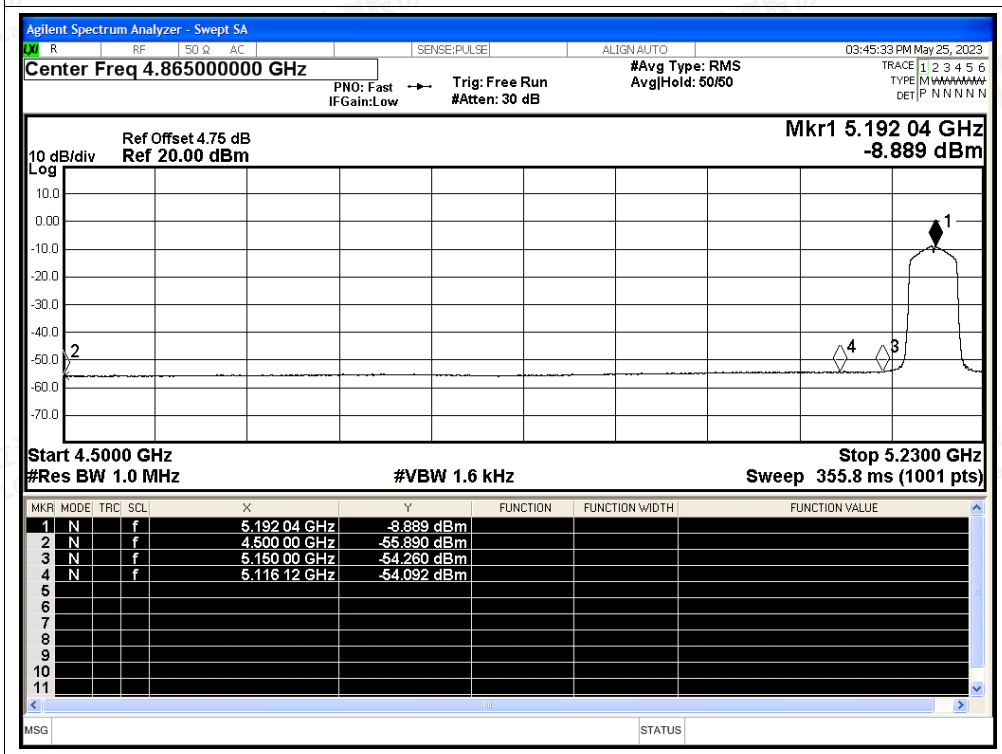




Restrict Band NVNT n40 5230MHz Ant2 Peak

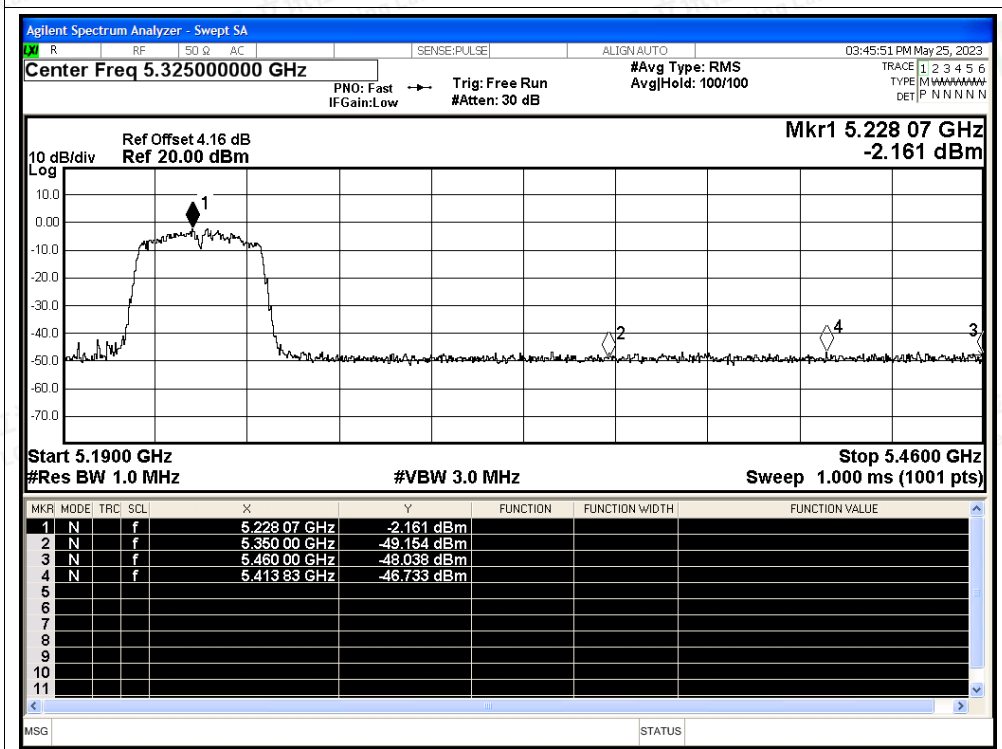


Restrict Band NVNT n40 5230MHz Ant2 Average

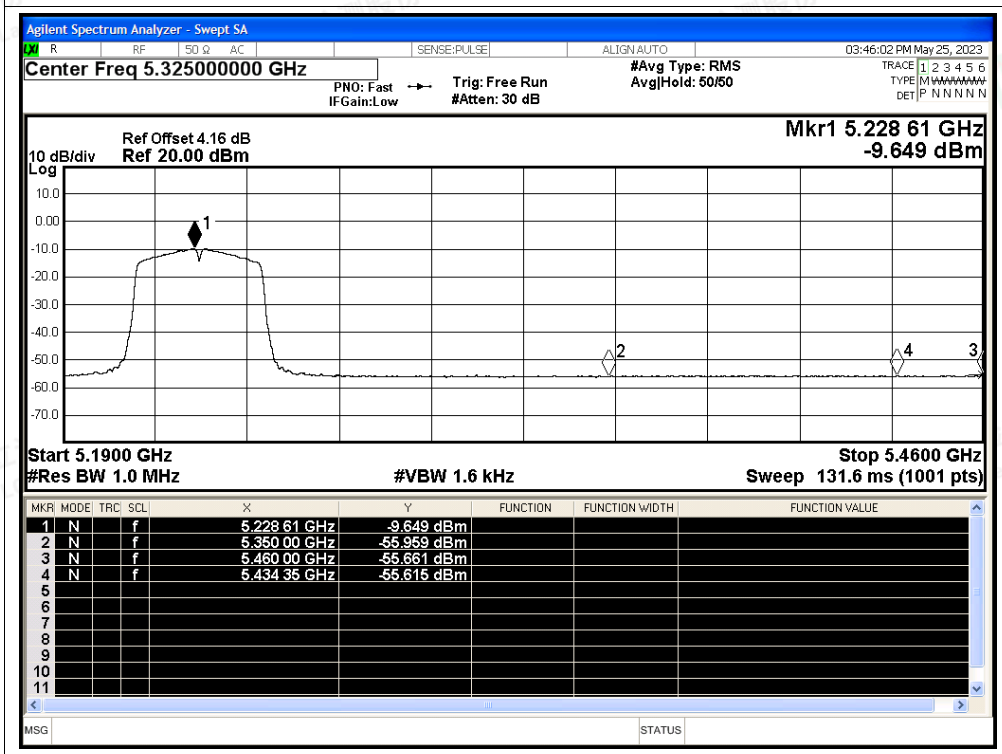




Restrict Band NVNT ac20 5180MHz Ant2 Peak

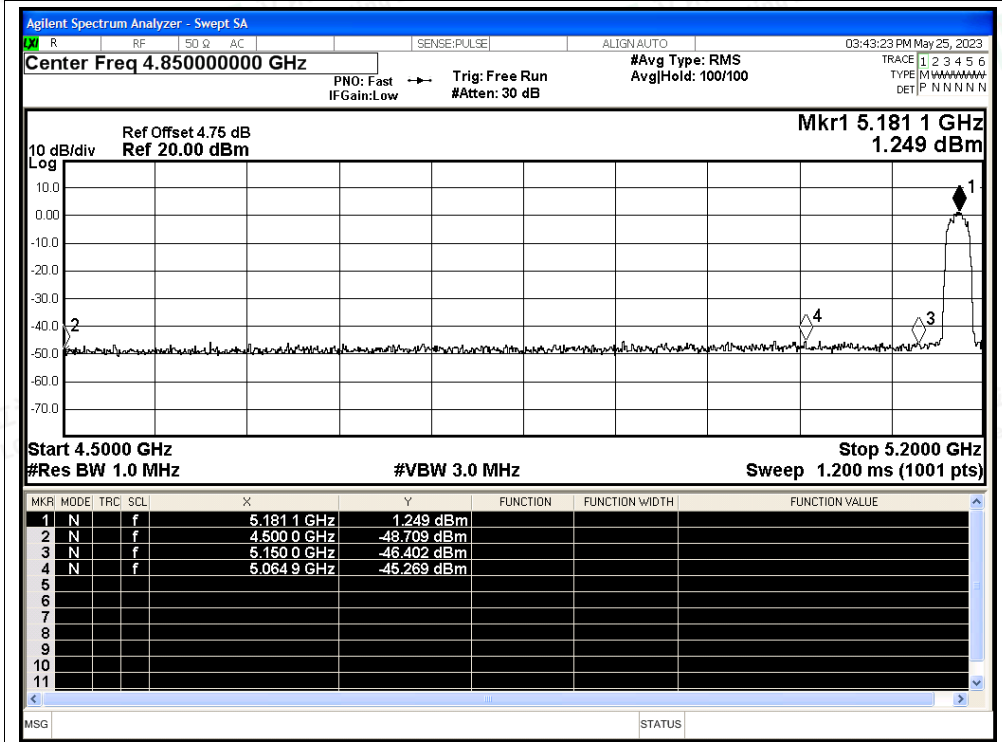


Restrict Band NVNT ac20 5180MHz Ant2 Average

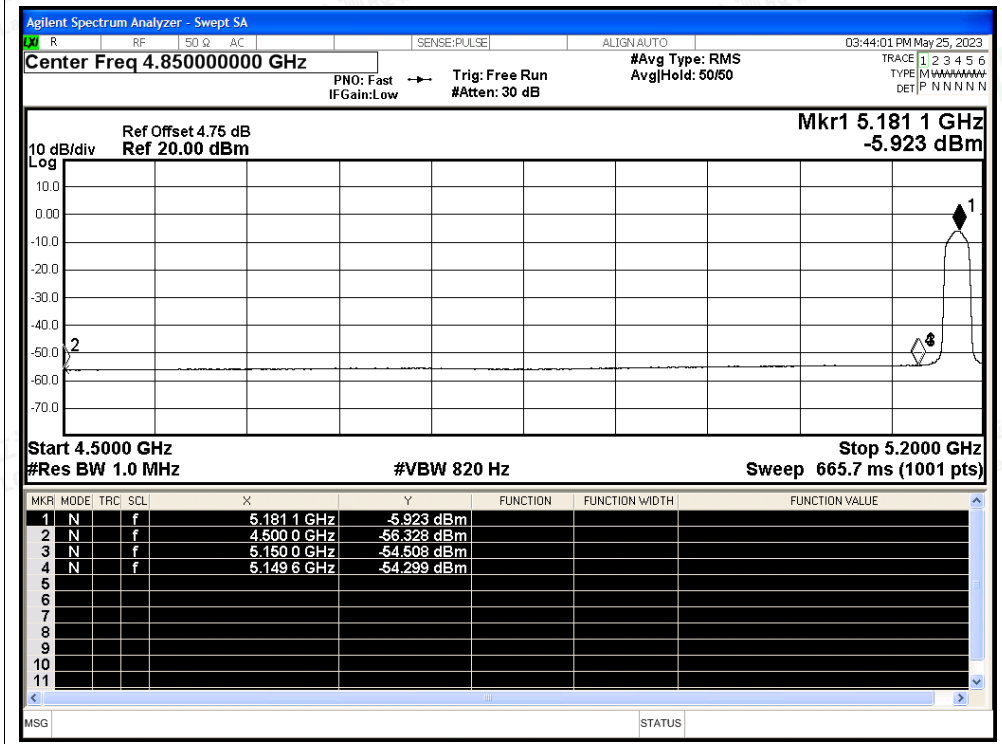




Restrict Band NVNT ac20 5240MHz Ant2 Peak

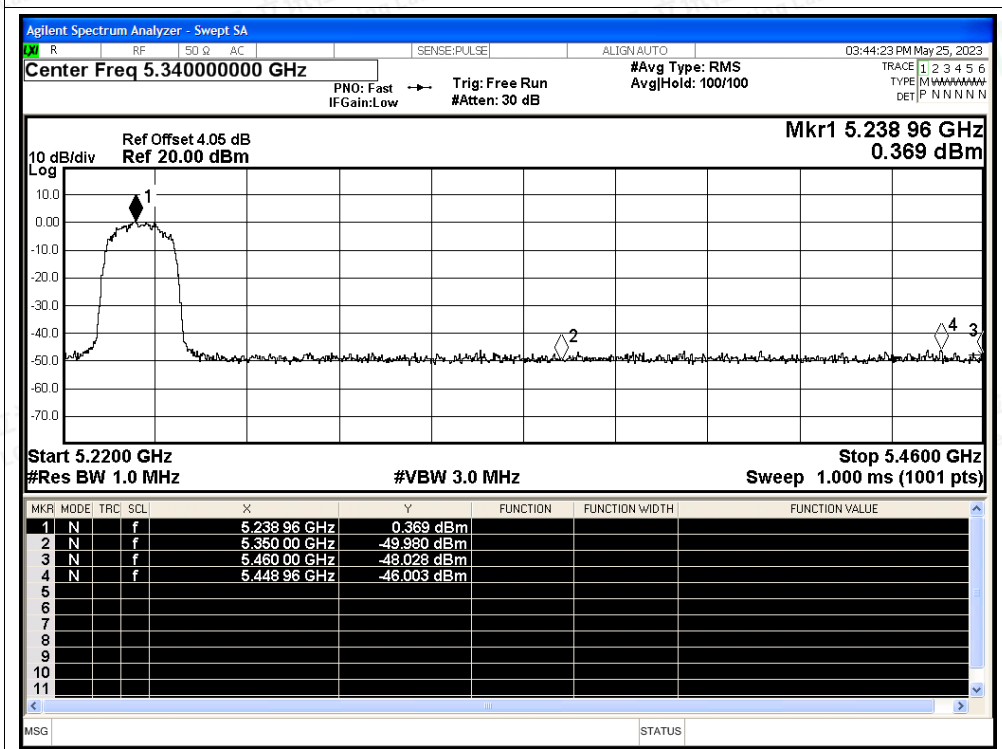


Restrict Band NVNT ac20 5240MHz Ant2 Average

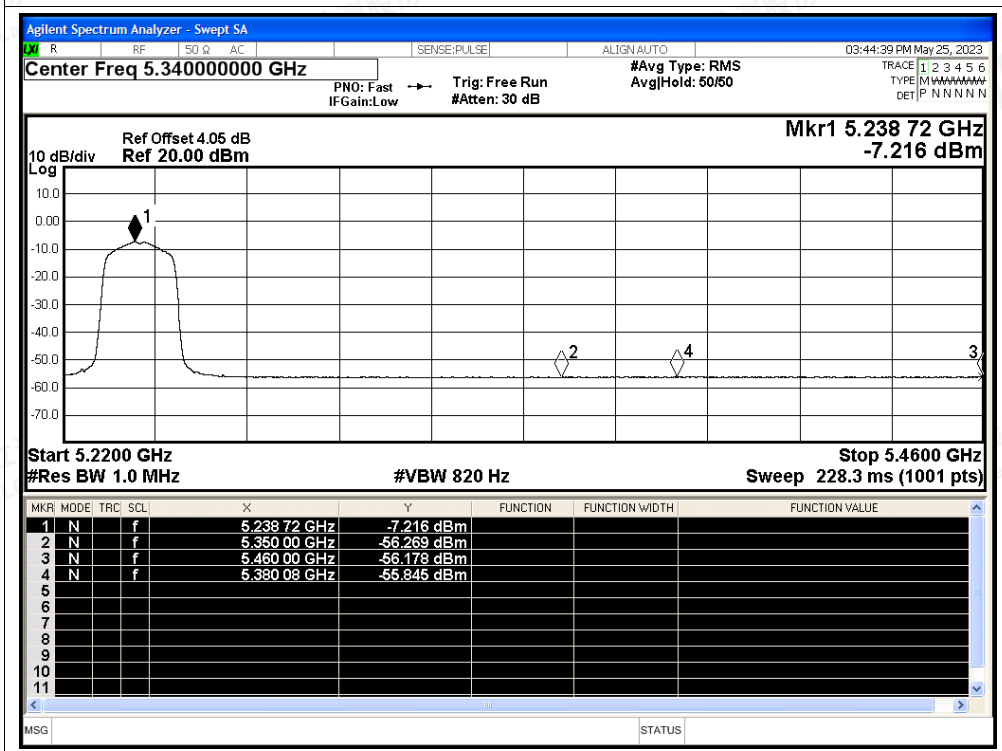




Restrict Band NVNT ac40 5190MHz Ant2 Peak

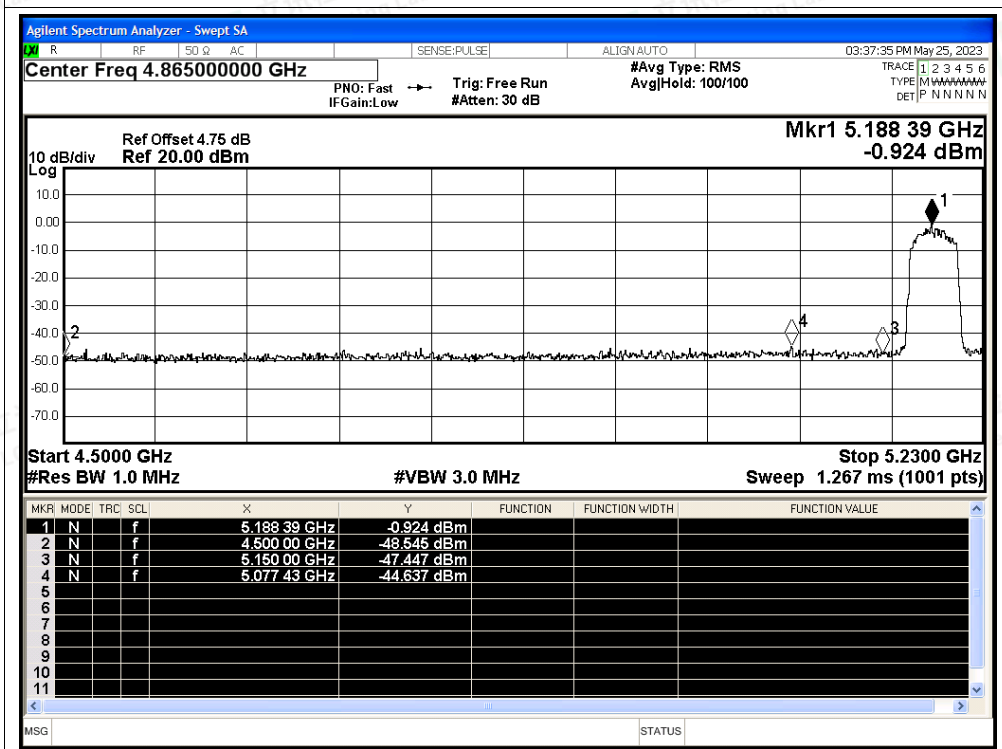


Restrict Band NVNT ac40 5190MHz Ant2 Average

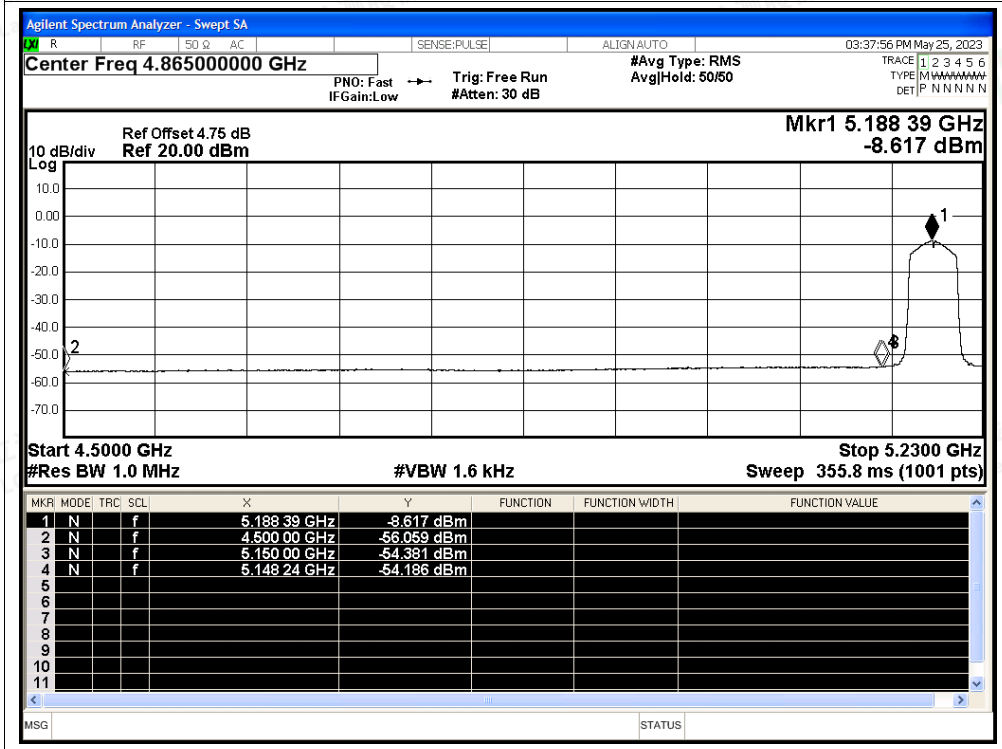




Restrict Band NVNT ac40 5230MHz Ant2 Peak

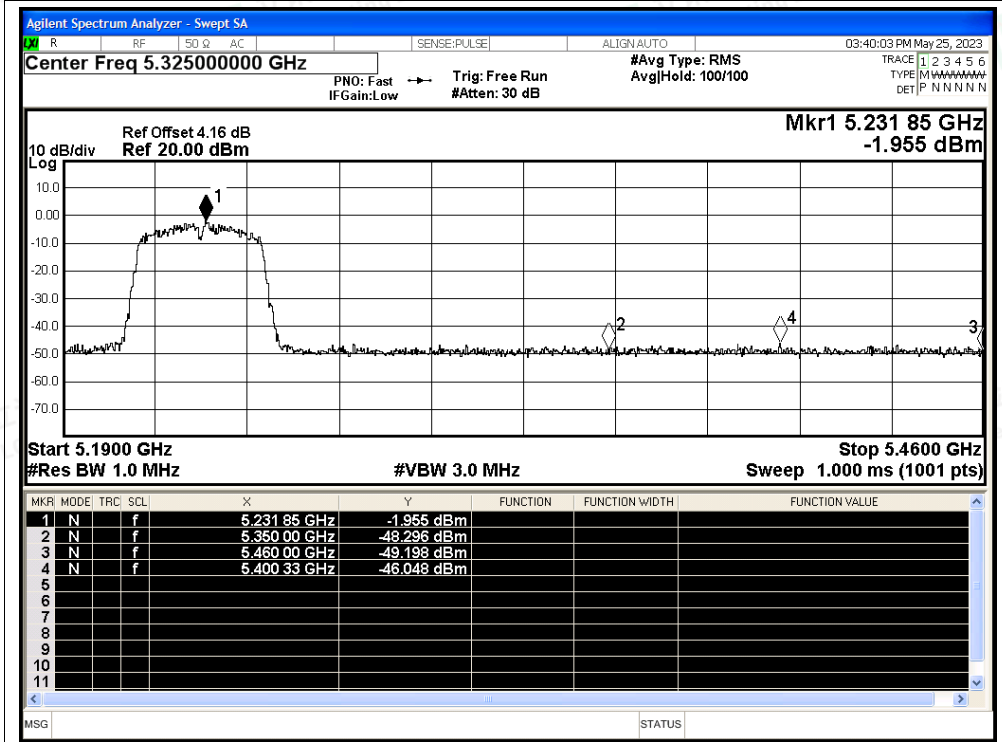


Restrict Band NVNT ac40 5230MHz Ant2 Average

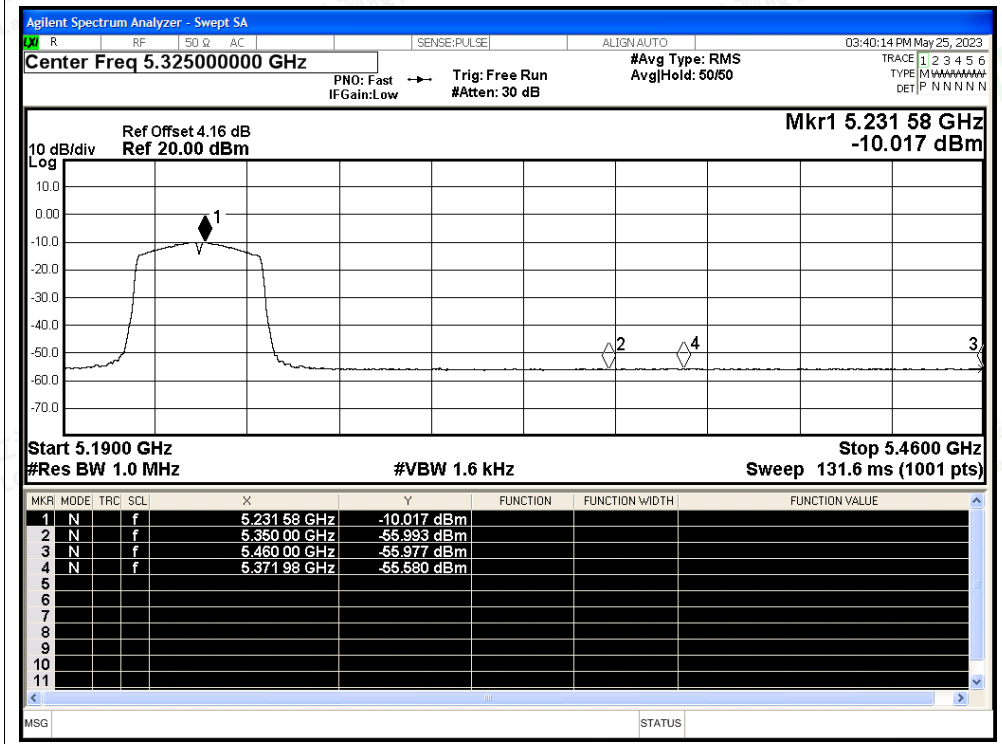




Restrict Band NVNT ac80 5210MHz Ant2 Peak

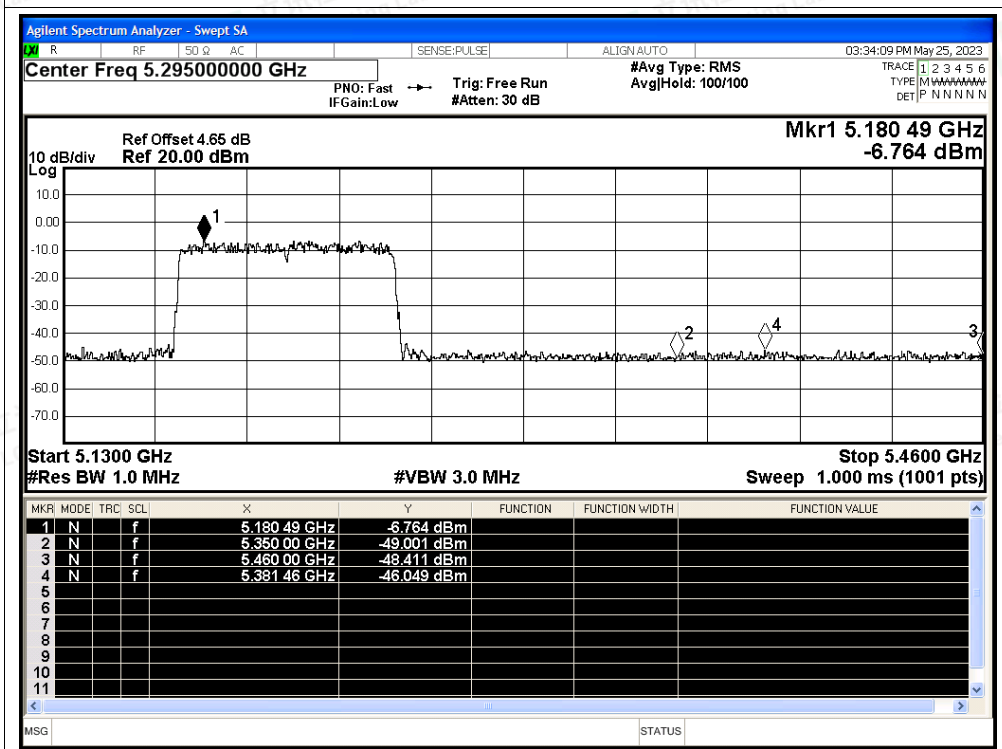


Restrict Band NVNT ac80 5210MHz Ant2 Average

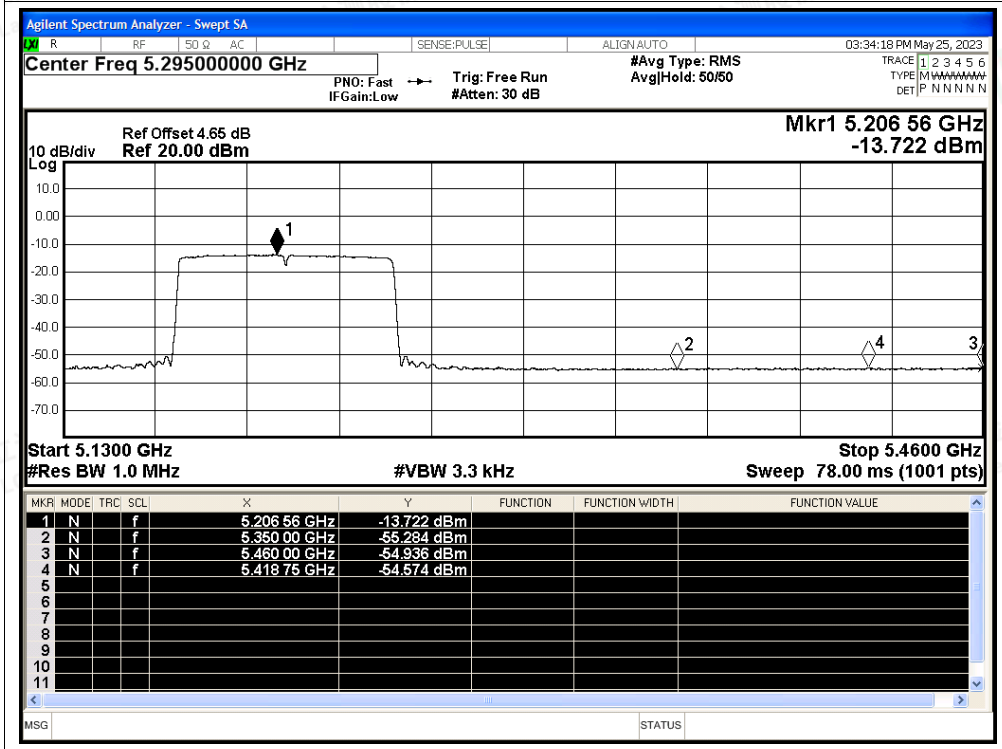




Restrict Band NVNT ac80 5210MHz Ant2 Peak

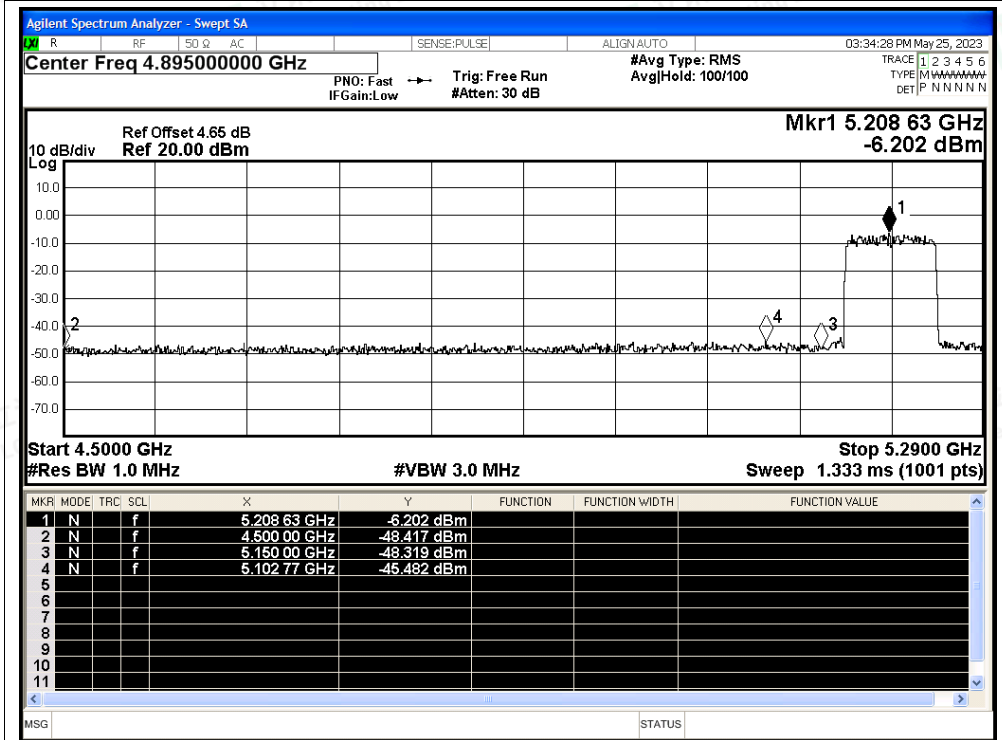

Restrict Band NVNT ac80 5210MHz Ant2 Average

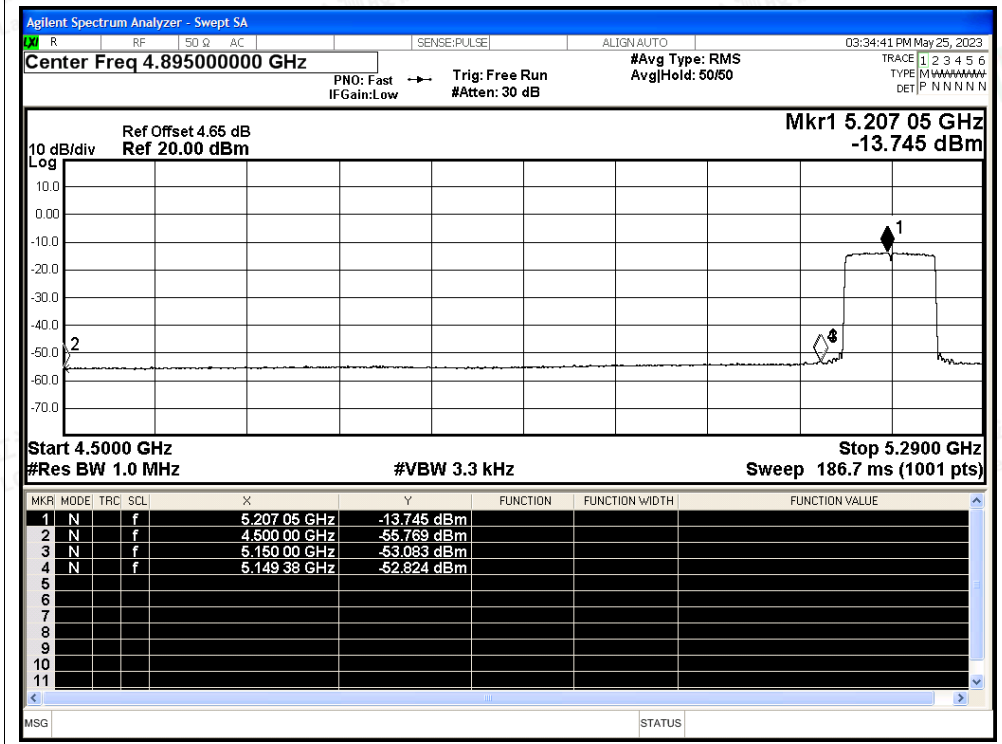



MIMO

Condition	Mode	Frequency (MHz)	ANT1 Power (dBm)	ANT2 Power (dBm)	Gain (dBi)	Total E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	n20	5180	-49.20	-49.25	5.67	54.68	Peak	68.2	Pass
NVNT	n20	5180	-56.80	-56.50	5.67	47.26	Average	54	Pass
NVNT	n20	5180	-34.15	-45.35	5.67	67.07	Peak	68.2	Pass
NVNT	n20	5180	-48.28	-54.63	5.67	53.52	Average	54	Pass
NVNT	n20	5180	-36.67	-48.73	5.67	64.49	Peak	68.2	Pass
NVNT	n20	5180	-50.53	-54.65	5.67	51.79	Average	54	Pass
NVNT	n20	5240	-50.54	-50.38	5.67	53.45	Peak	68.2	Pass
NVNT	n20	5240	-56.17	-56.69	5.67	47.49	Average	54	Pass
NVNT	n20	5240	-46.59	-46.50	5.67	57.36	Peak	68.2	Pass
NVNT	n20	5240	-55.80	-56.15	5.67	47.94	Average	54	Pass
NVNT	n20	5240	-48.49	-50.11	5.67	54.68	Peak	68.2	Pass
NVNT	n20	5240	-56.58	-56.27	5.67	47.49	Average	54	Pass
NVNT	n40	5190	-50.79	-49.12	5.67	54.03	Peak	68.2	Pass
NVNT	n40	5190	-56.38	-56.18	5.67	47.63	Average	54	Pass
NVNT	n40	5190	-33.59	-44.89	5.67	67.62	Peak	68.2	Pass
NVNT	n40	5190	-49.69	-54.16	5.67	52.53	Average	54	Pass
NVNT	n40	5190	-33.80	-47.69	5.67	67.27	Peak	68.2	Pass
NVNT	n40	5190	-49.93	-54.50	5.67	52.27	Average	54	Pass
NVNT	n40	5230	-49.82	-49.42	5.67	54.29	Peak	68.2	Pass
NVNT	n40	5230	-56.16	-56.24	5.67	47.71	Average	54	Pass
NVNT	n40	5230	-46.38	-47.07	5.67	57.20	Peak	68.2	Pass
NVNT	n40	5230	-55.28	-55.94	5.67	48.31	Average	54	Pass
NVNT	n40	5230	-49.23	-48.27	5.67	55.18	Peak	68.2	Pass
NVNT	n40	5230	-56.33	-55.94	5.67	47.78	Average	54	Pass
NVNT	ac20	5180	-50.67	-48.86	5.67	54.24	Peak	68.2	Pass
NVNT	ac20	5180	-56.73	-56.55	5.67	47.27	Average	54	Pass
NVNT	ac20	5180	-45.59	-45.50	5.67	58.36	Peak	68.2	Pass
NVNT	ac20	5180	-54.55	-54.49	5.67	49.39	Average	54	Pass
NVNT	ac20	5180	-47.51	-46.70	5.67	56.82	Peak	68.2	Pass
NVNT	ac20	5180	-54.59	-54.80	5.67	49.21	Average	54	Pass
NVNT	ac20	5240	-49.71	-50.30	5.67	53.91	Peak	68.2	Pass
NVNT	ac20	5240	-56.11	-56.49	5.67	47.61	Average	54	Pass
NVNT	ac20	5240	-46.25	-46.44	5.67	57.56	Peak	68.2	Pass
NVNT	ac20	5240	-55.91	-56.19	5.67	47.86	Average	54	Pass
NVNT	ac20	5240	-50.22	-48.40	5.67	54.69	Peak	68.2	Pass
NVNT	ac20	5240	-56.61	-56.41	5.67	47.40	Average	54	Pass
NVNT	ac40	5190	-49.76	-48.93	5.67	54.58	Peak	68.2	Pass





NVNT	ac40	5190	-56.52	-56.26	5.67	47.52	Average	54	Pass
NVNT	ac40	5190	-37.49	-45.00	5.67	64.12	Peak	68.2	Pass
NVNT	ac40	5190	-50.00	-54.35	5.67	52.26	Average	54	Pass
NVNT	ac40	5190	-41.67	-47.67	5.67	60.20	Peak	68.2	Pass
NVNT	ac40	5190	-49.75	-54.46	5.67	52.41	Average	54	Pass
NVNT	ac40	5230	-48.81	-48.51	5.67	55.25	Peak	68.2	Pass
NVNT	ac40	5230	-55.94	-56.35	5.67	47.77	Average	54	Pass
NVNT	ac40	5230	-47.30	-46.30	5.67	57.14	Peak	68.2	Pass
NVNT	ac40	5230	-55.58	-55.73	5.67	48.25	Average	54	Pass
NVNT	ac40	5230	-49.76	-49.41	5.67	54.33	Peak	68.2	Pass
NVNT	ac40	5230	-56.65	-56.26	5.67	47.46	Average	54	Pass
NVNT	ac80	5210	-50.64	-49.25	5.67	54.02	Peak	68.2	Pass
NVNT	ac80	5210	-55.08	-55.56	5.67	48.59	Average	54	Pass
NVNT	ac80	5210	-45.81	-46.35	5.67	57.84	Peak	68.2	Pass
NVNT	ac80	5210	-55.04	-54.97	5.67	48.90	Average	54	Pass
NVNT	ac80	5210	-48.25	-48.63	5.67	55.47	Peak	68.2	Pass
NVNT	ac80	5210	-55.54	-55.21	5.67	48.54	Average	54	Pass
NVNT	ac80	5210	-50.21	-48.62	5.67	54.57	Peak	68.2	Pass
NVNT	ac80	5210	-56.27	-55.91	5.67	47.82	Average	54	Pass
NVNT	ac80	5210	-36.43	-45.74	5.67	64.95	Peak	68.2	Pass
NVNT	ac80	5210	-50.33	-53.14	5.67	52.40	Average	54	Pass
NVNT	ac80	5210	-40.12	-48.49	5.67	61.37	Peak	68.2	Pass
NVNT	ac80	5210	-50.01	-53.15	5.67	52.61	Average	54	Pass





D.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
NVNT	n40	5230	Ant1	5230	0	0	25	Pass
NVNT	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
NVNT	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
NVNT	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	ac40	5190	Ant1	5190	0	0	25	Pass
NVNT	ac40	5230	Ant1	5230	0	0	25	Pass
NVNT	ac80	5210	Ant1	5210	0	0	25	Pass

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	n40	5190	Ant2	5190.04	40000	7.71	25	Pass
NVNT	n40	5230	Ant2	5229.96	-40000	-7.65	25	Pass
NVNT	ac20	5180	Ant2	5180	0	0	25	Pass
NVNT	ac20	5200	Ant2	5199.98	-20000	-3.85	25	Pass
NVNT	ac20	5240	Ant2	5240	0	0	25	Pass
NVNT	ac40	5190	Ant2	5190	0	0	25	Pass
NVNT	ac40	5230	Ant2	5230	0	0	25	Pass
NVNT	ac80	5210	Ant2	5210	0	0	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Freq. Stability NVNT n40 5190MHz Ant1

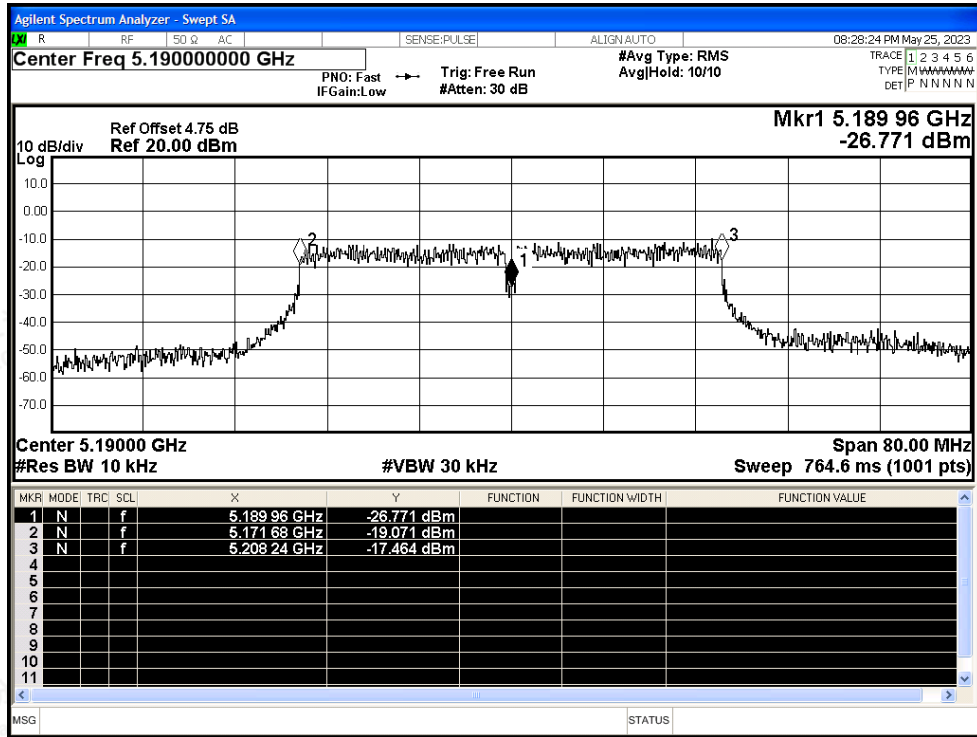


Freq. Stability NVNT n40 5230MHz Ant1

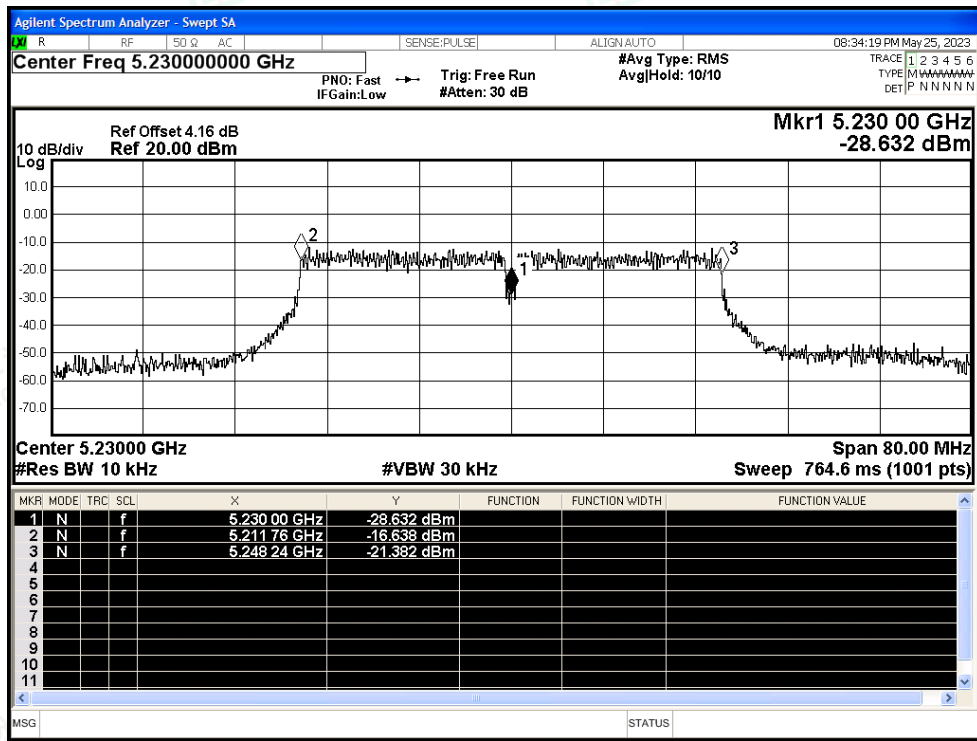




Freq. Stability NVNT ac20 5180MHz Ant1

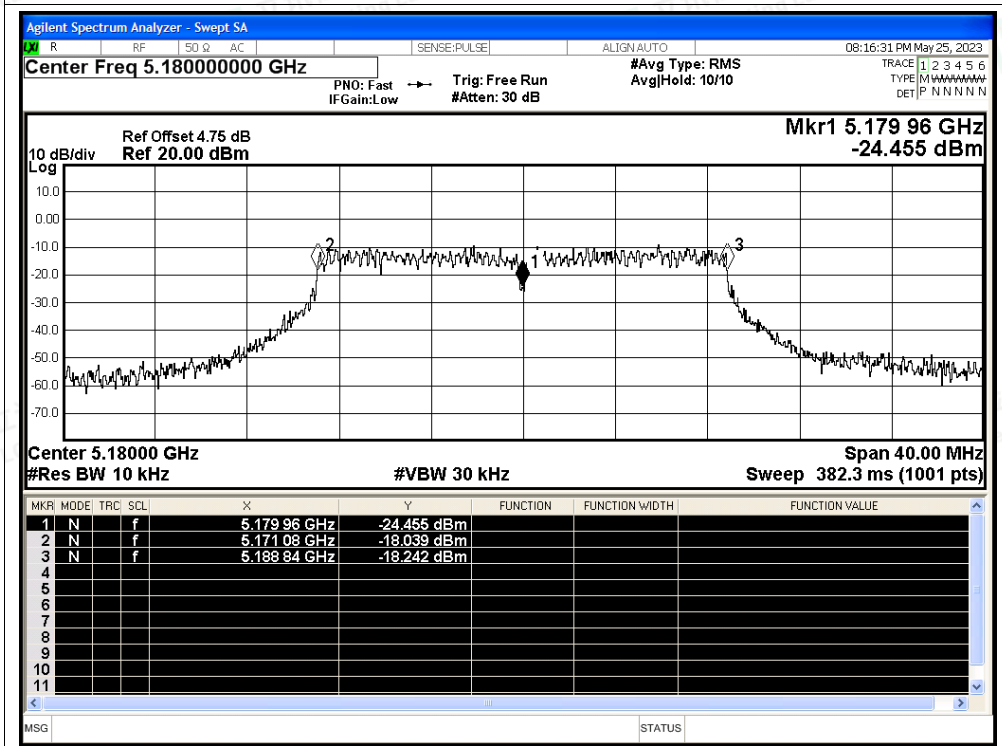


Freq. Stability NVNT ac20 5200MHz Ant1

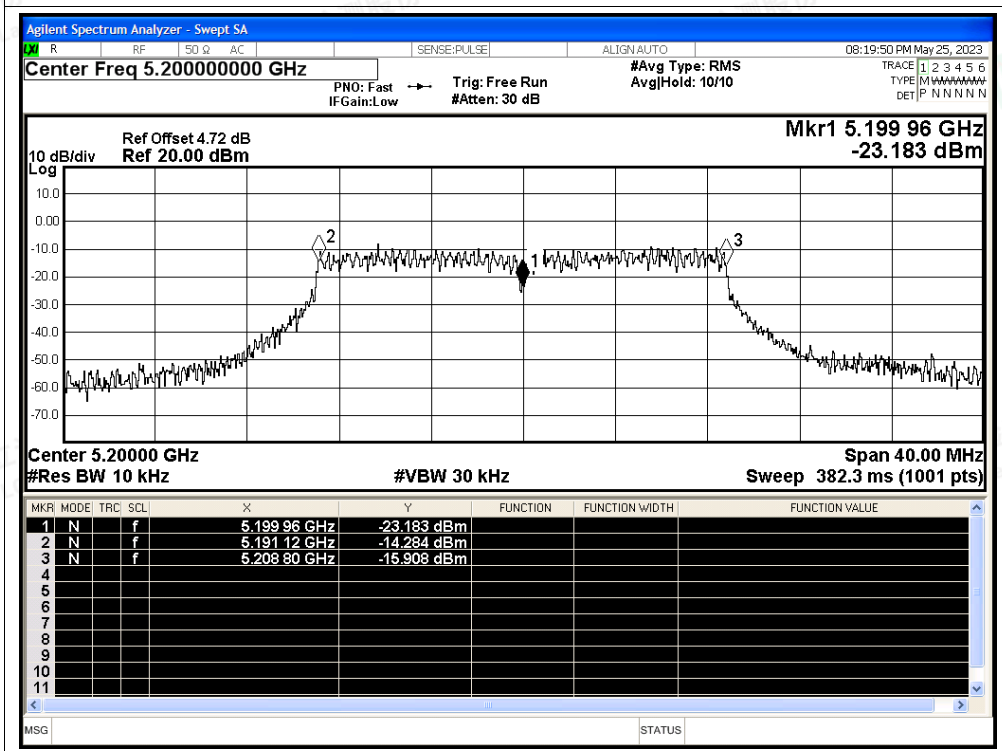




Freq. Stability NVNT ac20 5240MHz Ant1

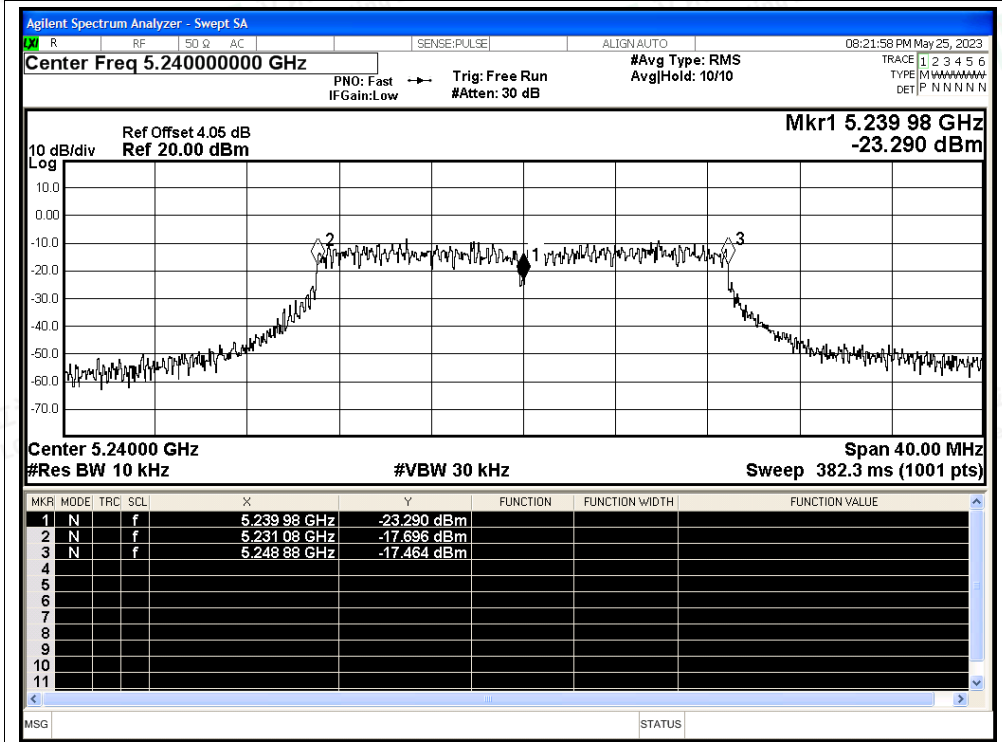


Freq. Stability NVNT ac40 5190MHz Ant1

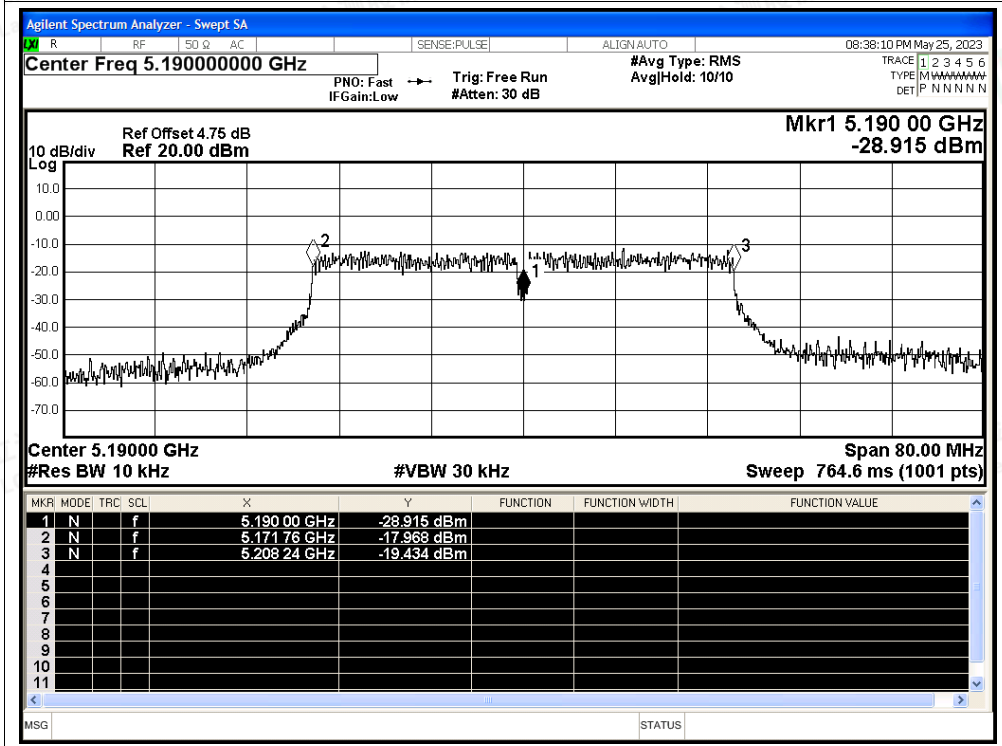




Freq. Stability NVNT ac40 5230MHz Ant1

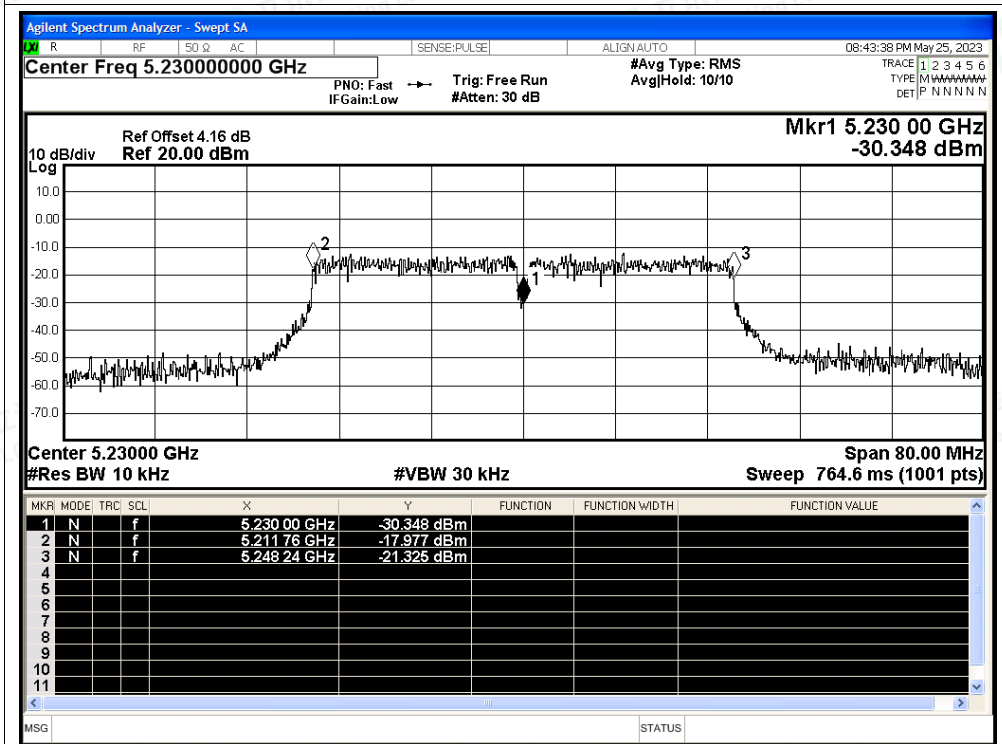


Freq. Stability NVNT ac80 5210MHz Ant1

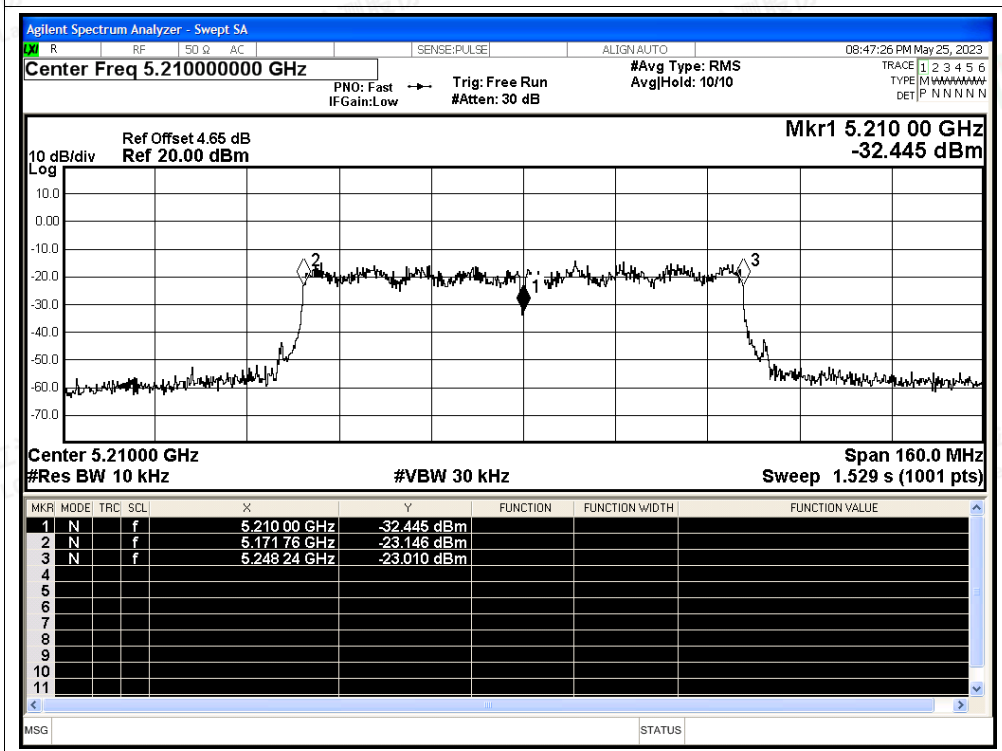




Test Graphs

Freq. Stability NVNT n40 5190MHz Ant2

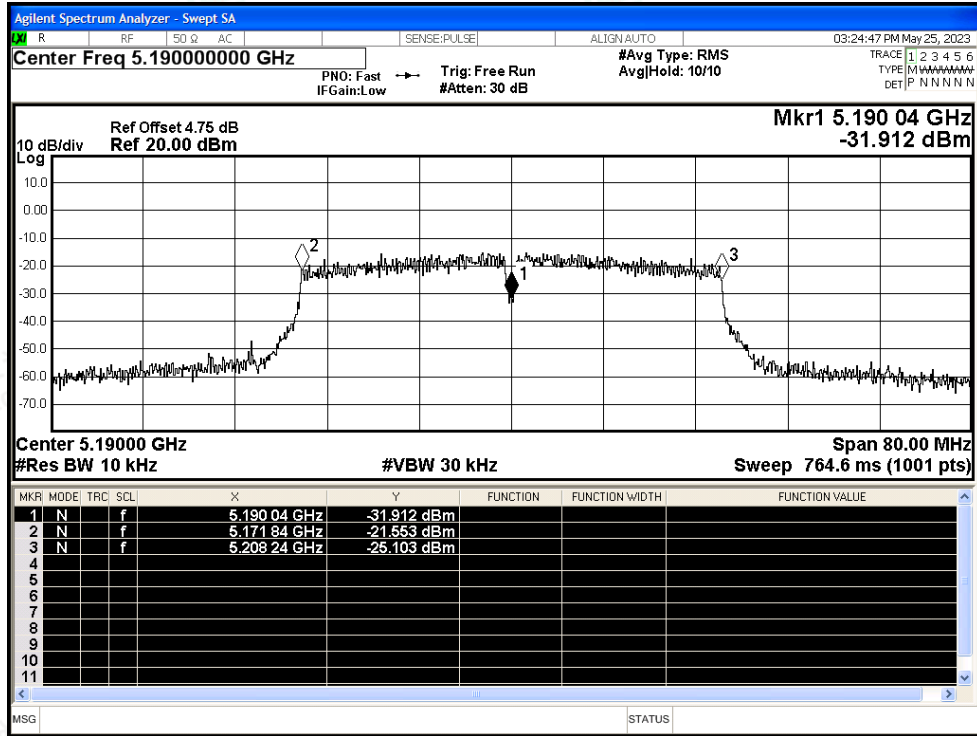


Freq. Stability NVNT n40 5230MHz Ant2

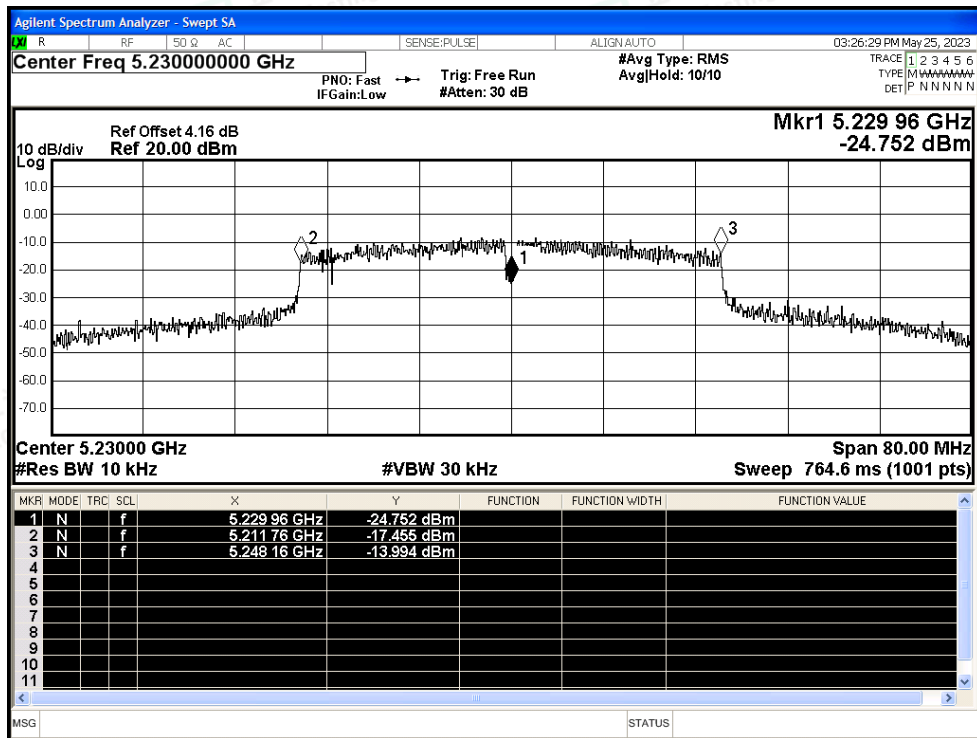




Freq. Stability NVNT ac20 5180MHz Ant2

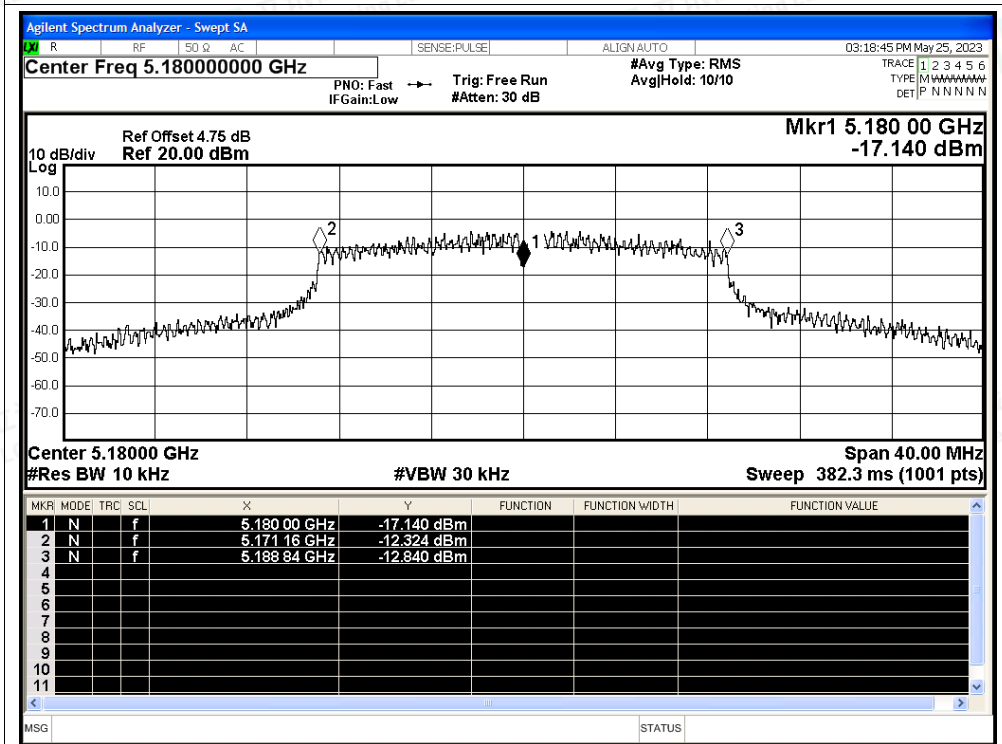


Freq. Stability NVNT ac20 5200MHz Ant2

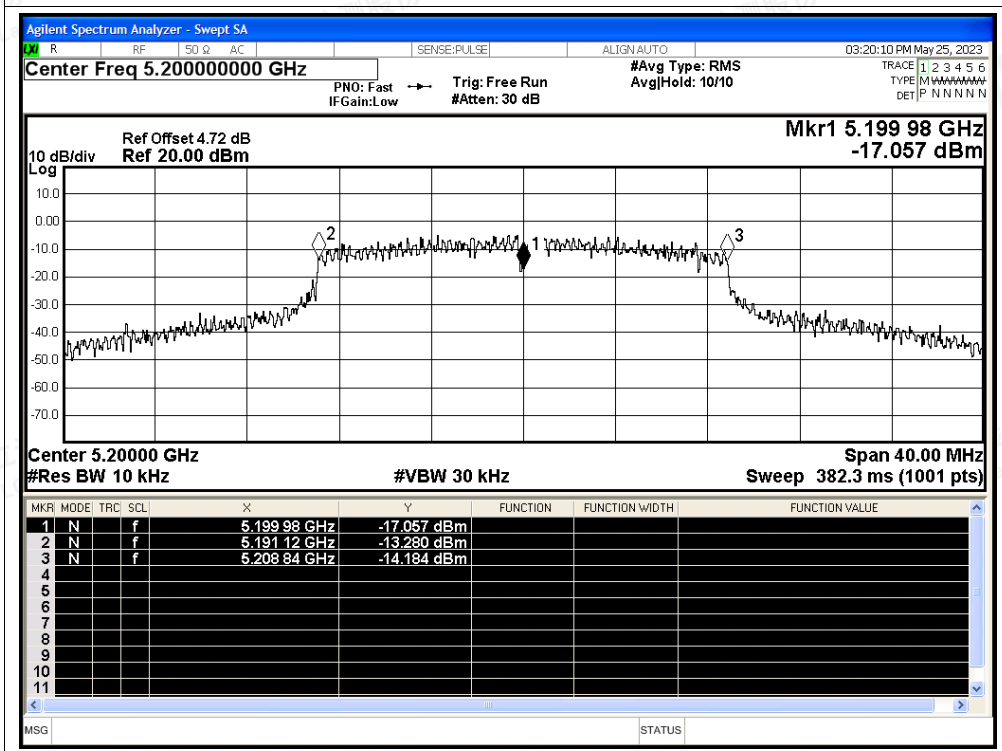




Freq. Stability NVNT ac20 5240MHz Ant2

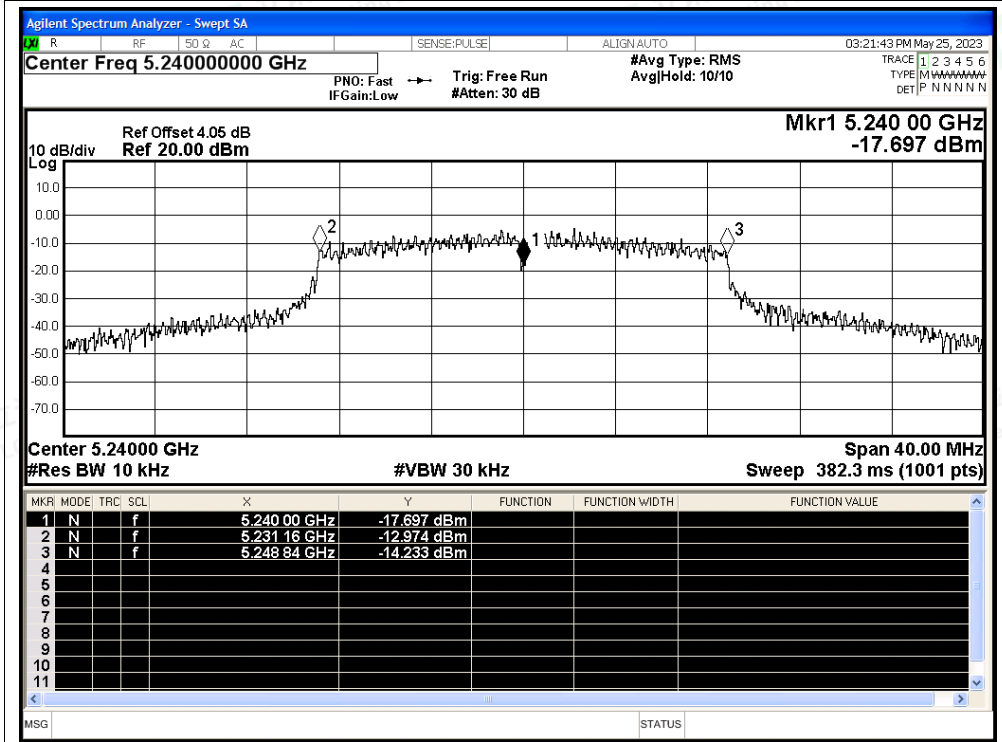


Freq. Stability NVNT ac40 5190MHz Ant2

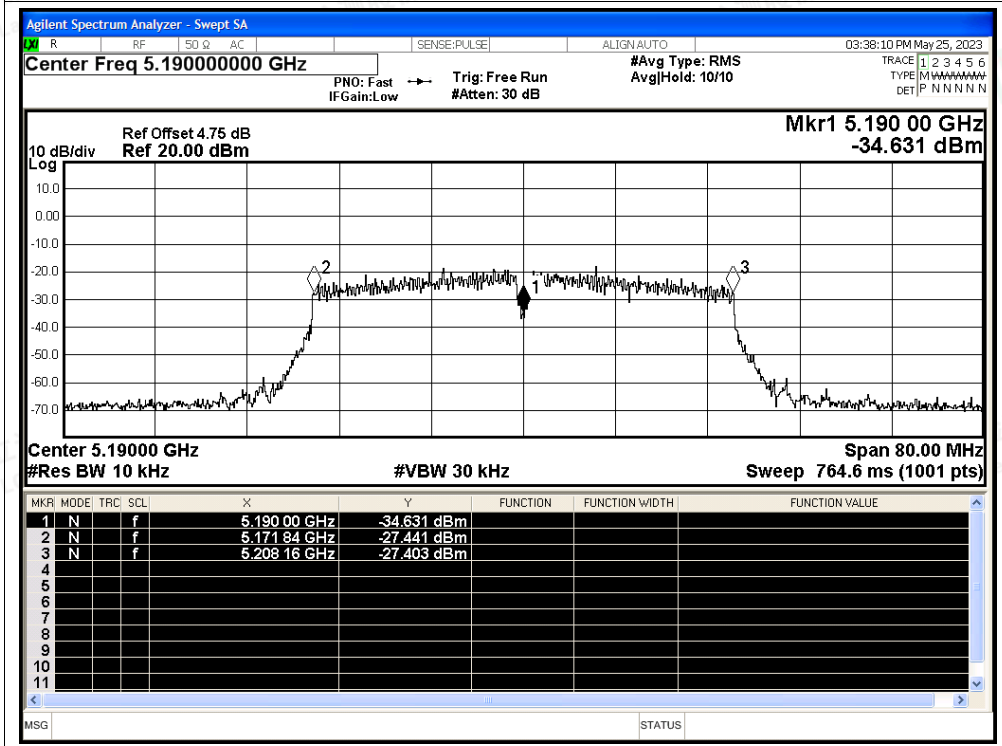




Freq. Stability NVNT ac40 5230MHz Ant2

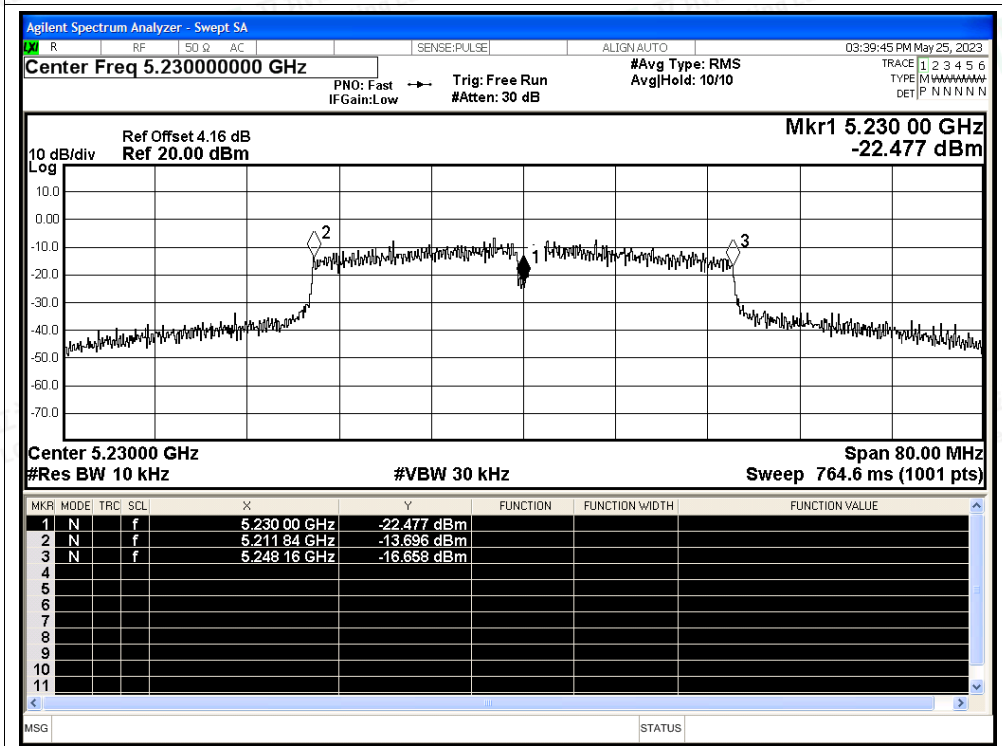

Freq. Stability NVNT ac80 5210MHz Ant2

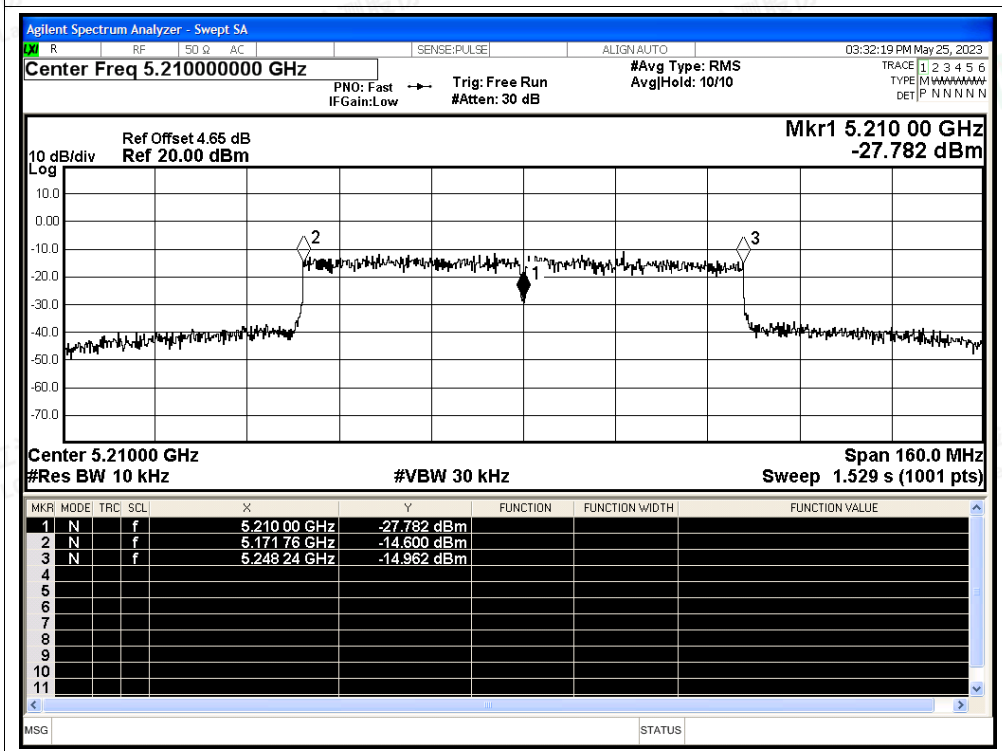



D.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	57.55	2.4	0.73
NVNT	a	5200	Ant1	57.57	2.4	0.73
NVNT	a	5240	Ant1	57.57	2.4	0.73
NVNT	n20	5180	Ant1	55.91	2.53	0.79
NVNT	n20	5200	Ant1	55.93	2.52	0.79
NVNT	n20	5240	Ant1	55.91	2.53	0.79
NVNT	n40	5190	Ant1	38.69	4.12	1.58
NVNT	n40	5230	Ant1	38.73	4.12	1.58
NVNT	ac20	5180	Ant1	55.99	2.52	0.78
NVNT	ac20	5200	Ant1	56.03	2.52	0.78
NVNT	ac20	5240	Ant1	56.03	2.52	0.78
NVNT	ac40	5190	Ant1	38.88	4.1	1.57
NVNT	ac40	5230	Ant1	38.82	4.11	1.57
NVNT	ac80	5210	Ant1	23.92	6.21	3.16






Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

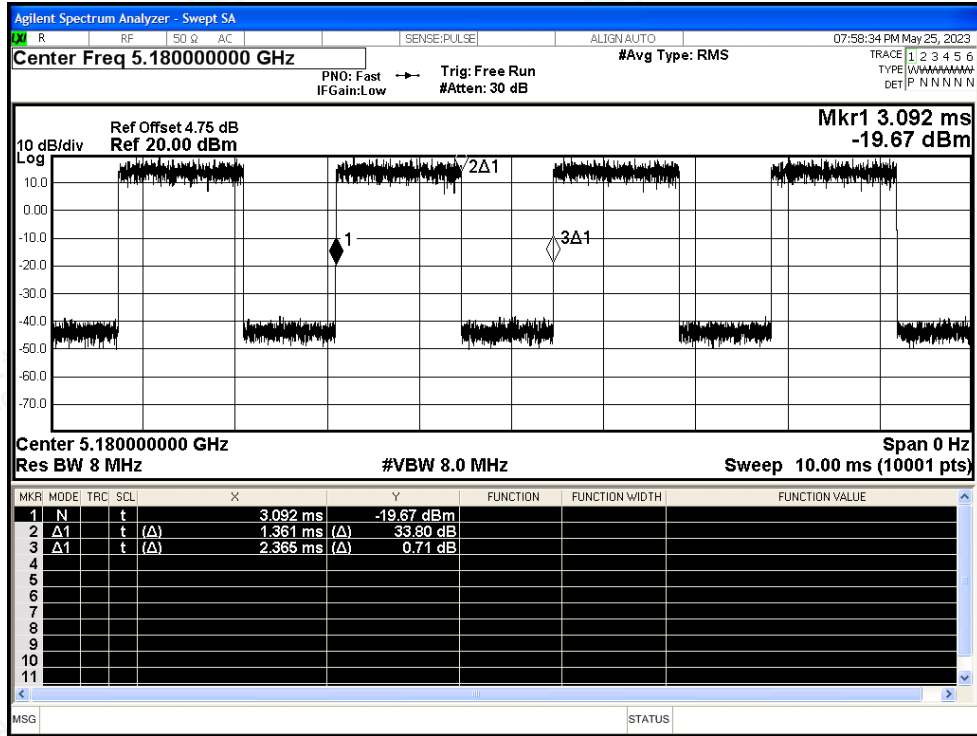


Duty Cycle NVNT a 5200MHz Ant1

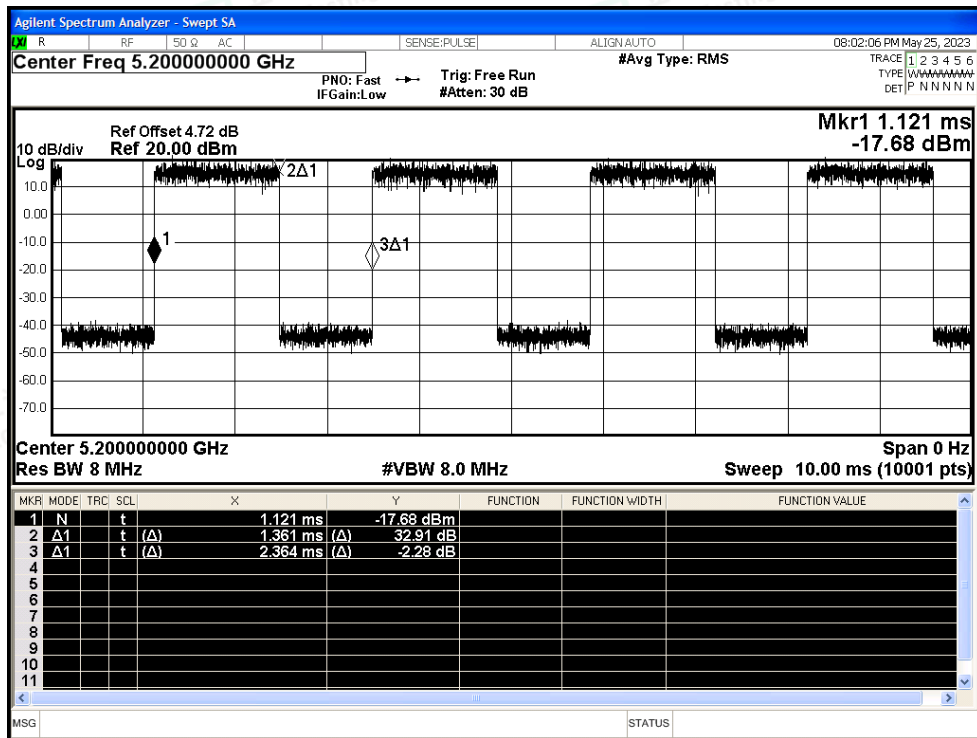




Duty Cycle NVNT a 5240MHz Ant1

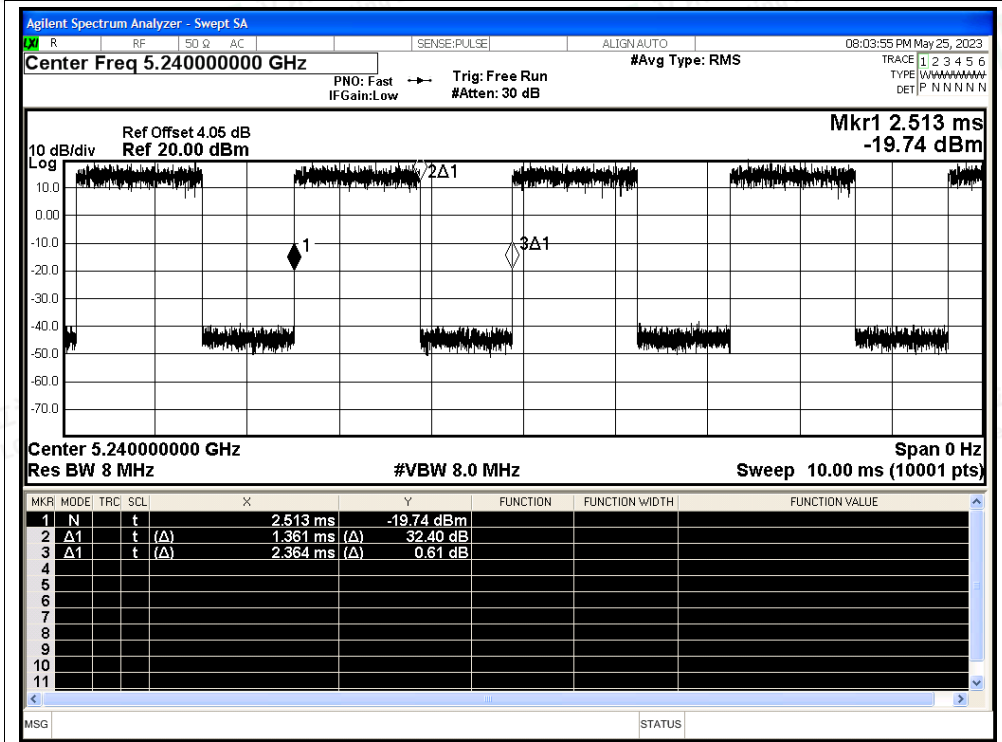


Duty Cycle NVNT n20 5180MHz Ant1

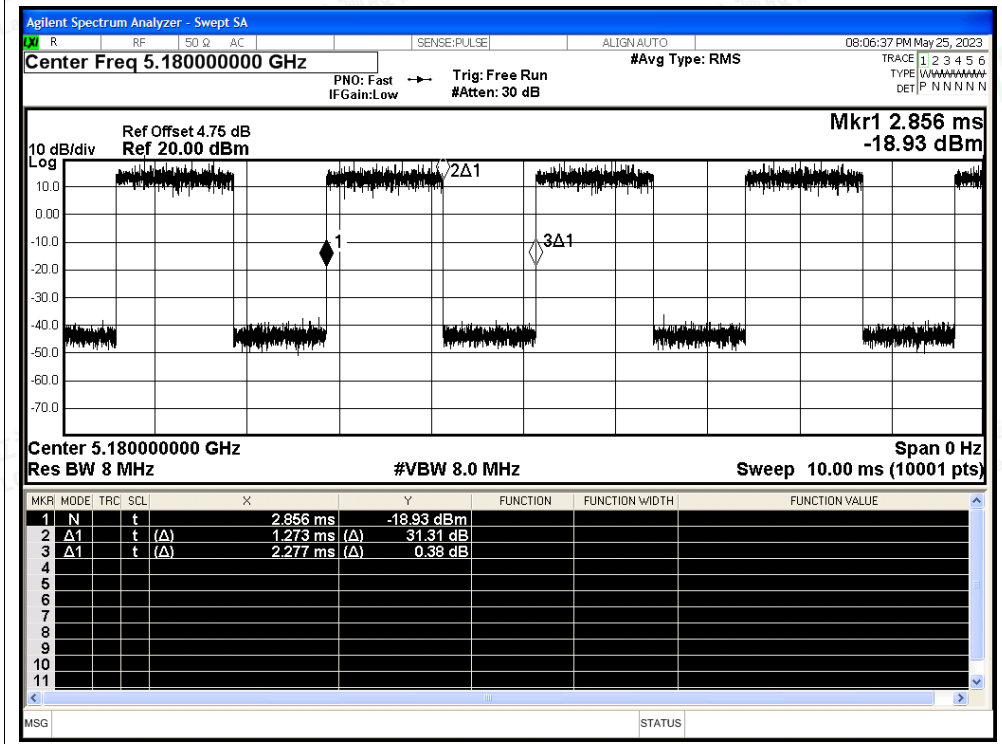




Duty Cycle NVNT n20 5200MHz Ant1

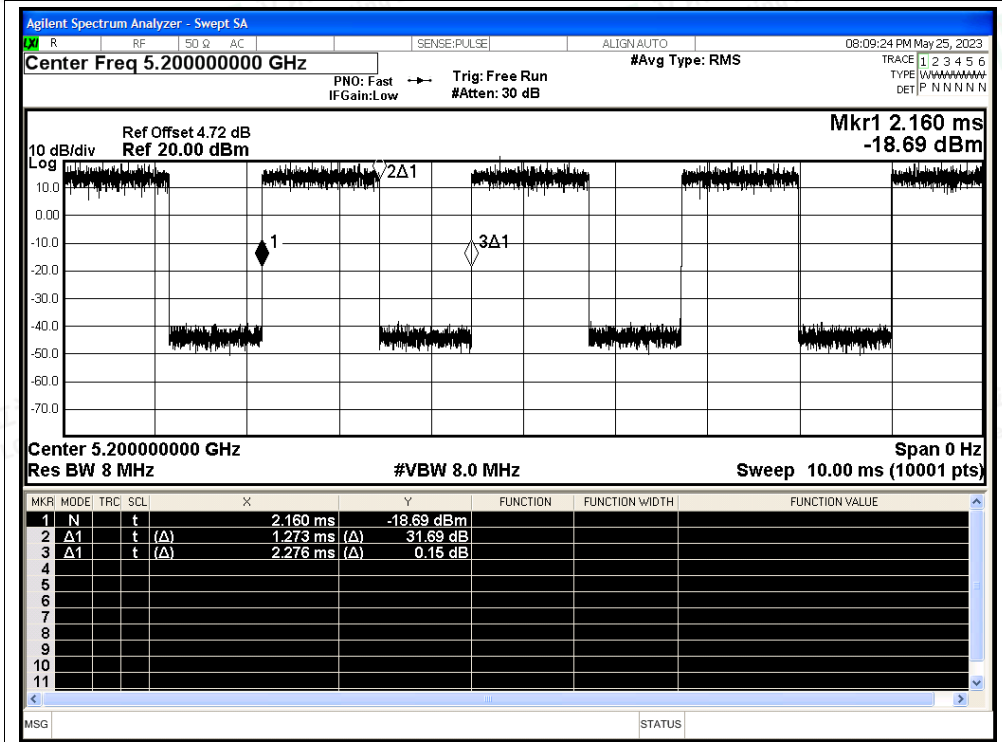


Duty Cycle NVNT n20 5240MHz Ant1

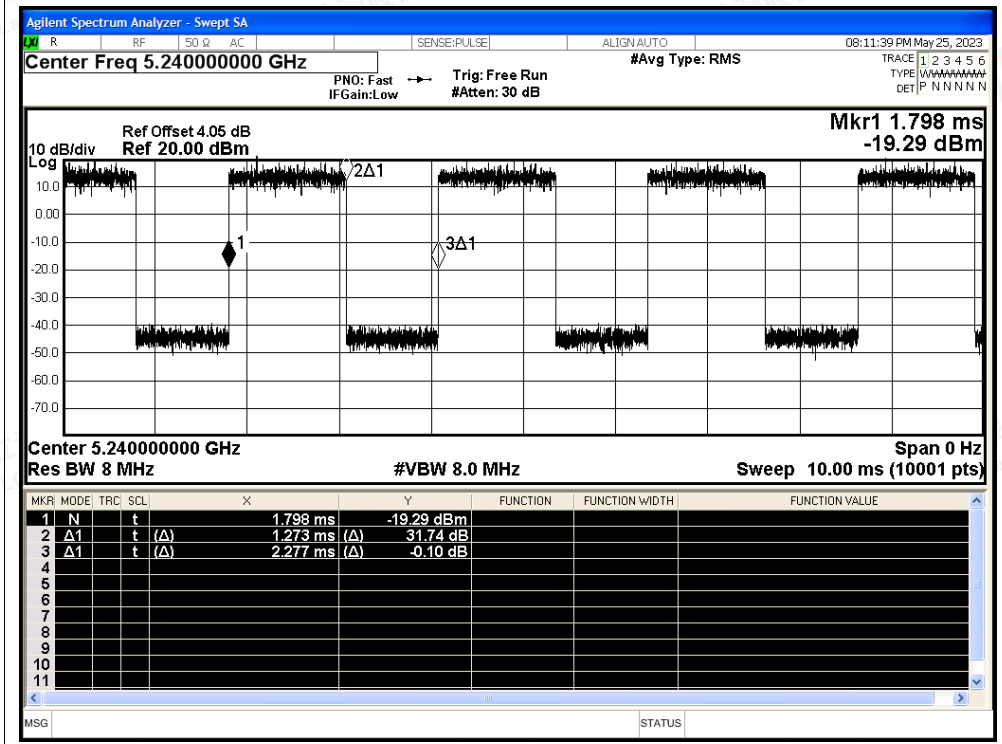




Duty Cycle NVNT n40 5190MHz Ant1

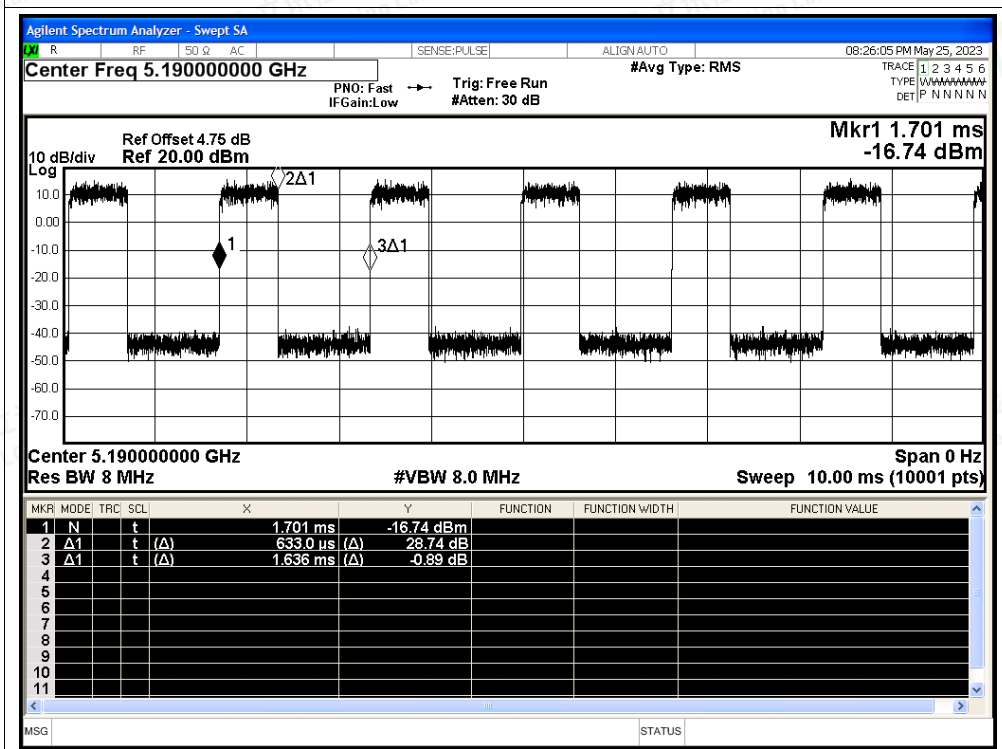


Duty Cycle NVNT n40 5230MHz Ant1

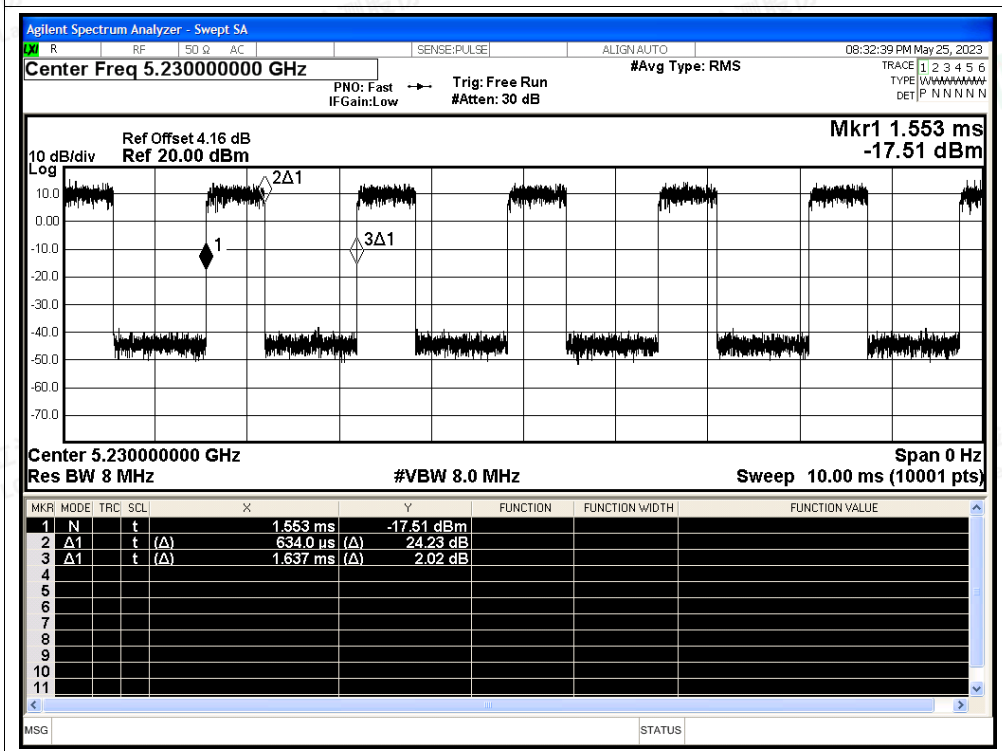




Duty Cycle NVNT ac20 5180MHz Ant1

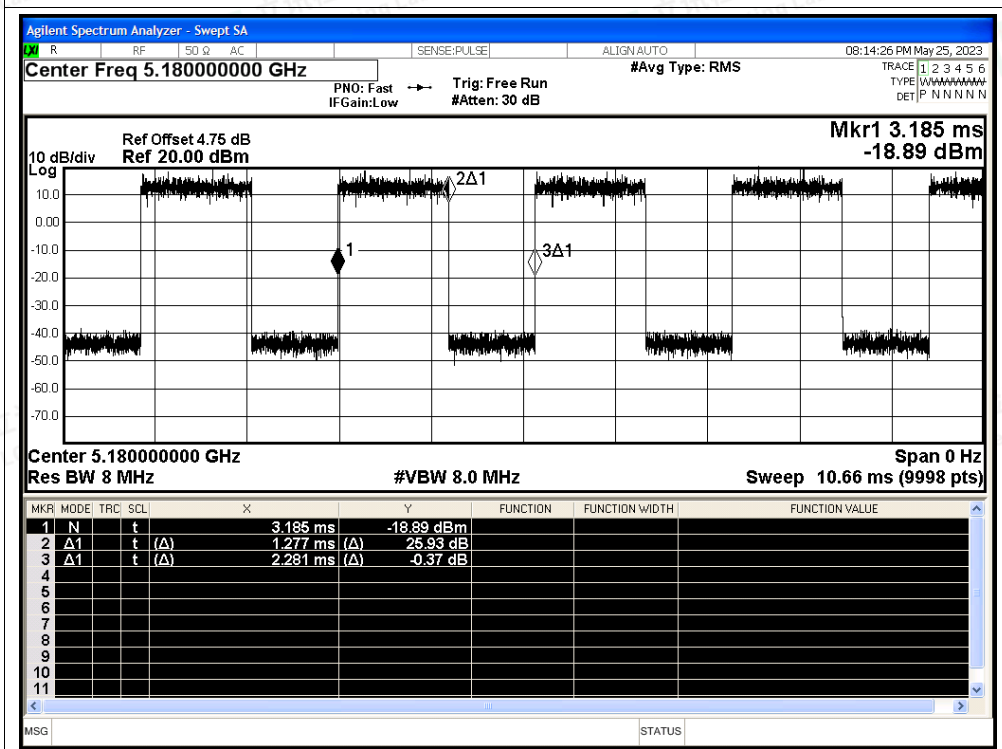


Duty Cycle NVNT ac20 5200MHz Ant1

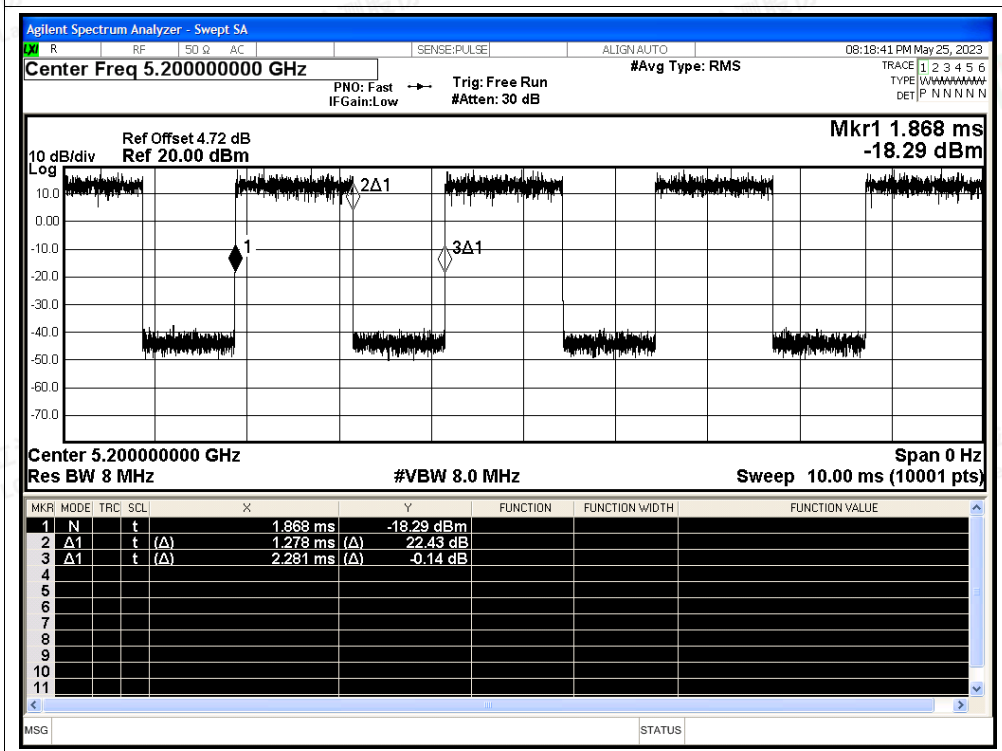




Duty Cycle NVNT ac20 5240MHz Ant1

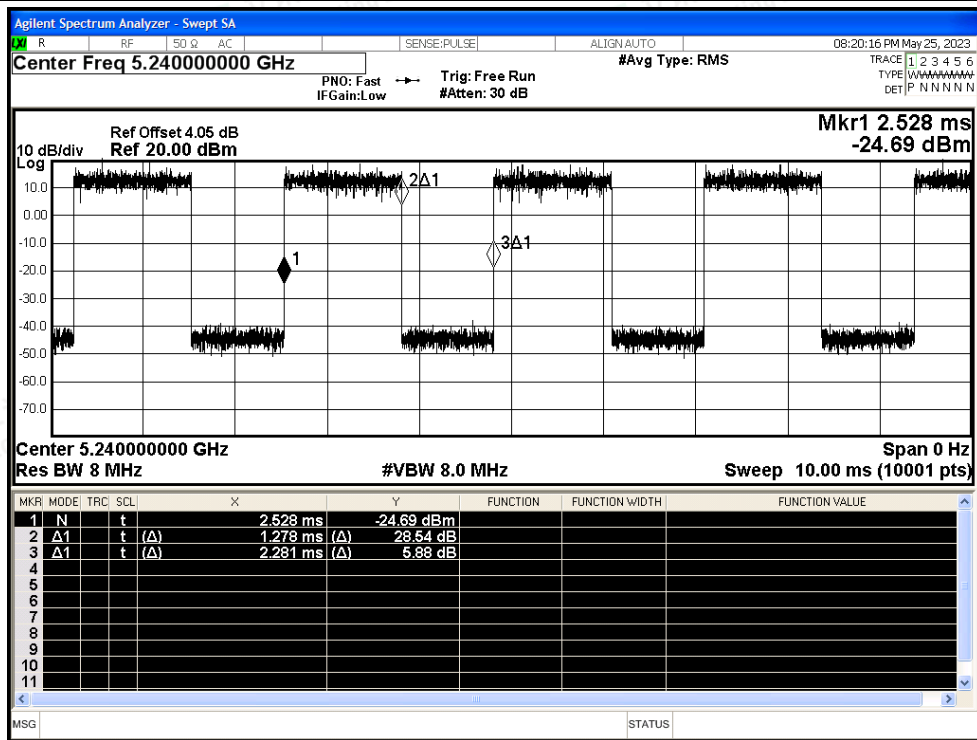


Duty Cycle NVNT ac40 5190MHz Ant1

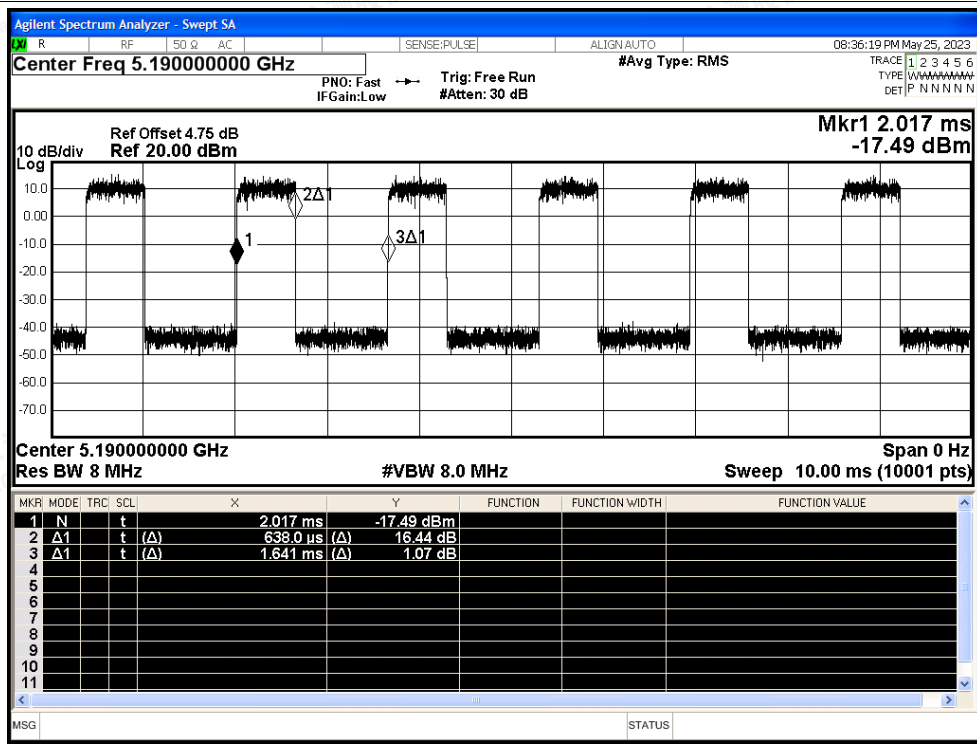




Duty Cycle NVNT ac40 5230MHz Ant1

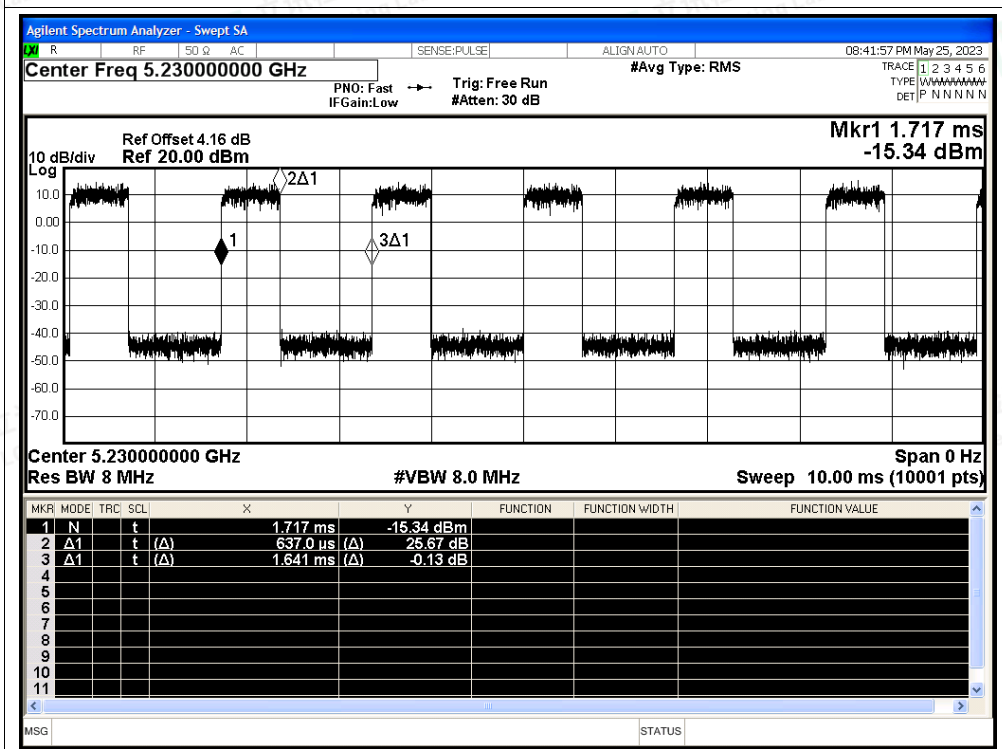

Duty Cycle NVNT ac80 5210MHz Ant1

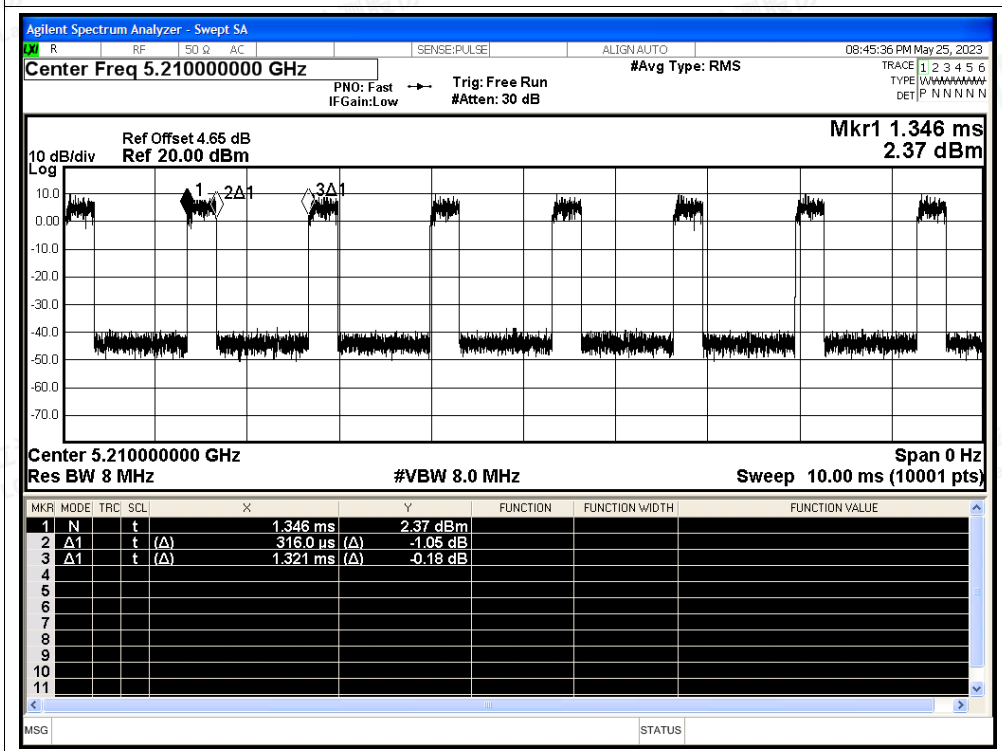



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant2	56.58	2.47	0.72
NVNT	a	5200	Ant2	58.5	2.33	0.72
NVNT	a	5240	Ant2	58.07	2.36	0.72
NVNT	n20	5180	Ant2	54.89	2.61	0.77
NVNT	n20	5200	Ant2	54.89	2.61	0.77
NVNT	n20	5240	Ant2	54.85	2.61	0.77
NVNT	n40	5190	Ant2	39.28	4.06	1.55
NVNT	n40	5230	Ant2	37.57	4.25	1.55
NVNT	ac20	5180	Ant2	56.96	2.44	0.76
NVNT	ac20	5200	Ant2	56.99	2.44	0.76
NVNT	ac20	5240	Ant2	56.99	2.44	0.76
NVNT	ac40	5190	Ant2	38.73	4.12	1.53
NVNT	ac40	5230	Ant2	37.86	4.22	1.53
NVNT	ac80	5210	Ant2	23.41	6.31	3.09




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5180MHz Ant2

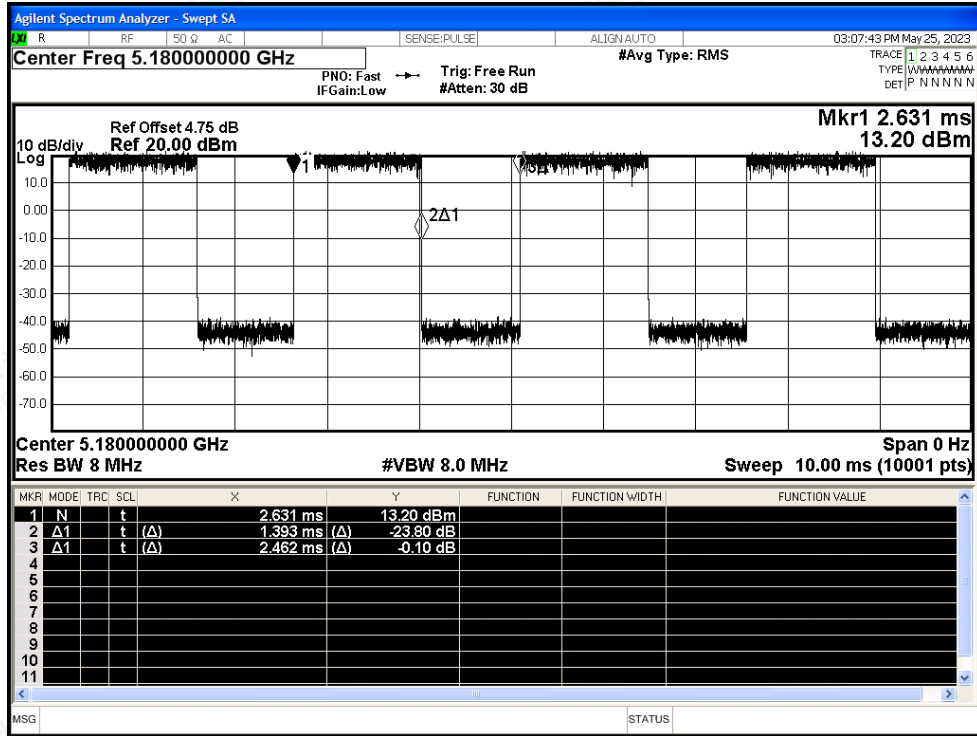


Duty Cycle NVNT a 5200MHz Ant2

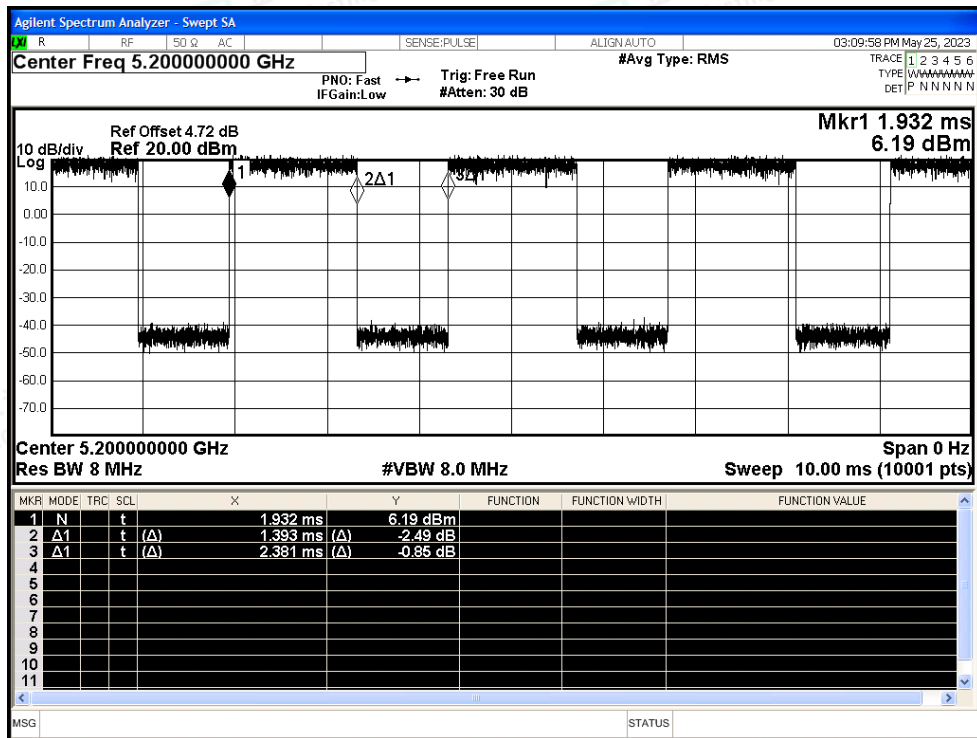




Duty Cycle NVNT a 5240MHz Ant2

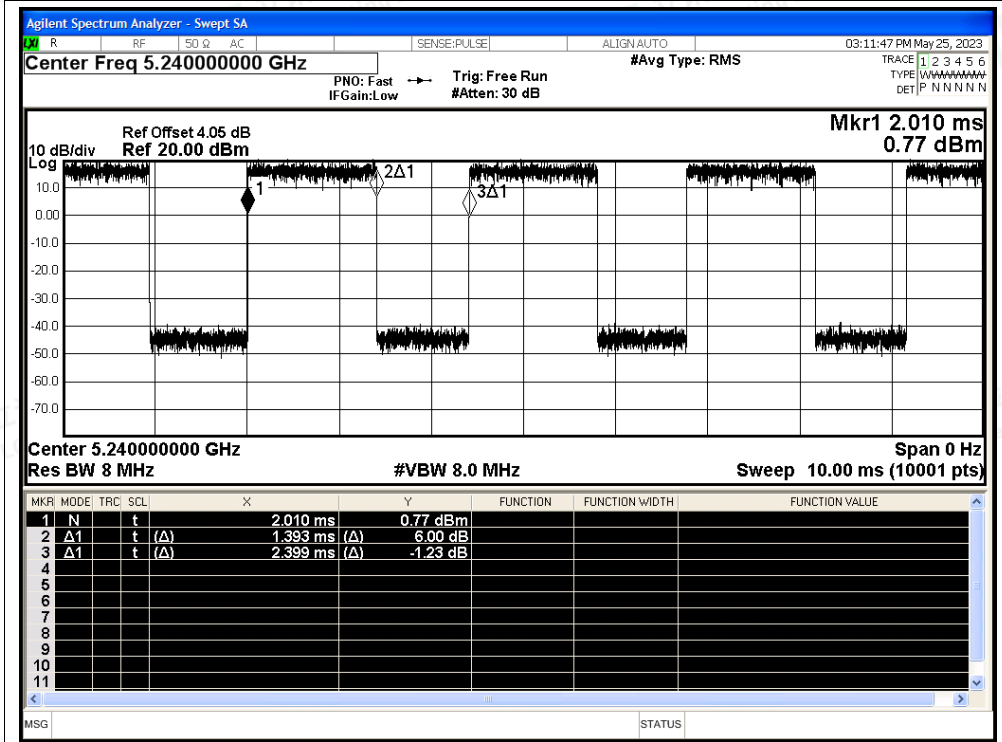


Duty Cycle NVNT n20 5180MHz Ant2

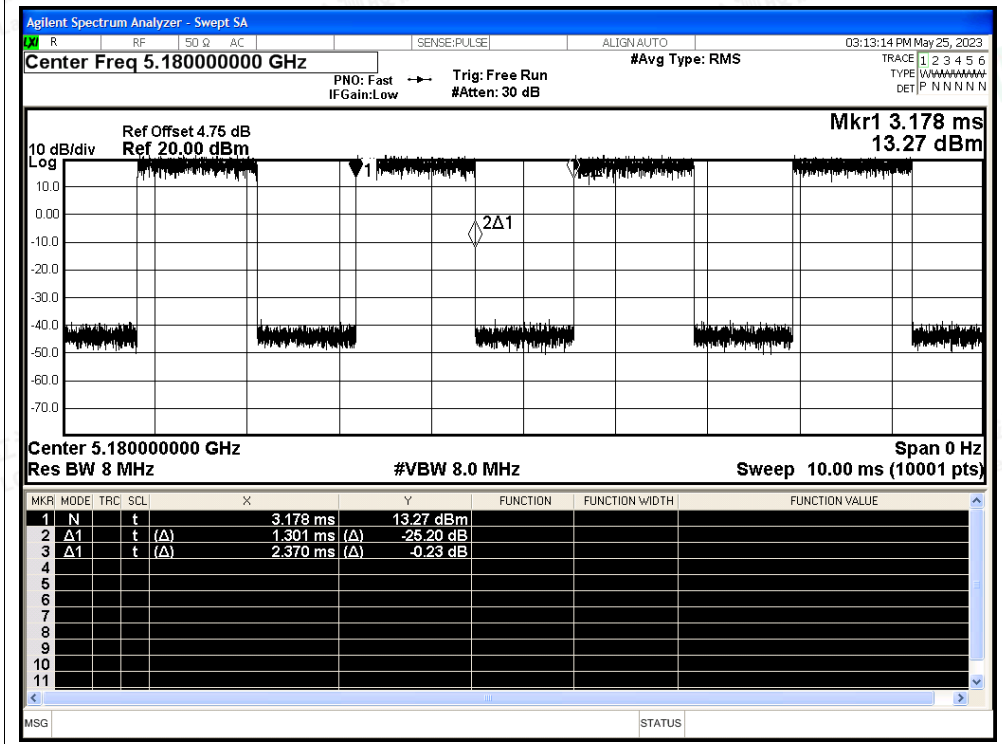




Duty Cycle NVNT n20 5200MHz Ant2

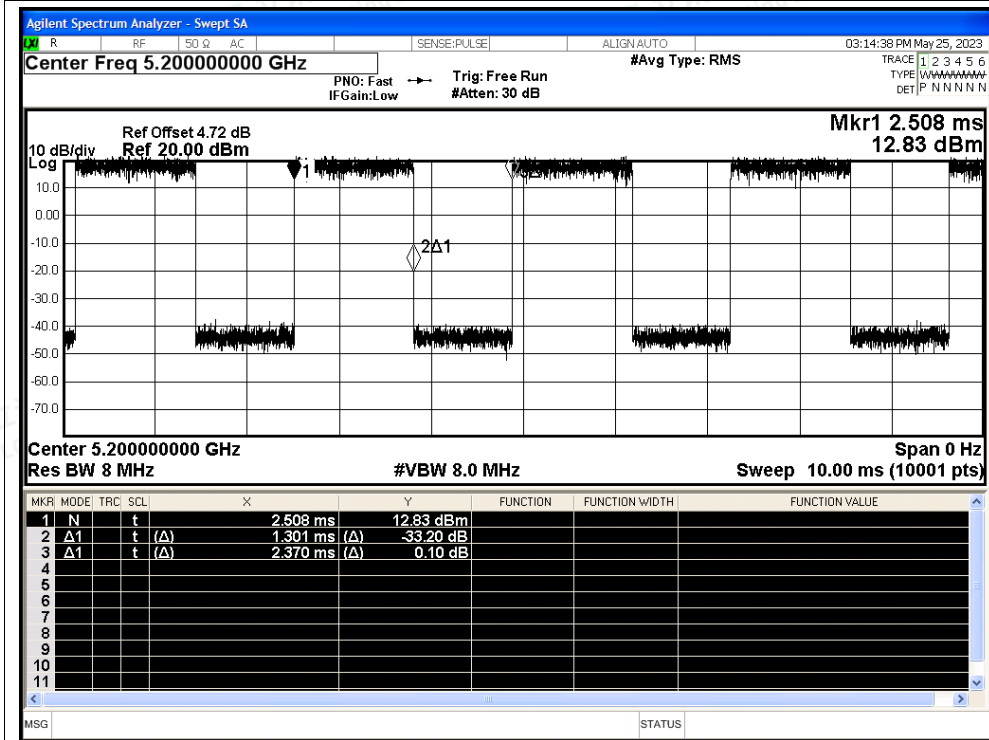


Duty Cycle NVNT n20 5240MHz Ant2

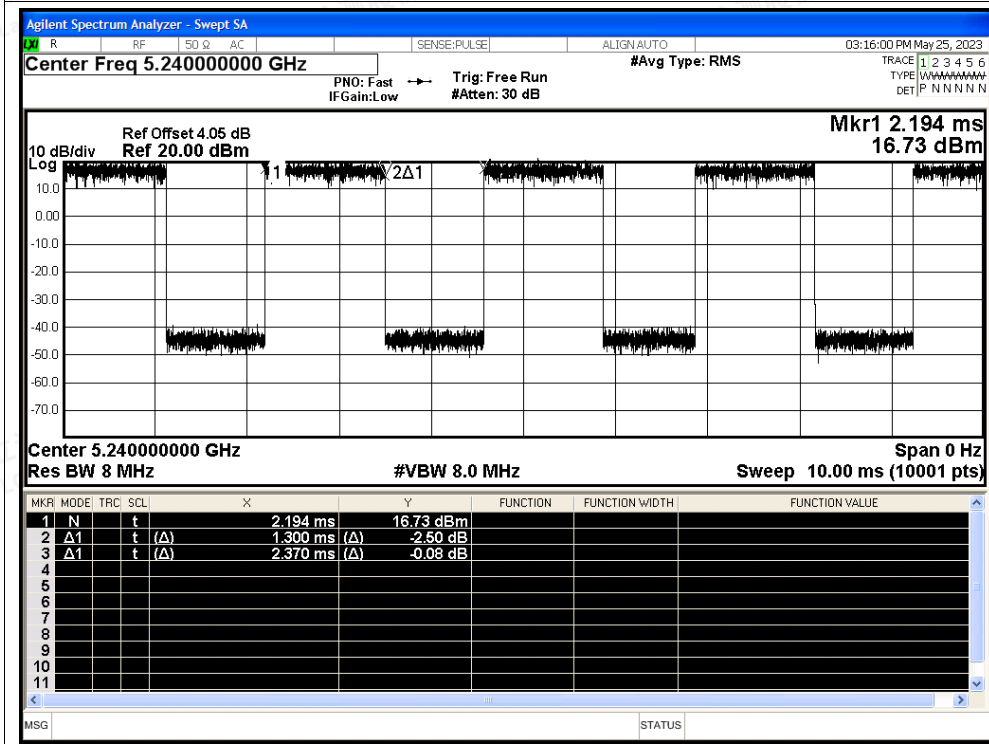




Duty Cycle NVNT n40 5190MHz Ant2

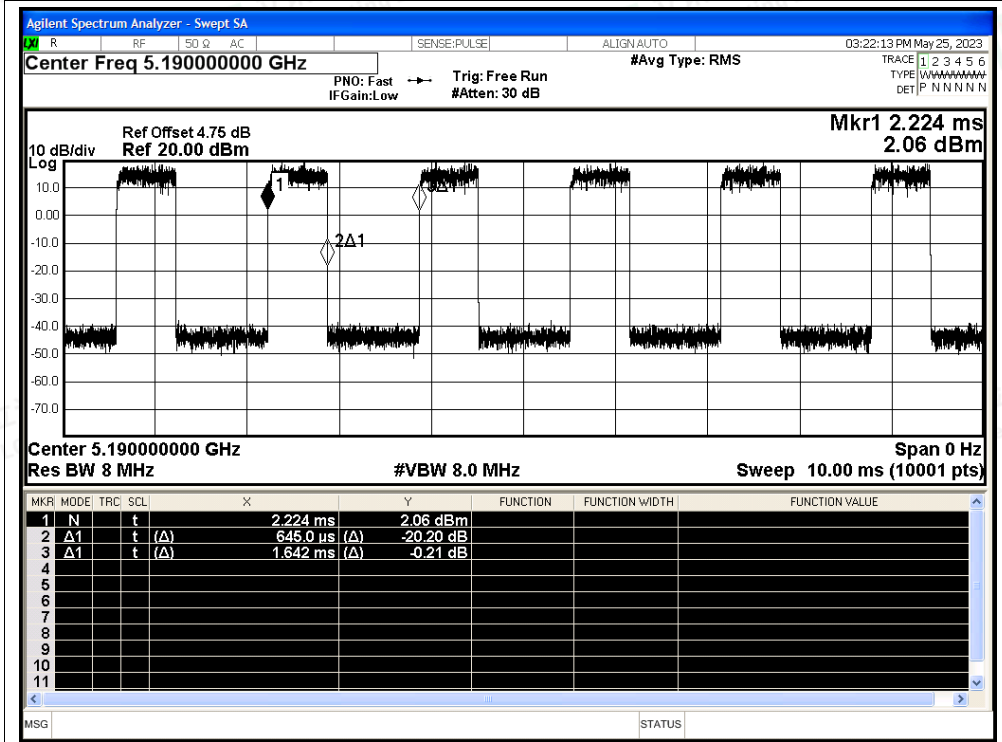


Duty Cycle NVNT n40 5230MHz Ant2

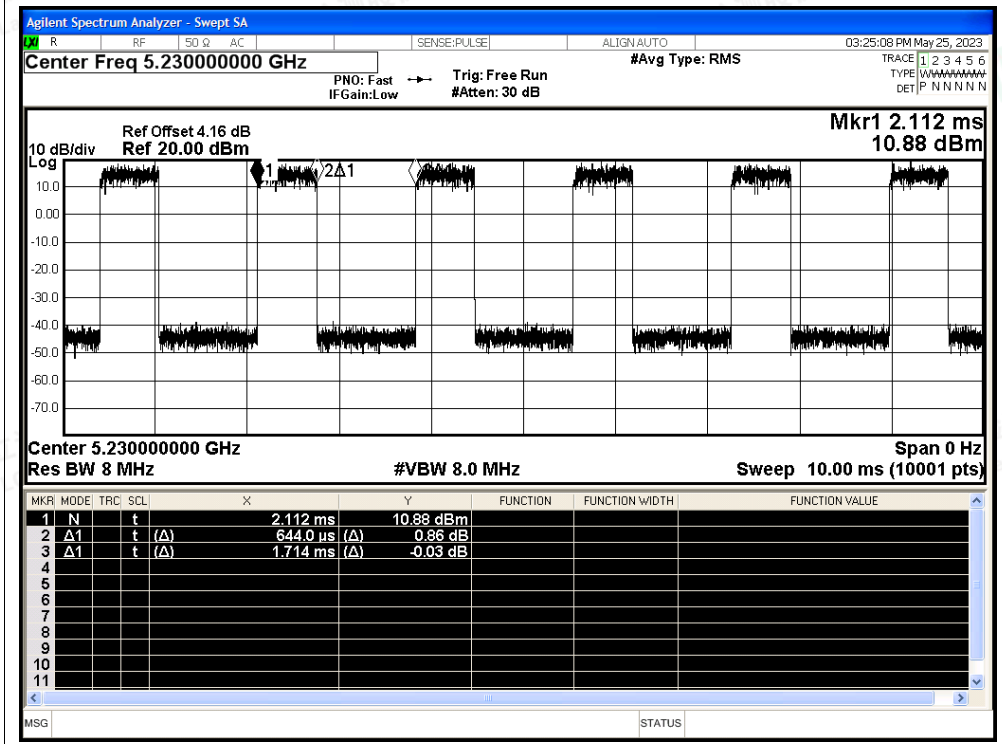




Duty Cycle NVNT ac20 5180MHz Ant2

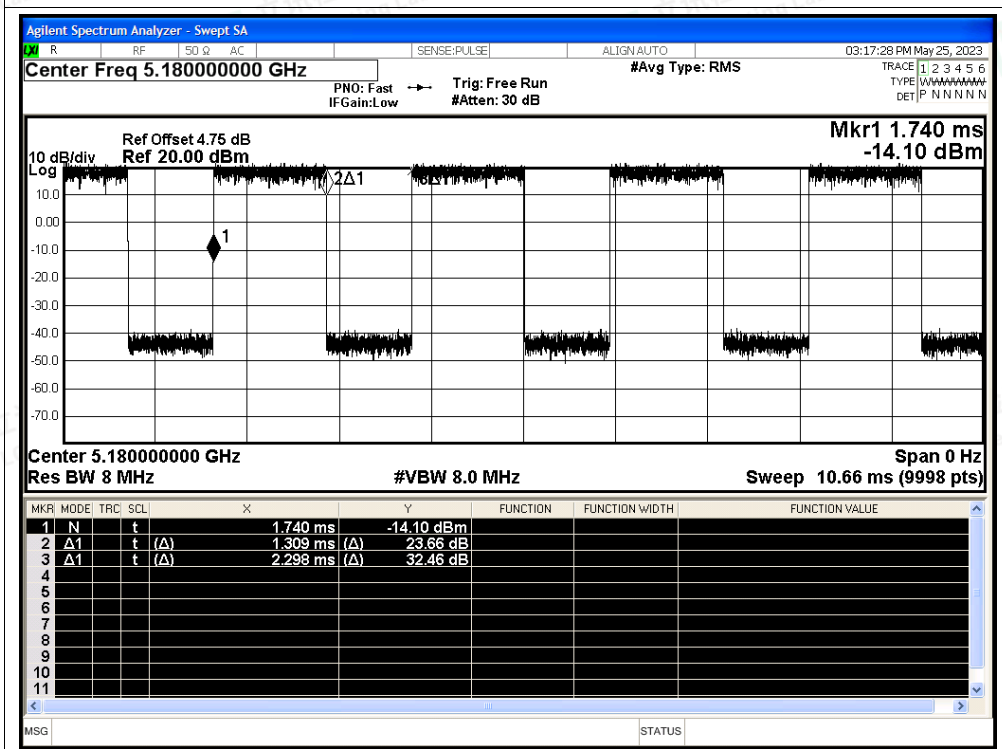


Duty Cycle NVNT ac20 5200MHz Ant2

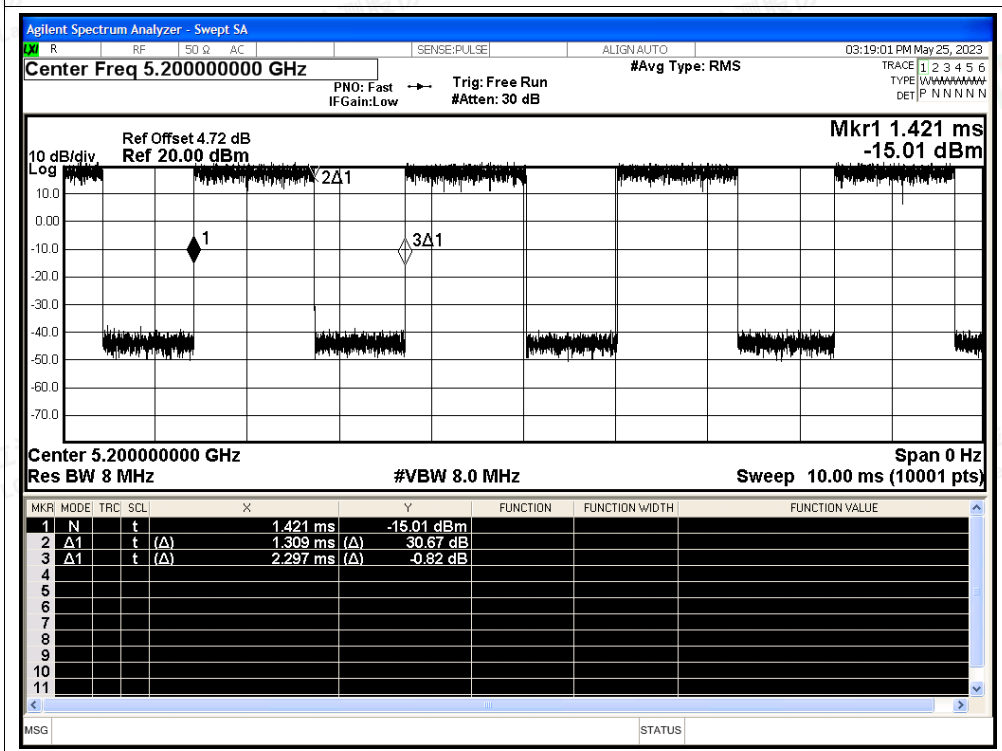




Duty Cycle NVNT ac20 5240MHz Ant2

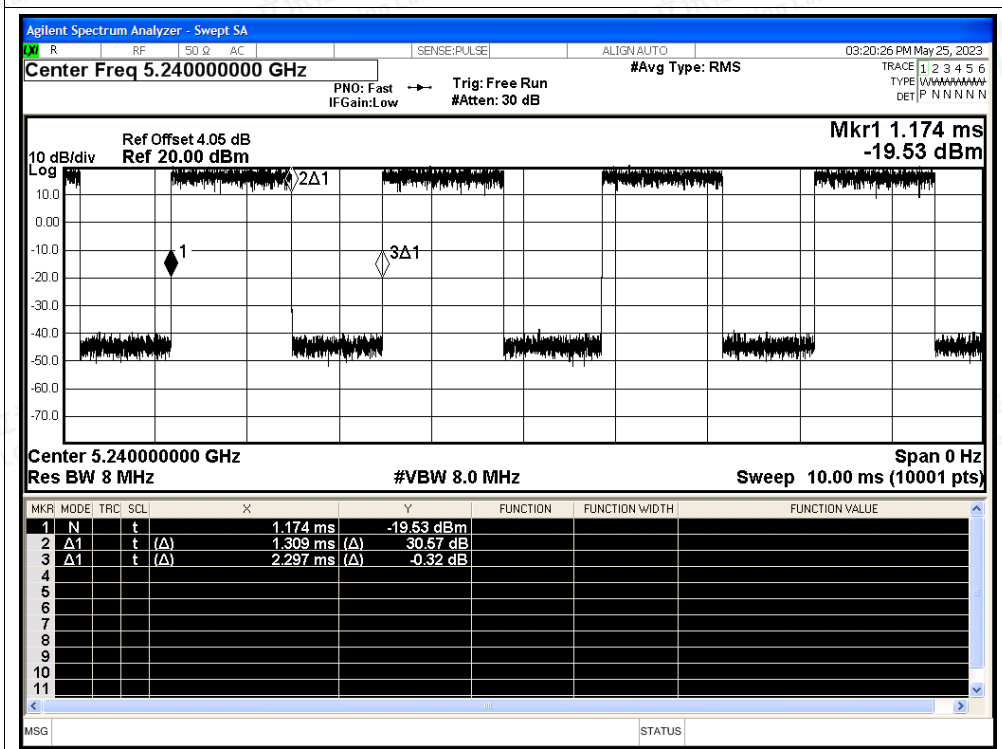


Duty Cycle NVNT ac40 5190MHz Ant2

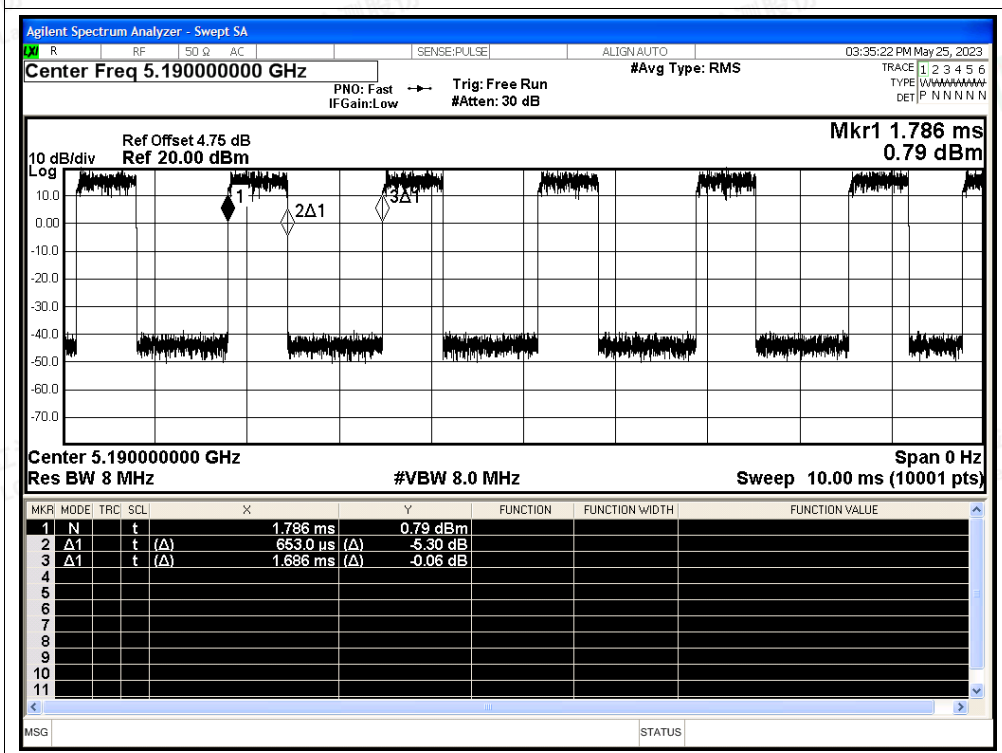



Duty Cycle NVNT ac40 5230MHz Ant2

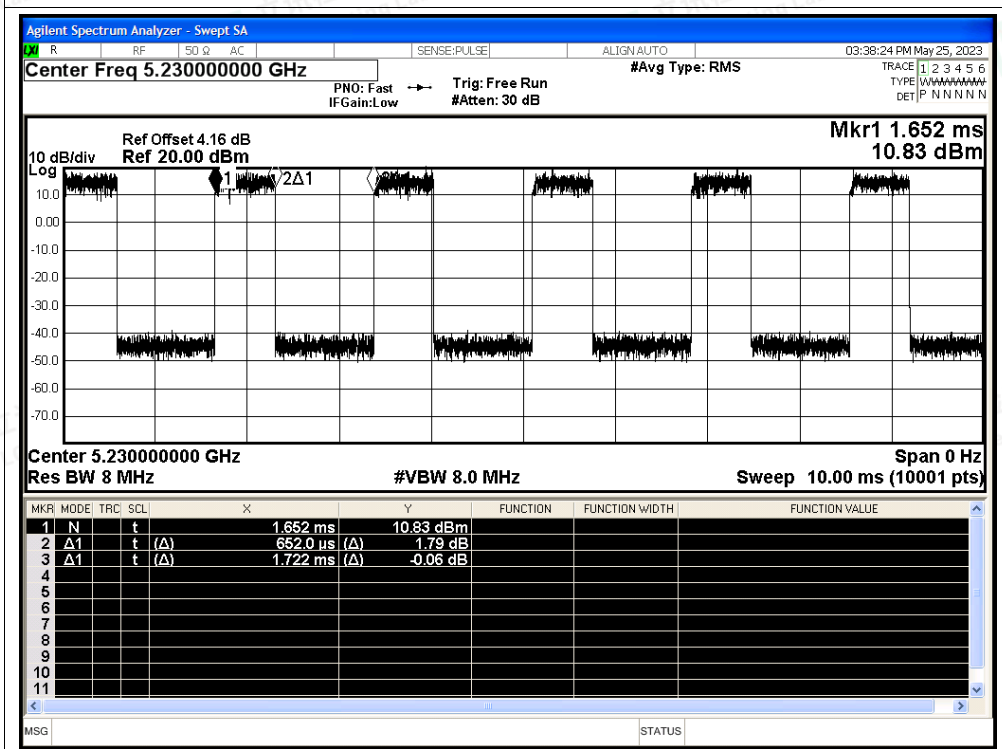

Duty Cycle NVNT ac80 5210MHz Ant2

