



Passive Test For 433

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
428	21.25	-6.73	-3.37	-5.52	8.941	12.307	-3.37	-14.76	3.35	105	35.29	35.89
429	20.1	-6.97	-3.6	-5.75	8.486	11.617	-3.6	-14.98	3.36	105	35.01	35.62
430	19.04	-7.2	-3.83	-5.98	8.061	10.979	-3.83	-15.18	3.37	105	34.74	35.35
431	20	-6.99	-3.61	-5.76	8.491	11.508	-3.61	-14.95	3.38	105	34.91	35.52
432	21.02	-6.77	-3.38	-5.53	8.951	12.069	-3.38	-14.73	3.39	105	35.08	35.7
433	22.08	-6.56	-3.16	-5.31	9.431	12.651	-3.16	-14.5	3.4	105	35.25	35.87
434	23.17	-6.35	-2.94	-5.09	9.922	13.251	-2.94	-14.26	3.41	105	35.42	36.04
435	24.27	-6.15	-2.73	-4.88	10.418	13.852	-2.73	-14.05	3.42	105	35.6	36.22
436	23.25	-6.34	-2.91	-5.06	10	13.247	-2.91	-14.23	3.43	105	35.39	36.02
437	22.2	-6.54	-3.1	-5.25	9.563	12.634	-3.1	-14.46	3.44	105	35.18	35.82
438	21.13	-6.75	-3.3	-5.45	9.113	12.019	-3.3	-14.91	3.46	105	34.97	35.62


428.00MHz - 438.00MHz Gain

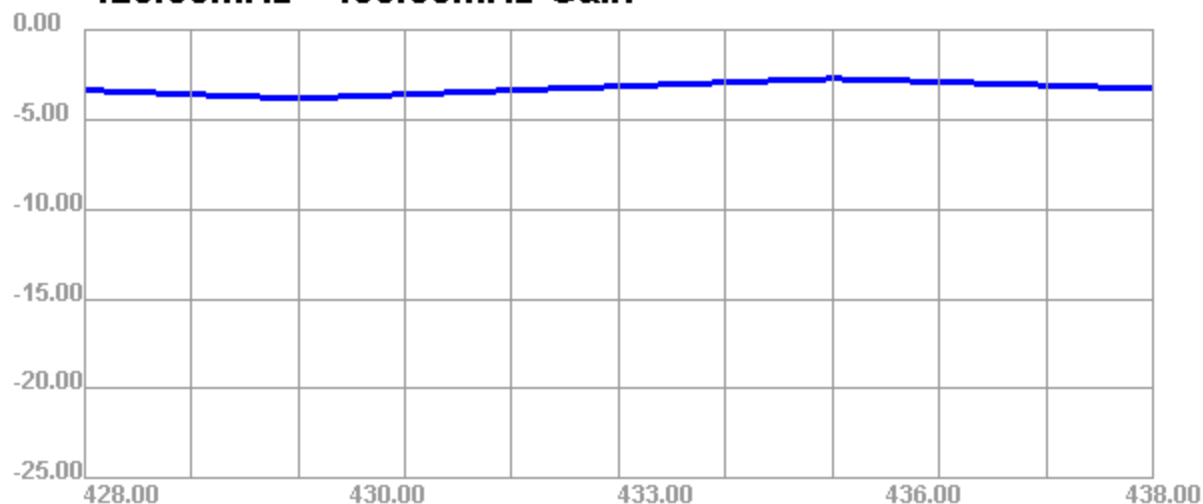

428.00MHz - 438.00MHz Efficiency

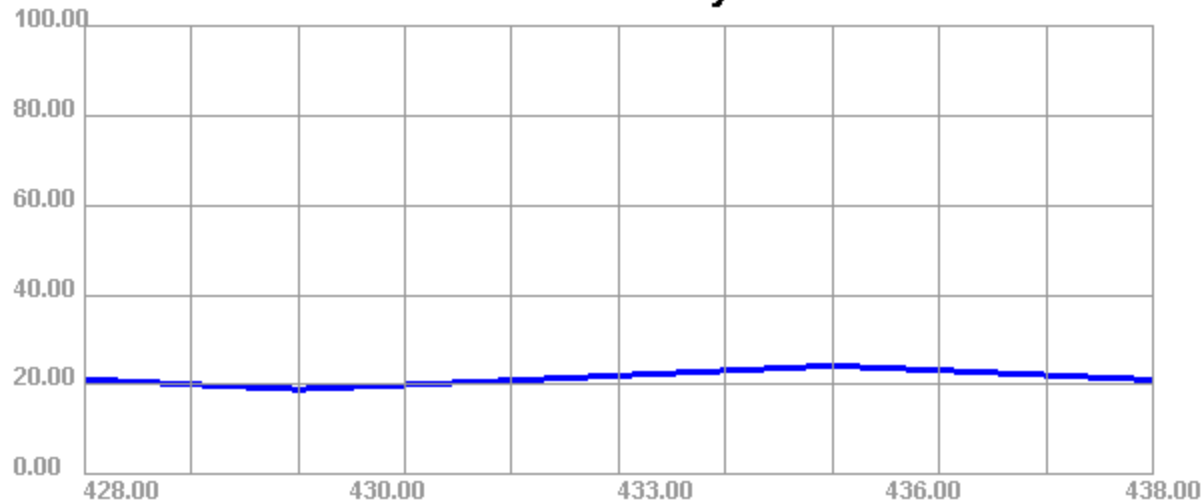

3D

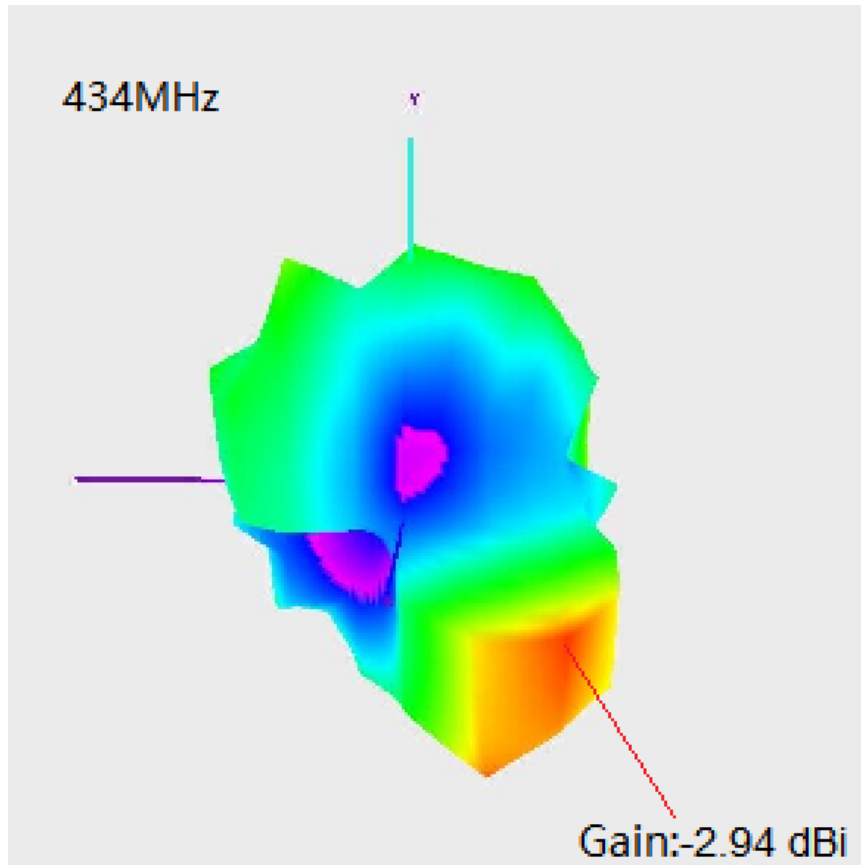

Di mensi ons

