
品名	M6
尺寸	L:120xW:75 (mm)
材料	80克书纸
工艺	5开10页风折琴
语种	中英文
备注	

封面



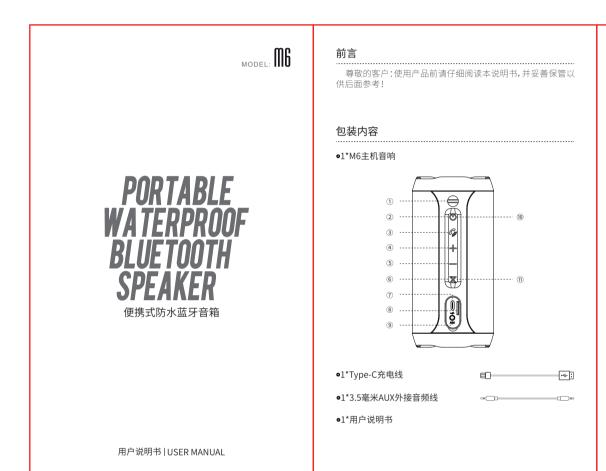

按键功能详解

⑤ 减号键:短按音量减 ② 电源键:长按 开/关机 短按播放/暂停 ③ 蓝牙/电话键:

长按 上一曲 ⑥ TWS配对键: 短按 开启/关闭派对灯光 长按强制断开蓝牙连接 短按 切换播放模式 长按开启/取消TWS互联 ⑦ Type-C接口 ⑧ TF卡插槽孔 接听挂断电话 ④ 加号键:短按 音量加 长按 下一曲

⑨ AUX接□ ⑩ 蓝牙指示灯/充电指示灯

操作说明

1、开机后,进入蓝牙模式,蓝牙灯闪烁,打开您的蓝牙,设备搜索到"M6"选择连接,连接成功,音响提示"蓝牙已连接"蓝牙灯常亮,即可播放音乐。
2、蓝牙连接或功后使用手机拨打电话,音响进入蓝牙免提通

话。来电短按"⑳"接听,长按拒接。

(2) AUX音频输入模式

请将3.5mm音频线连接到手机/电脑的耳机输出口,短按"②"键切换到AUX模式,音响提示"外接音源模式"即可播放音乐。 ※因多电脑的USB接口供电能力不能满足音响工作需求,建 议使用AUX连接电脑播放音乐时,不要使用电脑USB口给音响 同步充电。


(3) TF卡模式

请将TF卡插入音响,音响会自动切换至并语音提示"读卡音乐模式"自动播放卡内音乐,内存最大支持32GTF卡。 (此功能仅适用于部分机型,详情请咨询当地经销商。)

(4) TWS无线立体声播放

将两台"M6"开机,进入蓝牙模式后,长按其中一台"⊗"键 TWS灯闪烁,自动搜索另一台音响进行组队,组队成功,两台音响 转换成左右声道。重复蓝牙连接操作将音响连接手机,播放手机

音乐即可实现无线立体声音效。 注: 此功能需要两台音响,并都开机在蓝牙模式才能使用。 在TWS配对前没有跟任何设备进蓝牙连接。 在TWS互联状态,短按其中一台音响"⑧"键即可取消互联。



(5) 炫酷派对灯光

开机默认开启派对灯光,短按"⊗"键开启/关闭灯效。

(6) Type-C充电

※请勿使用未通过安规认证的电源适配器。※建议使用输出为5V-1A的电源适配器进行充电。1、当听到"设备电量不足"语音提示时,请尽快为音响充电。 2、音响支持自适应充电,根据外接电源适配器功率自动选择 充电电流,当使用电脑USB接口为本音响充电,充电电流小,充电

3、充电时电源灯呼吸,充满后电源灯常亮。

本产品是基于生活防水,可以正常冲洗切勿将音响长期浸泡 水中。(如因进水导致音响功能故障,我司留有最终解释权)

在下列情况下音响将自动关机节省电量。 1、蓝牙模式下,等待配对持续二十分钟无设备连接蓝牙。

2、TF卡、外接音源模式下,短按"⑩"暂停二十分钟后无操作 将自动关机,再次开机请长按电源键。

技术参数


蓝牙版本 5.0 **产品重量** 495克 **额定功率** 20W 充电电压 5V/1A 电池容量 3600mA

疑难解答

1、蓝牙无法连接或播放音乐没有声音怎么办? 请先确认音响是否处于蓝牙模式,再确认您的蓝牙设备是否 支持蓝牙功能并将其打开,检查音响是否处于蓝牙搜索状态,如 果周边蓝牙设备太多,可能会造成搜索困难,请关闭其他蓝牙

2、TF卡播放没有反应怎么办?

请确认TF卡有无质量问题,并检查卡中音频文件是否为MP3 播放格式,如果以上问题均排除,则可能是TF卡兼容性问题,可 将TF卡格式化为FAT32格式,或者尝试更换其他TF卡。

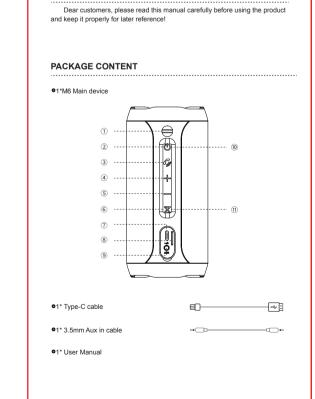

PREFACE

KEY FUNCTION DEFINITION

- Strap hook
 Power: Long press Turn on/off
 Short press Play/Pause
 Bluetooth/Phone:
 Long press force to disconnect
 Bluetooth connection
- Short press to decrease volume
 Long press to previous track

 TWS pairing:
 click to turn on or off party lights.
 Press and hold start or cancel
 TWS interconnection.
 17 Type-C interface
 18 TF card sloty
 AUX interface
 19 Bluetooth light/Charging light
 TWS light Bluetooth connection
 Short press switch the playback mode ⑦
 Answer/Hang off phone call

 Plus:
- Plus:
 Short press to increase volume
 Long press to next track
 Minus:

OPERATION INSTRUCTION

(1) BLUETOOTH MODE

1. Turn on speaker enter into bluetooth mode, the bluetooth light starts to flash. Open the bluetooth on your device search for "M6" and connect to your speaker. If it's connected successfully, you will hear a prompt tone that "device paired". The bluetooth light is always on, now you can play music on your device by bluetooth.

2. When the bluetooth is connected successfully and you make calls with phone, thevoice will automatically enter into the bluetooth hands-free mode. Short press " (a)" key to answer incoming call, Long press to reject call.

Please connect 3.5mm audio cable to the headphone of the phone/computer output interface, short press " ② " key switch to AUX in mode.When you hear a prompt tone "AUX in mode", then you can play music.

**S'Due to the lower power supply capability,most computer's USB interface can not meet speaker's operational requirements.It is not recommended to use the computer's USB for charging synchronously when you play music in the AUX in mode while connecting computer.

(3) TF CARD PLAY

Please insert TF card in speaker,the speaker will switch mode automatically with a prompt tone "TF card mode", the speaker will play music saved in card automatically, TF card memory maximum is 32G. (This mode is only apply to some models, please consult local dealer for

(4) TWS STEREO SOUND PLAY


OPERATION INSTRUCTION

Turn on two M6 speakers enter into bluetooth mode. Short press " (\$\infty\$" botton of one speaker. TWS light starts to flash, the speaker will automatically search the other for TWS connection, if they connected successfully, two speakers will switch into left and right channels automatically. Repeat the bluetooth connection operation and connect to phone, if they connected successfully ,music will play on the speaker shows dual stereo sound effect.

Note:This function requires two M6 speakers,make sure both are turned on and in the bluetooth mode.

No bluetooth connection to any other devices before TWS paring.

When TWS is connected, short press " (\$\infty\$" key of one speaker to cancel the interconnection.



(5) COOL PARTY LIGHTS

Party lights on is defaulted setting when you turn on speaker, Short press ${}^{\rm t}$ ${}^{\rm m}$ key to turn on/off lights.

(6) TYPE-C CHARGE

*Do not use power adapter that has not been certificated by safety

**Power adapter with output 5V-1A is recommended for charging.

1.When you hear a prompt tone "Out of battery" ,Please charge speaker as

quickly as possible.

2. This speaker supports self-adaption charging. It's able to choose charging currentautomatically according to the external rated power of the adapter, When charging by USB interface on computer, the current is smaller and it takes longer time to complete charging.

3. When charging, the power lamp breathes, and the power lamp is always on after charging. after charging.
KINDLY TIPS:

This product is waterproof on daily basis conditions, and it can washes normally. Do not soak the product in water for a long time(If the product malfunction due to water ingress, our company reserves the right of final

OPERATION INSTRUCTION

ENERGY SAVING: The speaker will automatically shut down to save power under below circumstances.

circumstances.

1. In bluetooth mode, after 20 minutes waiting for no device pairing.

2. In TF card and external sound source mode, short press " (6)" key pause for 20 minutes without any operation thespeaker will shut down automatically, Please long press the power key to turn it on again.

TECHNICAL PARAMETERS

Bluetooth version 5.0 Rated power Charging voltage 5V/1A Product weight 495g

TROUBLE SHOOTING

1.Can not connect to bluetooth or no sound when playing music?
Please make sure the speaker is in bluetooth mode,and also make sure your device supports bluetooth function and bluetooth has already been turned on searching for devices. Check if there are too many bluetooth devices around, which might bring difficulties of the searching process. Please turn off other bluetooth

device.

2.What iff TF card doesn't respond?

Please make sure TF card is in good quality,and check whether the audio file is MP3 playing format,if all problems above are excluded, it might be TF card compatibility issue, you can consider of formating TF card to FAT32 or change a different TF card.

V.2.0.1 WWW.WISEPNT.COM 制造商:深圳市智旗科技有限公司 地址:中国广东省深圳市龙岗区六约社区 勤富路38号保成泰智汇广场B902 Manufacture: Shen zhen ZhiQi Technology Co., Ltd.
Address: B902 Baochengtai Square, No.38 Qinfu road, Liuyue Community,
Henggang Street,Longgang District,Shenzhen. China

FC (E (W (S)



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that

interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The devices has been evaluated to meet general RF exposure requirement, the device can be used in portable exposure condition without estriction