

## Appendix B

### RF Test Data for BT LE V5.0(BDR/EDR) (Conducted Measurement)

Product Name: Wireless network card

Trade Mark: DIEWU TXIC

Test Model: TXA083


Additional Model No.: TXA076

#### Environmental Conditions

Temperature:	23.1 ° C
Relative Humidity:	54.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Li
Supervised by:	Li Huan


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

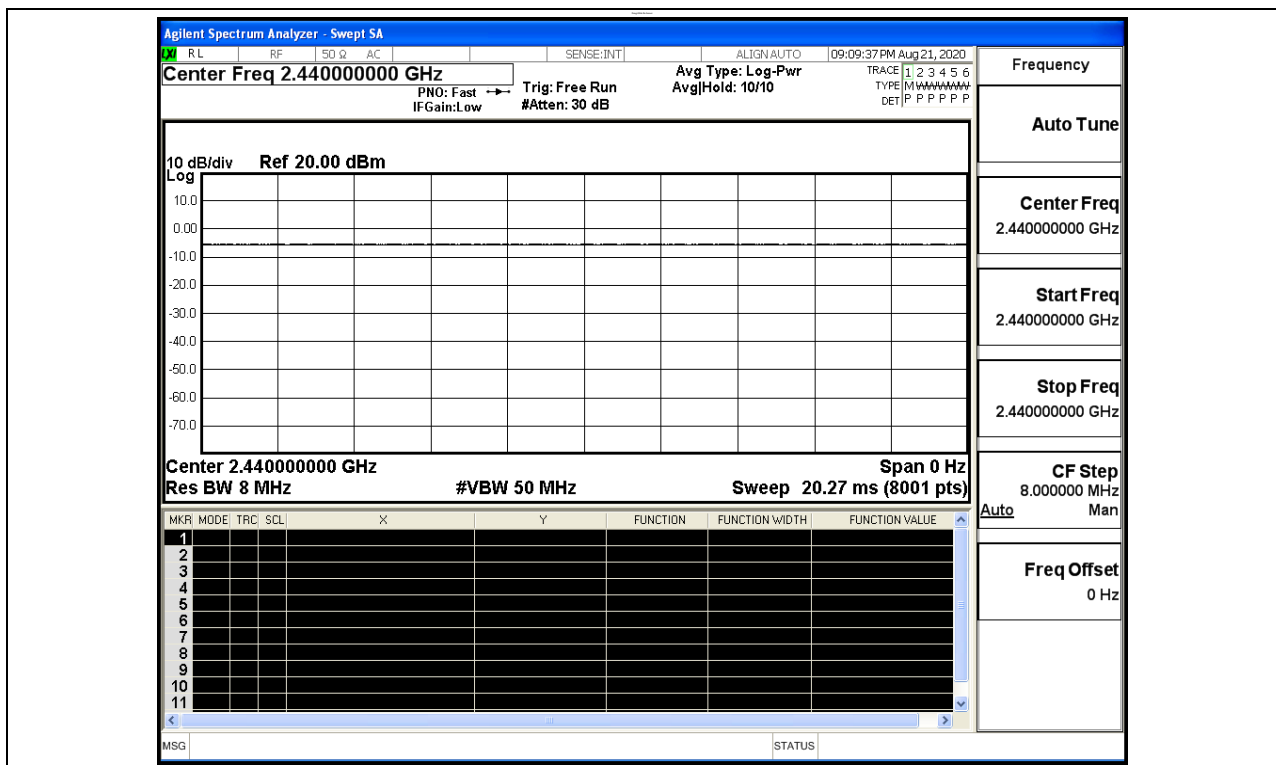


### B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	3.424	30	PASS
BT LE	MCH	1.468	30	PASS
BT LE	HCH	0.755	30	PASS

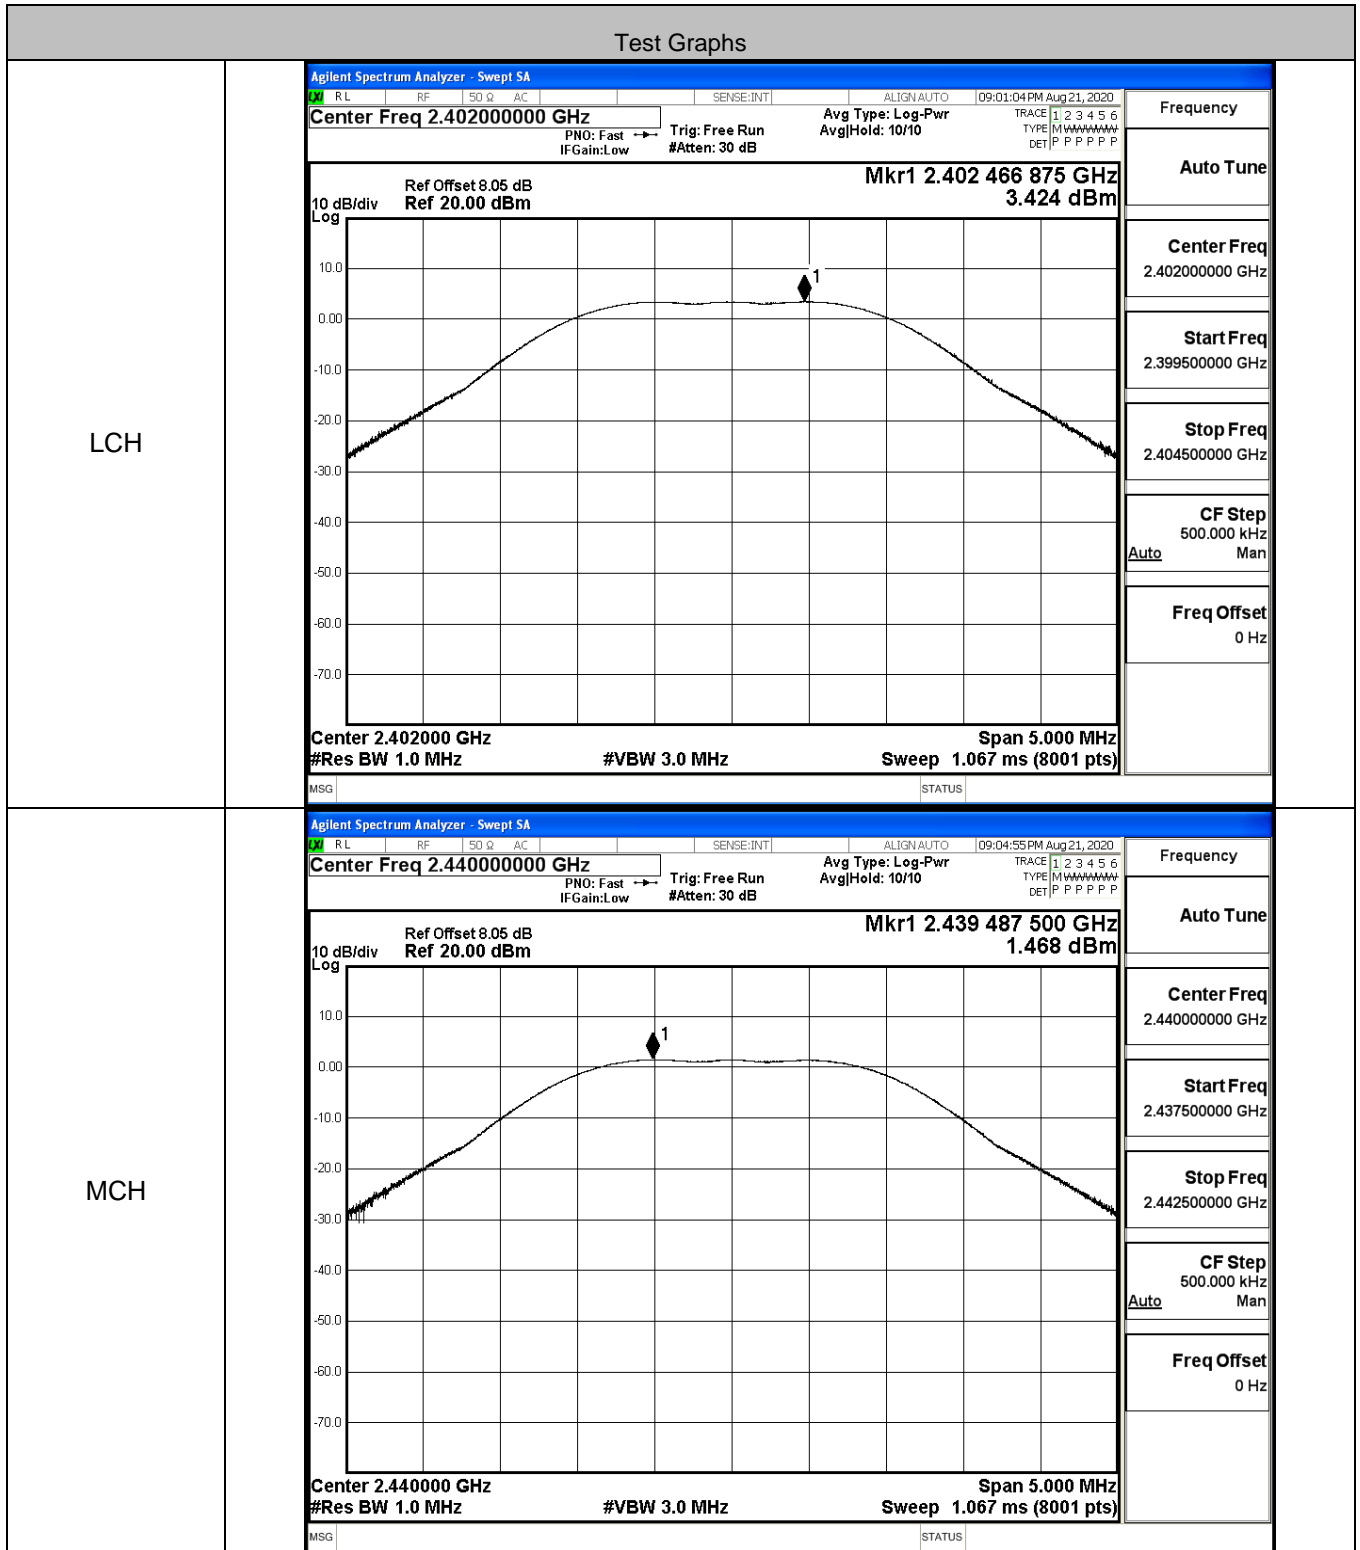



HCH

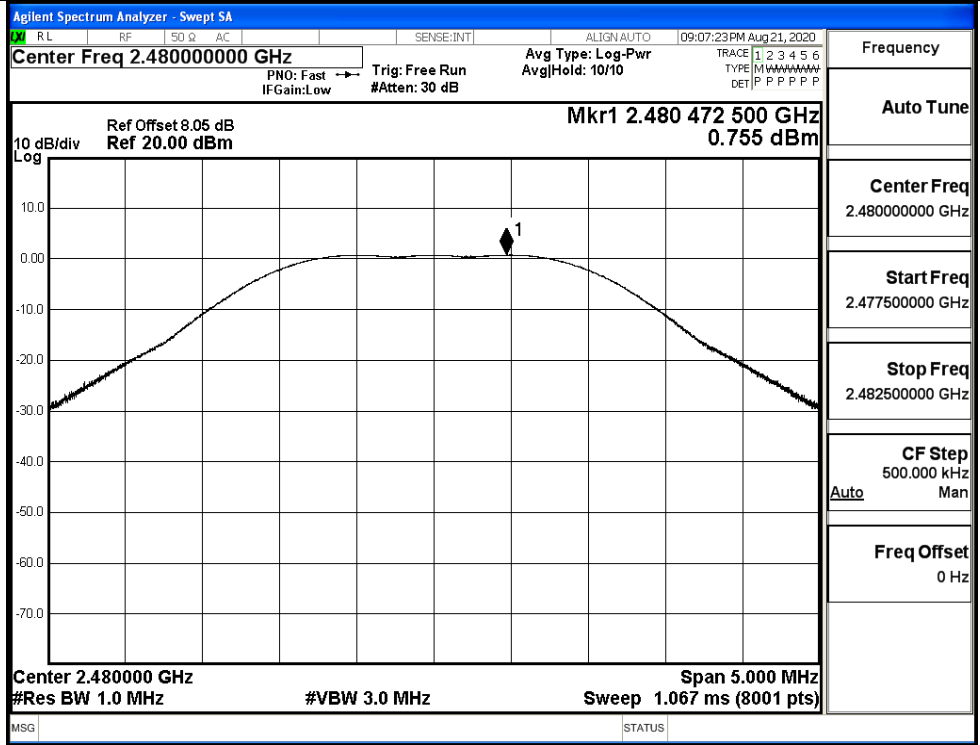

### B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-14.653	8	PASS
BT LE	MCH	-16.332	8	PASS
BT LE	HCH	-16.924	8	PASS



#### Test Graphs

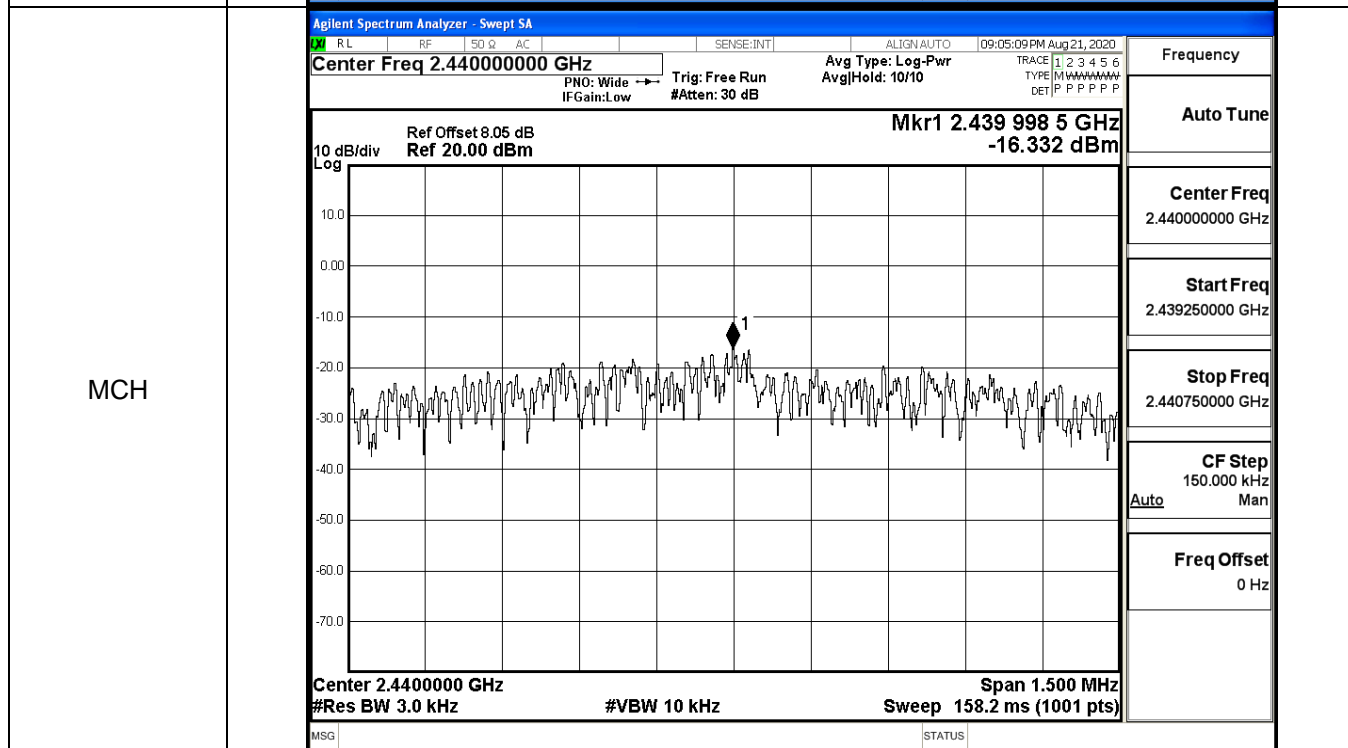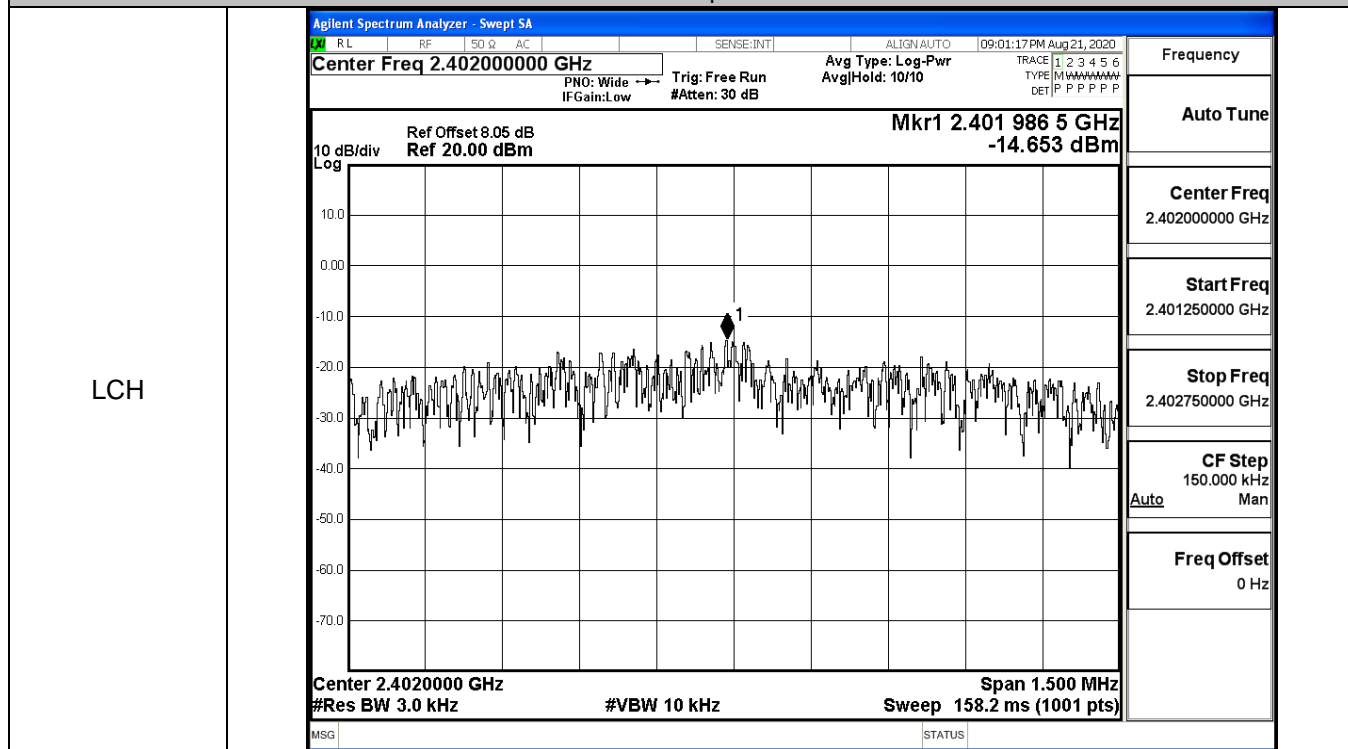




**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	1.099	≥0.5	PASS
BT LE	MCH	1.110	≥0.5	PASS
BT LE	HCH	1.122	≥0.5	PASS

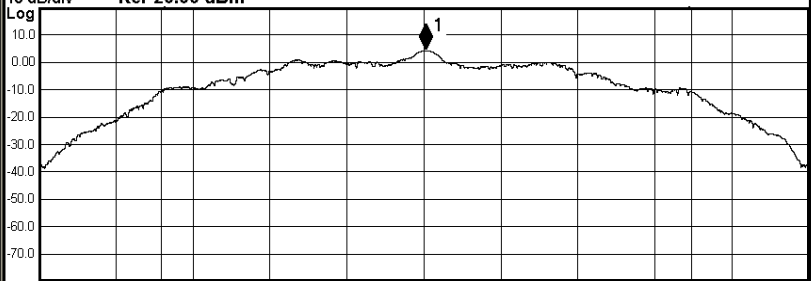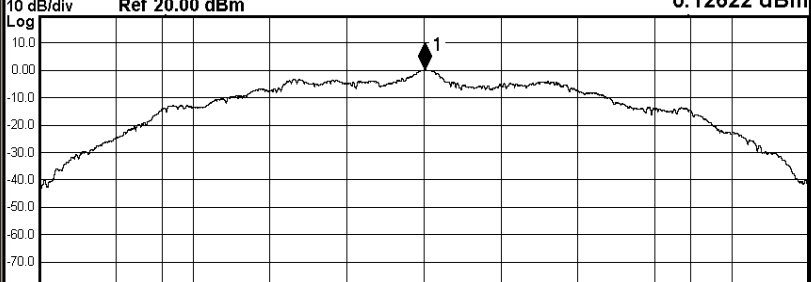
Test Graphs													
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="font-size: small; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: x-small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 08:58:58 PM Aug 21, 2020</p> <p style="font-size: small; margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p style="font-size: x-small; margin: 0;">Trig: Free Run AvgHold: 1/1</p> <p style="font-size: x-small; margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px; margin: 5px 0;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 8.05 dB Mkr1 2.4020068 GHz</p> <p style="font-size: x-small; margin: 0;">Log Ref 20.00 dBm 4.2487 dBm</p>  </div> <p style="font-size: x-small; margin: 0;">Center 2.402 GHz Span 3 MHz</p> <p style="font-size: x-small; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.1 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>2.0553 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>12.525 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.099 MHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	11.1 dBm	<b>2.0553 MHz</b>			Transmit Freq Error	12.525 kHz	OBW Power 99.00 %	x dB Bandwidth	1.099 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	11.1 dBm											
<b>2.0553 MHz</b>													
Transmit Freq Error	12.525 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.099 MHz	x dB -6.00 dB											
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="font-size: small; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: x-small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 09:03:20 PM Aug 21, 2020</p> <p style="font-size: small; margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p style="font-size: x-small; margin: 0;">Trig: Free Run AvgHold: &gt;1/1</p> <p style="font-size: x-small; margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px; margin: 5px 0;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 8.05 dB Mkr1 2.4400038 GHz</p> <p style="font-size: x-small; margin: 0;">Log Ref 20.00 dBm 0.12622 dBm</p>  </div> <p style="font-size: x-small; margin: 0;">Center 2.44 GHz Span 3 MHz</p> <p style="font-size: x-small; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.94 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>2.0553 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>9.976 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.110 MHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	6.94 dBm	<b>2.0553 MHz</b>			Transmit Freq Error	9.976 kHz	OBW Power 99.00 %	x dB Bandwidth	1.110 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	6.94 dBm											
<b>2.0553 MHz</b>													
Transmit Freq Error	9.976 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.110 MHz	x dB -6.00 dB											

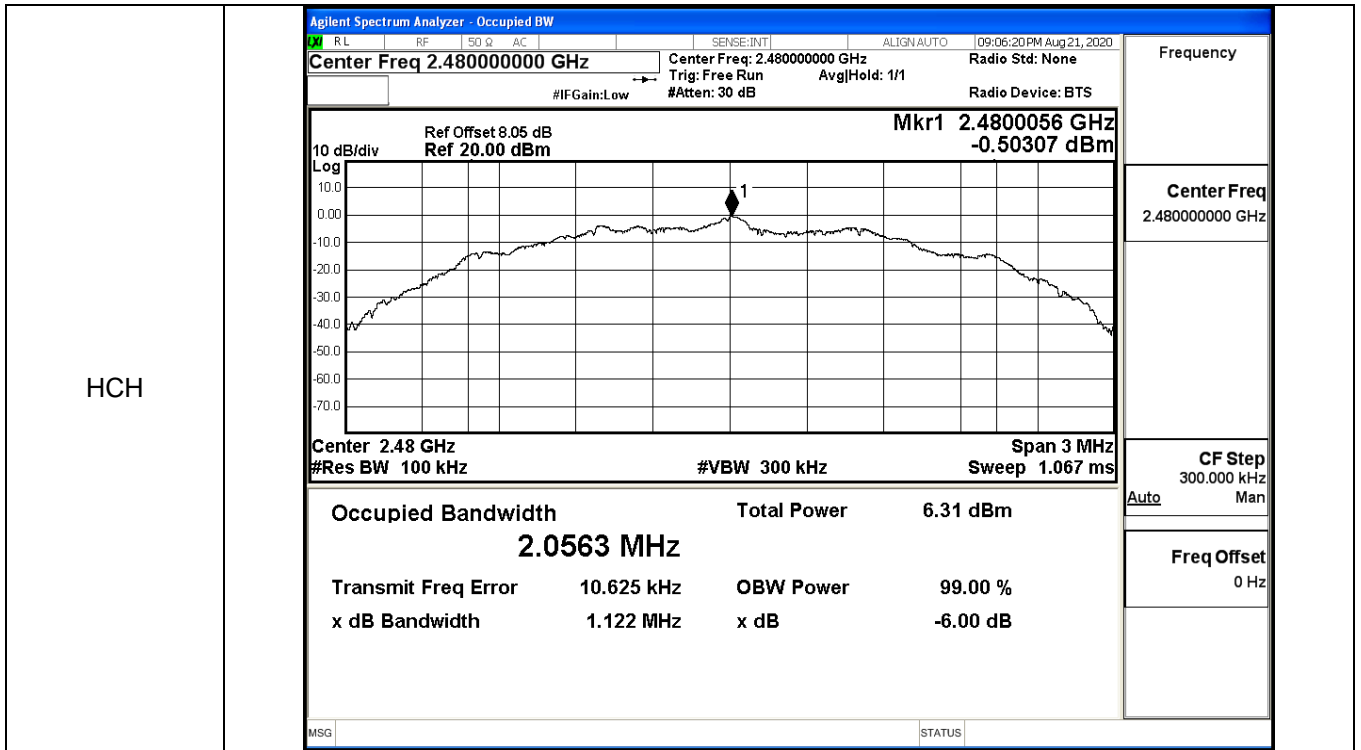

### B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	3.33	-37.760	-16.670	PASS
BT LE	MCH	1.354	-37.597	-18.646	PASS
BT LE	HCH	0.684	-37.122	-19.316	PASS


BT LE\_LCH\_Graphs

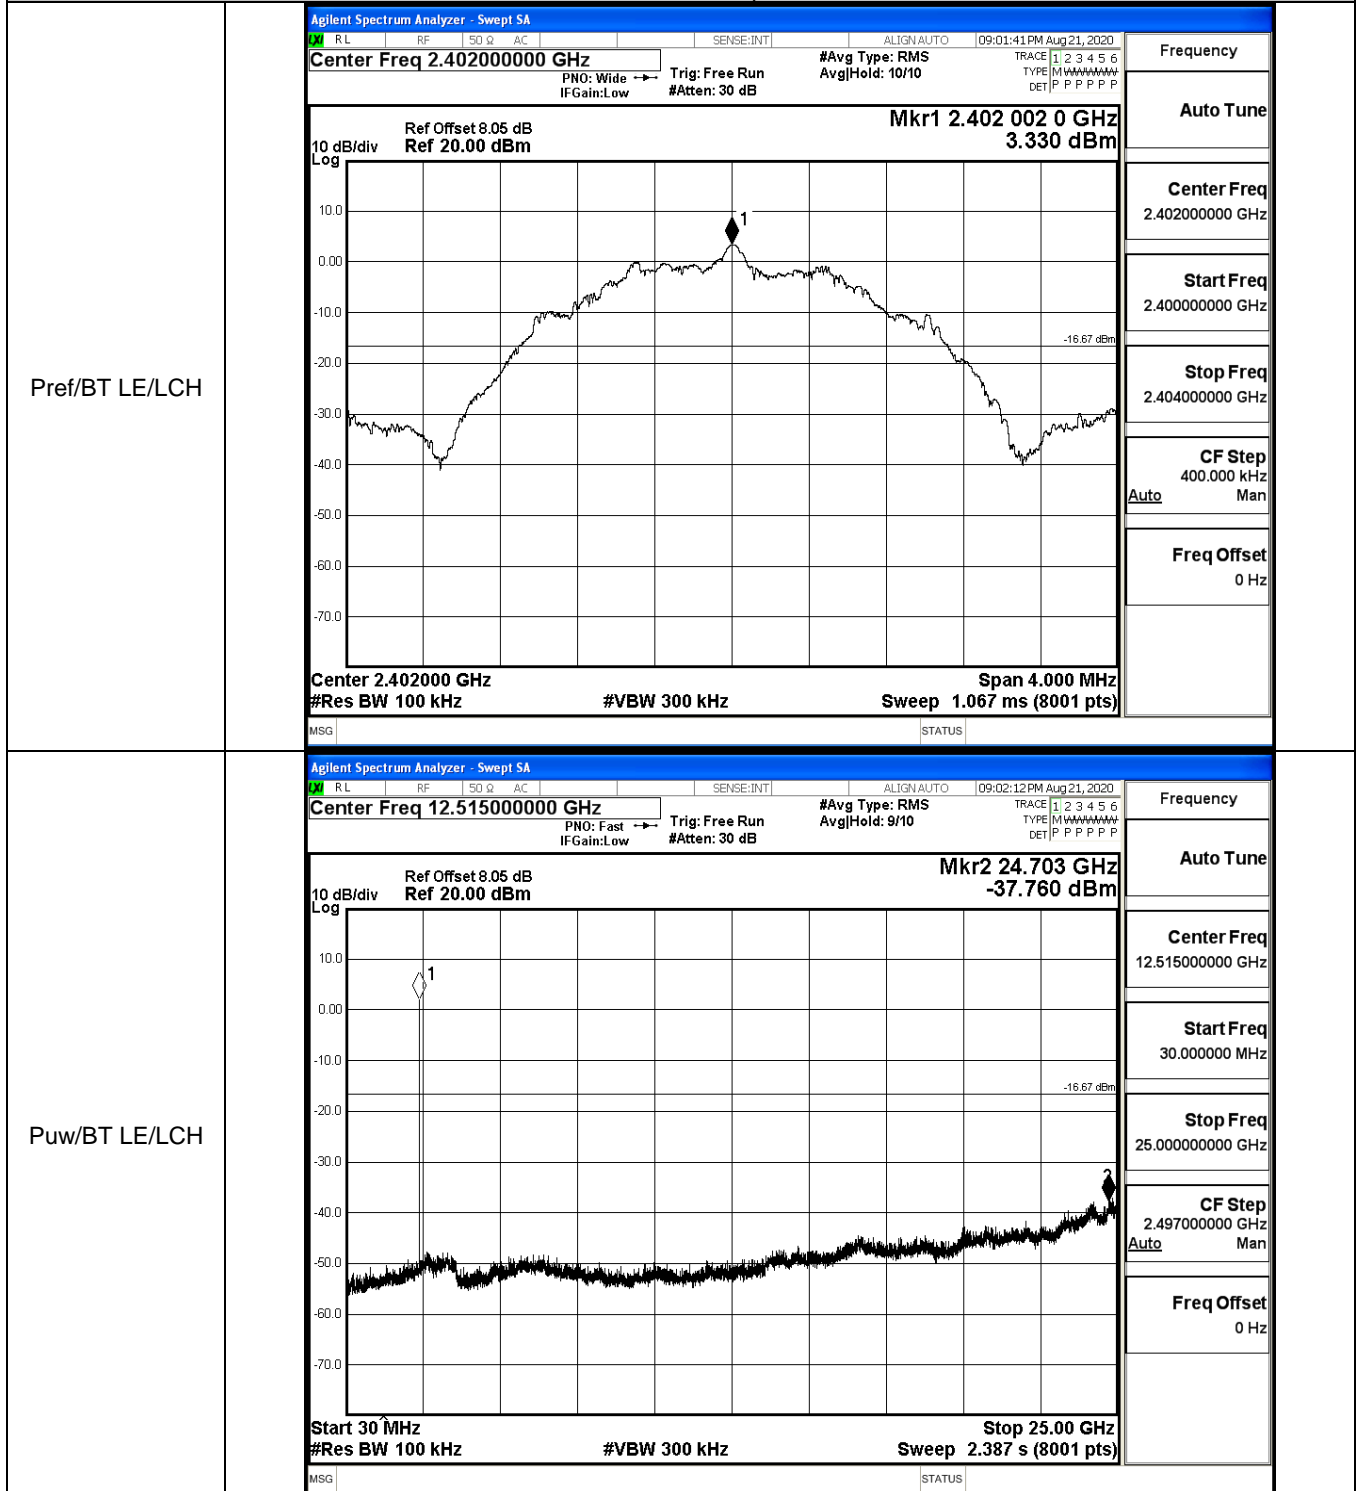




BT LE\_MCH\_Graphs

Pref/BT LE/MCH

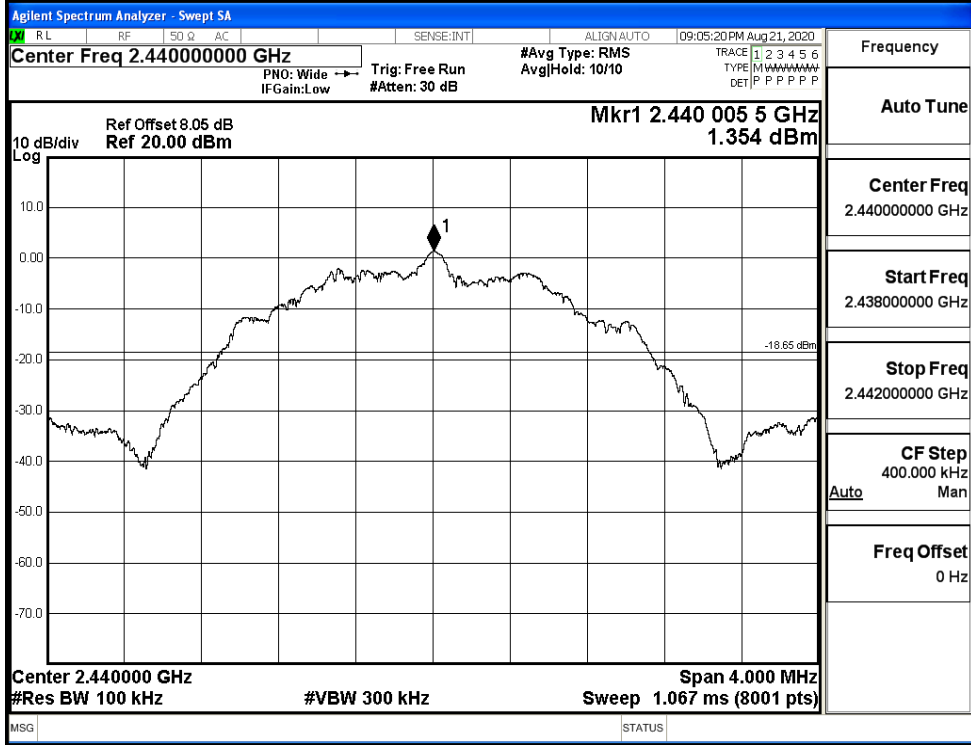


Puw/BT LE/MCH

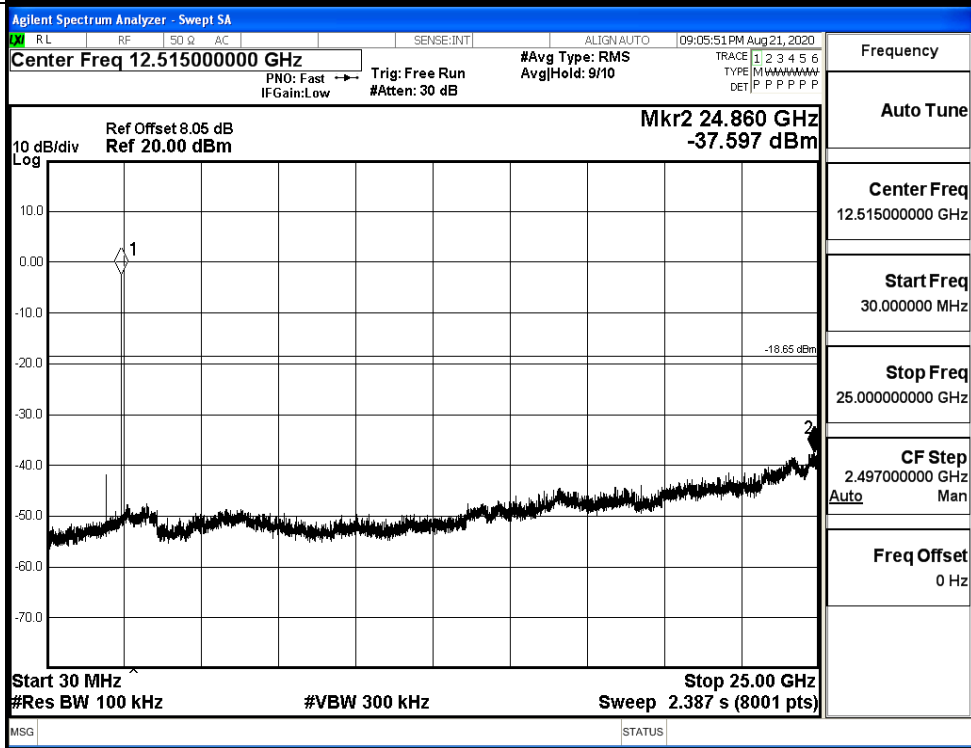


BT LE\_HCH\_Graphs

Pref/BT LE/HCH

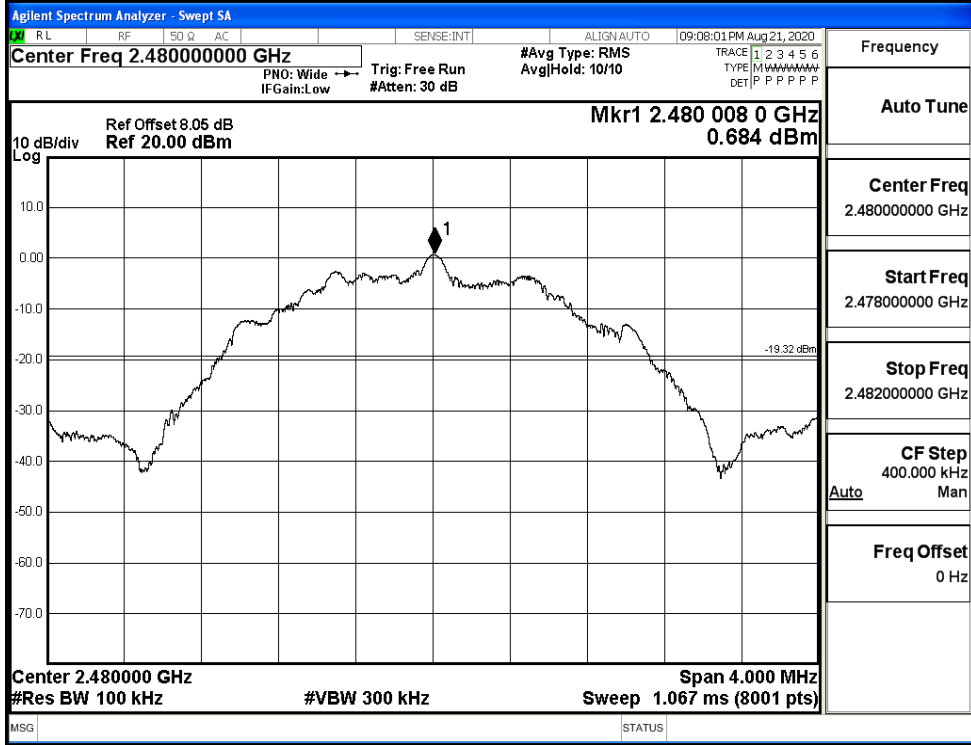



Puw/BT LE/HCH

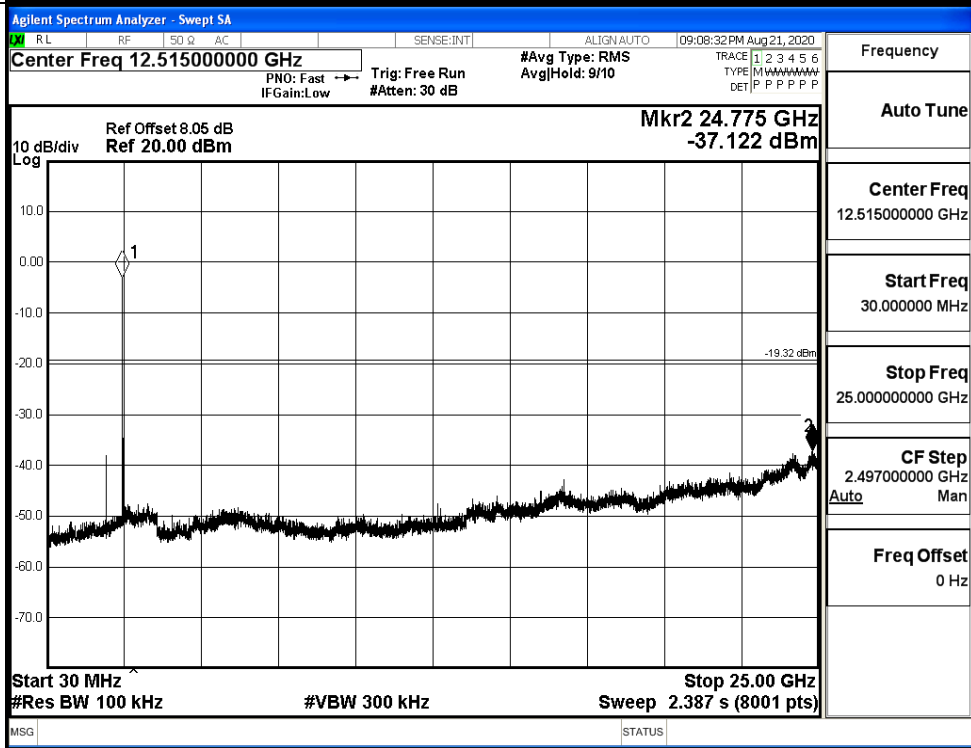

### B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	3.482	-49.915	-16.52	PASS
BT LE	HCH	0.865	-49.201	-19.14	PASS


#### Test Graphs

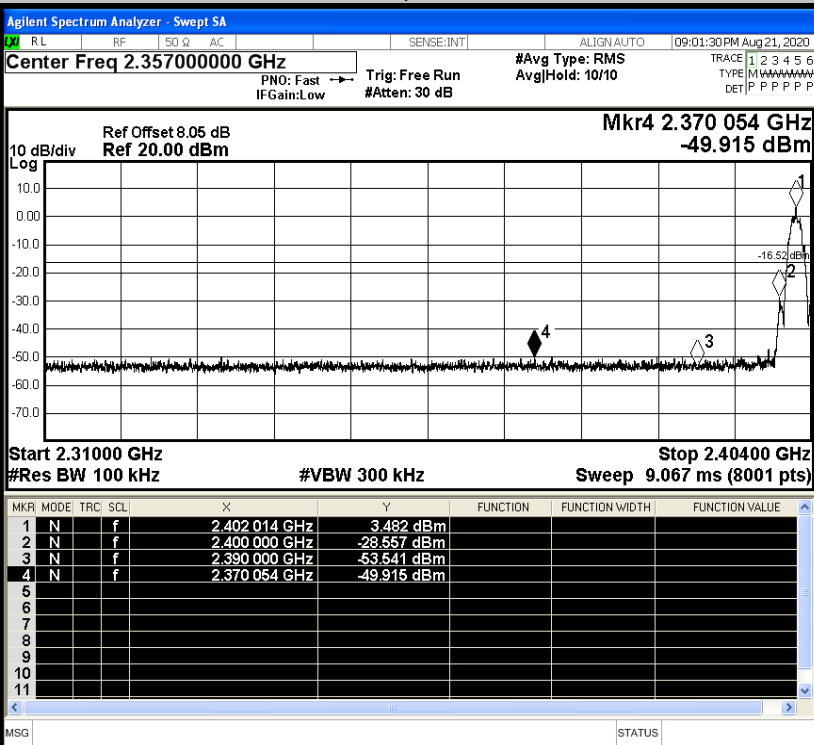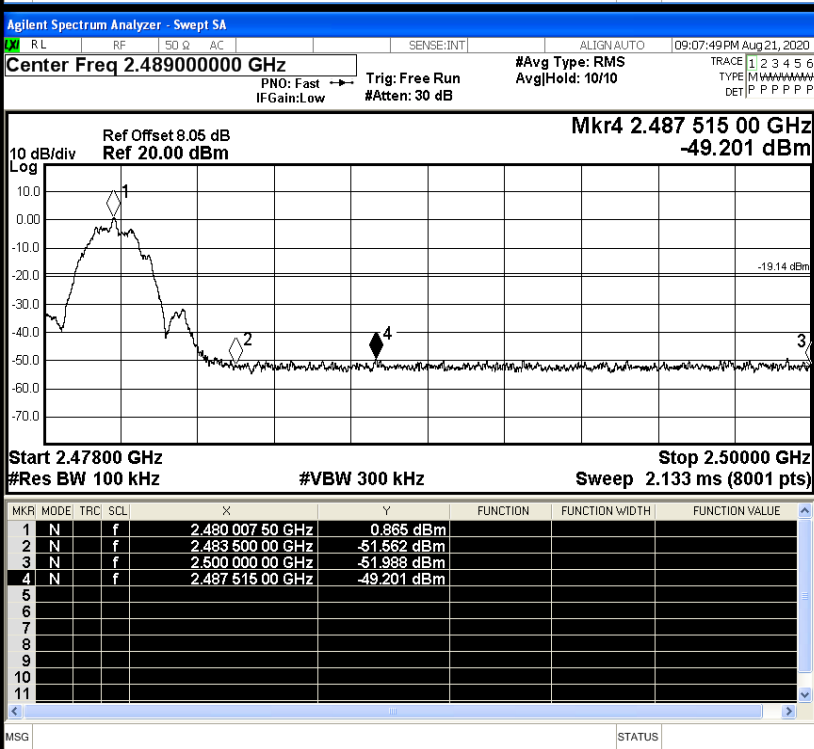LCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>


## B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-42.74	5	0	57.49	PEAK	74	PASS
		Ant1	2310.0	-53.31	5	0	46.92	AV	54	PASS
		Ant1	2390.0	-42.58	5	0	57.65	PEAK	74	PASS
		Ant1	2390.0	-52.93	5	0	47.30	AV	54	PASS
	2480	Ant1	2483.5	-40.44	5	0	59.79	PEAK	74	PASS
		Ant1	2483.5	-51.86	5	0	48.37	AV	54	PASS
		Ant1	2500.0	-40.97	5	0	59.26	PEAK	74	PASS
		Ant1	2500.0	-52.25	5	0	47.98	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

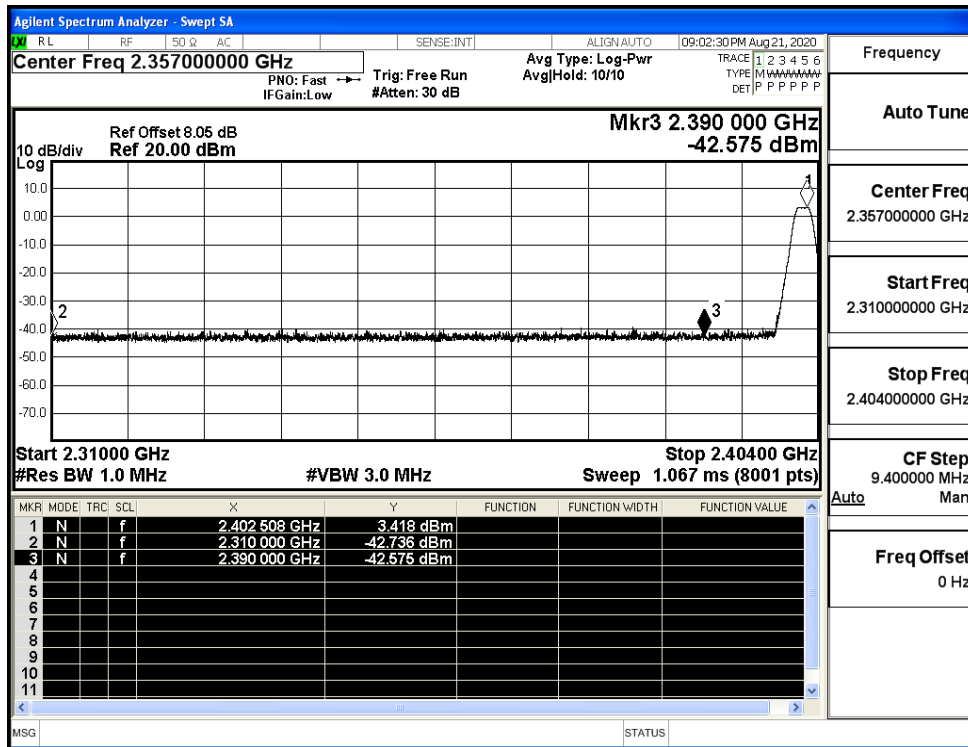

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

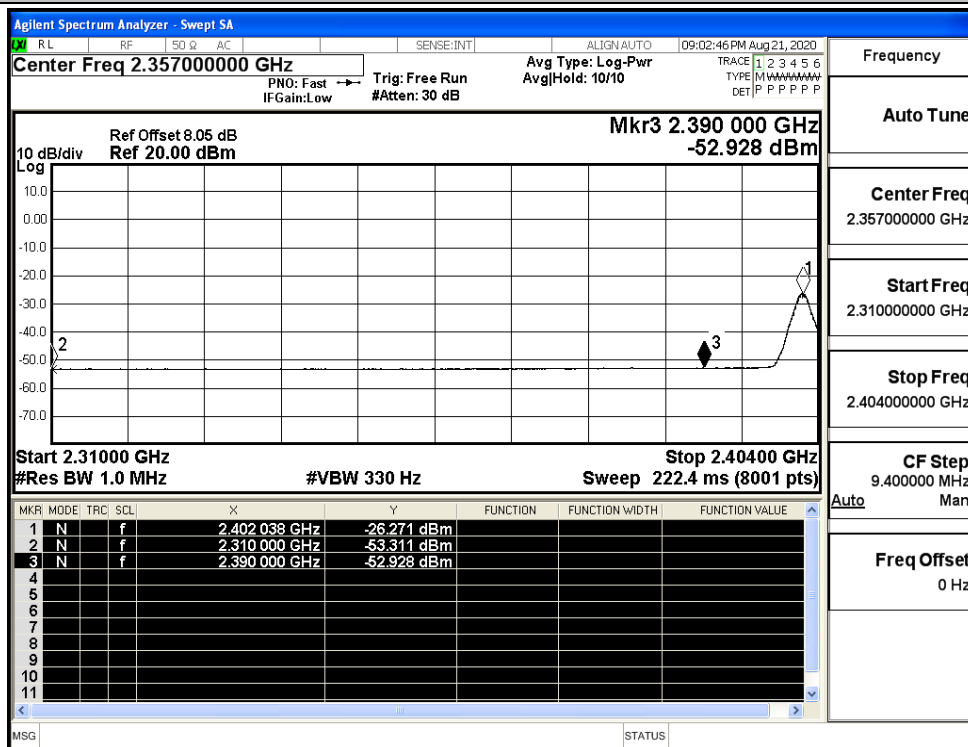

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

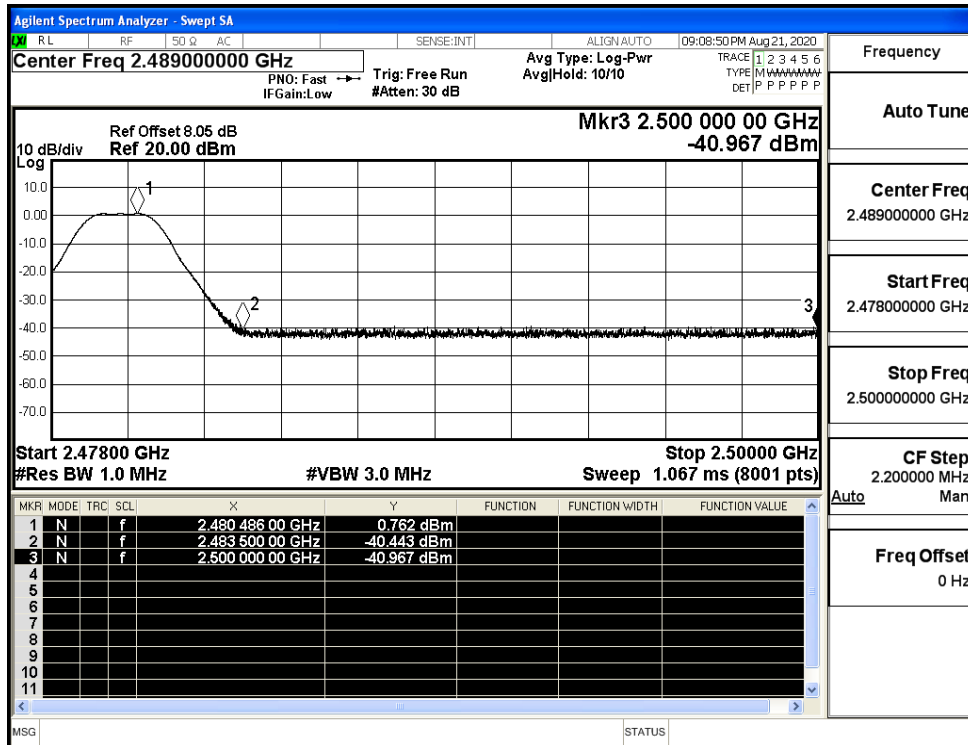

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

