

Prüfbericht-Nr.: Test report no.:	CN22K4E6 (P15C-BLE) 001	Auftrags-Nr.: Order no.:	238539050	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022-01-24	
Auftraggeber: Client:	System Design Co., Ltd. 3-1805, Itagaki, Fukui, Japan			
Prüfgegenstand: Test item:	RM9000			
Bezeichnung / Typ-Nr.: Identification / Type no.:	RM9000			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (BLE)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2022-01-13			
Prüfmuster-Nr.: Test sample no.:	A003200322-004 A003200322-003			
Prüfzeitraum: Testing period:	2022-05-09 - 2022-05-16			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
zusammengestellt von: compiled by:	Ryan Chen Senior Project Manager	genehmigt von: authorized by:	 Brenda Chen Senior Project Manager	
Datum: Date:	2022-05-20	Ausstellungsdatum: Issue date:	2022-05-20	
Stellung / Position:		Stellung / Position:		
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(all) = entspricht nicht o.g. Prüfgrundlage(n) * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(all) = failed a.m. test specification(s) N/A = nicht anwendbar N/T = nicht getestet N/A = not applicable N/T = not tested				
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 2 von 27
Page 2 of 27

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS	10
4. TEST SET-UP AND OPERATION MODES	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL	11
4.3 TEST OPERATION AND TEST SOFTWARE	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 <i>Antenna Requirement</i>	15
5.1.2 <i>Peak Output Power</i>	16
5.1.3 <i>6 dB Bandwidth and 99% Occupied Bandwidth</i>	18
5.1.4 <i>Power Spectral Density</i>	19
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth</i>	20
5.1.6 <i>Radiated Spurious Emissions and Band Edges</i>	21
5.2 MAINS EMISSION	26
5.2.1 <i>Mains Conducted Emission</i>	26

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 4 von 27
Page 4 of 27

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 5 von 27
Page 5 of 27

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN22K4E6 (P15C-BLE) 001	Original Release	2022-05-20

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 7 von 27
Page 7 of 27

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a RM9000. It contains Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	RM9000
Type Identification	RM9000
FCC ID	2A3YR-RM9000-001

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Number	40
Data Rate	1Mbps
Operation Voltage	3 Vdc
Modulation	GFSK
Maximum Output Power (mW)	2.79
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 10 von 27
Page 10 of 27

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	5
2440	5
2480	5

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	SmartRF_Studio_7-2.23.0
---------------	-------------------------

The samples were used as follows:

A003200322-004

A003200322-003

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Above 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Below 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Mains Conducted Emission

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
 Test Report No.

 Seite 13 von 27
 Page 13 of 27

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.7-24.6 °C	69.6-73.1 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	22.6-24.5 °C	52-54 %	Ivan Chiang
Radiated Spurious Emissions below 1 GHz	22.6-24.5 °C	52-54 %	Ivan Chiang
Mains Conducted Emission	21.9 °C	59 %	Ray Huang

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

None


Support Unit

Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
1	Power Supply	Gwinstek	GPS-3303	GEU915615	-	-	-	Radiated
2	USB Cable	TUV-001	TUV-001	N/A	YES	NO	300	
3	NB	Lenovo	81BL	MP1DCD6Y	-	-	-	
A	Fixture Cable	TUV JP	TUV JP-01	N/A	NO	NO	5	
B	Fixture	TUV JP	TUV JP-02	N/A	-	-	-	
C	Micro USB	TUV JP	TUV JP-03	N/A	NO	NO	100	
D	Antenna	TUV JP	TUV JP-04	N/A	-	-	-	
E	Antenna Cable	TUV JP	TUV JP-05	N/A	NO	NO	300	
1	DC Power Supply	Gwinstek	GPS-3030	N/A	-	-	-	
2	DC Cable	TUV	TUV-01	N/A	NO	NO	10	
3	USB to USB	TUV	TUV-002	N/A	NO	NO	300	
4	Notebook	Lenovo	81BL	MP1DCD6Y	-	-	-	

 Mains
Conducted


4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

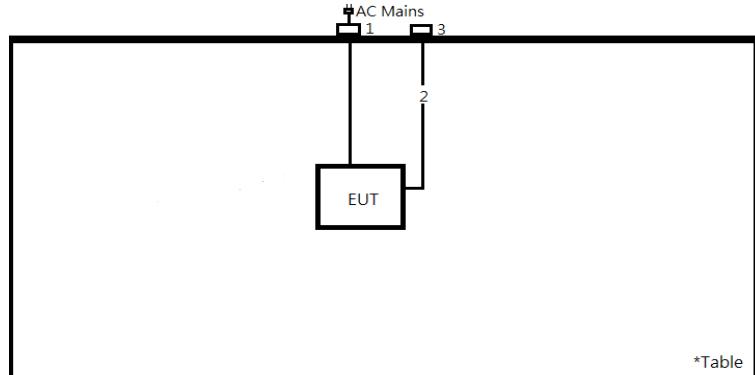

*Table

<Mains Conducted Emission mode>

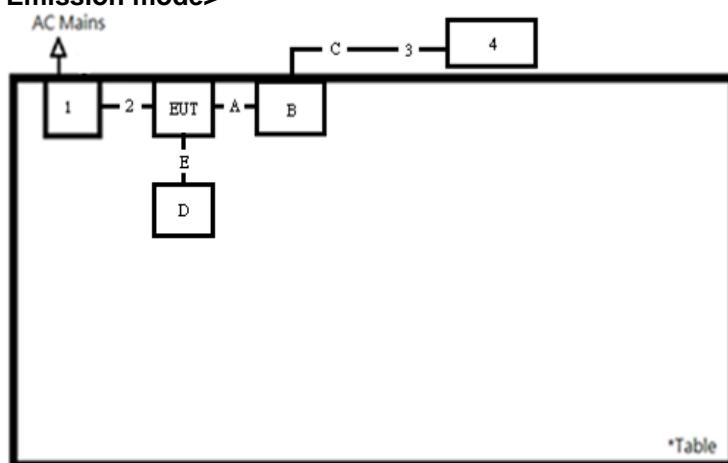

*Table

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2.14 dBi.

The antenna is dipole antenna with no possibility of replacement with a non-approved antenna by the

end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 16 von 27
Page 16 of 27

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2022/3/15	2023/3/14	2022/5/10	2022/5/10
Power Sensor	Anritsu	MA2411B	1725269	2022/3/15	2023/3/14	2022/5/10	2022/5/10

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Prüfbericht - Nr.: CN22K4E6 (P15C-BLE) 001
Test Report No.

Seite 17 von 27
Page 17 of 27

Test Result

Peak Output Power

<1Mbps>

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (dBm)
		(dBm)	(mW)	
Low Channel	2402	4.45	2.79	30
Middle Channel	2440	4.42	2.77	30
High Channel	2480	4.40	2.75	30

Average Power

<1Mbps>

Channel	Channel Frequency (MHz)	Average Power	
		(dBm)	(mW)
Low Channel	2402	4.39	2.75
Middle Channel	2440	4.37	2.74
High Channel	2480	4.36	2.73

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
 Test Report No.


 Seite 18 von 27
 Page 18 of 27

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/5/10	2022/5/10

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/5/10	2022/5/10

Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.

Prüfbericht - Nr.: **CN22K4E6 (P15C-BLE) 001**
Test Report No.

Seite 20 von 27
Page 20 of 27


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/5/10	2022/5/10

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

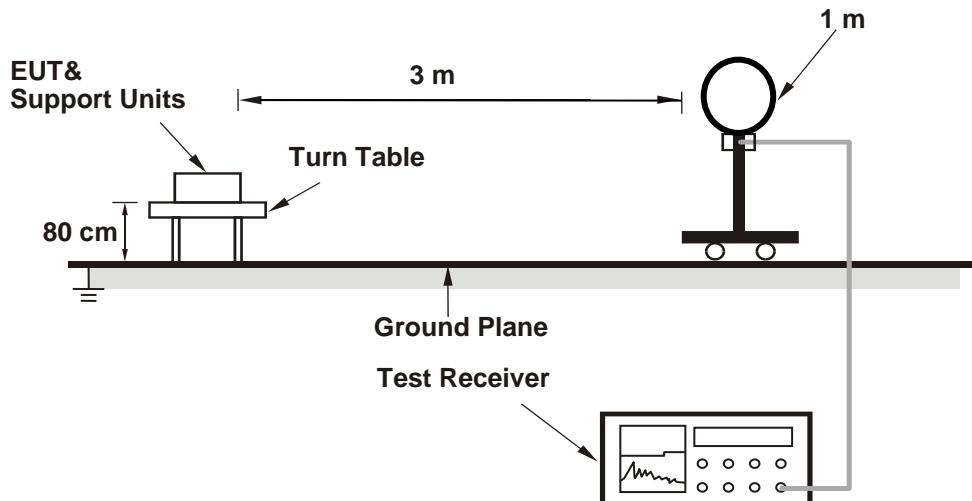

<Radiated Emissions 30 MHz to 1 GHz>

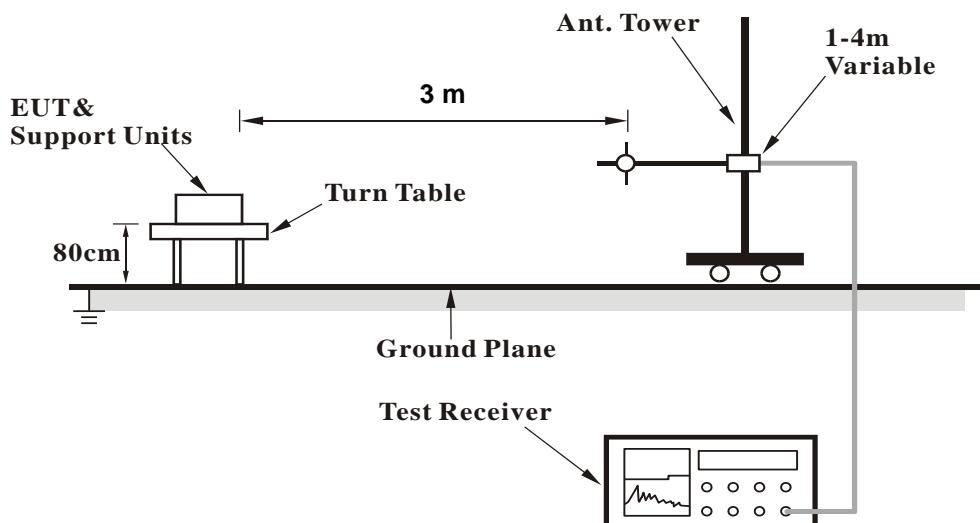

<Radiated Emissions above 1 GHz>

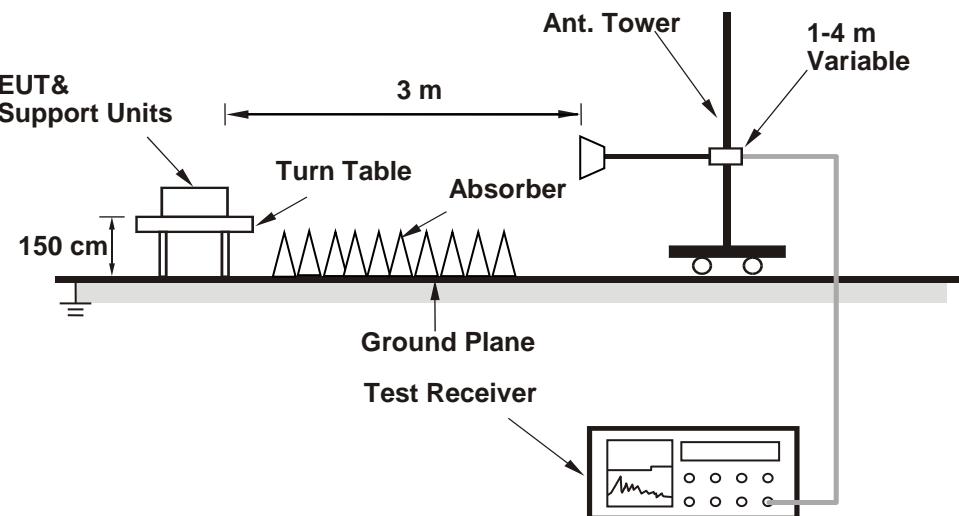

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN22K4E6 (P15C-BLE) 001
Test Report No.

Seite 23 von 27
Page 23 of 27

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23
Horn Antenna	ETS-Lindgren	3117	00218929	2021/11/25	2022/11/24
HF-AMP + AC source	EMCI	EMC051845SE	980635	2022/1/20	2023/1/19
HF-AMP + AC source	EMCI	EMC184045SE	980656	2022/1/20	2023/1/19
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2022/3/29	2023/3/28
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2022/4/6	2023/4/5
LF-AMP	Agilent	8447D	2727A05146	2022/2/16	2023/2/15
Below 30 MHz					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2021/12/8	2022/12/7

Prüfbericht - Nr.: CN22K4E6 (P15C-BLE) 001
Test Report No.

Seite 24 von 27
Page 24 of 27

Test Procedures

For Radiated Emissions below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.:**CN22K4E6 (P15C-BLE) 001**

Test Report No.

Seite 25 von 27

Page 25 of 27

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

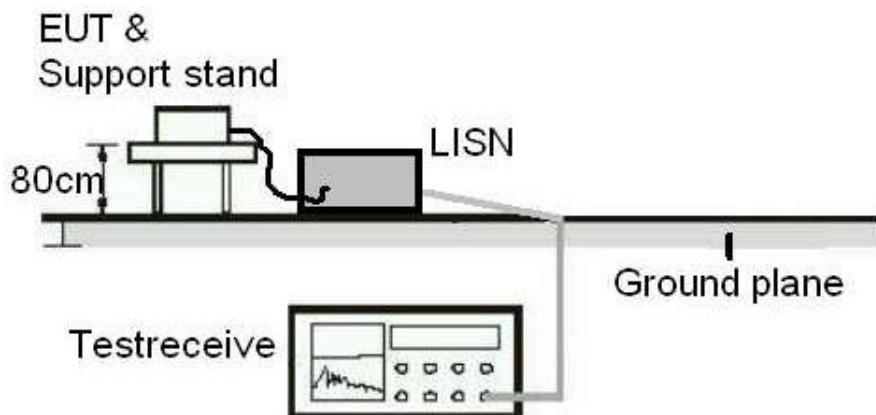

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2021/9/23	2022/9/22
EMI Test Receiver	R&S	ESCI	1816063	2021/11/15	2022/11/14

Prüfbericht - Nr.: CN22K4E6 (P15C-BLE) 001
Test Report No.

Seite 27 von 27
Page 27 of 27

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results


Please refer to Appendix B.

Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth

BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	689.31	> 500	Pass
Middle Channel	2440	674.33	> 500	Pass
High Channel	2480	724.30	> 500	Pass

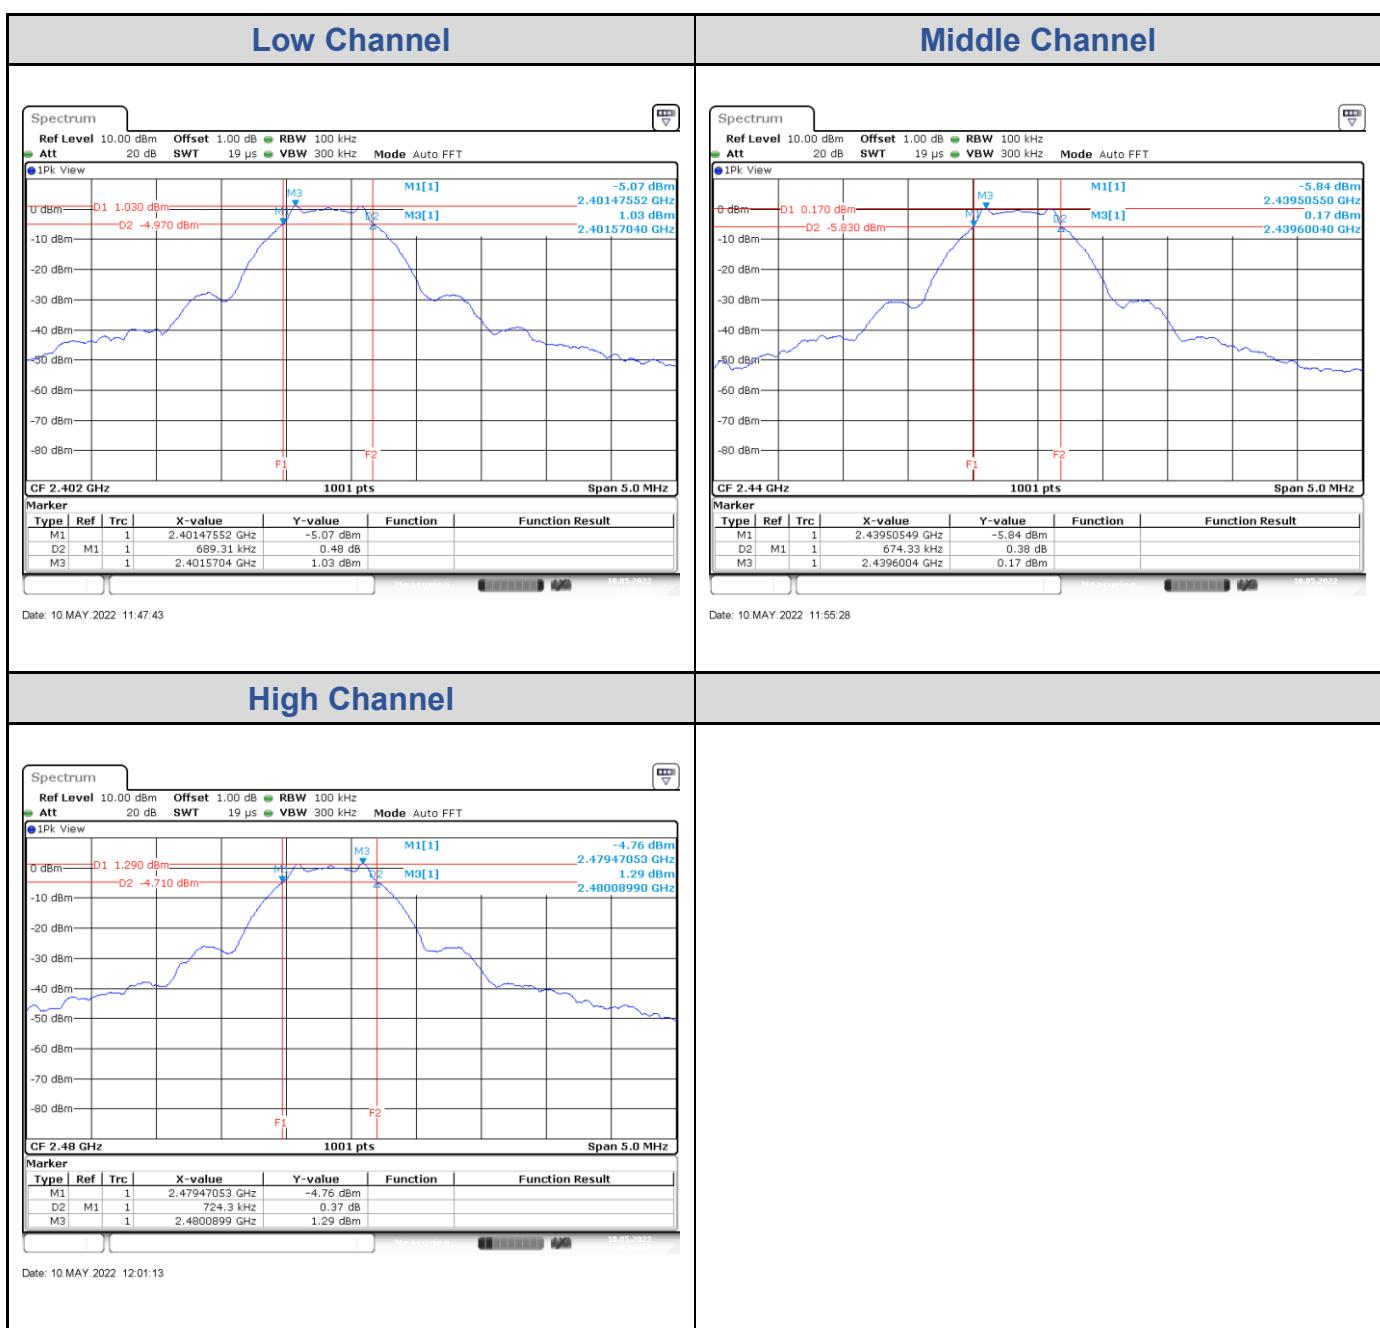

Test Result of 99% Occupied Bandwidth

BLE_1M


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.05
Middle Channel	2440	1.05
High Channel	2480	1.03



Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-13.48	8	Pass
Middle Channel	2440	-15.59	8	Pass
High Channel	2480	-13.95	8	Pass

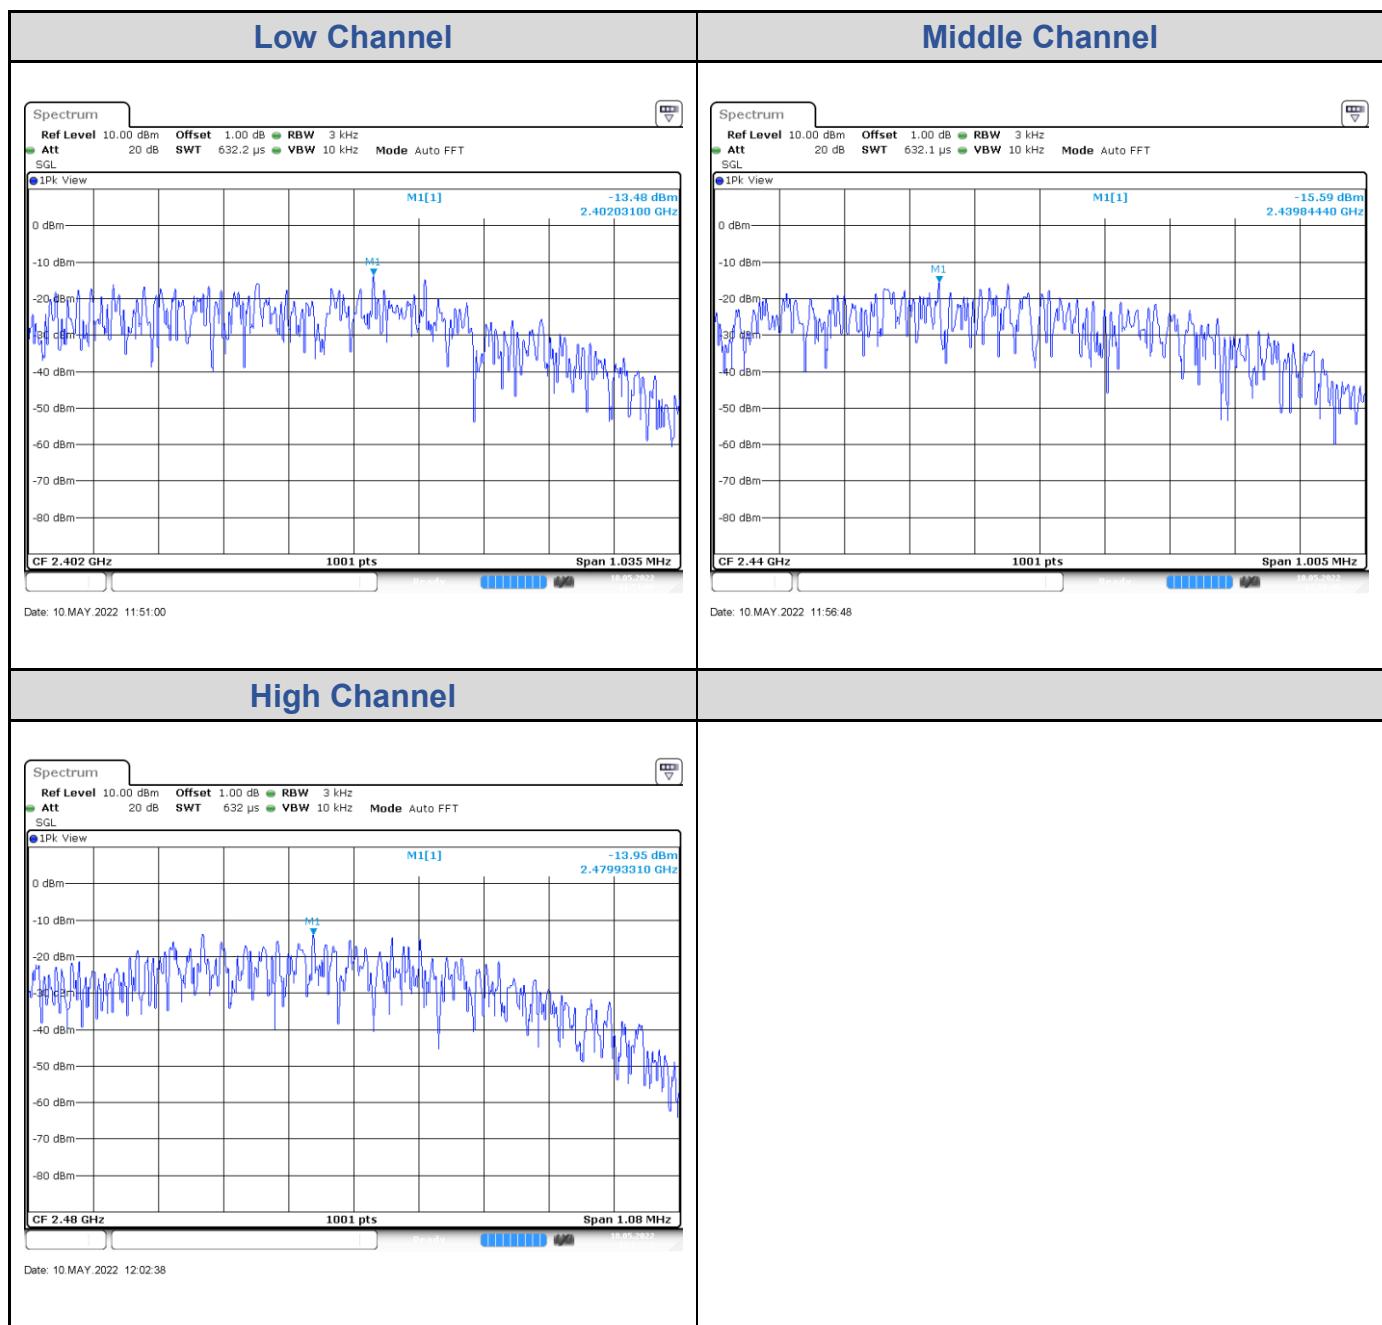


Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M

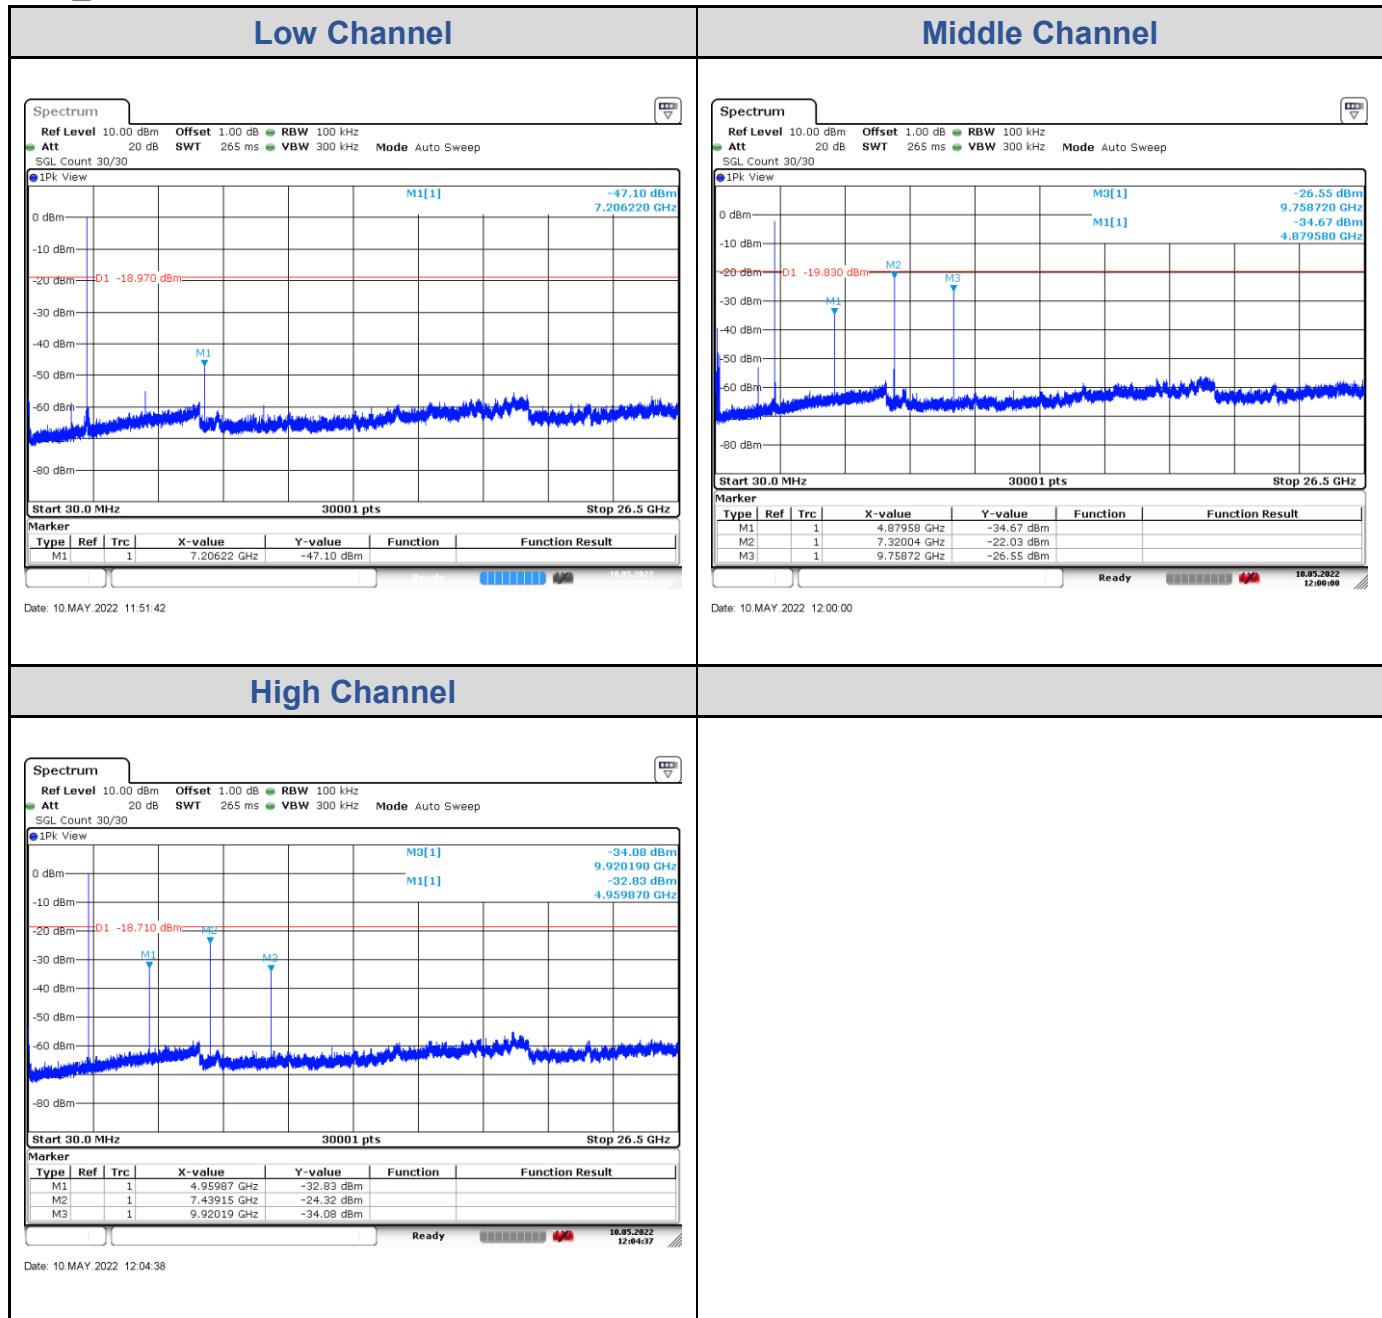


Test Result of Conducted Band Edge, Tx Mode

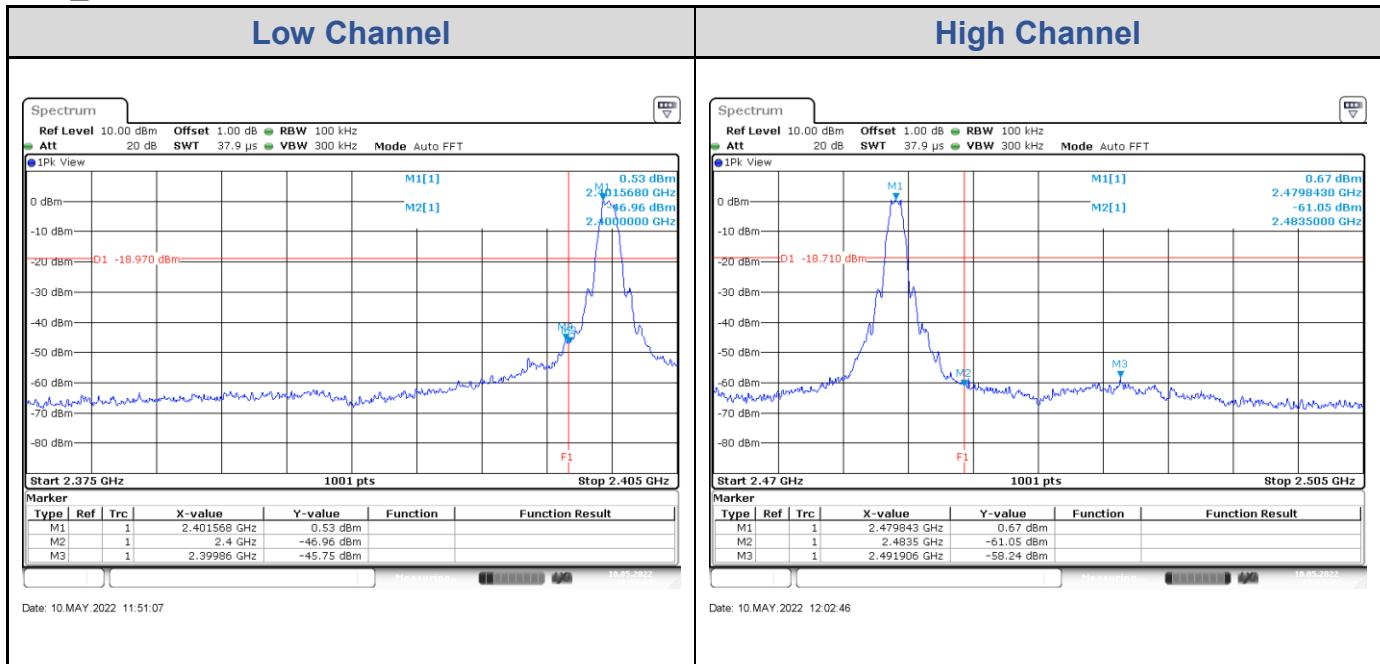BLE_1M


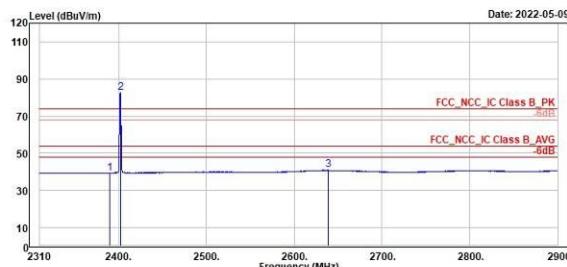
Appendix B: Test Results of Radiated Spurious Emissions & Mains Conducted Emission Test

Band Edges, 2.31GHz ~ 2.9GHz

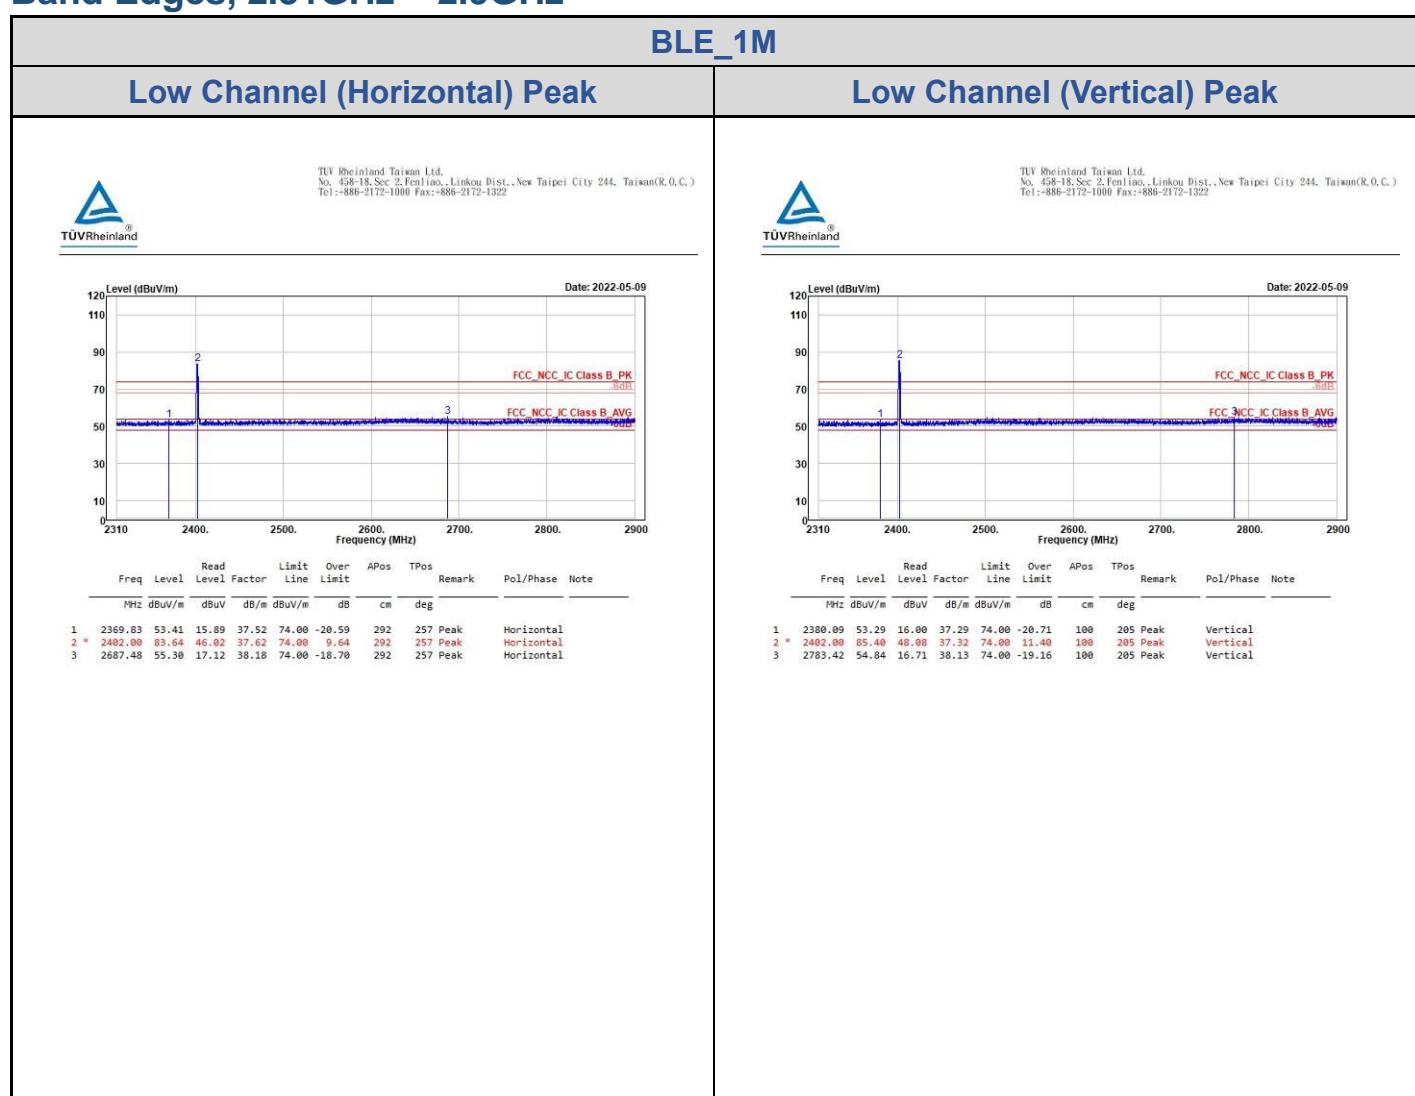

BLE_1M
Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322



Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2389.53	39.43	1.85	37.58	54.00	-14.57	292	257	Average	Horizontal	
2 *	2402.00	82.57	44.95	37.62	54.00	28.57	292	257	Average	Horizontal	
3	2638.75	48.93	2.74	38.19	54.00	-13.07	292	257	Average	Horizontal	

Low Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

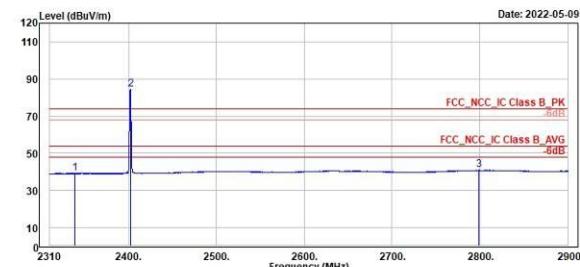

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2338.79	39.10	2.02	37.17	54.00	14.01	100	205	Average	Vertical	
2 *	2402.00	84.40	47.08	37.32	54.00	30.40	100	205	Average	Vertical	
3	2799.35	48.91	2.73	38.18	54.00	-13.09	100	205	Average	Vertical	

BLE_1M
High Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

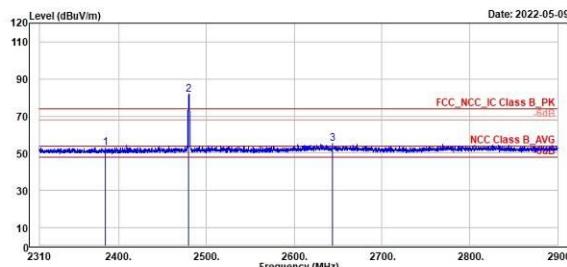

Freq	Level	Read	Line	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2385.40	53.07	15.50	37.57	74.00	-20.93	118	259 Peak	Horizontal	
2 *	2480.00	81.60	44.01	37.59	74.00	7.60	118	259 Peak	Horizontal	
3	2643.94	55.13	16.93	38.20	74.00	-18.87	118	259 Peak	Horizontal	

High Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

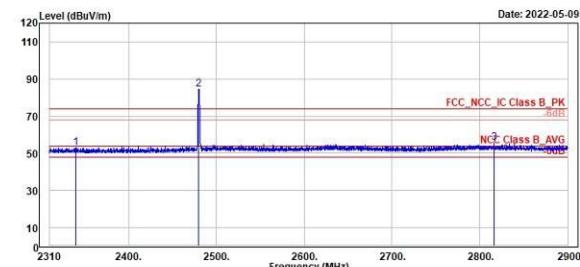

Freq	Level	Read	Line	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2339.97	53.13	15.95	37.48	74.00	-26.07	119	239 Peak	Vertical	
2 *	2480.00	84.56	46.07	37.69	74.00	16.56	119	239 Peak	Vertical	
3	2616.46	55.80	17.60	38.20	74.00	-18.20	119	239 Peak	Vertical	

BLE_1M
High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

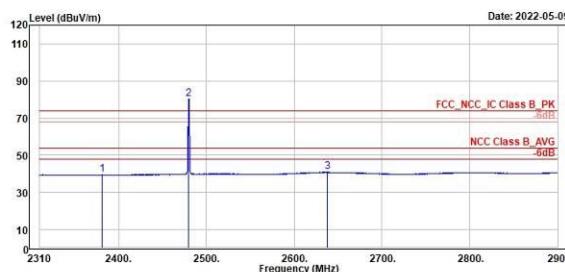

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2391.63	39.47	1.92	37.55	54.00	-14.53	118	259	Average	Horizontal	
2 *	2480.00	88.38	42.79	37.59	54.00	26.38	118	259	Average	Horizontal	
3	2637.69	48.98	2.79	38.19	54.00	-13.02	118	259	Average	Horizontal	

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

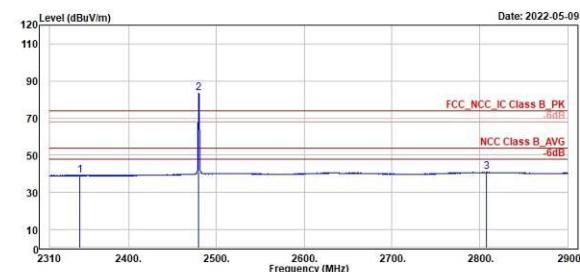

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2344.93	39.20	1.98	37.22	54.00	14.00	119	239	Average	Vertical	
2 *	2480.00	83.42	45.73	37.69	54.00	29.42	119	239	Average	Vertical	
3	2687.37	48.92	2.73	38.19	54.00	-13.08	119	239	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz
BLE_1M
Low Channel (Open) 9kHz~150kHz
Low Channel (Open) 150kHz~30MHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

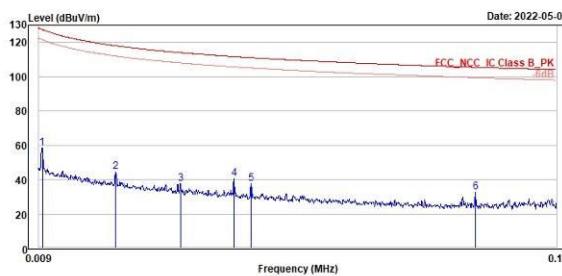

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	58.10	40.47	17.71	127.60	-69.42	100	223	QP	Open		
2	0.03	44.66	25.15	19.51	118.05	-73.30	100	55	QP	Open		
3	0.05	37.76	18.43	19.33	114.03	-76.27	100	61	QP	Open		
4	0.06	40.60	21.56	19.04	111.72	-71.12	100	117	QP	Open		
5	0.07	37.54	18.60	18.94	111.10	-73.56	100	147	QP	Open		
6	0.13	32.85	14.53	18.32	105.46	-72.61	100	116	QP	Open		




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

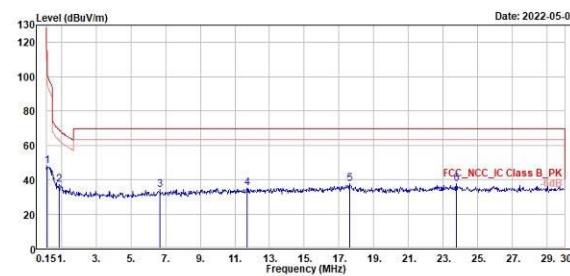

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.13	47.00	20.30	10.50	103.50	-54.70	100	155	QP	Open		
2	0.87	37.22	18.03	19.19	68.85	-31.63	100	64	QP	Open		
3	6.69	33.89	13.83	20.06	69.50	-35.61	100	233	QP	Open		
4	11.70	35.26	13.64	21.62	69.50	-34.24	100	249	QP	Open		
5	17.61	37.61	15.57	22.04	69.50	-31.89	100	316	QP	Open		
6	23.76	37.44	15.07	22.37	69.50	-32.06	100	83	QP	Open		

BLE_1M
Low Channel (Close) 9kHz~150kHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

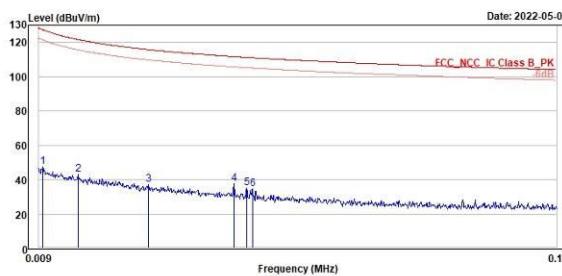

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	47.21	29.49	17.72	127.47	-00.26	100	235 QP		Close
2	0.02	42.95	24.37	18.58	121.69	-78.74	100	138 QP		Close
3	0.04	36.95	17.53	19.42	115.76	-78.81	100	132 QP		Close
4	0.06	37.69	18.65	19.04	111.72	-74.03	100	218 QP		Close
5	0.07	35.19	16.23	18.96	111.25	-76.06	100	335 QP		Close
6	0.07	34.36	15.43	18.93	111.04	-76.68	100	86 QP		Close

Low Channel (Close) 150kHz~30MHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

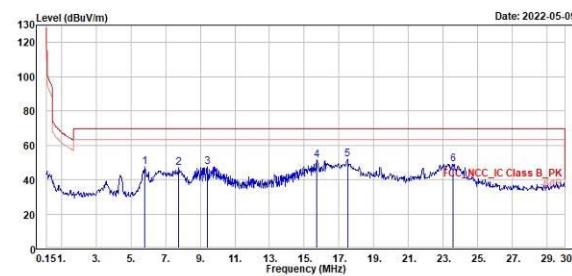

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	5.02	47.22	27.51	10.71	69.50	-22.28	100	100 QP		Close
2	7.76	47.03	26.53	20.59	69.50	-22.47	100	102 QP		Close
3	9.43	47.61	26.39	21.22	69.50	-21.89	100	76 QP		Close
4	15.70	51.30	29.40	21.90	69.50	-18.20	100	292 QP		Close
5	17.49	51.71	29.69	22.02	69.50	-17.79	100	347 QP		Close
6	23.55	49.08	26.72	22.36	69.50	-20.42	100	208 QP		Close

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz
BLE_1M
Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

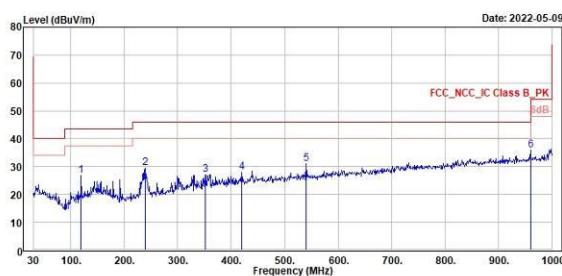

Freq MHz	Level dBuV/m	Read Level dBuV	Factor	Limit		Over Limit	APOS	TPos	Remark	Pol/Phase	Note
				Line	Limit						
MHz	dBuV/m	dBuV		dB/m	dBuV/m	dB	cm	deg			
1 110.24	26.66	35.13	8.47	43.50	16.84	300	72 QP		Horizontal		
2 239.52	29.42	36.16	-6.74	46.00	-16.58	100	313 QP		Horizontal		
3 351.87	27.21	30.98	-3.77	46.00	-18.79	100	153 QP		Horizontal		
4 419.94	28.05	30.61	-2.56	46.00	-17.95	100	175 QP		Horizontal		
5 540.22	31.01	31.89	-0.88	46.00	-14.99	200	167 QP		Horizontal		
6 960.23	35.93	30.31	5.62	54.00	-18.07	100	92 QP		Horizontal		

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

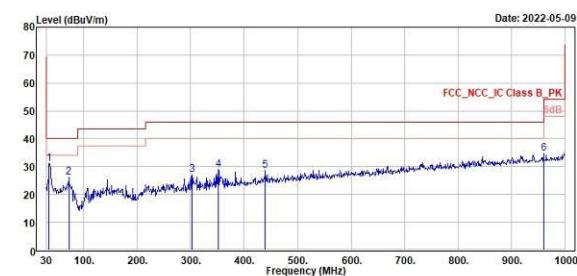

Freq MHz	Level dBuV/m	Read Level dBuV	Factor	Limit		Over Limit	APOS	TPos	Remark	Pol/Phase	Note
				Line	Limit						
MHz	dBuV/m	dBuV		dB/m	dBuV/m	dB	cm	deg			
1 34.05	30.98	30.00	-7.02	46.00	-9.02	100	90 QP		Vertical		
2 71.71	26.30	35.14	-8.84	46.00	-13.70	100	8 QP		Vertical		
3 382.57	26.92	31.51	-4.59	46.00	-19.08	400	298 QP		Vertical		
4 351.07	28.78	32.55	-3.77	46.00	-17.22	100	145 QP		Vertical		
5 439.34	28.60	30.69	-2.09	46.00	-17.40	100	173 QP		Vertical		
6 960.23	34.66	29.04	5.62	54.00	-19.34	200	44 QP		Vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz
BLE_1M
Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

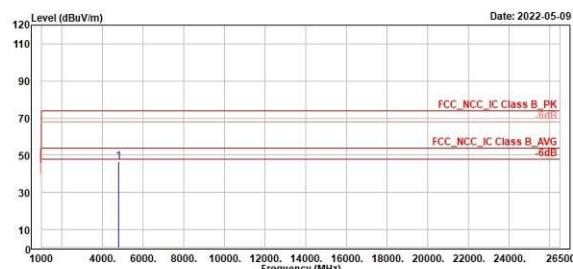

Freq	Level	Read	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.00	46.75	55.77	-9.02	74.00	-27.25	400	138 Peak	Horizontal




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1322

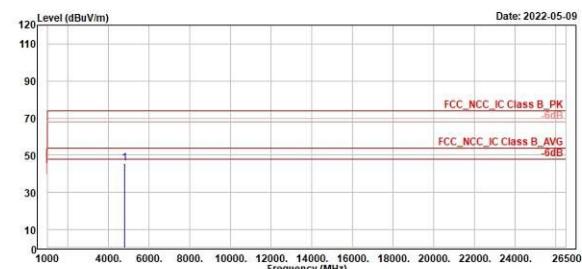

Freq	Level	Read	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.00	45.42	54.83	-9.41	74.00	-28.58	300	102 Peak	Vertical

BLE_1M
Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1922

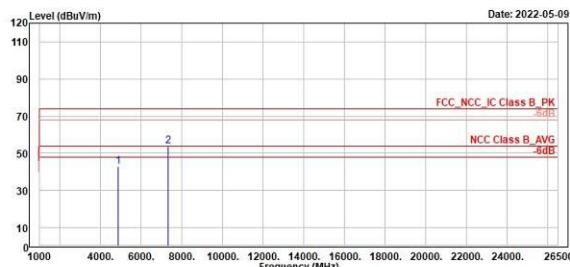

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4880.00	43.08	52.08	-9.00	74.00	-30.92	358	0 Peak	Horizontal		
2	7320.00	53.83	60.34	-6.51	74.00	-20.17	400	142 Peak	Horizontal		

Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1922

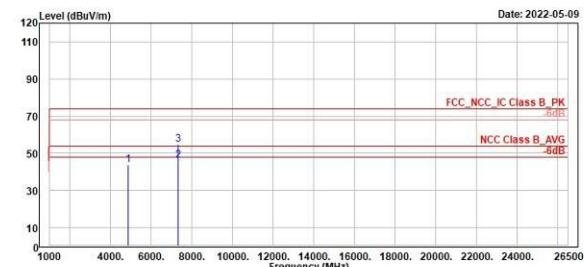

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4880.00	43.09	53.25	-9.36	74.00	-30.11	400	234 Peak	Vertical		
2	7320.00	46.09	52.72	-6.63	54.00	-7.91	103	210 Average	Vertical		
3	7520.00	54.85	61.48	-6.63	74.00	-19.15	103	210 Peak	Vertical		

BLE_1M
High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1922

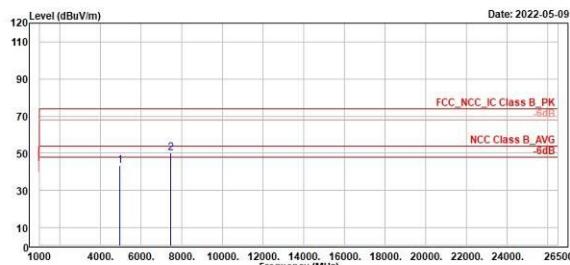

Freq	Level	Read	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.00	43.31	52.20	-8.89	74.00	-30.69	300	188 Peak	Horizontal
2	7440.00	50.41	56.64	-6.23	74.00	-23.59	100	219 Peak	Horizontal

High Channel (Vertical)


TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: 886-2172-1000 Fax: 886-2172-1922

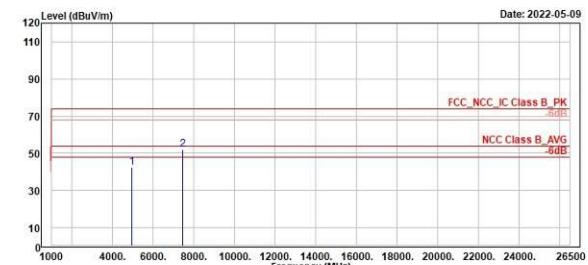

Freq	Level	Read	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.00	42.44	51.71	-9.27	74.00	-31.56	400	89 Peak	Vertical
2	7440.00	51.98	58.57	-6.59	74.00	-22.02	300	80 Peak	Vertical

Mains Conducted Emission, 150kHz ~ 30MHz

Worst Band

(Line)


(Neutral)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2112-1000 Fax: +886-2112-1322




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2112-1000 Fax: +886-2112-1322

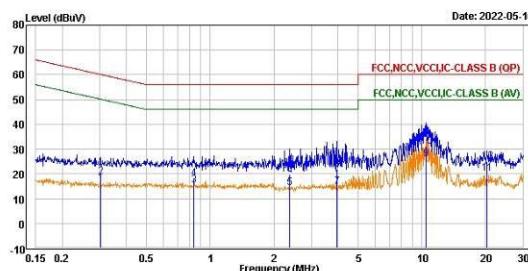

Trace: 1

Freq	Level	Read	Level Factor	Limit	Line	Over	Remark	Pol/Phase	Note
MHz	dBuV	dBuV	dB	dBuV		dB			
1	0.30	15.87	-3.74	19.61	50.16	-34.29	Average	line1	
2	0.30	18.86	-0.75	19.61	50.16	-41.00	Average	line1	
3	0.30	19.81	-4.16	19.62	49.60	-30.74	Average	line1	
4	0.83	18.02	-1.60	19.62	56.00	-37.98	QP	line1	
5	2.37	14.20	-5.44	19.64	46.00	-31.80	Average	line1	
6	2.37	19.81	0.17	19.64	56.00	-36.19	QP	line1	
7	3.97	14.52	-5.15	19.67	46.00	-31.48	Average	line1	
8	3.97	21.73	2.06	19.67	56.00	-34.27	QP	line1	
9	10.43	25.94	6.21	19.73	50.00	-24.06	Average	line1	
10	10.43	31.13	11.40	19.73	50.00	-28.87	QP	line1	
11	20.24	20.23	0.50	19.73	50.00	-29.77	Average	line1	
12	20.24	25.07	5.34	19.73	60.00	-34.93	QP	line1	

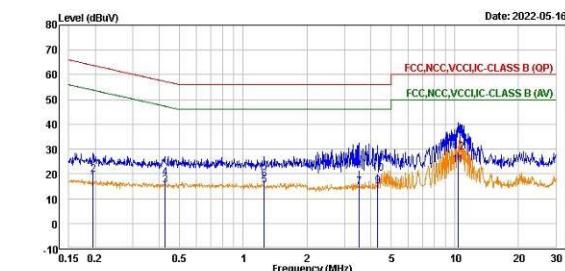

Trace: 1

Freq	Level	Read	Level Factor	Limit	Line	Over	Remark	Pol/Phase	Note
MHz	dBuV	dBuV	dB	dBuV		dB			
1	0.20	16.64	-2.95	19.59	53.81	-37.17	Average		neutral
2	0.20	19.82	0.15	19.59	53.81	-37.17	Average		neutral
3	0.20	15.45	-1.15	19.60	47.35	-31.59	Average		neutral
4	0.43	15.43	-1.17	19.60	57.35	-36.22	QP		neutral
5	1.26	15.17	-4.43	19.60	46.00	-30.83	Average		neutral
6	1.26	17.82	-1.78	19.60	56.00	-38.18	QP		neutral
7	3.52	14.54	-5.12	19.60	46.00	-31.46	Average		neutral
8	3.52	21.36	1.72	19.60	56.00	-34.62	QP		neutral
9	4.32	15.18	-4.57	19.67	46.00	-30.90	Average		neutral
10	4.32	20.12	0.45	19.67	56.00	-35.88	QP		neutral
11	10.32	23.42	3.68	19.74	50.00	-26.58	Average		neutral
12	10.32	28.58	8.84	19.74	60.00	-31.42	QP		neutral