

DFS Test Report

Applicant : Meter Inc

Product Name : Meter wireless access point

Trade Name : Meter

Model Number : MW08

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Apr. 18, 2023

Test Period : Jun. 16 ~ Aug. 04, 2023

Issued Date : Aug. 16, 2023

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm Registration Number: 226252 (Bade test site)
Test Firm Registration Number: 191812 (Wugu test site)

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Version	Issued Date	Revisions	Revised By
00	Aug. 16, 2023	Initial Issue	Snow Wang

Verification of Compliance

Applicant : Meter Inc

Product Name : Meter wireless access point

Trade Name : Meter

Model Number : MW08

FCC ID : 2AVVV-MW08

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	5
2	EUT Description.....	6
3	Test Methodology	8
4	Dynamic Frequency Selection	9
4.1.	Limits	9
4.2.	Test and Measurement System	13
4.3.	Test Instruments	15
5	Test Methodology	16
5.1.	Mode of Operation	16
5.2.	EUT Test Step	16
5.3.	Test Site Environment.....	16
6	Test Results	17
6.1.	Radar Waveforms and Traffic	17
6.2.	Channel Loading	32
6.3.	Channel Availability Check Time.....	35
6.4.	Channel Move Time and Channel Closing Transmission Time.....	38
6.5.	Non-Occupancy Period	41
6.6.	U-NII Detection Bandwidth	42
6.7.	Statistical Performance check	45

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	Non-Associated Test	N/A	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☒ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	Meter Inc 548 Market St., PMB 22716, San Francisco, CA 94104				
Product Name	Meter wireless access point				
Trade Name	Meter				
Model Number	MW08				
FCC ID	2AVVV-MW08				
Operate Frequency	802.11a		U-NII Band 2-A	5260 – 5320	4
			U-NII Band 2-C	5500 – 5700	8
	802.11n HT20 / 802.11ac VHT20/ 802.11ax HE20		U-NII Band 2-A	5260 – 5320	4
			U-NII Band 2-C	5500 – 5700	8
	802.11n HT40 / 802.11ac VHT40/ 802.11ax HE40		U-NII Band 2-A	5270 – 5310	2
			U-NII Band 2-C	5510 – 5670	3
	802.11ac VHT80/ 802.11ax HE80		U-NII Band 2-A	5290	1
			U-NII Band 2-C	5530	1
	Modulation Type	OFDM/OFDMA			
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	QCN5054				
	ANT-0 (5G0)	5718A0518300	PIFA Antenna	U-NII Band 2-A	5.13
				U-NII Band 2-C	5.19
	ANT-1 (5G1)	5718A0522300	PIFA Antenna	U-NII Band 2-A	4.26
				U-NII Band 2-C	3.81
	ANT-2 (5G2)	5718A0521300	PIFA Antenna	U-NII Band 2-A	5.04
				U-NII Band 2-C	5.04
	ANT-3 (5G3)	5718A0520300	PIFA Antenna	U-NII Band 2-A	4.03
				U-NII Band 2-C	4.56
	QCA9889				
	ANT-0 (Scanning)	5718A0601300	PCB Antenna	U-NII Band 2-A	6.17
U-NII Band 2-C				6.17	
Antenna Delivery	4TX (CDD/ Beamforming on)				
Operate Temp. Range	0 ~ 40 °C				
EUT Power Rating	DC INPUT: 12 V, .2.5 A PoE INPUT: 54 V, 0.6 A				

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☐ With 5600 ~ 5650 MHz	☒ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point (point-to-point)	
	☐ Outdoor access point (point-to-multipoint)	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☐ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection	
Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues	
Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

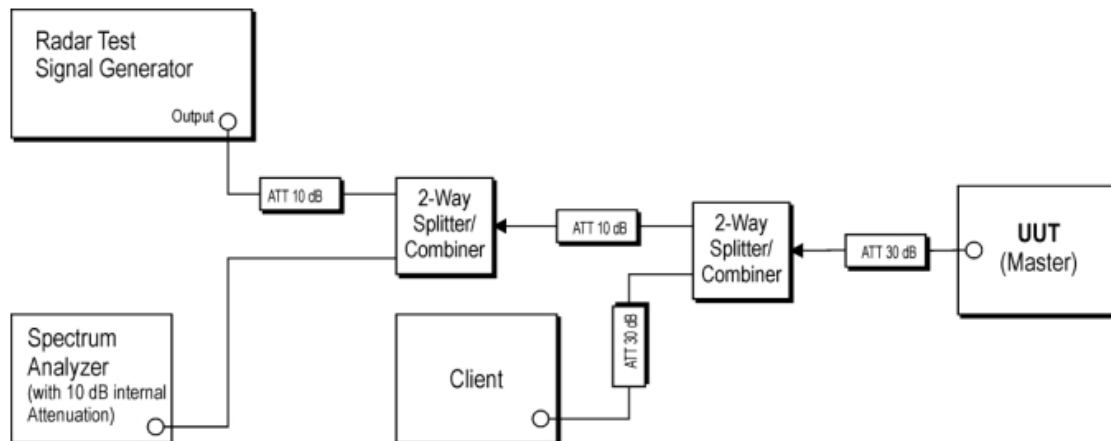

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Portable Handset	SAMSUNG	SM-F711U	FCC ID : A3LSMF711U

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm), The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.

The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

4.3. Test Instruments

Test Period: Jun. 16 ~ Aug. 04, 2023

Testing Engineer: Brian Lin, Andy Lu 、 Luke Yang

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Power Sensor	Anritsu	MA2411B	1126022	Sep. 04, 2022	1 year
☐	Power Meter	Anritsu	ML2495A	1135009	Sep. 04, 2022	1 year
☐	Power Sensor	Agilent	N1921A	MY45241957	Nov. 30, 2022	1 year
☐	Power Meter	Agilent	N1911A	MY45101619	Nov. 30, 2022	1 year
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 20, 2023	1 year
☐	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 21, 2022 Jul. 20, 2023	1 year
☐	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Dec. 29, 2022	1 year
☐	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 29, 2023	1 year
☒	Signal Generator	Keysight	N5182B	MY53052569	Apr. 17, 2023	1 year
☒	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 17, 2023	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 20, 2023	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022 Jul. 13, 2023	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Jan. 06, 2023	1 year

Note: N.C.R. = No Calibration Request.

5 Test Methodology

5.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80

802.11ax HE20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5560 MHz.

802.11ax HE40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5550 MHz.

802.11ax HE80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5530 MHz.

5.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.



5.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.


6 Test Results

6.1. Radar Waveforms and Traffic

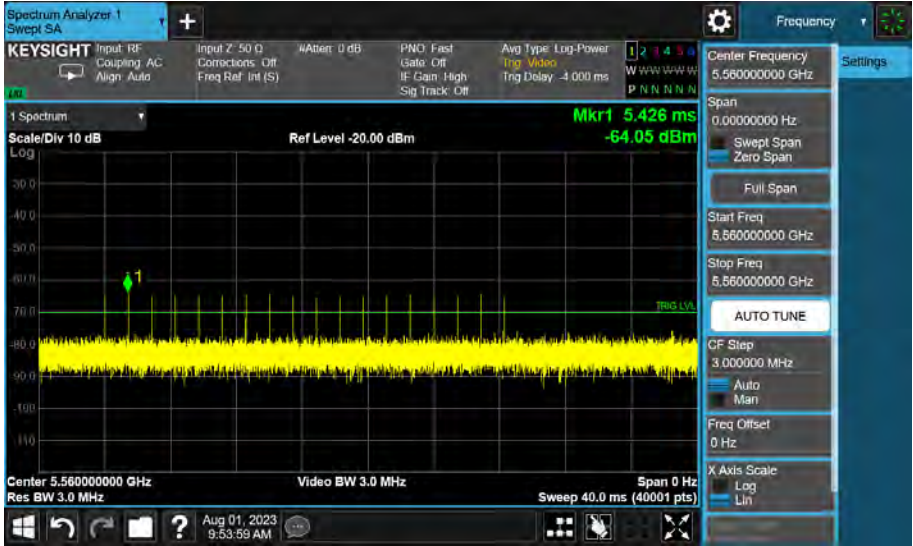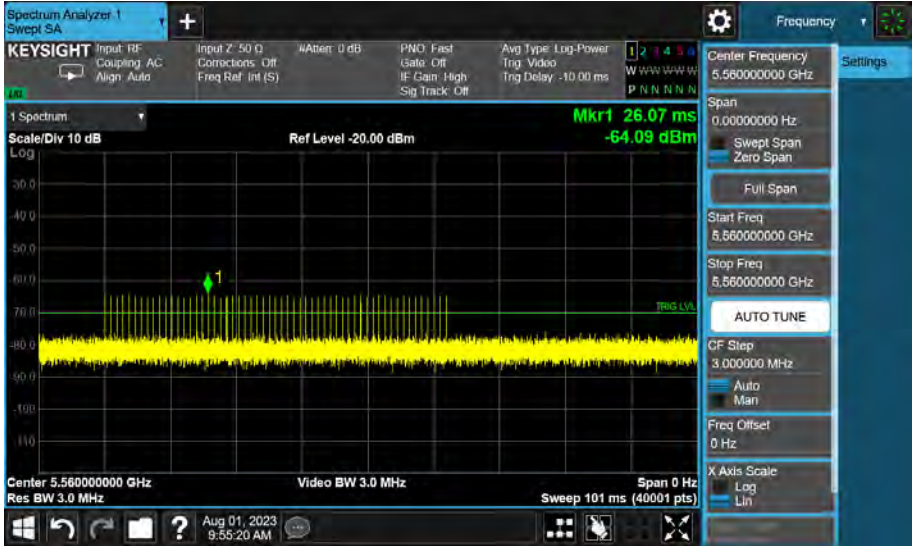
802.11ax HE20_ 5560 MHz	
Short Pulse Radar Type 0	
Short Pulse Radar Type 1A	



802.11ax HE20_ 5560 MHz



Short Pulse Radar
Type 1B

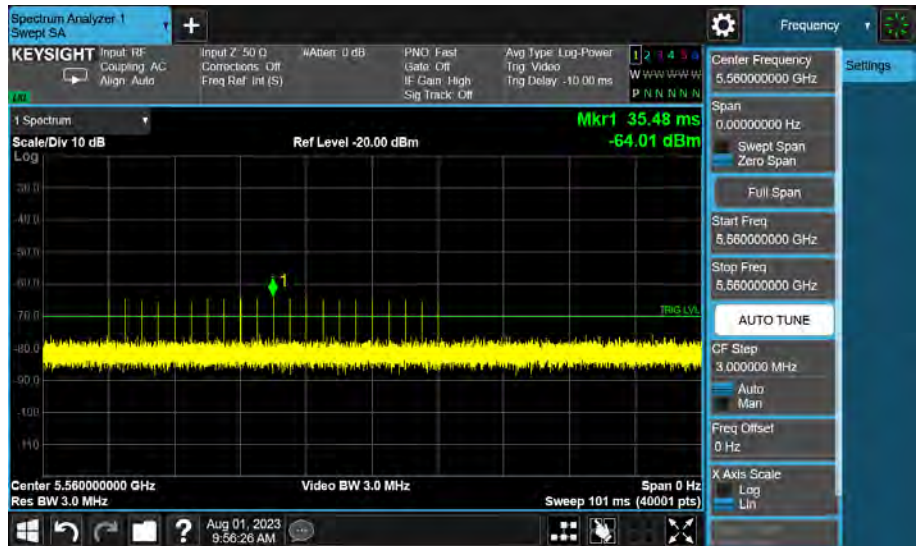


Short Pulse Radar
Type 2

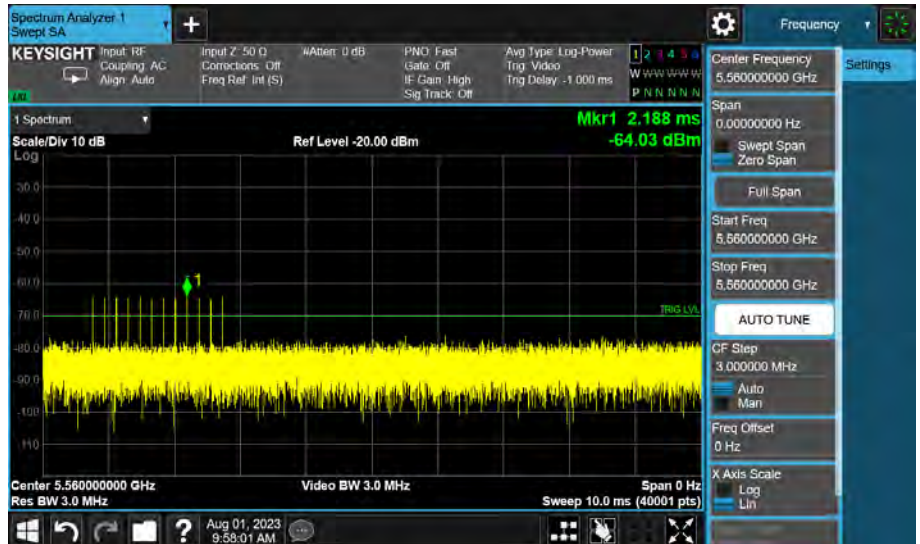

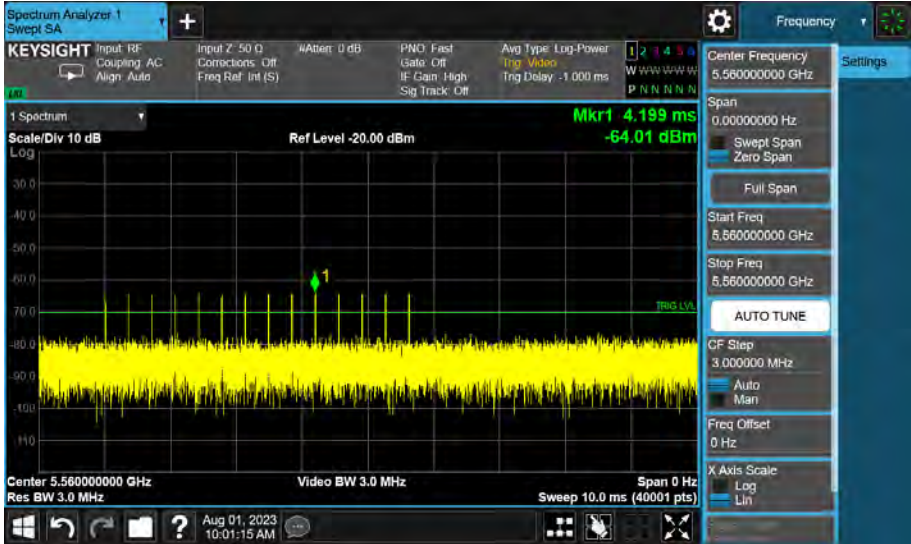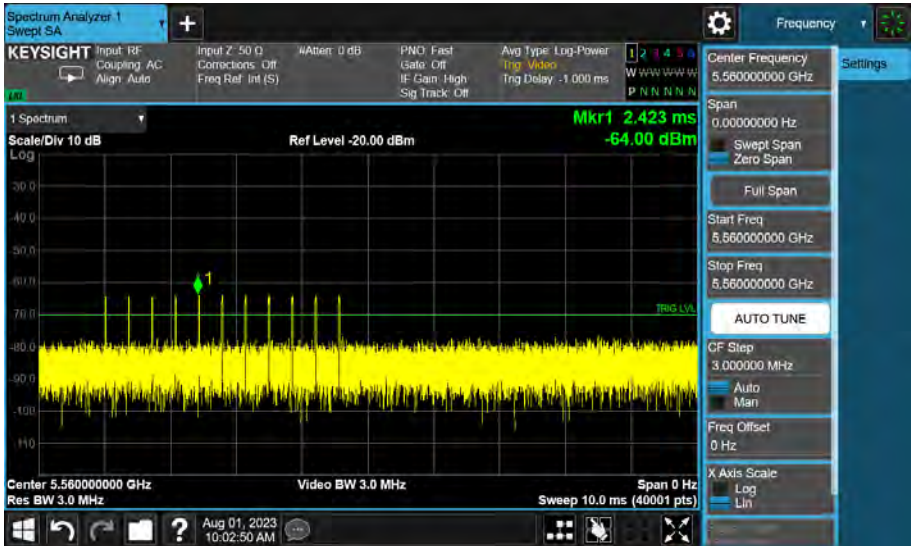
802.11ax HE20_ 5560 MHz	
Short Pulse Radar Type 3	
Short Pulse Radar Type 4	

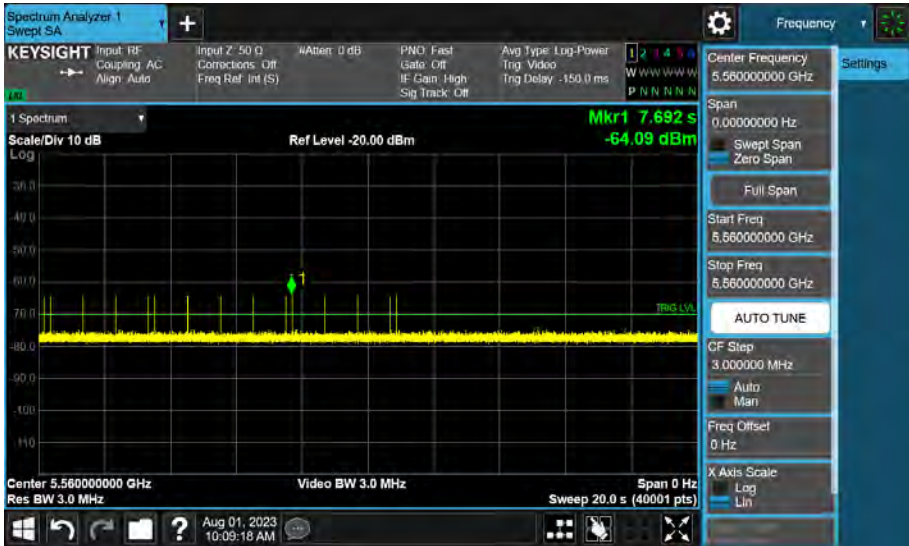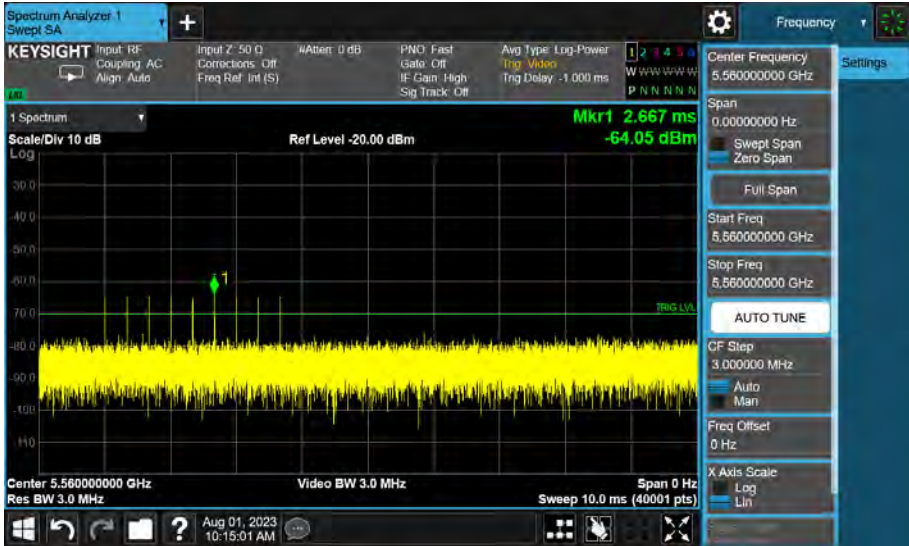802.11ax HE20_ 5560 MHz	
Long Pulse Radar Type 5	
Frequency Hopping Radar Type 6	

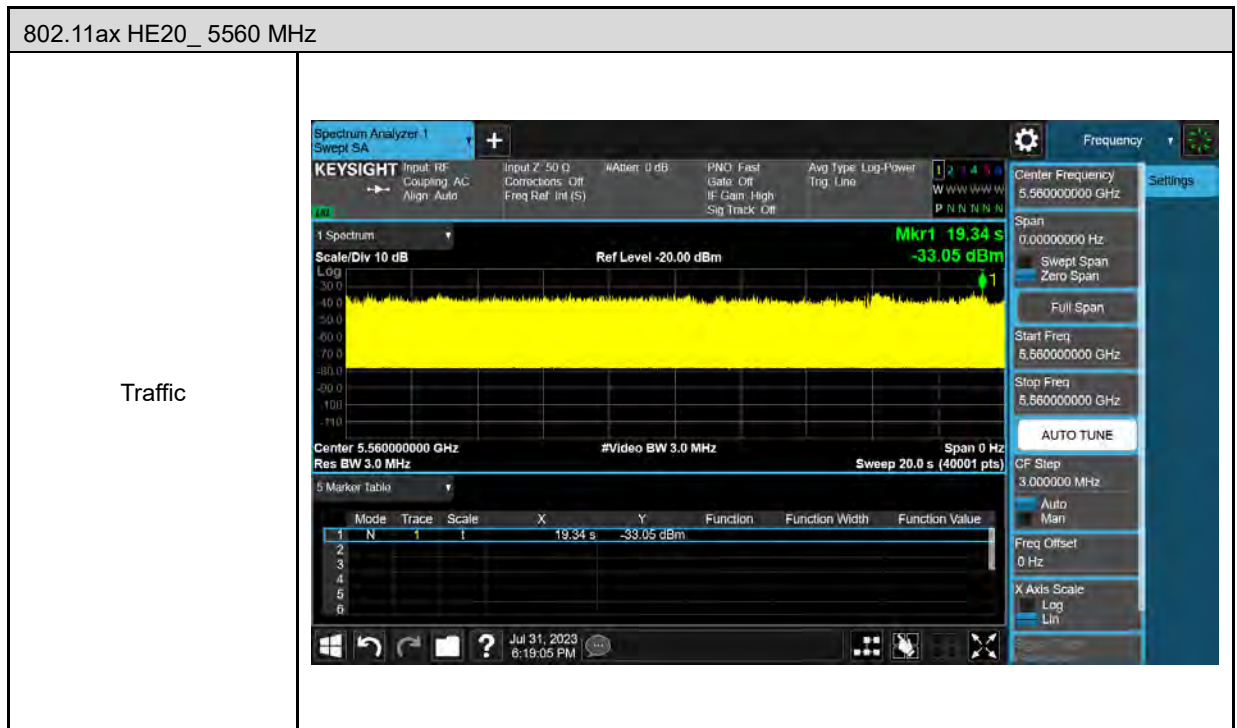


802.11ax HE40_ 5550 MHz

Short Pulse Radar
Type 0

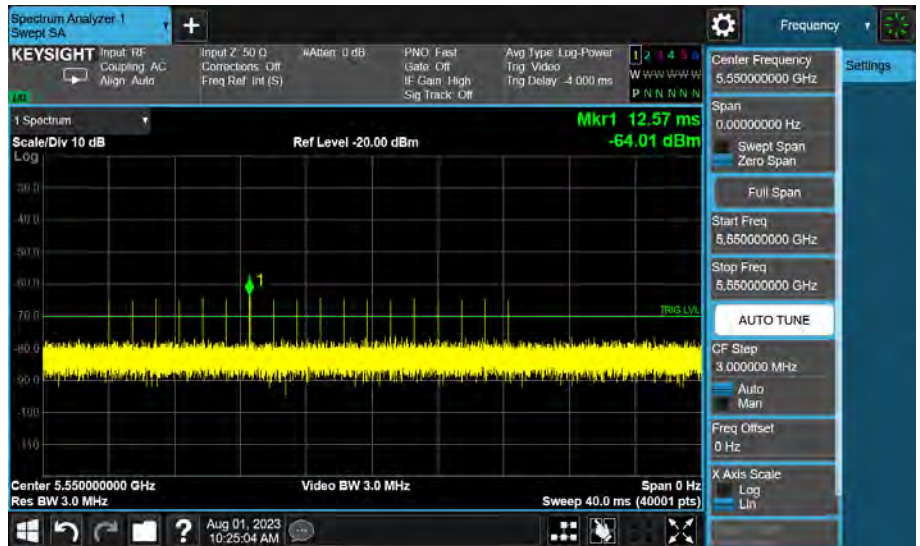

Short Pulse Radar
Type 1A

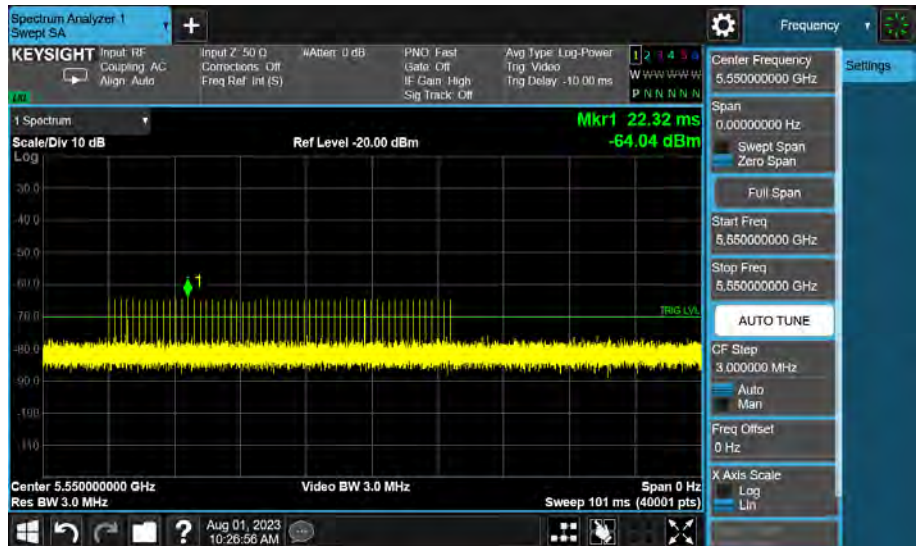




802.11ax HE40_ 5550 MHz



Short Pulse Radar
Type 1B



Short Pulse Radar
Type 2

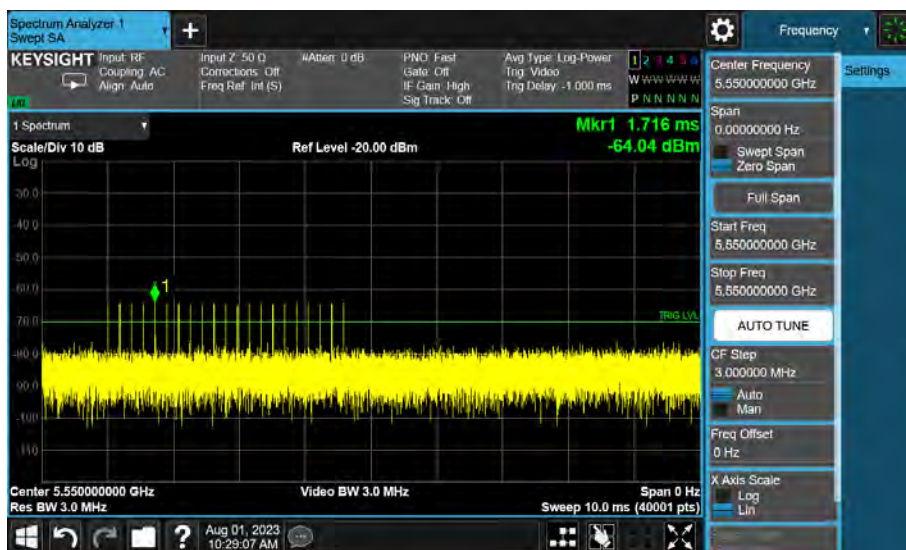


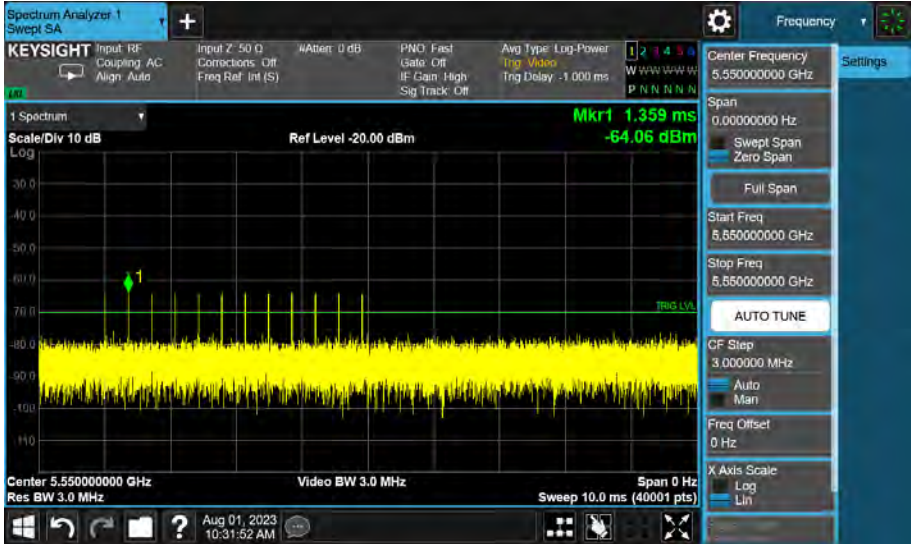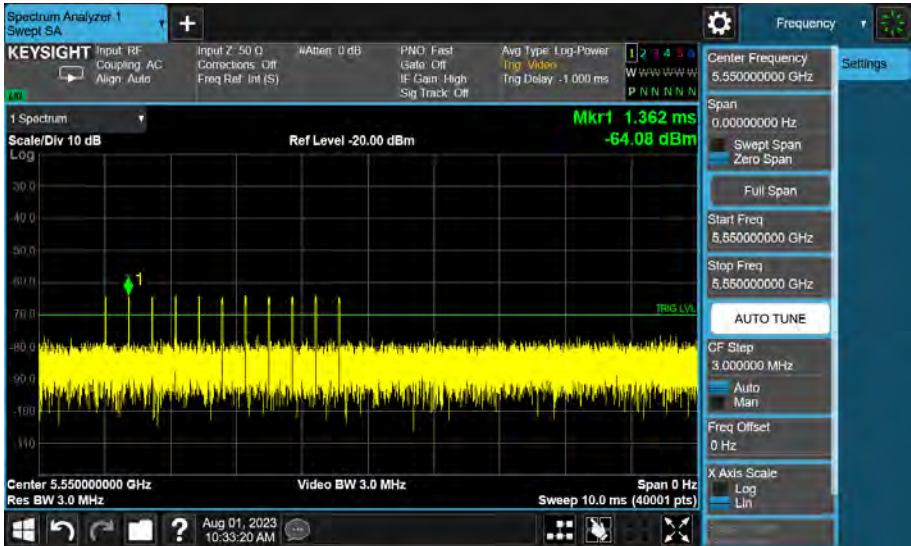802.11ax HE40_ 5550 MHz	
Short Pulse Radar Type 3	
Short Pulse Radar Type 4	

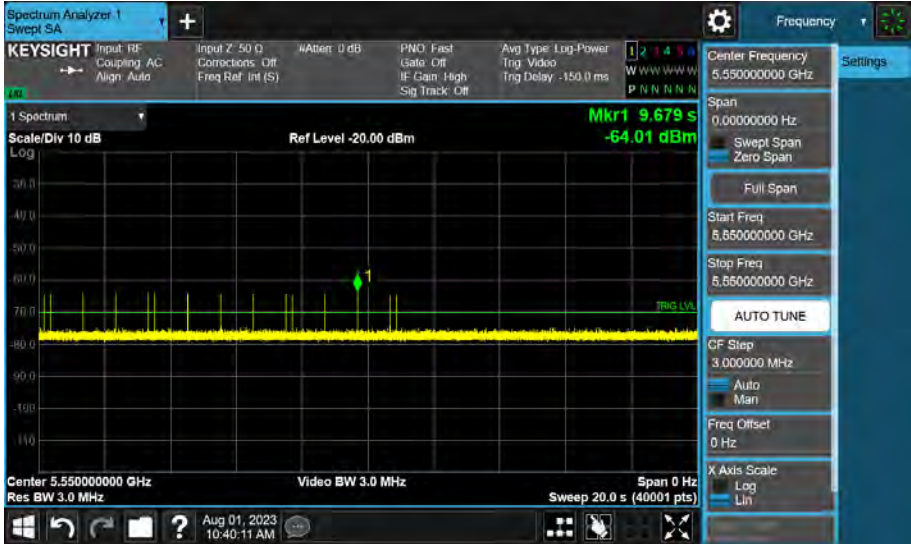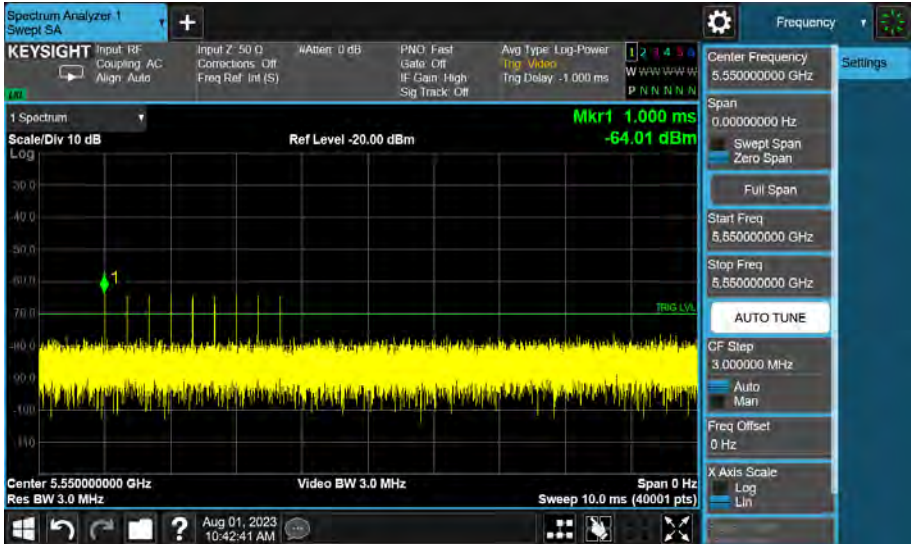802.11ax HE40_ 5550 MHz	
Long Pulse Radar Type 5	
Frequency Hopping Radar Type 6	


802.11ax HE40_ 5550 MHz

Traffic

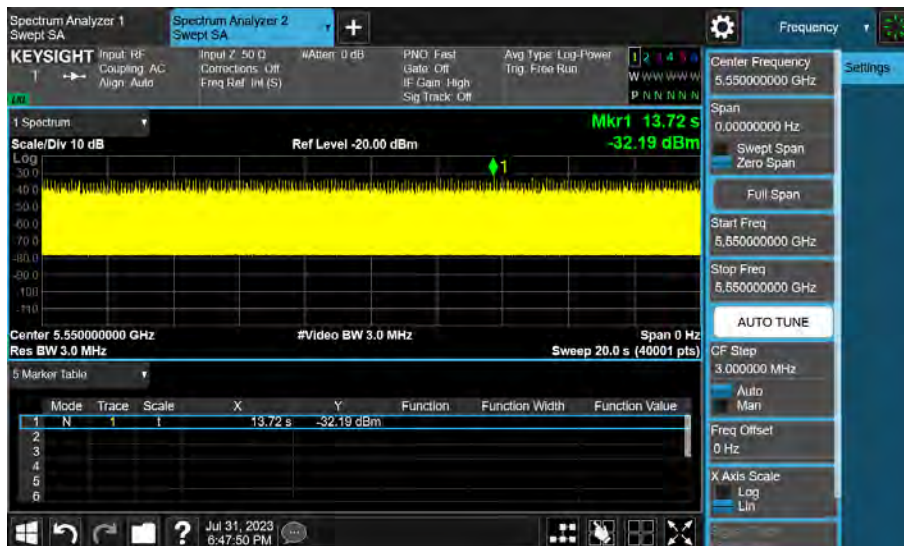


802.11ax HE80_ 5530 MHz

Short Pulse Radar
Type 0

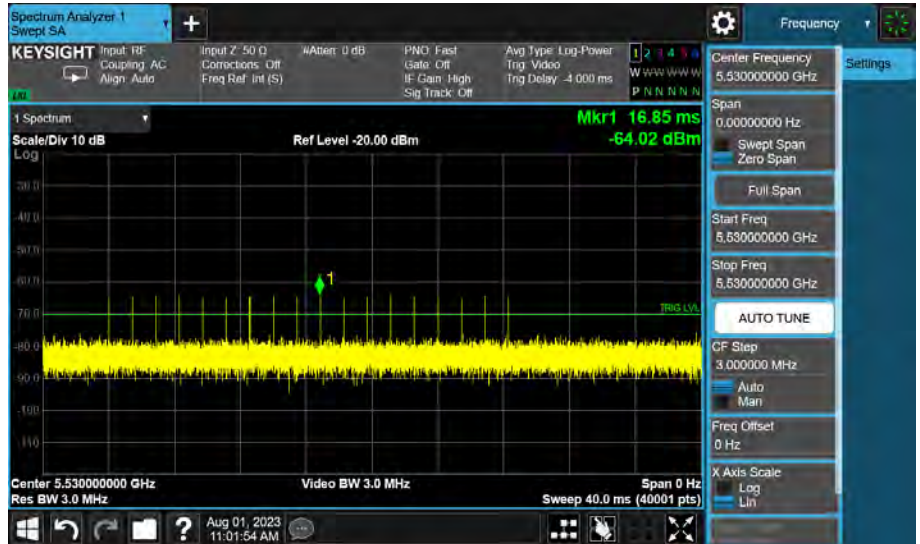


Short Pulse Radar
Type 1A

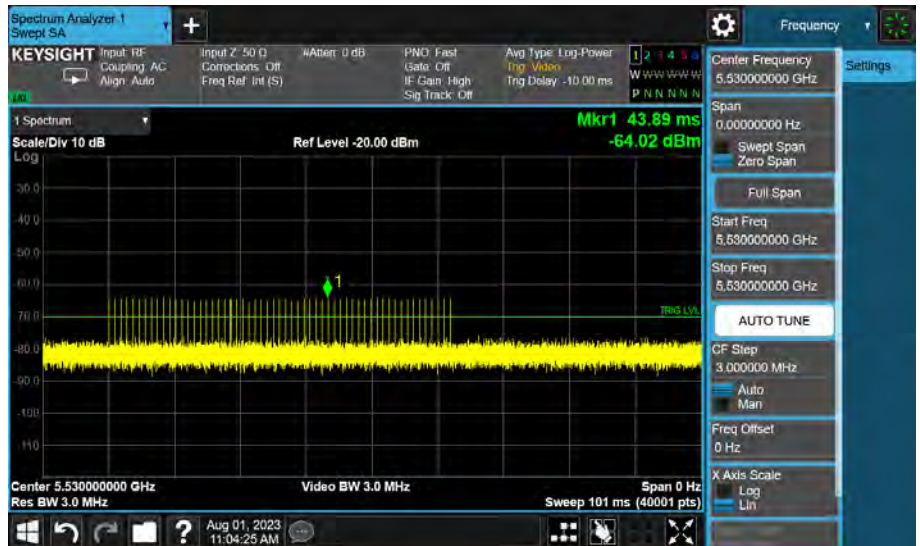


802.11ax HE80_ 5530 MHz

Short Pulse Radar
Type 1B

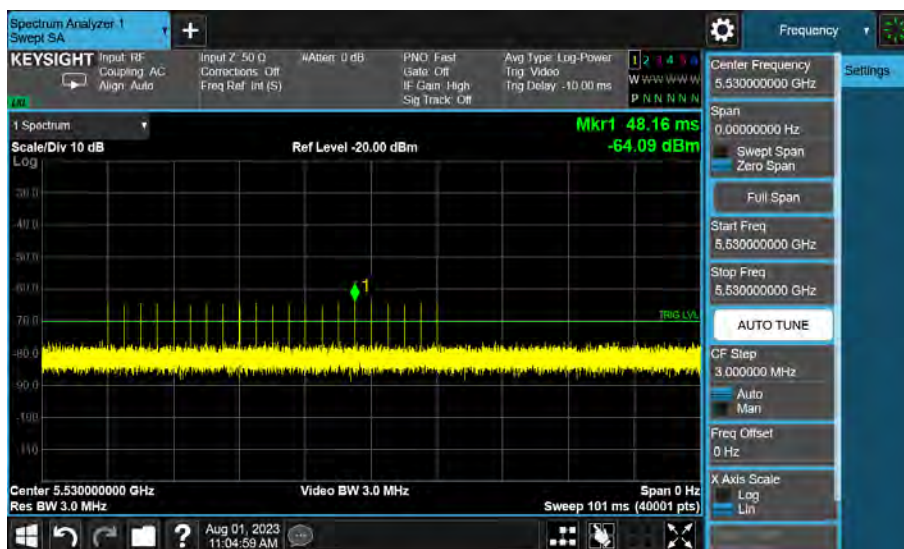


Short Pulse Radar
Type 2

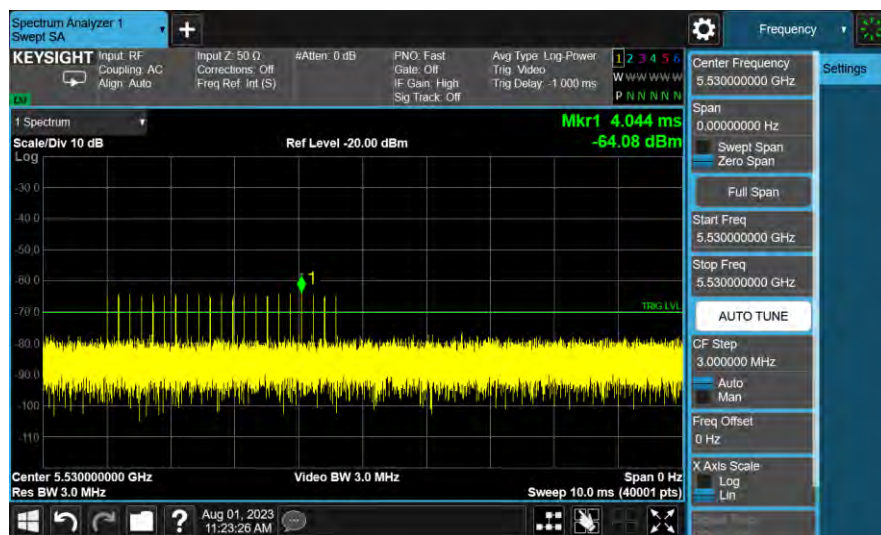




802.11ax HE80_ 5530 MHz


Short Pulse Radar
Type 3

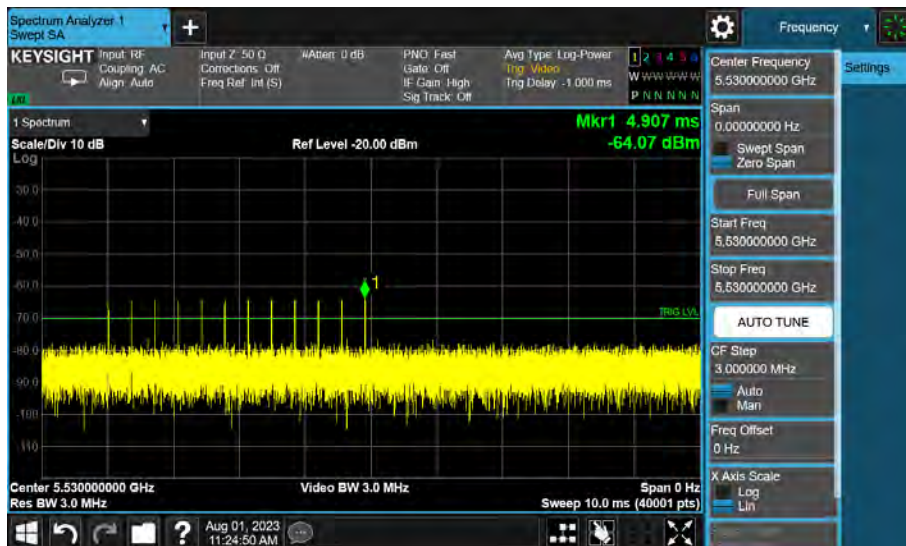

Short Pulse Radar
Type 4

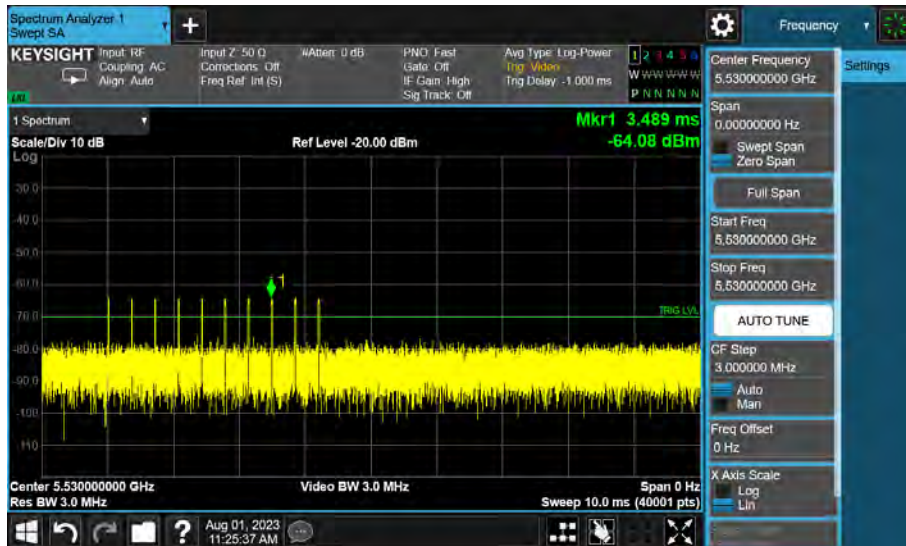

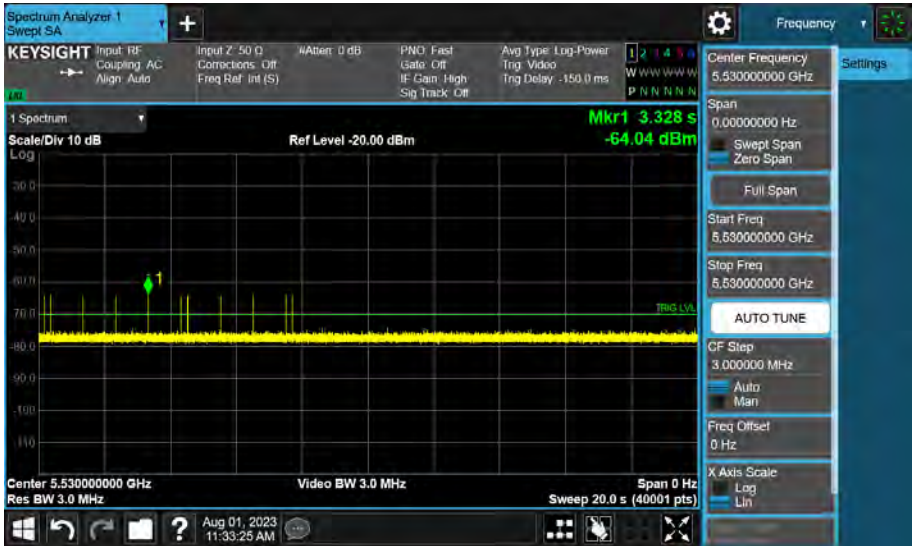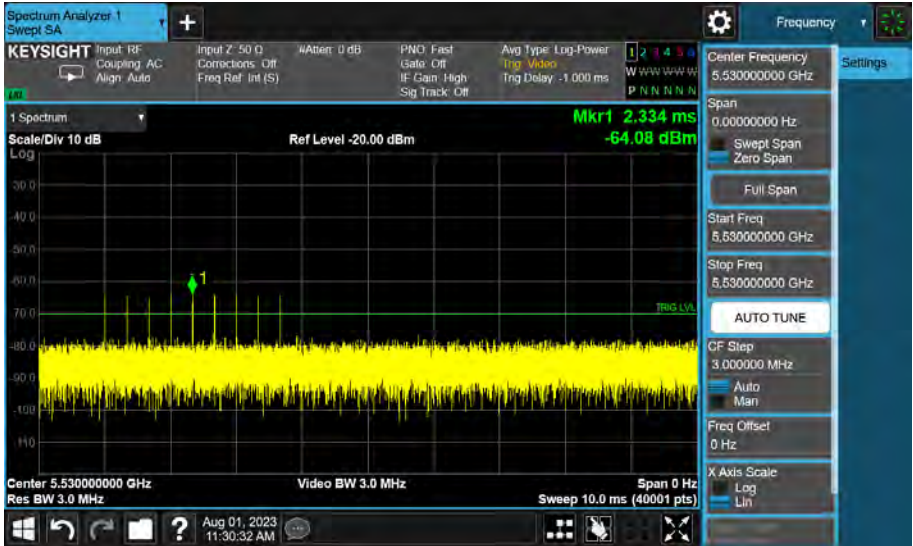
802.11ax HE80_ 5530 MHz	
Long Pulse Radar Type 5	
Frequency Hopping Radar Type 6	

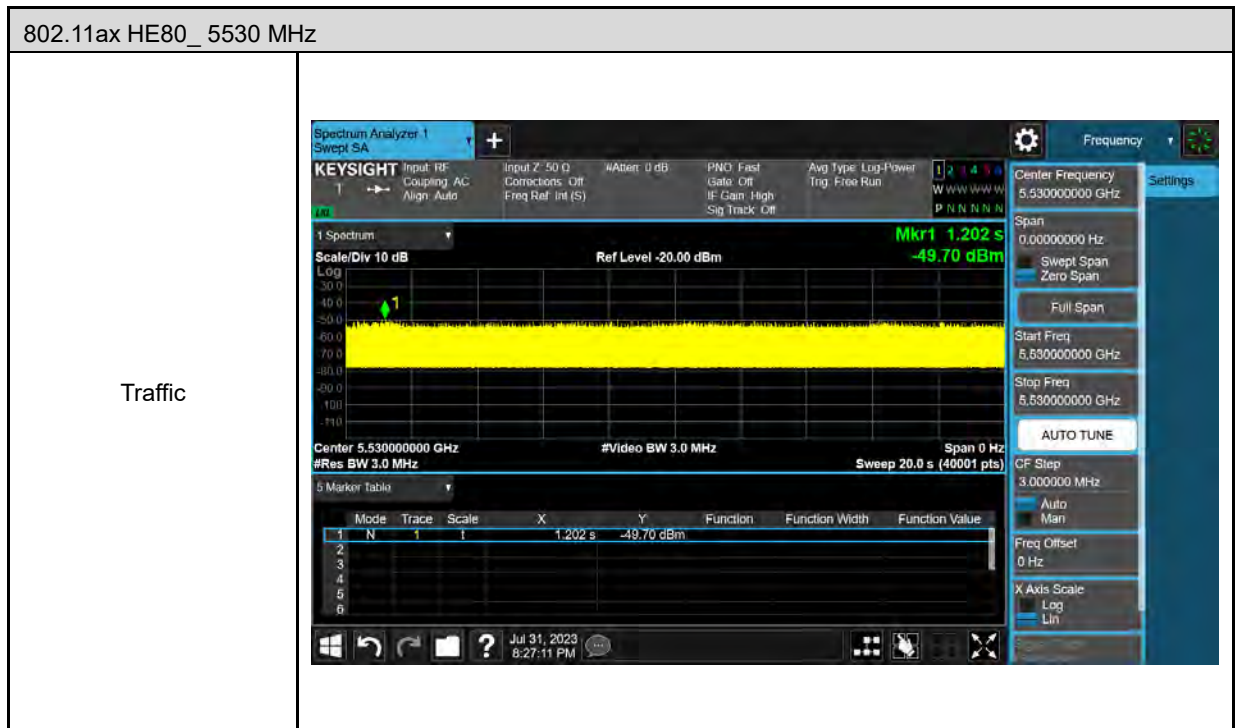

6.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11ax HE20

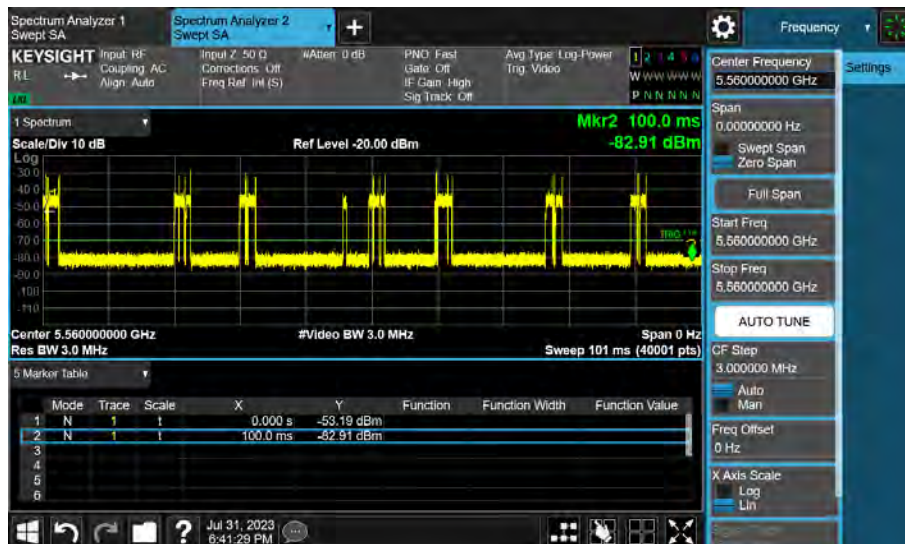


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point:		Total Point:	Sum of On Time(s):
6813		39474	17.3ms
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.3ms	40001	17.26%	


 RUN

802.11ax HE40

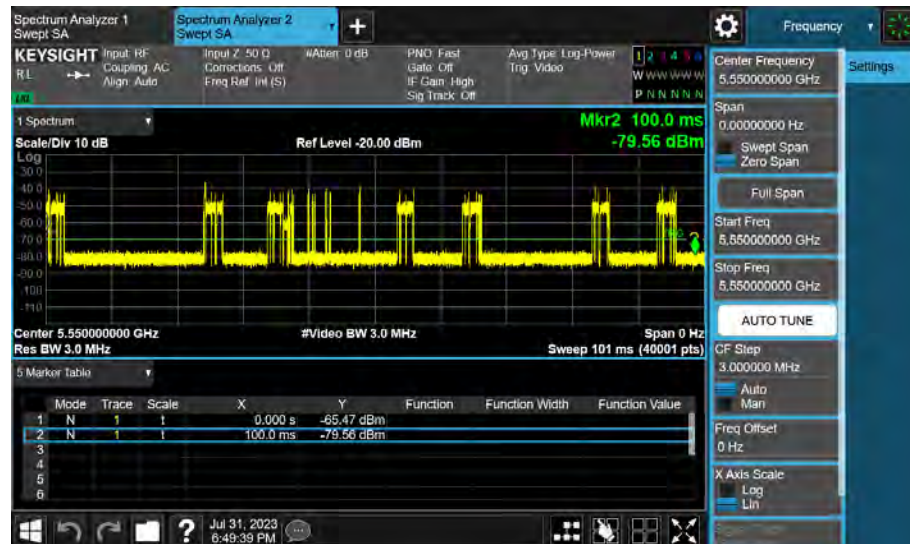

DFS and Adaptivity

Device


Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms

On Time Point:	Total Point:	Sum of On Time(s):
7682	39474	19.5ms

Sweep Time(s):	Sweep Point:	Duty Cycle(%):
101.3ms	40001	19.46%

RUN

802.11ax HE80

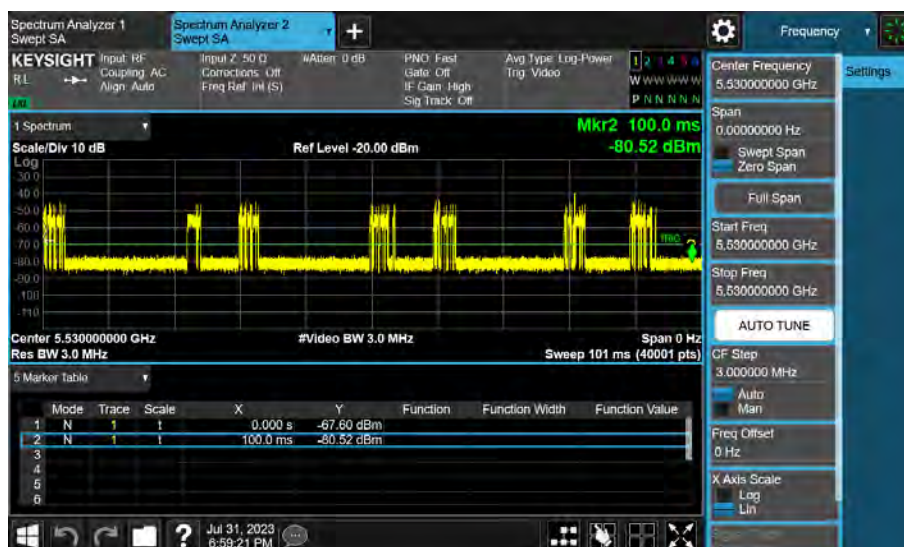

DFS and Adaptivity

Device

Trigger Level(dBm): -70

MK1 Time(s): 0

MK2 Time(s): 100.0ms

Delta Time(s): 100.0ms

On Time Point: 7018

Total Point: 39474

Sum of On Time(s): 17.8ms

Sweep Time(s): 101.3ms

Sweep Point: 40001

Duty Cycle(%): 17.78%

RUN

6.3. Channel Availability Check Time

6.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

6.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.


The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

6.3.3. Qualitative Results

Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel


802.11ax HE80_ 5530 MHz

Initial Channel
Availability Check

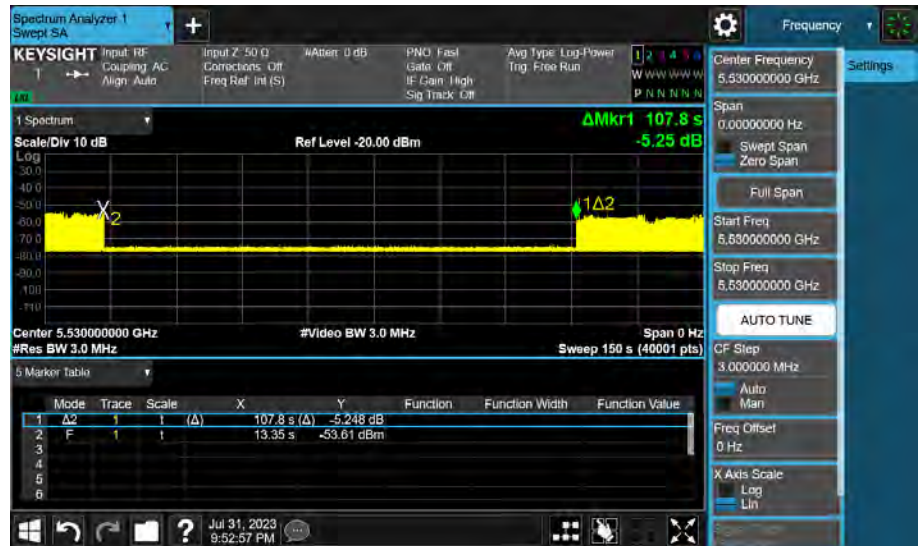

Initial Channel
Availability Check
Begin



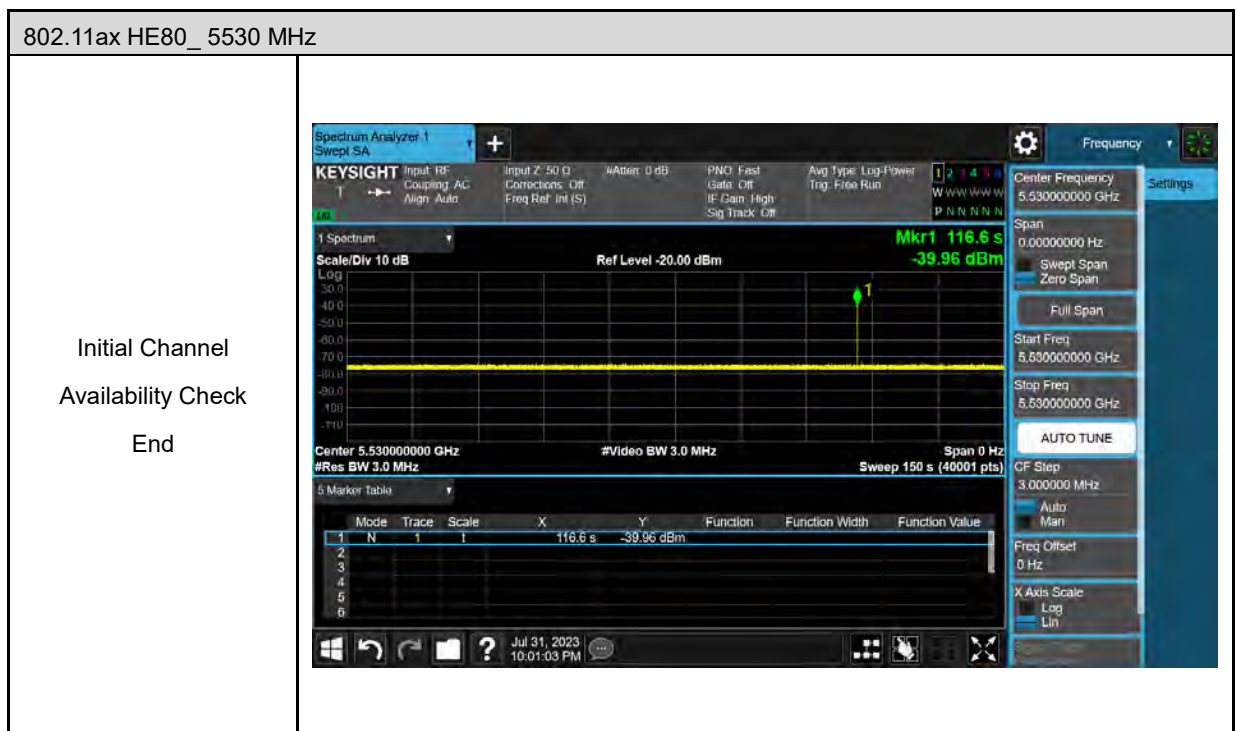

6.4. Channel Move Time and Channel Closing Transmission Time

6.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)	Limit (sec)
		Master	
5530	Type 0	0.0000	10


Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
		Master	
5530	Type 0	0.0000	60


802.11ax HE80_ 5530 MHz

Channel Move and
Closing Time
(T0~T1)

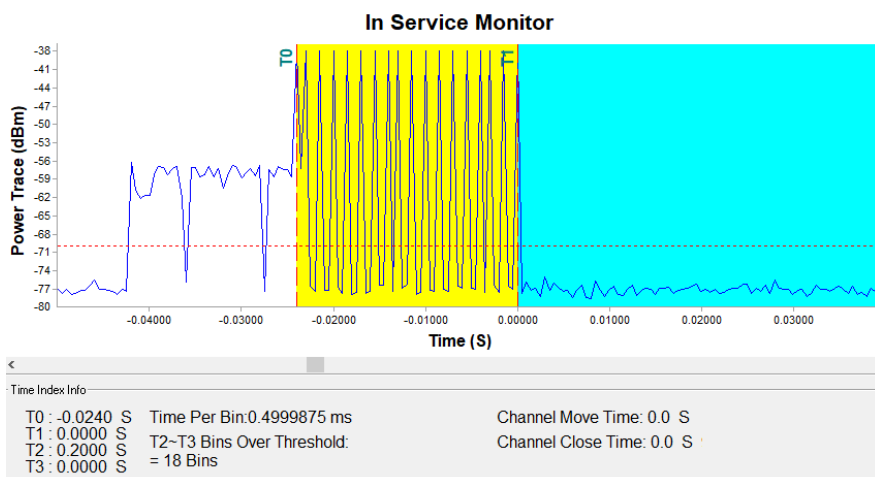


Channel Move and
Closing Time
(T0~T2)

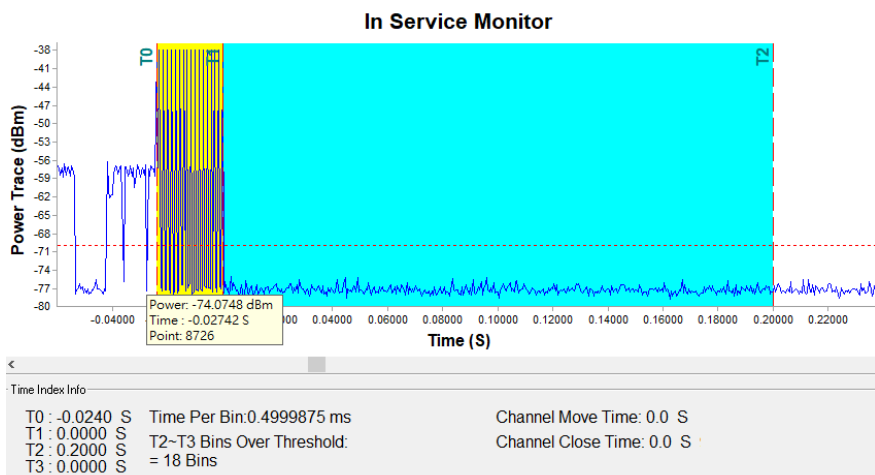

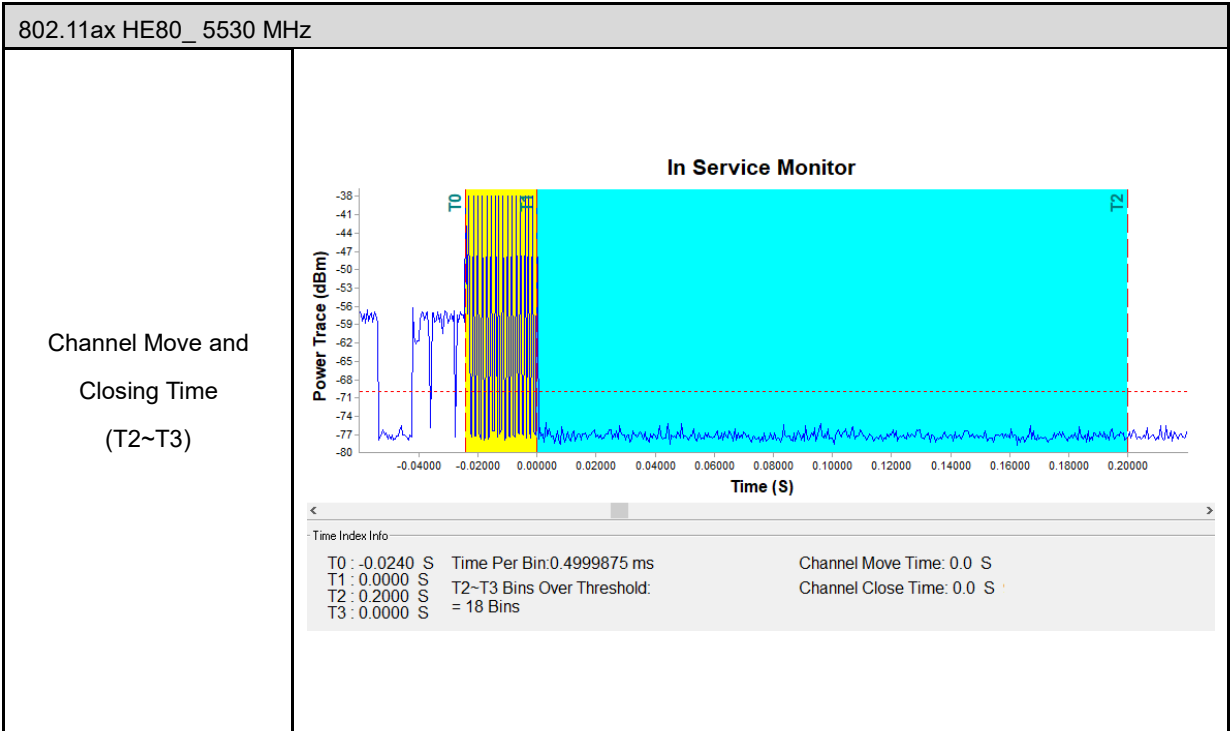

6.5. Non-Occupancy Period

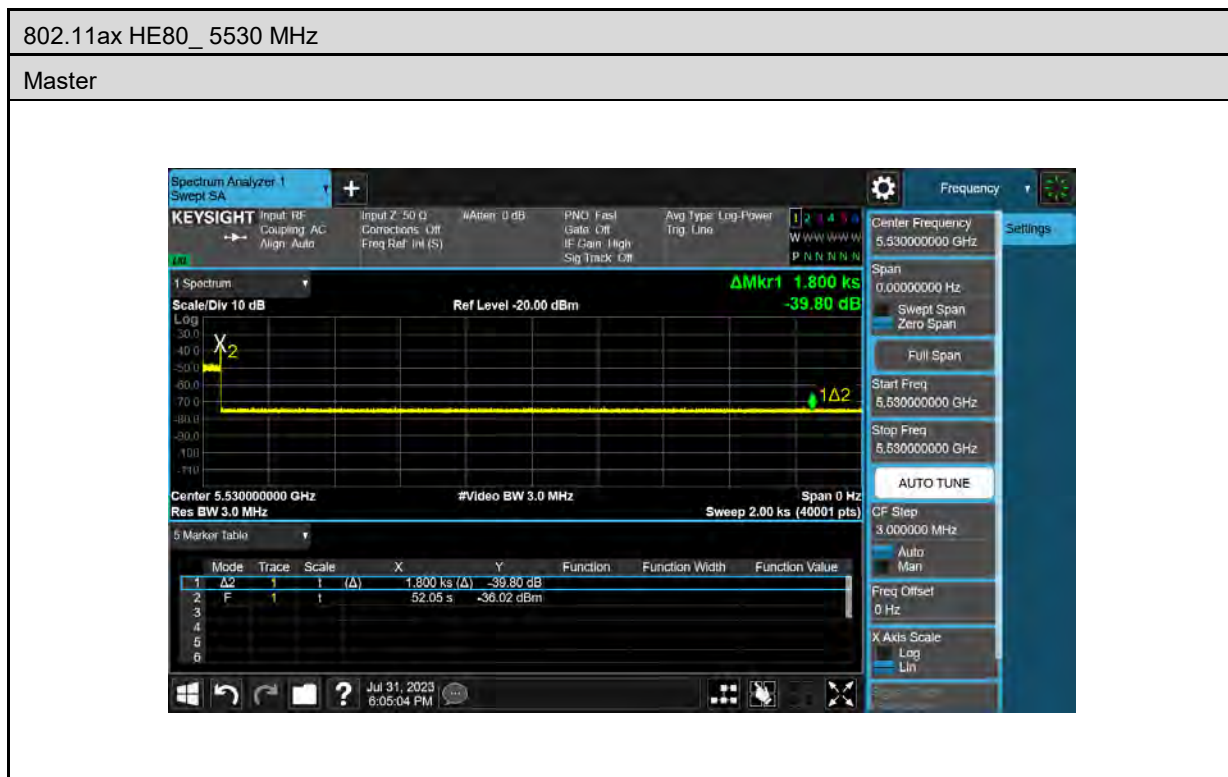

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

6.6. U-NII Detection Bandwidth

■ Test Results

Test Mode						
802.11ax HE20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5500	5550	5570	20	18.979	105.38	≥ 100

Test Mode						
802.11ax HE40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5510	5530	5570	40	37.52	106.61	≥ 100

Test Mode						
802.11ax HE80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5530	5490	5570	80	76.489	104.59	≥ 100

Test Graphs


802.11ax HE20_ 5560 MHz



802.11ax HE40_ 5550 MHz



802.11ax HE80_ 5530 MHz

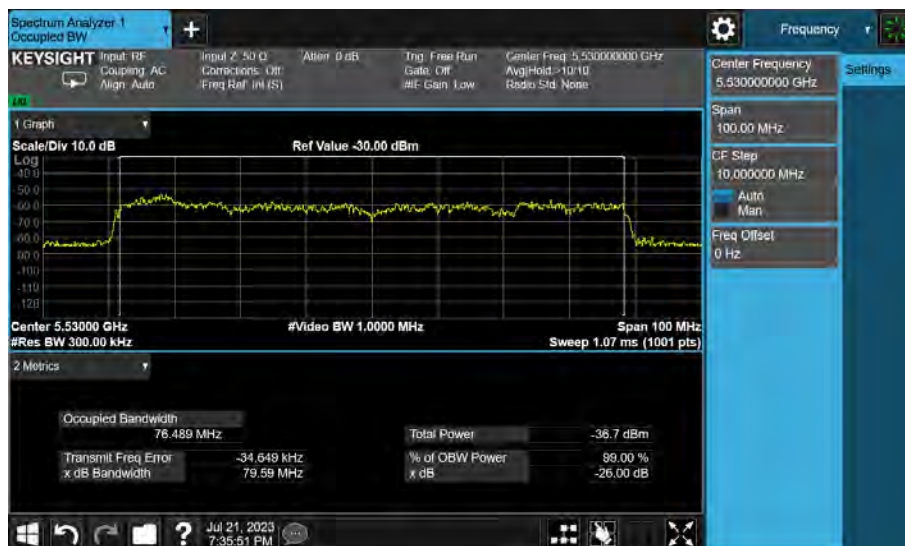

6.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5500	Type1	Table 5a	1	29	1	96.67%	≥ 60%
	Type2	Random	Random	28	2	93.33%	≥ 60%
	Type3	Random	Random	29	1	96.67%	≥ 60%
	Type4	Random	Random	29	1	96.67%	≥ 60%
	Type1~4					95.83%	≥ 80%
	Type5	Random	Random	25	5	83.33%	≥ 80%
	Type6	Hopping	1	22	8	73.33%	≥ 70%

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5510	Type1	Table 5a	1	29	1	96.67%	≥ 60%
	Type2	Random	Random	29	1	96.67%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	28	2	93.33%	≥ 60%
	Type1~4					94.17%	≥ 80%
	Type5	Random	Random	25	5	83.33%	≥ 80%
	Type6	Hopping	1	29	1	96.67%	≥ 70%

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	29	1	96.67%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	28	2	93.33%	≥ 60%
	Type1~4					93.33%	≥ 80%
	Type5	Random	Random	28	2	93.33%	≥ 80%
	Type6	Hopping	1	29	1	96.67%	≥ 70%

Test Mode	802.11ax HE20					
Frequency	5560 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	1	618	86	1618	1
2	5560	1	758	70	1319	1
3	5560	1	798	67	1253	1
4	5560	1	598	89	1672	1
5	5560	1	658	81	1520	1
6	5560	1	598	89	1672	1
7	5560	1	898	59	1114	1
8	5560	1	738	72	1355	1
9	5560	1	598	89	1672	1
10	5560	1	558	95	1792	1
11	5560	1	918	58	1089	1
12	5560	1	718	74	1393	1
13	5560	1	538	99	1859	1
14	5560	1	838	63	1193	1
15	5560	1	818	65	1222	1
16	5560	1	575	92	1739	1
17	5560	1	622	85	1608	1
18	5560	1	582	91	1718	1
19	5560	1	846	63	1182	1
20	5560	1	1956	27	511	1
21	5560	1	2160	25	463	1
22	5560	1	2161	25	463	1
23	5560	1	1319	41	758	1
24	5560	1	2115	25	473	1
25	5560	1	842	63	1188	1
26	5560	1	920	58	1087	1
27	5560	1	2771	20	361	1
28	5560	1	2646	20	378	1
29	5560	1	1509	35	663	1
30	5560	1	569	93	1757	0
Detection Percentage (%)						96.67

Test Mode	802.11ax HE20					
Frequency	5560 MHz					
Radar Signal	Type 2					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	1.80	227.90	26	4388	1
2	5560	2.10	153.70	25	6506	1
3	5560	2.80	191.40	26	5225	1
4	5560	3.70	169.20	26	5910	1
5	5560	4.80	220.70	28	4531	1
6	5560	2.40	178.30	28	5609	1
7	5560	1.40	227.30	28	4399	1
8	5560	4.20	188.50	24	5305	1
9	5560	4.20	219.50	27	4556	1
10	5560	1.20	220.10	25	4543	1
11	5560	2.90	220.80	24	4529	1
12	5560	3.90	223.60	23	4472	1
13	5560	4.40	188.70	26	5299	1
14	5560	3.00	176.90	27	5653	1
15	5560	4.70	168.10	28	5949	1
16	5560	1.40	216.00	28	4630	0
17	5560	4.90	212.00	28	4717	1
18	5560	1.80	165.80	29	6031	1
19	5560	3.30	201.10	23	4973	1
20	5560	3.20	198.00	28	5051	1
21	5560	1.70	195.00	27	5128	1
22	5560	4.40	199.20	24	5020	0
23	5560	1.00	158.80	29	6297	1
24	5560	2.40	154.20	24	6485	1
25	5560	3.90	198.70	24	5033	1
26	5560	2.10	229.00	26	4367	1
27	5560	1.80	215.80	24	4634	1
28	5560	4.70	186.60	27	5359	1
29	5560	1.60	213.30	27	4688	1
30	5560	3.30	193.60	24	5165	1
Detection Percentage (%)						93.33

Test Mode	802.11ax HE20					
Frequency	5560 MHz					
Radar Signal	Type 3					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	7.40	448.00	17	2232.14	1
2	5560	6.50	202.50	17	4938.27	1
3	5560	7.00	493.00	16	2028.40	1
4	5560	7.20	442.40	17	2260.40	1
5	5560	9.50	440.50	17	2270.15	1
6	5560	9.60	471.10	17	2122.69	1
7	5560	6.00	213.50	17	4683.84	1
8	5560	6.50	338.00	17	2958.58	1
9	5560	7.50	490.70	16	2037.91	1
10	5560	9.10	476.60	17	2098.20	1
11	5560	7.80	326.30	16	3064.66	1
12	5560	7.80	497.00	17	2012.07	1
13	5560	9.20	225.40	17	4436.56	1
14	5560	6.10	229.50	17	4357.30	1
15	5560	7.20	467.70	17	2138.12	1
16	5560	8.10	306.10	16	3266.91	1
17	5560	7.00	224.20	17	4460.30	1
18	5560	7.20	335.50	16	2980.63	1
19	5560	8.80	278.60	16	3589.38	1
20	5560	9.20	270.50	16	3696.86	1
21	5560	9.80	476.50	17	2098.64	1
22	5560	9.10	263.30	18	3797.95	1
23	5560	6.20	332.70	18	3005.71	1
24	5560	9.60	244.50	17	4089.98	1
25	5560	9.20	207.10	17	4828.59	0
26	5560	7.10	422.70	17	2365.74	1
27	5560	8.30	429.60	17	2327.75	1
28	5560	8.60	274.10	17	3648.30	1
29	5560	7.70	448.60	17	2229.16	1
30	5560	9.50	351.10	16	2848.19	1
Detection Percentage (%)						96.67

Test Mode	802.11ax HE20					
Frequency	5560 MHz					
Radar Signal	Type 4					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	13.40	281.80	14	3549	1
2	5560	12.00	308.10	12	3246	1
3	5560	18.30	366.20	13	2731	1
4	5560	11.30	308.80	13	3238	1
5	5560	13.10	412.40	14	2425	1
6	5560	17.80	476.40	15	2099	1
7	5560	12.00	468.00	15	2137	1
8	5560	12.80	485.50	13	2060	1
9	5560	19.30	474.00	13	2110	1
10	5560	16.00	251.50	16	3976	1
11	5560	14.20	449.20	14	2226	1
12	5560	14.60	445.90	15	2243	1
13	5560	18.10	376.90	14	2653	1
14	5560	14.20	389.40	12	2568	1
15	5560	11.20	466.00	12	2146	1
16	5560	13.40	460.30	12	2172	1
17	5560	14.50	216.00	15	4630	1
18	5560	18.80	220.50	14	4535	1
19	5560	18.30	398.60	16	2509	0
20	5560	15.50	433.50	13	2307	1
21	5560	19.10	362.70	12	2757	1
22	5560	12.30	433.20	16	2308	1
23	5560	11.10	340.90	13	2933	1
24	5560	12.20	498.70	14	2005	1
25	5560	19.80	232.70	12	4297	1
26	5560	15.10	228.80	15	4371	1
27	5560	19.20	283.20	12	3531	1
28	5560	18.60	457.20	13	2187	1
29	5560	19.70	365.50	16	2736	1
30	5560	16.70	225.80	14	4429	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5553.5	1	76.4	8	1646.8	2	0
	5558.5	2	66.0	19	1435.5	1	
	5553.5	3	54.3	7	1817.0	1	
	5557.5	4	63.8	17	1265.1	3	
	5552.5	5	50.4	5	1411.8	2	
	5557.5	6	80.8	18	1770.7	1	
	5554.5	7	85.1	10	1239.0	1	
	5556.5	8	76.4	14	1688.5	1	
	5554.5	9	79.6	10	1159.9	2	
	5552.5	10	94.5	5	1499.8	1	
	5552.5	11	67.3	6	1328.6	3	
2	5555.5	1	67.9	13	1847.4	2	0
	5558.5	2	73.3	19	1746.9	1	
	5554.5	3	79.6	11	1551.6	3	
	5553.5	4	90.3	8	1248.3	3	
	5557.5	5	73.8	17	1956.1	3	
	5555.5	6	80.5	13	1255.8	3	
	5556.5	7	63.2	16	1392.1	2	
	5554.5	8	62.2	10	1451.0	1	
	5558.5	9	53.7	19	1739.3	2	
	5557.5	10	56.7	18	1537.5	2	
	5555.5	11	74.3	13	1793.9	2	
	5552.5	12	79.8	5	1634.9	3	
3	5557.5	1	68.7	18	1467.7	2	1
	5553.5	2	79.9	7	1767.9	3	
	5553.5	3	59.0	8	1737.8	2	
	5555.5	4	97.7	13	1712.6	1	
	5555.5	5	97.5	13	1500.3	3	
	5556.5	6	57.8	16	1587.7	3	
	5557.5	7	52.3	18	1507.2	3	
	5554.5	8	93.3	11	1852.6	2	
	5557.5	9	59.0	17	1272.8	1	
	5552.5	10	67.2	5	1327.5	1	
	5553.5	11	75.2	7	1995.3	2	
	5554.5	12	75.2	11	1069.4	2	
	5555.5	13	92.4	12	1097.6	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5552.5	1	55.8	5	1446.9	2	1
	5552.5	2	84.5	6	1590.4	2	
	5555.5	3	96.3	13	1391.3	1	
	5552.5	4	91.4	6	1620.4	1	
	5554.5	5	98.9	11	1430.1	3	
	5557.5	6	82.1	18	1394.6	3	
	5557.5	7	93.7	18	1601.5	3	
	5558.5	8	90.8	19	1518.0	2	
	5553.5	9	95.6	8	1171.0	1	
5	5556.5	1	75.0	14	1287.9	3	1
	5555.5	2	50.3	12	1078.3	1	
	5554.5	3	84.9	11	1704.7	1	
	5554.5	4	80.3	11	1639.3	2	
	5553.5	5	94.8	7	1849.1	2	
	5554.5	6	61.3	11	1909.6	3	
	5557.5	7	86.7	17	1124.4	1	
	5553.5	8	80.1	7	1658.7	3	
	5552.5	9	96.7	6	1907.5	3	
	5552.5	10	96.8	6	1421.6	1	
	5556.5	11	61.7	14	1433.7	2	
	5552.5	12	96.6	6	1734.4	1	
	5552.5	13	92.0	5	1159.7	1	
	5556.5	14	50.1	14	1404.3	2	
	5554.5	15	92.8	9	1078.2	2	
6	5553.5	1	55.0	7	1772.6	2	1
	5556.5	2	52.7	14	1586.5	1	
	5554.5	3	63.5	10	1373.6	1	
	5557.5	4	72.9	18	1108.4	1	
	5555.5	5	85.1	13	1213.6	1	
	5556.5	6	93.3	16	1309.8	3	
	5553.5	7	64.3	7	1476.6	2	
	5556.5	8	68.1	14	1822.0	1	
	5556.5	9	79.9	14	1442.5	3	
	5554.5	10	76.9	11	1184.2	3	
	5558.5	11	82.7	19	1392.2	3	
	5553.5	12	58.2	8	1871.5	3	
	5556.5	13	83.4	14	1895.8	3	
	5557.5	14	56.9	17	1209.3	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5558.5	1	89.0	19	1228.5	3	0
	5557.5	2	86.4	18	1041.6	3	
	5555.5	3	88.0	13	1410.9	3	
	5557.5	4	77.0	18	1657.5	3	
	5554.5	5	73.2	9	1454.9	1	
	5558.5	6	83.5	19	1359.4	2	
	5556.5	7	63.3	16	1662.7	3	
	5557.5	8	91.9	18	1144.7	3	
	5555.5	9	95.9	12	1931.8	3	
	5556.5	10	58.3	16	1085.0	3	
	5556.5	11	71.8	16	1611.8	3	
	5556.5	12	96.9	16	1879.4	2	
	5556.5	13	62.7	16	1244.8	1	
	5554.5	14	72.8	11	1868.1	2	
	5558.5	15	89.0	19	1688.0	2	
	5554.5	16	69.9	9	1333.1	3	
	5556.5	17	79.8	16	1908.5	2	
8	5556.5	1	56.1	14	1287.7	2	1
	5557.5	2	64.0	17	1696.0	1	
	5554.5	3	97.1	10	1166.2	3	
	5556.5	4	70.4	14	1462.9	3	
	5556.5	5	90.0	16	1279.9	1	
	5557.5	6	74.9	18	1720.6	2	
	5558.5	7	86.2	20	1925.0	3	
	5555.5	8	55.2	12	1974.1	3	
	5558.5	9	77.8	19	1928.8	3	
	5553.5	10	90.3	7	1852.3	3	
	5556.5	11	75.4	15	1063.5	3	
	5558.5	12	94.3	19	1442.3	3	
	5556.5	13	89.1	14	1219.0	1	
	5555.5	14	63.7	13	1908.1	3	
	5558.5	15	61.9	20	1786.6	1	
	5555.5	16	79.4	12	1012.4	3	
	5555.5	17	66.8	12	1967.2	2	
	5553.5	18	81.8	8	1702.5	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5554.5	1	55.2	10	1423.8	3	1
	5553.5	2	91.2	7	1036.6	1	
	5558.5	3	53.5	20	1694.4	3	
	5555.5	4	99.2	12	1917.8	1	
	5552.5	5	91.2	6	1562.8	2	
	5552.5	6	50.3	6	1997.2	1	
	5553.5	7	70.8	8	1661.5	3	
	5554.5	8	82.5	10	1089.6	3	
	5557.5	9	98.7	17	1900.5	2	
	5556.5	10	62.4	14	1776.9	3	
	5556.5	11	65.4	16	1918.4	2	
	5558.5	12	65.8	19	1581.5	1	
	5557.5	13	75.6	18	1132.7	2	
	5554.5	14	76.1	11	1894.7	2	
	5556.5	15	83.6	15	1165.0	2	
	5556.5	16	68.0	14	1968.8	1	
	5555.5	17	70.3	13	1102.6	3	
	5556.5	18	75.3	15	1399.3	2	
	5554.5	19	76.7	10	1269.7	2	
10	5555.5	1	80.4	12	1785.2	3	1
	5556.5	2	52.1	16	1080.6	3	
	5554.5	3	60.0	9	1527.8	3	
	5558.5	4	58.7	20	1884.7	1	
	5556.5	5	79.8	16	1437.5	3	
	5552.5	6	86.8	5	1269.6	2	
	5553.5	7	83.3	7	1895.2	2	
	5555.5	8	58.9	13	1239.2	1	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5560	1	71.7	15	1362.9	2	1
	5560	2	80.0	7	1165.7	2	
	5560	3	97.5	17	1061.2	1	
	5560	4	67.0	15	1510.8	2	
	5560	5	76.1	8	1705.3	2	
	5560	6	61.3	20	1214.6	2	
	5560	7	68.7	18	1539.4	3	
	5560	8	81.1	16	1874.4	2	
	5560	9	50.7	17	1380.4	2	
	5560	10	72.4	17	1841.9	2	
	5560	11	55.6	7	1721.6	2	
	5560	12	96.7	6	1316.8	1	
	5560	13	83.6	15	1042.8	3	
	5560	14	57.7	10	1052.2	3	
	5560	15	84.2	7	1374.4	3	
	5560	16	91.6	12	1897.4	1	
12	5560	1	68.2	9	1123.9	2	1
	5560	2	55.2	9	1617.9	2	
	5560	3	72.5	8	1479.7	3	
	5560	4	94.9	13	1401.8	2	
	5560	5	54.8	16	1329.4	2	
	5560	6	95.6	13	1438.8	2	
	5560	7	68.8	6	1633.8	2	
	5560	8	62.7	16	1141.9	2	
	5560	9	65.5	18	1534.7	2	
	5560	10	89.8	9	1163.9	1	
	5560	11	89.2	18	1814.7	2	
	5560	12	55.3	7	1041.0	2	
	5560	13	67.7	6	1824.1	1	
	5560	14	86.3	14	1015.8	1	
	5560	15	70.2	16	1860.5	2	
	5560	16	79.3	13	1802.8	3	
	5560	17	93.3	15	1758.8	3	
	5560	18	75.2	11	1777.2	1	
	5560	19	76.4	14	1387.3	2	
	5560	20	66.6	14	1893.1	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5560	1	64.3	20	1437.0	3	1
	5560	2	93.8	5	1482.8	1	
	5560	3	76.6	6	1055.6	1	
	5560	4	70.2	8	1003.8	3	
	5560	5	64.6	10	1008.8	2	
	5560	6	54.2	7	1712.3	1	
	5560	7	86.6	14	1777.5	2	
	5560	8	56.3	19	1560.8	1	
	5560	9	60.1	8	1292.3	2	
	5560	10	74.2	19	1479.3	1	
14	5560	1	70.3	18	1950.3	1	1
	5560	2	93.4	5	1517.6	3	
	5560	3	76.1	8	1210.4	1	
	5560	4	85.2	16	1362.0	3	
	5560	5	53.9	15	1749.2	3	
	5560	6	72.7	17	1027.7	2	
	5560	7	63.0	16	1228.3	3	
	5560	8	51.3	12	1163.7	2	
	5560	9	97.0	11	1925.2	2	
	5560	10	85.0	9	1805.6	1	
	5560	11	93.0	7	1715.5	3	
	5560	12	86.6	6	1504.2	3	
	5560	13	53.2	12	1354.5	1	
	5560	14	60.7	5	1293.0	1	
	5560	15	56.9	6	1628.4	3	
	5560	16	84.1	6	1456.3	2	
	5560	17	74.9	20	1899.9	3	
	5560	18	85.8	16	1312.2	1	
	5560	19	82.0	9	1388.4	1	
	5560	20	54.4	12	1794.8	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5560	1	91.2	13	1485.4	2	1
	5560	2	71.4	6	1360.5	1	
	5560	3	85.5	9	1631.6	3	
	5560	4	66.9	17	1314.5	1	
	5560	5	89.8	9	1104.1	3	
	5560	6	63.0	11	1175.5	1	
	5560	7	84.9	7	1583.7	1	
	5560	8	75.2	6	1348.5	2	
	5560	9	75.5	16	1666.9	2	
	5560	10	68.7	19	1685.6	3	
	5560	11	86.2	17	1610.6	3	
	5560	12	97.3	14	1970.0	1	
	5560	13	67.1	14	1289.3	3	
	5560	14	71.4	9	1358.8	2	
	5560	15	95.9	14	1983.3	1	
	5560	16	89.9	19	1785.1	2	
	5560	17	75.0	16	1735.2	3	
	5560	18	69.0	9	1463.0	2	
	5560	19	71.0	8	1404.1	1	
16	5560	1	66.5	8	1412.2	1	1
	5560	2	88.2	19	1686.7	1	
	5560	3	75.2	18	1945.4	1	
	5560	4	51.2	19	1398.9	2	
	5560	5	79.9	13	1899.7	3	
	5560	6	99.2	17	1488.1	3	
	5560	7	86.2	17	1378.0	3	
	5560	8	52.8	11	1671.4	1	
	5560	9	60.1	9	1102.8	2	
	5560	10	73.4	20	1221.6	1	
	5560	11	56.5	12	1469.4	2	
	5560	12	98.8	12	1746.8	1	
	5560	13	57.8	15	1576.4	3	
	5560	14	60.4	18	1348.3	2	
	5560	15	73.2	9	1771.8	1	
	5560	16	66.9	19	1299.6	3	
	5560	17	78.8	12	1039.7	3	
	5560	18	84.8	8	1352.8	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5560	1	98.2	17	1037.3	2	1
	5560	2	72.6	17	1759.3	3	
	5560	3	60.7	19	1731.3	2	
	5560	4	68.8	15	1211.6	1	
	5560	5	52.4	10	1446.0	3	
	5560	6	57.6	10	1791.7	3	
	5560	7	88.0	11	1144.3	3	
	5560	8	57.5	6	1473.4	3	
	5560	9	82.6	12	1004.9	2	
	5560	10	94.8	10	1858.0	1	
	5560	11	56.3	9	1542.3	2	
	5560	12	58.9	18	1320.7	3	
	5560	13	77.6	11	1026.6	2	
	5560	14	54.1	19	1799.3	3	
	5560	15	61.7	19	1443.3	2	
	5560	16	95.1	6	1495.0	3	
	5560	17	71.0	6	1344.7	1	
18	5560	1	73.9	13	1699.9	3	1
	5560	2	65.3	7	1163.1	1	
	5560	3	82.6	9	1474.0	1	
	5560	4	83.2	14	1509.0	3	
	5560	5	70.7	10	1381.8	2	
	5560	6	91.2	16	1066.2	3	
	5560	7	54.0	14	1491.6	1	
	5560	8	74.7	19	1047.7	1	
	5560	9	74.9	7	1815.3	1	
	5560	10	88.3	5	1672.2	3	
	5560	11	82.8	9	1095.7	1	
	5560	12	55.2	17	1540.6	2	
	5560	13	82.4	9	1417.8	3	
	5560	14	98.0	16	1910.5	3	
	5560	15	64.2	14	1900.1	2	
	5560	1	98.2	17	1037.3	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5560	1	76.0	19	1247.9	2	1
	5560	2	72.1	14	1939.9	2	
	5560	3	65.1	9	1952.9	1	
	5560	4	65.4	17	1321.8	3	
	5560	5	99.3	18	1234.5	2	
	5560	6	82.9	10	1672.8	2	
	5560	7	93.7	9	1417.5	1	
	5560	8	54.0	20	1136.3	3	
	5560	9	57.4	13	1399.3	3	
	5560	10	82.5	19	1135.2	1	
	5560	11	85.2	14	1950.6	1	
	5560	12	88.5	9	1356.7	3	
	5560	13	88.9	19	1717.3	1	
	5560	14	87.5	9	1563.6	3	
20	5560	1	55.0	9	1631.6	3	1
	5560	2	69.6	20	1403.3	2	
	5560	3	70.9	15	1421.0	1	
	5560	4	76.2	16	1351.5	1	
	5560	5	67.2	16	1631.6	3	
	5560	6	68.2	20	1528.3	1	
	5560	7	68.1	18	1676.4	2	
	5560	8	64.3	16	1214.2	3	
	5560	9	87.2	9	1549.1	1	
	5560	10	57.7	16	1885.8	3	
21	5567.5	1	75.1	6	1924.2	3	1
	5561.5	2	98.1	19	1652.6	2	
	5562.5	3	60.8	17	1142.5	2	
	5564.5	4	88.0	13	1040.8	3	
	5566.5	5	93.8	7	1822.3	2	
	5565.5	6	93.4	10	1998.5	1	
	5567.5	7	75.2	6	1278.4	3	
	5566.5	8	83.3	7	1812.7	1	
	5562.5	9	83.8	18	1425.2	3	
	5565.5	10	70.8	11	1825.4	2	
	5562.5	11	90.1	18	1335.2	3	
	5564.5	12	55.0	13	1593.3	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5565.5	1	52.5	11	1139.5	3	1
	5567.5	2	75.8	6	1959.6	2	
	5565.5	3	95.4	9	1956.1	1	
	5565.5	4	69.9	9	1916.3	3	
	5564.5	5	50.6	12	1043.9	3	
	5564.5	6	86.6	13	1058.3	2	
	5564.5	7	87.5	13	1235.1	1	
	5563.5	8	51.2	16	1824.5	3	
	5565.5	9	77.8	9	1299.2	2	
23	5567.5	1	77.0	6	1147.6	1	1
	5566.5	2	86.6	7	1758.0	1	
	5566.5	3	87.3	7	1927.9	1	
	5565.5	4	78.0	10	1680.1	2	
	5563.5	5	59.7	16	1738.7	3	
	5564.5	6	53.4	12	1430.7	3	
	5564.5	7	64.6	13	1949.7	1	
	5563.5	8	73.2	15	1108.5	1	
	5566.5	9	67.2	8	1970.4	3	
	5566.5	10	70.5	7	1742.1	1	
	5563.5	11	94.4	16	1208.1	2	
	5563.5	12	91.8	14	1953.5	1	
	5566.5	13	80.3	8	1169.2	3	
	5561.5	14	50.5	19	1236.3	3	
	5561.5	15	69.0	19	1585.1	3	
24	5567.5	1	59.3	5	1686.3	1	0
	5564.5	2	72.7	12	1462.3	3	
	5562.5	3	71.3	17	1339.3	1	
	5566.5	4	88.9	8	1648.9	1	
	5566.5	5	65.4	7	1938.5	1	
	5566.5	6	82.1	8	1953.6	3	
	5565.5	7	82.6	10	1595.8	2	
	5566.5	8	97.7	7	1970.5	2	
	5562.5	9	77.5	17	1688.5	2	
	5565.5	10	89.8	9	1645.9	1	
	5566.5	11	77.9	7	1530.7	2	
	5564.5	12	98.8	12	1621.1	3	
	5562.5	13	57.5	17	1050.9	1	
	5562.5	14	58.0	18	1372.5	1	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5566.5	1	80.4	8	1323.5	3	0
	5563.5	2	58.1	14	1892.3	3	
	5565.5	3	96.7	11	1743.7	3	
	5564.5	4	59.0	12	1052.8	3	
	5564.5	5	95.6	12	1069.8	2	
	5566.5	6	74.4	7	1331.2	1	
	5567.5	7	62.2	6	1039.0	3	
	5566.5	8	83.5	8	1945.3	3	
	5564.5	9	73.9	12	1824.0	1	
	5562.5	10	63.4	17	1036.8	1	
	5562.5	11	50.7	17	1483.8	1	
	5563.5	12	86.5	14	1009.7	2	
	5567.5	13	59.8	5	1065.6	1	
	5562.5	14	74.7	18	1288.3	3	
	5565.5	15	88.2	11	1039.6	3	
	5564.5	16	52.6	12	1480.1	3	
	5565.5	17	58.5	9	1726.1	2	
	5563.5	18	99.3	14	1395.1	2	
26	5567.5	1	67.8	6	1635.3	2	1
	5565.5	2	77.2	10	1557.4	1	
	5567.5	3	84.2	5	1343.8	1	
	5564.5	4	71.7	12	1103.6	2	
	5563.5	5	63.0	15	1430.4	2	
	5563.5	6	62.0	14	1153.9	3	
	5564.5	7	88.8	12	1111.2	1	
	5563.5	8	80.8	15	1342.3	3	
	5566.5	9	58.7	7	1372.4	1	
	5561.5	10	50.4	19	1961.0	1	
	5563.5	11	51.4	15	1991.4	3	
	5562.5	12	87.3	17	1599.6	1	
	5566.5	13	79.6	8	1603.4	1	
	5561.5	14	99.8	19	1460.0	2	
	5561.5	15	59.0	19	1248.1	3	
	5564.5	16	59.4	13	1579.1	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5564.5	1	99.5	12	1627.5	3	1
	5565.5	2	55.9	9	1964.4	1	
	5561.5	3	67.8	19	1777.3	3	
	5567.5	4	54.1	6	1966.0	1	
	5563.5	5	76.0	15	1012.8	3	
	5562.5	6	94.8	18	1514.3	1	
	5564.5	7	93.3	12	1648.2	2	
	5561.5	8	91.3	20	1123.7	2	
	5565.5	9	55.9	10	1932.8	2	
	5566.5	10	66.0	7	1698.5	3	
	5563.5	11	56.3	16	1108.1	1	
	5565.5	12	68.8	9	1689.0	1	
	5563.5	13	71.8	16	1249.2	2	
	5565.5	14	69.1	11	1071.5	1	
	5562.5	15	88.6	17	1423.5	3	
	5565.5	16	96.5	10	1357.4	2	
	5563.5	17	68.3	16	1371.4	2	
	5565.5	18	82.9	10	1735.2	3	
	5563.5	19	58.5	14	1482.3	3	
	5566.5	20	80.3	8	1379.5	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5565.5	1	85.5	9	1612.0	3	1
	5566.5	2	87.8	7	1638.8	1	
	5564.5	3	71.7	12	1103.9	1	
	5565.5	4	84.3	9	1893.6	1	
	5563.5	5	58.6	15	1350.1	2	
	5567.5	6	88.4	5	1568.6	1	
	5562.5	7	93.9	17	1455.2	1	
	5561.5	8	92.5	19	1767.6	3	
	5562.5	9	91.7	17	1412.1	3	
	5567.5	10	58.4	6	1114.7	2	
	5564.5	11	66.8	12	1723.5	1	
	5563.5	12	56.9	16	1724.1	1	
	5564.5	13	62.2	12	1961.4	1	
	5563.5	14	62.3	14	1305.8	1	
	5567.5	15	89.8	6	1724.1	2	
	5564.5	16	96.8	12	1691.8	3	
	5561.5	17	61.1	20	1535.6	2	
	5565.5	18	87.7	11	1577.1	1	
	5561.5	19	83.2	20	1202.9	1	
	5566.5	20	89.9	7	1604.8	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5566.5	1	86.4	7	1256.0	1	1
	5563.5	2	73.2	16	1948.7	2	
	5564.5	3	50.6	13	1785.1	1	
	5567.5	4	69.3	6	1711.8	2	
	5562.5	5	77.1	17	1423.4	3	
	5563.5	6	61.3	16	1339.3	3	
	5562.5	7	89.7	17	1524.4	3	
	5563.5	8	74.6	14	1912.1	1	
	5565.5	9	59.0	11	1343.7	3	
	5563.5	10	92.5	15	1918.5	1	
	5565.5	11	90.0	11	1430.0	2	
	5566.5	12	85.9	7	1863.1	1	
	5564.5	13	62.6	12	1321.3	3	
	5563.5	14	92.9	15	1148.5	3	
	5567.5	15	70.0	6	1347.3	2	
	5565.5	16	52.4	11	1838.9	1	
	5562.5	17	74.7	18	1230.9	1	
30	5561.5	1	99.9	20	1728.2	2	1
	5563.5	2	84.7	14	1986.9	2	
	5566.5	3	62.0	8	1481.3	2	
	5562.5	4	70.7	17	1576.8	2	
	5563.5	5	97.9	16	1574.3	2	
	5563.5	6	70.4	15	1766.7	3	
	5562.5	7	97.4	17	1291.1	2	
	5563.5	8	75.7	16	1643.1	1	
	5565.5	9	55.9	9	1305.6	3	
	5562.5	10	50.5	17	1291.9	1	
	5563.5	11	73.7	16	1095.7	3	
	5563.5	12	50.4	16	1100.3	3	
	5563.5	13	96.5	14	1634.1	2	
	5563.5	14	63.9	15	1009.1	2	
Detection Percentage (%)							83.33

Test Mode		802.11ax HE20				
Frequency		5560 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	0
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	0
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	0
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	0
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	0
20	1	333	9	0.333	300	0
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	0
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	0
Detection Percentage (%)						73.33

Test Mode	802.11ax HE40					
Frequency	5550 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	1	878	61	1139	1
2	5550	1	878	61	1139	1
3	5550	1	3066	18	326	1
4	5550	1	938	57	1066	1
5	5550	1	758	70	1319	1
6	5550	1	738	72	1355	1
7	5550	1	838	63	1193	1
8	5550	1	3066	18	326	1
9	5550	1	738	72	1355	1
10	5550	1	3066	18	326	1
11	5550	1	698	76	1433	1
12	5550	1	718	74	1393	1
13	5550	1	778	68	1285	1
14	5550	1	818	65	1222	0
15	5550	1	618	86	1618	1
16	5550	1	1040	51	962	1
17	5550	1	851	63	1175	1
18	5550	1	1425	38	702	1
19	5550	1	2319	23	431	1
20	5550	1	1248	43	801	1
21	5550	1	3031	18	330	1
22	5550	1	1547	35	646	1
23	5550	1	2535	21	394	1
24	5550	1	1158	46	864	1
25	5550	1	2959	18	338	1
26	5550	1	2886	19	347	1
27	5550	1	1723	31	580	1
28	5550	1	557	95	1795	1
29	5550	1	1586	34	631	1
30	5550	1	1801	30	555	1
Detection Percentage (%)						96.67

Test Mode	802.11ax HE40					
Frequency	5550 MHz					
Radar Signal	Type 2					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	2.30	209.70	23	4769	1
2	5550	2.80	164.40	26	6083	1
3	5550	3.10	203.50	29	4914	1
4	5550	4.90	183.10	28	5461	1
5	5550	1.70	173.50	27	5764	1
6	5550	2.60	219.20	26	4562	1
7	5550	3.80	180.90	26	5528	1
8	5550	1.90	166.90	26	5992	1
9	5550	2.00	205.80	23	4859	1
10	5550	1.70	152.20	23	6570	1
11	5550	2.80	153.50	28	6515	1
12	5550	4.40	204.00	25	4902	1
13	5550	3.30	224.40	27	4456	1
14	5550	4.10	206.30	23	4847	1
15	5550	3.70	186.80	25	5353	1
16	5550	2.80	216.50	29	4619	1
17	5550	3.90	189.90	27	5266	1
18	5550	3.50	198.90	23	5028	1
19	5550	1.00	225.90	24	4427	1
20	5550	3.70	219.50	24	4556	1
21	5550	1.00	180.20	28	5549	1
22	5550	3.30	159.20	24	6281	1
23	5550	2.90	152.80	26	6545	1
24	5550	2.00	210.00	29	4762	1
25	5550	1.20	186.90	24	5350	0
26	5550	4.80	188.10	27	5316	1
27	5550	2.70	224.00	23	4464	1
28	5550	2.40	159.80	29	6258	1
29	5550	4.70	188.20	28	5313	1
30	5550	3.30	160.80	26	6219	1
Detection Percentage (%)						96.67

Test Mode	802.11ax HE40					
Frequency	5550 MHz					
Radar Signal	Type 3					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	8.20	217.30	17	4601.93	1
2	5550	8.30	242.20	18	4128.82	1
3	5550	8.60	343.30	18	2912.90	1
4	5550	8.20	209.80	18	4766.44	1
5	5550	7.40	319.60	16	3128.91	1
6	5550	6.00	454.70	18	2199.25	1
7	5550	8.00	426.80	17	2343.02	1
8	5550	8.20	200.60	17	4985.04	1
9	5550	9.50	328.50	16	3044.14	1
10	5550	6.50	367.80	16	2718.87	1
11	5550	9.20	376.10	16	2658.87	1
12	5550	6.10	457.70	16	2184.84	1
13	5550	8.80	480.80	18	2079.87	1
14	5550	6.70	377.70	17	2647.60	1
15	5550	8.70	478.00	16	2092.05	0
16	5550	6.20	378.60	17	2641.31	1
17	5550	6.80	285.70	16	3500.18	1
18	5550	8.40	446.10	16	2241.65	1
19	5550	7.80	299.00	18	3344.48	1
20	5550	8.50	327.10	16	3057.17	1
21	5550	6.90	337.80	18	2960.33	1
22	5550	7.90	330.10	16	3029.39	1
23	5550	6.40	217.00	16	4608.29	1
24	5550	6.30	265.20	18	3770.74	0
25	5550	8.50	329.20	18	3037.67	0
26	5550	7.40	305.30	16	3275.47	1
27	5550	8.10	351.40	17	2845.76	1
28	5550	8.80	319.00	17	3134.80	1
29	5550	7.00	220.30	16	4539.26	1
30	5550	7.50	258.20	17	3872.97	1
Detection Percentage (%)						90.00

Test Mode	802.11ax HE40					
Frequency	5550 MHz					
Radar Signal	Type 4					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	14.40	242.10	12	4131	1
2	5550	12.50	407.90	15	2452	1
3	5550	14.90	352.50	13	2837	1
4	5550	13.40	472.80	12	2115	1
5	5550	16.10	427.00	15	2342	1
6	5550	15.20	262.80	14	3805	1
7	5550	16.20	327.30	16	3055	1
8	5550	15.90	345.50	14	2894	1
9	5550	13.80	479.90	15	2084	1
10	5550	11.10	427.40	13	2340	1
11	5550	19.60	278.40	13	3592	1
12	5550	19.70	443.20	12	2256	1
13	5550	12.50	357.40	15	2798	1
14	5550	15.20	396.80	12	2520	0
15	5550	17.50	276.40	16	3618	1
16	5550	14.20	427.70	13	2338	1
17	5550	16.40	341.60	14	2927	1
18	5550	18.10	221.70	16	4511	1
19	5550	17.60	347.40	14	2879	1
20	5550	19.80	490.60	14	2038	1
21	5550	14.80	287.70	14	3476	1
22	5550	16.70	258.00	14	3876	1
23	5550	18.20	318.10	13	3144	1
24	5550	19.30	379.70	13	2634	1
25	5550	14.70	294.00	15	3401	1
26	5550	18.20	438.70	16	2279	1
27	5550	19.40	253.20	15	3949	1
28	5550	12.50	386.90	16	2585	1
29	5550	16.10	351.20	12	2847	1
30	5550	19.00	327.20	12	3056	0
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5534	1	84.3	8	1914.2	1	1
	5535	2	78.0	11	1141.0	1	
	5534	3	88.7	8	1007.9	3	
	5534	4	70.3	8	1546.7	3	
	5535	5	62.9	10	1458.4	1	
	5538	6	85.5	18	1900.8	1	
	5533	7	55.5	6	1310.8	2	
	5534	8	64.1	7	1443.6	2	
	5537	9	96.9	14	1077.6	2	
	5539	10	78.3	20	1381.5	1	
	5537	11	73.7	16	1446.1	3	
2	5534	1	61.9	8	1828.8	1	1
	5535	2	78.8	11	1287.3	2	
	5533	3	71.4	5	1971.9	3	
	5539	4	88.7	19	1447.7	1	
	5535	5	81.4	9	1093.7	1	
	5538	6	62.4	17	1291.0	3	
	5538	7	96.8	17	1870.8	3	
	5539	8	60.3	19	1165.0	2	
	5537	9	88.2	15	1663.3	2	
	5539	10	76.8	19	1675.8	1	
	5535	11	55.4	10	1197.6	1	
	5534	12	84.5	7	1254.2	3	
3	5533	1	58.1	6	1977.6	2	1
	5536	2	56.1	13	1827.0	3	
	5539	3	89.8	19	1313.6	3	
	5535	4	57.0	9	1265.3	3	
	5538	5	84.5	17	1985.1	3	
	5539	6	55.8	19	1446.4	1	
	5539	7	58.6	19	1368.7	3	
	5533	8	78.7	5	1889.5	2	
	5538	9	54.6	18	1004.7	1	
	5538	10	88.0	17	1848.2	2	
	5538	11	72.4	17	1038.0	2	
	5536	12	78.7	12	1616.8	2	
	5539	13	95.8	19	1106.5	2	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5534	1	86.8	7	1664.8	2	1
	5538	2	96.9	17	1202.1	2	
	5535	3	70.2	9	1563.2	1	
	5536	4	68.5	12	1242.0	2	
	5533	5	67.6	6	1860.0	2	
	5538	6	91.4	17	1315.1	3	
	5535	7	91.9	11	1463.3	2	
	5537	8	54.1	16	1919.9	3	
	5538	9	61.4	17	1590.8	1	
5	5533	1	69.4	5	1654.4	1	1
	5534	2	84.2	7	1528.4	1	
	5537	3	57.2	16	1812.0	1	
	5539	4	78.6	20	1476.6	1	
	5539	5	51.8	19	1156.7	3	
	5539	6	93.5	19	1302.7	1	
	5535	7	84.6	9	1010.3	1	
	5537	8	85.0	16	1414.6	2	
	5538	9	85.9	17	1455.9	1	
	5539	10	78.3	19	1051.4	1	
	5535	11	73.6	11	1561.8	3	
	5536	12	74.6	13	1810.2	2	
	5533	13	71.3	5	1055.3	2	
	5534	14	93.2	7	1983.3	1	
	5538	15	91.4	18	1405.2	3	
6	5535	1	61.2	10	1207.8	1	1
	5539	2	95.0	19	1325.2	2	
	5536	3	65.6	12	1161.1	3	
	5535	4	81.8	11	1596.6	2	
	5537	5	57.4	14	1445.0	1	
	5538	6	57.0	18	1367.7	2	
	5535	7	85.8	9	1889.5	2	
	5535	8	91.6	11	1061.7	3	
	5539	9	53.0	20	1858.6	2	
	5538	10	96.5	18	1867.0	1	
	5537	11	50.8	16	1477.1	3	
	5537	12	63.0	16	1917.8	3	
	5536	13	81.6	12	1363.8	1	
	5537	14	73.0	14	1165.0	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5535	1	81.7	11	1556.8	2	1
	5533	2	86.2	6	1957.9	1	
	5538	3	92.1	17	1175.4	2	
	5533	4	55.5	5	1720.7	3	
	5533	5	71.7	6	1670.0	2	
	5539	6	50.9	20	1923.5	2	
	5536	7	87.3	12	1311.4	3	
	5537	8	78.8	14	1639.0	3	
	5535	9	68.7	11	1594.6	3	
	5537	10	83.3	14	1406.2	3	
	5538	11	63.8	17	1804.3	3	
	5538	12	75.4	18	1876.1	2	
	5536	13	62.6	12	1495.5	2	
	5535	14	65.2	9	1027.0	2	
	5538	15	76.3	17	1607.7	2	
	5535	16	67.1	9	1645.4	3	
	5538	17	75.6	18	1318.0	1	
8	5536	1	76.6	12	1659.3	2	1
	5535	2	51.2	10	1594.8	3	
	5534	3	61.1	8	1681.7	2	
	5535	4	93.9	11	1670.3	2	
	5533	5	52.5	6	1112.4	2	
	5537	6	93.7	16	1060.0	3	
	5537	7	54.5	15	1031.4	2	
	5537	8	64.2	14	1889.3	3	
	5533	9	67.4	6	1453.0	1	
	5533	10	78.0	5	1193.9	3	
	5539	11	53.7	19	1624.5	2	
	5535	12	85.7	11	1970.5	3	
	5534	13	80.4	7	1819.2	3	
	5537	14	68.1	14	1186.3	1	
	5537	15	78.3	14	1066.8	3	
	5537	16	53.8	15	1190.2	1	
	5535	17	95.2	10	1800.8	2	
	5539	18	92.7	19	1294.9	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5536	1	52.8	13	1969.1	3	1
	5538	2	84.7	17	1906.3	3	
	5539	3	89.4	19	1682.8	2	
	5538	4	67.3	17	1349.6	3	
	5536	5	74.9	13	1335.8	1	
	5534	6	65.0	7	1493.0	2	
	5533	7	72.2	6	1772.0	3	
	5537	8	65.9	14	1568.5	3	
	5535	9	53.9	10	1618.3	3	
	5533	10	50.8	6	1522.0	2	
	5537	11	92.5	14	1224.2	3	
	5537	12	92.8	16	1891.8	1	
	5537	13	63.0	14	1936.5	2	
	5537	14	60.2	14	1157.7	2	
	5533	15	58.1	5	1395.4	1	
	5539	16	83.1	20	1530.1	1	
	5539	17	78.1	19	1009.7	1	
	5535	18	93.6	9	1516.9	2	
	5537	19	50.8	14	1986.2	1	
10	5539	1	52.7	19	1281.9	3	1
	5537	2	61.4	14	1306.3	2	
	5534	3	82.3	7	1320.2	1	
	5533	4	54.2	5	1731.2	2	
	5536	5	66.4	13	1481.3	2	
	5538	6	74.8	17	1291.0	2	
	5536	7	69.3	12	1128.8	3	
	5537	8	76.3	16	1525.8	2	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5550	1	73.1	7	1272.7	2	1
	5550	2	68.2	13	1209.6	2	
	5550	3	64.9	16	1370.8	3	
	5550	4	81.3	19	1488.0	1	
	5550	5	76.2	13	1613.0	1	
	5550	6	88.1	7	1961.4	2	
	5550	7	77.5	6	1024.1	3	
	5550	8	54.1	14	1222.3	3	
	5550	9	75.1	6	1446.5	2	
	5550	10	85.4	10	1297.8	2	
	5550	11	71.0	6	1867.5	1	
	5550	12	86.4	13	1294.5	3	
	5550	13	99.6	7	1599.1	2	
	5550	14	93.7	18	1500.7	2	
	5550	15	88.8	13	1324.5	3	
	5550	16	59.4	9	1308.0	3	
12	5550	1	91.6	16	1079.6	3	1
	5550	2	90.5	16	1286.1	3	
	5550	3	85.3	8	1625.5	1	
	5550	4	73.1	6	1889.0	2	
	5550	5	81.8	16	1055.3	1	
	5550	6	61.2	7	1839.3	2	
	5550	7	99.2	7	1721.6	1	
	5550	8	50.4	15	1985.5	3	
	5550	9	56.3	15	1934.1	1	
	5550	10	97.7	5	1107.3	2	
	5550	11	57.2	6	1674.1	1	
	5550	12	70.3	7	1075.5	2	
	5550	13	50.1	13	1109.4	1	
	5550	14	53.8	13	1143.4	1	
	5550	15	85.1	14	1075.0	1	
	5550	16	82.8	13	1145.5	1	
	5550	17	80.8	15	1190.5	3	
	5550	18	63.3	16	1412.1	3	
	5550	19	91.3	9	1395.3	3	
	5550	20	55.3	14	1829.6	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5550	1	90.7	19	1802.9	2	1
	5550	2	93.3	16	1877.9	1	
	5550	3	77.8	12	1745.7	1	
	5550	4	91.4	5	1568.6	3	
	5550	5	78.4	10	1343.0	1	
	5550	6	64.5	5	1170.8	1	
	5550	7	63.1	7	1813.6	2	
	5550	8	71.7	6	1880.0	2	
	5550	9	82.8	9	1452.6	1	
	5550	10	86.0	7	1569.9	2	
14	5550	1	64.5	7	1523.8	3	1
	5550	2	83.9	8	1821.4	1	
	5550	3	51.7	17	1758.9	1	
	5550	4	85.8	5	1383.0	3	
	5550	5	92.9	15	1499.6	1	
	5550	6	80.3	8	1187.5	3	
	5550	7	84.0	17	1084.2	3	
	5550	8	95.2	13	1853.5	1	
	5550	9	80.0	14	1132.2	2	
	5550	10	80.8	16	1108.1	3	
	5550	11	77.7	8	1607.2	1	
	5550	12	57.4	12	1135.2	2	
	5550	13	55.5	14	1206.5	1	
	5550	14	62.6	17	1100.0	3	
	5550	15	70.5	17	1221.6	2	
	5550	16	55.7	11	1827.8	2	
	5550	17	92.2	12	1796.0	3	
	5550	18	89.6	16	1175.6	1	
	5550	19	64.8	17	1479.4	3	
	5550	20	89.2	14	1637.2	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5550	1	76.4	19	1778.7	2	1
	5550	2	91.5	10	1524.4	2	
	5550	3	66.4	11	1961.2	2	
	5550	4	84.5	9	1061.2	1	
	5550	5	97.5	9	1610.5	2	
	5550	6	76.5	8	1688.2	1	
	5550	7	55.5	12	1041.0	2	
	5550	8	88.1	10	1242.4	2	
	5550	9	56.1	13	1988.7	2	
	5550	10	76.0	20	1222.9	1	
	5550	11	95.5	7	1708.6	1	
	5550	12	70.7	19	1041.9	1	
	5550	13	63.9	12	1874.7	2	
	5550	14	55.2	19	1412.6	3	
	5550	15	67.9	17	1057.7	3	
	5550	16	84.7	8	1568.8	2	
	5550	17	80.8	17	1943.4	1	
	5550	18	96.2	14	1267.6	2	
	5550	19	86.7	19	1535.8	2	
16	5550	1	67.7	10	1855.4	2	1
	5550	2	68.6	12	1785.1	3	
	5550	3	85.0	9	1651.0	1	
	5550	4	71.3	9	1686.6	2	
	5550	5	58.4	15	1577.8	1	
	5550	6	81.9	6	1784.0	3	
	5550	7	54.6	6	1773.2	2	
	5550	8	73.0	12	1828.5	3	
	5550	9	98.2	5	1204.4	1	
	5550	10	61.8	9	1319.5	1	
	5550	11	76.1	15	1537.0	3	
	5550	12	53.9	16	1372.5	2	
	5550	13	56.9	9	1899.5	2	
	5550	14	94.6	20	1448.8	3	
	5550	15	97.7	14	1938.9	2	
	5550	16	87.0	18	1487.2	2	
	5550	17	50.8	18	1866.1	2	
	5550	18	98.7	13	1550.9	2	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5550	1	76.8	5	1012.2	1	1
	5550	2	56.6	15	1367.7	2	
	5550	3	95.4	11	1860.4	1	
	5550	4	84.0	20	1615.3	2	
	5550	5	54.7	19	1724.2	3	
	5550	6	93.7	5	1387.4	2	
	5550	7	83.5	14	1247.4	3	
	5550	8	67.5	14	1716.2	2	
	5550	9	86.1	7	1685.1	3	
	5550	10	54.5	17	1870.5	1	
	5550	11	99.7	14	1705.7	2	
	5550	12	78.0	12	1230.5	3	
	5550	13	97.8	18	1932.0	2	
	5550	14	52.3	14	1291.4	3	
	5550	15	97.4	14	1831.0	3	
	5550	16	78.8	10	1566.2	3	
	5550	17	85.7	12	1715.3	3	
18	5550	1	60.1	18	1316.5	1	1
	5550	2	91.3	8	1524.0	3	
	5550	3	80.2	10	1957.7	2	
	5550	4	59.6	10	1078.2	1	
	5550	5	59.0	5	1561.9	1	
	5550	6	77.5	18	1820.6	2	
	5550	7	62.1	15	1132.0	3	
	5550	8	66.5	13	1662.2	2	
	5550	9	98.3	10	1577.8	1	
	5550	10	85.9	14	1826.4	2	
	5550	11	56.1	16	1489.5	2	
	5550	12	71.3	5	1004.7	2	
	5550	13	52.2	7	1189.0	3	
	5550	14	50.4	11	1149.3	3	
	5550	15	87.0	19	1298.5	3	
	5550	1	76.8	5	1012.2	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5550	1	55.1	9	1274.8	3	1
	5550	2	56.3	12	1204.9	3	
	5550	3	70.1	17	1989.0	2	
	5550	4	79.2	15	1812.0	3	
	5550	5	92.1	16	1920.7	2	
	5550	6	75.0	18	1249.8	2	
	5550	7	80.7	17	1044.3	3	
	5550	8	62.5	15	1781.6	2	
	5550	9	80.9	19	1375.9	1	
	5550	10	54.1	6	1708.1	3	
	5550	11	71.3	11	1328.4	2	
	5550	12	92.8	7	1875.8	1	
	5550	13	71.3	10	1279.9	2	
	5550	14	71.0	18	1707.8	1	
20	5550	1	78.2	13	1108.9	1	1
	5550	2	87.1	17	1168.4	1	
	5550	3	94.8	20	1367.2	3	
	5550	4	51.2	15	1961.0	1	
	5550	5	79.6	13	1559.9	1	
	5550	6	99.2	19	1066.7	2	
	5550	7	58.5	5	1152.4	2	
	5550	8	80.6	11	1374.4	1	
	5550	9	69.6	10	1799.2	3	
	5550	10	89.9	14	1334.5	3	
21	5564	1	74.3	13	1577.4	3	1
	5565	2	62.9	11	1875.7	3	
	5566	3	97.7	8	1602.3	2	
	5562	4	86.7	17	1099.1	3	
	5561	5	92.6	20	1787.1	2	
	5567	6	82.5	6	1444.6	3	
	5566	7	53.9	8	1256.3	1	
	5564	8	92.3	12	1655.6	3	
	5565	9	86.3	10	1163.2	2	
	5566	10	51.7	8	1493.6	1	
	5565	11	97.4	10	1172.8	1	
	5567	12	62.5	6	1296.6	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5565	1	89.3	9	1095.8	3	1
	5563	2	63.0	16	1417.4	1	
	5565	3	72.4	11	1720.5	1	
	5564	4	58.5	13	1785.1	1	
	5563	5	87.2	15	1814.2	3	
	5563	6	57.6	14	1759.3	2	
	5563	7	81.3	14	1663.6	3	
	5563	8	82.9	14	1743.0	3	
	5565	9	71.0	9	1595.4	2	
23	5563	1	93.9	15	1401.6	1	1
	5567	2	91.4	5	1016.1	3	
	5566	3	56.5	8	1496.1	3	
	5566	4	61.3	7	1869.0	1	
	5565	5	73.8	10	1686.5	2	
	5563	6	81.6	16	1482.9	1	
	5565	7	89.9	11	1188.6	3	
	5562	8	61.6	18	1292.7	1	
	5566	9	87.9	7	1058.1	1	
	5565	10	63.1	11	1406.9	1	
	5561	11	66.7	20	1882.7	3	
	5563	12	65.7	15	1004.8	1	
	5563	13	77.5	14	1258.6	1	
	5563	14	85.4	15	1705.3	2	
	5563	15	68.7	16	1963.0	1	
24	5565	1	86.7	11	1706.6	3	1
	5563	2	91.4	15	1270.1	1	
	5561	3	70.8	19	1040.1	1	
	5562	4	97.4	18	1037.7	2	
	5562	5	85.1	17	1422.1	3	
	5566	6	50.2	7	1037.0	1	
	5565	7	57.5	9	1384.9	1	
	5563	8	50.1	15	1941.4	3	
	5567	9	50.6	5	1273.2	3	
	5565	10	99.3	9	1072.4	1	
	5563	11	80.5	16	1584.4	2	
	5563	12	98.9	15	1327.4	1	
	5563	13	80.2	15	1244.6	3	
	5562	14	99.3	18	1805.7	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5563	1	86.6	16	1990.9	3	1
	5563	2	96.9	14	1466.8	2	
	5565	3	53.8	10	1752.2	1	
	5562	4	79.1	17	1417.7	1	
	5561	5	74.2	20	1597.5	3	
	5565	6	70.2	10	1814.2	1	
	5565	7	89.4	10	1867.1	3	
	5562	8	60.0	18	1016.7	2	
	5563	9	59.8	15	1003.9	2	
	5561	10	94.3	19	1574.4	3	
	5562	11	55.7	17	1258.9	2	
	5563	12	87.9	16	1420.4	2	
	5565	13	82.0	11	1834.4	2	
	5567	14	53.9	5	1845.2	1	
	5566	15	86.3	7	1361.5	1	
	5562	16	81.8	18	1165.1	2	
	5562	17	63.3	18	1363.1	3	
	5565	18	86.5	10	1372.5	1	
26	5567	1	58.3	5	1058.1	1	0
	5562	2	57.8	18	1376.4	2	
	5563	3	83.8	16	1719.8	3	
	5565	4	91.5	10	1074.4	3	
	5563	5	71.0	16	1031.7	1	
	5565	6	56.6	11	1543.6	1	
	5563	7	53.5	15	1667.7	3	
	5562	8	57.2	17	1903.5	1	
	5565	9	81.5	10	1576.5	1	
	5567	10	66.7	5	1116.2	3	
	5563	11	56.0	15	1335.9	3	
	5566	12	59.8	7	1163.2	1	
	5564	13	85.6	12	1880.6	2	
	5567	14	94.0	6	1716.6	1	
	5567	15	99.2	6	1427.7	1	
	5562	16	65.8	18	1135.0	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5565	1	63.4	10	1102.1	3	0
	5564	2	52.7	13	1440.0	1	
	5563	3	73.2	16	1352.6	1	
	5567	4	93.7	6	1701.1	3	
	5567	5	94.4	6	1345.3	1	
	5565	6	95.4	9	1284.6	1	
	5566	7	78.2	8	1293.6	1	
	5564	8	64.5	12	1309.7	1	
	5566	9	79.5	8	1281.3	3	
	5567	10	55.2	6	1047.0	3	
	5565	11	87.0	11	1683.9	3	
	5567	12	57.6	6	1273.6	1	
	5562	13	93.5	18	1799.8	1	
	5563	14	83.4	16	1766.4	3	
	5563	15	53.7	16	1452.4	3	
	5567	16	67.9	6	1487.3	3	
	5562	17	57.3	17	1709.3	1	
	5562	18	66.0	18	1851.1	3	
	5563	19	75.4	16	1062.9	2	
	5564	20	80.8	13	1450.3	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5563	1	60.6	14	1968.8	1	0
	5561	2	57.0	19	1594.6	2	
	5563	3	74.9	14	1422.1	2	
	5562	4	60.2	18	1135.8	2	
	5561	5	57.2	20	1905.4	3	
	5565	6	93.5	10	1628.7	3	
	5563	7	92.4	14	1179.3	2	
	5563	8	53.7	15	1507.3	2	
	5566	9	74.7	8	1732.3	2	
	5566	10	64.0	7	1930.1	3	
	5564	11	60.4	12	1166.2	2	
	5566	12	70.1	8	1114.4	1	
	5562	13	96.3	18	1963.8	2	
	5562	14	72.7	18	1064.9	1	
	5562	15	58.3	18	1939.6	1	
	5566	16	90.1	7	1392.1	3	
	5567	17	78.7	6	1687.2	3	
	5563	18	61.6	15	1038.0	1	
	5561	19	63.3	20	1018.2	2	
	5564	20	77.0	13	1668.7	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5567	1	96.0	6	1893.3	2	0
	5566	2	70.0	8	1023.2	1	
	5562	3	73.9	18	1551.5	2	
	5561	4	93.2	20	1706.8	3	
	5561	5	62.8	19	1646.3	2	
	5561	6	83.6	19	1716.9	1	
	5564	7	86.8	12	1078.8	3	
	5567	8	93.8	6	1342.7	2	
	5561	9	50.0	19	1342.0	2	
	5563	10	94.0	16	1008.8	2	
	5564	11	57.2	13	1622.7	1	
	5564	12	56.8	12	1977.1	3	
	5565	13	92.0	9	1965.6	1	
	5562	14	70.1	18	1549.0	2	
	5567	15	94.8	6	1423.9	2	
	5565	16	89.8	11	1027.4	2	
	5561	17	95.3	19	1718.0	1	
30	5564	1	63.8	12	1030.8	2	0
	5564	2	85.6	13	1591.9	3	
	5564	3	88.2	13	1003.8	3	
	5564	4	94.0	12	1761.1	3	
	5565	5	92.9	11	1954.1	1	
	5563	6	75.9	14	1415.3	3	
	5567	7	63.3	6	1292.7	1	
	5567	8	64.2	5	1948.0	1	
	5562	9	93.1	18	1353.9	2	
	5564	10	82.1	13	1754.0	3	
	5565	11	86.5	10	1159.6	3	
	5563	12	56.8	14	1296.0	1	
	5566	13	71.5	8	1468.0	2	
	5563	14	93.1	14	1668.6	1	
Detection Percentage (%)							83.33

Test Mode		802.11ax HE40				
Frequency		5550 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	0
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	1	838	63	1193	1
2	5530	1	518	102	1931	1
3	5530	1	3066	18	326	1
4	5530	1	658	81	1520	1
5	5530	1	838	63	1193	1
6	5530	1	858	62	1166	1
7	5530	1	918	58	1089	1
8	5530	1	938	57	1066	1
9	5530	1	518	102	1931	1
10	5530	1	558	95	1792	1
11	5530	1	818	65	1222	1
12	5530	1	578	92	1730	1
13	5530	1	658	81	1520	0
14	5530	1	758	70	1319	1
15	5530	1	658	81	1520	1
16	5530	1	2799	19	357	1
17	5530	1	2419	22	413	1
18	5530	1	872	61	1147	0
19	5530	1	1344	40	744	1
20	5530	1	1037	51	964	1
21	5530	1	1414	38	707	1
22	5530	1	842	63	1188	1
23	5530	1	587	90	1704	1
24	5530	1	2781	19	360	1
25	5530	1	2656	20	377	1
26	5530	1	2164	25	462	1
27	5530	1	1088	49	919	1
28	5530	1	2381	23	420	1
29	5530	1	3025	18	331	1
30	5530	1	1703	31	587	1
Detection Percentage (%)						93.33

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 2					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	3.30	205.80	23	4859	1
2	5530	4.60	177.30	29	5640	1
3	5530	1.40	228.50	27	4376	1
4	5530	1.00	193.30	28	5173	1
5	5530	1.40	154.10	24	6489	1
6	5530	2.80	150.80	25	6631	1
7	5530	2.70	211.40	23	4730	1
8	5530	2.00	167.40	23	5974	1
9	5530	4.80	190.60	26	5247	1
10	5530	2.10	167.30	29	5977	1
11	5530	4.30	201.30	29	4968	1
12	5530	4.00	222.20	23	4500	1
13	5530	4.80	195.20	28	5123	1
14	5530	4.50	183.50	26	5450	1
15	5530	4.50	186.10	25	5373	1
16	5530	1.50	190.60	26	5247	1
17	5530	4.60	191.40	25	5225	1
18	5530	3.80	220.00	28	4545	1
19	5530	2.30	179.20	28	5580	1
20	5530	2.90	192.30	28	5200	1
21	5530	5.00	197.40	28	5066	1
22	5530	4.90	172.90	29	5784	1
23	5530	1.50	214.50	23	4662	1
24	5530	1.90	196.00	24	5102	1
25	5530	1.90	192.80	27	5187	1
26	5530	2.20	185.20	23	5400	1
27	5530	2.30	194.90	29	5131	1
28	5530	1.00	202.00	26	4950	0
29	5530	2.70	156.10	23	6406	1
30	5530	1.50	151.30	23	6609	1
Detection Percentage (%)						96.67

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 3					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	9.40	238.80	16	4187.60	0
2	5530	7.00	279.90	16	3572.70	1
3	5530	9.70	484.50	18	2063.98	1
4	5530	8.60	240.90	17	4151.10	1
5	5530	9.50	385.30	18	2595.38	1
6	5530	7.80	459.10	18	2178.17	1
7	5530	7.80	398.30	18	2510.67	1
8	5530	8.50	393.50	18	2541.30	1
9	5530	7.80	494.10	18	2023.88	0
10	5530	8.30	453.40	18	2205.56	1
11	5530	7.90	216.90	17	4610.42	1
12	5530	9.00	448.70	16	2228.66	1
13	5530	8.40	326.80	17	3059.98	1
14	5530	7.50	413.30	17	2419.55	1
15	5530	7.90	324.10	16	3085.47	1
16	5530	7.20	458.10	17	2182.93	0
17	5530	7.80	229.70	17	4353.50	1
18	5530	8.10	219.70	17	4551.66	1
19	5530	9.30	316.60	17	3158.56	1
20	5530	6.50	481.90	16	2075.12	1
21	5530	7.50	341.20	18	2930.83	1
22	5530	9.10	261.30	18	3827.02	1
23	5530	8.40	462.00	16	2164.50	1
24	5530	9.50	279.00	18	3584.23	1
25	5530	6.20	309.40	16	3232.06	1
26	5530	8.10	474.40	18	2107.93	1
27	5530	8.20	263.90	18	3789.31	1
28	5530	8.10	451.20	16	2216.31	1
29	5530	7.30	449.90	18	2222.72	1
30	5530	6.20	300.30	18	3330.00	1
Detection Percentage (%)						90.00

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 4					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	16.40	465.80	13	2147	0
2	5530	15.60	206.90	13	4833	1
3	5530	19.80	495.10	15	2020	1
4	5530	16.20	397.30	13	2517	1
5	5530	19.10	345.60	14	2894	1
6	5530	12.30	284.00	14	3521	1
7	5530	12.80	374.60	16	2670	1
8	5530	16.20	206.30	12	4847	1
9	5530	17.80	497.60	13	2010	1
10	5530	13.90	255.40	14	3915	1
11	5530	16.90	344.80	14	2900	1
12	5530	14.20	335.40	13	2982	1
13	5530	11.60	374.60	12	2670	1
14	5530	19.50	229.80	16	4352	1
15	5530	18.90	215.70	12	4636	1
16	5530	17.20	204.70	12	4885	1
17	5530	12.50	459.60	13	2176	1
18	5530	19.30	235.30	16	4250	0
19	5530	16.50	217.60	14	4596	1
20	5530	16.40	425.60	16	2350	1
21	5530	19.20	250.10	15	3998	1
22	5530	15.50	253.40	15	3946	1
23	5530	19.30	433.20	15	2308	1
24	5530	13.50	422.90	15	2365	1
25	5530	18.30	458.30	15	2182	1
26	5530	11.00	263.30	15	3798	1
27	5530	15.70	444.40	14	2250	1
28	5530	11.80	493.60	16	2026	1
29	5530	14.40	499.80	14	2001	1
30	5530	15.50	399.10	15	2506	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5494.5	1	59.2	7	1780.3	1	1
	5494.5	2	97.6	8	1211.6	2	
	5497.5	3	82.7	14	1605.9	1	
	5495.5	4	50.6	11	1181.3	1	
	5497.5	5	51.3	16	1078.4	1	
	5494.5	6	62.4	8	1737.5	2	
	5493.5	7	95.1	6	1474.8	3	
	5493.5	8	95.2	6	1671.0	3	
	5495.5	9	53.3	9	1316.6	2	
	5495.5	10	57.9	11	1138.0	1	
	5495.5	11	58.7	9	1579.6	3	
2	5497.5	1	82.7	15	1403.4	1	1
	5497.5	2	74.6	14	1206.3	3	
	5498.5	3	62.4	18	1019.5	2	
	5498.5	4	94.9	17	1620.6	1	
	5495.5	5	64.4	9	1040.3	3	
	5498.5	6	61.3	17	1932.2	3	
	5495.5	7	88.9	9	1171.6	3	
	5494.5	8	84.9	7	1209.6	2	
	5498.5	9	71.5	17	1122.6	2	
	5494.5	10	89.0	8	1629.8	1	
	5498.5	11	85.7	18	1212.7	2	
	5499.5	12	68.4	19	1542.3	1	
3	5498.5	1	58.5	18	1601.0	2	1
	5499.5	2	87.3	20	1410.0	1	
	5493.5	3	97.3	6	1247.7	1	
	5498.5	4	74.4	18	1492.6	2	
	5497.5	5	77.0	15	1668.3	2	
	5497.5	6	65.3	16	1506.8	3	
	5498.5	7	69.0	18	1524.9	2	
	5497.5	8	57.0	15	1428.0	1	
	5496.5	9	92.1	13	1725.2	2	
	5493.5	10	75.1	6	1789.8	2	
	5493.5	11	67.4	6	1564.4	2	
	5493.5	12	79.6	5	1304.7	2	
	5499.5	13	58.0	19	1021.8	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5495.5	1	80.7	11	1136.3	2	1
	5497.5	2	53.0	15	1828.0	2	
	5494.5	3	76.0	8	1689.4	3	
	5499.5	4	69.0	19	1563.3	3	
	5494.5	5	87.7	8	1572.1	3	
	5496.5	6	51.1	13	1244.5	3	
	5498.5	7	84.5	18	1624.6	1	
	5497.5	8	94.9	15	1870.9	3	
	5498.5	9	97.2	18	1449.9	1	
5	5495.5	1	73.3	9	1135.1	3	1
	5497.5	2	58.3	14	1167.4	1	
	5495.5	3	87.9	11	1711.1	1	
	5493.5	4	91.8	5	1938.5	1	
	5497.5	5	61.0	16	1651.7	2	
	5495.5	6	50.1	11	1181.3	3	
	5498.5	7	69.4	17	1775.3	2	
	5494.5	8	88.8	7	1707.6	1	
	5498.5	9	73.2	18	1618.4	2	
	5497.5	10	61.0	15	1869.1	1	
	5496.5	11	58.5	12	1904.3	1	
	5498.5	12	76.5	18	1683.5	2	
	5495.5	13	67.9	9	1901.5	1	
	5495.5	14	67.1	10	1233.1	3	
	5499.5	15	77.1	20	1916.3	3	
6	5493.5	1	70.7	6	1070.0	2	1
	5495.5	2	54.1	11	1952.8	2	
	5497.5	3	76.9	14	1198.2	1	
	5496.5	4	98.0	12	1130.9	1	
	5495.5	5	69.2	11	1287.5	3	
	5498.5	6	71.7	18	1798.6	3	
	5498.5	7	51.5	17	1707.5	1	
	5496.5	8	50.9	12	1210.5	1	
	5498.5	9	84.7	17	1816.5	3	
	5496.5	10	88.8	13	1985.6	1	
	5495.5	11	89.5	10	1395.3	2	
	5495.5	12	81.5	11	1513.5	2	
	5497.5	13	53.2	15	1370.8	2	
	5497.5	14	51.5	14	1789.7	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5498.5	1	51.8	18	1044.7	2	1
	5493.5	2	81.9	5	1205.2	3	
	5493.5	3	66.8	5	1176.5	2	
	5495.5	4	77.9	10	1671.5	1	
	5499.5	5	53.6	19	1832.2	1	
	5497.5	6	85.9	14	1915.2	1	
	5498.5	7	76.5	18	1644.5	1	
	5497.5	8	76.8	15	1181.7	3	
	5496.5	9	81.8	13	1997.8	2	
	5495.5	10	98.4	9	1850.6	1	
	5496.5	11	62.0	12	1593.0	3	
	5495.5	12	81.9	9	1169.9	3	
	5497.5	13	97.2	14	1749.0	1	
	5497.5	14	99.6	15	1252.1	1	
	5497.5	15	52.7	16	1685.0	1	
	5493.5	16	67.3	6	1461.2	3	
	5495.5	17	97.7	11	1858.1	3	
8	5496.5	1	83.2	13	1917.1	1	1
	5493.5	2	60.0	5	1200.0	2	
	5493.5	3	70.1	6	1120.5	3	
	5493.5	4	60.5	6	1661.4	1	
	5494.5	5	95.9	8	1380.7	3	
	5497.5	6	68.5	14	1495.8	1	
	5495.5	7	91.2	9	1820.6	1	
	5495.5	8	65.1	9	1573.9	1	
	5494.5	9	58.5	8	1391.3	3	
	5495.5	10	94.0	9	1375.3	2	
	5494.5	11	59.9	8	1015.1	2	
	5496.5	12	82.9	13	1729.0	1	
	5497.5	13	65.2	15	1624.1	1	
	5499.5	14	99.5	19	1760.3	1	
	5494.5	15	86.9	7	1022.8	1	
	5496.5	16	67.8	12	1412.7	2	
	5493.5	17	86.0	6	1015.1	3	
	5496.5	18	70.1	13	1604.8	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5498.5	1	91.5	18	1583.5	3	1
	5494.5	2	94.1	7	1746.0	2	
	5495.5	3	74.9	9	1838.2	2	
	5495.5	4	73.6	10	1632.9	2	
	5494.5	5	89.0	7	1231.2	3	
	5499.5	6	53.3	19	1422.1	1	
	5495.5	7	71.7	10	1123.9	1	
	5498.5	8	68.5	17	1075.0	1	
	5495.5	9	55.8	9	1573.3	2	
	5498.5	10	63.3	18	1630.3	2	
	5495.5	11	66.1	9	1363.2	2	
	5496.5	12	78.2	12	1315.0	1	
	5494.5	13	96.4	8	1461.6	1	
	5498.5	14	80.9	17	1261.1	3	
	5497.5	15	76.1	16	1573.0	3	
	5493.5	16	84.1	6	1396.1	1	
	5497.5	17	87.2	14	1362.4	3	
	5494.5	18	53.5	7	1127.9	2	
	5499.5	19	71.0	19	1664.8	3	
10	5495.5	1	50.7	9	1918.0	2	1
	5495.5	2	67.4	9	1118.7	1	
	5497.5	3	58.6	15	1883.8	3	
	5493.5	4	56.4	6	1789.0	1	
	5494.5	5	67.9	8	1378.6	2	
	5496.5	6	99.0	13	1247.7	1	
	5497.5	7	85.5	15	1230.3	2	
	5497.5	8	52.5	16	1601.1	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5530	1	81.6	5	1598.3	2	1
	5530	2	75.1	7	1973.7	1	
	5530	3	61.7	14	1537.9	3	
	5530	4	94.7	8	1872.3	3	
	5530	5	84.5	9	1677.5	2	
	5530	6	96.1	19	1293.1	2	
	5530	7	64.4	14	1326.7	3	
	5530	8	68.0	9	1404.5	1	
	5530	9	81.7	17	1041.3	1	
	5530	10	63.2	10	1416.7	3	
	5530	11	87.5	12	1234.2	3	
	5530	12	55.4	10	1762.2	3	
	5530	13	80.9	16	1242.3	2	
	5530	14	91.9	19	1362.2	1	
	5530	15	79.3	17	1896.4	3	
	5530	16	78.5	17	1918.2	2	
12	5530	1	75.2	9	1547.0	1	1
	5530	2	92.0	19	1259.7	2	
	5530	3	70.1	8	1788.1	2	
	5530	4	76.9	13	1608.2	3	
	5530	5	52.4	8	1484.3	3	
	5530	6	76.3	16	1045.4	2	
	5530	7	88.9	10	1861.7	2	
	5530	8	98.0	7	1331.5	1	
	5530	9	61.4	18	1560.1	3	
	5530	10	75.2	6	1993.6	1	
	5530	11	89.2	13	1018.6	3	
	5530	12	90.2	5	1014.7	1	
	5530	13	81.3	18	1526.0	1	
	5530	14	85.8	5	1375.8	1	
	5530	15	91.6	18	1829.0	1	
	5530	16	63.3	7	1752.4	3	
	5530	17	95.0	17	1411.6	3	
	5530	18	60.3	10	1157.1	3	
	5530	19	85.5	5	1574.2	1	
	5530	20	81.7	12	1124.4	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5530	1	75.4	12	1085.8	1	1
	5530	2	79.0	15	1666.3	3	
	5530	3	79.3	16	1688.5	2	
	5530	4	57.9	10	1266.7	3	
	5530	5	52.5	19	1634.3	1	
	5530	6	81.0	19	1735.8	2	
	5530	7	77.9	18	1903.4	1	
	5530	8	70.7	20	1557.0	3	
	5530	9	79.3	20	1527.3	2	
	5530	10	68.0	15	1015.8	2	
14	5530	1	70.5	14	1599.1	2	1
	5530	2	71.5	6	1770.5	3	
	5530	3	81.7	9	1773.0	2	
	5530	4	79.7	17	1205.9	3	
	5530	5	91.0	19	1380.9	3	
	5530	6	58.6	18	1567.2	3	
	5530	7	95.3	10	1312.2	2	
	5530	8	66.5	7	1479.4	1	
	5530	9	74.1	5	1582.9	2	
	5530	10	68.1	10	1200.6	3	
	5530	11	57.1	12	1270.2	1	
	5530	12	71.7	8	1186.5	3	
	5530	13	87.7	8	1338.4	1	
	5530	14	63.0	18	1801.8	3	
	5530	15	70.4	5	1739.1	1	
	5530	16	99.9	19	1819.8	1	
	5530	17	74.2	16	1153.2	2	
	5530	18	81.3	13	1387.8	2	
	5530	19	60.8	12	1643.9	1	
	5530	20	91.3	10	1068.8	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5530	1	55.1	11	1544.6	2	1
	5530	2	86.4	19	1195.8	1	
	5530	3	51.3	15	1583.6	2	
	5530	4	63.1	13	1389.0	1	
	5530	5	54.2	6	1345.7	3	
	5530	6	84.5	5	1293.5	3	
	5530	7	53.5	7	1299.8	3	
	5530	8	89.8	11	1994.6	3	
	5530	9	54.1	16	1328.7	1	
	5530	10	65.5	16	1437.2	1	
	5530	11	87.8	10	1167.6	1	
	5530	12	81.1	18	1354.0	3	
	5530	13	82.7	19	1596.1	2	
	5530	14	75.3	15	1941.0	1	
	5530	15	96.7	6	1952.6	1	
	5530	16	85.7	14	1360.9	3	
	5530	17	81.2	20	1208.5	2	
	5530	18	91.3	19	1384.9	2	
	5530	19	68.4	8	1957.7	2	
16	5530	1	88.5	12	1763.3	1	1
	5530	2	51.4	20	1717.7	2	
	5530	3	57.4	11	1840.5	2	
	5530	4	74.2	13	1731.6	1	
	5530	5	78.4	5	1683.1	2	
	5530	6	57.0	16	1682.8	1	
	5530	7	73.3	7	1345.0	2	
	5530	8	89.1	19	1520.1	3	
	5530	9	94.9	5	1919.2	2	
	5530	10	64.4	15	1935.7	2	
	5530	11	71.4	8	1480.4	2	
	5530	12	57.7	19	1174.4	1	
	5530	13	81.7	18	1224.5	2	
	5530	14	93.1	12	1020.4	3	
	5530	15	65.5	12	1984.9	2	
	5530	16	67.6	16	1196.6	3	
	5530	17	87.8	16	1397.9	1	
	5530	18	95.7	16	1883.3	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5530	1	96.7	8	1818.3	2	1
	5530	2	80.1	16	1868.8	1	
	5530	3	95.9	12	1828.7	2	
	5530	4	83.3	13	1535.9	3	
	5530	5	98.2	15	1159.2	1	
	5530	6	82.2	8	1195.7	3	
	5530	7	58.2	17	1766.7	2	
	5530	8	81.9	6	1525.4	3	
	5530	9	83.6	8	1019.6	3	
	5530	10	69.6	17	1860.0	3	
	5530	11	83.4	13	1820.1	3	
	5530	12	78.8	8	1537.3	3	
	5530	13	72.4	7	1680.1	1	
	5530	14	72.4	8	1596.6	1	
	5530	15	91.0	10	1210.1	1	
	5530	16	51.3	15	1711.8	1	
	5530	17	82.9	6	1926.9	1	
18	5530	1	70.8	14	1279.1	2	1
	5530	2	82.4	6	1186.5	2	
	5530	3	92.7	19	1978.4	1	
	5530	4	74.7	6	1255.9	2	
	5530	5	50.4	6	1190.9	3	
	5530	6	95.3	11	1913.0	2	
	5530	7	98.6	6	1079.4	3	
	5530	8	50.0	19	1356.8	1	
	5530	9	83.3	11	1667.7	2	
	5530	10	63.4	13	1030.9	3	
	5530	11	64.3	5	1507.9	2	
	5530	12	75.1	6	1962.2	2	
	5530	13	84.7	5	1154.6	3	
	5530	14	85.2	18	1907.1	3	
	5530	15	64.9	19	1083.0	1	
	5530	1	96.7	8	1818.3	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5530	1	81.5	17	1376.2	3	1
	5530	2	51.0	10	1980.7	1	
	5530	3	87.6	11	1600.2	2	
	5530	4	73.1	15	1044.8	1	
	5530	5	55.0	15	1254.2	3	
	5530	6	71.7	17	1260.0	3	
	5530	7	53.0	14	1284.5	1	
	5530	8	72.0	14	1603.8	1	
	5530	9	64.0	20	1803.2	3	
	5530	10	84.6	12	1161.1	3	
	5530	11	55.1	15	1417.3	1	
	5530	12	90.8	16	1370.6	1	
	5530	13	83.6	18	1864.1	2	
	5530	14	92.8	16	1274.7	1	
20	5530	1	99.0	6	1367.9	3	1
	5530	2	65.9	12	1116.2	3	
	5530	3	85.2	14	1845.4	1	
	5530	4	59.6	20	1627.2	3	
	5530	5	93.2	20	1477.3	1	
	5530	6	68.4	12	1606.9	1	
	5530	7	98.2	9	1463.7	1	
	5530	8	72.6	18	1055.7	1	
	5530	9	52.7	9	1304.7	2	
	5530	10	82.6	15	1593.6	2	
21	5565.5	1	56.5	7	1596.4	1	0
	5562.5	2	95.1	15	1656.4	3	
	5562.5	3	78.9	15	1098.6	1	
	5565.5	4	80.0	8	1140.4	2	
	5563.5	5	84.0	13	1259.4	2	
	5566.5	6	59.8	5	1381.9	1	
	5563.5	7	79.8	12	1381.0	1	
	5566.5	8	69.6	6	1836.4	2	
	5564.5	9	96.4	11	1827.9	3	
	5564.5	10	98.8	11	1616.8	1	
	5565.5	11	53.9	7	1257.3	3	
	5560.5	12	90.1	19	1895.5	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5563.5	1	65.1	12	1123.4	3	0
	5565.5	2	84.0	7	1763.6	2	
	5562.5	3	74.7	14	1650.3	1	
	5566.5	4	59.4	6	1610.2	1	
	5563.5	5	56.4	13	1704.3	3	
	5562.5	6	68.9	15	1759.2	3	
	5562.5	7	62.2	15	1548.0	2	
	5563.5	8	66.2	13	1390.5	3	
	5562.5	9	95.9	15	1414.4	3	
23	5561.5	1	95.8	18	1127.4	1	1
	5564.5	2	51.6	10	1024.5	3	
	5561.5	3	77.9	18	1079.3	1	
	5563.5	4	85.0	13	1605.3	3	
	5562.5	5	54.0	14	1938.0	1	
	5564.5	6	58.3	11	1225.8	1	
	5562.5	7	75.0	14	1526.5	3	
	5561.5	8	85.2	17	1466.3	2	
	5562.5	9	92.1	15	1515.4	3	
	5562.5	10	53.2	14	1113.1	1	
	5563.5	11	95.0	13	1316.5	2	
	5562.5	12	63.3	15	1927.1	1	
	5562.5	13	84.8	15	1847.8	1	
	5565.5	14	79.1	7	1401.7	2	
	5564.5	15	91.1	9	1504.2	1	
24	5560.5	1	71.1	20	1545.0	2	1
	5564.5	2	69.9	10	1581.1	2	
	5566.5	3	83.6	6	1978.1	3	
	5563.5	4	54.2	12	1366.5	2	
	5562.5	5	86.9	16	1134.4	3	
	5565.5	6	91.4	7	1258.9	1	
	5560.5	7	72.3	19	1249.1	2	
	5562.5	8	56.3	15	1431.0	3	
	5562.5	9	56.0	16	1642.9	3	
	5566.5	10	55.3	6	1284.1	1	
	5566.5	11	95.2	6	1152.5	1	
	5563.5	12	97.9	12	1711.7	1	
	5562.5	13	60.5	14	1798.6	1	
	5564.5	14	53.3	9	1841.1	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5560.5	1	99.9	20	1210.5	1	1
	5564.5	2	52.8	10	1649.4	2	
	5561.5	3	51.8	18	1462.3	1	
	5564.5	4	57.9	11	1035.4	2	
	5564.5	5	68.5	10	1481.8	1	
	5562.5	6	84.6	15	1847.8	3	
	5563.5	7	75.2	13	1320.7	1	
	5565.5	8	66.7	7	1589.3	3	
	5564.5	9	57.1	11	1040.2	3	
	5560.5	10	64.6	19	1918.9	2	
	5563.5	11	53.6	12	1310.1	2	
	5560.5	12	93.0	19	1333.7	3	
	5563.5	13	62.8	12	1587.0	1	
	5562.5	14	59.9	14	1560.2	2	
	5565.5	15	66.4	7	1901.9	2	
	5562.5	16	68.8	16	1280.3	1	
	5566.5	17	53.4	5	1606.3	3	
	5566.5	18	99.8	6	1634.7	1	
26	5560.5	1	99.3	19	1591.7	2	1
	5566.5	2	68.6	6	1940.0	3	
	5563.5	3	92.1	12	1331.1	1	
	5565.5	4	56.5	8	1985.8	2	
	5564.5	5	79.0	10	1646.4	3	
	5561.5	6	97.6	17	1467.9	2	
	5565.5	7	55.9	8	1632.5	1	
	5565.5	8	82.5	7	1923.6	2	
	5564.5	9	54.9	10	1885.8	3	
	5561.5	10	83.5	18	1305.0	2	
	5563.5	11	82.8	13	1513.5	3	
	5566.5	12	95.9	6	1994.2	3	
	5566.5	13	54.4	6	1027.3	1	
	5564.5	14	85.2	11	1670.4	2	
	5562.5	15	52.6	14	1625.9	2	
	5566.5	16	66.5	5	1307.0	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5563.5	1	66.2	12	1383.5	2	1
	5561.5	2	50.5	18	1969.8	1	
	5562.5	3	69.4	15	1775.9	3	
	5565.5	4	66.3	8	1692.5	2	
	5561.5	5	78.5	18	1105.1	1	
	5565.5	6	83.6	7	1626.3	2	
	5565.5	7	59.1	8	1923.0	3	
	5565.5	8	86.3	7	1279.4	1	
	5566.5	9	97.3	6	1982.3	3	
	5565.5	10	97.1	7	1571.7	2	
	5562.5	11	57.8	14	1541.7	1	
	5563.5	12	50.4	12	1402.8	3	
	5564.5	13	58.7	10	1011.0	1	
	5564.5	14	99.8	11	1618.7	2	
	5566.5	15	95.3	6	1644.4	2	
	5566.5	16	53.8	6	1230.3	3	
	5566.5	17	96.1	6	1235.0	2	
	5564.5	18	71.5	11	1437.8	1	
	5564.5	19	88.6	11	1329.4	3	
	5562.5	20	96.4	15	1864.8	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5565.5	1	97.6	7	1890.0	2	1
	5560.5	2	53.7	19	1652.6	1	
	5561.5	3	54.0	18	1402.0	1	
	5564.5	4	71.8	11	1989.0	1	
	5564.5	5	69.0	10	1579.3	2	
	5564.5	6	94.9	11	1040.1	1	
	5566.5	7	80.8	6	1621.1	2	
	5560.5	8	88.8	19	1327.7	1	
	5565.5	9	67.0	7	1397.7	1	
	5565.5	10	53.0	8	1023.3	1	
	5562.5	11	69.5	14	1282.1	1	
	5565.5	12	68.9	8	1730.7	3	
	5564.5	13	51.9	9	1714.3	1	
	5562.5	14	58.2	14	1508.5	3	
	5561.5	15	87.3	18	1180.9	1	
	5561.5	16	70.5	18	1884.3	1	
	5564.5	17	69.5	11	1871.1	2	
	5563.5	18	58.5	12	1935.7	1	
	5565.5	19	81.7	8	1999.6	2	
	5562.5	20	71.4	16	1600.4	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5565.5	1	99.9	7	1650.5	2	1
	5562.5	2	55.7	14	1105.7	1	
	5562.5	3	60.3	14	1333.9	1	
	5565.5	4	82.1	8	1115.6	3	
	5562.5	5	97.4	15	1358.0	2	
	5566.5	6	65.5	6	1908.0	1	
	5564.5	7	92.6	11	1425.6	2	
	5566.5	8	74.9	5	1525.4	3	
	5561.5	9	88.9	17	1110.7	3	
	5562.5	10	83.5	16	1788.6	1	
	5566.5	11	70.9	5	1304.9	2	
	5565.5	12	97.7	8	1035.1	3	
	5564.5	13	87.6	9	1676.6	3	
	5566.5	14	51.6	6	1333.2	3	
	5561.5	15	76.3	17	1789.2	2	
	5565.5	16	69.2	7	1785.3	1	
	5562.5	17	57.7	14	1764.0	1	
30	5564.5	1	73.2	10	1740.6	2	1
	5561.5	2	64.4	17	1752.7	3	
	5560.5	3	60.3	19	1646.8	1	
	5564.5	4	83.8	10	1781.9	1	
	5562.5	5	67.6	14	1765.7	1	
	5565.5	6	68.4	8	1067.6	1	
	5560.5	7	51.8	19	1298.6	1	
	5564.5	8	78.7	10	1942.9	1	
	5562.5	9	57.5	16	1670.3	2	
	5565.5	10	71.7	7	1145.0	2	
	5566.5	11	72.5	5	1323.1	1	
	5561.5	12	70.4	17	1877.5	2	
	5561.5	13	80.4	18	1693.3	2	
	5565.5	14	97.5	7	1426.1	3	
Detection Percentage (%)							93.33

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	0
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						96.67

---END---