



FCC TEST REPORT

Test report
On Behalf of
Bowe Technology Co., Ltd
For
10G ONT
Model No.: WAG-0F2W
FCC ID: 2AVWB-WAG-0F2W

Prepared For : Bowe Technology Co., Ltd
2F, Building No. 6C, 1658, Gumei Rd., Xuhui District, Shanghai, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: May. 10, 2021 ~May. 20, 2021
Date of Report: May. 20, 2021
Report Number: HK2105101406-3E

**TEST RESULT CERTIFICATION****Applicant's name** : Bowei Technology Co., Ltd

Address..... : 2F, Building No. 6C, 1658, Gumei Rd., Xuhui District, Shanghai, China

Manufacturer's Name : TDG Technology Co., Ltd

Address..... : No.1 Yatai Road, Jiaxing City, Zhejiang Province, P.R.C.

Product description

Trade Mark:

AZORES

Product name..... : 10G ONT

Model and/or type reference : WAG-0F2W

Standards..... : FCC Rules and Regulations Part 15 Subpart E Section 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of performance of tests..... : May. 10, 2021 ~May. 20, 2021

Date of Issue : May. 20, 2021

Test Result..... : **Pass**

Testing Engineer : _____

(Gary Qian)

Technical Manager : _____

Authorized Signatory : _____

(Jason Zhou)



TABLE OF CONTENTS

1. TEST RESULT SUMMARY	5
1.1. TEST PROCEDURES AND RESULTS.....	5
1.2. TEST FACILITY	5
1.3. MEASUREMENT UNCERTAINTY	6
2. EUT DESCRIPTION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. OPERATION FREQUENCY EACH OF CHANNEL	8
2.3. OPERATION OF EUT DURING TESTING.....	8
2.4. DESCRIPTION OF TEST SETUP	9
3. GENERA INFORMATION	10
3.1. TEST ENVIRONMENT AND MODE	10
3.2. DESCRIPTION OF SUPPORT UNITS	11
4. TEST RESULTS AND MEASUREMENT DATA	12
4.1. CONDUCTED EMISSION	12
4.2. MAXIMUM CONDUCTED OUTPUT POWER.....	16
4.3. 6DB EMISSION BANDWIDTH.....	19
4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	38
4.5. POWER SPECTRAL DENSITY	39
4.6. BAND EDGE	59
4.7. SPURIOUS EMISSION	107
4.8. FREQUENCY STABILITY MEASUREMENT	125
5. ANTENNA REQUIREMENT	127
6. PHOTOGRAPHS OF TEST SETUP.....	128
7. PHOTOS OF THE EUT	130

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	May. 20, 2021	Jason Zhou



1. TEST RESULT SUMMARY

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a)	N/A
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(b)/15.209/15.205	PASS
Radiated Emission	§15.407(b)/15.209/15.205	PASS
Frequency Stability	§15.407(g)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1.3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.71\text{dB}$
2	RF power, conducted	$\pm 0.37\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.90\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT DESCRIPTION

2.1. GENERAL DESCRIPTION OF EUT

Equipment:	10G ONT
Model Name:	WAG-0F2W
Serial No.:	N/A
Trade Mark:	AZORES
Model Difference:	N/A
FCC ID:	2AVWB-WAG-0F2W
Operation Frequency:	IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type:	CCK/OFDM/DBPSK/DAPSK
Antenna Type:	Internal Antenna
Antenna Gain:	Antenna 1:3dBi Antenna 2:3dBi Antenna 3:3dBi MIMO: 7.77dBi
Power Source:	12V, 2A From Adapter with AC100-240V, 50/60Hz, 1A
Power Supply:	12V, 2A From Adapter with AC100-240V, 50/60Hz, 1A
Note: The EUT incorporates a MIMO function. Physically, it provides three completed transmitters and receivers(3T3R), three transmit signals are completely correlated, the Direction gain=GANT+Array Gain(Array Gain=10 log(3) dB for power spectral density; Array Gain=0 for power measurement).	



2.2. OPERATION FREQUENCY EACH OF CHANNEL

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745	151	5755	155	5775
153	5765	159	5790		
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. OPERATION OF EUT DURING TESTING

Band IV (5725 - 5850 MHz)		
For 802.11a/n (HT20)/ac(HT20)		
Channel Number	Channel	Frequency (MHz)
149	Low	5745
157	Mid	5785
165	High	5825


For 802.11n (HT40)/ ac(HT40)		
Channel Number	Channel	Frequency (MHz)
151	Low	5755
159	High	5795

For 802.11ac(HT80)		
Channel Number	Channel	Frequency (MHz)
155	/	5775




2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted and radiation below 1GHz testing:

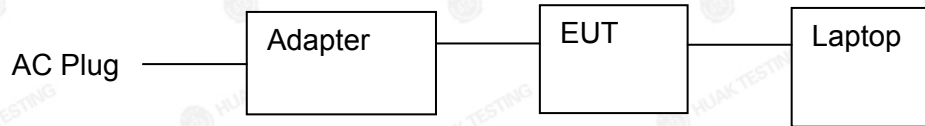

Operation of EUT during radiation above 1GHz testing:



Adapter information

Model: RD1202000-C55-154MG

Input: 100-240V, 50-60Hz, 1A

Output: 12V, 2A

Laptop information

Model: hp Elite Book 840

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



3. GENERAL INFORMATION

3.1. TEST ENVIRONMENT AND MODE

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	MCS0
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation



3.2. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. TEST RESULTS AND MEASUREMENT DATA

4.1. CONDUCTED EMISSION

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 80cm E.U.T. AC power Test table/Insulation plane LISN Filter AC power EMI Receiver Remark: E.U.T.: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Tx Mode														
Test Procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Jun. 18, 2020	Jun. 17, 2021
LISN	R&S	ENV216	HKE-002	Jun. 18, 2020	Jun. 17, 2021
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Jun. 18, 2020	Jun. 17, 2021
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

All the test modes completed for test. only the worst result was reported as below:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

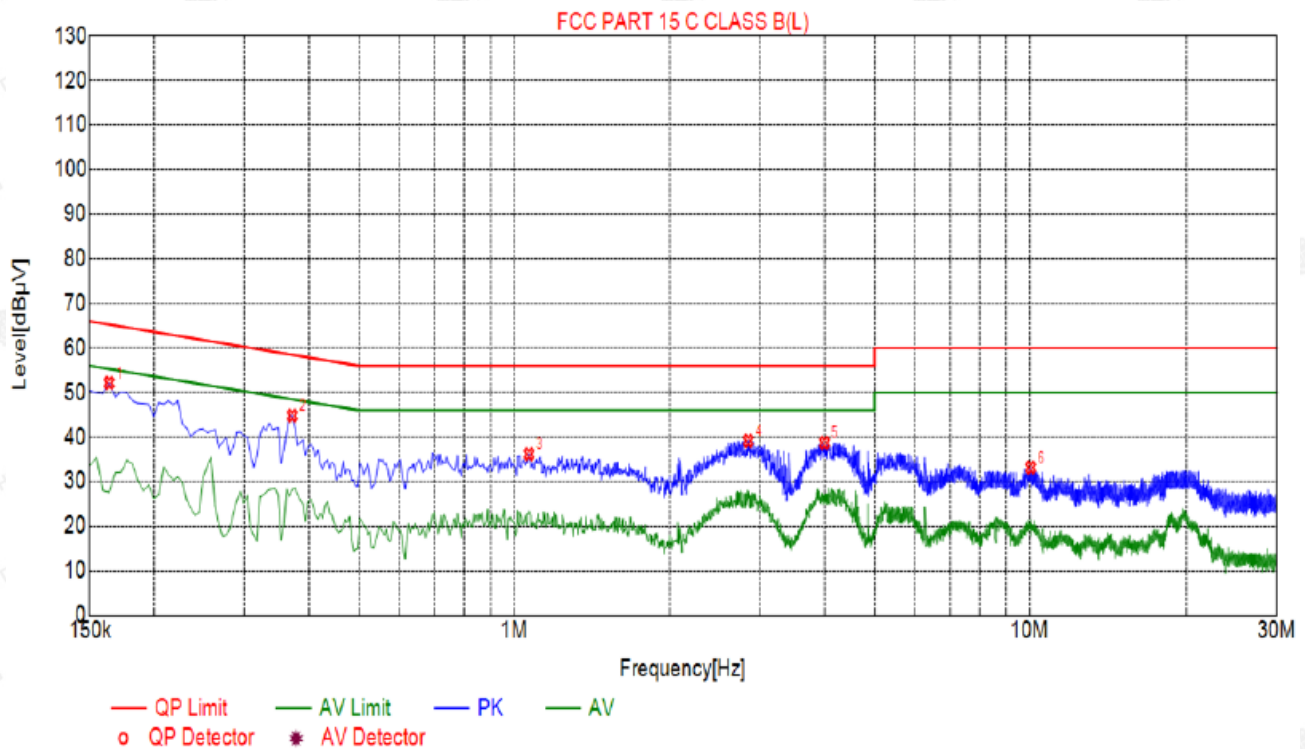

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1635	52.17	19.98	65.28	13.11	32.19	PK	L
2	0.3705	44.82	20.05	58.49	13.67	24.77	PK	L
3	1.0680	36.16	20.07	56.00	19.84	16.09	PK	L
4	2.8455	39.15	20.21	56.00	16.85	18.94	PK	L
5	3.9975	38.70	20.25	56.00	17.30	18.45	PK	L
6	10.0590	33.15	20.06	60.00	26.85	13.09	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

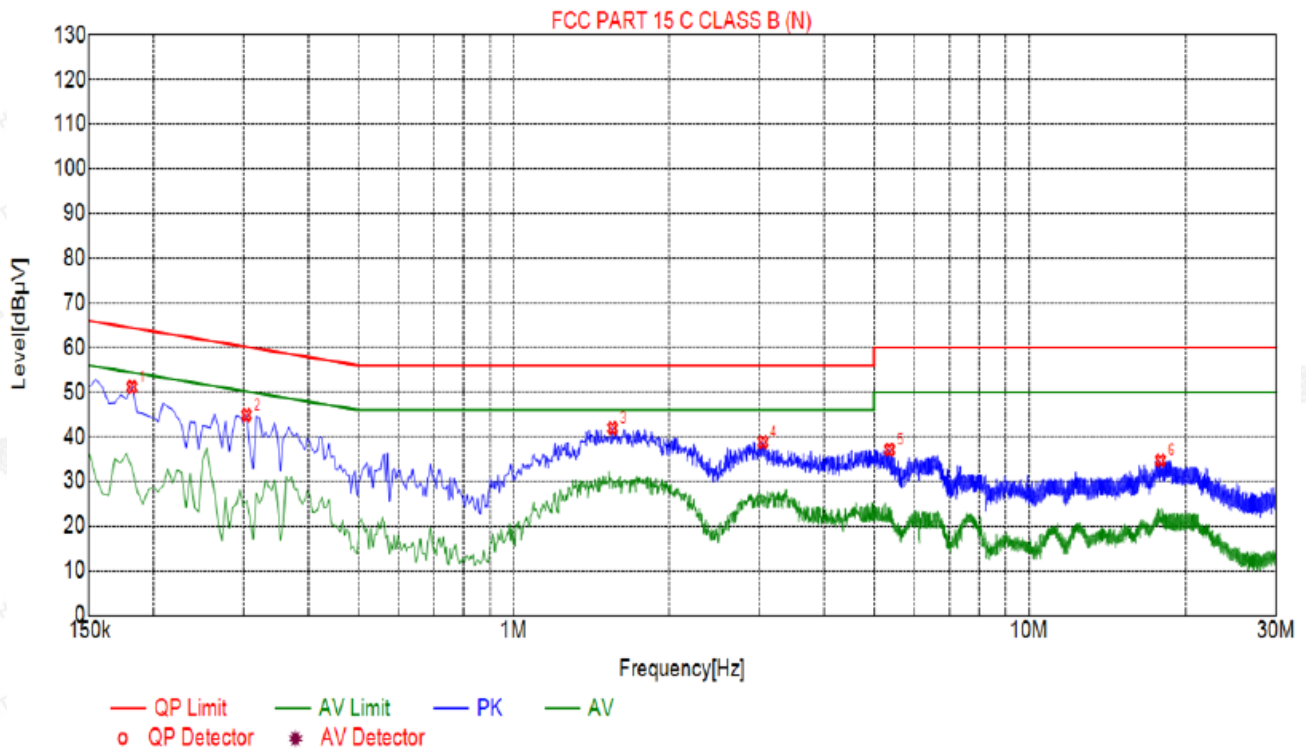

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1815	51.18	20.06	64.42	13.24	31.12	PK	N
2	0.3030	44.87	20.04	60.16	15.29	24.83	PK	N
3	1.5540	41.94	20.11	56.00	14.06	21.83	PK	N
4	3.0480	38.81	20.22	56.00	17.19	18.59	PK	N
5	5.3655	37.11	20.26	60.00	22.89	16.85	PK	N
6	17.8800	34.71	20.03	60.00	25.29	14.68	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



4.2. MAXIMUM CONDUCTED OUTPUT POWER

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)	
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E	
Limit:	Frequency Band (MHz)	Limit
	5725-5850	1 W
Test Setup:	 Power meter EUT	
Test Mode:	Transmitting mode with modulation	
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.	
Test Result:	PASS	
Remark:	Conducted output power= measurement power $+10\log(1/x)$ X is duty cycle=1, so $10\log(1/1)=0$ Conducted output power= measurement power	



4.2.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
Power meter	Agilent	E4419B	HKE-085	Jun. 18, 2020	Jun. 17, 2021
Power Sensor	Agilent	E9300A	HKE-086	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



Test Data

Configuration Band IV (5725 - 5850 MHz)							
Mode	Test channel	Maximum Conducted Output Power (dBm)				FCC Limit (dBm)	Result
		Antenna 1	Antenna 2	Antenna 3	MIMO		
11a	CH149	11.55	11.84	11.72	/	30	PASS
11a	CH157	10.71	10.02	10.40	/	30	PASS
11a	CH165	11.21	10.90	11.55	/	30	PASS
11n(HT20)	CH149	10.76	10.51	9.25	14.99	30	PASS
11n(HT20)	CH157	9.12	9.59	10.67	14.61	30	PASS
11n(HT20)	CH165	9.87	10.16	10.89	15.10	30	PASS
11n(HT40)	CH151	9.71	10.55	9.97	14.86	30	PASS
11n(HT40)	CH159	10.10	10.63	9.36	14.83	30	PASS
11ac(HT20)	CH149	10.95	10.41	10.36	15.35	30	PASS
11ac(HT20)	CH157	9.29	9.85	8.63	14.06	30	PASS
11ac(HT20)	CH165	10.79	9.48	9.84	14.84	30	PASS
11ac(HT40)	CH151	9.56	10.26	10.16	14.78	30	PASS
11ac(HT40)	CH159	9.36	9.55	9.36	14.20	30	PASS
11ac(HT80)	CH155	10.35	9.71	10.40	14.94	30	PASS
Note: This product supports antenna 1, antenna 2 and antenna 3 launch, but only support 802.11 n/ac for MIMO mode, not support 802.11 a for MIMO mode.							



4.3. 6DB EMISSION BANDWIDTH

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**4.3.3. Test data****ANT 1**

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.14	0.5	PASS
11a	CH157	5785	16.15	0.5	PASS
11a	CH165	5825	16.14	0.5	PASS
11n(HT20)	CH149	5745	17.59	0.5	PASS
11n(HT20)	CH157	5785	17.20	0.5	PASS
11n(HT20)	CH165	5825	17.55	0.5	PASS
11n(HT40)	CH151	5755	36.38	0.5	PASS
11n(HT40)	CH159	5795	36.41	0.5	PASS
11ac(HT20)	CH149	5745	17.54	0.5	PASS
11ac(HT20)	CH157	5785	17.32	0.5	PASS
11ac(HT20)	CH165	5825	17.07	0.5	PASS
11ac(HT40)	CH151	5755	35.88	0.5	PASS
11ac(HT40)	CH159	5795	36.35	0.5	PASS
11ac(HT80)	CH155	5775	75.78	0.5	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)


802.11a



Low

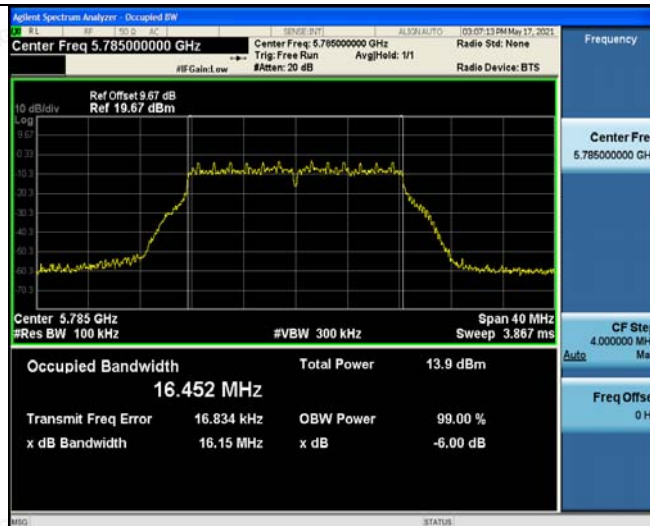

Mid

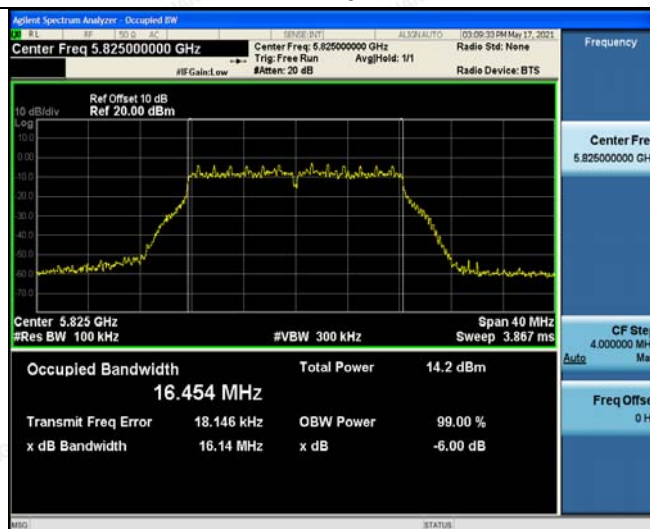

High




802.11n(HT20)



Low



Mid

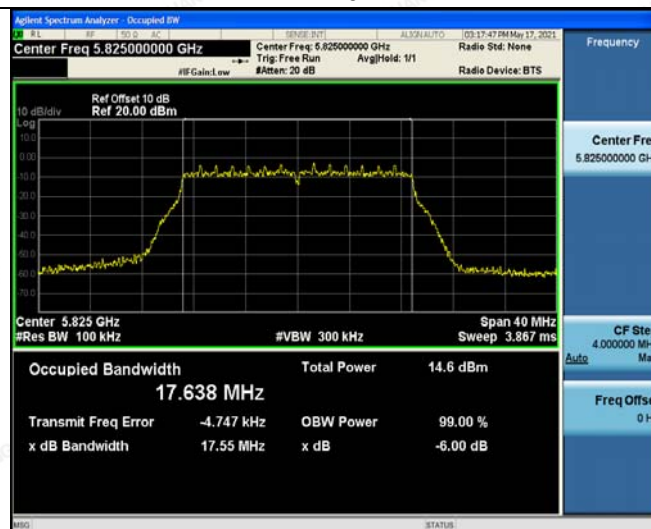


High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT40)

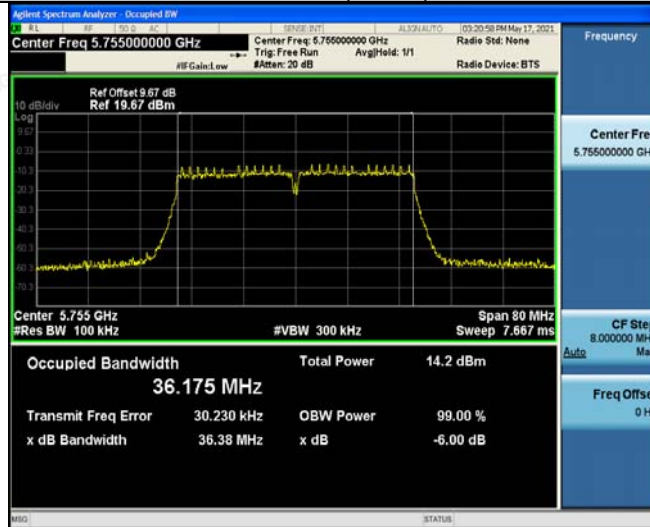


Low

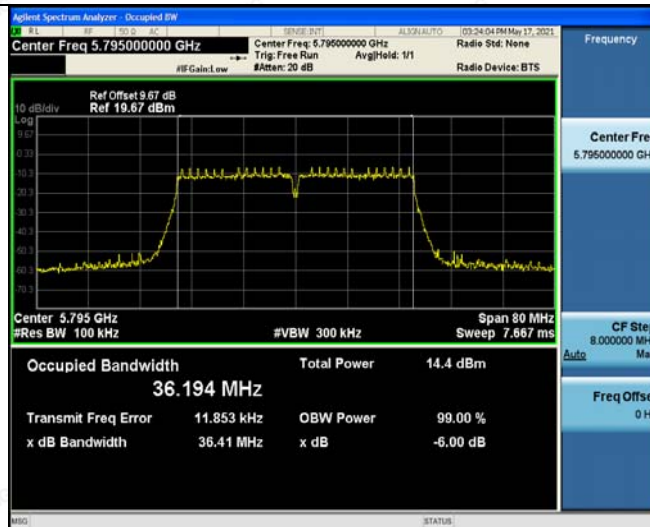

High

802.11ac(HT20)

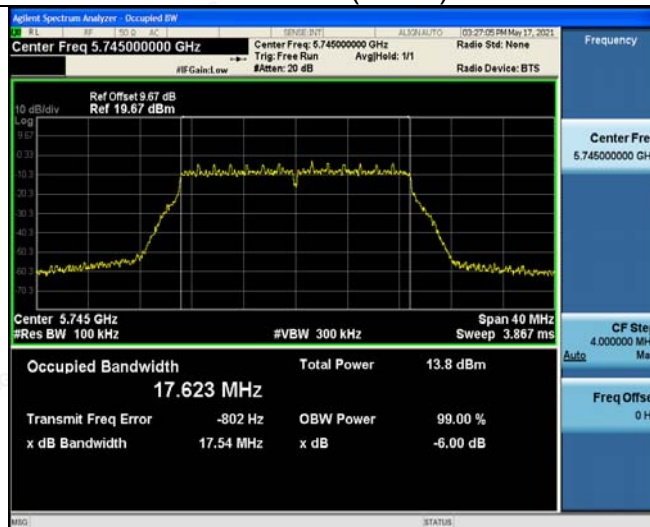

Low


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




Mid



High

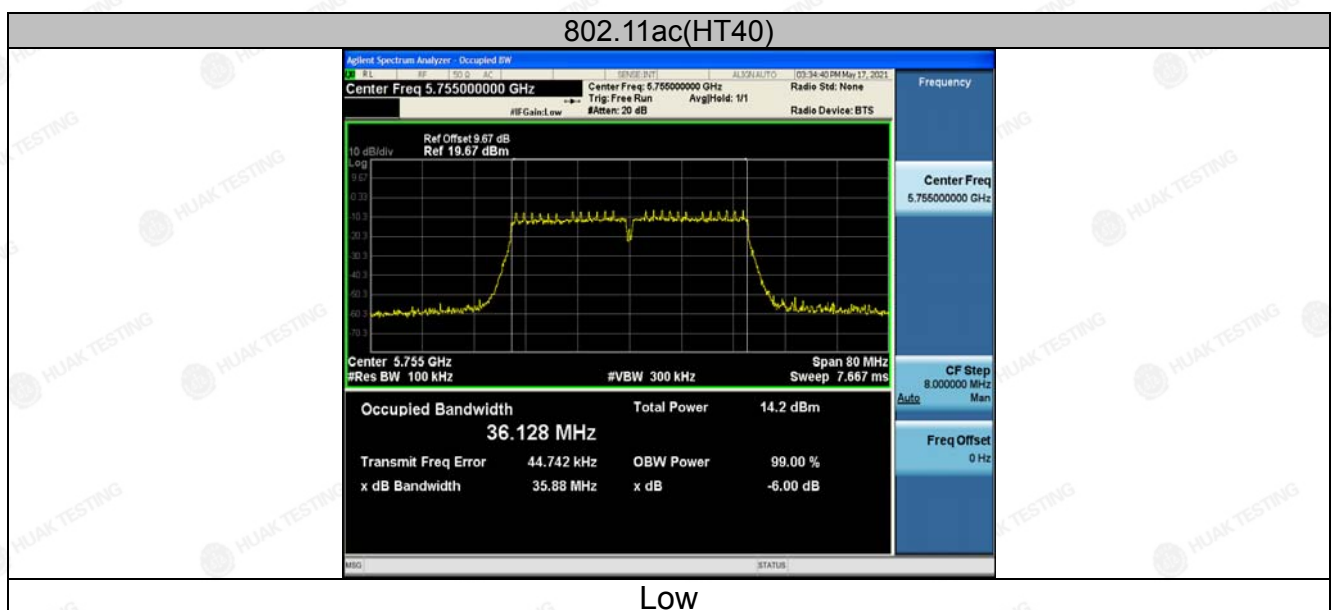

Low

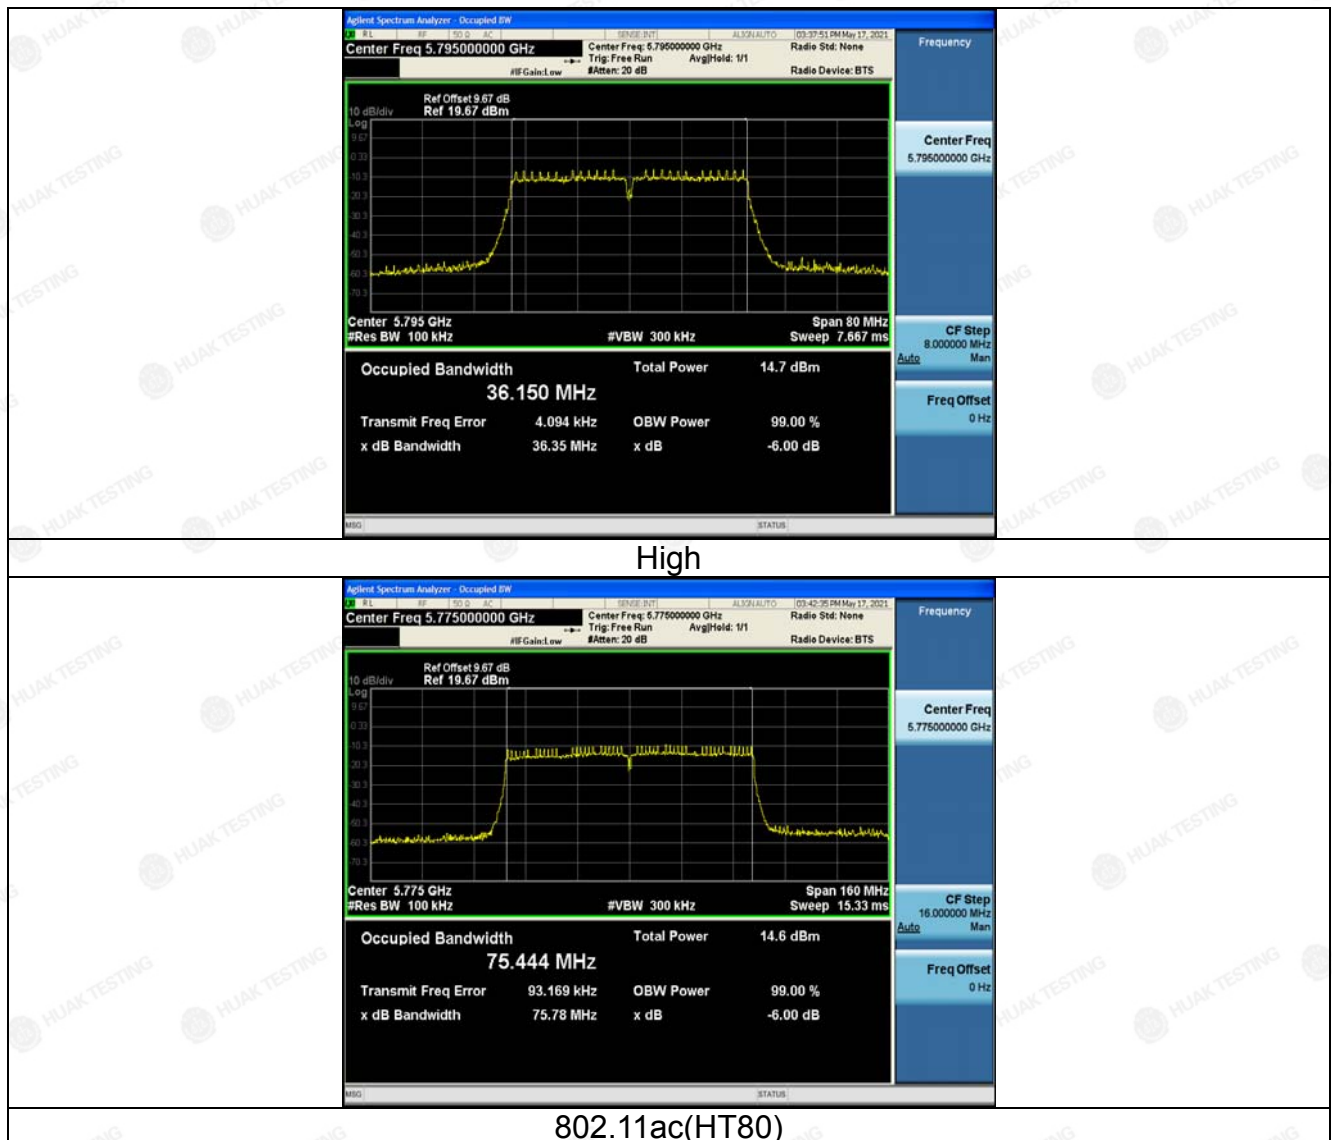

**ANT 2**

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.14	0.5	PASS
11a	CH157	5785	16.36	0.5	PASS
11a	CH161	5825	16.30	0.5	PASS
11n(HT20)	CH149	5745	17.55	0.5	PASS
11n(HT20)	CH157	5785	17.56	0.5	PASS
11n(HT20)	CH161	5825	17.56	0.5	PASS
11n(HT40)	CH151	5755	36.37	0.5	PASS
11n(HT40)	CH159	5795	36.37	0.5	PASS
11ac(HT20)	CH149	5745	17.33	0.5	PASS
11ac(HT20)	CH157	5785	17.60	0.5	PASS
11ac(HT20)	CH165	5825	17.57	0.5	PASS
11ac(HT40)	CH151	5755	36.37	0.5	PASS
11ac(HT40)	CH159	5795	36.40	0.5	PASS
11ac(HT80)	CH155	5755	75.87	0.5	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)


802.11a



Low

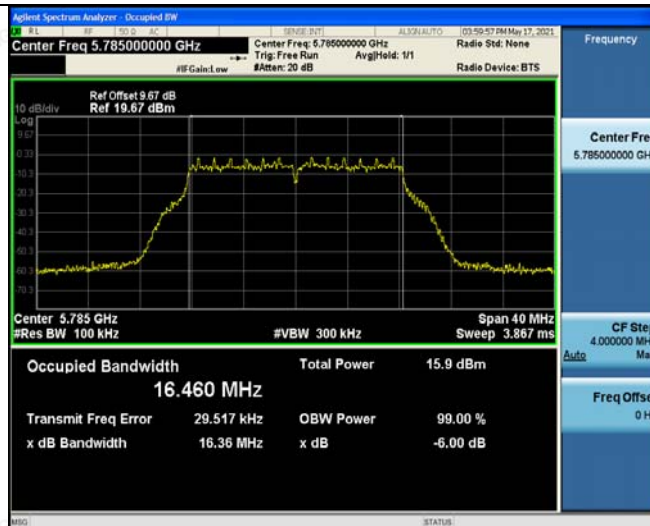

Mid

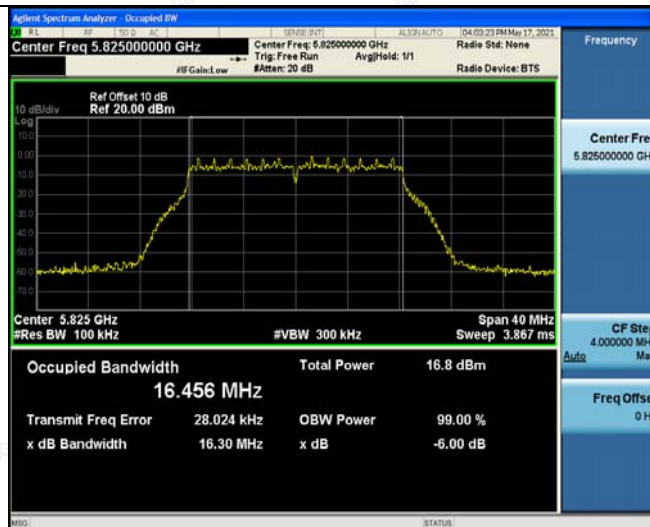

High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11n(HT20)



Low




Mid

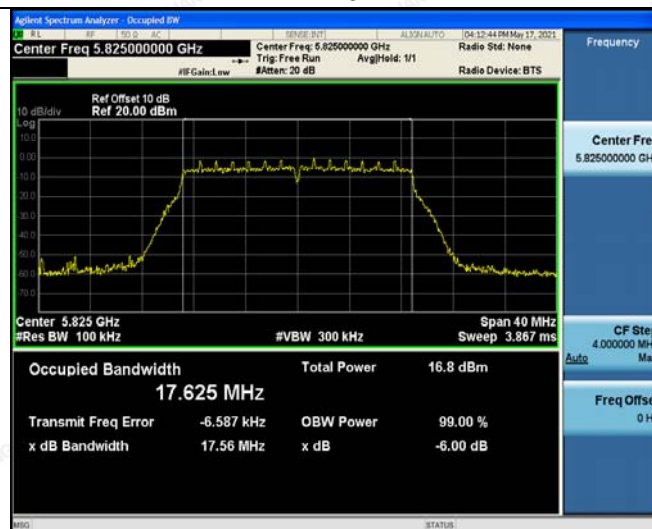


High



802.11n(HT40)

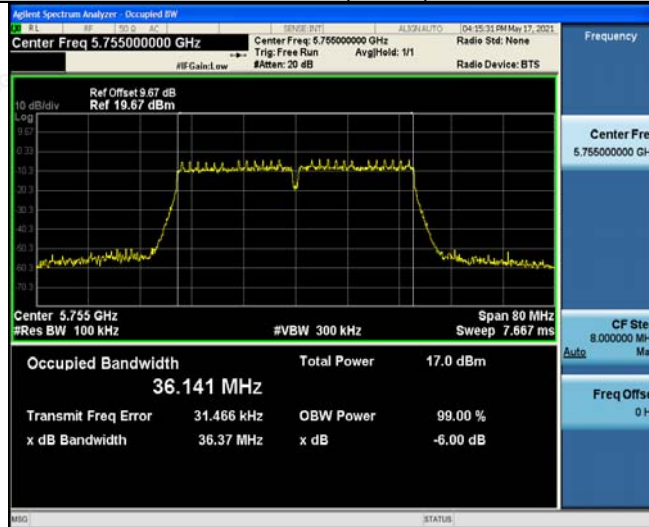

Low

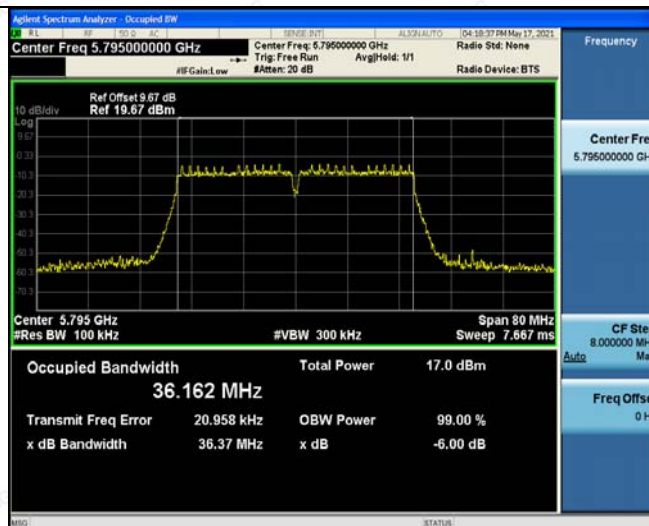

High

802.11ac(HT20)



Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




Mid




High


802.11ac(HT40)

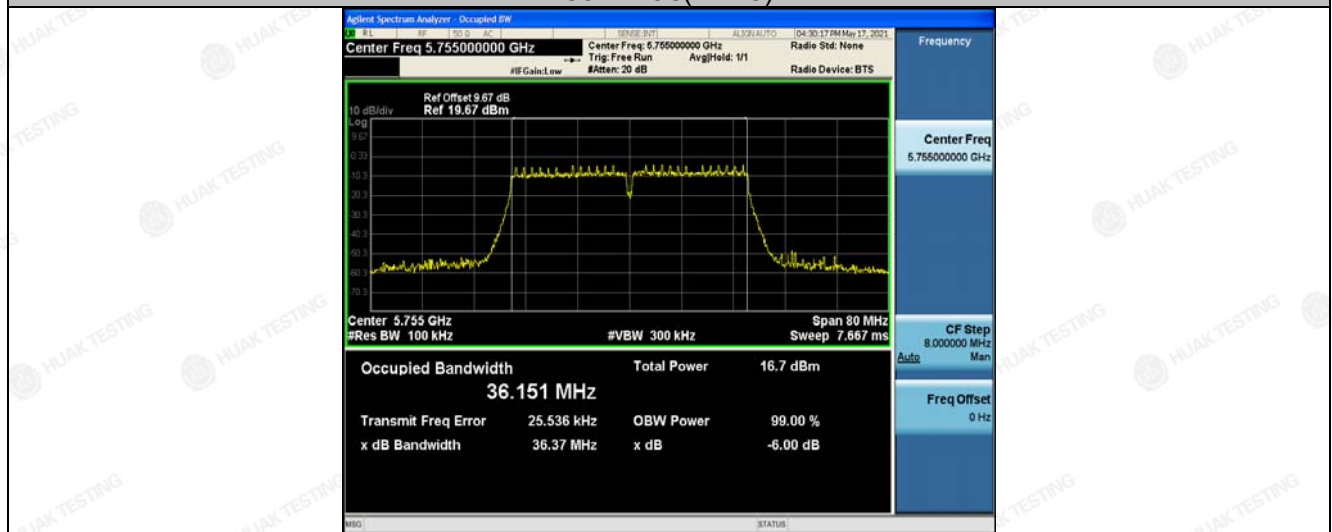

Low

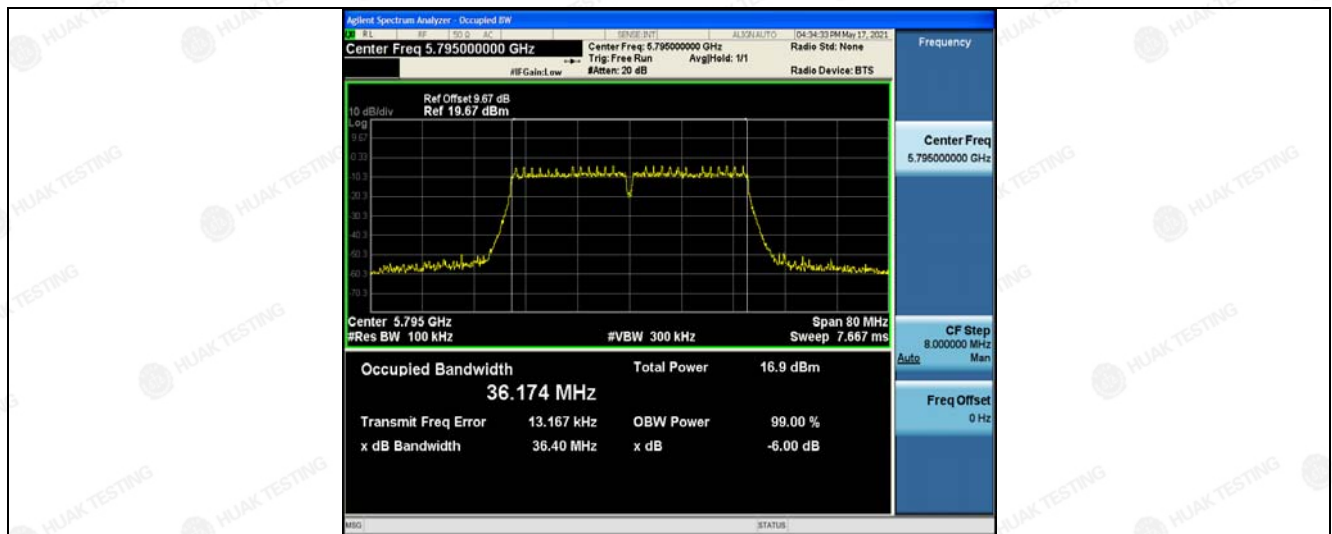

High
802.11ac(HT80)

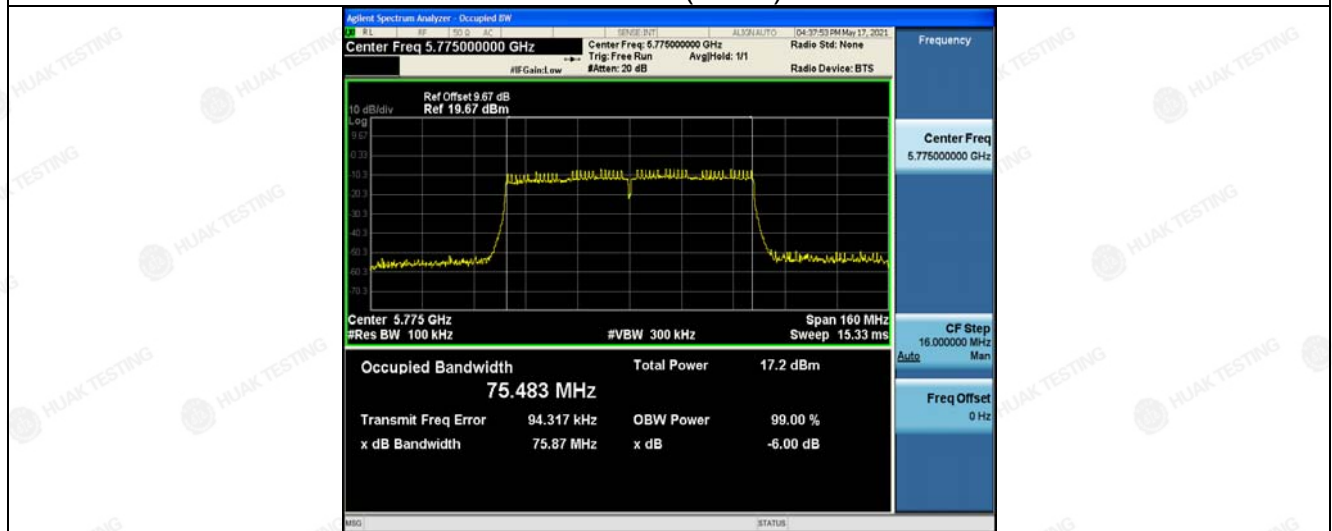

**ANT 3**

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.34	0.5	PASS
11a	CH157	5785	16.29	0.5	PASS
11a	CH161	5825	16.37	0.5	PASS
11n(HT20)	CH149	5745	17.58	0.5	PASS
11n(HT20)	CH157	5785	17.55	0.5	PASS
11n(HT20)	CH161	5825	17.59	0.5	PASS
11n(HT40)	CH151	5755	36.37	0.5	PASS
11n(HT40)	CH159	5795	36.44	0.5	PASS
11ac(HT20)	CH149	5745	17.59	0.5	PASS
11ac(HT20)	CH157	5785	17.58	0.5	PASS
11ac(HT20)	CH165	5825	17.60	0.5	PASS
11ac(HT40)	CH151	5755	36.37	0.5	PASS
11ac(HT40)	CH159	5795	36.41	0.5	PASS
11ac(HT80)	CH155	5755	75.83	0.5	PASS


Test plots as follows:

**Band IV (5725 – 5850 MHz)**


802.11a



Low

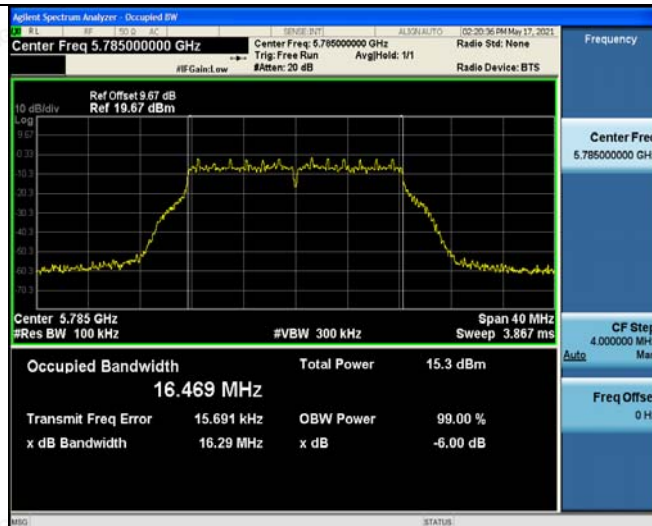

Mid

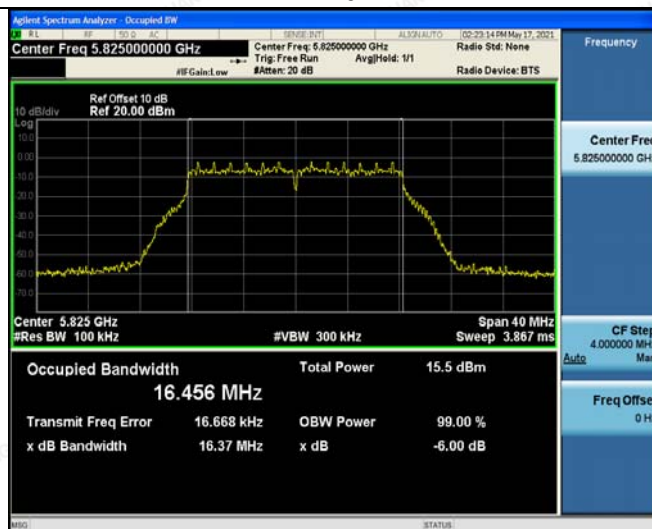

High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT20)



Low



Mid




High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT40)

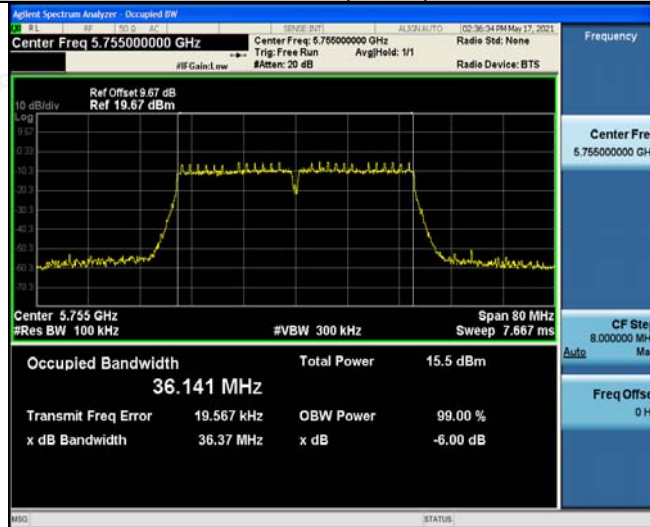


Low



High

802.11ac(HT20)

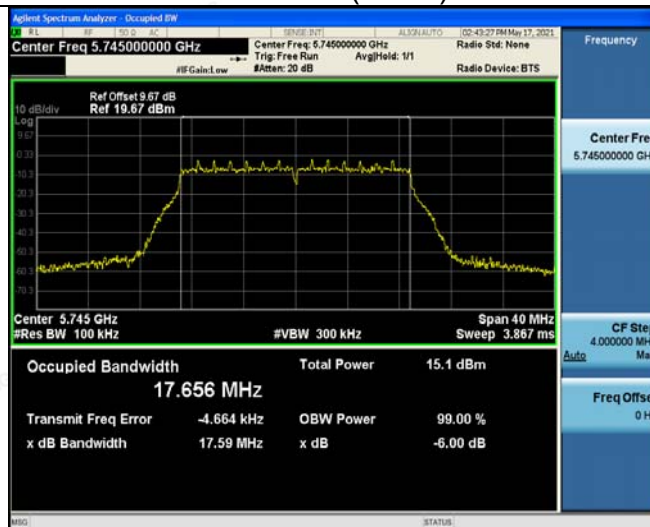

Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




Mid




High


802.11ac(HT40)

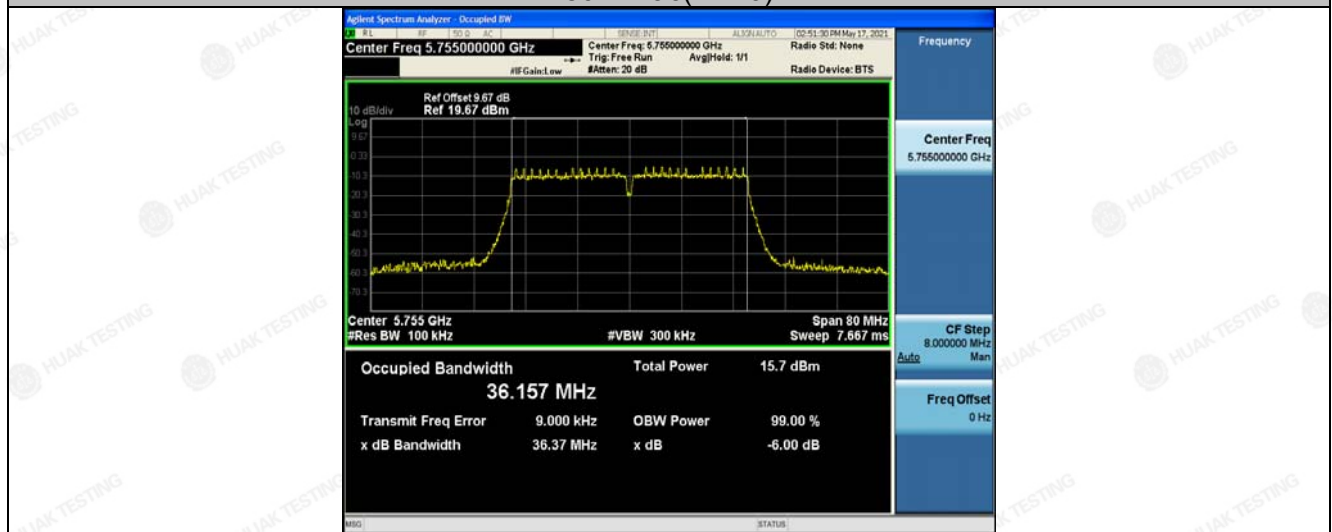

Low

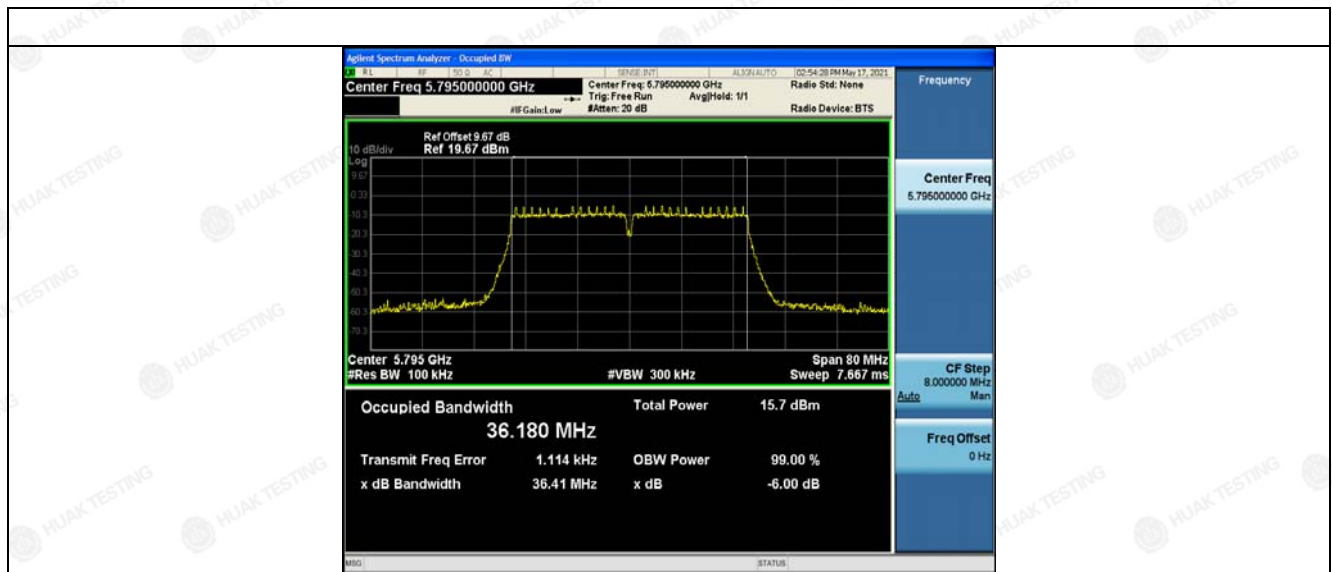

High
802.11ac(HT80)

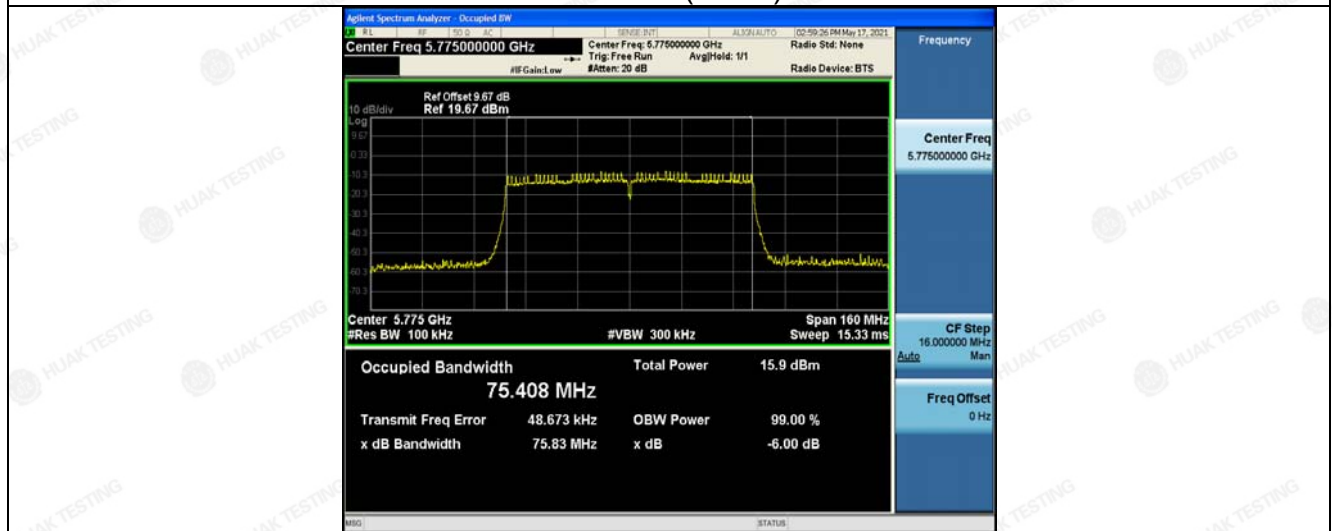



4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% \text{ EBW}$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	N/A

4.4.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


4.4.3. Test Result

N/A



4.5. POWER SPECTRAL DENSITY

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	$\leq 30.00\text{dBm}/500\text{KHz}$ for Band IV 5725MHz-5850MHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 2. Set RBW = 510KHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 3. Allow the sweeps to continue until the trace stabilizes. 4. Use the peak marker function to determine the maximum amplitude level. 5. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**4.5.3. Test data****ANT 1**


Mode	Test channel	Level [dBm/510kHz]	10log(500/510)	Power Spectral Density(dB m/500kHz)	Limit (dBm/500kHz)	Result
11a	CH149	-0.11	-0.086	-0.196	28.23	PASS
11a	CH157	0.74	-0.086	0.654	28.23	PASS
11a	CH161	1.17	-0.086	1.084	28.23	PASS
11n(HT20)	CH149	-1.18	-0.086	-1.266	28.23	PASS
11n(HT20)	CH157	-0.98	-0.086	-1.066	28.23	PASS
11n(HT20)	CH161	-0.45	-0.086	-0.536	28.23	PASS
11n(HT40)	CH151	-3.65	-0.086	-3.736	28.23	PASS
11n(HT40)	CH159	-4.00	-0.086	-4.086	28.23	PASS
11ac(HT20)	CH149	-1.25	-0.086	-1.336	28.23	PASS
11ac(HT20)	CH157	-0.89	-0.086	-0.976	28.23	PASS
11ac(HT20)	CH161	-0.38	-0.086	-0.466	28.23	PASS
11ac(HT40)	CH151	-3.93	-0.086	-4.016	28.23	PASS
11ac(HT40)	CH159	-0.40	-0.086	-0.486	28.23	PASS
11ac(HT80)	CH155	-6.77	-0.086	-6.856	28.23	PASS

NOTE: limit=30dBm-(direction gain-6dBi)=30-(3+10log3-6)=28.23dBm

Test plots as follows:



Band IV (5725 – 5850 MHz)

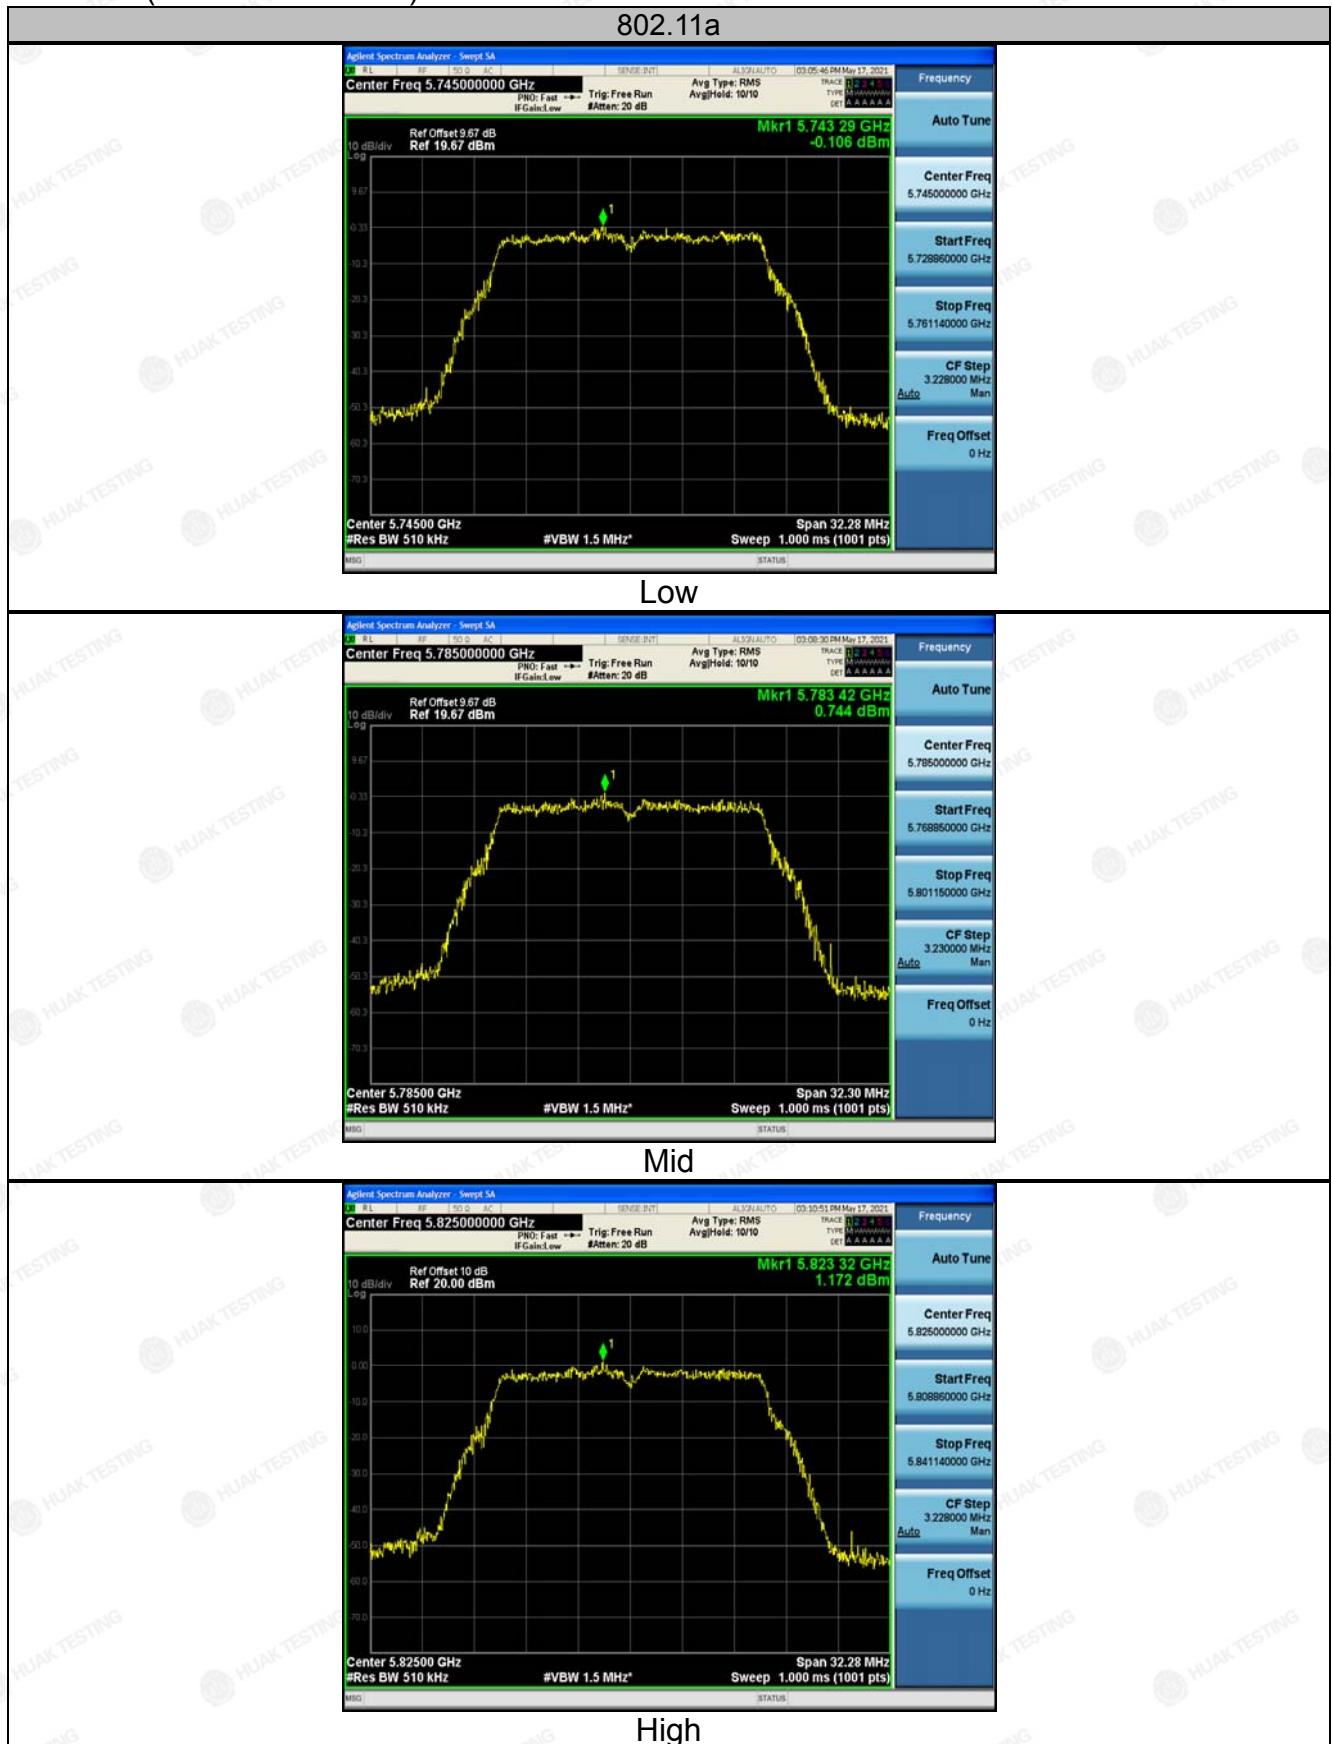

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT20)



Low



Mid



High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT40)



Low



High

802.11ac(HT20)



Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Mid



High

802.11ac(HT40)



Low



High

802.11ac(HT80)



**ANT 2**

Mode	Test channel	Level [dBm/510kHz]	10log(500/510)	Power Spectral Density(dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	CH149	2.64	-0.086	2.554	28.23	PASS
11a	CH157	2.37	-0.086	2.284	28.23	PASS
11a	CH161	3.71	-0.086	3.624	28.23	PASS
11n(HT20)	CH149	1.30	-0.086	1.214	28.23	PASS
11n(HT20)	CH157	1.81	-0.086	1.724	28.23	PASS
11n(HT20)	CH161	2.30	-0.086	2.214	28.23	PASS
11n(HT40)	CH151	-1.10	-0.086	-1.186	28.23	PASS
11n(HT40)	CH159	0.19	-0.086	0.104	28.23	PASS
11ac(HT20)	CH149	1.28	-0.086	1.194	28.23	PASS
11ac(HT20)	CH157	2.87	-0.086	2.784	28.23	PASS
11ac(HT20)	CH161	2.43	-0.086	2.344	28.23	PASS
11ac(HT40)	CH151	-0.59	-0.086	-0.676	28.23	PASS
11ac(HT40)	CH159	-1.04	-0.086	-1.126	28.23	PASS
11ac(HT80)	CH155	-4.20	-0.086	-4.286	28.23	PASS

NOTE: limit=30dBm-(direction gain-6dBi)=30-(3+10log3-6)=28.23dBm

Test plots as follows:



Band IV (5725 – 5850 MHz)

802.11a



Low



Mid



High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT20)



Low



Mid



High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11n(HT40)



Low



High

802.11ac(HT20)



Low


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Mid



High

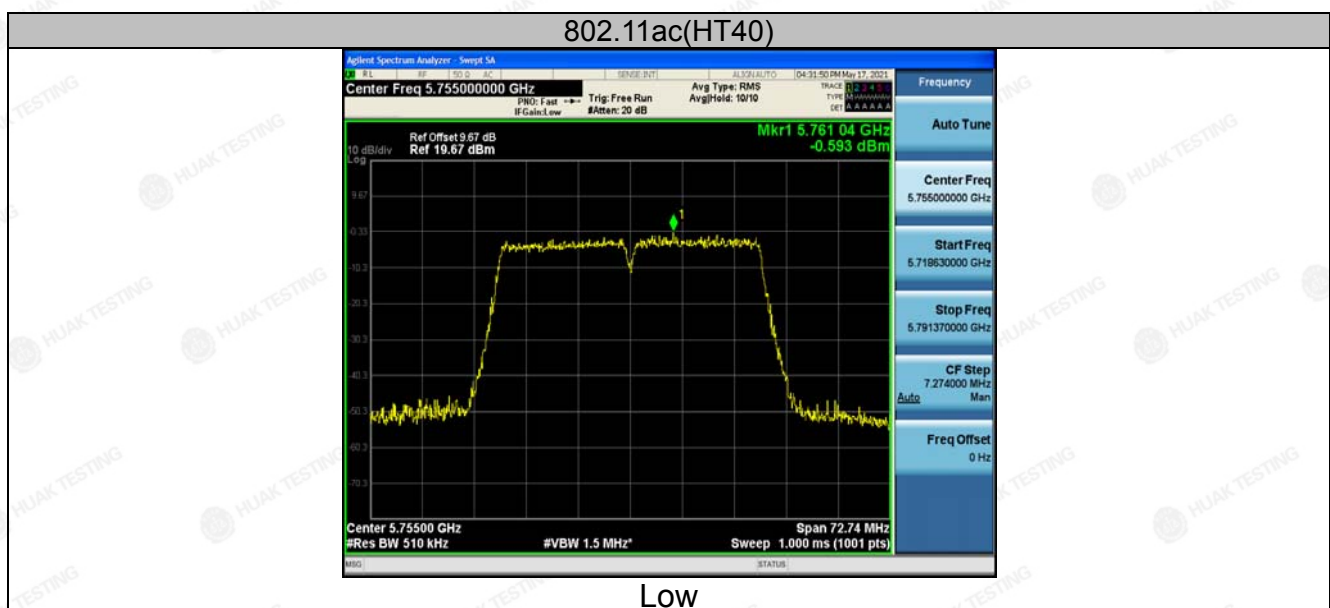

Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



High
802.11ac(T80)



**ANT 3**

Mode	Test channel	Level [dBm/510kHz]	10log(500/510)	Power Spectral Density(dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	CH149	1.55	-0.086	1.464	28.23	PASS
11a	CH157	1.64	-0.086	1.554	28.23	PASS
11a	CH161	2.18	-0.086	2.094	28.23	PASS
11n(HT20)	CH149	0.12	-0.086	0.034	28.23	PASS
11n(HT20)	CH157	0.03	-0.086	-0.056	28.23	PASS
11n(HT20)	CH161	1.69	-0.086	1.604	28.23	PASS
11n(HT40)	CH151	-1.63	-0.086	-1.716	28.23	PASS
11n(HT40)	CH159	-1.87	-0.086	-1.956	28.23	PASS
11ac(HT20)	CH149	0.31	-0.086	0.224	28.23	PASS
11ac(HT20)	CH157	0.29	-0.086	0.204	28.23	PASS
11ac(HT20)	CH161	0.80	-0.086	0.714	28.23	PASS
11ac(HT40)	CH151	-1.54	-0.086	-1.626	28.23	PASS
11ac(HT40)	CH159	-1.99	-0.086	-2.076	28.23	PASS
11ac(HT80)	CH155	-5.42	-0.086	-5.506	28.23	PASS

NOTE: limit=30dBm-(direction gain-6dBi)=30-(3+10log3-6)=28.23dBm

Test plots as follows:



Band IV (5725 – 5850 MHz)

802.11a



Low



Mid



High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT20)



Low



Mid



High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11n(HT40)



Low



High

802.11ac(HT20)



Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Mid



High

802.11ac(HT40)



Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



High
802.11ac(T80)





For MIMO antenna port 1+antenna port 2+antenna port 3


Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Power Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
11n(HT20)	CH149	4.88	28.23	PASS
11n(HT20)	CH157	5.13	28.23	PASS
11n(HT20)	CH161	6.02	28.23	PASS
11n(HT40)	CH151	2.69	28.23	PASS
11n(HT40)	CH159	3.12	28.23	PASS
11ac(HT20)	CH149	4.92	28.23	PASS
11ac(HT20)	CH157	5.73	28.23	PASS
11ac(HT20)	CH161	5.79	28.23	PASS
11ac(HT40)	CH151	2.88	28.23	PASS
11ac(HT40)	CH159	3.59	28.23	PASS
11ac(HT80)	CH155	-0.65	28.23	PASS
Note: 1. According to KDB 662911, Result power = $10\log(10^{(ant1/10)}+10^{(ant2/10)}+10^{(ant3/10)})$. 2. Result unit: W, The end result is converted to units of dBm. 3. limit=30dBm-(direction gain-6dBi)=30-(3+10log3-6)=28.23dBm				

Note: This product supports antenna 1, antenna 2 and antenna 3 launch, but only support 802.11 n/ac for MIMO mode, not support 802.11 a for MIMO mode.



4.6. BAND EDGE

4.6.1. Test Specification

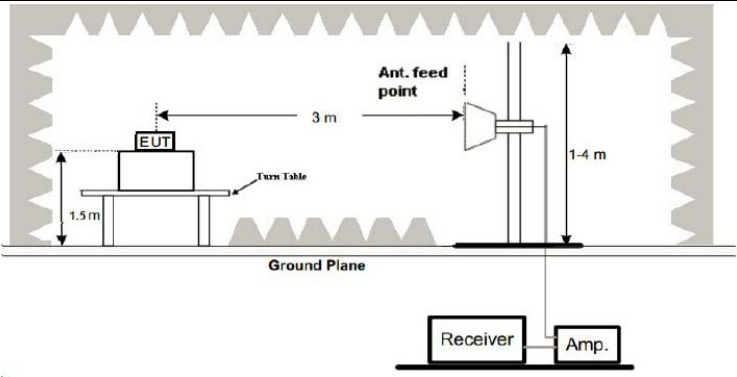Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	(1) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
Test Result:	PASS



4.6.2. Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Jun. 18, 2020	Jun. 17, 2021
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	EMCI	EMC051845S E	HKE-015	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	Agilent	83051A	HKE-016	Jun. 18, 2020	Jun. 17, 2021
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 18, 2020	Jun. 17, 2021
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Jun. 18, 2020	Jun. 17, 2021
Horn antenna	Schwarzbeck	9120D	HKE-013	Jun. 18, 2020	Jun. 17, 2021
Antenna Mast	Keleto	CC-A-4M	N/A	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Jun. 18, 2020	Jun. 17, 2021
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Jun. 18, 2020	Jun. 17, 2021
RF cable	Tonscend	1-18G	HKE-099	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
Horn Antenna	Schwarzbeck	BBHA 9170	HKE-017	Jun. 18, 2020	Jun. 17, 2021
Spectrum analyzer	R&S	FSP40	HKE-025	Jun. 18, 2020	Jun. 17, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**4.6.3. Test Data****ANT 1**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.81	-2.06	52.75	68.2	-15.45	peak
5700	86.65	-1.96	84.69	105.2	-20.51	peak
5720	90.69	-2.87	87.82	110.8	-22.98	peak
5725	97.92	-2.14	95.78	122.2	-26.42	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.37	-2.06	54.31	68.2	-13.89	peak
5700	87.58	-1.96	85.62	105.2	-19.58	peak
5720	89.14	-2.87	86.27	110.8	-24.53	peak
5725	101.09	-2.14	98.95	122.2	-23.25	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.89	-1.97	95.92	122.2	-26.28	peak
5855	91.26	-2.13	89.13	110.8	-21.67	peak
5875	81.75	-2.65	79.1	105.2	-26.1	peak
5925	48.16	-2.28	45.88	68.2	-22.32	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	92.67	-1.97	90.7	122.2	-31.5	peak
5855	91.42	-2.13	89.29	110.8	-21.51	peak
5875	84.92	-2.65	82.27	105.2	-22.93	peak
5925	50.88	-2.28	48.6	68.2	-19.6	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.98	-2.06	54.92	68.2	-13.28	peak
5700	88.47	-1.96	86.51	105.2	-18.69	peak
5720	91.84	-2.87	88.97	110.8	-21.83	peak
5725	95.34	-2.14	93.2	122.2	-29	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.16	-2.06	54.1	68.2	-14.1	peak
5700	93.87	-1.96	91.91	105.2	-13.29	peak
5720	93.89	-2.87	91.02	110.8	-19.78	peak
5725	95.48	-2.14	93.34	122.2	-28.86	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	94.84	-1.97	92.87	122.2	-29.33	peak
5855	93.37	-2.13	91.24	110.8	-19.56	peak
5875	86.39	-2.65	83.74	105.2	-21.46	peak
5925	51.48	-2.28	49.2	68.2	-19	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	93.64	-1.97	91.67	122.2	-30.53	peak
5855	90.81	-2.13	88.68	110.8	-22.12	peak
5875	83.96	-2.65	81.31	105.2	-23.89	peak
5925	52.49	-2.28	50.21	68.2	-17.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.77	-2.06	53.71	68.2	-14.49	peak
5700	89.64	-1.96	87.68	105.2	-17.52	peak
5720	90.81	-2.87	87.94	110.8	-22.86	peak
5725	95.04	-2.14	92.9	122.2	-29.3	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.09	-2.06	54.03	68.2	-14.17	peak
5700	92.25	-1.96	90.29	105.2	-14.91	peak
5720	87.27	-2.87	84.4	110.8	-26.4	peak
5725	93.95	-2.14	91.81	122.2	-30.39	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	94.67	-1.97	92.7	122.2	-29.5	peak
5855	91.39	-2.13	89.26	110.8	-21.54	peak
5875	83.69	-2.65	81.04	105.2	-24.16	peak
5925	50.98	-2.28	48.7	68.2	-19.5	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	99.79	-1.97	97.82	122.2	-24.38	peak
5855	85.86	-2.13	83.73	110.8	-27.07	peak
5875	86.23	-2.65	83.58	105.2	-21.62	peak
5925	52.59	-2.28	50.31	68.2	-17.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.91	-2.06	50.85	68.2	-17.35	peak
5700	84.08	-1.96	82.12	105.2	-23.08	peak
5720	87.87	-2.87	85	110.8	-25.8	peak
5725	95.84	-2.14	93.7	122.2	-28.5	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.66	-2.06	53.6	68.2	-14.6	peak
5700	88.05	-1.96	86.09	105.2	-19.11	peak
5720	92.99	-2.87	90.12	110.8	-20.68	peak
5725	96.95	-2.14	94.81	122.2	-27.39	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	96.73	-1.97	94.76	122.2	-27.44	peak
5855	92.86	-2.13	90.73	110.8	-20.07	peak
5875	84.58	-2.65	81.93	105.2	-23.27	peak
5925	53.73	-2.28	51.45	68.2	-16.75	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.83	-1.97	93.86	122.2	-28.34	peak
5855	87.99	-2.13	85.86	110.8	-24.94	peak
5875	80.24	-2.65	77.59	105.2	-27.61	peak
5925	57.25	-2.28	54.97	68.2	-13.23	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.31	-2.06	54.25	68.2	-13.95	peak
5700	86.43	-1.96	84.47	105.2	-20.73	peak
5720	91.07	-2.87	88.2	110.8	-22.6	peak
5725	92.53	-2.14	90.39	122.2	-31.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.28	-2.06	53.22	68.2	-14.98	peak
5700	86.07	-1.96	84.11	105.2	-21.09	peak
5720	89.18	-2.87	86.31	110.8	-24.49	peak
5725	94.48	-2.14	92.34	122.2	-29.86	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	93.39	-1.97	91.42	122.2	-30.78	peak
5855	90.22	-2.13	88.09	110.8	-22.71	peak
5875	84.52	-2.65	81.87	105.2	-23.33	peak
5925	52.49	-2.28	50.21	68.2	-17.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.19	-1.97	95.22	122.2	-26.98	peak
5855	86.02	-2.13	83.89	110.8	-26.91	peak
5875	84.59	-2.65	81.94	105.2	-23.26	peak
5925	53.22	-2.28	50.94	68.2	-17.26	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.33	-2.06	50.27	68.2	-17.93	peak
5700	84.55	-1.96	82.59	105.2	-22.61	peak
5720	94.24	-2.87	91.37	110.8	-19.43	peak
5725	93.95	-2.14	91.81	122.2	-30.39	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.28	-2.06	54.22	68.2	-13.98	peak
5700	90.84	-1.96	88.88	105.2	-16.32	peak
5720	88.99	-2.87	86.12	110.8	-24.68	peak
5725	94.61	-2.14	92.47	122.2	-29.73	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.43	-1.97	93.46	122.2	-28.74	peak
5855	90.62	-2.13	88.49	110.8	-22.31	peak
5875	83.77	-2.65	81.12	105.2	-24.08	peak
5925	54.82	-2.28	52.54	68.2	-15.66	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	92.37	-1.97	90.4	122.2	-31.8	peak
5855	90.48	-2.13	88.35	110.8	-22.45	peak
5875	80.29	-2.65	77.64	105.2	-27.56	peak
5925	56.71	-2.28	54.43	68.2	-13.77	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

**ANT 2**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.85	-2.06	52.79	68.2	-15.41	peak
5700	90.26	-1.96	88.3	105.2	-16.9	peak
5720	92.23	-2.87	89.36	110.8	-21.44	peak
5725	94.04	-2.14	91.9	122.2	-30.3	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.86	-2.06	54.8	68.2	-13.4	peak
5700	88.81	-1.96	86.85	105.2	-18.35	peak
5720	92.58	-2.87	89.71	110.8	-21.09	peak
5725	94.32	-2.14	92.18	122.2	-30.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.22	-1.97	93.25	122.2	-28.95	peak
5855	92.17	-2.13	90.04	110.8	-20.76	peak
5875	81.28	-2.65	78.63	105.2	-26.57	peak
5925	54.59	-2.28	52.31	68.2	-15.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.76	-1.97	95.79	122.2	-26.41	peak
5855	90.68	-2.13	88.55	110.8	-22.25	peak
5875	81.35	-2.65	78.7	105.2	-26.5	peak
5925	53.92	-2.28	51.64	68.2	-16.56	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.89	-2.06	52.83	68.2	-15.37	peak
5700	87.72	-1.96	85.76	105.2	-19.44	peak
5720	88.38	-2.87	85.51	110.8	-25.29	peak
5725	95.81	-2.14	93.67	122.2	-28.53	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.27	-2.06	54.21	68.2	-13.99	peak
5700	95.55	-1.96	93.59	105.2	-11.61	peak
5720	90.45	-2.87	87.58	110.8	-23.22	peak
5725	92.97	-2.14	90.83	122.2	-31.37	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.39	-1.97	93.42	122.2	-28.78	peak
5855	88.54	-2.13	86.41	110.8	-24.39	peak
5875	82.08	-2.65	79.43	105.2	-25.77	peak
5925	51.81	-2.28	49.53	68.2	-18.67	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	96.68	-1.97	94.71	122.2	-27.49	peak
5855	91.73	-2.13	89.6	110.8	-21.2	peak
5875	82.28	-2.65	79.63	105.2	-25.57	peak
5925	53.31	-2.28	51.03	68.2	-17.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.74	-2.06	49.68	68.2	-18.52	peak
5700	90.59	-1.96	88.63	105.2	-16.57	peak
5720	87.17	-2.87	84.3	110.8	-26.5	peak
5725	95.23	-2.14	93.09	122.2	-29.11	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.43	-2.06	57.37	68.2	-10.83	peak
5700	91.66	-1.96	89.7	105.2	-15.5	peak
5720	87.54	-2.87	84.67	110.8	-26.13	peak
5725	95.17	-2.14	93.03	122.2	-29.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.92	-1.97	93.95	122.2	-28.25	peak
5855	91.57	-2.13	89.44	110.8	-21.36	peak
5875	89.15	-2.65	86.5	105.2	-18.7	peak
5925	52.15	-2.28	49.87	68.2	-18.33	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	94.24	-1.97	92.27	122.2	-29.93	peak
5855	92.37	-2.13	90.24	110.8	-20.56	peak
5875	85.34	-2.65	82.69	105.2	-22.51	peak
5925	49.01	-2.28	46.73	68.2	-21.47	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.39	-2.06	52.33	68.2	-15.87	peak
5700	88.12	-1.96	86.16	105.2	-19.04	peak
5720	90.67	-2.87	87.8	110.8	-23	peak
5725	94.14	-2.14	92	122.2	-30.2	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.83	-2.06	55.77	68.2	-12.43	peak
5700	87.98	-1.96	86.02	105.2	-19.18	peak
5720	94.62	-2.87	91.75	110.8	-19.05	peak
5725	95.84	-2.14	93.7	122.2	-28.5	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.93	-1.97	95.96	122.2	-26.24	peak
5855	90.24	-2.13	88.11	110.8	-22.69	peak
5875	84.29	-2.65	81.64	105.2	-23.56	peak
5925	50.33	-2.28	48.05	68.2	-20.15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	96.28	-1.97	94.31	122.2	-27.89	peak
5855	91.33	-2.13	89.2	110.8	-21.6	peak
5875	80.38	-2.65	77.73	105.2	-27.47	peak
5925	50.27	-2.28	47.99	68.2	-20.21	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.47	-2.06	52.41	68.2	-15.79	peak
5700	83.22	-1.96	81.26	105.2	-23.94	peak
5720	87.81	-2.87	84.94	110.8	-25.86	peak
5725	93.58	-2.14	91.44	122.2	-30.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.37	-2.06	51.31	68.2	-16.89	peak
5700	88.49	-1.96	86.53	105.2	-18.67	peak
5720	92.18	-2.87	89.31	110.8	-21.49	peak
5725	94.52	-2.14	92.38	122.2	-29.82	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.94	-1.97	95.97	122.2	-26.23	peak
5855	91.31	-2.13	89.18	110.8	-21.62	peak
5875	83.88	-2.65	81.23	105.2	-23.97	peak
5925	52.39	-2.28	50.11	68.2	-18.09	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	98.38	-1.97	96.41	122.2	-25.79	peak
5855	90.48	-2.13	88.35	110.8	-22.45	peak
5875	82.83	-2.65	80.18	105.2	-25.02	peak
5925	52.99	-2.28	50.71	68.2	-17.49	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.68	-2.06	52.62	68.2	-15.58	peak
5700	89.03	-1.96	87.07	105.2	-18.13	peak
5720	90.62	-2.87	87.75	110.8	-23.05	peak
5725	96.54	-2.14	94.4	122.2	-27.8	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.27	-2.06	52.21	68.2	-15.99	peak
5700	87.75	-1.96	85.79	105.2	-19.41	peak
5720	91.42	-2.87	88.55	110.8	-22.25	peak
5725	96.49	-2.14	94.35	122.2	-27.85	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	96.84	-1.97	94.87	122.2	-27.33	peak
5855	91.63	-2.13	89.5	110.8	-21.3	peak
5875	83.07	-2.65	80.42	105.2	-24.78	peak
5925	47.59	-2.28	45.31	68.2	-22.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.42	-1.97	93.45	122.2	-28.75	peak
5855	92.18	-2.13	90.05	110.8	-20.75	peak
5875	83.57	-2.65	80.92	105.2	-24.28	peak
5925	52.48	-2.28	50.2	68.2	-18	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

**ANT 3**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.79	-2.06	53.73	68.2	-14.47	peak
5700	86.65	-1.96	84.69	105.2	-20.51	peak
5720	90.84	-2.87	87.97	110.8	-22.83	peak
5725	97.44	-2.14	95.3	122.2	-26.9	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.95	-2.06	52.89	68.2	-15.31	peak
5700	87.72	-1.96	85.76	105.2	-19.44	peak
5720	88.95	-2.87	86.08	110.8	-24.72	peak
5725	100.86	-2.14	98.72	122.2	-23.48	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.91	-1.97	95.94	122.2	-26.26	peak
5855	91.98	-2.13	89.85	110.8	-20.95	peak
5875	81.11	-2.65	78.46	105.2	-26.74	peak
5925	46.85	-2.28	44.57	68.2	-23.63	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	92.38	-1.97	90.41	122.2	-31.79	peak
5855	91.29	-2.13	89.16	110.8	-21.64	peak
5875	83.12	-2.65	80.47	105.2	-24.73	peak
5925	50.82	-2.28	48.54	68.2	-19.66	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.39	-2.06	54.33	68.2	-13.87	peak
5700	88.82	-1.96	86.86	105.2	-18.34	peak
5720	90.83	-2.87	87.96	110.8	-22.84	peak
5725	93.54	-2.14	91.4	122.2	-30.8	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.81	-2.06	54.75	68.2	-13.45	peak
5700	93.87	-1.96	91.91	105.2	-13.29	peak
5720	93.92	-2.87	91.05	110.8	-19.75	peak
5725	96.19	-2.14	94.05	122.2	-28.15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.65	-1.97	93.68	122.2	-28.52	peak
5855	92.87	-2.13	90.74	110.8	-20.06	peak
5875	86.45	-2.65	83.8	105.2	-21.4	peak
5925	53.04	-2.28	50.76	68.2	-17.44	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	93.85	-1.97	91.88	122.2	-30.32	peak
5855	90.51	-2.13	88.38	110.8	-22.42	peak
5875	83.33	-2.65	80.68	105.2	-24.52	peak
5925	52.67	-2.28	50.39	68.2	-17.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.21	-2.06	54.15	68.2	-14.05	peak
5700	88.64	-1.96	86.68	105.2	-18.52	peak
5720	90.17	-2.87	87.3	110.8	-23.5	peak
5725	94.88	-2.14	92.74	122.2	-29.46	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.43	-2.06	54.37	68.2	-13.83	peak
5700	92.25	-1.96	90.29	105.2	-14.91	peak
5720	86.16	-2.87	83.29	110.8	-27.51	peak
5725	93.44	-2.14	91.3	122.2	-30.9	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	94.48	-1.97	92.51	122.2	-29.69	peak
5855	90.25	-2.13	88.12	110.8	-22.68	peak
5875	83.77	-2.65	81.12	105.2	-24.08	peak
5925	51.07	-2.28	48.79	68.2	-19.41	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	100.89	-1.97	98.92	122.2	-23.28	peak
5855	86.95	-2.13	84.82	110.8	-25.98	peak
5875	82.55	-2.65	79.9	105.2	-25.3	peak
5925	53.64	-2.28	51.36	68.2	-16.84	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.66	-2.06	51.6	68.2	-16.6	peak
5700	84.35	-1.96	82.39	105.2	-22.81	peak
5720	87.99	-2.87	85.12	110.8	-25.68	peak
5725	95.58	-2.14	93.44	122.2	-28.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.33	-2.06	54.27	68.2	-13.93	peak
5700	89.45	-1.96	87.49	105.2	-17.71	peak
5720	91.74	-2.87	88.87	110.8	-21.93	peak
5725	95.53	-2.14	93.39	122.2	-28.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	98.01	-1.97	96.04	122.2	-26.16	peak
5855	91.86	-2.13	89.73	110.8	-21.07	peak
5875	84.31	-2.65	81.66	105.2	-23.54	peak
5925	54.05	-2.28	51.77	68.2	-16.43	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.25	-1.97	93.28	122.2	-28.92	peak
5855	87.62	-2.13	85.49	110.8	-25.31	peak
5875	80.19	-2.65	77.54	105.2	-27.66	peak
5925	56.96	-2.28	54.68	68.2	-13.52	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.76	-2.06	54.7	68.2	-13.5	peak
5700	87.36	-1.96	85.4	105.2	-19.8	peak
5720	91.25	-2.87	88.38	110.8	-22.42	peak
5725	92.06	-2.14	89.92	122.2	-32.28	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.64	-2.06	51.58	68.2	-16.62	peak
5700	86.02	-1.96	84.06	105.2	-21.14	peak
5720	88.71	-2.87	85.84	110.8	-24.96	peak
5725	93.94	-2.14	91.8	122.2	-30.4	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	93.12	-1.97	91.15	122.2	-31.05	peak
5855	91.43	-2.13	89.3	110.8	-21.5	peak
5875	83.66	-2.65	81.01	105.2	-24.19	peak
5925	52.23	-2.28	49.95	68.2	-18.25	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.36	-1.97	93.39	122.2	-28.81	peak
5855	86.01	-2.13	83.88	110.8	-26.92	peak
5875	85.07	-2.65	82.42	105.2	-22.78	peak
5925	51.26	-2.28	48.98	68.2	-19.22	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.83	-2.06	50.77	68.2	-17.43	peak
5700	85.07	-1.96	83.11	105.2	-22.09	peak
5720	93.42	-2.87	90.55	110.8	-20.25	peak
5725	93.83	-2.14	91.69	122.2	-30.51	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.75	-2.06	52.69	68.2	-15.51	peak
5700	90.51	-1.96	88.55	105.2	-16.65	peak
5720	88.13	-2.87	85.26	110.8	-25.54	peak
5725	94.52	-2.14	92.38	122.2	-29.82	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.51	-1.97	93.54	122.2	-28.66	peak
5855	89.36	-2.13	87.23	110.8	-23.57	peak
5875	84.29	-2.65	81.64	105.2	-23.56	peak
5925	54.04	-2.28	51.76	68.2	-16.44	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	92.61	-1.97	90.64	122.2	-31.56	peak
5855	91.23	-2.13	89.1	110.8	-21.7	peak
5875	80.13	-2.65	77.48	105.2	-27.72	peak
5925	57.49	-2.28	55.21	68.2	-12.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.75	-2.06	52.69	68.2	-15.51	peak
5700	87.31	-1.96	85.35	105.2	-19.85	peak
5720	93.43	-2.87	90.56	110.8	-20.24	peak
5725	100.28	-2.14	98.14	122.2	-24.06	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.11	-2.06	55.05	68.2	-13.15	peak
5700	91.62	-1.96	89.66	105.2	-15.54	peak
5720	92.44	-2.87	89.57	110.8	-21.23	peak
5725	96.75	-2.14	94.61	122.2	-27.59	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	96.32	-1.97	94.35	122.2	-27.85	peak
5855	94.46	-2.13	92.33	110.8	-18.47	peak
5875	88.92	-2.65	86.27	105.2	-18.93	peak
5925	52.87	-2.28	50.59	68.2	-17.61	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.93	-1.97	93.96	122.2	-28.24	peak
5855	92.49	-2.13	90.36	110.8	-20.44	peak
5875	84.97	-2.65	82.32	105.2	-22.88	peak
5925	55.48	-2.28	53.2	68.2	-15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.04	-2.06	53.98	68.2	-14.22	peak
5700	90.55	-1.96	88.59	105.2	-16.61	peak
5720	91.69	-2.87	88.82	110.8	-21.98	peak
5725	96.32	-2.14	94.18	122.2	-28.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.38	-2.06	57.32	68.2	-10.88	peak
5700	95.78	-1.96	93.82	105.2	-11.38	peak
5720	88.69	-2.87	85.82	110.8	-24.98	peak
5725	94.17	-2.14	92.03	122.2	-30.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	101.29	-1.97	99.32	122.2	-22.88	peak
5855	93.41	-2.13	91.28	110.8	-19.52	peak
5875	83.85	-2.65	81.2	105.2	-24	peak
5925	55.31	-2.28	53.03	68.2	-15.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	101.69	-1.97	99.72	122.2	-22.48	peak
5855	90.47	-2.13	88.34	110.8	-22.46	peak
5875	82.57	-2.65	79.92	105.2	-25.28	peak
5925	54.07	-2.28	51.79	68.2	-16.41	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.19	-2.06	55.13	68.2	-13.07	peak
5700	90.17	-1.96	88.21	105.2	-16.99	peak
5720	91.45	-2.87	88.58	110.8	-22.22	peak
5725	99.61	-2.14	97.47	122.2	-24.73	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.11	-2.06	55.05	68.2	-13.15	peak
5700	86.98	-1.96	85.02	105.2	-20.18	peak
5720	92.93	-2.87	90.06	110.8	-20.74	peak
5725	93.59	-2.14	91.45	122.2	-30.75	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	100.42	-1.97	98.45	122.2	-23.75	peak
5855	95.03	-2.13	92.9	110.8	-17.9	peak
5875	85.06	-2.65	82.41	105.2	-22.79	peak
5925	51.77	-2.28	49.49	68.2	-18.71	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.31	-1.97	93.34	122.2	-28.86	peak
5855	90.72	-2.13	88.59	110.8	-22.21	peak
5875	82.23	-2.65	79.58	105.2	-25.62	peak
5925	54.35	-2.28	52.07	68.2	-16.13	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.23	-2.06	54.17	68.2	-14.03	peak
5700	87.31	-1.96	85.35	105.2	-19.85	peak
5720	93.25	-2.87	90.38	110.8	-20.42	peak
5725	94.94	-2.14	92.8	122.2	-29.4	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.55	-2.06	54.49	68.2	-13.71	peak
5700	88.51	-1.96	86.55	105.2	-18.65	peak
5720	92.23	-2.87	89.36	110.8	-21.44	peak
5725	97.46	-2.14	95.32	122.2	-26.88	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	94.96	-1.97	92.99	122.2	-29.21	peak
5855	90.03	-2.13	87.9	110.8	-22.9	peak
5875	84.32	-2.65	81.67	105.2	-23.53	peak
5925	52.84	-2.28	50.56	68.2	-17.64	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	95.93	-1.97	93.96	122.2	-28.24	peak
5855	88.55	-2.13	86.42	110.8	-24.38	peak
5875	85.99	-2.65	83.34	105.2	-21.86	peak
5925	54.49	-2.28	52.21	68.2	-15.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.12	-2.06	57.06	68.2	-11.14	peak
5700	86.64	-1.96	84.68	105.2	-20.52	peak
5720	91.56	-2.87	88.69	110.8	-22.11	peak
5725	95.92	-2.14	93.78	122.2	-28.42	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.79	-2.06	52.73	68.2	-15.47	peak
5700	90.48	-1.96	88.52	105.2	-16.68	peak
5720	92.87	-2.87	90	110.8	-20.8	peak
5725	96.62	-2.14	94.48	122.2	-27.72	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	98.83	-1.97	96.86	122.2	-25.34	peak
5855	90.62	-2.13	88.49	110.8	-22.31	peak
5875	85.21	-2.65	82.56	105.2	-22.64	peak
5925	52.31	-2.28	50.03	68.2	-18.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	97.89	-1.97	95.92	122.2	-26.28	peak
5855	90.63	-2.13	88.5	110.8	-22.3	peak
5875	80.04	-2.65	77.39	105.2	-27.81	peak
5925	54.72	-2.28	52.44	68.2	-15.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						




4.7. SPURIOUS EMISSION

4.7.1.1. Test Specification

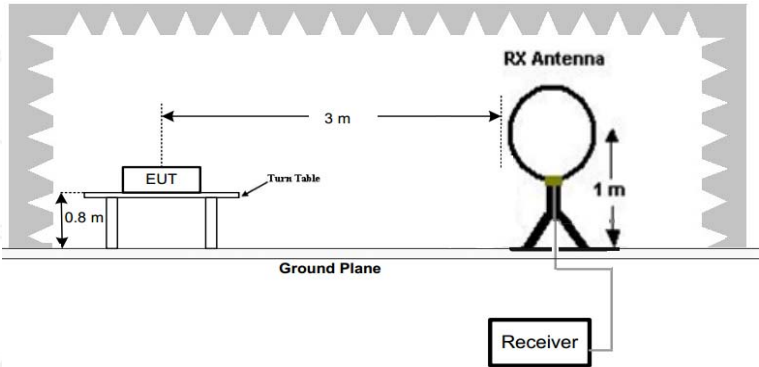Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	(1) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should comply 15.209.				
Test setup:	For radiated emissions below 30MHz  30MHz to 1GHz				

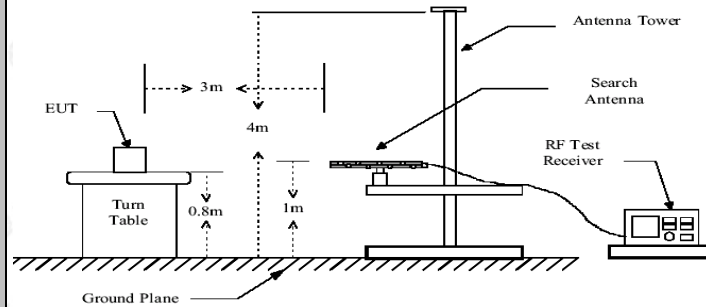

Above 1GHz

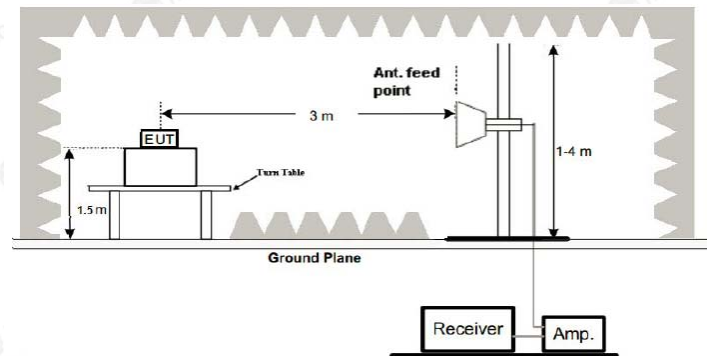

Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test results:

PASS



4.7.2. Test Data

test mode: TX 802.11a 5745MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

Below 1GHz

Horizontal




Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	71.7518	-17.99	36.16	18.17	40.00	21.83	100	15	Horizontal
2	167.8779	-17.50	46.45	28.95	43.50	14.55	100	268	Horizontal
3	210.6006	-14.79	45.30	30.51	43.50	12.99	100	296	Horizontal
4	267.8879	-13.63	45.98	32.35	46.00	13.65	100	288	Horizontal
5	401.8819	-10.37	40.78	30.41	46.00	15.59	100	110	Horizontal
6	716.4765	-4.77	38.62	33.85	46.00	12.15	100	260	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Vertical

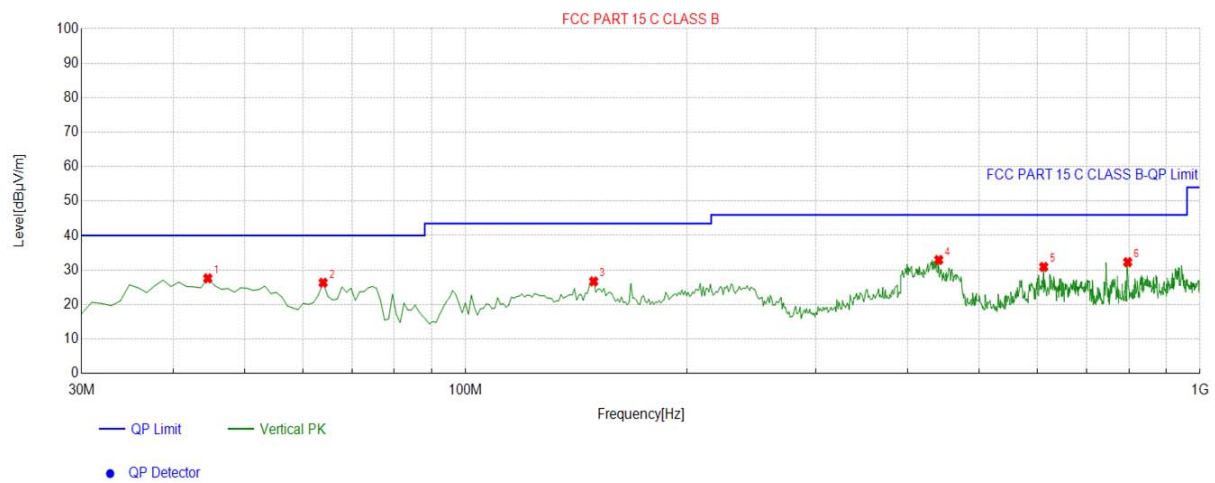

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.5646	-13.73	41.33	27.60	40.00	12.40	100	211	Vertical
2	63.9840	-16.16	42.47	26.31	40.00	13.69	100	266	Vertical
3	149.4294	-18.95	45.65	26.70	43.50	16.80	100	25	Vertical
4	440.7207	-9.39	42.32	32.93	46.00	13.07	100	359	Vertical
5	612.5826	-5.55	36.46	30.91	46.00	15.09	100	183	Vertical
6	797.0671	-3.16	35.44	32.28	46.00	13.72	100	306	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**Above 1GHz**

5.8G 802.11 a Mode

All modes of operation were investigated and the worst-case of Antenna 1 are reported.

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	62.63	-4.59	58.04	68.2	-10.16	peak
11096	48.86	4.21	53.07	74	-20.93	peak
11096	42.46	4.21	46.67	54	-7.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	60.36	-4.59	55.77	68.2	-12.43	peak
11096	51.93	4.21	56.14	74	-17.86	peak
11096	36.62	4.21	40.83	54	-13.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	60.01	-4.59	55.42	68.2	-12.78	peak
10523	50.88	4.21	55.09	68.2	-13.11	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	54.38	-4.59	49.79	68.2	-18.41	peak
10523	52.08	4.21	56.29	68.2	-11.91	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	57.66	-4.59	53.07	74	-20.93	peak
2705	46.91	-4.59	42.32	54	-11.68	AVG
11717	53.85	4.84	58.69	74	-15.31	peak
11717	36.12	4.84	40.96	54	-13.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	55.14	-4.59	50.55	74	-23.45	peak
2705	42.51	-4.59	37.92	54	-16.08	AVG
11717	49.17	4.84	54.01	74	-19.99	peak
11717	37.09	4.84	41.93	54	-12.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11n20 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	64.31	-4.59	59.72	68.2	-8.48	peak
11096	55.86	4.21	60.07	74	-13.93	peak
11096	43.91	4.21	48.12	54	-5.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	62.18	-4.59	57.59	68.2	-10.61	peak
11096	55.69	4.21	59.9	74	-14.1	peak
11096	35.33	4.21	39.54	54	-14.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	64.18	-4.59	59.59	68.2	-8.61	peak
10523	55.64	4.21	59.85	68.2	-8.35	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	60.19	-4.59	55.6	68.2	-12.6	peak
10523	54.83	4.21	59.04	68.2	-9.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	55.83	-4.59	51.24	74	-22.76	peak
2705	47.15	-4.59	42.56	54	-11.44	AVG
11717	53.27	4.84	58.11	74	-15.89	peak
11717	36.67	4.84	41.51	54	-12.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	57.21	-4.59	52.62	74	-21.38	peak
2705	44.36	-4.59	39.77	54	-14.23	AVG
11717	50.99	4.84	55.83	74	-18.17	peak
11717	36.13	4.84	40.97	54	-13.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11n40 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	63.85	-4.59	59.26	68.2	-8.94	peak
11096	51.38	4.21	55.59	74	-18.41	peak
11096	42.46	4.21	46.67	54	-7.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.17	-4.59	56.58	68.2	-11.62	peak
11096	56.35	4.21	60.56	74	-13.44	peak
11096	36.89	4.21	41.1	54	-12.9	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	60.22	-4.59	55.63	68.2	-12.57	peak
10523	51.54	4.21	55.75	68.2	-12.45	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	55.84	-4.59	51.25	68.2	-16.95	peak
10523	51.89	4.21	56.1	68.2	-12.1	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11ac20 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	65.84	-4.59	61.25	68.2	-6.95	peak
11096	47.86	4.21	52.07	74	-21.93	peak
11096	38.74	4.21	42.95	54	-11.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	60.95	-4.59	56.36	68.2	-11.84	peak
11096	54.17	4.21	58.38	74	-15.62	peak
11096	36.44	4.21	40.65	54	-13.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	61.09	-4.59	56.5	68.2	-11.7	peak
10523	53.15	4.21	57.36	68.2	-10.84	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	55.54	-4.59	50.95	68.2	-17.25	peak
10523	51.14	4.21	55.35	68.2	-12.85	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	60.96	-4.59	56.37	74	-17.63	peak
2705	45.36	-4.59	40.77	54	-13.23	AVG
11717	51.76	4.84	56.6	74	-17.4	peak
11717	36.48	4.84	41.32	54	-12.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	58.12	-4.59	53.53	74	-20.47	peak
2705	44.93	-4.59	40.34	54	-13.66	AVG
11717	52.21	4.84	57.05	74	-16.95	peak
11717	36.49	4.84	41.33	54	-12.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ac40 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	62.36	-4.59	57.77	68.2	-10.43	peak
11096	49.91	4.21	54.12	74	-19.88	peak
11096	44.29	4.21	48.5	54	-5.5	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	60.91	-4.59	56.32	68.2	-11.88	peak
11096	53.48	4.21	57.69	74	-16.31	peak
11096	39.21	4.21	43.42	54	-10.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	60.31	-4.59	55.72	68.2	-12.48	peak
10523	54.73	4.21	58.94	68.2	-9.26	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.26	-4.59	52.67	68.2	-15.53	peak
10523	54.37	4.21	58.58	68.2	-9.62	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11ac80 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

CH 155

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	64.53	-4.59	59.94	68.2	-8.26	peak
11096	50.69	4.21	54.9	74	-19.1	peak
11096	46.09	4.21	50.3	54	-3.7	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.02	-4.59	56.43	68.2	-11.77	peak
11096	53.85	4.21	58.06	74	-15.94	peak
11096	35.44	4.21	39.65	54	-14.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. FREQUENCY STABILITY MEASUREMENT

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g)
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre>graph LR; SA[Spectrum Analyzer] --- EUT[EUT]; EUT --- TCh[Temperature Chamber]; TCh --- P[AC/DC Power supply];</pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

**Test Result as follows:**

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	12V	5744.987	-13	5825.013	13
	13.8 V	5745.019	19	5824.993	-7
	10.2V	5744.981	-19	5824.976	-24

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.982	-18	5824.984	-16
	-20	5745.012	12	5825.022	22
	-10	5745.007	7	5824.979	-21
	0	5745.028	28	5824.981	-19
	10	5744.988	-12	5824.968	-32
	20	5744.978	-22	5824.986	-14
	30	5745.011	11	5824.974	-26
	40	5744.987	-13	5824.965	-35
	50	5744.968	-32	5825.019	19



5. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used for test in this product is a Internal Antenna, need professional installation, It conforms to the standard requirements. The gain of Antenna 1, Antenna 2 and Antenna 3 is 3dBi.



WIFI ANTENNA

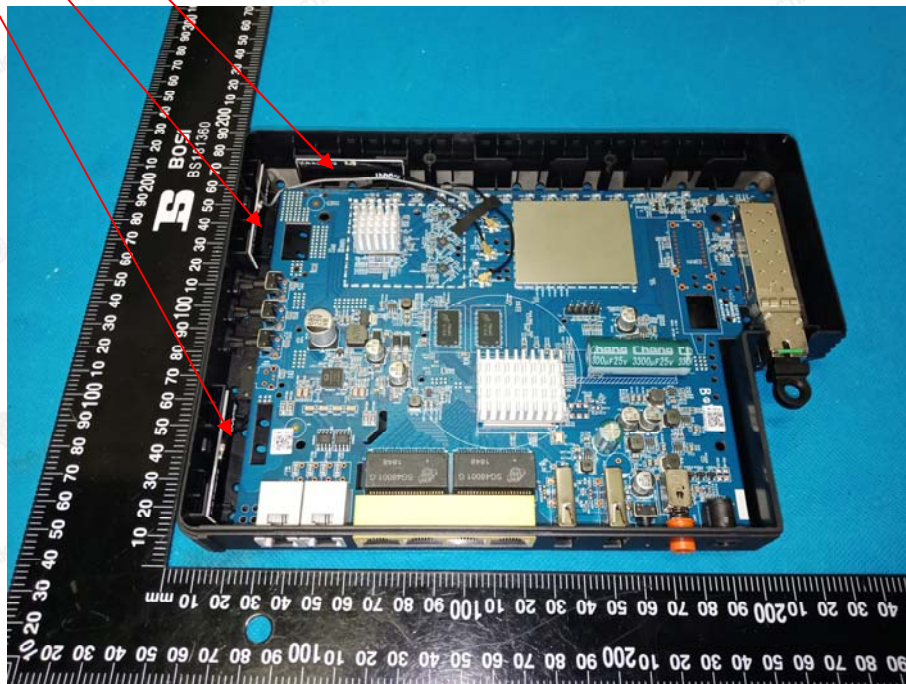



6. PHOTOGRAPHS OF TEST SETUP

Radiated Emission

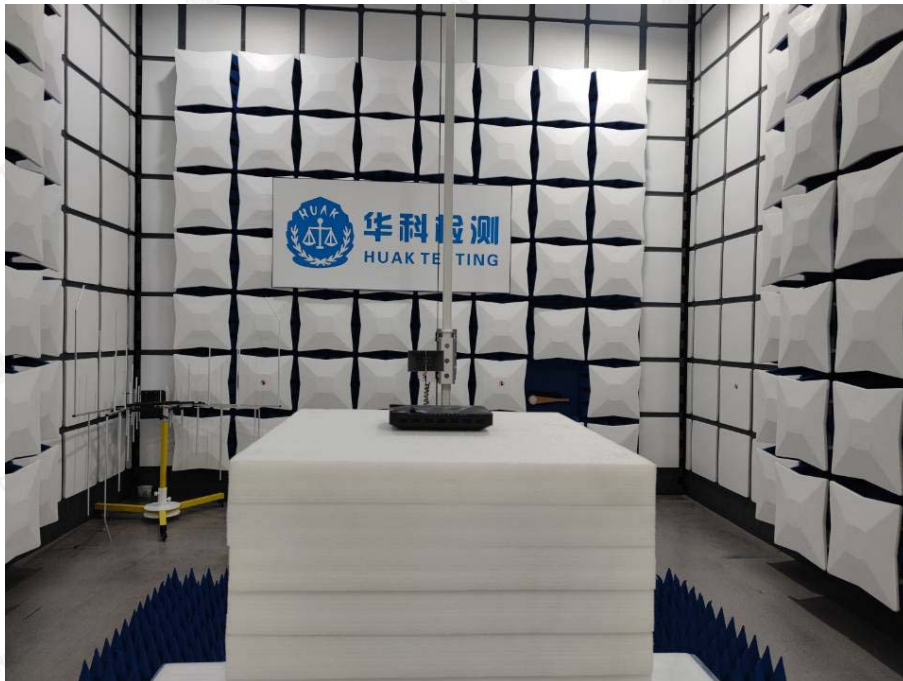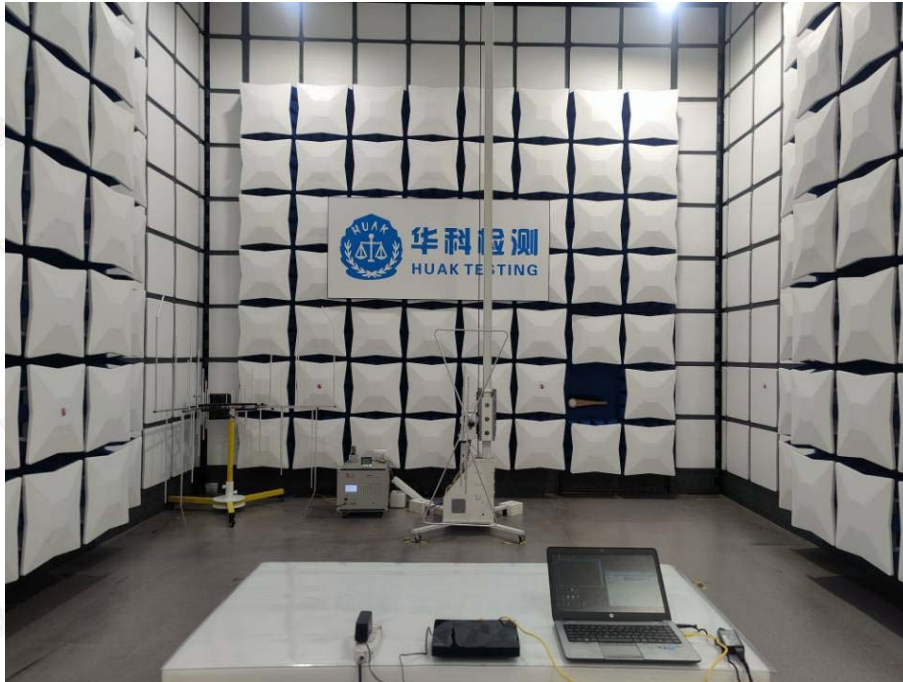


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Conducted Emission

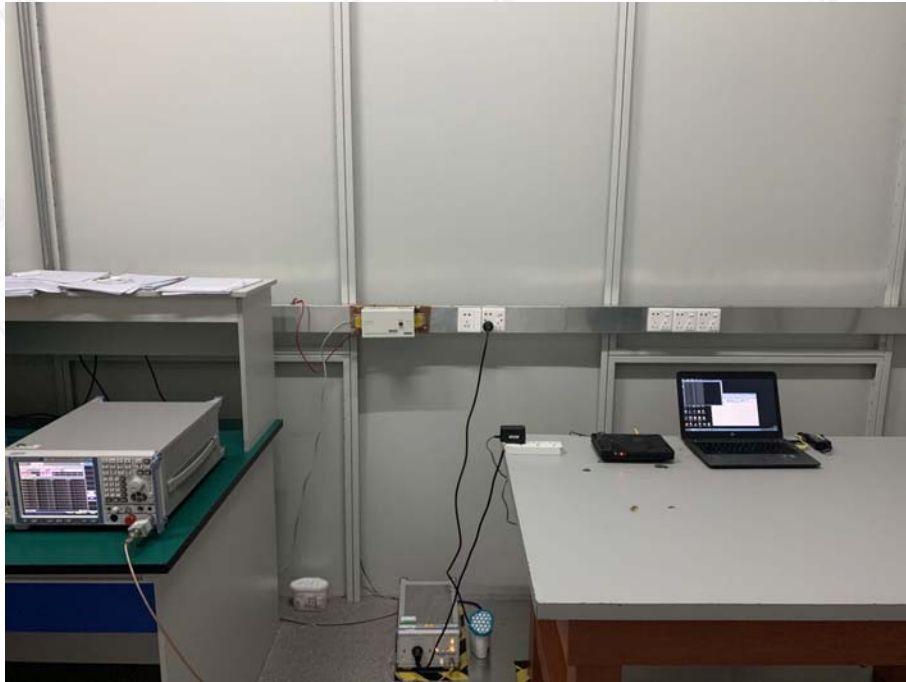

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. PHOTOS OF THE EUT

Reference to the reporter: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----