



TEST REPORT

Product Name: Media Player
FCC ID: 2AVZ8-IMGS-MTP02T2
Trademark: 
Model Number: iMGS-MTP02T2, iMGS-MTP02T21, iMGS-MTP04T2, iMGS-MTP04T21, iMGS-MTP06T2, iMGS-MTP06T21, iMGS-MTP08T2, iMGS-MTP08T21, iMGS-MTP10T2, iMGS-MTP10T21
Prepared For: iMGS SMART GLASS TECHNOLOGIES(FUJIAN) CO., LTD.
Address: NO.26, TINGZHOU SOUTH ROAD, CEWU, CHANGTING, LONGYAN CITY, FUJIAN PROVINCE, CHINA
Manufacturer: iMGS SMART GLASS TECHNOLOGIES(FUJIAN) CO., LTD.
Address: NO.26, TINGZHOU SOUTH ROAD, CEWU, CHANGTING, LONGYAN CITY, FUJIAN PROVINCE, CHINA
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Mar. 31, 2020
Sample tested Date: Mar. 31, 2020 to Apr. 09, 2020
Issue Date: Apr. 09, 2020
Report No.: CTB200409021RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Victory

Reviewed by:

Rita Xiao

Approved by:

Sherwin Qian/ Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
8.4 Test Result	41
9. CONDUCTED OUTPUT POWER	49
9.1 Block Diagram Of Test Setup	49
9.2 Limit	49
9.3 Test procedure	49
9.4 Test Result	50
10. 6DB OCCUPIED BANDWIDTH	55
10.1 Block Diagram Of Test Setup	55
10.2 Limit	55
10.3 Test procedure	55
10.4 Test Result	56
11. POWER SPECTRAL DENSITY	61
11.1 Block Diagram Of Test Setup	61
11.2 Limit	61

11.3 Test procedure 61
11.4 Test Result 62
12. ANTENNA REQUIREMENT 67
13. EUT PHOTOGRAPHS 68
14. EUT TEST SETUP PHOTOGRAPHS 72

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB200409021RFX	Apr. 09, 2020	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	iMGS-MTP02T2, iMGS-MTP02T21, iMGS-MTP04T2, iMGS-MTP04T21, iMGS-MTP06T2, iMGS-MTP06T21, iMGS-MTP08T2, iMGS-MTP08T21, iMGS-MTP10T2, iMGS-MTP10T21
Model Description:	All model's the function, software and electric circuit are the same, only with the product appearance and model named different. Test sample model: iMGS-MTP02T2
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-24762MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 13.513dBm
Type of Modulation:	WiFi: DQPSK, DBPSK, DSSS, CCK and OFDM
Antenna installation:	WiFi: External antenna
Antenna Gain:	WiFi (2.4G) : 2.21dBi
Ratings:	DC 5V, 2A, charging from adapter
Adapter:	MODEL:0520 INPUT:100-240V AC50/60Hz OUTPUT:5V $\overline{\text{---}}$ 2A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Laptop	DELL	Inspiron5 570	JR4G1A00DPC	AE
2	AC Adaptor	DELL	HA45NM140	CN-00285K-CH 200-88V-OEYC	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle > 98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	5
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Oct. 17, 2019	Oct. 16, 2020
2	Power Sensor	Agilent	U2021XA	MY56120032	Nov. 02, 2019	Nov. 01, 2020
3	Power Sensor	Agilent	U2021XA	MY56120034	Nov. 02, 2019	Nov. 01, 2020
4	Communication test set	R&S	CMW500	118735	Nov. 02, 2019	Nov. 01, 2020
5	Spectrum Analyzer	R&S	FSP40	100550	Nov. 02, 2019	Nov. 01, 2020
6	Signal Generator	Agilent	N5181A	MY49060920	Nov. 03, 2019	Nov. 02, 2020
7	Signal Generator	Agilent	N5182A	MY47420195	Nov. 03, 2019	Nov. 02, 2020
8	Communication test set	R&S	CMU200	119978	Nov. 02, 2019	Nov. 01, 2020
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Nov. 02, 2019	Nov. 01, 2020
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Nov. 02, 2019	Nov. 01, 2020
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Nov. 02, 2019	Nov. 01, 2020
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Nov. 02, 2019	Nov. 01, 2020
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Nov. 02, 2019	Nov. 01, 2020
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 10, 2019	Nov. 09, 2020
17	Receiver	R&S	ESPI	100362	Nov. 02, 2019	Nov. 01, 2020

18	Amplifier	HP	8447E	2945A02747	Nov. 03, 2019	Nov. 02, 2020
19	Amplifier	Agilent	8449B	3008A01838	Nov. 03, 2019	Nov. 02, 2020
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	Nov. 02, 2019	Nov. 01, 2020
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2019	Nov. 01, 2020
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Nov. 02, 2019	Nov. 01, 2020
24	loop antenna	ZHINAN	ZN30900A	/	Nov. 02, 2019	Nov. 01, 2020
25	Horn antenna	A/H/System	SAS-574	588	Nov. 02, 2019	Nov. 01, 2020
26	Amplifier	AEROFLEX	/	S/N/ 097	Nov. 02, 2019	Nov. 01, 2020

Conducted emissions Test						
27	Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
28	AMN	ROHDE&SC HWARZ	ESH3-Z5	831551852	Nov. 02, 2019	Nov. 01, 2020
29	Pulse limiter	ROHDE&SC HWARZ	ESH3Z2	357881052	Nov. 02, 2019	Nov. 01, 2020
30	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCS30	834115/006	Nov. 02, 2019	Nov. 01, 2020
31	Coaxial cable	ZDECL	Z302S	18091904	Nov. 02, 2019	Nov. 01, 2020
32	ISN	TESEQ	NTFM8158	NTFM8158# 183	Nov. 02, 2019	Nov. 01, 2020
33	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCI	10428	Nov. 02, 2019	Nov. 01, 2020
34	Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

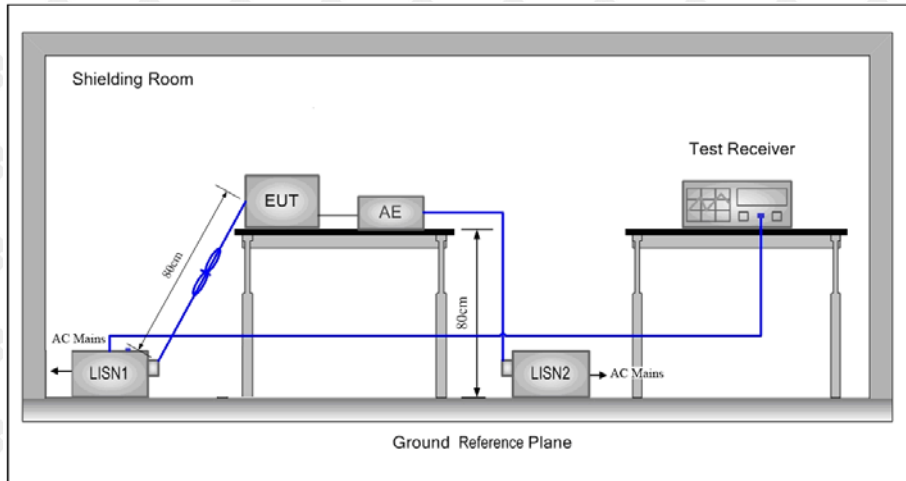

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz
90.0 dBuV

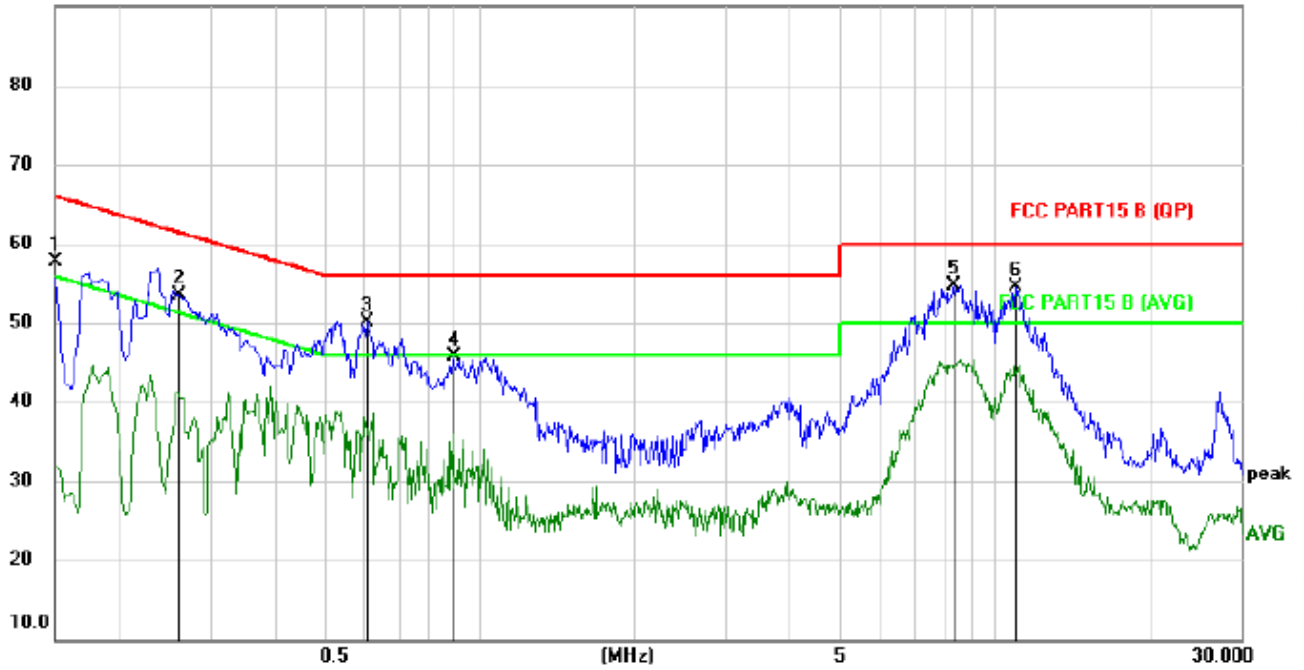


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	47.63	10.08	57.71	66.00	-8.29	peak	
2		0.2620	43.40	10.14	53.54	61.37	-7.83	peak	
3		0.6060	39.92	10.23	50.15	56.00	-5.85	peak	
4		0.8940	35.49	10.17	45.66	56.00	-10.34	peak	
5	*	8.3619	44.16	10.59	54.75	60.00	-5.25	peak	
6		10.9659	43.76	10.65	54.41	60.00	-5.59	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
 AC 120V 60Hz
 90.0 dBuV

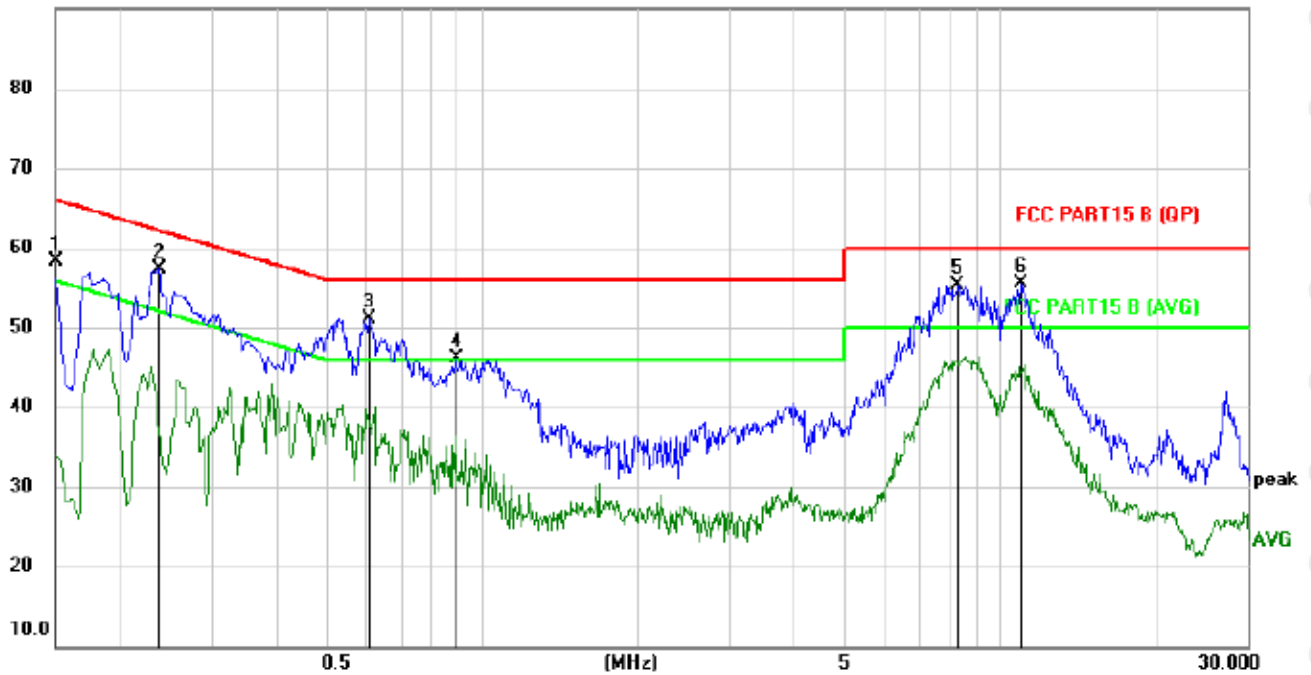

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	48.13	10.08	58.21	66.00	-7.79	peak	
2		0.2380	47.19	10.13	57.32	62.17	-4.85	peak	
3		0.6060	40.92	10.23	51.15	56.00	-4.85	peak	
4		0.8940	35.99	10.17	46.16	56.00	-9.84	peak	
5		8.2858	44.79	10.59	55.38	60.00	-4.62	peak	
6	*	10.9659	44.76	10.65	55.41	60.00	-4.59	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

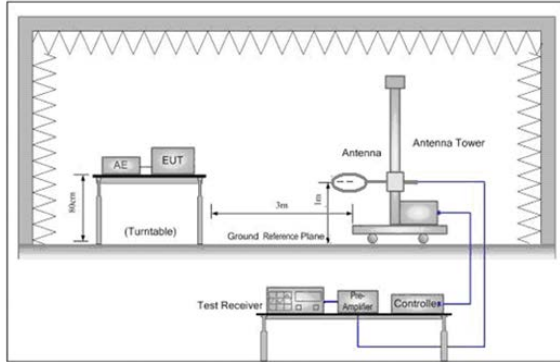


Figure 1. Below 30MHz

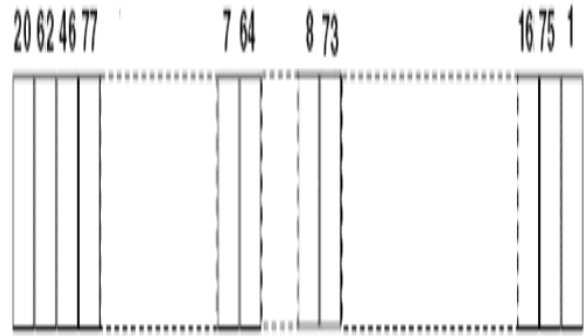


Figure 2. 30MHz to 1GHz

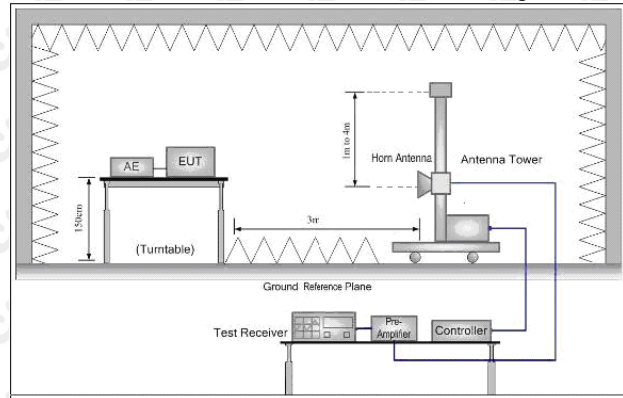


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

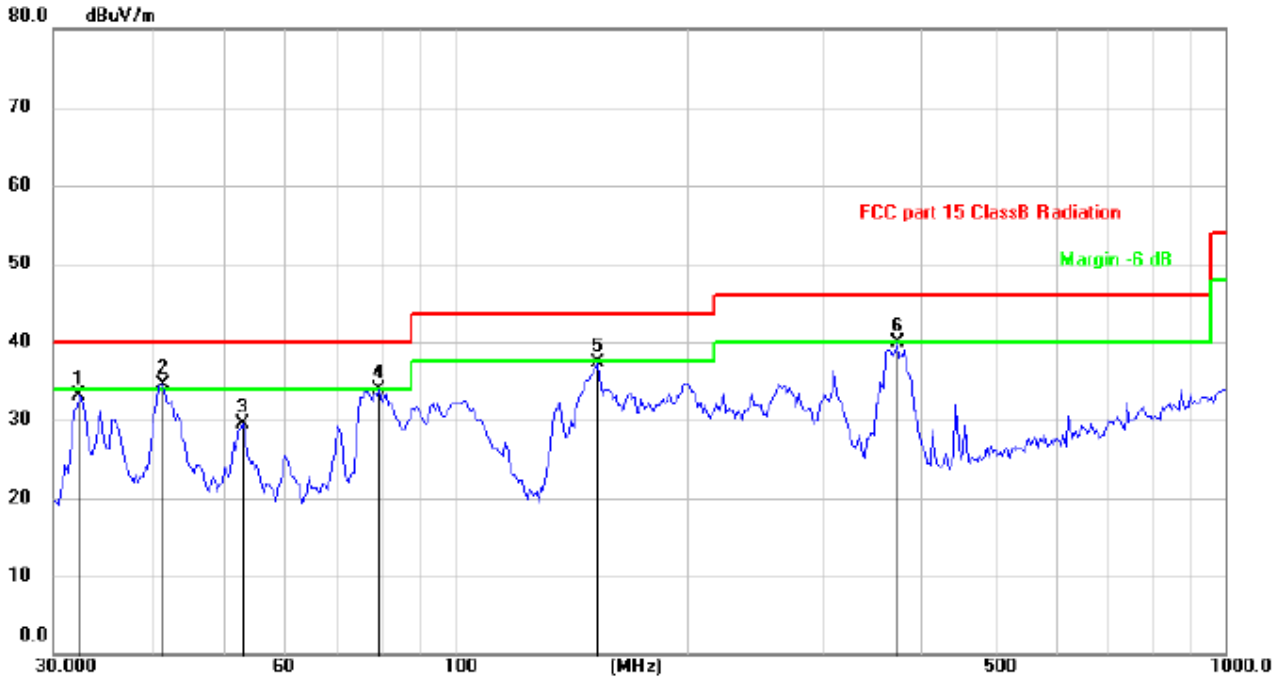

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		32.4059	40.32	-7.18	33.14	40.00	-6.86			peak
2	*	41.7129	40.20	-5.77	34.43	40.00	-5.57			peak
3		52.9453	35.84	-6.31	29.53	40.00	-10.47			peak
4		79.5209	44.24	-10.35	33.89	40.00	-6.11			peak
5		152.6641	43.62	-6.30	37.32	43.50	-6.18			peak
6		374.6225	43.01	-3.16	39.85	46.00	-6.15			peak

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

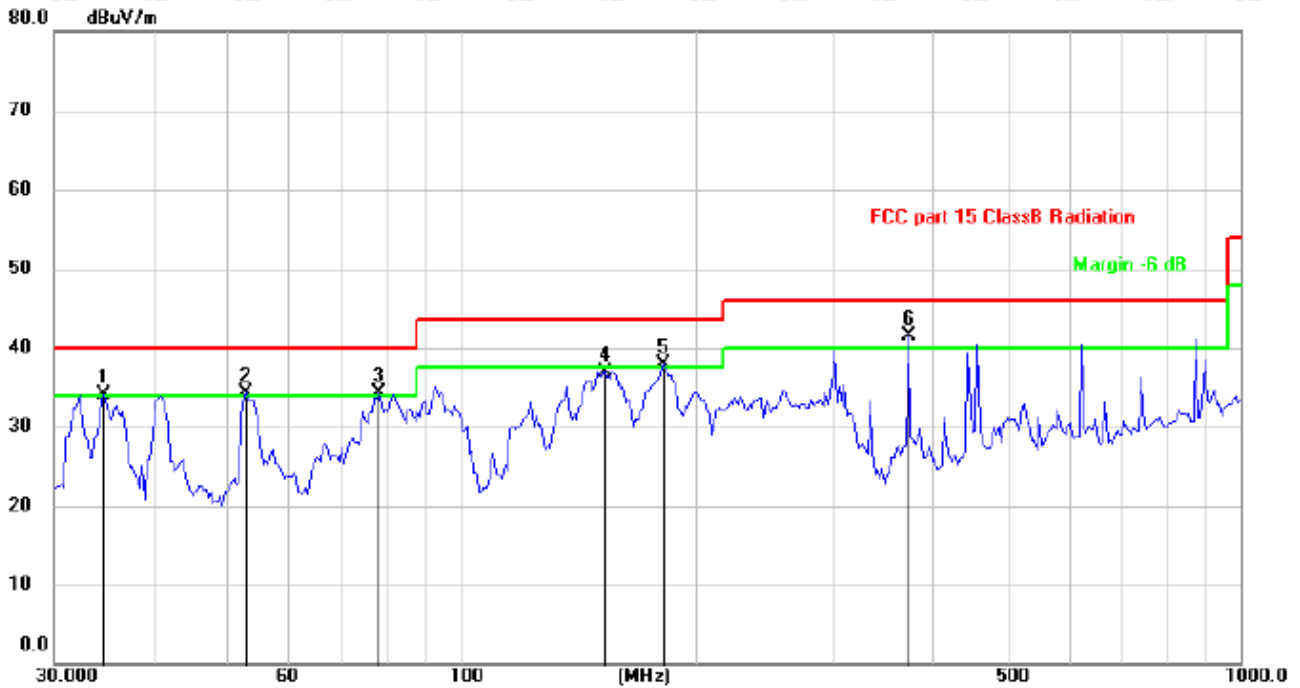

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	!	34.7601	40.88	-6.74	34.14	40.00	-5.86			peak
2	!	52.9453	40.64	-6.31	34.33	40.00	-5.67			peak
3	!	78.4133	44.55	-10.16	34.39	40.00	-5.61			peak
4		152.6641	43.30	-6.30	37.00	43.50	-6.50			peak
5	!	181.9202	46.30	-8.47	37.83	43.50	-5.67			peak
6	*	374.6225	44.75	-3.16	41.59	46.00	-4.41			peak

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	63.79	-3.64	60.15	74	-13.85	peak
4824	48.97	-3.64	45.33	54	-8.67	AVG
7236	58.31	-0.95	57.36	74	-16.64	peak
7236	43.77	-0.95	42.82	54	-11.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	67.16	-3.64	63.52	74	-10.48	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	58.83	-0.95	57.88	74	-16.12	peak
7236	45.79	-0.95	44.84	54	-9.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	63.54	-3.51	60.03	74	-13.97	peak
4874	48.93	-3.51	45.42	54	-8.58	AVG
7311	59.21	-0.82	58.39	74	-15.61	peak
7311	44.16	-0.82	43.34	54	-10.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	65.36	-3.51	61.85	74	-12.15	peak
4874	48.92	-3.51	45.41	54	-8.59	AVG
7311	60.45	-0.82	59.63	74	-14.37	peak
7311	44.14	-0.82	43.32	54	-10.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	62.58	-3.43	59.15	74	-14.85	peak
4924	46.89	-3.43	43.46	54	-10.54	AVG
7386	59.75	-0.75	59.00	74	-15.00	peak
7386	44.08	-0.75	43.33	54	-10.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	64.67	-3.43	61.24	74	-12.76	peak
4924	47.21	-3.43	43.78	54	-10.22	AVG
7386	58.93	-0.75	58.18	74	-15.82	peak
7386	42.26	-0.75	41.51	54	-12.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	63.73	-3.64	60.09	74	-13.91	peak
4824	50.26	-3.64	46.62	54	-7.38	AVG
7236	57.23	-0.95	56.28	74	-17.72	peak
7236	45.37	-0.95	44.42	54	-9.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	63.95	-3.64	60.31	74	-13.69	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	59.10	-0.95	58.15	74	-15.85	peak
7236	43.37	-0.95	42.42	54	-11.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.53	-3.51	61.02	74	-12.98	peak
4874	49.41	-3.51	45.90	54	-8.10	AVG
7311	57.66	-0.82	56.84	74	-17.16	peak
7311	45.20	-0.82	44.38	54	-9.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.45	-3.51	60.94	74	-13.06	peak
4874	47.77	-3.51	44.26	54	-9.74	AVG
7311	57.99	-0.82	57.17	74	-16.83	peak
7311	41.63	-0.82	40.81	54	-13.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.84	-3.43	60.41	74	-13.59	peak
4924	49.39	-3.43	45.96	54	-8.04	AVG
7386	58.12	-0.75	57.37	74	-16.63	peak
7386	44.02	-0.75	43.27	54	-10.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.70	-3.43	60.27	74	-13.73	peak
4924	47.89	-3.43	44.46	54	-9.54	AVG
7386	56.05	-0.75	55.30	74	-18.70	peak
7386	42.29	-0.75	41.54	54	-12.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	64.87	-3.64	61.23	74	-12.77	peak
4824	49.18	-3.64	45.54	54	-8.46	AVG
7236	58.78	-0.95	57.83	74	-16.17	peak
7236	43.95	-0.95	43.00	54	-11.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	65.01	-3.64	61.37	74	-12.63	peak
4824	49.79	-3.64	46.15	54	-7.85	AVG
7236	57.26	-0.95	56.31	74	-17.69	peak
7236	43.63	-0.95	42.68	54	-11.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	64.30	-3.51	60.79	74.00	-13.21	peak
4874.00	46.70	-3.51	43.19	54.00	-10.81	AVG
7311.00	57.73	-0.82	56.91	74.00	-17.09	peak
7311.00	44.93	-0.82	44.11	54.00	-9.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	61.74	-3.51	58.23	74.00	-15.77	peak
4874.00	48.52	-3.51	45.01	54.00	-8.99	AVG
7311.00	58.51	-0.82	57.69	74.00	-16.31	peak
7311.00	43.53	-0.82	42.71	54.00	-11.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	61.93	-3.43	58.50	74	-15.50	peak
4924	46.94	-3.43	43.51	54	-10.49	AVG
7386	56.64	-0.75	55.89	74	-18.11	peak
7386	43.58	-0.75	42.83	54	-11.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	64.64	-3.43	61.21	74	-12.79	peak
4924	47.62	-3.43	44.19	54	-9.81	AVG
7386	57.24	-0.75	56.49	74	-17.51	peak
7386	42.50	-0.75	41.75	54	-12.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.66	-3.63	61.03	74	-12.97	peak
4844	48.96	-3.63	45.33	54	-8.67	AVG
7266	58.48	-0.94	57.54	74	-16.46	peak
7266	44.87	-0.94	43.93	54	-10.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.04	-3.63	60.41	74	-13.59	peak
4844	49.10	-3.63	45.47	54	-8.53	AVG
7266	58.75	-0.94	57.81	74	-16.19	peak
7266	44.40	-0.94	43.46	54	-10.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.85	-3.51	59.34	74	-14.66	peak
4874	47.16	-3.51	43.65	54	-10.35	AVG
7311	60.92	-0.82	60.10	74	-13.90	peak
7311	46.22	-0.82	45.40	54	-8.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.51	-3.51	43.00	54	-11.00	AVG
7311	56.62	-0.82	55.80	74	-18.20	peak
7311	43.34	-0.82	42.52	54	-11.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	64.77	-3.43	61.34	74	-12.66	peak
4904	49.56	-3.43	46.13	54	-7.87	AVG
7356	56.76	-0.75	56.01	74	-17.99	peak
7356	42.99	-0.75	42.24	54	-11.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	63.54	-3.43	60.11	74	-13.89	peak
4904	46.60	-3.43	43.17	54	-10.83	AVG
7356	57.34	-0.75	56.59	74	-17.41	peak
7356	42.30	-0.75	41.55	54	-12.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	57.38	-5.81	51.57	74	-22.43	
2390	/	-5.81	/	54	/	AVG
2399	63.66	-5.84	57.82	74	-16.18	peak
2399	47.98	-5.84	42.14	54	-11.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	57.50	-5.81	51.69	74	-22.31	
2390	/	-5.81	/	54	/	AVG
2399	62.70	-5.84	56.86	74	-17.14	peak
2399	46.80	-5.84	40.96	54	-13.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.92	-5.65	51.27	74	-22.73	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	55.85	-5.65	50.20	74	-23.80	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	59.53	-5.81	53.72	74	-20.28	peak
2390	/	-5.81	/	54	/	AVG
2399	63.46	-5.84	57.62	74	-16.38	peak
2399	46.32	-5.84	40.48	54	-13.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.38	-5.81	50.57	74	-23.43	peak
2390	/	-5.81	/	54	/	AVG
2399	62.41	-5.84	56.57	74	-17.43	peak
2399	46.67	-5.84	40.83	54	-13.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.44	-5.65	50.79	74	-23.21	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.89	-5.65	51.24	74	-22.76	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	56.75	-5.81	50.94	74	-23.06	peak
2390	/	-5.81	/	54	/	AVG
2399	63.15	-5.84	57.31	74	-16.69	peak
2399	48.67	-5.84	42.83	54	-11.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	55.66	-5.81	49.85	74	-24.15	peak
2390	/	-5.81	/	54	/	AVG
2399	61.09	-5.84	55.25	74	-18.75	peak
2399	46.79	-5.84	40.95	54	-13.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.40	-5.65	50.75	74	-23.25	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	55.65	-5.65	50.00	74	-24.00	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	58.15	-5.81	52.34	74	-21.66	peak
2390	/	-5.81	/	54	/	AVG
2399	63.58	-5.84	57.74	74	-16.26	peak
2399	46.91	-5.84	41.07	54	-12.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	58.32	-5.81	52.51	74	-21.49	peak
2390	/	-5.81	/	54	/	AVG
2399	60.95	-5.84	55.11	74	-18.89	peak
2399	45.84	-5.84	40.00	54	-14.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	58.27	-5.65	52.62	74	-21.38	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	55.24	-5.65	49.59	74	-24.41	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

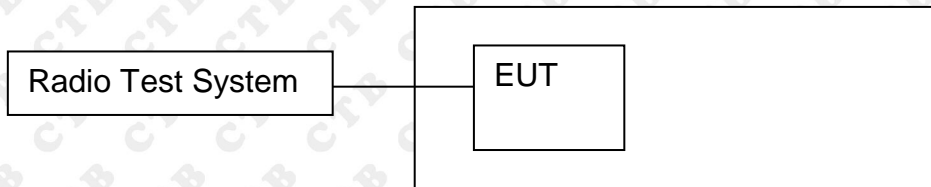


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Blow 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

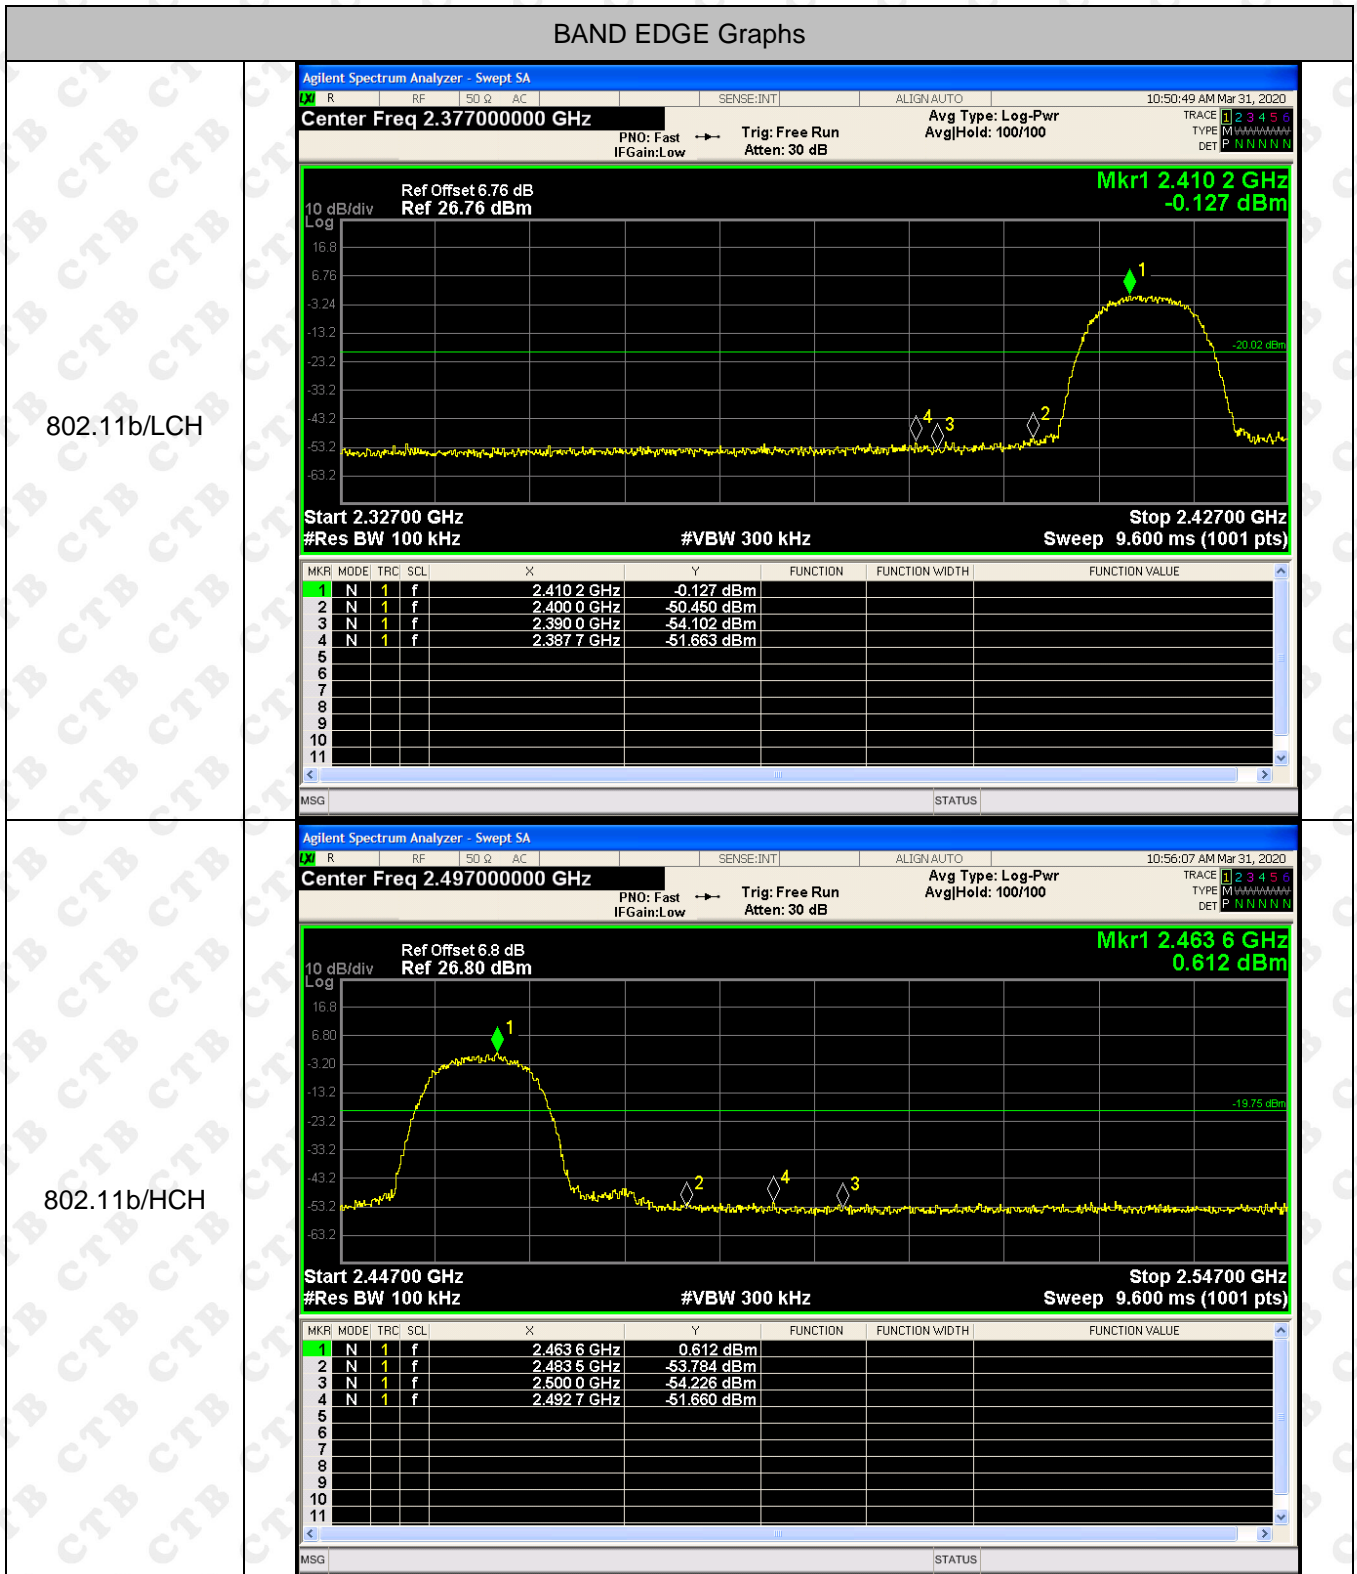


BAND EDGE Graphs

802.11g/LCH

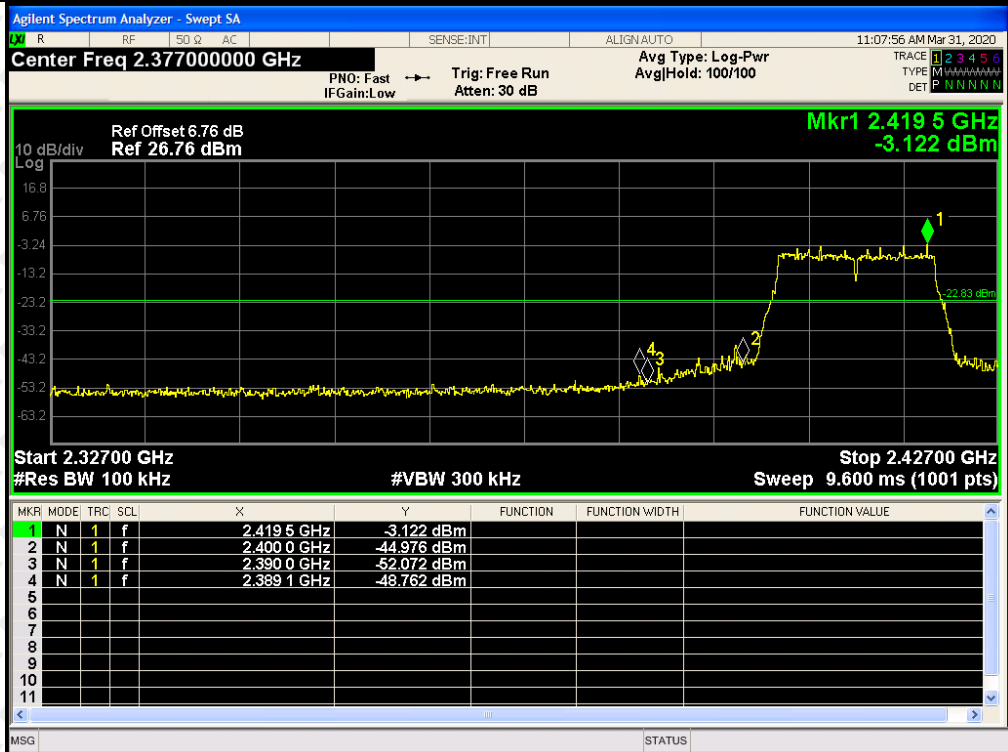


802.11g/HCH

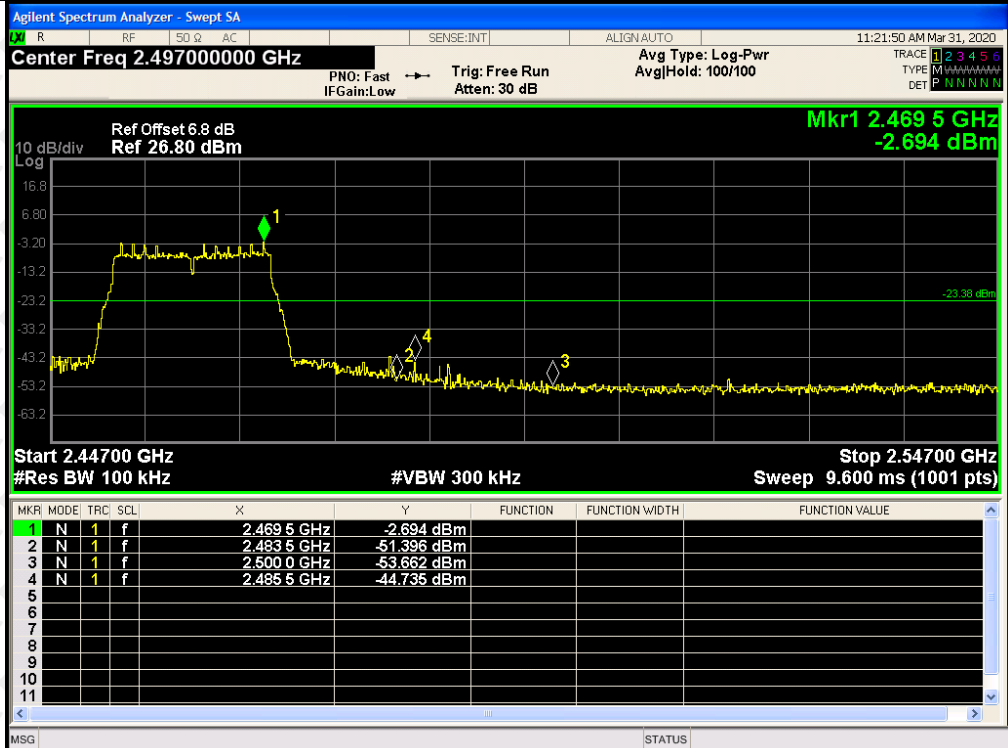


BAND EDGE Graphs

802.11n(HT20)/L
CH

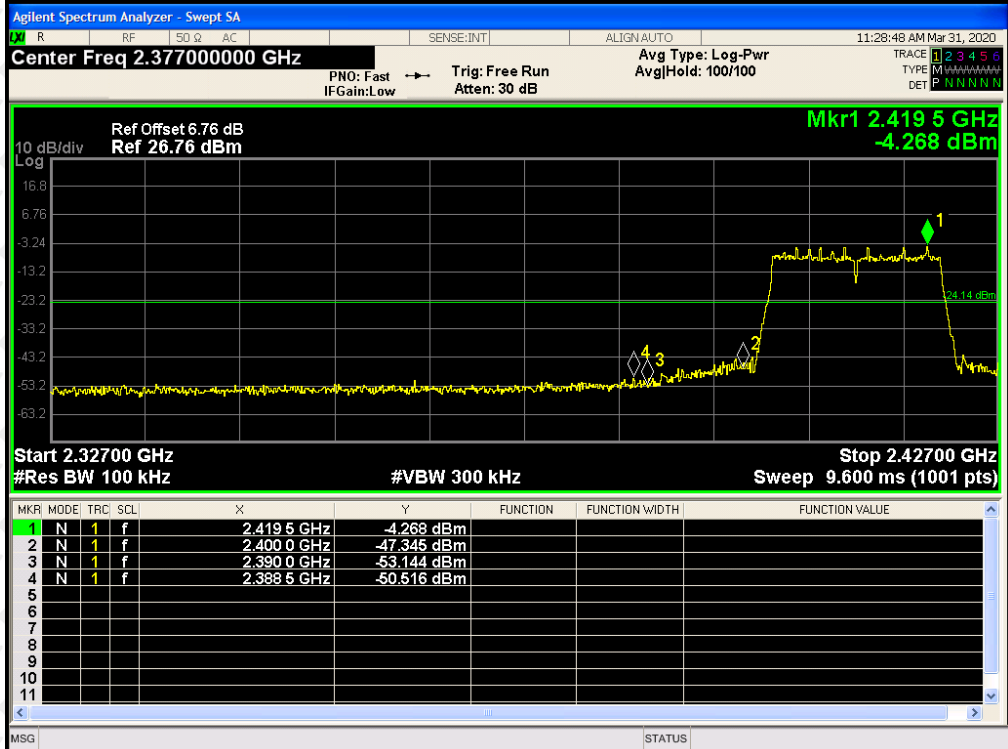


802.11n(HT20)/H
CH

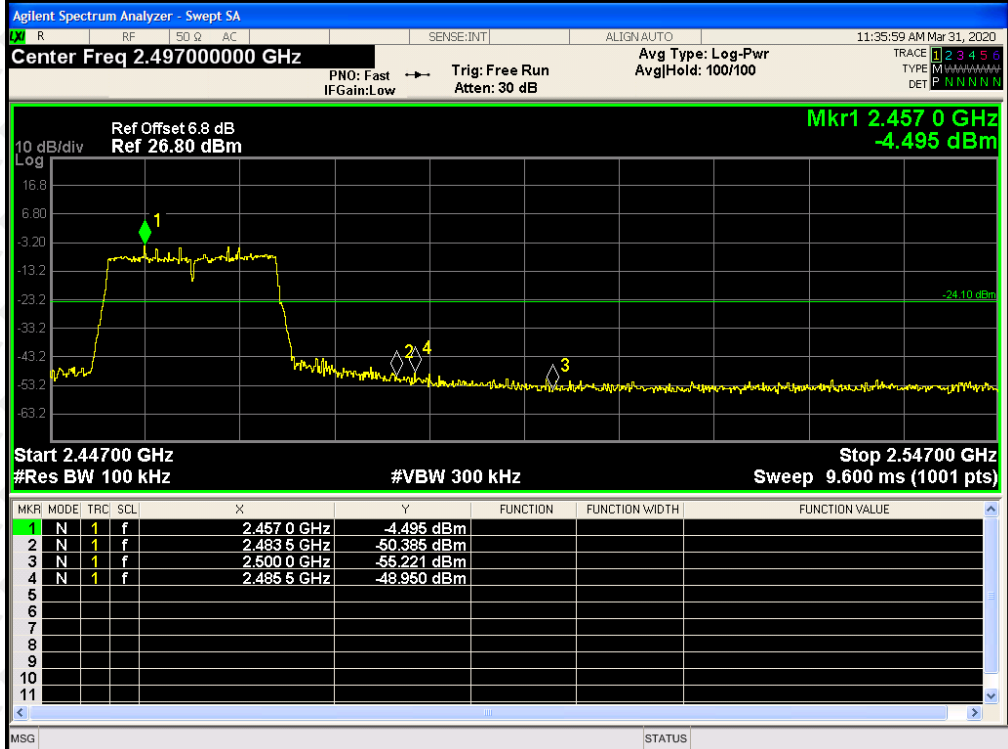


BAND EDGE Graphs

802.11n(HT40)/L
CH

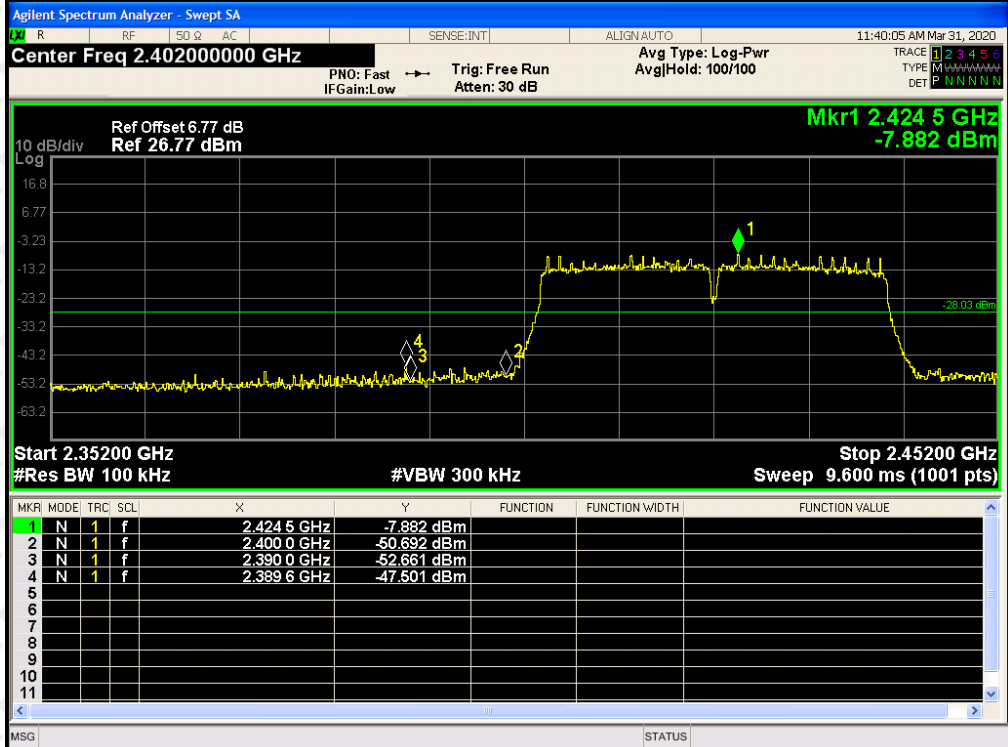

802.11n(HT40)/H
CH

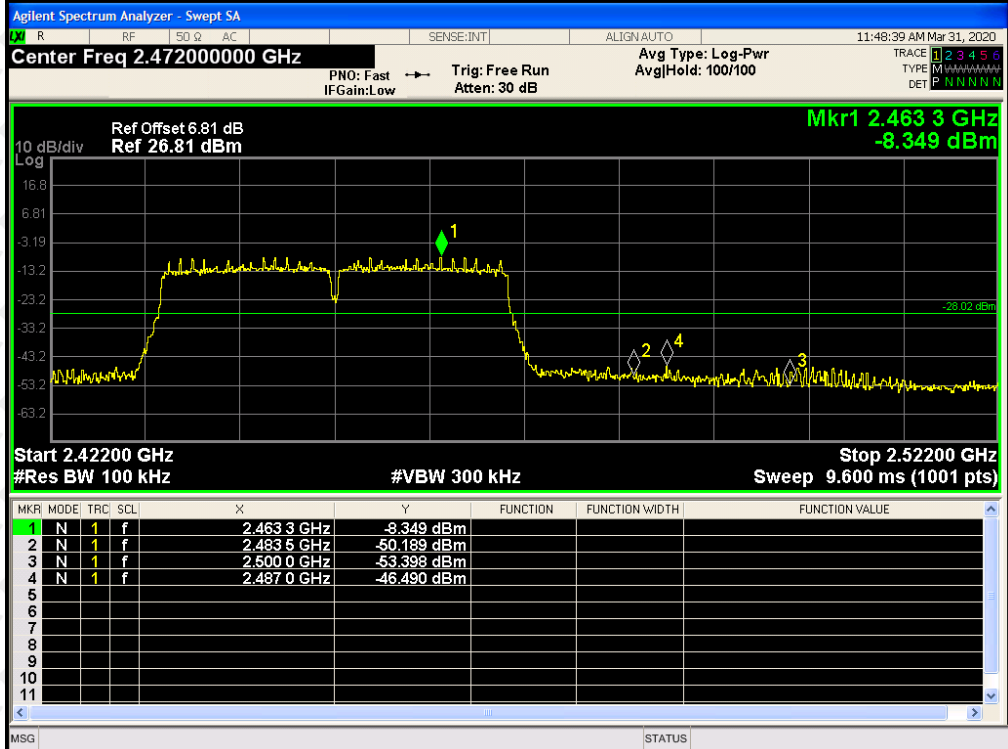

RF Conducted Spurious Emissions Graphs

<p>802.11b /LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 GHz</td> <td>-0.926 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.625 GHz</td> <td>-47.929 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.749 GHz</td> <td>-60.124 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.395 GHz</td> <td>-60.530 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.494 GHz</td> <td>-61.360 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 GHz	-0.926 dBm				2	N	1	f	24.625 GHz	-47.929 dBm				3	N	1	f	4.749 GHz	-60.124 dBm				4	N	1	f	7.395 GHz	-60.530 dBm				5	N	1	f	9.494 GHz	-61.360 dBm			
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.402 GHz	-0.926 dBm																																																		
2	N	1	f	24.625 GHz	-47.929 dBm																																																		
3	N	1	f	4.749 GHz	-60.124 dBm																																																		
4	N	1	f	7.395 GHz	-60.530 dBm																																																		
5	N	1	f	9.494 GHz	-61.360 dBm																																																		
<p>802.11b /MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.427 GHz</td> <td>-0.575 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.675 GHz</td> <td>-47.602 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.074 GHz</td> <td>-60.803 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.495 GHz</td> <td>-60.911 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.668 GHz</td> <td>-62.632 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427 GHz	-0.575 dBm				2	N	1	f	24.675 GHz	-47.602 dBm				3	N	1	f	5.074 GHz	-60.803 dBm				4	N	1	f	7.495 GHz	-60.911 dBm				5	N	1	f	9.668 GHz	-62.632 dBm			
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.427 GHz	-0.575 dBm																																																		
2	N	1	f	24.675 GHz	-47.602 dBm																																																		
3	N	1	f	5.074 GHz	-60.803 dBm																																																		
4	N	1	f	7.495 GHz	-60.911 dBm																																																		
5	N	1	f	9.668 GHz	-62.632 dBm																																																		
<p>802.11b /HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.452 GHz</td> <td>-0.703 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.675 GHz</td> <td>-48.536 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.124 GHz</td> <td>-61.284 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.395 GHz</td> <td>-60.626 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.893 GHz</td> <td>-62.326 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 GHz	-0.703 dBm				2	N	1	f	24.675 GHz	-48.536 dBm				3	N	1	f	5.124 GHz	-61.284 dBm				4	N	1	f	7.395 GHz	-60.626 dBm				5	N	1	f	9.893 GHz	-62.326 dBm			
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.452 GHz	-0.703 dBm																																																		
2	N	1	f	24.675 GHz	-48.536 dBm																																																		
3	N	1	f	5.124 GHz	-61.284 dBm																																																		
4	N	1	f	7.395 GHz	-60.626 dBm																																																		
5	N	1	f	9.893 GHz	-62.326 dBm																																																		

RF Conducted Spurious Emissions Graphs

<p>802.11g /LCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 GHz</td> <td>-4.002 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.680 GHz</td> <td>-47.297 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.799 GHz</td> <td>-60.953 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.145 GHz</td> <td>-60.694 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.669 GHz</td> <td>-61.557 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 GHz	-4.002 dBm				2	N	1	f	24.680 GHz	-47.297 dBm				3	N	1	f	4.799 GHz	-60.953 dBm				4	N	1	f	7.145 GHz	-60.694 dBm				5	N	1	f	9.669 GHz	-61.557 dBm				
MFR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.402 GHz	-4.002 dBm																																																			
2	N	1	f	24.680 GHz	-47.297 dBm																																																			
3	N	1	f	4.799 GHz	-60.953 dBm																																																			
4	N	1	f	7.145 GHz	-60.694 dBm																																																			
5	N	1	f	9.669 GHz	-61.557 dBm																																																			
<p>802.11g /MCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.427 GHz</td> <td>-4.318 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.626 GHz</td> <td>-47.931 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.799 GHz</td> <td>-60.420 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.296 GHz</td> <td>-60.116 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.634 GHz</td> <td>-61.650 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427 GHz	-4.318 dBm				2	N	1	f	24.626 GHz	-47.931 dBm				3	N	1	f	4.799 GHz	-60.420 dBm				4	N	1	f	7.296 GHz	-60.116 dBm				5	N	1	f	9.634 GHz	-61.650 dBm				
MFR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.427 GHz	-4.318 dBm																																																			
2	N	1	f	24.626 GHz	-47.931 dBm																																																			
3	N	1	f	4.799 GHz	-60.420 dBm																																																			
4	N	1	f	7.296 GHz	-60.116 dBm																																																			
5	N	1	f	9.634 GHz	-61.650 dBm																																																			
<p>802.11g /HCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.477 GHz</td> <td>-3.276 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.626 GHz</td> <td>-47.451 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.074 GHz</td> <td>-61.133 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.421 GHz</td> <td>-60.547 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.768 GHz</td> <td>-61.713 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477 GHz	-3.276 dBm				2	N	1	f	24.626 GHz	-47.451 dBm				3	N	1	f	5.074 GHz	-61.133 dBm				4	N	1	f	7.421 GHz	-60.547 dBm				5	N	1	f	9.768 GHz	-61.713 dBm				
MFR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.477 GHz	-3.276 dBm																																																			
2	N	1	f	24.626 GHz	-47.451 dBm																																																			
3	N	1	f	5.074 GHz	-61.133 dBm																																																			
4	N	1	f	7.421 GHz	-60.547 dBm																																																			
5	N	1	f	9.768 GHz	-61.713 dBm																																																			

RF Conducted Spurious Emissions Graphs


<p>802.11n (HT20)/ LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 GHz</td><td></td><td></td><td>-4.390 dBm</td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.626 GHz</td><td></td><td></td><td>-47.941 dBm</td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.724 GHz</td><td></td><td></td><td>-50.764 dBm</td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.321 GHz</td><td></td><td></td><td>-50.216 dBm</td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.544 GHz</td><td></td><td></td><td>-50.795 dBm</td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 GHz			-4.390 dBm	2	N	1	f	24.626 GHz			-47.941 dBm	3	N	1	f	4.724 GHz			-50.764 dBm	4	N	1	f	7.321 GHz			-50.216 dBm	5	N	1	f	9.544 GHz			-50.795 dBm	6								7								8								9								10								11								
MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																											
1	N	1	f	2.402 GHz			-4.390 dBm																																																																																											
2	N	1	f	24.626 GHz			-47.941 dBm																																																																																											
3	N	1	f	4.724 GHz			-50.764 dBm																																																																																											
4	N	1	f	7.321 GHz			-50.216 dBm																																																																																											
5	N	1	f	9.544 GHz			-50.795 dBm																																																																																											
6																																																																																																		
7																																																																																																		
8																																																																																																		
9																																																																																																		
10																																																																																																		
11																																																																																																		
<p>802.11n (HT20)/ MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.427 GHz</td><td></td><td></td><td>-7.392 dBm</td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.650 GHz</td><td></td><td></td><td>-47.918 dBm</td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.749 GHz</td><td></td><td></td><td>-50.555 dBm</td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.446 GHz</td><td></td><td></td><td>-50.520 dBm</td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.634 GHz</td><td></td><td></td><td>-51.714 dBm</td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427 GHz			-7.392 dBm	2	N	1	f	24.650 GHz			-47.918 dBm	3	N	1	f	4.749 GHz			-50.555 dBm	4	N	1	f	7.446 GHz			-50.520 dBm	5	N	1	f	9.634 GHz			-51.714 dBm	6								7								8								9								10								11								
MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																											
1	N	1	f	2.427 GHz			-7.392 dBm																																																																																											
2	N	1	f	24.650 GHz			-47.918 dBm																																																																																											
3	N	1	f	4.749 GHz			-50.555 dBm																																																																																											
4	N	1	f	7.446 GHz			-50.520 dBm																																																																																											
5	N	1	f	9.634 GHz			-51.714 dBm																																																																																											
6																																																																																																		
7																																																																																																		
8																																																																																																		
9																																																																																																		
10																																																																																																		
11																																																																																																		
<p>802.11n (HT20)/ HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.452 GHz</td><td></td><td></td><td>-7.803 dBm</td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.626 GHz</td><td></td><td></td><td>-47.944 dBm</td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.799 GHz</td><td></td><td></td><td>-50.923 dBm</td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.446 GHz</td><td></td><td></td><td>-50.387 dBm</td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.643 GHz</td><td></td><td></td><td>-52.228 dBm</td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 GHz			-7.803 dBm	2	N	1	f	24.626 GHz			-47.944 dBm	3	N	1	f	4.799 GHz			-50.923 dBm	4	N	1	f	7.446 GHz			-50.387 dBm	5	N	1	f	9.643 GHz			-52.228 dBm	6								7								8								9								10								11								
MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																											
1	N	1	f	2.452 GHz			-7.803 dBm																																																																																											
2	N	1	f	24.626 GHz			-47.944 dBm																																																																																											
3	N	1	f	4.799 GHz			-50.923 dBm																																																																																											
4	N	1	f	7.446 GHz			-50.387 dBm																																																																																											
5	N	1	f	9.643 GHz			-52.228 dBm																																																																																											
6																																																																																																		
7																																																																																																		
8																																																																																																		
9																																																																																																		
10																																																																																																		
11																																																																																																		

RF Conducted Spurious Emissions Graphs

<p>802.11 n(HT40) /LCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 GHz</td> <td>-8.583 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.626 GHz</td> <td>-47.183 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.699 GHz</td> <td>-61.507 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.146 GHz</td> <td>-60.509 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.519 GHz</td> <td>-61.543 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 GHz	-8.583 dBm			2	N	1	f	24.626 GHz	-47.183 dBm			3	N	1	f	4.699 GHz	-61.507 dBm			4	N	1	f	7.146 GHz	-60.509 dBm			5	N	1	f	9.519 GHz	-61.543 dBm			
MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.402 GHz	-8.583 dBm																																													
2	N	1	f	24.626 GHz	-47.183 dBm																																													
3	N	1	f	4.699 GHz	-61.507 dBm																																													
4	N	1	f	7.146 GHz	-60.509 dBm																																													
5	N	1	f	9.519 GHz	-61.543 dBm																																													
<p>802.11 n(HT40) /MCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.452 GHz</td> <td>-10.915 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.000 GHz</td> <td>-47.866 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.799 GHz</td> <td>-61.372 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.446 GHz</td> <td>-60.923 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.660 GHz</td> <td>-61.687 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 GHz	-10.915 dBm			2	N	1	f	25.000 GHz	-47.866 dBm			3	N	1	f	4.799 GHz	-61.372 dBm			4	N	1	f	7.446 GHz	-60.923 dBm			5	N	1	f	9.660 GHz	-61.687 dBm			
MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.452 GHz	-10.915 dBm																																													
2	N	1	f	25.000 GHz	-47.866 dBm																																													
3	N	1	f	4.799 GHz	-61.372 dBm																																													
4	N	1	f	7.446 GHz	-60.923 dBm																																													
5	N	1	f	9.660 GHz	-61.687 dBm																																													
<p>802.11 n(HT40) /HCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.452 GHz</td> <td>-8.292 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.676 GHz</td> <td>-47.410 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.924 GHz</td> <td>-60.007 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.396 GHz</td> <td>-60.192 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.718 GHz</td> <td>-60.991 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 GHz	-8.292 dBm			2	N	1	f	24.676 GHz	-47.410 dBm			3	N	1	f	4.924 GHz	-60.007 dBm			4	N	1	f	7.396 GHz	-60.192 dBm			5	N	1	f	9.718 GHz	-60.991 dBm			
MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.452 GHz	-8.292 dBm																																													
2	N	1	f	24.676 GHz	-47.410 dBm																																													
3	N	1	f	4.924 GHz	-60.007 dBm																																													
4	N	1	f	7.396 GHz	-60.192 dBm																																													
5	N	1	f	9.718 GHz	-60.991 dBm																																													

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

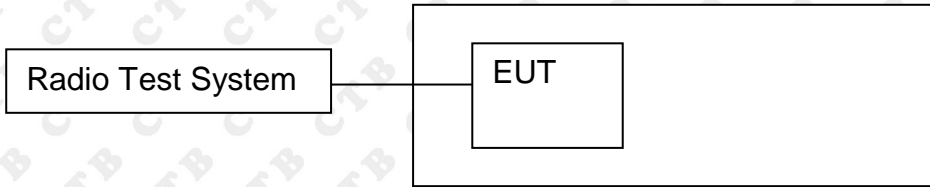

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS



9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = RMS. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	13.513	30	PASS
	MCH	13.313	30	PASS
	HCH	13.39	30	PASS
802.11g	LCH	12.537	30	PASS
	MCH	12.234	30	PASS
	HCH	12.515	30	PASS
802.11n(HT20)	LCH	11.525	30	PASS
	MCH	11.255	30	PASS
	HCH	11.542	30	PASS
802.11n(HT40)	LCH	10.54	30	PASS
	MCH	10.563	30	PASS
	HCH	10.411	30	PASS

Mode	Channel.	Maximum Output Power [dBm]
	LCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Ref Offset: 6.76 dB, Ref: 26.76 dBm Channel Power: 13.51 dBm / 20 MHz Power Spectral Density: -59.50 dBm /Hz</p>
802.11b	MCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset: 6.83 dB, Ref: 26.83 dBm Channel Power: 13.31 dBm / 20 MHz Power Spectral Density: -59.70 dBm /Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB, Ref: 26.80 dBm Channel Power: 13.39 dBm / 20 MHz Power Spectral Density: -59.62 dBm /Hz</p>

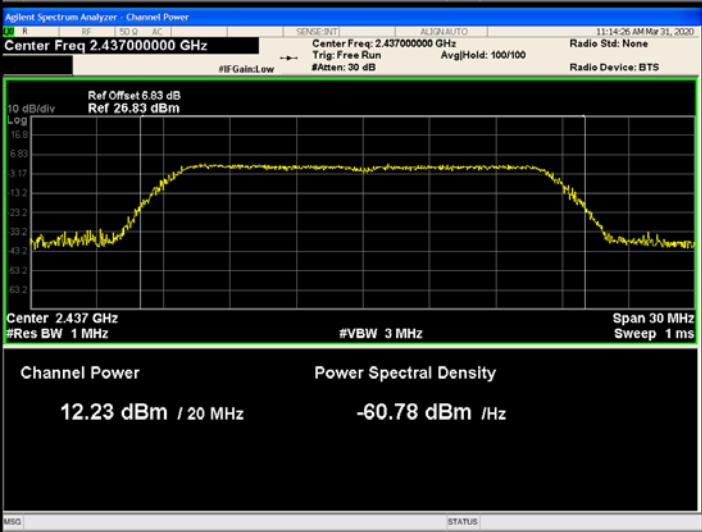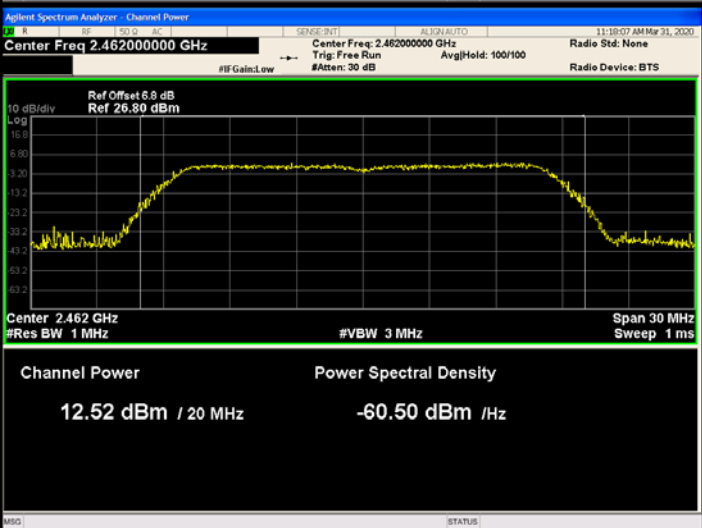
	LCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.76 dB Ref: 26.76 dBm</p> <p>Channel Power: 12.54 dBm / 20 MHz</p> <p>Power Spectral Density: -60.47 dBm /Hz</p>
802.11g	MCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB Ref: 26.83 dBm</p> <p>Channel Power: 12.23 dBm / 20 MHz</p> <p>Power Spectral Density: -60.78 dBm /Hz</p>
	HCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.8 dB Ref: 26.80 dBm</p> <p>Channel Power: 12.52 dBm / 20 MHz</p> <p>Power Spectral Density: -60.50 dBm /Hz</p>

	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.76 dB Ref: 26.76 dBm</p> <p>Channel Power: 11.53 dBm / 20 MHz</p> <p>Power Spectral Density: -61.48 dBm / Hz</p>
802.11n(HT20)	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB Ref: 26.83 dBm</p> <p>Channel Power: 11.25 dBm / 20 MHz</p> <p>Power Spectral Density: -61.76 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.8 dB Ref: 26.80 dBm</p> <p>Channel Power: 11.54 dBm / 20 MHz</p> <p>Power Spectral Density: -61.47 dBm / Hz</p>

	LCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.422000000 GHz Ref Offset: 6.77 dB Ref: 26.77 dBm Channel Power: 10.54 dBm / 40 MHz Power Spectral Density: -65.48 dBm / Hz</p>
802.11n(HT40)	MCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset: 6.83 dB Ref: 26.83 dBm Channel Power: 10.56 dBm / 40 MHz Power Spectral Density: -65.46 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.452000000 GHz Ref Offset: 6.81 dB Ref: 26.81 dBm Channel Power: 10.41 dBm / 40 MHz Power Spectral Density: -65.61 dBm / Hz</p>

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

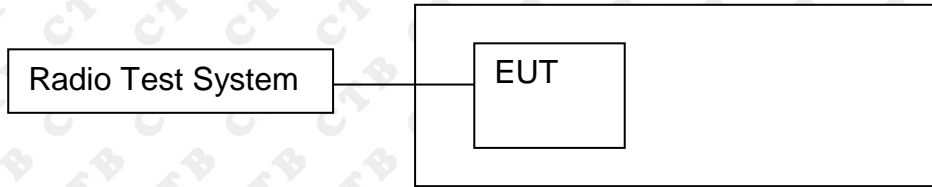

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.0913	500	PASS
	MCH	10.4922	500	PASS
	HCH	9.6288	500	PASS
802.11g	LCH	16.3457	500	PASS
	MCH	16.3929	500	PASS
	HCH	16.4352	500	PASS
802.11n(HT20)	LCH	17.6447	500	PASS
	MCH	17.585	500	PASS
	HCH	17.6084	500	PASS
802.11n(HT40)	LCH	35.0442	500	PASS
	MCH	35.108	500	PASS
	HCH	35.2896	500	PASS

Test Graph:

Graphs																			
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 4 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.0 dBm</td> </tr> <tr> <td>12.372 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>21.829 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>9.091 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	10.0 dBm	12.372 MHz			Transmit Freq Error	OBW Power	99.00 %	21.829 kHz			x dB Bandwidth	x dB	-6.00 dB	9.091 MHz		
Occupied Bandwidth	Total Power	10.0 dBm																	
12.372 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
21.829 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
9.091 MHz																			
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 4 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.79 dBm</td> </tr> <tr> <td>12.463 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-27.971 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.49 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.79 dBm	12.463 MHz			Transmit Freq Error	OBW Power	99.00 %	-27.971 kHz			x dB Bandwidth	x dB	-6.00 dB	10.49 MHz		
Occupied Bandwidth	Total Power	9.79 dBm																	
12.463 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-27.971 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.49 MHz																			
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 4 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.0 dBm</td> </tr> <tr> <td>12.436 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>47.394 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>9.629 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	10.0 dBm	12.436 MHz			Transmit Freq Error	OBW Power	99.00 %	47.394 kHz			x dB Bandwidth	x dB	-6.00 dB	9.629 MHz		
Occupied Bandwidth	Total Power	10.0 dBm																	
12.436 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
47.394 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
9.629 MHz																			


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 16.522 MHz</p> <p>Total Power: 7.30 dBm</p> <p>Transmit Freq Error: -3.441 kHz</p> <p>x dB Bandwidth: 16.35 MHz</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 16.514 MHz</p> <p>Total Power: 6.82 dBm</p> <p>Transmit Freq Error: 8.636 kHz</p> <p>x dB Bandwidth: 16.39 MHz</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 16.533 MHz</p> <p>Total Power: 7.21 dBm</p> <p>Transmit Freq Error: 15.938 kHz</p> <p>x dB Bandwidth: 16.44 MHz</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 17.680 MHz</p> <p>Total Power: 6.15 dBm</p> <p>Transmit Freq Error: 5.190 kHz</p> <p>x dB Bandwidth: 17.64 MHz</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 17.675 MHz</p> <p>Total Power: 5.93 dBm</p> <p>Transmit Freq Error: -1.793 kHz</p> <p>x dB Bandwidth: 17.59 MHz</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 17.671 MHz</p> <p>Total Power: 6.11 dBm</p> <p>Transmit Freq Error: 21.657 kHz</p> <p>x dB Bandwidth: 17.61 MHz</p>

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Occupied Bandwidth: 35.872 MHz</p> <p>Total Power: 5.37 dBm</p> <p>Transmit Freq Error: -8.062 kHz</p> <p>x dB Bandwidth: 35.04 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 35.889 MHz</p> <p>Total Power: 5.34 dBm</p> <p>Transmit Freq Error: 7.517 kHz</p> <p>x dB Bandwidth: 35.11 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz</p> <p>Occupied Bandwidth: 35.943 MHz</p> <p>Total Power: 5.22 dBm</p> <p>Transmit Freq Error: 14.905 kHz</p> <p>x dB Bandwidth: 35.29 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

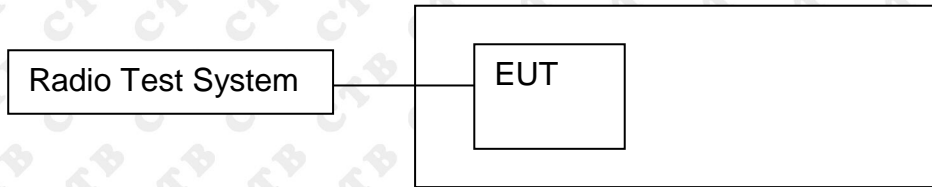

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = RMS.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(dBm)	Verdict
802.11b	LCH	-16.203	8	PASS
	MCH	-16.129	8	PASS
	HCH	-15.134	8	PASS
802.11g	LCH	-21.02	8	PASS
	MCH	-21.73	8	PASS
	HCH	-21.204	8	PASS
802.11n(H T20)	LCH	-22.296	8	PASS
	MCH	-24.355	8	PASS
	HCH	-22.782	8	PASS
802.11n(H T40)	LCH	-26.718	8	PASS
	MCH	-27.118	8	PASS
	HCH	-26.713	8	PASS

Test Graph

Graphs	
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset: 6.78 dB Ref 26.76 dBm Mkr1 2.412 334.6 GHz -16.203 dBm Center 2.412000 GHz #Res BW 3.0 kHz #VBW 10 kHz* Span 18.18 MHz Sweep 2.475 s (10001 pts)</p>
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 6.83 dB Ref 26.83 dBm Mkr1 2.436 997.9 GHz -16.129 dBm Center 2.437000 GHz #Res BW 3.0 kHz #VBW 10 kHz* Span 20.98 MHz Sweep 2.627 s (10001 pts)</p>
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset: 6.8 dB Ref 26.80 dBm Mkr1 2.462 432.8 GHz -15.134 dBm Center 2.462000 GHz #Res BW 3.0 kHz #VBW 10 kHz* Span 19.26 MHz Sweep 2.622 s (10001 pts)</p>

<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

<p>802.11n(HT20)/LC H</p>	
<p>802.11n(HT20)/MC H</p>	
<p>802.11n(HT20)/HC H</p>	

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.77 dB Ref 26.77 dBm Mkr1 2.432 002 GHz -26.718 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz* Span 70.09 MHz #Sweep 10.00 s (10001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 26.83 dBm Mkr1 2.433 875 GHz -27.118 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz* Span 70.22 MHz #Sweep 10.00 s (10001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.81 dB Ref 26.81 dBm Mkr1 2.446 382 GHz -26.713 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz* Span 70.58 MHz #Sweep 10.00 s (10001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External Antenna and no consideration of replacement. The best case gain of the antenna is 2.21dBi.

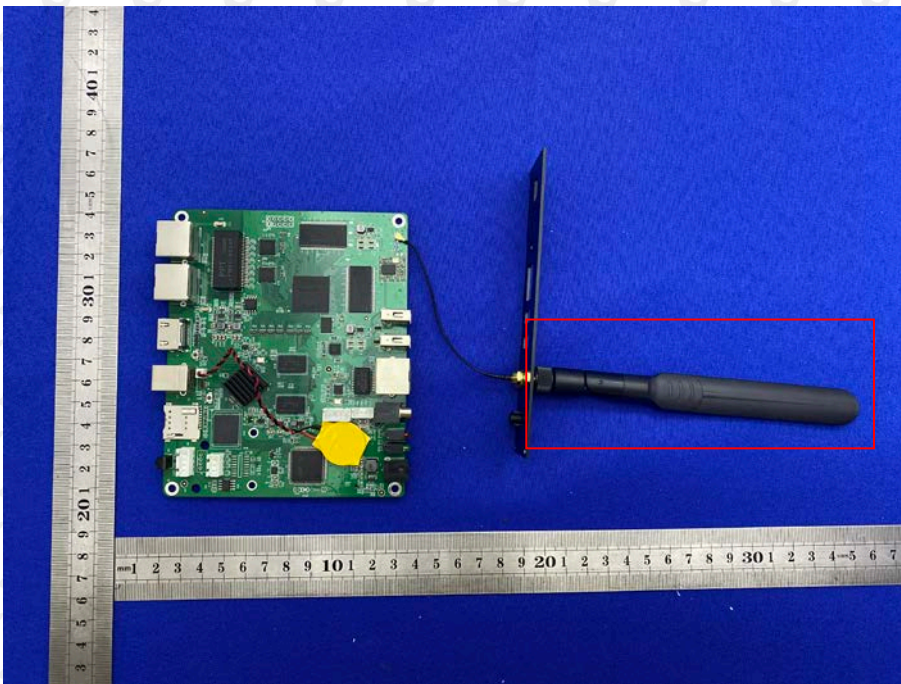


13. EUT PHOTOGRAPHS


EUT Photo 1




EUT Photo 2

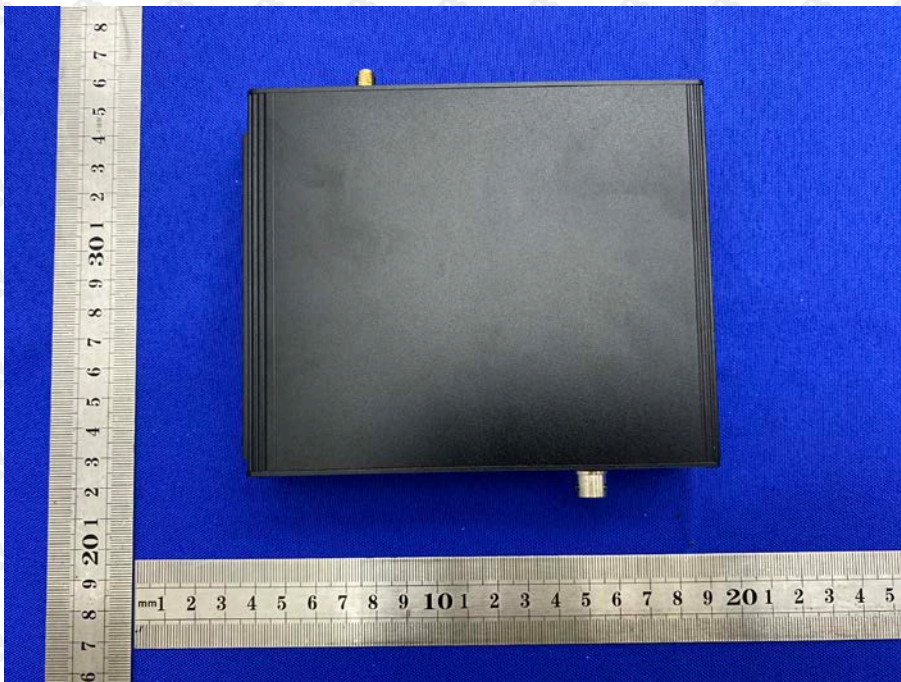

EUT Photo 3

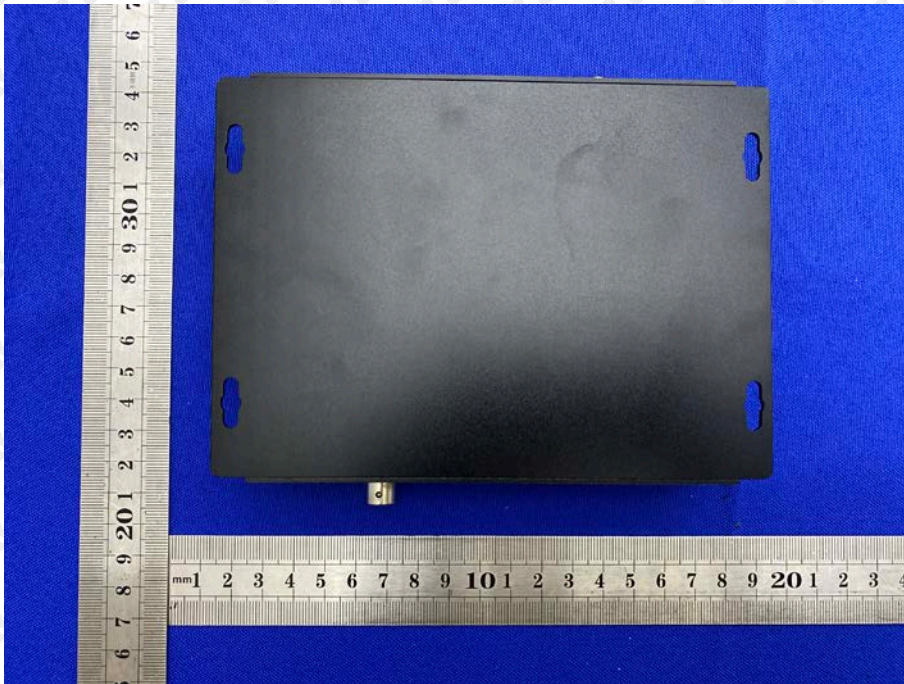


EUT Photo 4

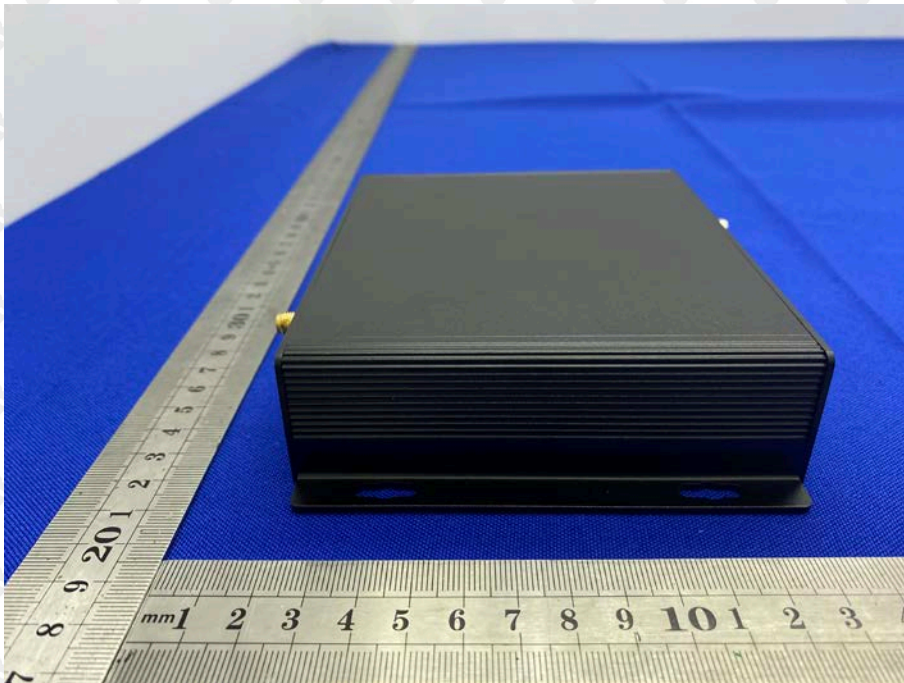

EUT Photo 5**EUT Photo 6**

EUT Photo 7

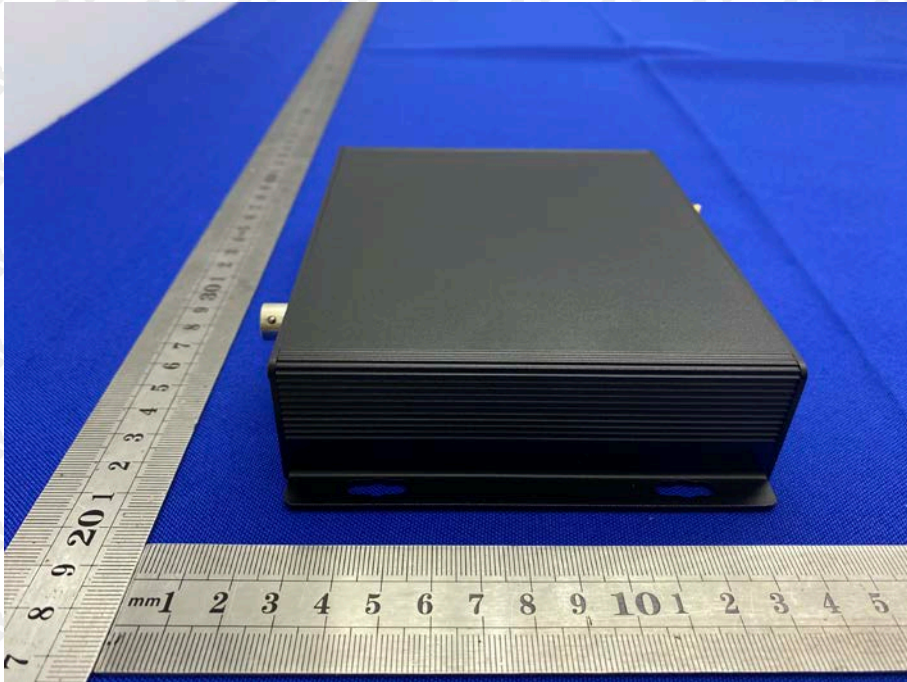

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



***** END OF REPORT *****