



# FCC TEST REPORT

**Test report**  
**On Behalf of**  
**Shenzhen Leshi E-commerce CO., Ltd**  
**For**  
**Video camera**  
**Model No.: CM4, CM1, CM2, CM4 Pro, CM4 PLUS, CM5, CM6,**  
**CM7, CM8**  
**FCC ID: 2AW4E-CM4**

**Prepared for :** Shenzhen Leshi E-commerce CO., Ltd  
1615, Dongming Bldg. Minkang Rd. Minzhi St. Longhua Dist. Shenzhen.

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, JunfengZhongchengZhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Aug. 01, 2020 ~ Aug. 13, 2020

**Date of Report:** Aug. 13, 2020

**Report Number:** HK2008052066-E



## TEST RESULT CERTIFICATION

**Applicant's name** .....: Shenzhen Leshi E-commerce CO., Ltd  
**Address** .....: 1615, Dongming Bldg. Minkang Rd. Minzhi St. Longhua Dist. Shenzhen.  
**Manufacture's Name**.....: Shenzhen Leshi E-commerce CO., Ltd  
**Address** : 1615, Dongming Bldg. Minkang Rd. Minzhi St. Longhua Dist. Shenzhen.

### Product description

**Trade Mark:** Hosaud  
**Product name**.....: Video camera  
**Model and/or type reference** : CM4, CM1, CM2, CM4 Pro, CM4 PLUS, CM5, CM6, CM7, CM8  
**Standards** .....: FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:

**Date (s) of performance of tests** .....: Aug. 01, 2020 ~ Aug. 13, 2020

**Date of Issue**.....: Aug. 13, 2020

**Test Result**.....: Pass

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



## TABLE OF CONTENTS

<b>1. Test Result Summary .....</b>	<b>4</b>
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY .....	4
1.3. MEASUREMENT UNCERTAINTY .....	5
<b>2. EUT Description .....</b>	<b>6</b>
2.1. GENERAL DESCRIPTION OF EUT .....	6
2.2. CARRIER FREQUENCY OF CHANNELS .....	7
2.3. OPERATION OF EUT DURING TESTING .....	7
2.4. DESCRIPTION OF TEST SETUP .....	7
<b>3. General Information .....</b>	<b>8</b>
3.1. TEST ENVIRONMENT AND MODE .....	8
3.2. DESCRIPTION OF SUPPORT UNITS .....	9
<b>4. Test Results and Measurement Data .....</b>	<b>10</b>
4.1. CONDUCTED EMISSION .....	10
4.2. TEST RESULT .....	12
4.3. MAXIMUM CONDUCTED OUTPUT POWER .....	14
4.4. EMISSION BANDWIDTH.....	16
4.5. POWER SPECTRAL DENSITY .....	22
4.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT .....	28
4.7. RADIATED SPURIOUS EMISSION MEASUREMENT .....	38
4.8. ANTENNA REQUIREMENT .....	64
4.9. PHOTOGRAPH OF TEST.....	65
4.10. PHOTOS OF THE EUT .....	66



## 1. Test Result Summary

### 1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, JunfengZhongchengZhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



## 2. EUT Description

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	Video camera
Model Name	CM4
Serial No.	CM1 , CM2 , CM4 Pro , CM4 PLUS , CM5 , CM6 , CM7 , CM8
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: CM4
FCC ID	2AW4E-CM4
Antenna Type	FPCB Antenna
Antenna Gain	3dBi
Operation frequency	802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n 40: 7CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Power Source	DC 3.7V from Battery
Power Rating	DC 3.7V from Battery or DC 5V From Adapter



## 2.2. Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List For 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
--	--	04	2427	07	2442	--	--
--	--	05	2432	08	2447	--	--
03	2422	06	2437	09	2452		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

## 2.3. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

The mode is used: **Transmitting mode for 802.11n (HT40)**


Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during testing:

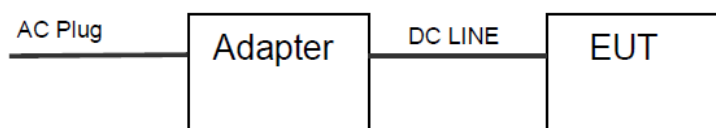



### 3. Genera Information

#### 3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
<p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.For the full battery state and The output power to the maximum state.</p>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

#### Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
<p>1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.</p> <p>2.According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20), 13.5Mbps for 802.11n(H40). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.</p>	





### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	S010WU0500150	/	/	/

**Note:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<div><p>Reference Plane</p><p>40cm 80cm</p><p>E.U.T AC power LISN Filter AC power EMI Receiver</p><p>Test table/Insulation plane</p><p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	<div><div>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</div></div>														
Test Result:	PASS														

**Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 25, 2020
L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 25, 2020
LISN	R&S	ENV216	HKE-059	Dec. 25, 2020
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## 4.2. Test Result

PASS

All the test modes completed for test. only the worst result of (802.11b at 2412MHz) was reported as below:

Test Specification: Line

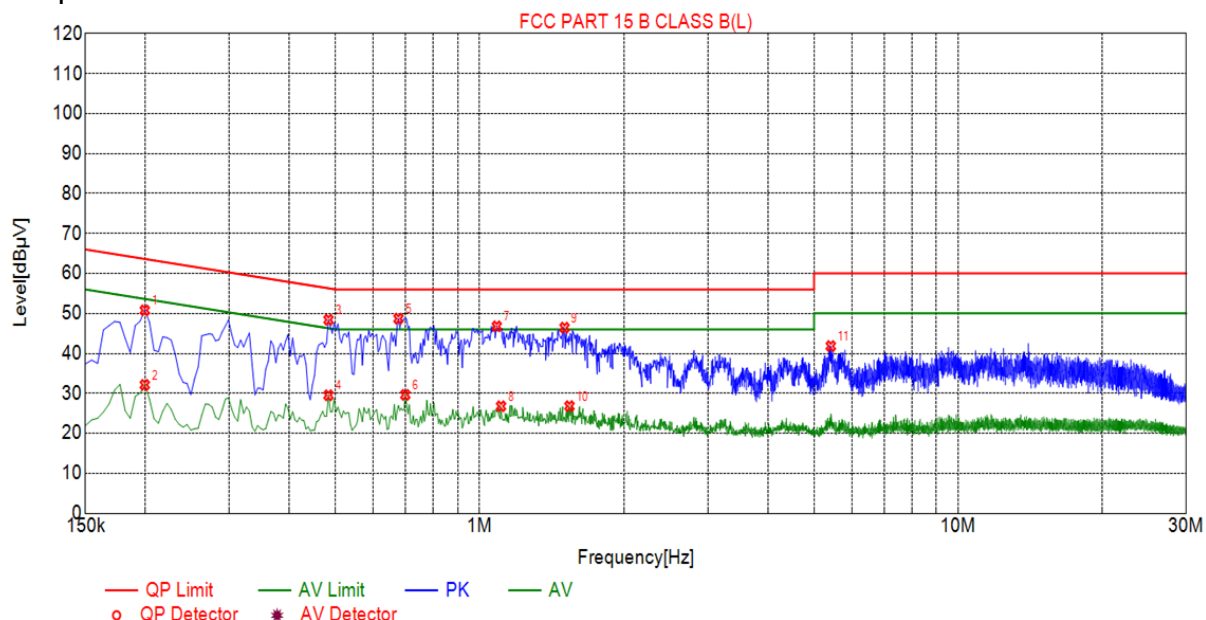

Suspected List								
NO.	Freq.	Level	Factor	Limit	Margin	Reading	Detector	Type
	[MHz]	[dB μ V]	[dB]	[dB μ V]	[dB]	[dB μ V]		
1	0.1995	50.77	10.03	63.63	12.86	40.74	PK	L
2	0.1995	32.13	10.03	53.63	21.50	22.10	AV	L
3	0.4830	48.41	10.04	56.29	7.88	38.37	PK	L
4	0.4830	29.53	10.04	46.29	16.76	19.49	AV	L
5	0.6765	48.70	10.05	56.00	7.30	38.65	PK	L
6	0.6990	29.64	10.05	46.00	16.36	19.59	AV	L
7	1.0860	46.78	10.07	56.00	9.22	36.71	PK	L
8	1.1085	26.79	10.08	46.00	19.21	16.71	AV	L
9	1.5045	46.44	10.11	56.00	9.56	36.33	PK	L
10	1.5405	26.81	10.11	46.00	19.19	16.70	AV	L
11	5.4195	41.84	10.26	60.00	18.16	31.58	PK	L
12	5.4195	27.47	10.26	50.00	22.53	17.21	AV	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



## Test Specification: Neutral

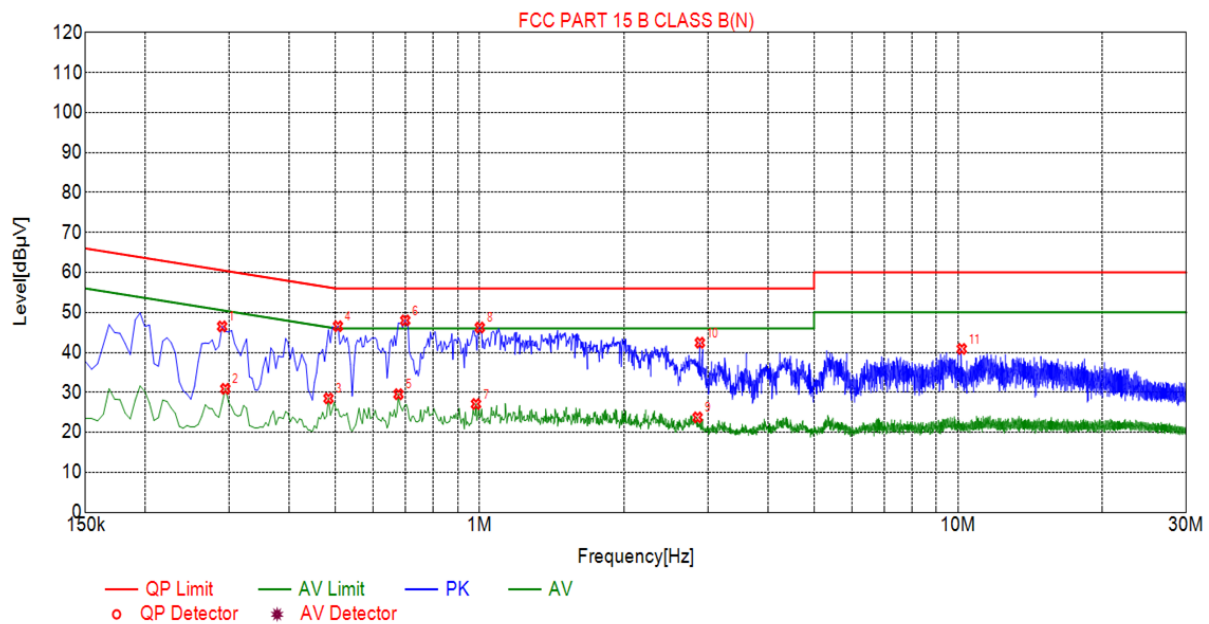

Suspected List								
NO.	Freq.	Level	Factor	Limit	Margin	Reading	Detector	Type
	[MHz]	[dB μ V]	[dB]	[dB μ V]	[dB]	[dB μ V]		
1	0.2895	46.51	10.03	60.54	14.03	36.48	PK	N
2	0.2940	30.89	10.03	50.41	19.52	20.86	AV	N
3	0.4830	28.49	10.04	46.29	17.80	18.45	AV	N
4	0.5055	46.55	10.04	56.00	9.45	36.51	PK	N
5	0.6765	29.55	10.05	46.00	16.45	19.50	AV	N
6	0.6990	48.00	10.05	56.00	8.00	37.95	PK	N
7	0.9825	27.10	10.06	46.00	18.90	17.04	AV	N
8	1.0005	46.22	10.06	56.00	9.78	36.16	PK	N
9	2.8545	23.74	10.21	46.00	22.26	13.53	AV	N
10	2.8860	42.42	10.21	56.00	13.58	32.21	PK	N
11	10.1805	40.87	10.06	60.00	19.13	30.81	PK	N
12	10.1805	26.14	10.06	50.00	13.86	16.08	AV	N

Remark: Margin = Limit – Level


Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



### 4.3. Maximum Conducted Output Power

#### Test Specification
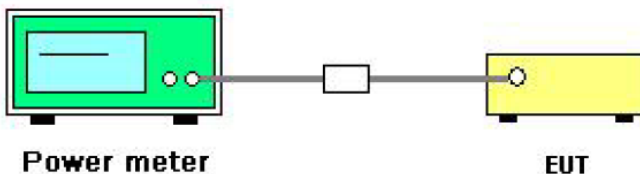
<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (b)(3)
<b>Test Method:</b>	KDB 558074
<b>Limit:</b>	30dBm
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. On the left is a green box labeled 'Power meter'. A cable connects it to a small white box, which is then connected to a yellow box labeled 'EUT' (Equipment Under Test).</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows the Measurement Procedure of FCC KDB No.558074 D01 15.247 Meas Guidance v05r02.</li><li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Measure the Peak output power and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

#### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power meter	Agilent	E4419B	HKE-085	Dec. 25, 2020
Power Sensor	Agilent	E9300A	HKE-086	Dec. 25, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 25, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 25, 2020
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


**Test Data**

<b>TX 802.11b Mode</b>			
Test Channe	Frequency	MaximumPeak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	17.1	30
CH06	2437	17.46	30
CH11	2462	17.31	30
<b>TX 802.11g Mode</b>			
CH01	2412	14.33	30
CH06	2437	15.11	30
CH11	2462	14.76	30
<b>TX 802.11n20 Mode</b>			
CH01	2412	14.49	30
CH06	2437	14.78	30
CH11	2462	14.65	30
<b>TX 802.11n40 Mode</b>			
CH03	2422	14.93	30
CH06	2437	15.03	30
CH09	2452	15.01	30



## 4.4. Emission Bandwidth

### Test Specification

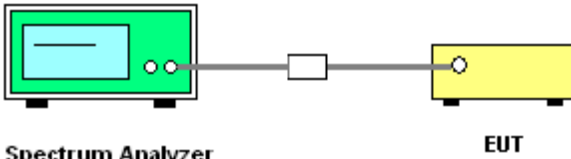Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer                      EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"><li>1. The testing follows the Measurement Procedure of FCC KDB No.558074 D01 15.247 Meas Guidance v05r02.</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li><li>4. Measure and record the results in the test report.</li></ol>
Test Result:	PASS

### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 25, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 25, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 25, 2020
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



**Test data**


Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	9.099	16.50	17.66	36.50
Middle	9.108	16.55	17.64	36.50
Highest	9.554	16.52	17.68	36.53
Limit:	>500KHz			
Test Result:	PASS			

Test plots as follows:



## 802.11b Modulation


## Lowest channel

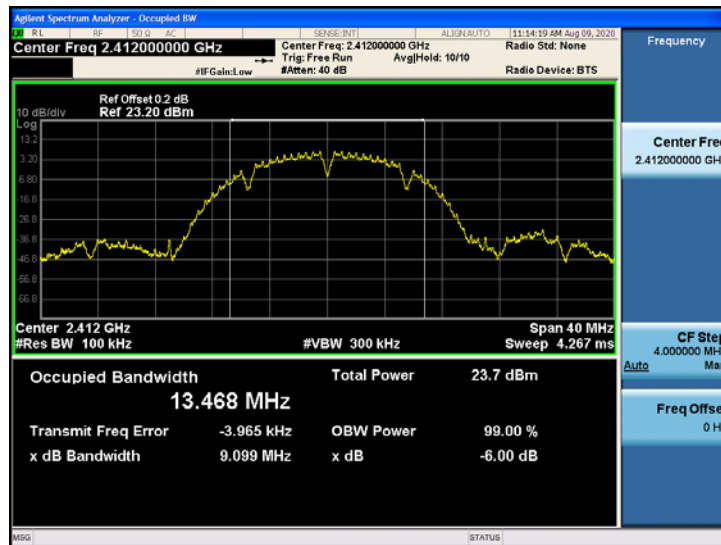




## 802.11g Modulation


## Lowest channel

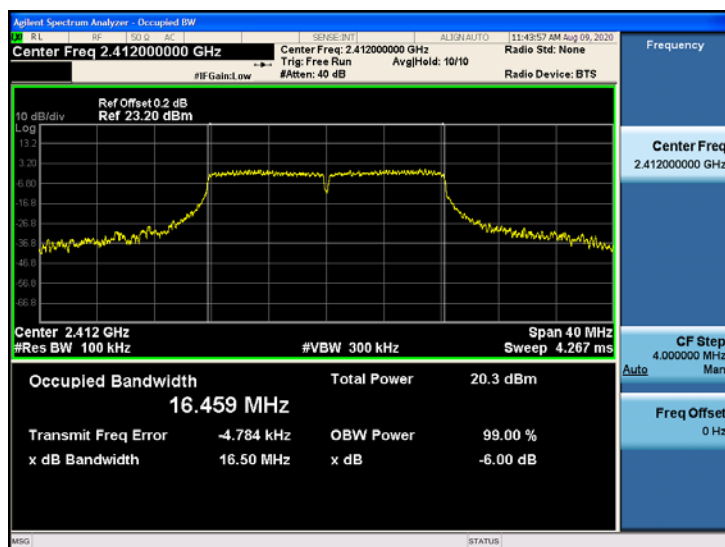

## Middle channel

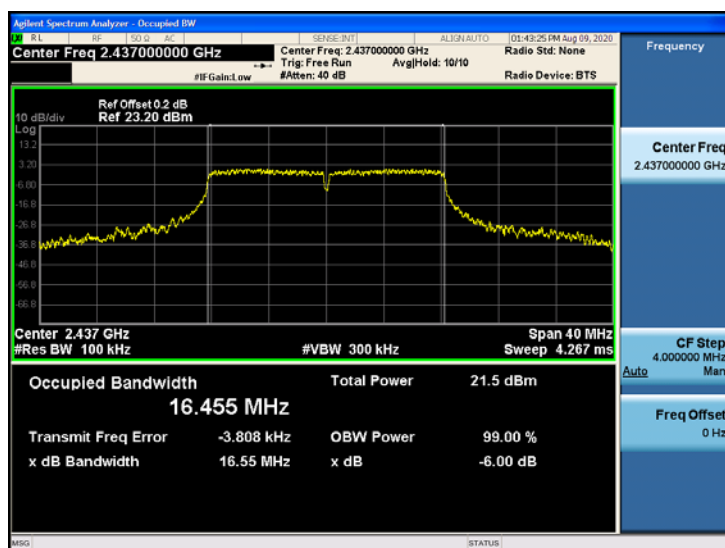


## Highest channel

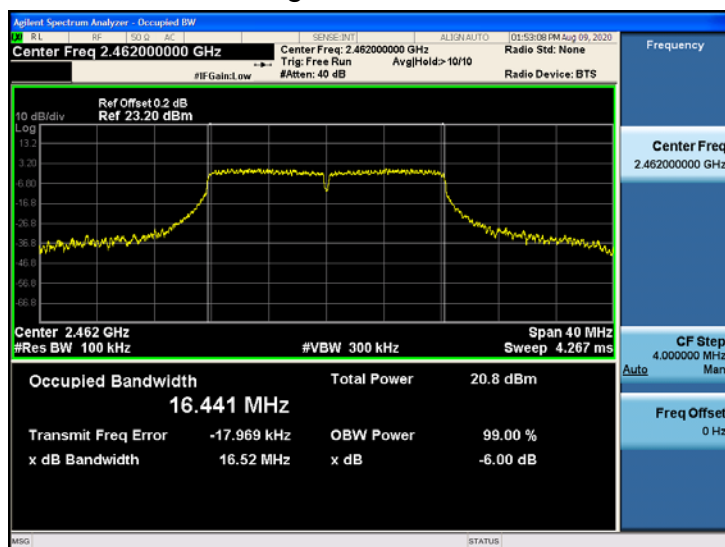




## 802.11n (HT20) Modulation


## Lowest channel

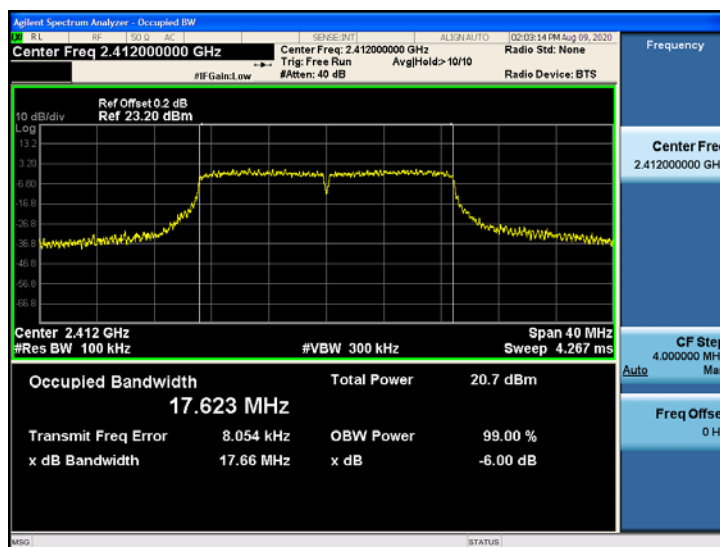

## Middle channel

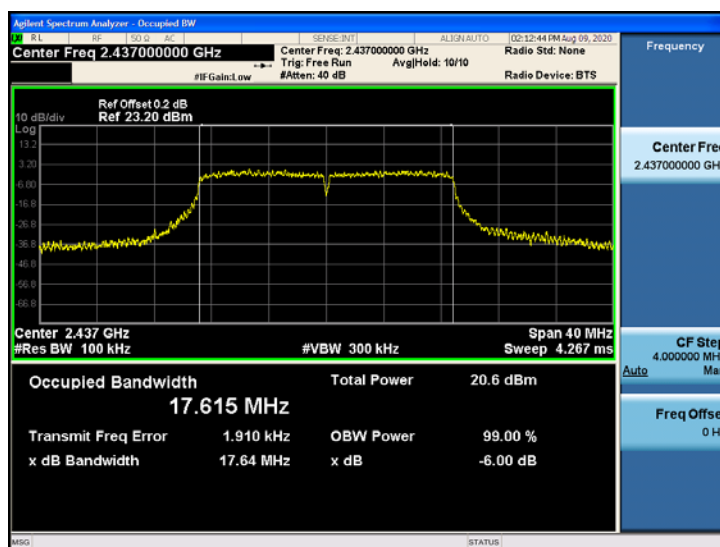


## Highest channel

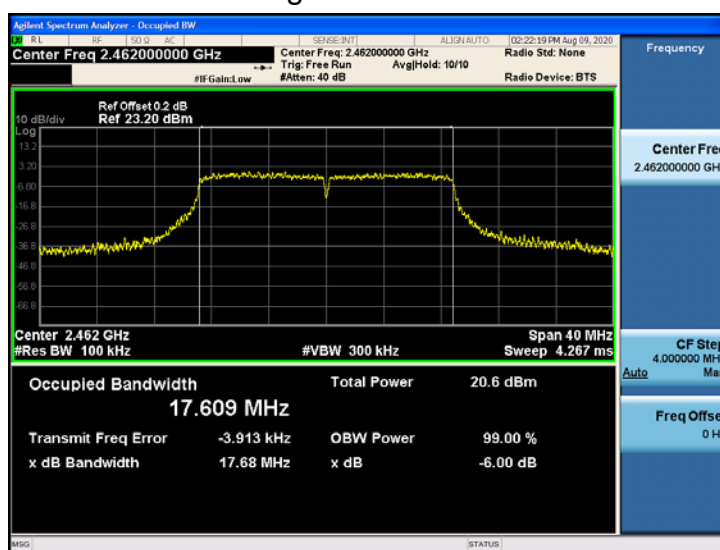




## 802.11n (HT40) Modulation


## Lowest channel

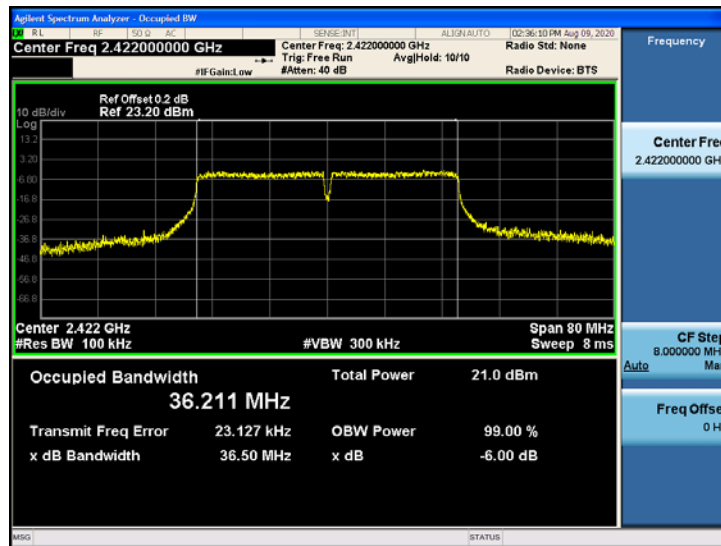

## Middle channel

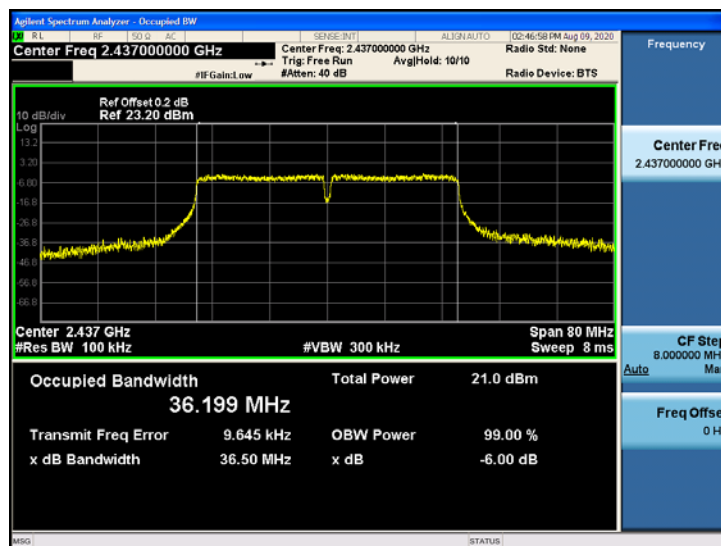


## Highest channel

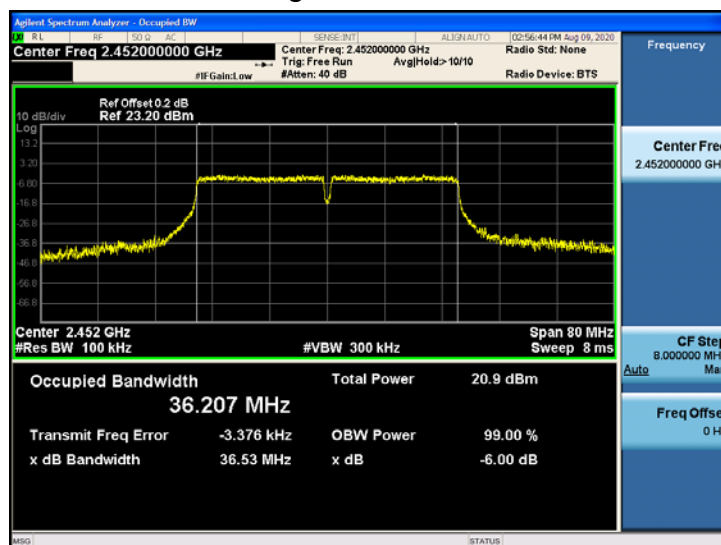



## 4.5. Power Spectral Density

### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (e)
<b>Test Method:</b>	KDB 558074
<b>Limit:</b>	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>. Video bandwidth VBW <math>\geq 3 \times \text{RBW}</math>. Set the span to at least 1.5 times the OBW.</li> <li>5. Detector = Peak, Sweep time = auto couple.</li> <li>6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.</li> <li>6. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 25, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 25, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 25, 2020
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**


EUT Set Mode	Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Lowest	-14.708	$\leq 8\text{dBm}$
	Middle	-14.363	$\leq 8\text{dBm}$
	Highest	-14.539	$\leq 8\text{dBm}$
802.11g	Lowest	-17.180	$\leq 8\text{dBm}$
	Middle	-17.192	$\leq 8\text{dBm}$
	Highest	-17.449	$\leq 8\text{dBm}$
802.11n(H20)	Lowest	-16.191	$\leq 8\text{dBm}$
	Middle	-16.686	$\leq 8\text{dBm}$
	Highest	-17.664	$\leq 8\text{dBm}$
802.11n(H40)	Lowest	-20.370	$\leq 8\text{dBm}$
	Middle	-21.186	$\leq 8\text{dBm}$
	Highest	-21.529	$\leq 8\text{dBm}$
Test Result:	PASS		

Test plots as follows:




## 802.11b Modulation


## Lowest channel

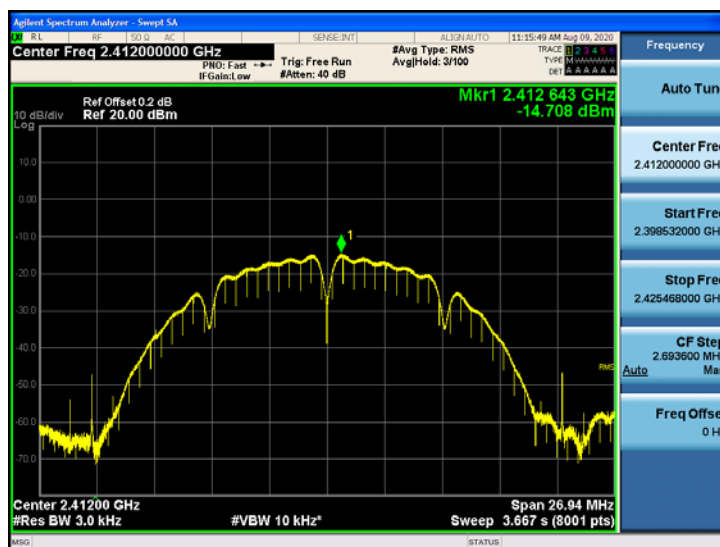

## Middle channel

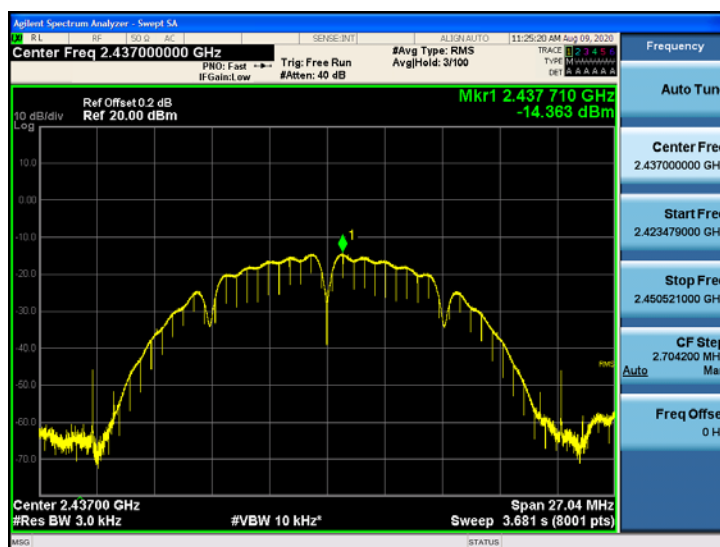

## Highest channel

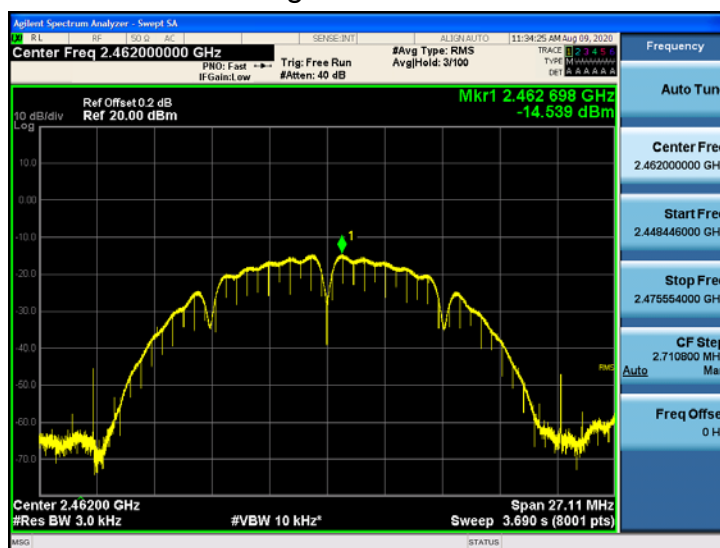







## 802.11g Modulation


## Lowest channel

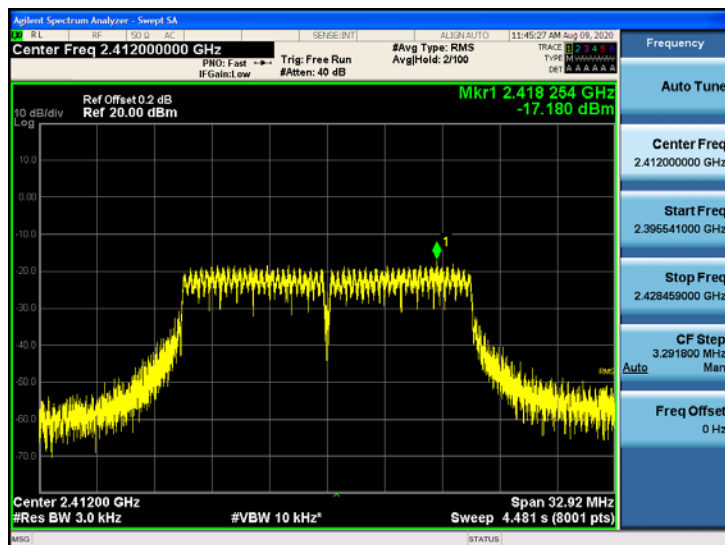

## Middle channel

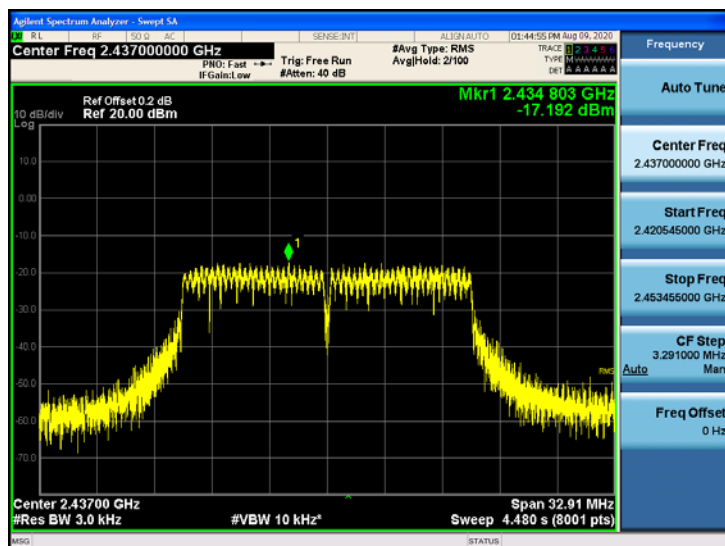


## Highest channel

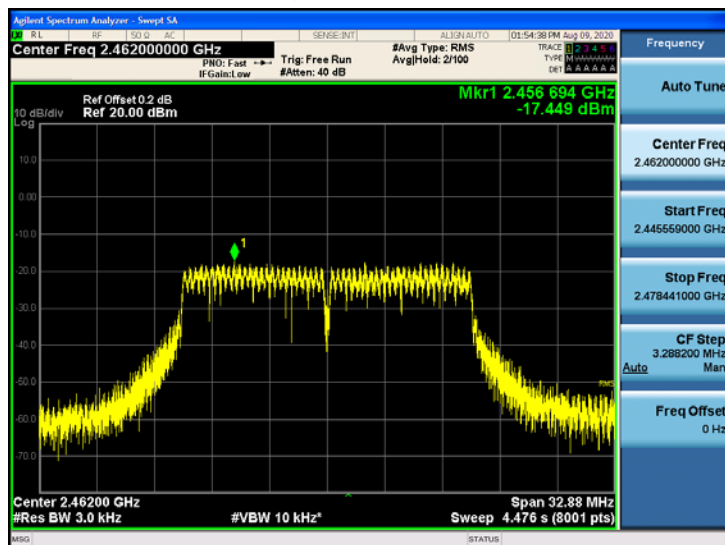




## 802.11n (HT20) Modulation


## Lowest channel

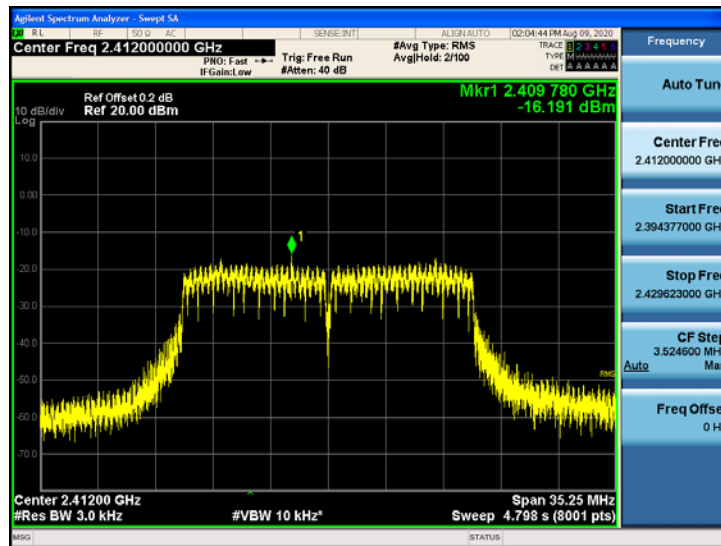

## Middle channel

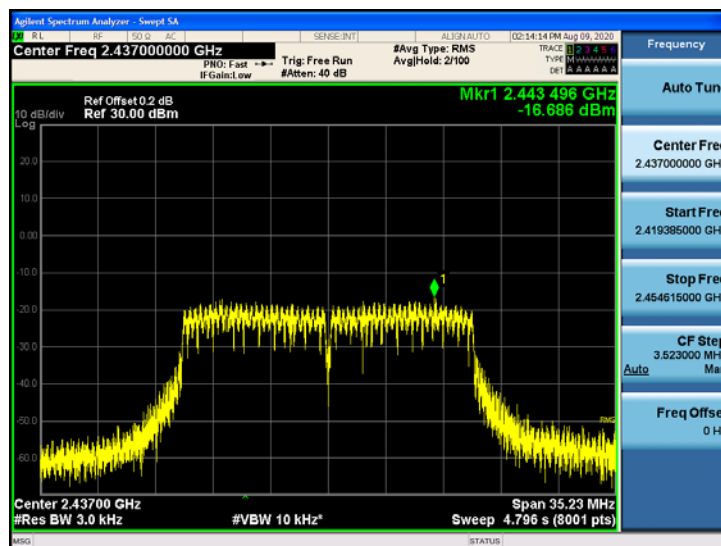


## Highest channel

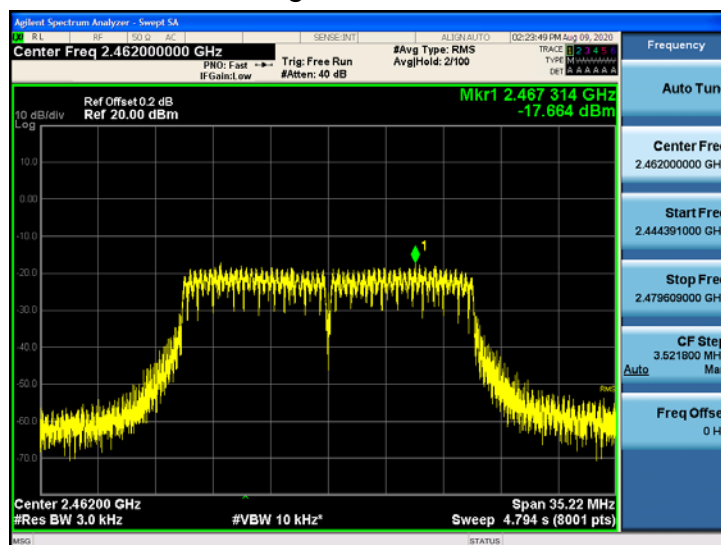




## 802.11n (HT40) Modulation


## Lowest channel

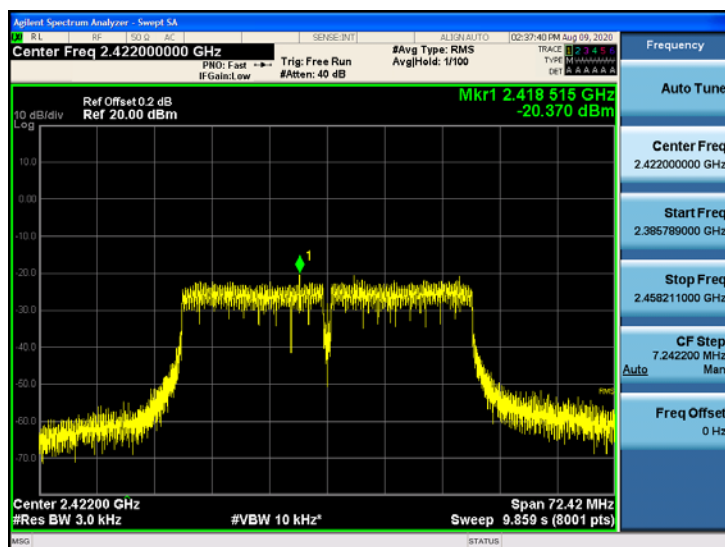

## Middle channel

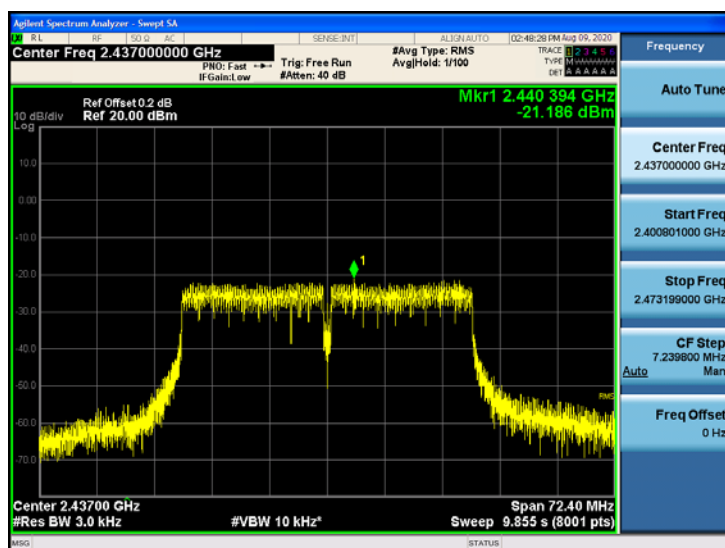


## Highest channel

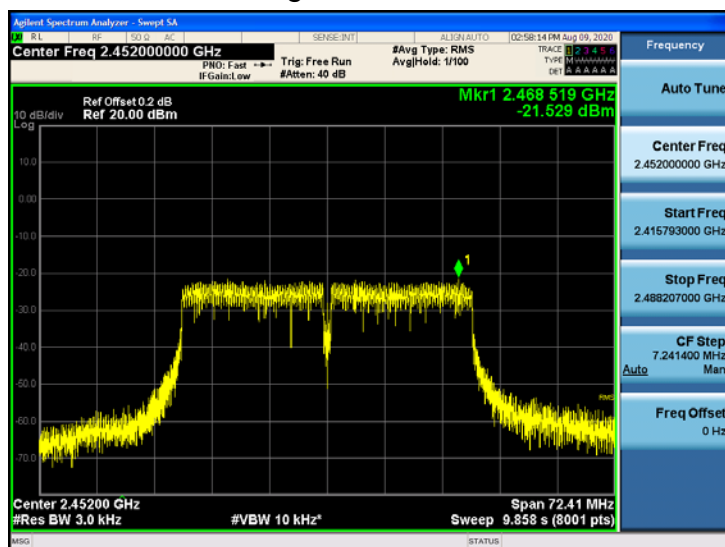



## 4.6. Conducted Band Edge and Spurious Emission Measurement

### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB558074
<b>Limit:</b>	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
<b>Test Setup:</b>	 Spectrum Analyzer                      EUT
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02.</li><li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).</li><li>5. Measure and record the results in the test report.</li><li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li></ol>
<b>Test Result:</b>	PASS

**Test Instruments**


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	R&S	FSP-40	HKE-051	Dec. 25, 2020
High pass filter unit	Tonscend	JS0806-F	HKE-055	Dec. 25, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 25, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 25, 2020
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## Test Data



## 802.11b Modulation

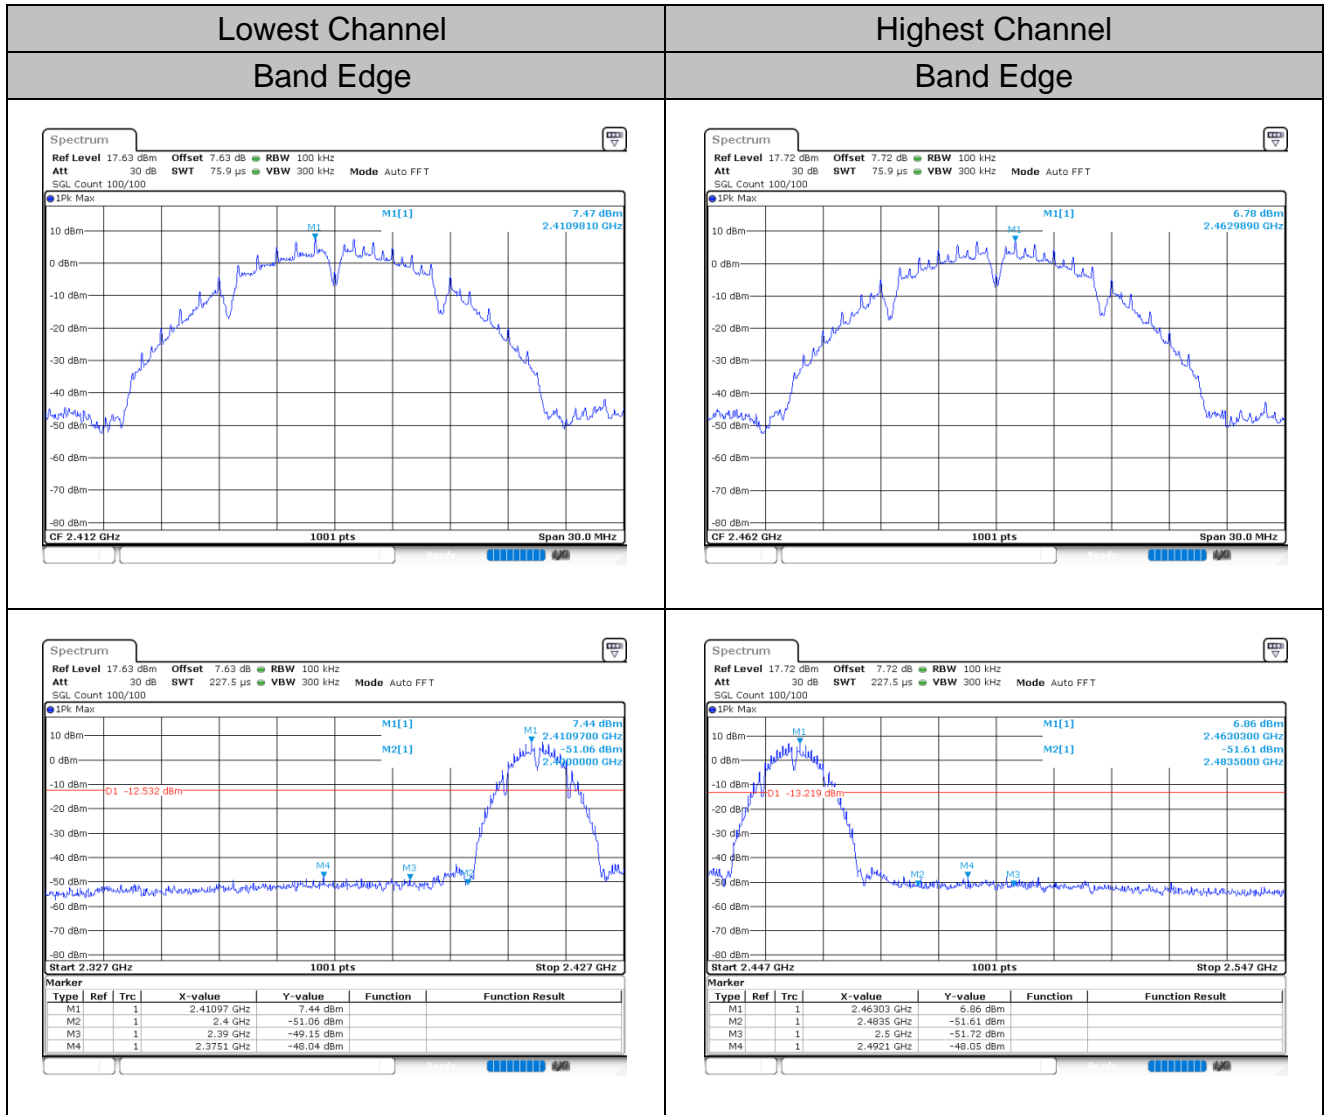





## Spurious emission



## Lowest Channel

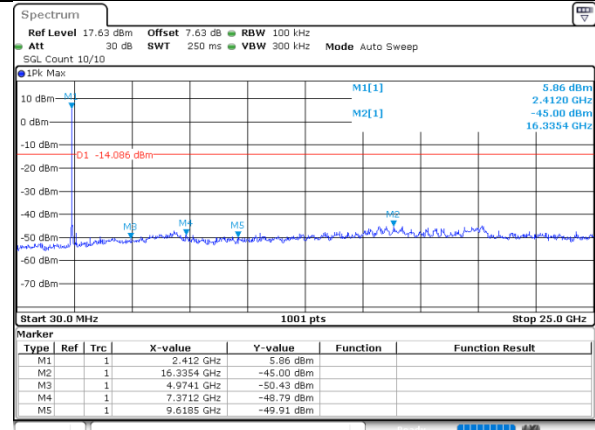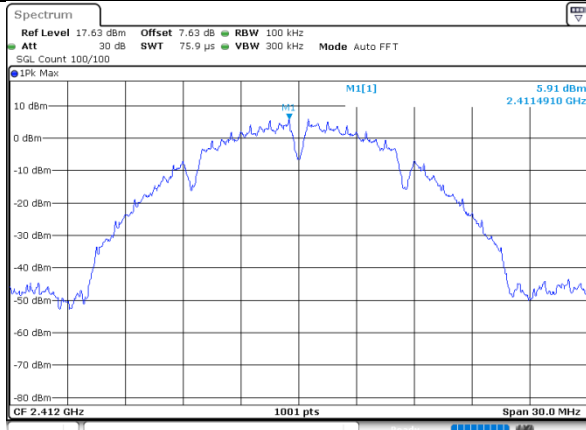

## Middle Channel

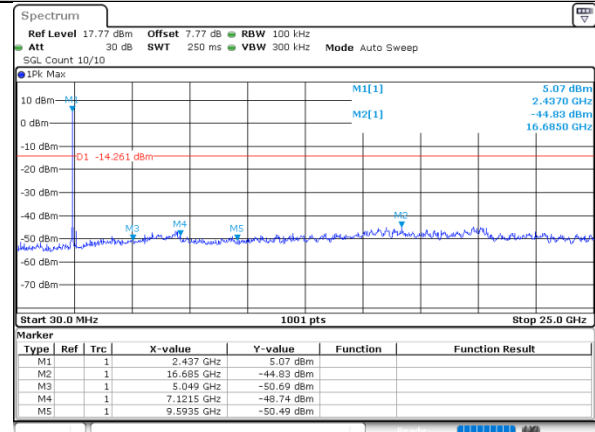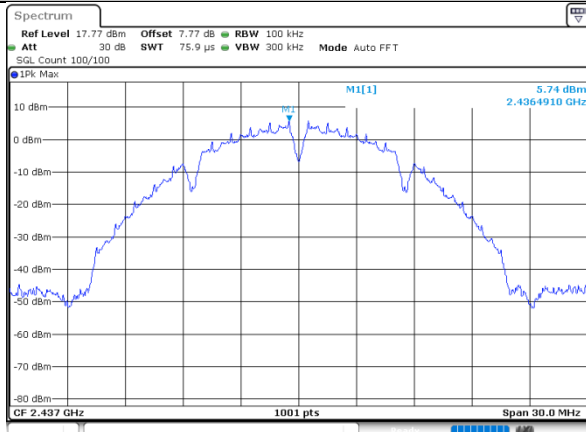

## Highest Channel

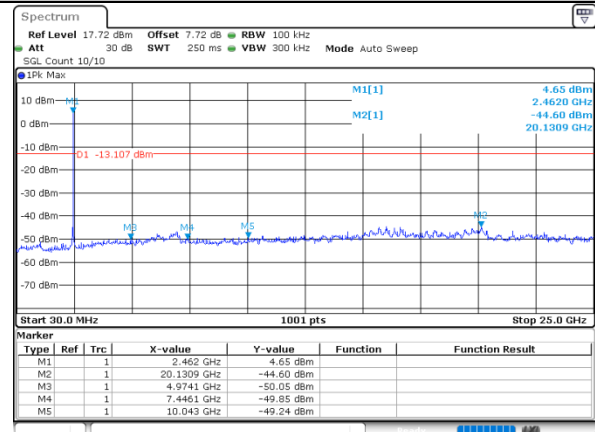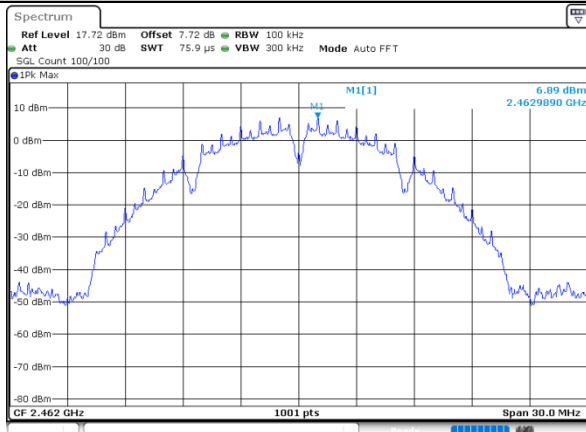




## 802.11g Modulation




## Lowest Channel

## Band Edge

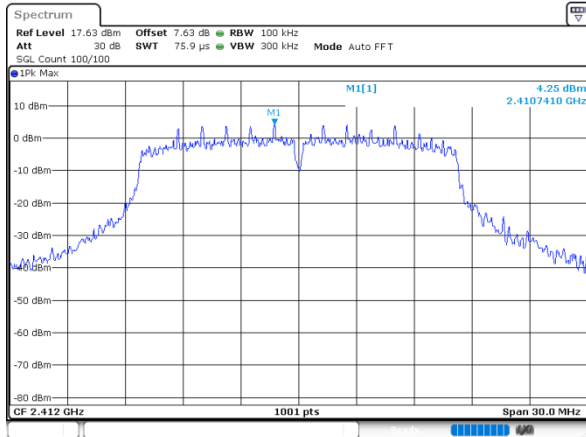

## Highest Channel

## Band Edge

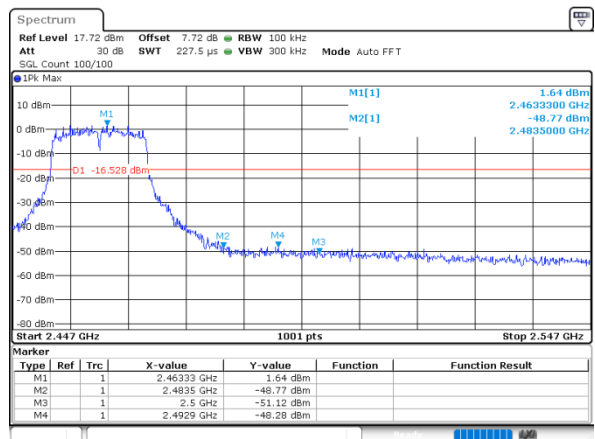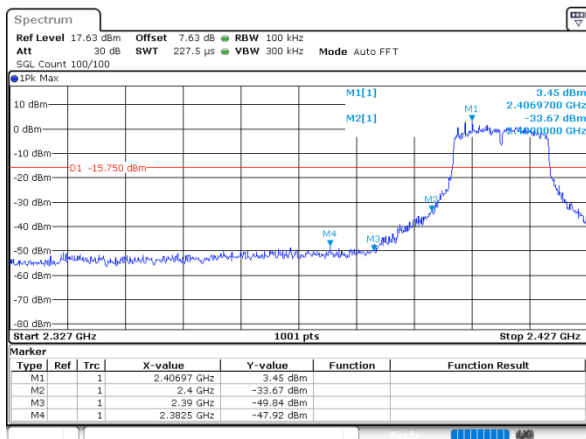
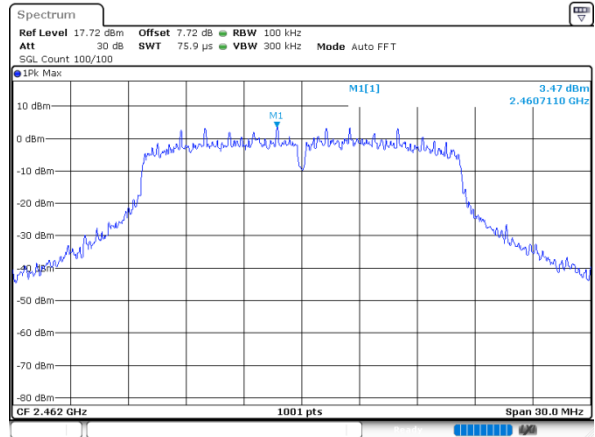








## Spurious emission



## Lowest Channel

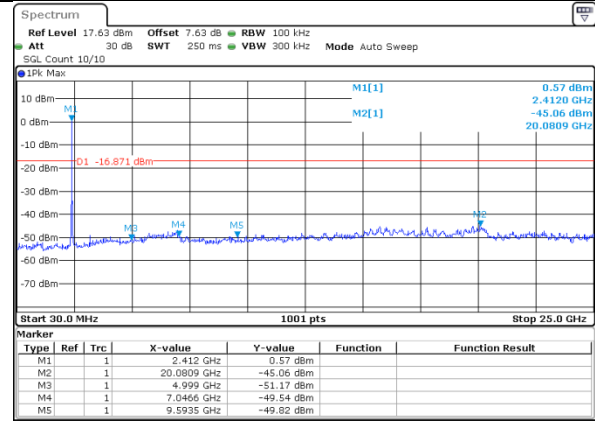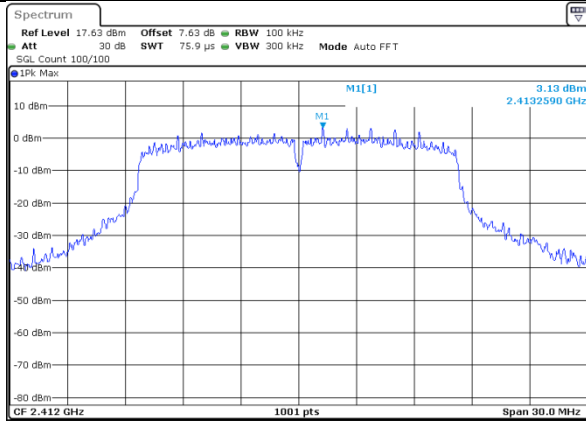

## Middle Channel

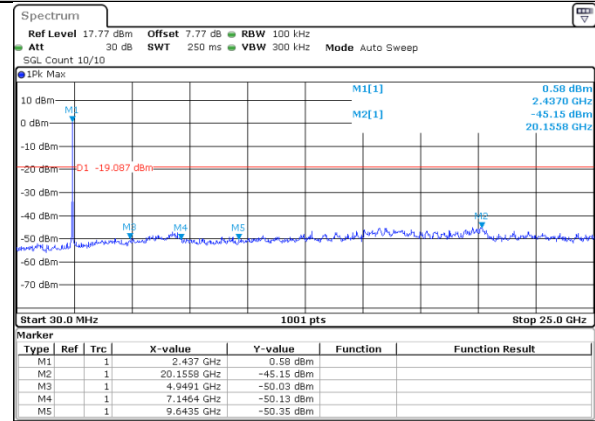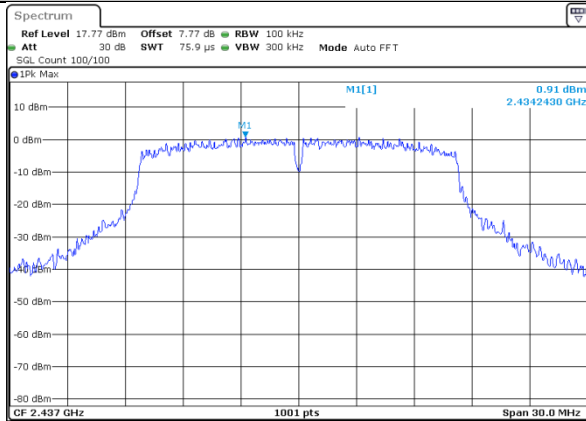

## Highest Channel

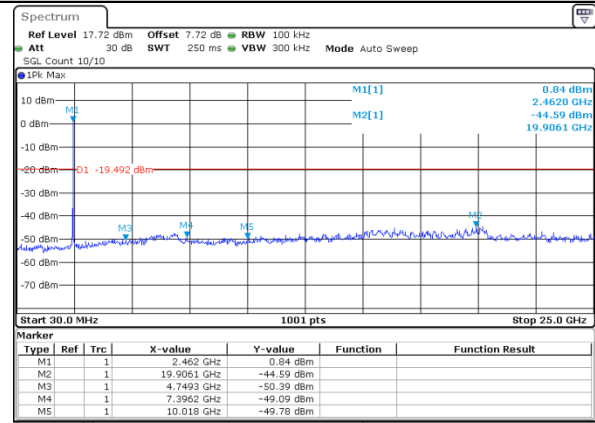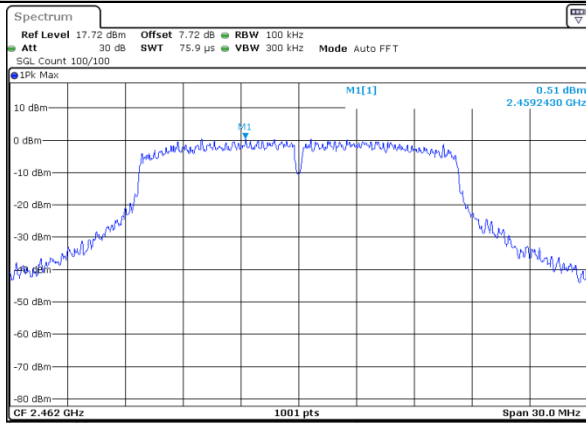




## 802.11n (HT20) Modulation




## Lowest Channel

## Band Edge

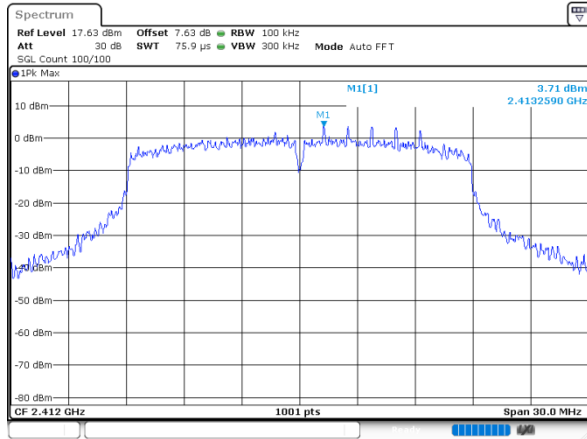

## Highest Channel



## Band Edge

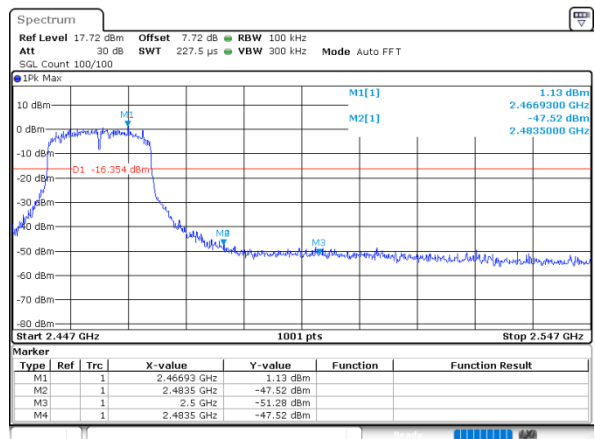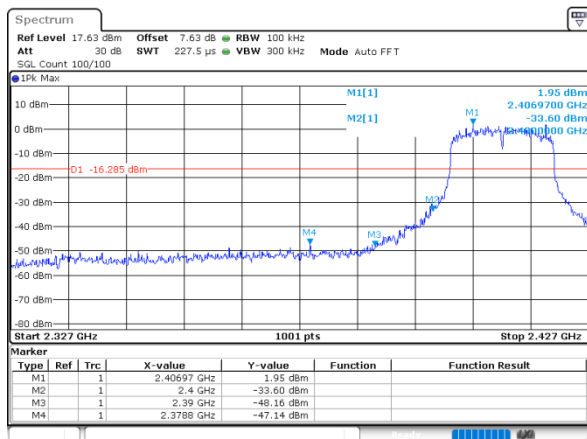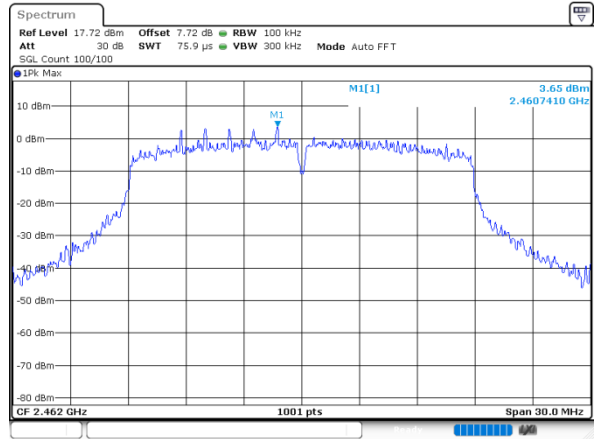





## Spurious emission



## Lowest Channel

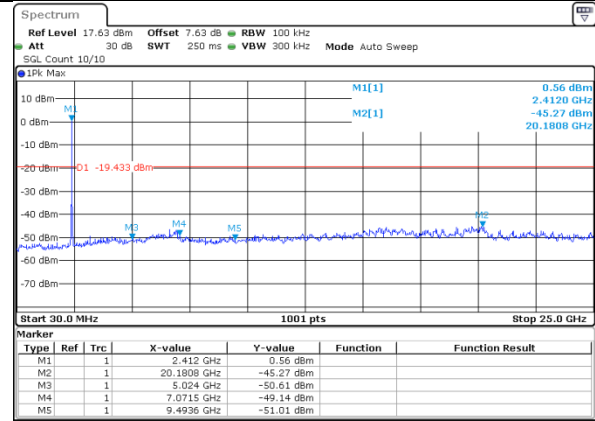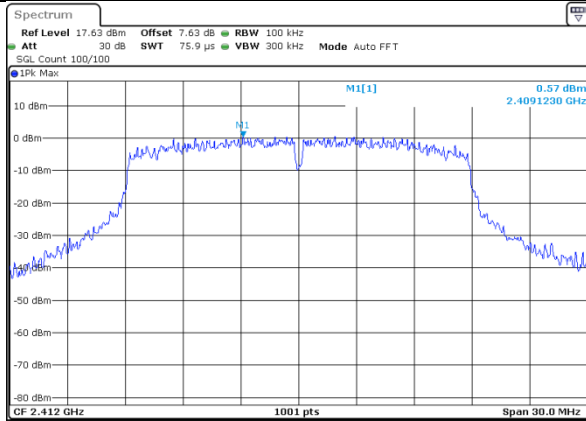

## Middle Channel

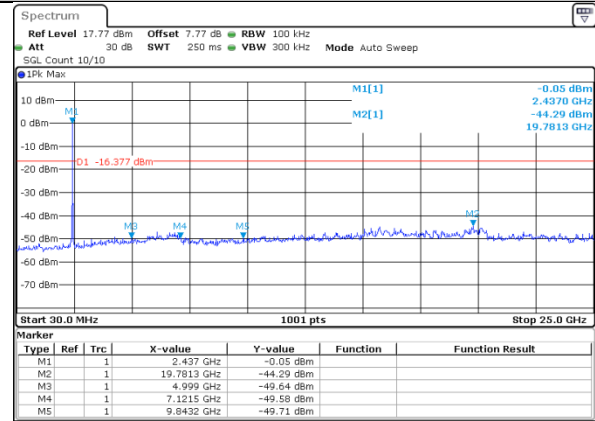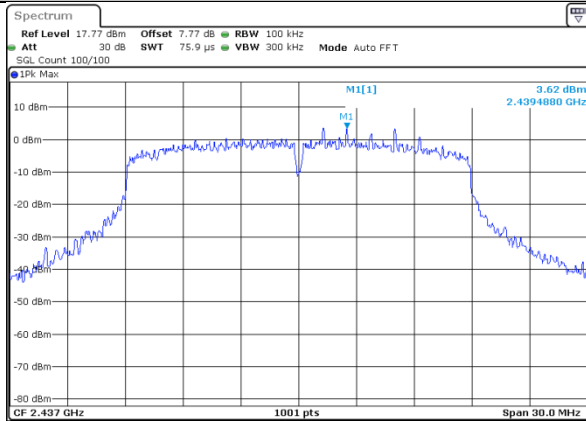


## Highest Channel

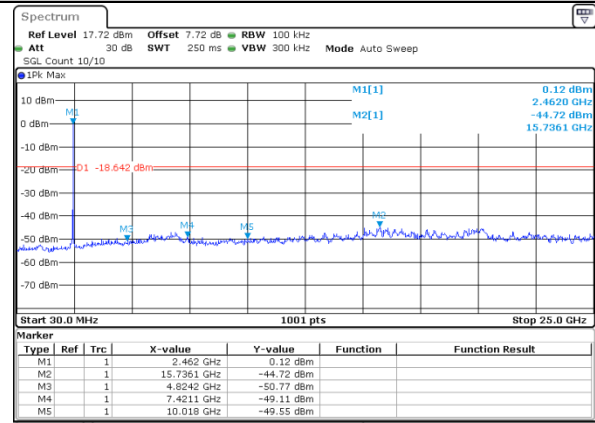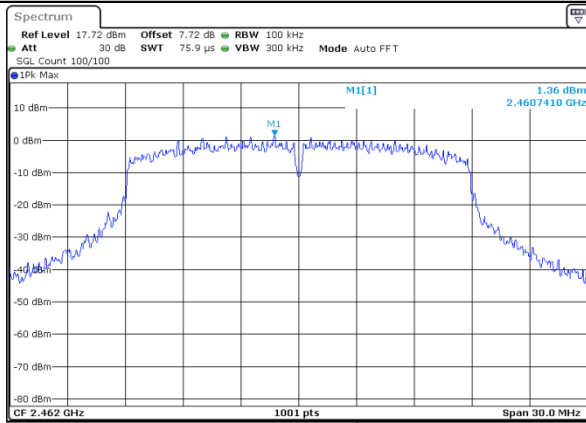





## 802.11n (HT40) Modulation

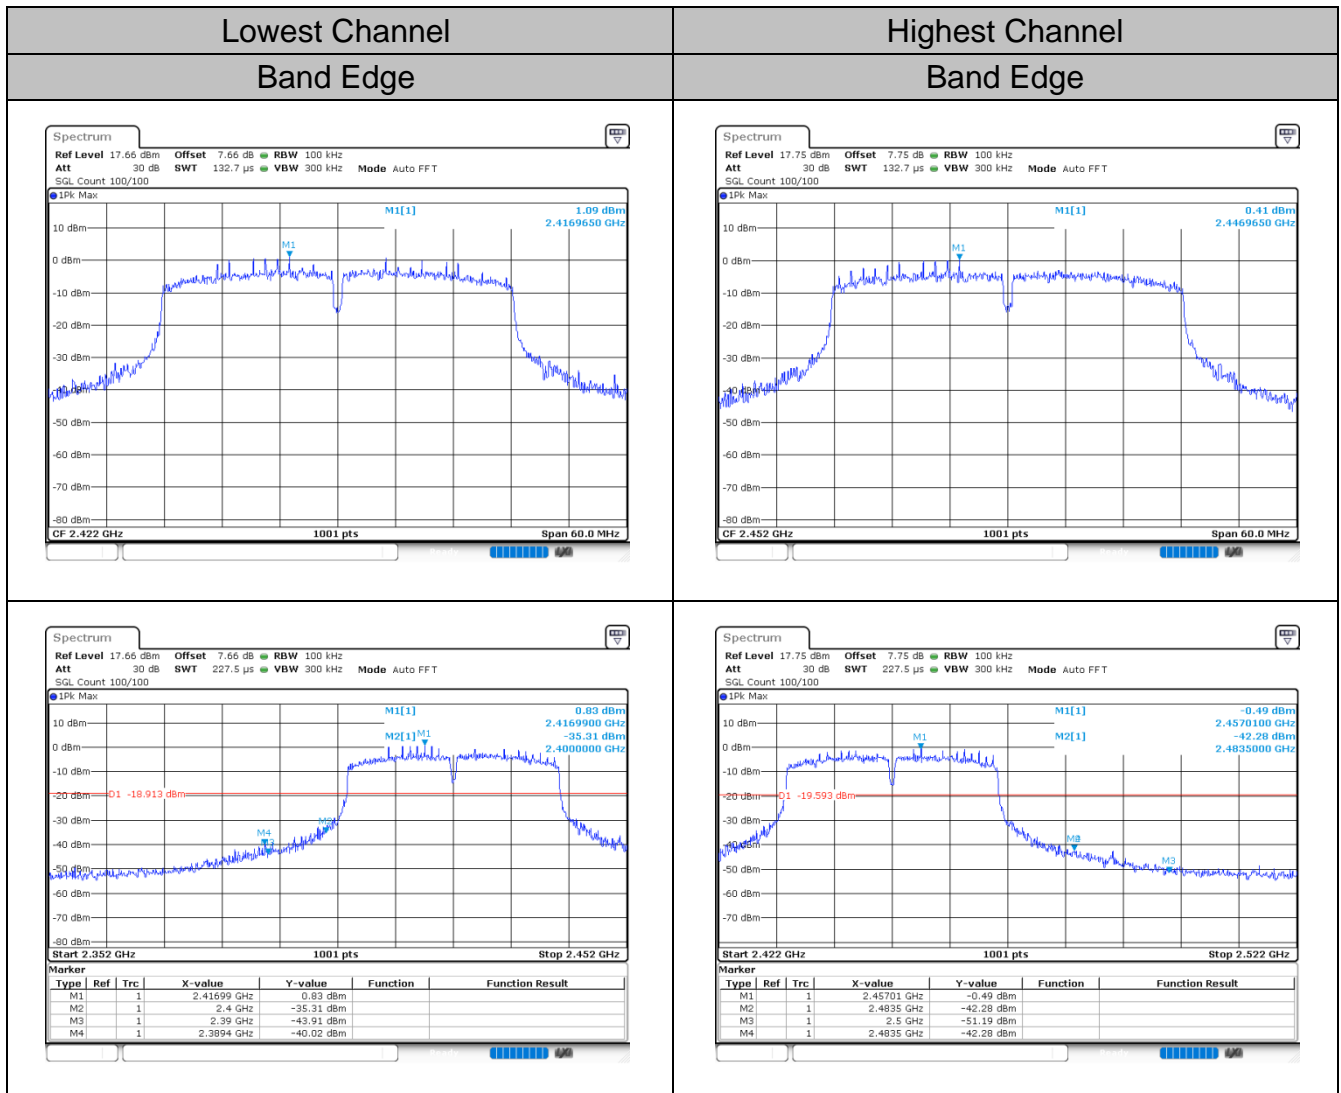





## Spurious emission



## Lowest Channel

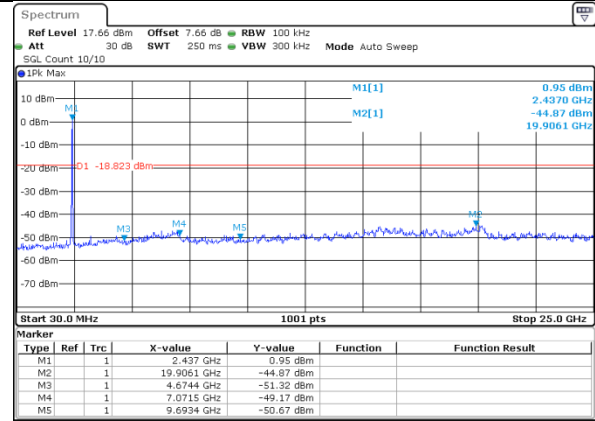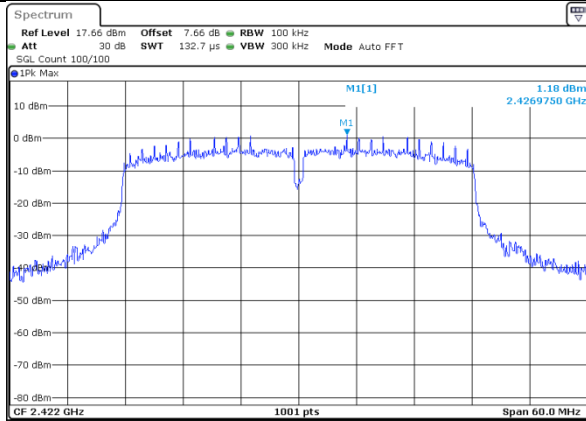

## Middle Channel

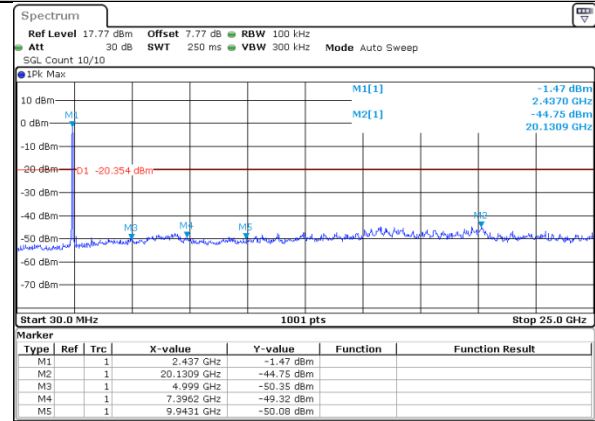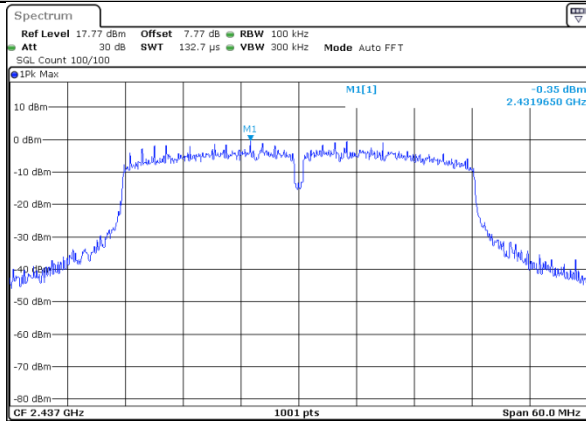


## Highest Channel

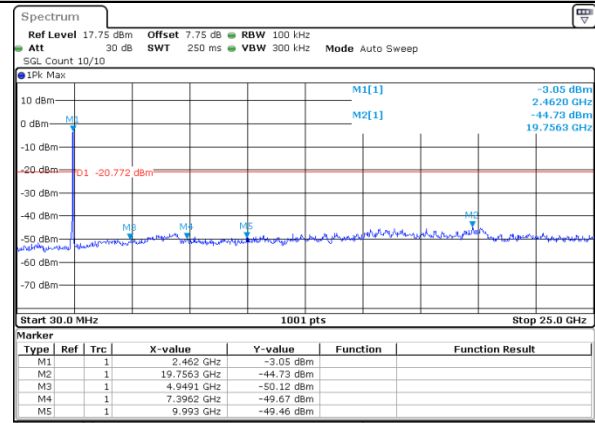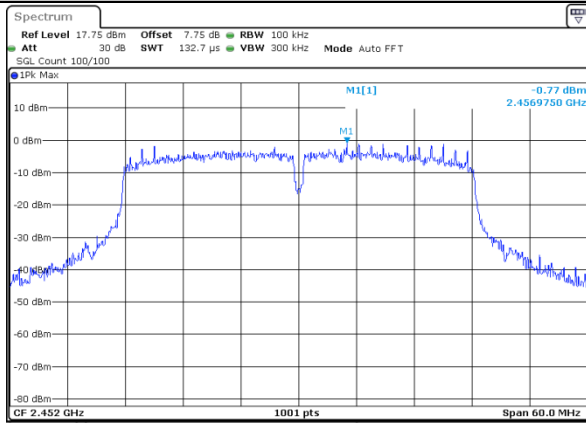





## 4.7. Radiated Spurious Emission Measurement

### Test Specification
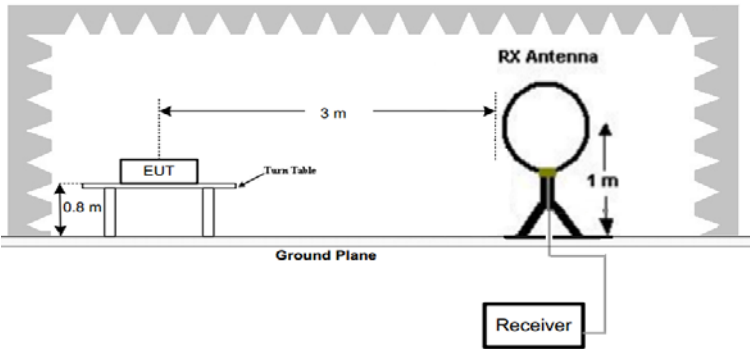
<b>Test Requirement:</b>	FCC Part15 C Section 15.209			
<b>Test Method:</b>	ANSI C63.10: 2013			
<b>Frequency Range:</b>	9 kHz to 25 GHz			
<b>Measurement Distance:</b>	3 m			
<b>Antenna Polarization:</b>	Horizontal & Vertical			
<b>Operation mode:</b>	Transmitting mode with modulation			
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	120KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
<b>Limit:</b>		Peak	1MHz	10Hz
				Average Value
<b>Test setup:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)	300	
	0.490-1.705	24000/F(KHz)	30	
	1.705-30	30	30	
	30-88	100	3	
<b>Test setup:</b>	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
<b>Test setup:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
<b>Test setup:</b>	For radiated emissions below 30MHz			
				
	30MHz to 1GHz			

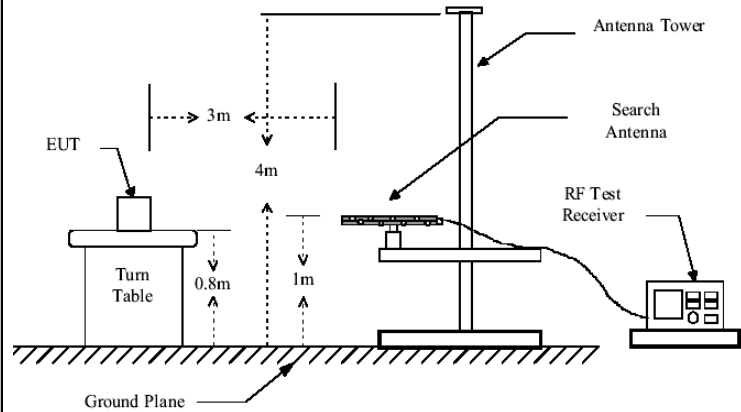

Above 1GHz

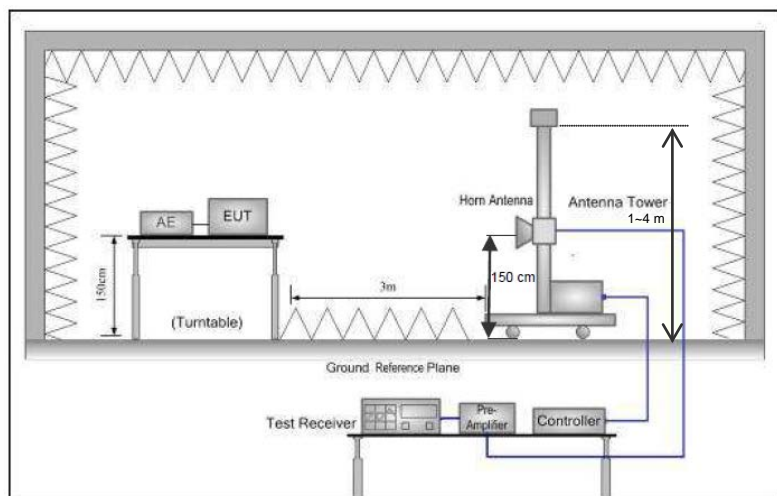

### Test Procedure:

- For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a highPASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which



	<p>maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"><li>(1) Span shall wide enough to fully capture the emission being measured;</li><li>(2) Set RBW=100 kHz for <math>f &lt; 1</math> GHz; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold;</li><li>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement.</li></ul> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS



**Test Instruments**

<b>Radiated Emission Test Site (966)</b>				
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Due</b>
Receiver	R&S	ESCI-7	HKE-010	Dec. 25, 2020
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 25, 2020
Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 25, 2020
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Dec. 25, 2020
Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 25, 2020
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 25, 2020
Preamplifier	Agilent	83051A	HKE-016	Dec. 25, 2020
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 25, 2020
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 25, 2020
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 25, 2020
High pass filter unit	Tonscend	JS0806-F	HKE-055	Dec. 25, 2020
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 25, 2020
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable	Times	9kHz-1GHz	HKE-117	Dec. 25, 2020
RF cable	Times	1-40G	HKE-034	Dec. 25, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## Test Data

All the test modes completed for test. only the worst result of (802.11b at 2412MHz) was reported as below:

Below 1GHz

### Horizontal

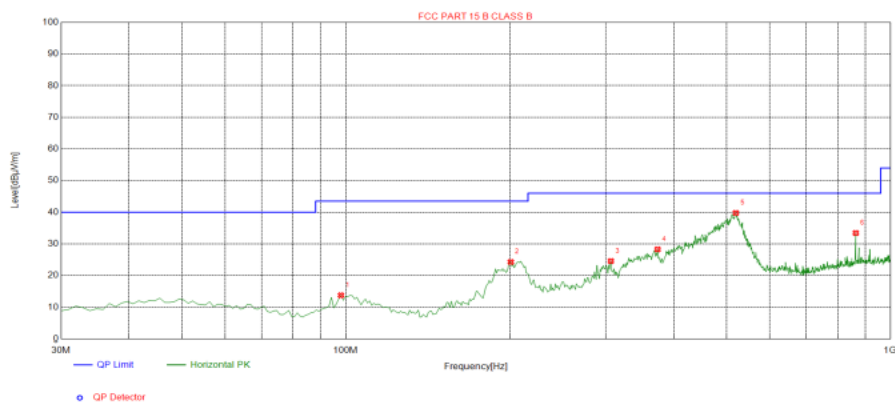

#### Suspected List


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	97.9680	-15.74	29.50	13.76	43.50	29.74	100	332	Horizontal
2	200.8909	-15.04	39.33	24.29	43.50	19.21	100	274	Horizontal
3	306.7267	-12.65	37.22	24.57	46.00	21.43	100	90	Horizontal
4	373.7237	-10.93	39.20	28.27	46.00	17.73	100	313	Horizontal
5	520.3403	-7.72	47.50	39.78	46.00	6.22	100	161	Horizontal
6	864.0641	-2.37	35.81	33.44	46.00	12.56	100	300	Horizontal

#### Final Data List

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



## Vertical

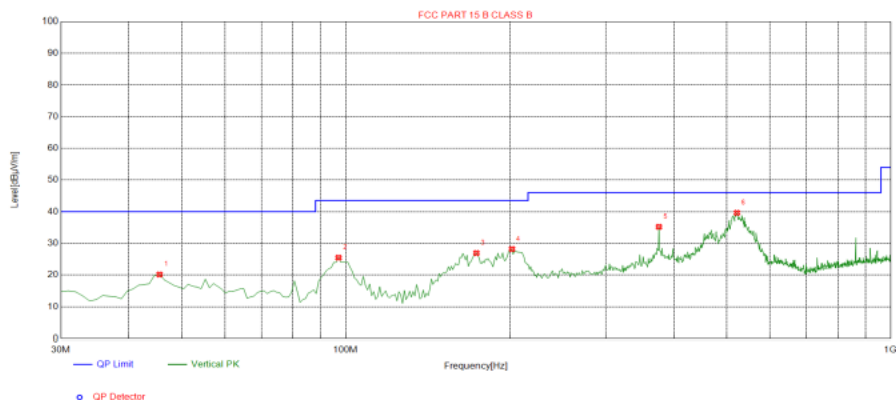

### Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	45.5355	-13.65	33.81	20.16	40.00	19.84	100	114	Vertical
2	96.9970	-15.90	41.37	25.47	43.50	18.03	100	31	Vertical
3	173.7037	-17.14	44.06	26.92	43.50	16.58	100	227	Vertical
4	201.8619	-15.01	43.20	28.19	43.50	15.31	100	175	Vertical
5	375.6657	-10.90	46.12	35.22	46.00	10.78	100	155	Vertical
6	522.2823	-7.67	47.30	39.63	46.00	6.37	100	208	Vertical

### Final Data List

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

## Harmonics and Spurious Emissions

### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

**Above 1GHz****RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.79	-3.64	59.15	74.00	-14.85	Peak
4824	44.86	-3.64	41.22	54.00	-12.78	AVG
7236	62.24	-0.95	61.29	74.00	-12.71	Peak
7236	43.57	-0.95	42.62	54.00	-11.38	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.48	-3.64	58.84	74.00	-15.16	Peak
4824	44.78	-3.64	41.14	54.00	-12.86	AVG
7236	62.57	-0.95	61.62	74.00	-12.38	Peak
7236	45.96	-0.95	45.01	54.00	-8.99	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.17	-3.51	57.66	74.00	-16.34	Peak
4874	45.62	-3.51	42.11	54.00	-11.89	AVG
7311	62.04	-0.82	61.22	74.00	-12.78	Peak
7311	43.05	-0.82	42.23	54.00	-11.77	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.31	-3.51	57.80	74.00	-16.20	Peak
4874	43.60	-3.51	40.09	54.00	-13.91	AVG
7311	62.91	-0.82	62.09	74.00	-11.91	Peak
7311	43.18	-0.82	42.36	54.00	-11.64	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



## HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.73	-3.43	58.30	74.00	-15.70	Peak
4924	44.17	-3.43	40.74	54.00	-13.26	AVG
7386	61.42	-0.75	60.67	74.00	-13.33	Peak
7386	43.60	-0.75	42.85	54.00	-11.15	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.50	-3.43	59.07	74.00	-14.93	Peak
4924	43.15	-3.43	39.72	54.00	-14.28	AVG
7386	63.63	-0.75	62.88	74.00	-11.12	Peak
7386	45.89	-0.75	45.14	54.00	-8.86	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) &lt; 93.98(AV Limit), at harmonic 53.20dBuV/m(PK Value) &lt; 54dBuV/m(AV Limit), the Average Detected not need to completed.



## LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.59	-3.64	58.95	74.00	-15.05	Peak
4824	45.62	-3.64	41.98	54.00	-12.02	AVG
7236	63.72	-0.95	62.77	74.00	-11.23	Peak
7236	45.61	-0.95	44.66	54.00	-9.34	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	61.22	-3.64	57.58	74.00	-16.42	Peak
4824	43.34	-3.64	39.70	54.00	-14.30	AVG
7236	62.78	-0.95	61.83	74.00	-12.17	Peak
7236	45.91	-0.95	44.96	54.00	-9.04	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.57	-3.51	60.06	74.00	-13.94	Peak
4874	44.48	-3.51	40.97	54.00	-13.03	AVG
7311	62.22	-0.82	61.40	74.00	-12.60	Peak
7311	44.39	-0.82	43.57	54.00	-10.43	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.39	-3.51	58.88	74.00	-15.12	Peak
4874	45.09	-3.51	41.58	54.00	-12.42	AVG
7311	63.18	-0.82	62.36	74.00	-11.64	Peak
7311	45.91	-0.82	45.09	54.00	-8.91	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						





## HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.48	-3.43	59.05	74.00	-14.95	Peak
4924	45.53	-3.43	42.10	54.00	-11.90	AVG
7386	62.53	-0.75	61.78	74.00	-12.22	Peak
7386	43.05	-0.75	42.30	54.00	-11.70	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.87	-3.43	59.44	74.00	-14.56	Peak
4924	43.95	-3.43	40.52	54.00	-13.48	AVG
7386	62.89	-0.75	62.14	74.00	-11.86	Peak
7386	44.66	-0.75	43.91	54.00	-10.09	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes bandedge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.06	-3.64	58.42	74.00	-15.58	Peak
4824	44.17	-3.64	40.53	54.00	-13.47	AVG
7236	63.75	-0.95	62.80	74.00	-11.20	Peak
7236	43.06	-0.95	42.11	54.00	-11.89	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	61.95	-3.64	58.31	74.00	-15.69	Peak
4824	44.40	-3.64	40.76	54.00	-13.24	AVG
7236	63.18	-0.95	62.23	74.00	-11.77	Peak
7236	44.79	-0.95	43.84	54.00	-10.16	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.42	-3.51	59.91	74.00	-14.09	Peak
4874	45.91	-3.51	42.40	54.00	-11.60	AVG
7311	61.09	-0.82	60.27	74.00	-13.73	Peak
7311	44.49	-0.82	43.67	54.00	-10.33	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.96	-3.51	58.45	74.00	-15.55	Peak
4874	43.35	-3.51	39.84	54.00	-14.16	AVG
7311	62.21	-0.82	61.39	74.00	-12.61	Peak
7311	45.90	-0.82	45.08	54.00	-8.92	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



## HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.62	-3.43	59.19	74.00	-14.81	Peak
4924	43.28	-3.43	39.85	54.00	-14.15	AVG
7386	62.44	-0.75	61.69	74.00	-12.31	Peak
7386	45.79	-0.75	45.04	54.00	-8.96	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.33	-3.43	57.90	74.00	-16.10	Peak
4924	44.46	-3.43	41.03	54.00	-12.97	AVG
7386	63.52	-0.75	62.77	74.00	-11.23	Peak
7386	45.11	-0.75	44.36	54.00	-9.64	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	61.82	-3.63	58.19	74.00	-15.81	Peak
4844	42.94	-3.63	39.31	54.00	-14.69	AVG
7266	61.12	-0.94	60.18	74.00	-13.82	Peak
7266	42.16	-0.94	41.22	54.00	-12.78	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	60.48	-3.63	56.85	74.00	-17.15	Peak
4844	43.13	-3.63	39.50	54.00	-14.50	AVG
7266	61.70	-0.94	60.76	74.00	-13.24	Peak
7266	42.16	-0.94	41.22	54.00	-12.78	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.03	-3.51	57.52	74.00	-16.48	Peak
4874	42.81	-3.51	39.30	54.00	-14.70	AVG
7311	60.80	-0.82	59.98	74.00	-14.02	Peak
7311	43.27	-0.82	42.45	54.00	-11.55	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.13	-3.51	55.62	74.00	-18.38	Peak
4874	43.11	-3.51	39.60	54.00	-14.40	AVG
7311	61.58	-0.82	60.76	74.00	-13.24	Peak
7311	43.85	-0.82	43.03	54.00	-10.97	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						



HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	59.72	-3.43	56.29	74.00	-17.71	Peak
4904	41.55	-3.43	38.12	54.00	-15.88	AVG
7356	59.26	-0.75	58.51	74.00	-15.49	Peak
7356	41.92	-0.75	41.17	54.00	-12.83	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	59.88	-3.43	56.45	74.00	-17.55	Peak
4904	42.89	-3.43	39.46	54.00	-14.54	AVG
7356	60.90	-0.75	60.15	74.00	-13.85	Peak
7356	41.23	-0.75	40.48	54.00	-13.52	AVG
Remark: Factor = Cable loss + Antenna factor – Preamplifier						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.24	-5.81	51.43	74.00	-22.57	Peak
2310	47.59	-5.81	41.78	54.00	-12.22	AVG
2390	60.46	-5.84	54.62	74.00	-19.38	Peak
2390	49.02	-5.84	43.18	54.00	-10.82	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.08	-5.81	49.27	74.00	-24.73	Peak
2310	48.26	-5.81	42.45	54.00	-11.55	AVG
2390	60.69	-5.84	54.85	74.00	-19.15	Peak
2390	48.34	-5.84	42.50	54.00	-11.50	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						





Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.09	-5.81	51.28	74.00	-22.72	Peak
2483.5	47.26	-5.81	41.45	54.00	-12.55	AVG
2500	59.84	-6.06	53.78	74.00	-20.22	Peak
2500	48.56	-6.06	42.50	54.00	-11.50	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.35	-5.81	51.54	74.00	-22.46	Peak
2483.5	47.59	-5.81	41.78	54.00	-12.22	AVG
2500	61.77	-6.06	55.71	74.00	-18.29	Peak
2500	47.60	-6.06	41.54	54.00	-12.46	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.82	-5.81	52.01	74.00	-21.99	Peak
2310	48.76	-5.81	42.95	54.00	-11.05	AVG
2390	59.39	-5.84	53.55	74.00	-20.45	Peak
2390	49.19	-5.84	43.35	54.00	-10.65	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.89	-5.81	50.08	74.00	-23.92	Peak
2310	49.74	-5.81	43.93	54.00	-10.07	AVG
2390	60.69	-5.84	54.85	74.00	-19.15	Peak
2390	49.61	-5.84	43.77	54.00	-10.23	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.81	51.17	74.00	-22.83	Peak
2483.5	48.45	-5.81	42.64	54.00	-11.36	AVG
2500	59.54	-6.06	53.48	74.00	-20.52	Peak
2500	47.45	-6.06	41.39	54.00	-12.61	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.95	-5.81	52.14	74.00	-21.86	Peak
2483.5	47.08	-5.81	41.27	54.00	-12.73	AVG
2500	61.09	-6.06	55.03	74.00	-18.97	Peak
2500	47.74	-6.06	41.68	54.00	-12.32	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.31	-5.81	50.50	74.00	-23.50	Peak
2310	49.20	-5.81	43.39	54.00	-10.61	AVG
2390	61.98	-5.84	56.14	74.00	-17.86	Peak
2390	47.78	-5.84	41.94	54.00	-12.06	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.37	-5.81	50.56	74.00	-23.44	Peak
2310	49.20	-5.81	43.39	54.00	-10.61	AVG
2390	61.11	-5.84	55.27	74.00	-18.73	Peak
2390	48.80	-5.84	42.96	54.00	-11.04	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.48	-5.81	51.67	74.00	-22.33	Peak
2483.5	47.80	-5.81	41.99	54.00	-12.01	AVG
2500	59.79	-6.06	53.73	74.00	-20.27	Peak
2500	47.55	-6.06	41.49	54.00	-12.51	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.09	-5.81	49.28	74.00	-24.72	Peak
2483.5	49.71	-5.81	43.90	54.00	-10.10	AVG
2500	61.49	-6.06	55.43	74.00	-18.57	Peak
2500	49.21	-6.06	43.15	54.00	-10.85	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.85	-5.81	51.04	74.00	-22.96	Peak
2310	48.74	-5.81	42.93	54.00	-11.07	AVG
2390	61.09	-5.84	55.25	74.00	-18.75	Peak
2390	47.24	-5.84	41.40	54.00	-12.60	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.53	-5.81	49.72	74.00	-24.28	Peak
2310	47.56	-5.81	41.75	54.00	-12.25	AVG
2390	60.85	-5.84	55.01	74.00	-18.99	Peak
2390	48.82	-5.84	42.98	54.00	-11.02	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.19	-5.81	50.38	74.00	-23.62	Peak
2483.5	49.43	-5.81	43.62	54.00	-10.38	AVG
2500	61.57	-6.06	55.51	74.00	-18.49	Peak
2500	49.20	-6.06	43.14	54.00	-10.86	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.01	-5.81	50.20	74.00	-23.80	Peak
2483.5	48.84	-5.81	43.03	54.00	-10.97	AVG
2500	61.35	-6.06	55.29	74.00	-18.71	Peak
2500	48.21	-6.06	42.15	54.00	-11.85	AVG
Remark: Factor = Cable loss + Antenna factor - Preamplifier						
Remark: All the other emissions not reported were too low to read and deemed to comply with the FCC limit						

## 4.8. ANTENNA REQUIREMENT

### Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a FPCB Antenna, The directional gains of antenna used for transmitting is 3dBi.

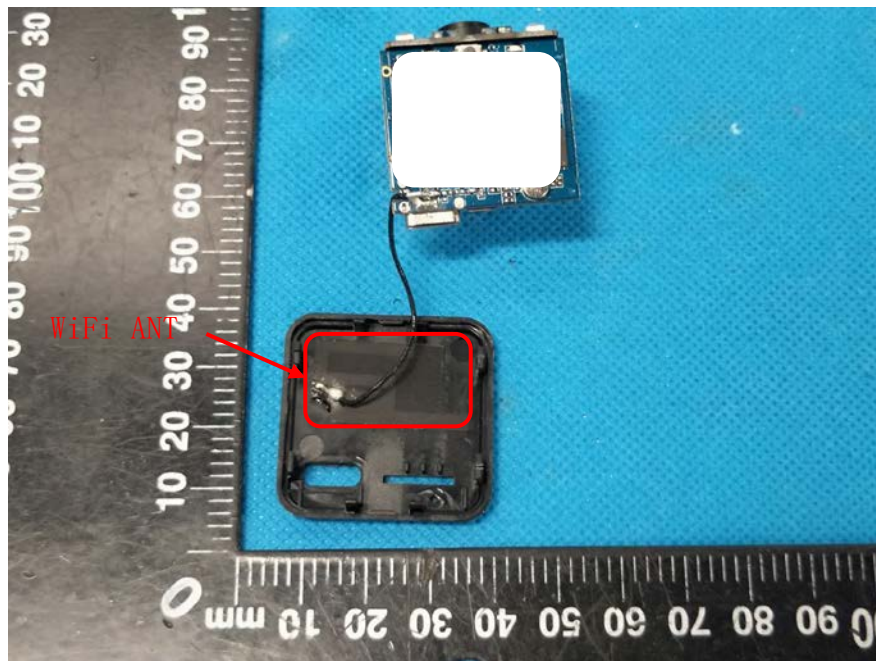





#### **4.9. PHOTOGRAPH OF TEST**

Reference to the reporter : ANNEX C of TEST SETUP PHOTO



#### **4.10. PHOTOS OF THE EUT**

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----