



# FCC TEST REPORT

**Test report**  
**On Behalf of**  
**Shenzhen DANACOID Photoelectric Co., LTD.**  
**For**  
**LED full color smart screen**  
**Model No.: DP-108/B, Please refer to page 7 for Serial models**

**FCC ID: 2AWB4-DP-108B**

**Prepared for :** Shenzhen DANACOID Photoelectric Co., LTD.  
East side of Zone B 1F of Tong kangfu Industrial Park Yingrenshi Community  
Yingrenshi Community, ShiyanStreet, Baoan District, Shenzhen City, China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Apr. 14, 2020 ~Apr. 21, 2020

**Date of Report:** Apr. 21, 2020

**Report Number:** HK2004170688-1E



### TEST RESULT CERTIFICATION

**Applicant's name** .....: Shenzhen DANACOID Photoelectric Co., LTD.  
 Address .....: East side of Zone B 1F of Tong kangfu Industrial Park Yingrenshi  
 Community Yingrenshi Community, ShiyanStreet, Baoan District,  
 Shenzhen City, China

**Manufacture's Name**.....: Shenzhen DANACOID Photoelectric Co., LTD.  
 Address .....: East side of Zone B 1F of Tong kangfu Industrial Park Yingrenshi  
 Community Yingrenshi Community, ShiyanStreet, Baoan District,  
 Shenzhen City, China

**Product description**

Trade Mark: N/A  
 Product name.....: LED full color smart screen  
 Model and/or type reference : DP-108/B, Please refer to page 7 for Serial models

**Standards** .....: FCC Rules and Regulations Part 15 Subpart C Section 15.247  
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:  
 Date (s) of performance of tests .....: Apr. 14, 2020 ~Apr. 21, 2020  
 Date of Issue.....: Apr. 21, 2020  
 Test Result.....: **Pass**

Testing Engineer : Gary Qian  
 (Gary Qian)

Technical Manager : Eden Hu  
 (Eden Hu)

Authorized Signatory : Jason Zhou  
 (Jason Zhou)



## TABLE OF CONTENTS

<b>1. Test Result Summary .....</b>	<b>5</b>
1.1. TEST PROCEDURES AND RESULTS.....	5
1.2. TEST FACILITY .....	5
1.3. MEASUREMENT UNCERTAINTY .....	6
<b>2. EUT Description .....</b>	<b>7</b>
2.1. GENERAL DESCRIPTION OF EUT .....	7
2.2. CARRIER FREQUENCY OF CHANNELS .....	8
2.3. OPERATION OF EUT DURING TESTING .....	8
2.4. DESCRIPTION OF TEST SETUP .....	9
<b>3. General Information.....</b>	<b>10</b>
3.1. TEST ENVIRONMENT AND MODE .....	10
3.2. DESCRIPTION OF SUPPORT UNITS .....	11
<b>4. Test Results and Measurement Data .....</b>	<b>12</b>
4.1. CONDUCTED EMISSION .....	12
4.2. MAXIMUM CONDUCTED OUTPUT POWER .....	16
4.3. EMISSION BANDWIDTH.....	18
4.4. POWER SPECTRAL DENSITY .....	24
4.5. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT .....	30
4.6. RADIATED SPURIOUS EMISSION MEASUREMENT .....	36
4.7. ANTENNA REQUIREMENT .....	62
4.8. PHOTOGRAPH OF TEST.....	63
4.9. PHOTOS OF THE EUT .....	65



**\*\* Modified History \*\***

<b>Revision</b>	<b>Description</b>	<b>Issued Data</b>	<b>Remark</b>
Revision 1.0	Initial Test Report Release	Apr. 21, 2020	Jason Zhou



# 1. Test Result Summary

## 1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

## 1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



## 2. EUT Description

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	LED full color smart screen
Model Name	DP-108/B
Serial No.	P0.78, P0.93, P1.25, P1.47, P1.56, P1.667, P1.875, P1.923, P2, P2.5, P3, P4, P5, P6, P8, P10, HP3, HP4, HP5, HP6, HP8, HP10, DH4.75, GS3.91, GS7.81, DY-P0.78, DY-P0.93, DY-P1.25, DY-P1.56, DY-P1.875, DY-P2.0, DY-P2.5, DY-P10, DY-P11, DY-P12, DS-108/B, DS-108/S, DS-135/B, DS-135/S, DS-135/S/4K, DS-162/S, DS-162/S/4K, DS-216/S, DS-216/S/4K, DF-108/B, DF-108/F, DF-135/B, DF-135/F, DF-135/F/4K, DF-162/F, DF-162/F/4K, DF-216/F/4K, DF-216/F, DA-P2.5D, DP-108/P, DP-135/B, DP-135/P, DP-135/P/4K, DP-162/P, DP-162/P/4K, DP-216/P/4K, DP-216/P, DS-9B, DF-9F, DP-9S, DS-10B, DF-10F, DP-10S, DA-P1.25, DA-P1.56, DA-P1.875, DA-P1.923, DA-P2.0, DA-P2.5, DA-P3.0, DA-P1.25D, DA-P1.56D, DA-P1.875D, DA-P1.923D, DA-P2.0D, DA-P3.0D, DA-100, DA-200, DA-300, DA-400, DA-500, DA-600, DA-700, DA-800
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: DP-108/B
FCC ID	<b>2AWB4-DP-108B</b>
Antenna Type	Internal Antenna
Antenna Gain	1dBi
Operation frequency	802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n 40: 7CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Power Source	AC 120V, 60Hz
Power Rating	AC 120V, 60Hz



## 2.2. Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List For 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
--	--	04	2427	07	2442	--	--
--	--	05	2432	08	2447	--	--
03	2422	06	2437	09	2452		

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2.3. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

The mode is used: **Transmitting mode for 802.11n (HT40)**

Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz






## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted, Radiation testing:



Operation of EUT during Above 1GHz Radiation testing:

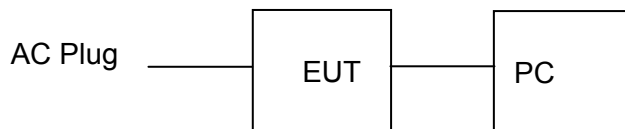

- PC information  
Model:hp Elite Book 840

The sample was placed (0.8m below 1GHz, 0.8m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X&Z position



### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
The sample was placed (0.8m below 1GHz, 0.8m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

**Final Test Mode:**

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

2. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20), 13.5Mbps for 802.11(H40). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.



### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### Test Specification

<b>Test Requirement:</b>	FCC Part 15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p><i>Remark</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>														
<b>Test Mode:</b>	Charging + transmitting with modulation														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														

**Test Instruments**


<b>Conducted Emission Shielding Room Test Site (843)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Due</b>
Receiver	R&S	ESCI 7	HKE-010	Dec. 25, 2020
LISN	R&S	ENV216	HKE-002	Dec. 25, 2020
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## TEST RESULTS

Phase: L

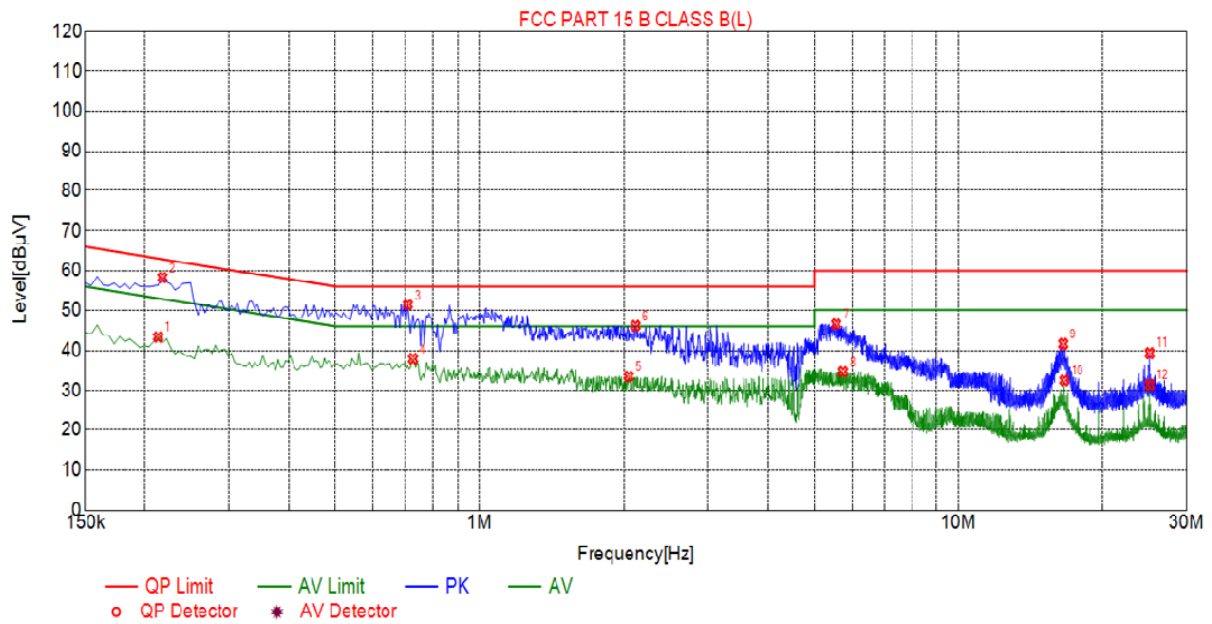


Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.2130	43.28	10.05	53.09	9.81	33.23	AV	L
2	0.2175	58.27	10.05	62.91	4.64	48.22	PK	L
3	0.7080	51.46	10.05	56.00	4.54	41.41	PK	L
4	0.7260	37.97	10.06	46.00	8.03	27.91	AV	L
5	2.0490	33.50	10.15	46.00	12.50	23.35	AV	L
6	2.1165	46.14	10.16	56.00	9.86	35.98	PK	L
7	5.5545	46.56	10.25	60.00	13.44	36.31	PK	L
8	5.7435	34.74	10.24	50.00	15.26	24.50	AV	L
9	16.5615	41.55	9.99	60.00	18.45	31.56	PK	L
10	16.6515	32.53	9.99	50.00	17.47	22.54	AV	L
11	25.0980	39.35	10.24	60.00	20.65	29.11	PK	L
12	25.0980	31.48	10.24	50.00	18.52	21.24	AV	L

Remark: Margin = Limit – Level  
 Correction factor = Cable lose + LISN insertion loss  
 Level=Test receiver reading + correction factor



Phase: N

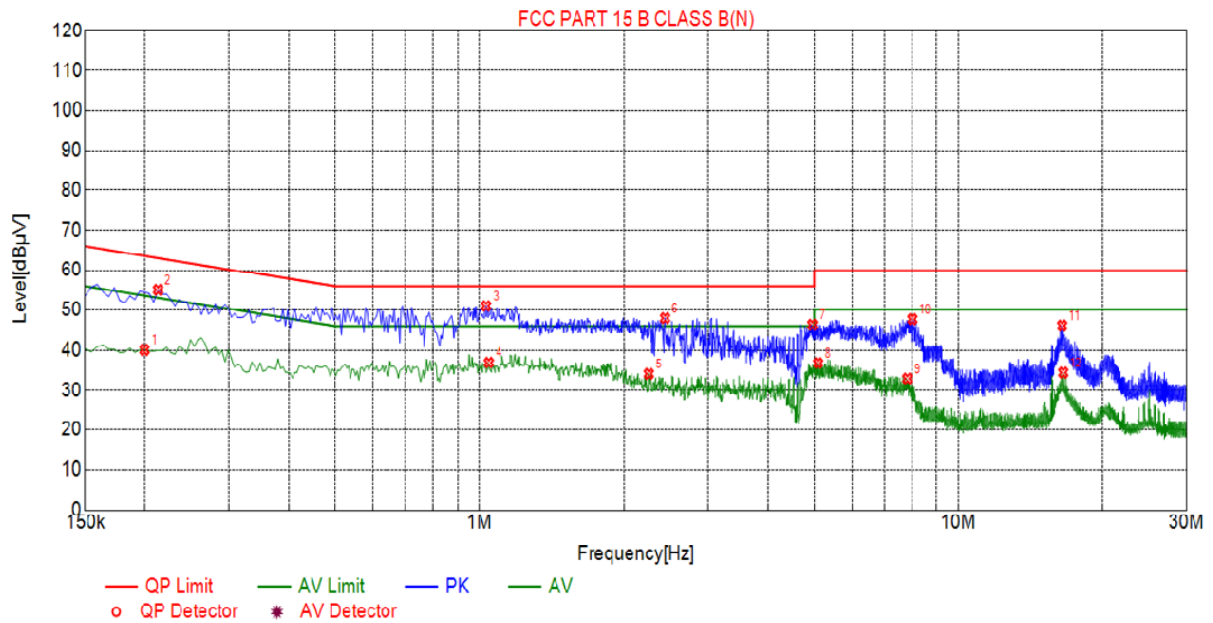

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1995	40.06	10.03	53.63	13.57	30.03	AV	N
2	0.2130	55.10	10.05	63.09	7.99	45.05	PK	N
3	1.0320	51.00	10.07	56.00	5.00	40.93	PK	N
4	1.0455	36.94	10.07	46.00	9.06	26.87	AV	N
5	2.2560	34.09	10.18	46.00	11.91	23.91	AV	N
6	2.4405	47.95	10.18	56.00	8.05	37.77	PK	N
7	4.9560	46.33	10.26	56.00	9.67	36.07	PK	N
8	5.0955	36.82	10.26	50.00	13.18	26.56	AV	N
9	7.8270	32.92	10.16	50.00	17.08	22.76	AV	N
10	8.0160	47.69	10.14	60.00	12.31	37.55	PK	N
11	16.4715	46.12	9.99	60.00	13.88	36.13	PK	N
12	16.5615	34.38	9.99	50.00	15.62	24.39	AV	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor





**Test Data**

<b>TX 802.11b Mode</b>			
Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	13.57	30
CH06	2437	13.78	30
CH11	2462	14.18	30
<b>TX 802.11g Mode</b>			
CH01	2412	13.18	30
CH06	2437	13.73	30
CH11	2462	14.46	30
<b>TX 802.11n20 Mode</b>			
CH01	2412	12.21	30
CH06	2437	12.53	30
CH11	2462	11.87	30
<b>TX 802.11n40 Mode</b>			
CH03	2422	10.39	30
CH06	2437	10.52	30
CH09	2452	10.67	30



**Test data**


Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	9.795	16.44	16.47	35.18
Middle	9.623	16.46	16.47	35.23
Highest	10.01	16.46	16.46	35.24
Limit:	>500KHZ			
Test Result:	PASS			

Test plots as follows:



### 802.11b Modulation

#### Lowest channel

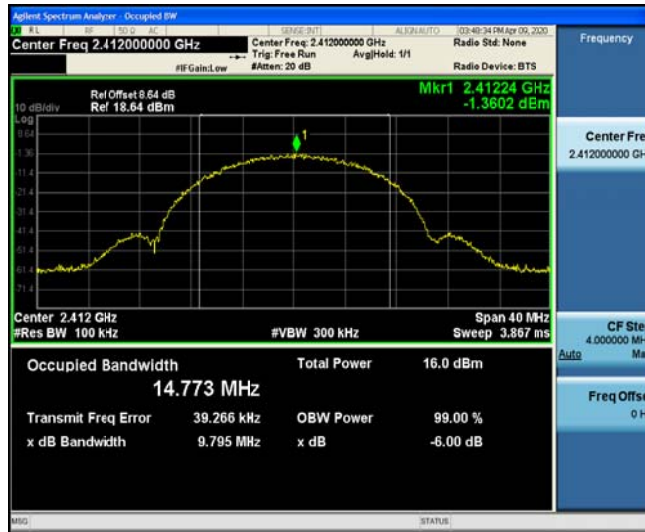

#### Middle channel




#### Highest channel






### 802.11g Modulation

#### Lowest channel

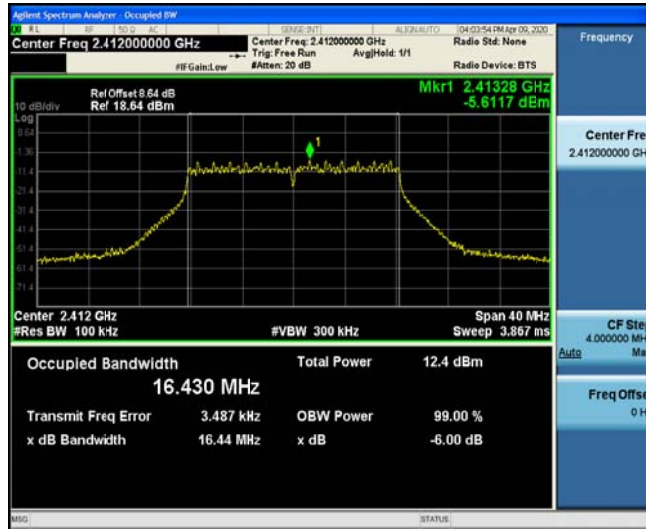

#### Middle channel

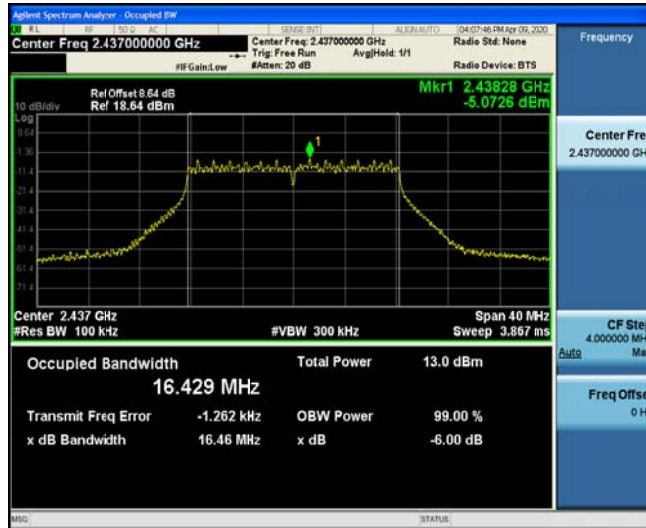


#### Highest channel





### 802.11n (HT20) Modulation

#### Lowest channel

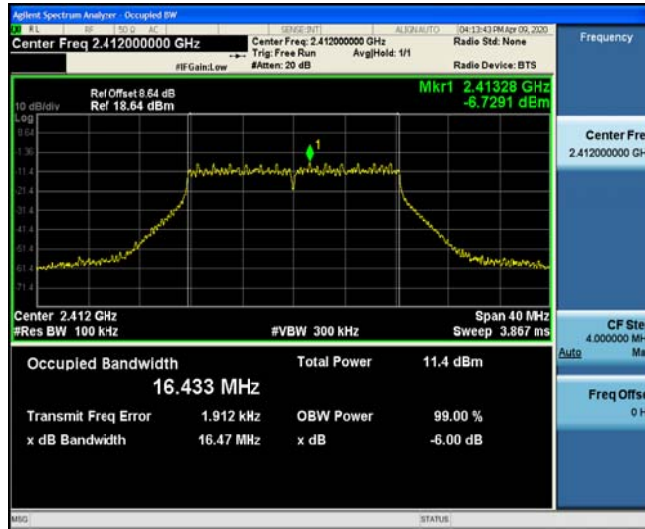

#### Middle channel



#### Highest channel






### 802.11n (HT40) Modulation


#### Lowest channel



#### Middle channel

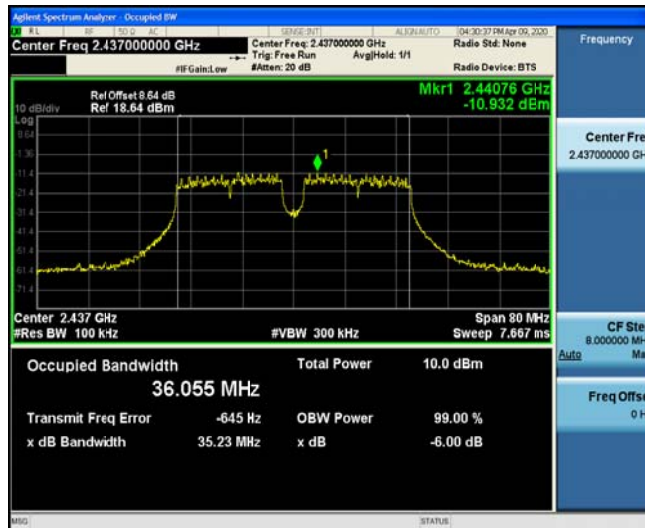

#### Highest channel

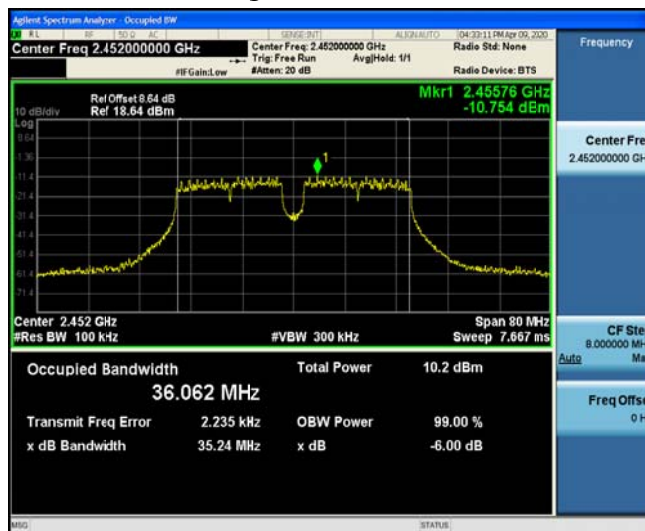





**Test data**

EUT Set Mode	Channel	Result (dBm/30kHz)	Result (dBm/3kHz)
802.11b	Lowest	-6.13	-16.13
	Middle	-5.75	-15.75
	Highest	-5.77	-15.77
802.11g	Lowest	-10.56	-20.56
	Middle	-10.02	-20.02
	Highest	-9.21	-19.21
802.11n(H20)	Lowest	-11.61	-21.61
	Middle	-11.36	-21.36
	Highest	-11.95	-21.95
802.11n(H40)	Lowest	-15.76	-25.76
	Middle	-16.06	-26.06
	Highest	-15.7	-25.7
PSD test result (dBm/3kHz)= PSD test result (dBm/30kHz)-10			
Limit: 8dBm/3kHz			
Test Result:	PASS		

Test plots as follows:



### 802.11b Modulation

#### Lowest channel



#### Middle channel




#### Highest channel





### 802.11g Modulation


#### Lowest channel

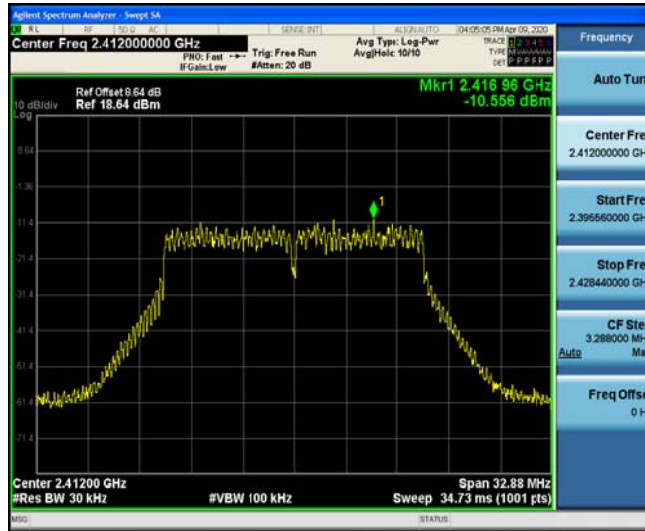

#### Middle channel



#### Highest channel

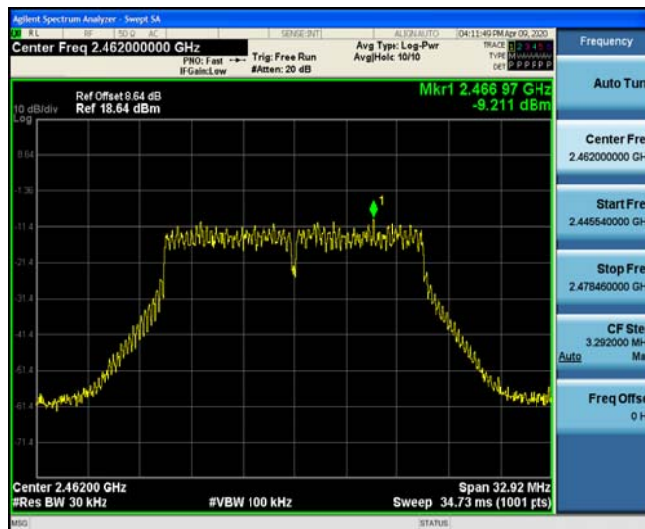



### 802.11n (HT20) Modulation


#### Lowest channel



#### Middle channel




#### Highest channel

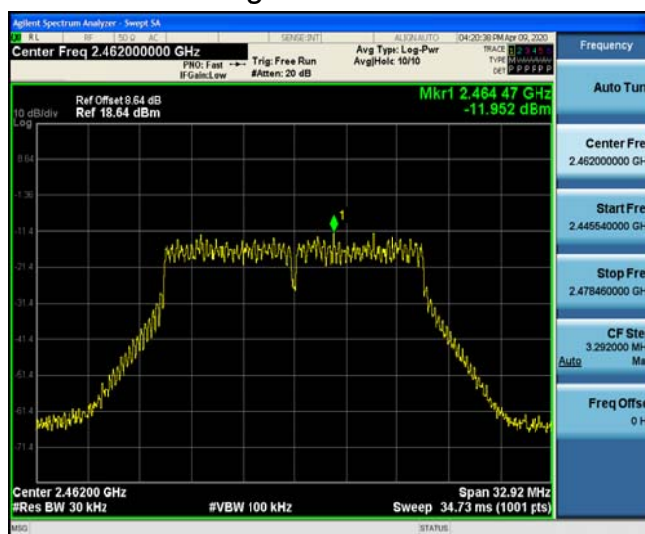



### 802.11n (HT40) Modulation

#### Lowest channel

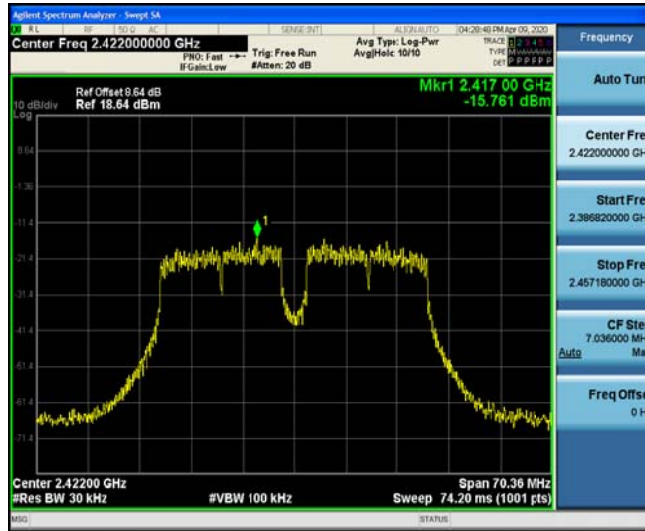

#### Middle channel



#### Highest channel





**Test Instruments**


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 25, 2020
Signal generator	Agilent	N5183A	HKE-071	Dec. 25, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 25, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 25, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



### Test Data


### 802.11b Modulation

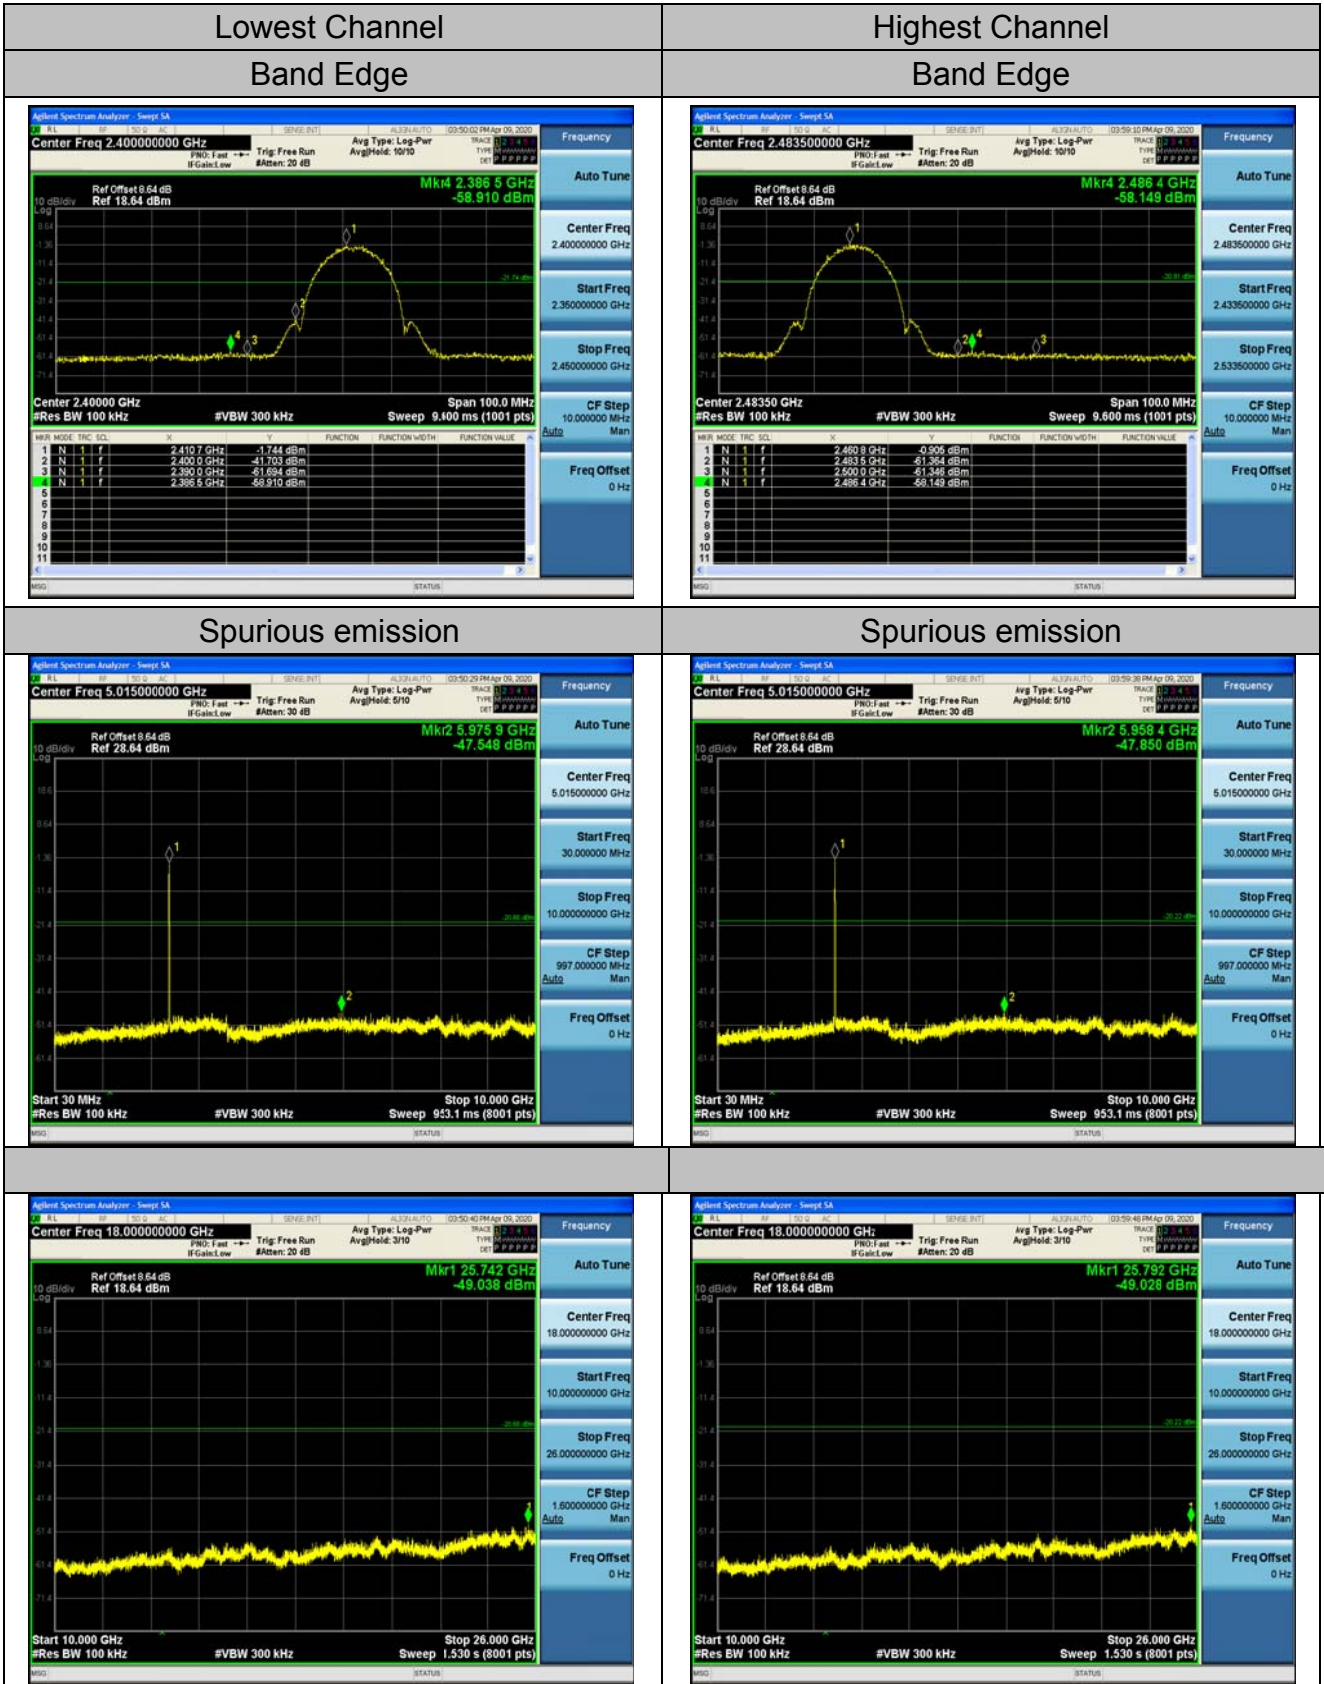






802.11g Modulation

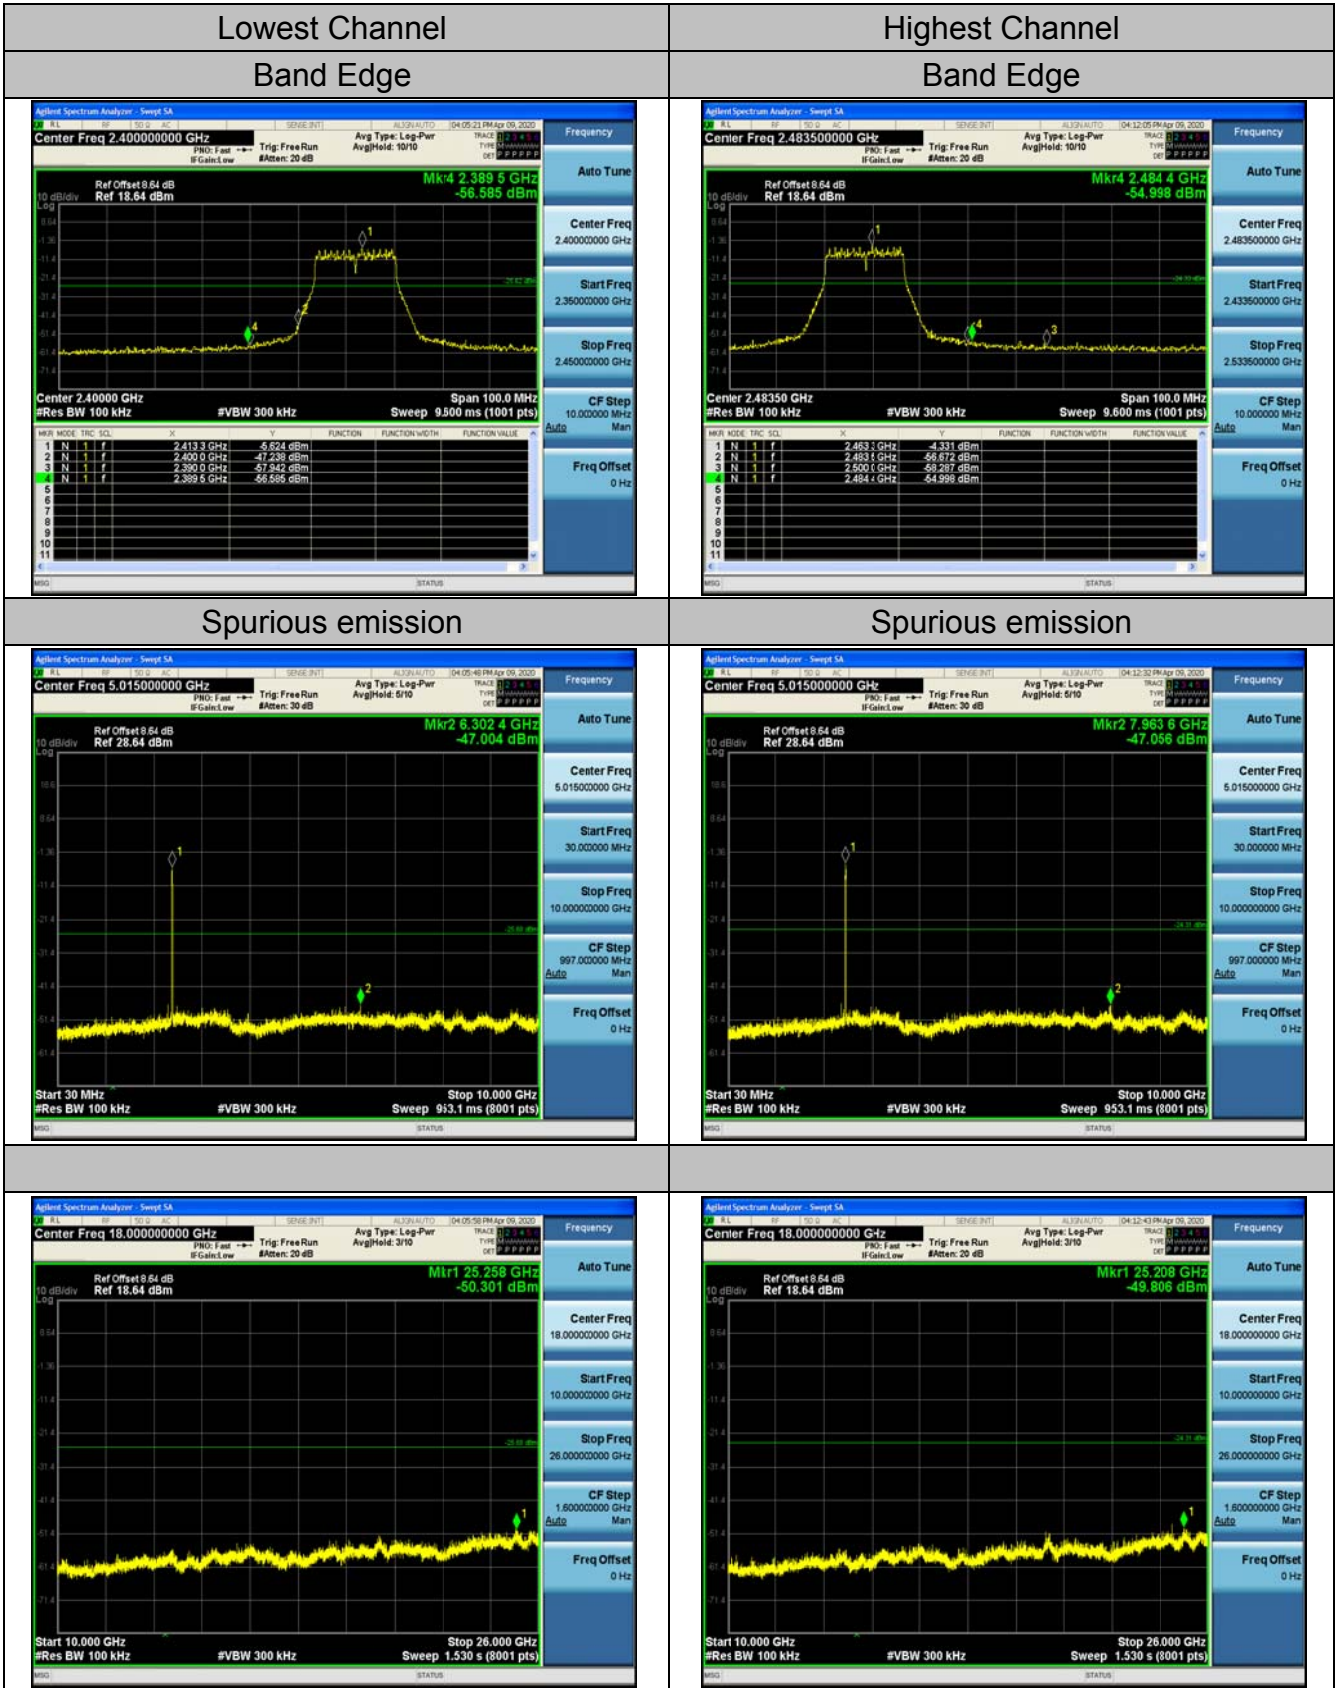




### 802.11n (HT20) Modulation

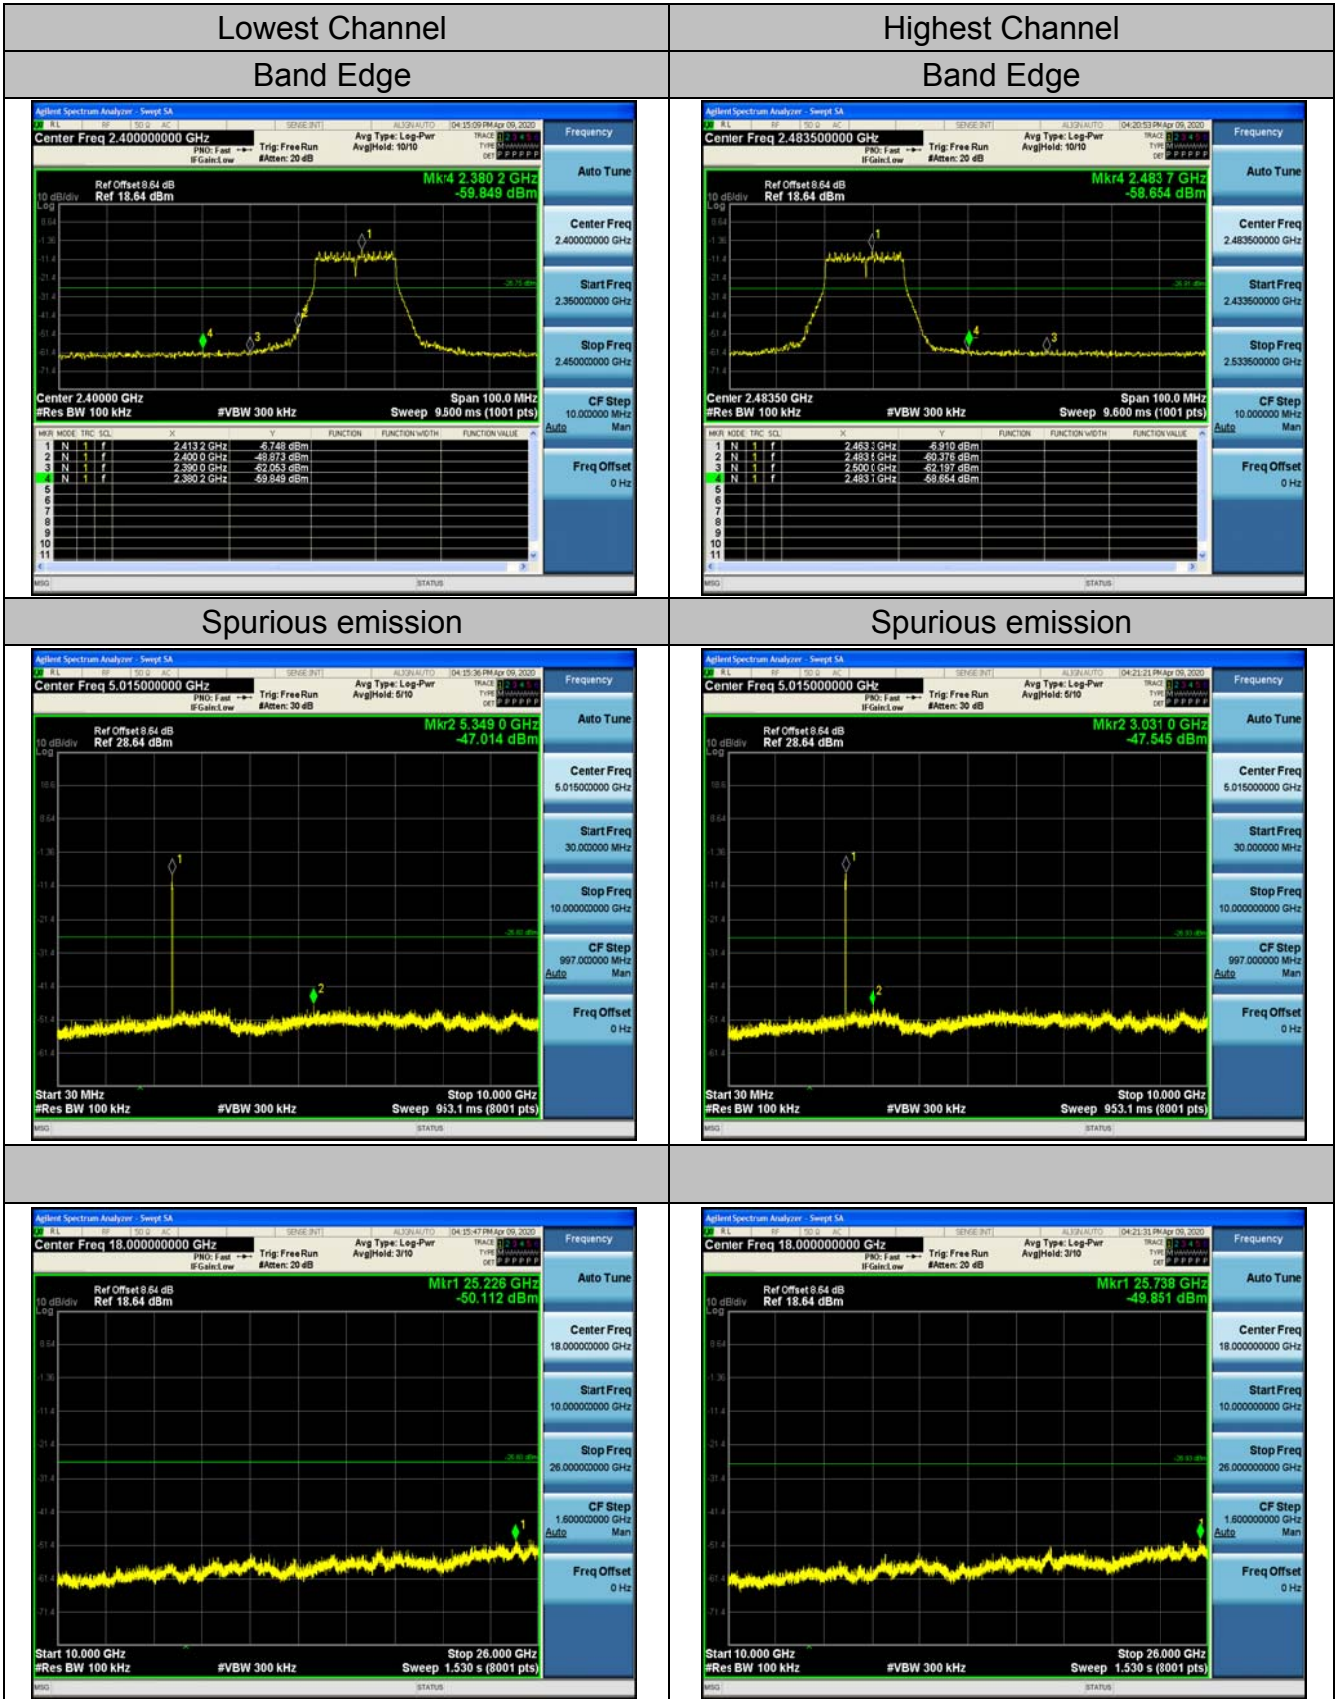




802.11n (HT40) Modulation

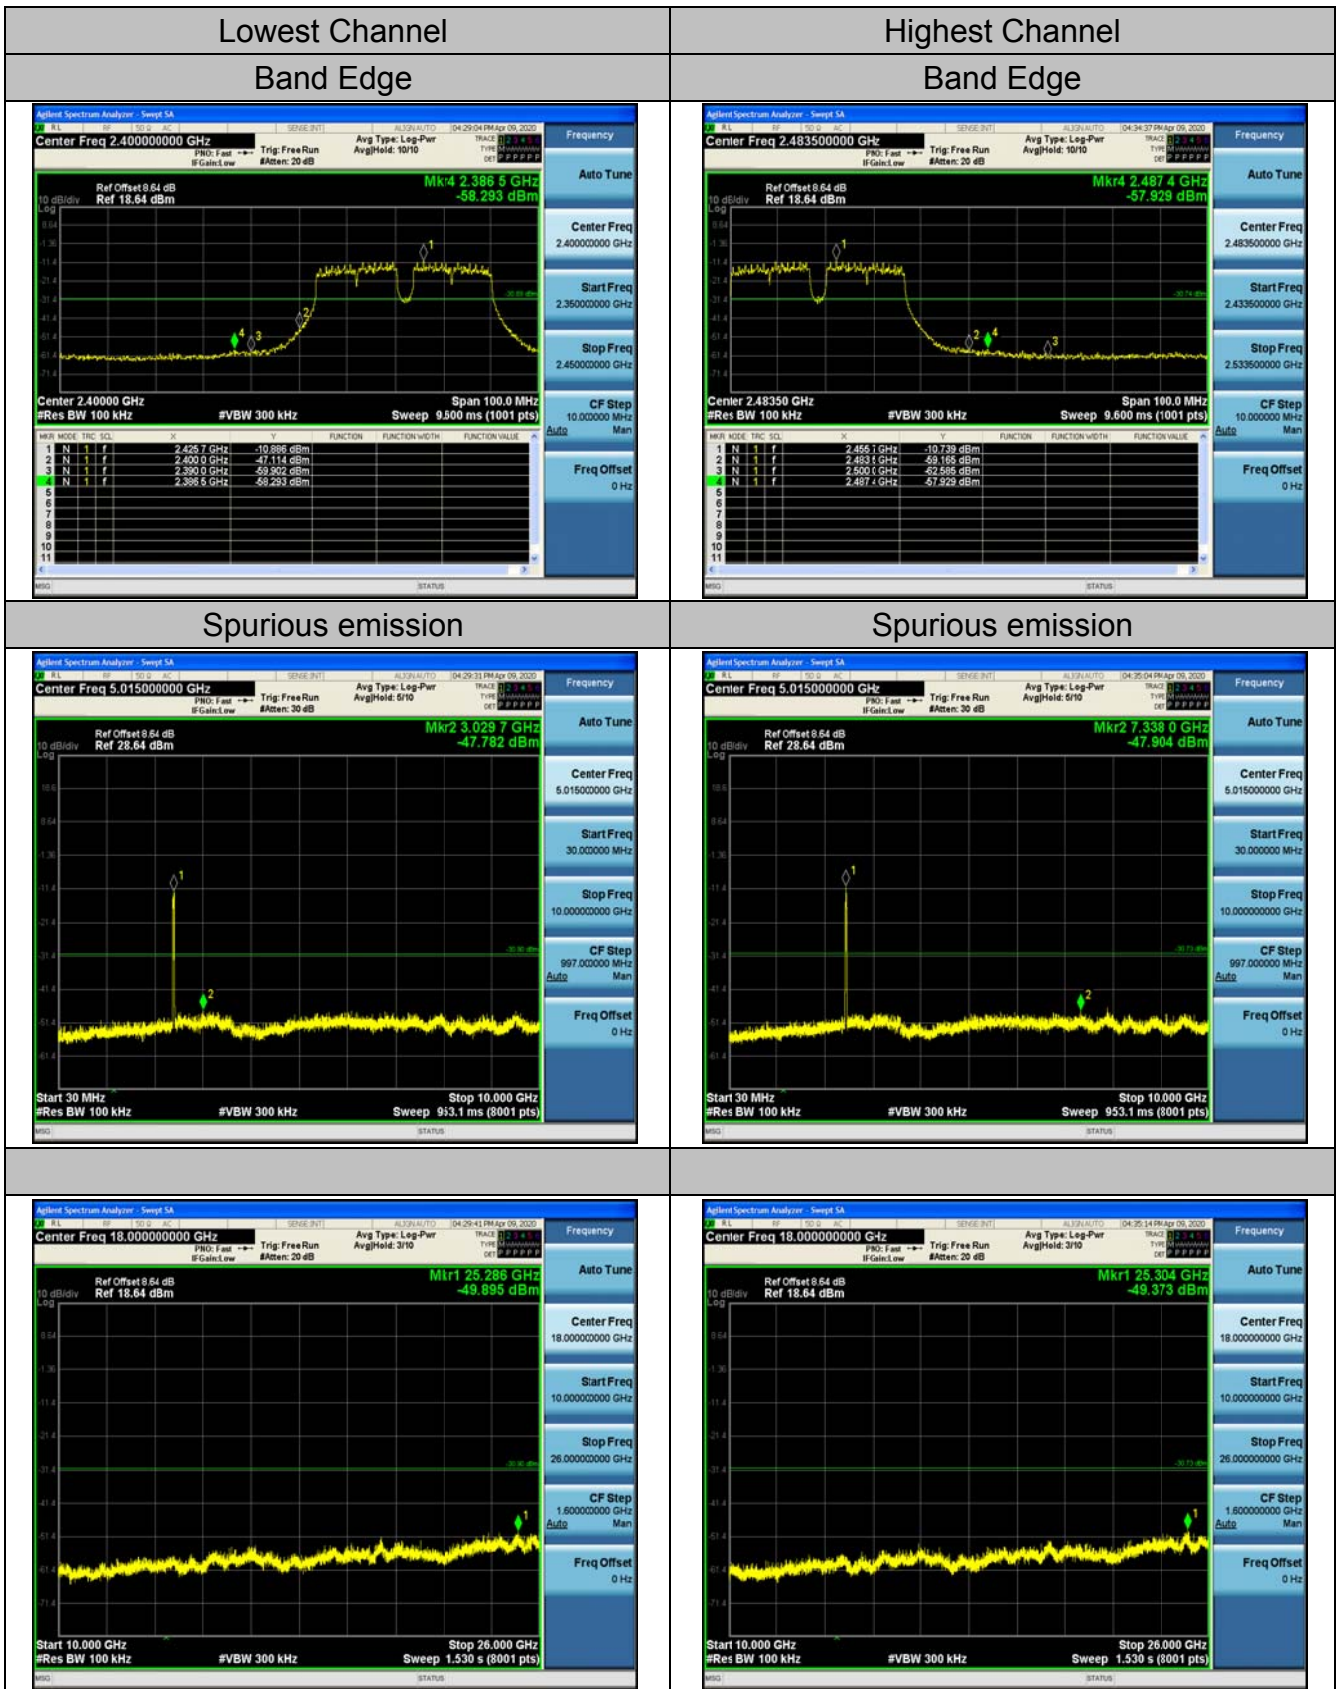


## 4.6. Radiated Spurious Emission Measurement

### Test Specification

<b>Test Requirement:</b>	FCC Part 15 C Section 15.209					
<b>Test Method:</b>	ANSI C63.10: 2013					
<b>Frequency Range:</b>	9 kHz to 25 GHz					
<b>Measurement Distance:</b>	3 m					
<b>Antenna Polarization:</b>	Horizontal & Vertical					
<b>Operation mode:</b>	Transmitting mode with modulation					
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
		Peak	1MHz	10Hz	Average Value	
<b>Limit:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)			
	0.009-0.490	2400/F(KHz)	300			
	0.490-1.705	24000/F(KHz)	30			
	1.705-30	30	30			
	30-88	100	3			
	88-216	150	3			
	216-960	200	3			
	Above 960	500	3			
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector		
	Above 1GHz	500	3	Average		
	5000	3	Peak			
<b>Test setup:</b>	For radiated emissions below 30MHz					
	<p>The diagram shows a test setup for radiated emissions below 30MHz. An Equipment Under Test (EUT) is placed on a turn table at a height of 0.8 meters. The turn table is positioned 3 meters away from an RX Antenna, which is mounted at a height of 1 meter. The RX Antenna is connected to a Receiver. The entire setup is on a Ground Plane. The background is a shaded area representing the measurement environment.</p>					
	30MHz to 1GHz					

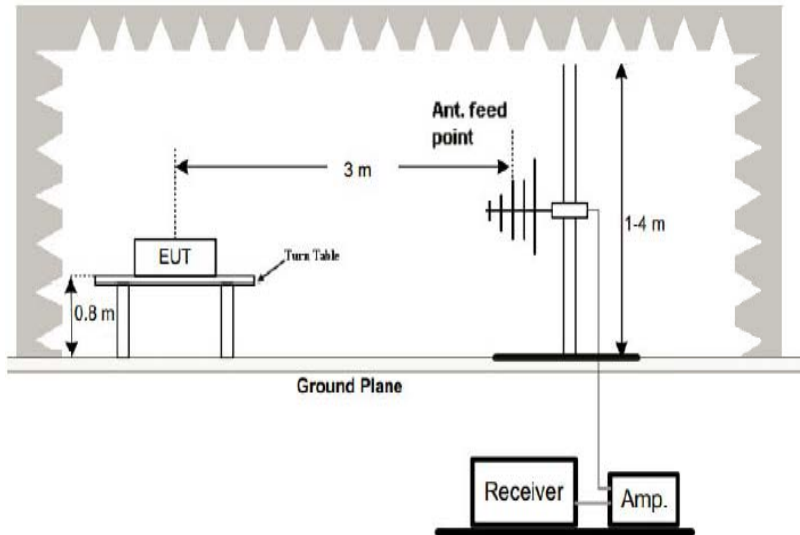

Above 1GHz

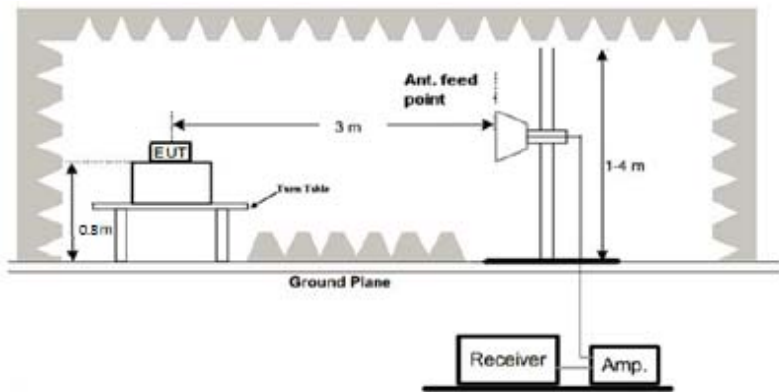

**Test Procedure:**

1. For the radiated emission test below 1GHz:  
 The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.  
 For the radiated emission test above 1GHz:  
 Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final



	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"><li>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</li><li>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</li><li>5. Use the following spectrum analyzer settings:<ol style="list-style-type: none"><li>(1) Span shall wide enough to fully capture the emission being measured;</li><li>(2) Set RBW=120 kHz for <math>f &lt; 1</math> GHz; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold;</li><li>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement.</li></ol>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. <math>VBW \geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</li></ol>
<b>Test results:</b>	PASS

**Test Instruments**

<b>Radiated Emission Test Site (966)</b>				
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Due</b>
Receiver	R&S	ESCI-7	HKE-010	Dec. 25, 2020
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 25, 2020
Preamplifier	EMCI	EMC051845 SE	HKE-015	Dec. 25, 2020
Preamplifier	Agilent	83051A	HKE-016	Dec. 25, 2020
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 25, 2020
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 25, 2020
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 25, 2020
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 25, 2020
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Dec. 25, 2020
High gain antenna	Schwarzbeck	LB-180400K F	HKE-054	Dec. 25, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## Test Data

All the test modes completed for test. Only the worst result of (802.11b at 2412MHz) was reported as below:

### Below 1GHz

#### Horizontal

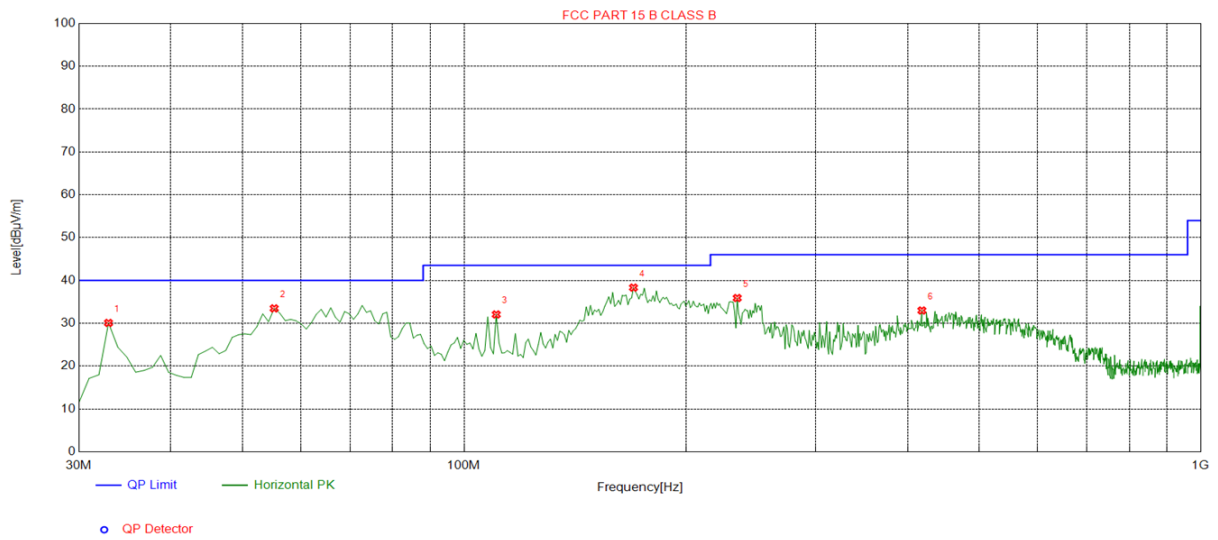


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.9129	-16.22	46.30	30.08	40.00	9.92	100	12	Horizontal
2	55.2452	-14.44	47.91	33.47	40.00	6.53	100	360	Horizontal
3	110.5906	-15.53	47.58	32.05	43.50	11.45	100	310	Horizontal
4	169.8198	-17.32	55.64	38.32	43.50	5.18	100	314	Horizontal
5	234.8749	-14.09	49.98	35.89	46.00	10.11	100	12	Horizontal
6	418.3884	-10.06	43.04	32.98	46.00	13.02	100	44	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level





**Vertical**

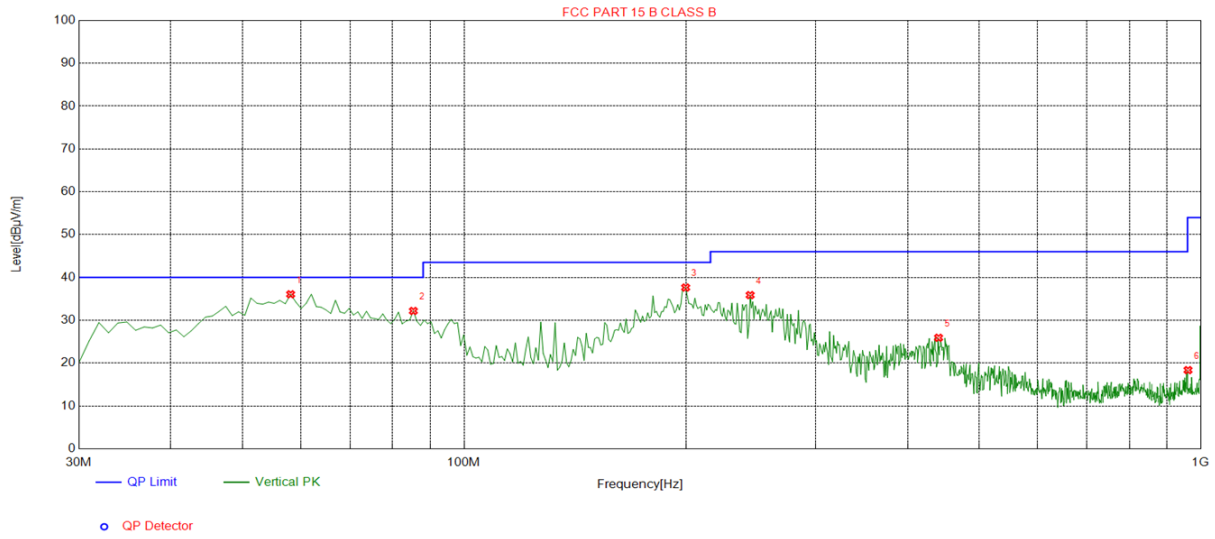

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.1582	-14.88	50.94	36.06	40.00	3.94	100	35	Vertical
2	85.3453	-18.19	50.36	32.17	40.00	7.83	100	348	Vertical
3	199.9199	-15.07	52.71	37.64	43.50	5.86	100	348	Vertical
4	244.5846	-13.64	49.51	35.87	46.00	10.13	100	348	Vertical
5	440.7207	-9.39	35.30	25.91	46.00	20.09	100	12	Vertical
6	961.1612	-1.39	19.75	18.36	54.00	35.64	100	18	Vertical

Remark: Factor = Cable loss + Antenna factor – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level  
 Harmonics and Spurious Emissions

**Frequency Range (9 kHz-30MHz)**

Frequency (MHz)	Level@3m (dBµV/m)	Limit@3m (dBµV/m)
--	--	--
--	--	--
--	--	--
--	--	--

- Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor  
 2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

**Above 1GHz****RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	59.42	-3.64	55.78	74	-18.22	peak
4824	46.45	-3.64	42.81	54	-11.19	AVG
7236	51.66	-0.95	50.71	74	-23.29	peak
7236	41.52	-0.95	40.57	54	-13.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	62.44	-3.64	58.8	74	-15.2	peak
4824	46.52	-3.64	42.88	54	-11.12	AVG
7236	52.62	-0.95	51.67	74	-22.33	peak
7236	42.45	-0.95	41.5	54	-12.5	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	60.33	-3.51	56.82	74	-17.18	peak
4874	45.52	-3.51	42.01	54	-11.99	AVG
7311	54.28	-0.82	53.46	74	-20.54	peak
7311	37.33	-0.82	36.51	54	-17.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	63.61	-3.51	60.1	74	-13.9	peak
4874	46.31	-3.51	42.8	54	-11.2	AVG
7311	58.33	-0.82	57.51	74	-16.49	peak
7311	41.21	-0.82	40.39	54	-13.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	60.51	-3.43	57.08	74	-16.92	peak
4924	41.35	-3.43	37.92	54	-16.08	AVG
7386	52.54	-0.75	51.79	74	-22.21	peak
7386	41.36	-0.75	40.61	54	-13.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	59.39	-3.43	55.96	74	-18.04	peak
4924	46.34	-3.43	42.91	54	-11.09	AVG
7386	50.31	-0.75	49.56	74	-24.44	peak
7386	39.52	-0.75	38.77	54	-15.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	60.23	-3.64	56.59	74	-17.41	peak
4824	47.42	-3.64	43.78	54	-10.22	AVG
7236	52.62	-0.95	51.67	74	-22.33	peak
7236	40.54	-0.95	39.59	54	-14.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	54.38	-3.64	50.74	74	-23.26	peak
4824	42.51	-3.64	38.87	54	-15.13	AVG
7236	56.55	-0.95	55.6	74	-18.4	peak
7236	42.61	-0.95	41.66	54	-12.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	57.63	-3.51	54.12	74	-19.88	peak
4874	43.44	-3.51	39.93	54	-14.07	AVG
7311	51.61	-0.82	50.79	74	-23.21	peak
7311	41.53	-0.82	40.71	54	-13.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	57.74	-3.51	54.23	74	-19.77	peak
4874	43.34	-3.51	39.83	54	-14.17	AVG
7311	56.54	-0.82	55.72	74	-18.28	peak
7311	40.64	-0.82	39.82	54	-14.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	60.34	-3.43	56.91	74	-17.09	peak
4924	44.56	-3.43	41.13	54	-12.87	AVG
7386	53.61	-0.75	52.86	74	-21.14	peak
7386	40.37	-0.75	39.62	54	-14.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	53.45	-3.43	50.02	74	-23.98	peak
4924	42.66	-3.43	39.23	54	-14.77	AVG
7386	49.74	-0.75	48.99	74	-25.01	peak
7386	36.56	-0.75	35.81	54	-18.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	60.41	-3.64	56.77	74	-17.23	peak
4824	40.54	-3.64	36.9	54	-17.1	AVG
7236	53.64	-0.95	52.69	74	-21.31	peak
7236	38.34	-0.95	37.39	54	-16.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	59.43	-3.64	55.79	74	-18.21	peak
4824	45.35	-3.64	41.71	54	-12.29	AVG
7236	50.34	-0.95	49.39	74	-24.61	peak
7236	41.35	-0.95	40.4	54	-13.6	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.





MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	56.56	-3.51	53.05	74.00	-20.95	peak
4874	43.42	-3.51	39.91	54.00	-14.09	AVG
7311	51.57	-0.82	50.75	74.00	-23.25	peak
7311	43.35	-0.82	42.53	54.00	-11.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	61.41	-3.51	57.90	74.00	-16.10	peak
4874	44.52	-3.51	41.01	54.00	-12.99	AVG
7311	52.51	-0.82	51.69	74.00	-22.31	peak
7311	34.51	-0.82	33.69	54.00	-20.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	59.38	-3.43	55.95	74	-18.05	peak
4924	44.54	-3.43	41.11	54	-12.89	AVG
7386	51.43	-0.75	50.68	74	-23.32	peak
7386	37.28	-0.75	36.53	54	-17.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	59.21	-3.43	55.78	74	-18.22	peak
4924	43.33	-3.43	39.9	54	-14.1	AVG
7386	55.17	-0.75	54.42	74	-19.58	peak
7386	40.35	-0.75	39.6	54	-14.4	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4844	63.31	-3.63	59.68	74	-14.32	peak
4844	41.45	-3.63	37.82	54	-16.18	AVG
7266	54.51	-0.94	53.57	74	-20.43	peak
7266	38.44	-0.94	37.5	54	-16.5	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4844	61.64	-3.63	58.01	74	-15.99	peak
4844	40.59	-3.63	36.96	54	-17.04	AVG
7266	54.33	-0.94	53.39	74	-20.61	peak
7266	34.45	-0.94	33.51	54	-20.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	59.31	-3.51	55.8	74	-18.2	peak
4874	39.64	-3.51	36.13	54	-17.87	AVG
7311	54.35	-0.82	53.53	74	-20.47	peak
7311	34.42	-0.82	33.6	54	-20.4	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	60.27	-3.51	56.76	74	-17.24	peak
4874	45.56	-3.51	42.05	54	-11.95	AVG
7311	51.76	-0.82	50.94	74	-23.06	peak
7311	41.34	-0.82	40.52	54	-13.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	60.38	-3.43	56.95	74	-17.05	peak
4904	44.29	-3.43	40.86	54	-13.14	AVG
7356	51.45	-0.75	50.7	74	-23.3	peak
7356	38.55	-0.75	37.8	54	-16.2	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	59.44	-3.43	56.01	74	-17.99	peak
4904	39.54	-3.43	36.11	54	-17.89	AVG
7356	53.71	-0.75	52.96	74	-21.04	peak
7356	44.55	-0.75	43.8	54	-10.2	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) )The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	58.44	-5.81	52.63	74	-21.37	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	63.73	-5.84	57.89	74	-16.11	peak
2390.00	46.29	-5.84	40.45	54	-13.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	59.34	-5.81	53.53	74	-20.47	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	67.25	-5.84	61.41	74	-12.59	peak
2390.00	46.41	-5.84	40.57	54	-13.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	59.79	-5.81	53.98	74	-20.02	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	58.24	-6.06	52.18	74	-21.82	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	58.49	-5.81	52.68	74	-21.32	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	59.38	-6.06	53.32	74	-20.68	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

## Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	57.42	-5.81	51.61	74	-22.39	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	65.66	-5.84	59.82	74	-14.18	peak
2390.00	51.41	-5.84	45.57	54	-8.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	59.37	-5.81	53.56	74	-20.44	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	64.49	-5.84	58.65	74	-15.35	peak
2390.00	51.61	-5.84	45.77	54	-8.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.





Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	58.52	-5.65	52.87	74	-21.13	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	58.35	-5.65	52.7	74	-21.3	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	58.54	-5.65	52.89	74	-21.11	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	59.31	-5.65	53.66	74	-20.34	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

## Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	57.54	-5.81	51.73	74	-22.27	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	66.42	-5.84	60.58	74	-13.42	peak
2390.00	46.32	-5.84	40.48	54	-13.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	59.32	-5.81	53.51	74	-20.49	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	65.57	-5.84	59.73	74	-14.27	peak
2390.00	47.69	-5.84	41.85	54	-12.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	59.75	-5.65	54.1	74	-19.9	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	57.31	-5.65	51.66	74	-22.34	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	57.62	-5.65	51.97	74	-22.03	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	58.33	-5.65	52.68	74	-21.32	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

## Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	57.35	-5.81	51.54	74	-22.46	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	63.39	-5.84	57.55	74	-16.45	peak
2390.00	51.54	-5.84	45.7	54	-8.3	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	56.43	-5.81	50.62	74	-23.38	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	64.26	-5.84	58.42	74	-15.58	peak
2390.00	50.31	-5.84	44.47	54	-9.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.50	57.46	-5.65	51.81	74	-22.19	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	58.49	-5.65	52.84	74	-21.16	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.50	57.35	-5.65	51.7	74	-22.3	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	56.23	-5.65	50.58	74	-23.42	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



## 4.7. ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a Internal Antenna, The directional gains of antenna used for transmitting is 1dBi.

### WIFI ANTENNA

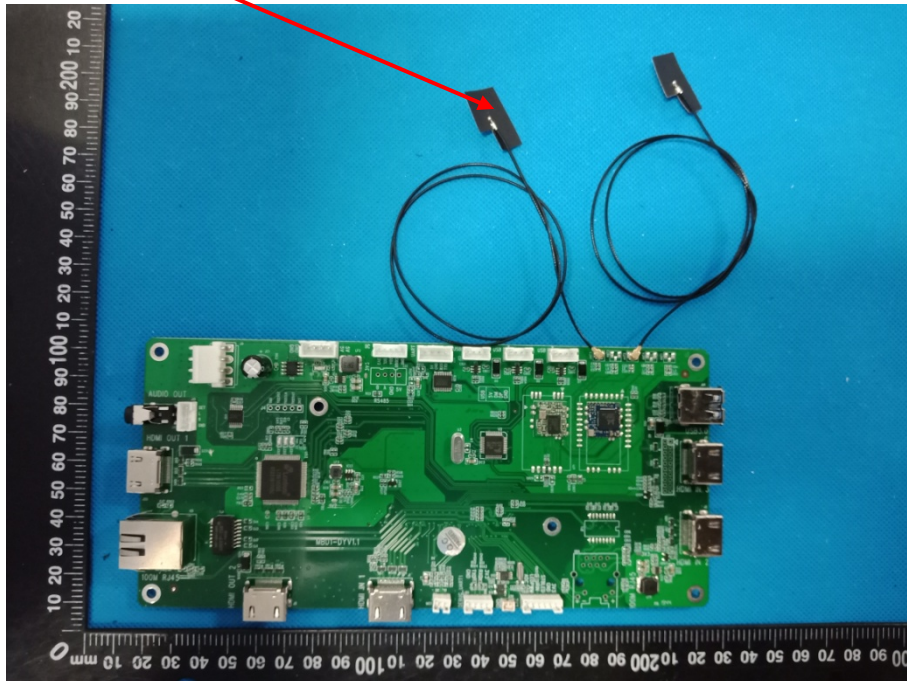

## 4.8. PHOTOGRAPH OF TEST

### Radiated Emission









#### **4.9. PHOTOS OF THE EUT**

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----